

TEST REPORT

ACCORDING TO:

**FCC 47CFR part 15 subpart C §15.247 (DTS) and subpart B,
RSS-247 Issue 2:2017, RSS-Gen Issue 5, ICES-003 Issue 6:2019**

FOR:

**Essence Smartcare Ltd.
Care Home Control panel
Part Number: ES7502HC
Model: ES7502HC_B
FCC ID: 2ARFP-ES7502HC_B
IC: 24417-ES7502HC_B**

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Test configuration	5
6.3	Changes made in EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Minimum 6 dB bandwidth	7
7.2	Field strength of spurious emissions	12
7.3	Peak output power	32
7.4	Band edge radiated emissions	38
7.5	Peak spectral power density	44
7.6	Conducted emissions	50
7.7	Antenna requirements	53
8	Emissions tests according to FCC 47CFR part 15 subpart B and ICES-003 requirements	54
8.1	Conducted emissions	54
8.2	Radiated emission measurements	57
9	APPENDIX A Test equipment and ancillaries used for tests	61
10	APPENDIX B Test equipment correction factors	62
11	APPENDIX C Test laboratory description	69
12	APPENDIX D Measurement uncertainties	70
13	APPENDIX E Specification references	71
14	APPENDIX F Abbreviations and acronyms	72



1 Applicant information

Client name: Essence Smartcare Ltd.
Address: 12 Abba Eban avenue, Ackerstein Tower Bldg. D, P.O.Box 2073, Herzliya 4612001, Israel
Telephone: +972 732 447 735
Fax: +972 9772 9962
E-mail: israelgo@essence-grp.com
Contact name: Mr. Israel Gottesman

2 Equipment under test attributes

Product name: Care Home Control panel
Product type: Transceiver
Part number: ES7502HC
Model(s): ES7502HC_B
Serial number: 1521094B0014A0BE
Hardware version: 2.C
Software release: 6.4
Receipt date 19-May-21

3 Manufacturer information

Manufacturer name: Essence Smartcare Ltd.
Address: 12 Abba Eban avenue, Ackerstein Tower Bldg. D, P.O.Box 2073, Herzliya 4612001, Israel
Telephone: +972 732 447 735
Fax: +972 9772 9962
E-Mail: israelgo@essence-grp.com
Contact name: Mr. Israel Gottesman

4 Test details

Project ID: 42061
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 19-May-21
Test completed: 31-May-21
Test specification(s): FCC 47CFR part 15 subpart C §15.247 (DTS) and subpart B, RSS-247 Issue 2:2017, ICES-003 Issue 6:2016



5 Tests summary

Test	Status
Transmitter characteristics	
FCC section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth	Pass
FCC section 15.247(b)3/ RSS-247 section 5.4(4), Peak output power	Pass
FCC section 15.247(i) / RSS-102 section 2.5.2, RF exposure	Pass, the exhibit to the application of certification is provided
FCC section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass
FCC section 15.247(d)/ RSS-247 section 5.5, Emissions at band edges	Pass
FCC section 15.247(e) / RSS-247 section 5.2(2), Peak power density	Pass
FCC section 15.207(a) / RSS-Gen section 8.8, Conducted emission	Pass
FCC section 15.203 / RSS-Gen section 6.8 Antenna requirement	Pass
Unintentional emissions	
FCC section 15.107/ ICES-003, Section 6.1, Class B, Conducted emission	Pass
FCC section 15.109/ RSS-Gen section 7.1.2 /ICES-003, Section 6.2, Class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. A. Morozov, test engineer, EMC & Radio	19-May-21 – 31-May-21	
Reviewed by:	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	15-Jun-21	
Approved by:	Mr. S. Samokha, technical manager, EMC & Radio	23-Jun-21	

6 EUT description


Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

The EUT (P/N ES7502HC model ES7502HC_B) is a control panel powered from AC via external adaptor and operating at 916.5MHz and 2.4GHz.

The EUT uses the cellular module (FCC ID: RI7LE910NAV2, IC: 5131A-LE910NAV2).

6.2 Test configuration

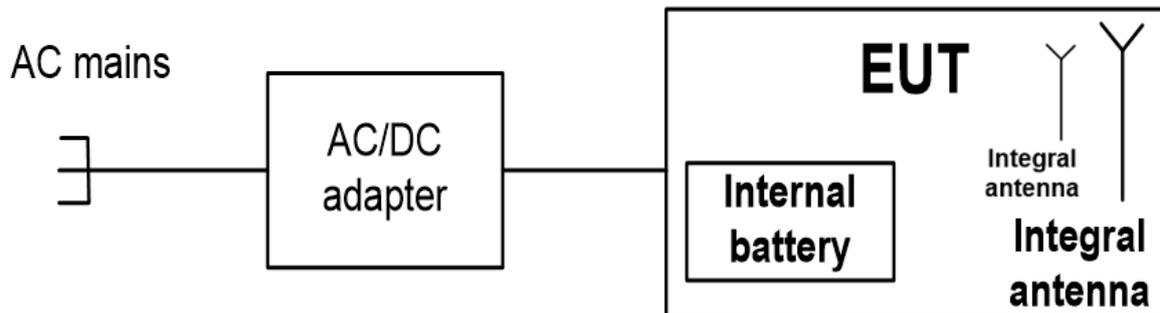

6.3 Changes made in EUT

No changes were implemented in the EUT during testing.



6.4 Transmitter characteristics

Type of equipment						
X	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Intended use		Condition of use				
	fixed	Always at a distance more than 2 m from all people				
X	mobile	Always at a distance more than 20 cm from all people				
	portable	May operate at a distance closer than 20 cm to human body				
Assigned frequency range		2400-2483.5 MHz				
Operating frequency range		2402 MHz, 2440 MHz, 2480 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector		NA		
		Peak output power		13.68 dBm		
Is transmitter output power variable?		X	No			
			Yes	continuous variable		
				stepped variable with stepsize		
				minimum RF power		
		maximum RF power				
Antenna connection						
	unique coupling	standard connector	X	integral		
					X with temporary RF connector without temporary RF connector	
Antenna/s technical characteristics						
Type	Manufacturer	Model number		Gain		
Integral	ESI	Printed		2dBi		
Data rate		1 Mbps				
Modulating test signal (baseband)		GFSK				
Transmitter power source						
	Battery	Nominal rated voltage	VDC	Battery type		
	DC	Nominal rated voltage	VDC			
X	AC mains	Nominal rated voltage	120 VAC	Frequency	50 Hz	



Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 46 %	Air Pressure: 1005 hPa	Power: 120 VAC, 50 Hz
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Minimum 6 dB bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1

Table 7.1.1 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1 energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 6 dB bandwidth test setup





Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 46 %	Air Pressure: 1005 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.1.2 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 2400.0 – 2483.5 MHz
DETECTOR USED: Peak
SWEEP TIME: Auto
RESOLUTION BANDWIDTH: 10 kHz
VIDEO BANDWIDTH: 100 kHz
MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc
MODULATION: GFSK
BIT RATE: 1 Mbps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency 2402 MHz				
2402.00	724.3	500.0	-224.3	Pass
Mid frequency 2440 MHz				
2440.00	729.3	500.0	-229.3	Pass
High frequency 2480 MHz				
2480.00	734.3	500.0	-234.3	Pass

Table 7.1.3 99% bandwidth test results

ASSIGNED FREQUENCY BAND: 2400.0 – 2483.5 MHz
DETECTOR USED: Peak
SWEEP TIME: Auto
RESOLUTION BANDWIDTH: 10 kHz
VIDEO BANDWIDTH: 100 kHz
MODULATION ENVELOPE REFERENCE POINTS: 99%
MODULATION: GFSK
BIT RATE: 1 Mbps

Carrier frequency, MHz	99% bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency 2402 MHz				
2402.00	1042.23	500.0	542.23	NA
Mid frequency 2440 MHz				
2440.00	1039.74	500.0	539.74	NA
High frequency 2480 MHz				
2480.00	1040.98	500.0	540.98	NA

Reference numbers of test equipment used


HL 4355	HL 5409	HL 4135	HL 5397					
---------	---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.




Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 46 %	Air Pressure: 1005 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.1.1 6 dB bandwidth test result at low frequency

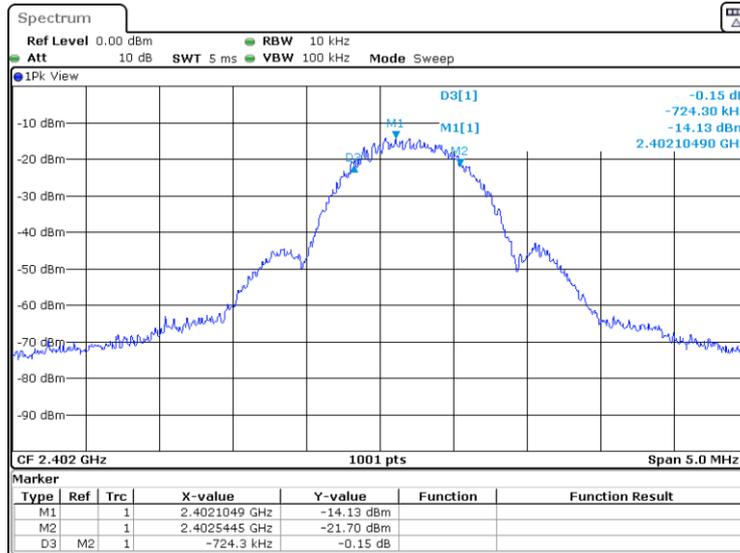


Plot 7.1.2 99% bandwidth test result at low frequency

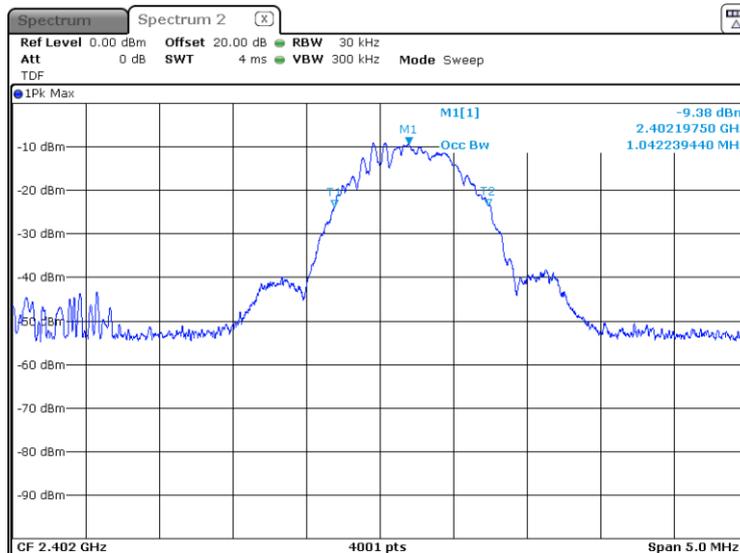




Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 46 %	Air Pressure: 1005 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.1.3 6 dB bandwidth test result at mid frequency

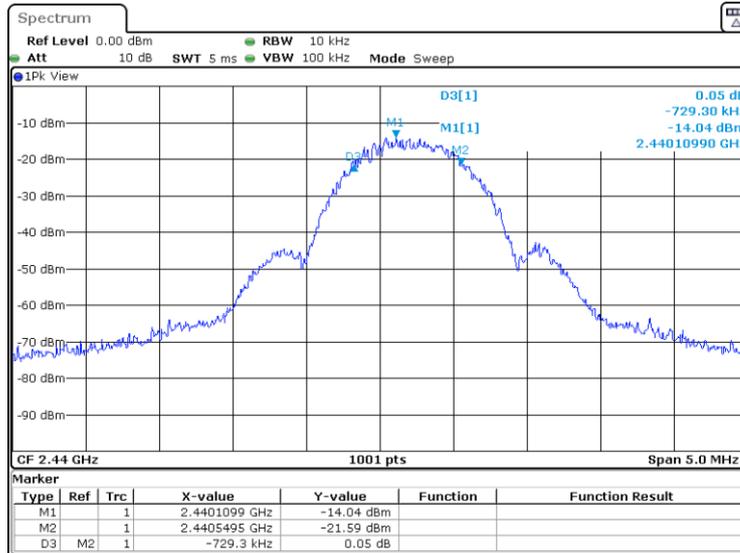


Plot 7.1.4 99% bandwidth test result at mid frequency

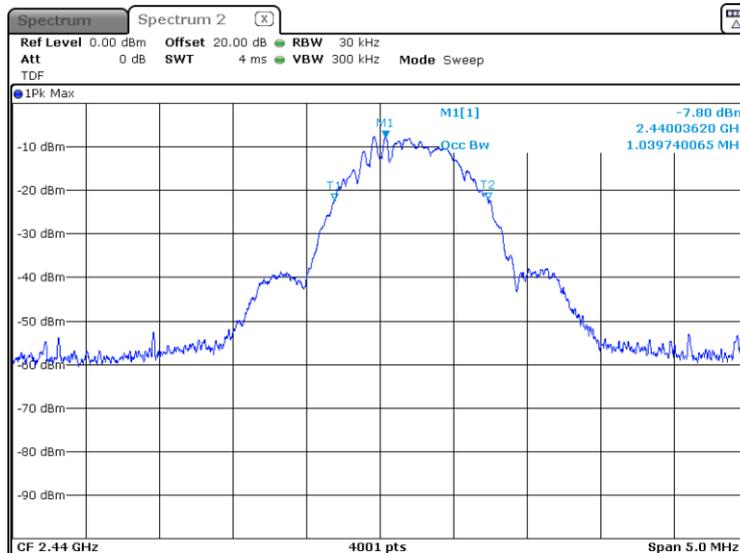




Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 46 %	Air Pressure: 1005 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.1.5 6 dB bandwidth test result at high frequency

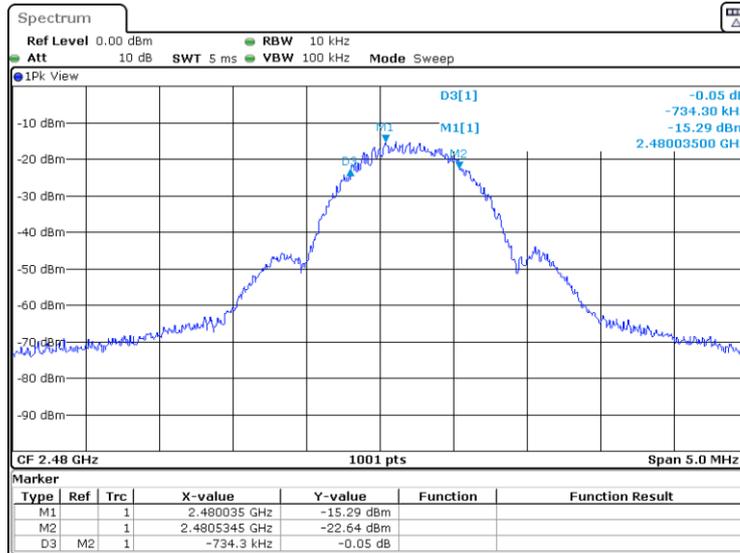

Plot 7.1.6 99% bandwidth test result at high frequency

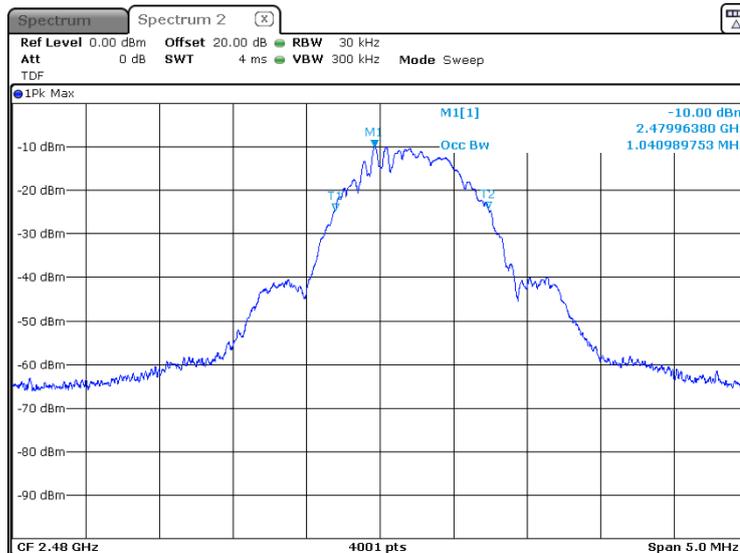



Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

7.2 Field strength of spurious emissions

7.2.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic		74.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.2.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.2.3.1 The EUT was set up as shown in Figure 7.2.2, Figure 7.2.3, energized and the performance check was conducted.

7.2.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.2.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz


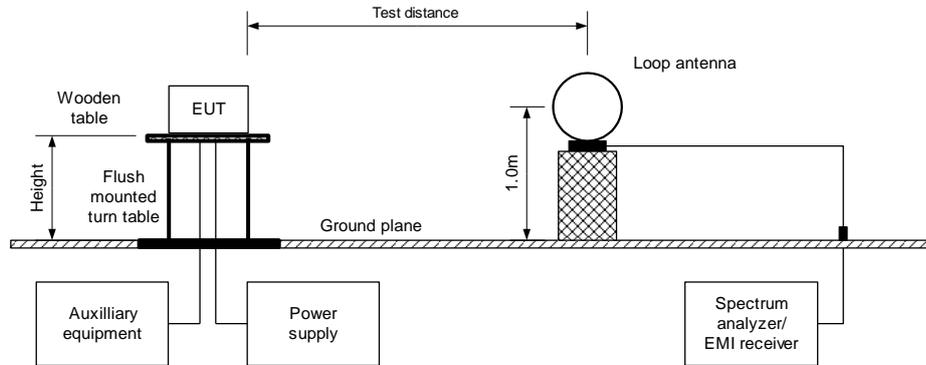



Figure 7.2.2 Setup for spurious emission field strength measurements in 30 -1000 MHz



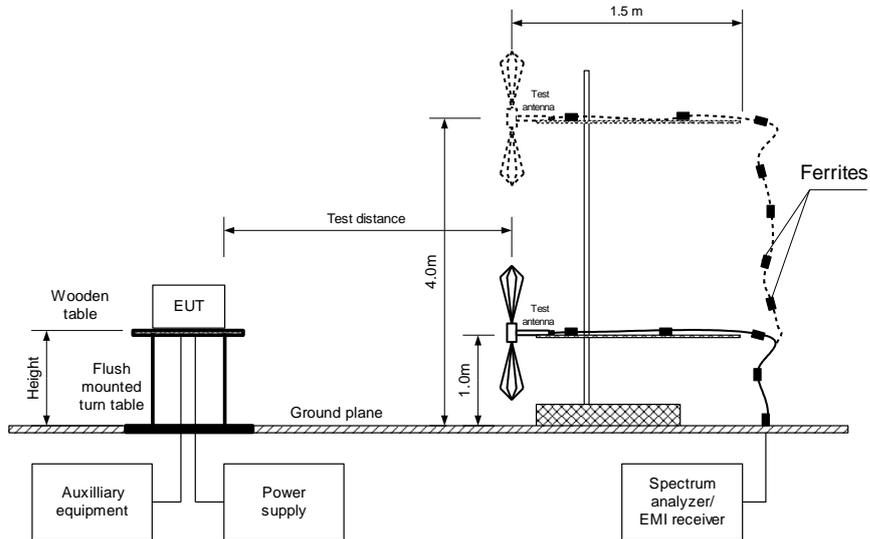

Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Figure 7.2.3 Setup for spurious emission field strength measurements above 1000 MHz

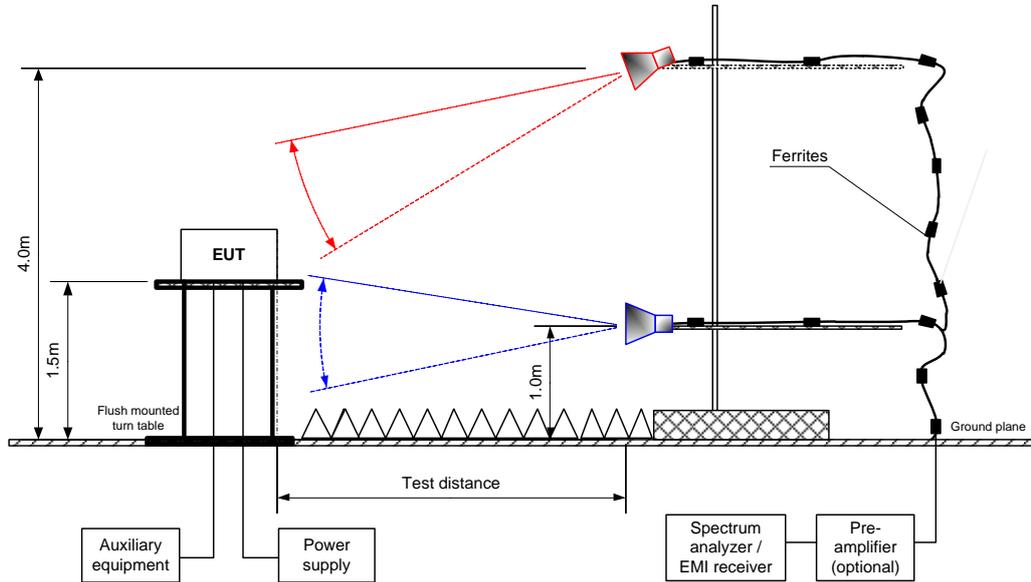



Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.2.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 2400.0 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 DUTY CYCLE: 100%
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency 2402 MHz									
295.263616	45.34	H	1.02	-77	109.95	64.61	20.00	44.61	Pass
Mid carrier frequency 2440 MHz									
292.304382	44.06	H	1.00	-111	108.93	64.87	20.00	44.87	Pass
High carrier frequency 2480 MHz									
300.989118	44.69	H	1.02	-77	108.14	63.45	20.00	43.45	Pass

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Attenuation below carrier – specification limit.



Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.2.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400.0 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 DUTY CYCLE: 100%
 TEST ANTENNA TYPE: Double ridged guide

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)				Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	Margin, dB***	
Low carrier frequency 2402 MHz											
All emissions are more than 20 dB below the limit											Pass
Mid carrier frequency 2440 MHz											
All emissions are more than 20 dB below the limit											Pass
High carrier frequency 2480 MHz											
All emissions are more than 20 dB below the limit											Pass

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Measured field strength - specification limit.
 ***- Margin = Calculated field strength - specification limit,
 where Calculated field strength = Measured field strength + average factor.

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
NA	NA	NA	NA	NA	NA

*- Average factor was calculated as follows
 for pulse train shorter than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$$

 for pulse train longer than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100ms} \times Number\ of\ bursts\ within\ 100ms \right)$$



Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.2.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400.0 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 DUTY CYCLE: 100%
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
Low carrier frequency 2402 MHz								
73.457685	32.02	28.90	40.00	-11.10	V	1.00	-29	Pass
131.011121	38.58	35.81	43.50	-7.69	V	1.04	12	
Mid carrier frequency 2440 MHz								
73.456324	31.76	28.27	40.00	-11.73	V	1.00	-31	Pass
131.011456	38.32	35.69	43.50	-7.81	V	1.04	18	
High carrier frequency 2480 MHz								
73.457896	31.64	28.22	40.00	-11.78	V	1.00	-27	Pass
131.012054	38.45	35.72	43.50	-7.78	V	1.04	15	

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.



Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.2.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.2.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL 4360	HL 3903	HL 4933	HL 446	HL 4956	HL 5288	HL 5085	HL 5112
HL 5902	HL 5286						

Full description is given in Appendix A.




Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.2.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical

Agilent

R T

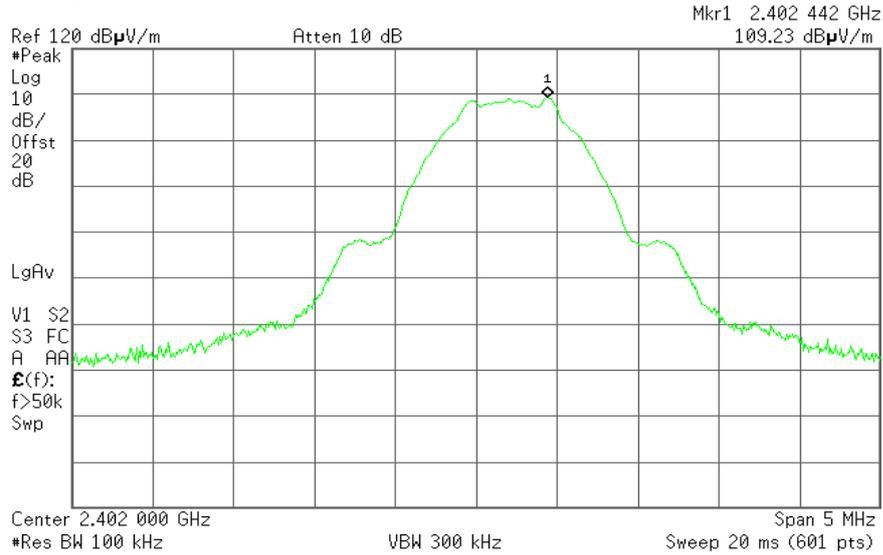


Plot 7.2.2 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal

Agilent

R T

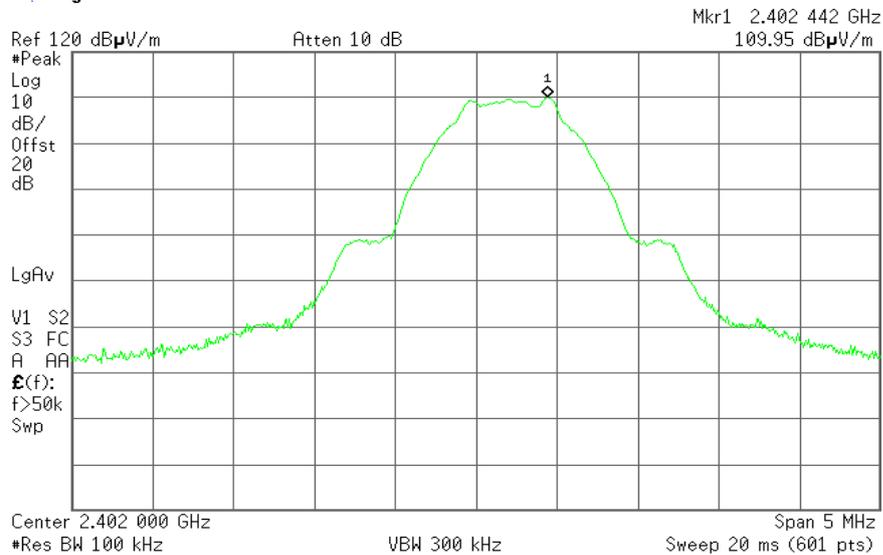




Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.2.3 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

Agilent

R T

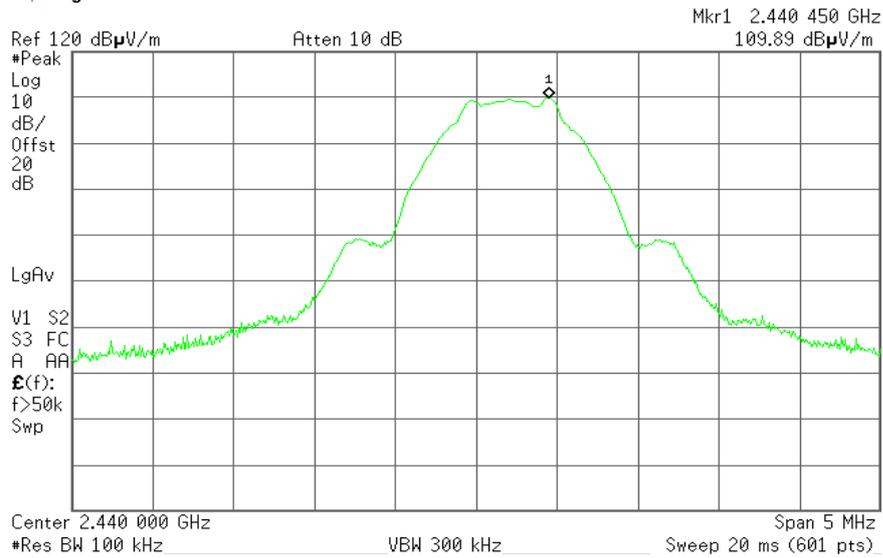


Plot 7.2.4 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

Agilent

R T

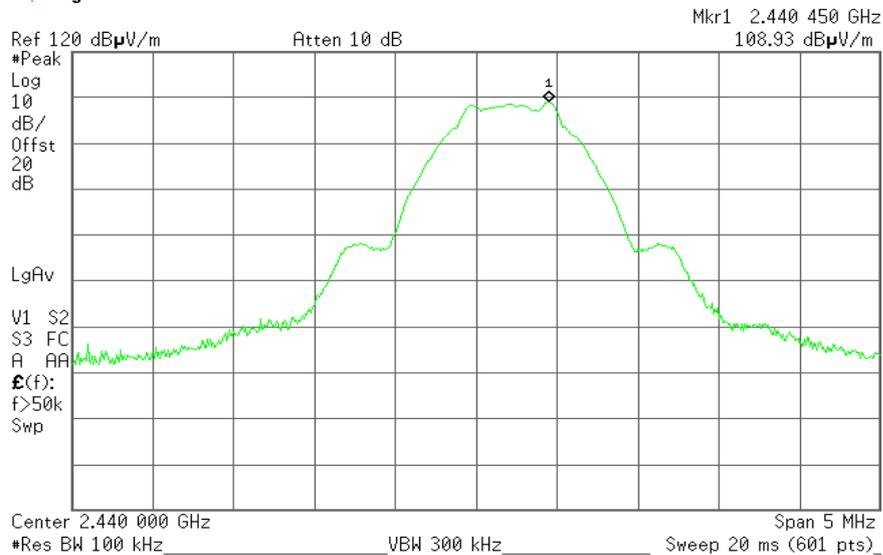




HERMON LABORATORIES

Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			


Plot 7.2.5 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical

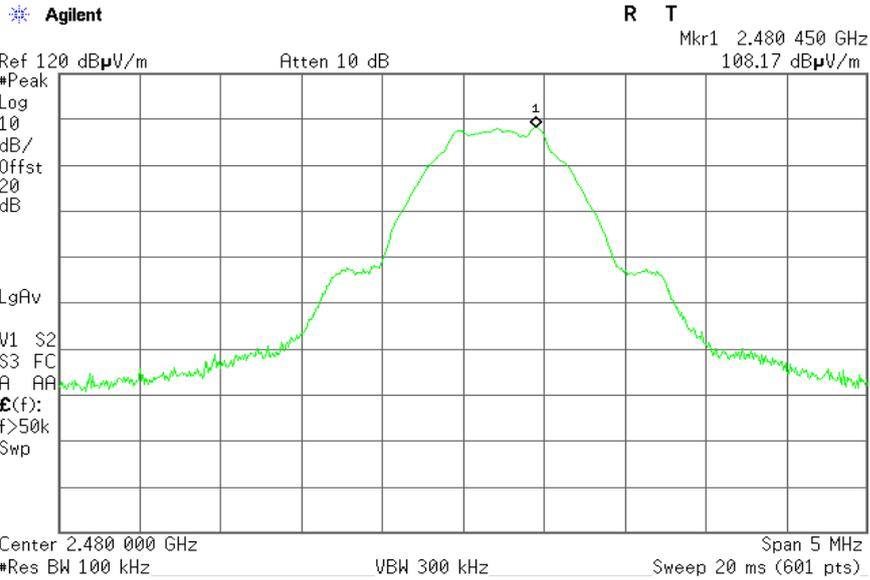

Plot 7.2.6 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal

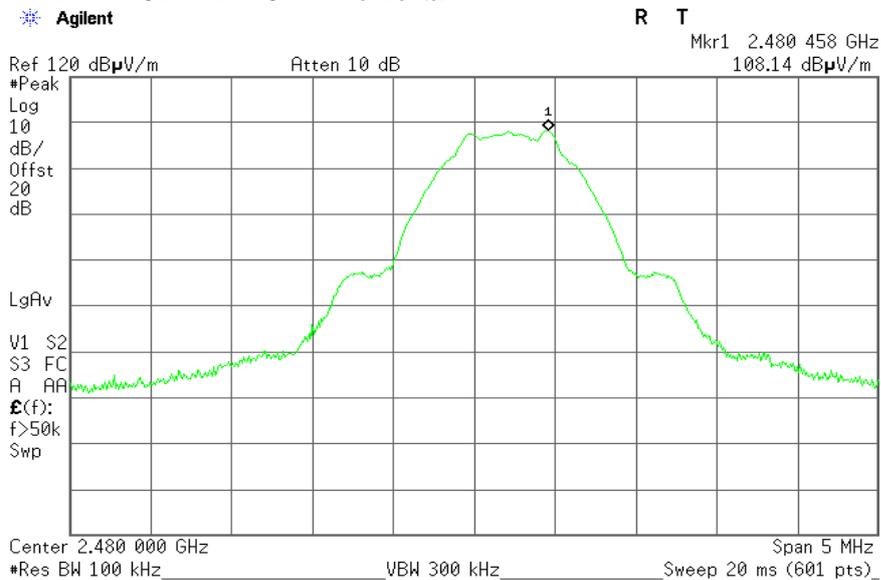




Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			


Plot 7.2.7 Radiated emission measurements from 9 kHz to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical

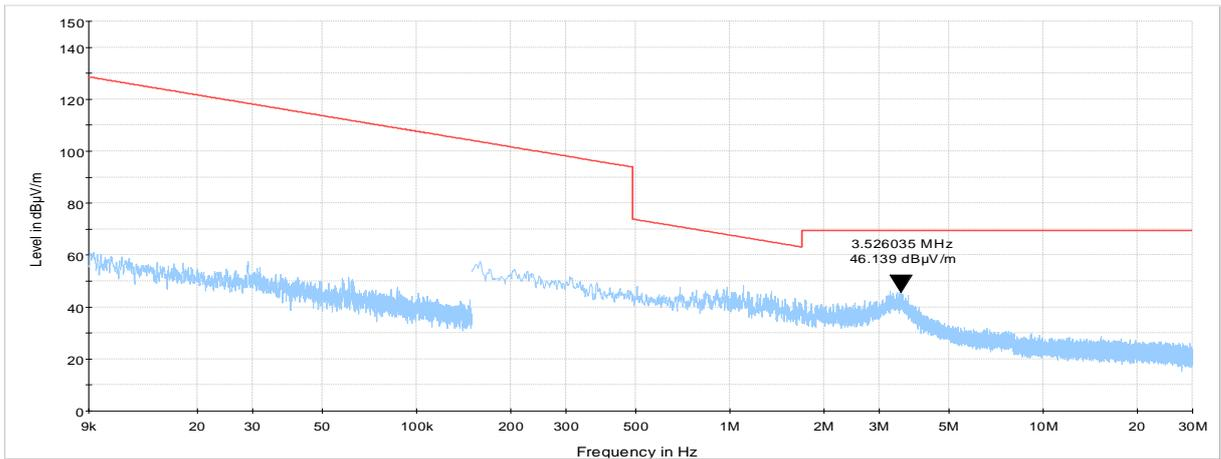

Plot 7.2.8 Radiated emission measurements from 9 kHz to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical

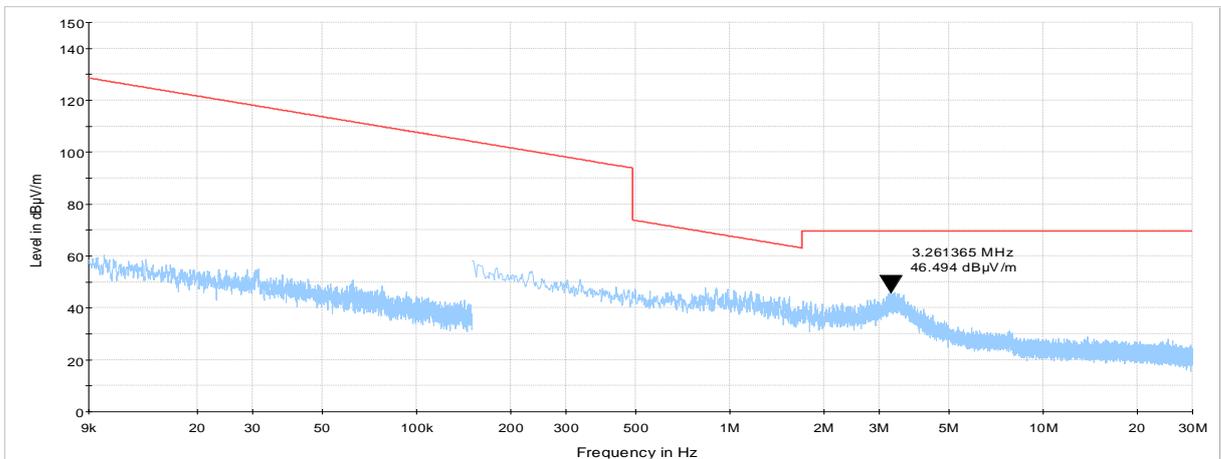




Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.2.9 Radiated emission measurements from 9 kHz to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

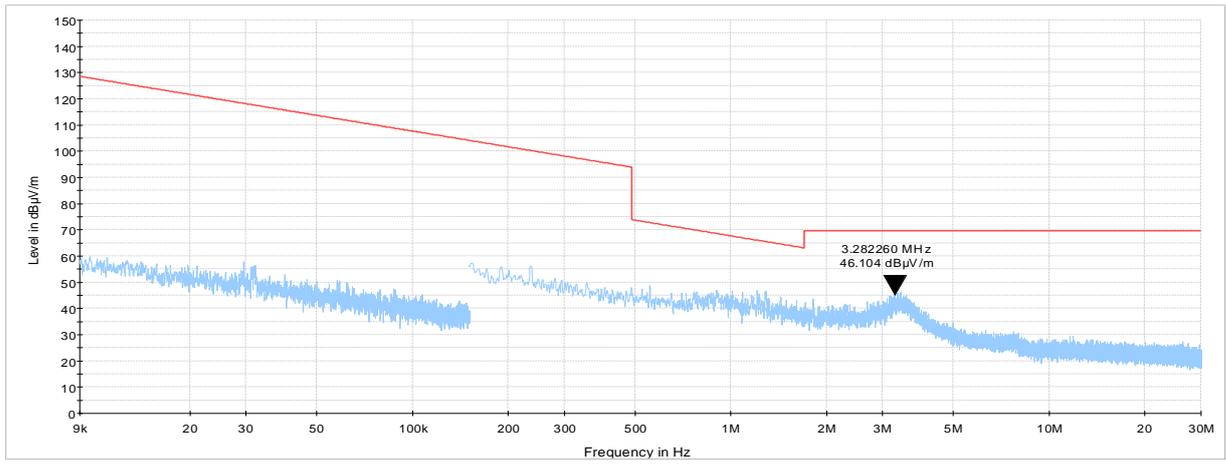




Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			


Plot 7.2.10 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

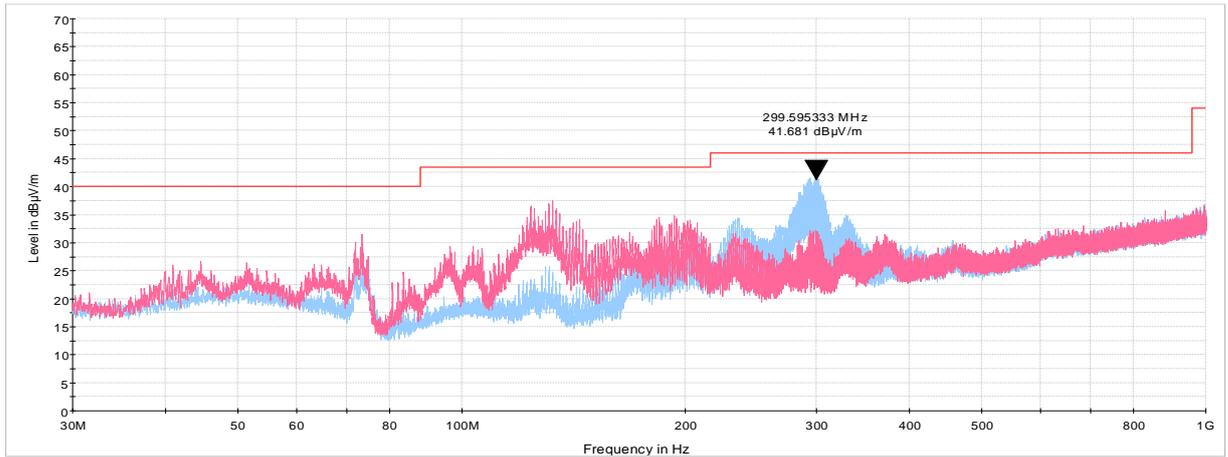

Plot 7.2.11 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

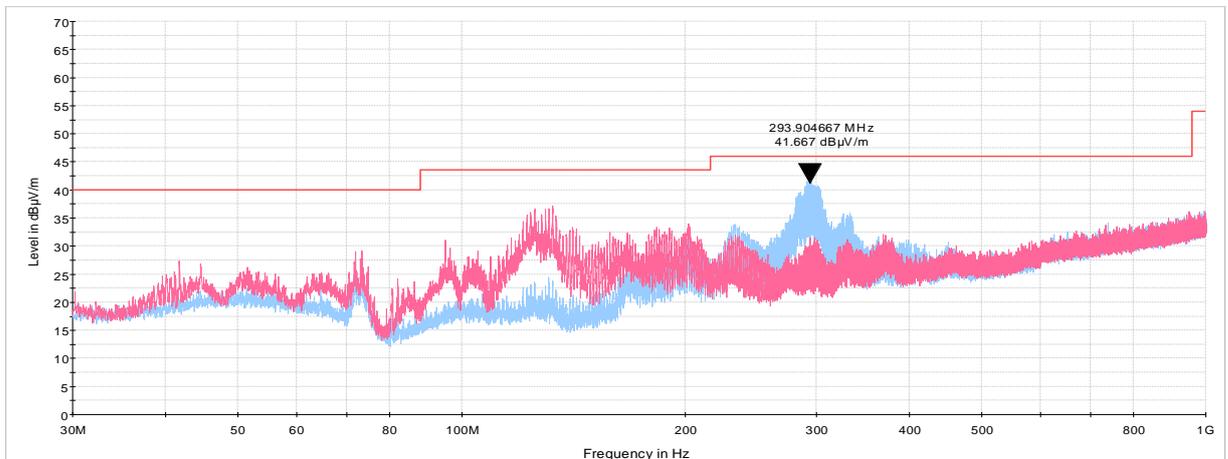




Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.2.12 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

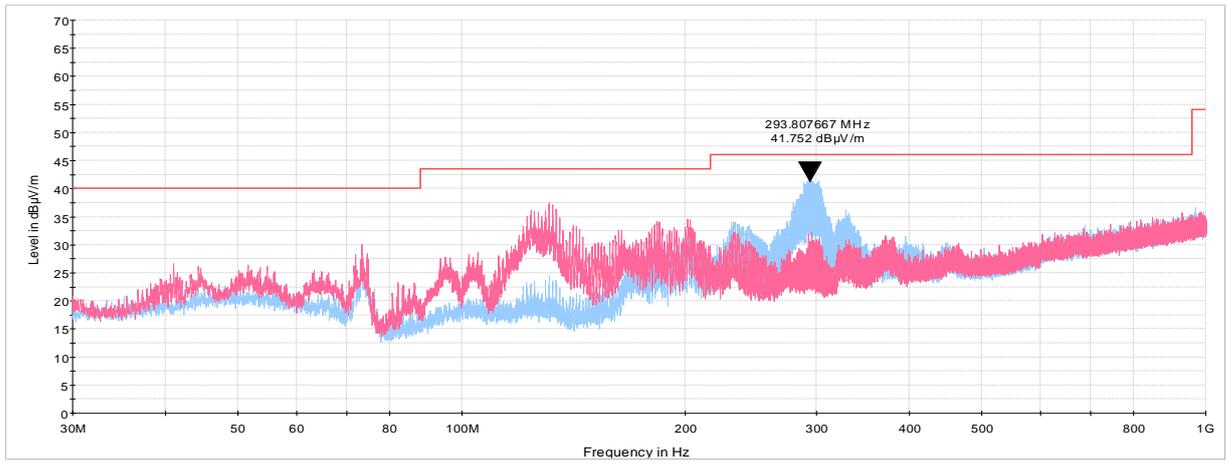




Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			


Plot 7.2.13 Radiated emission measurements from 1 to 4 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

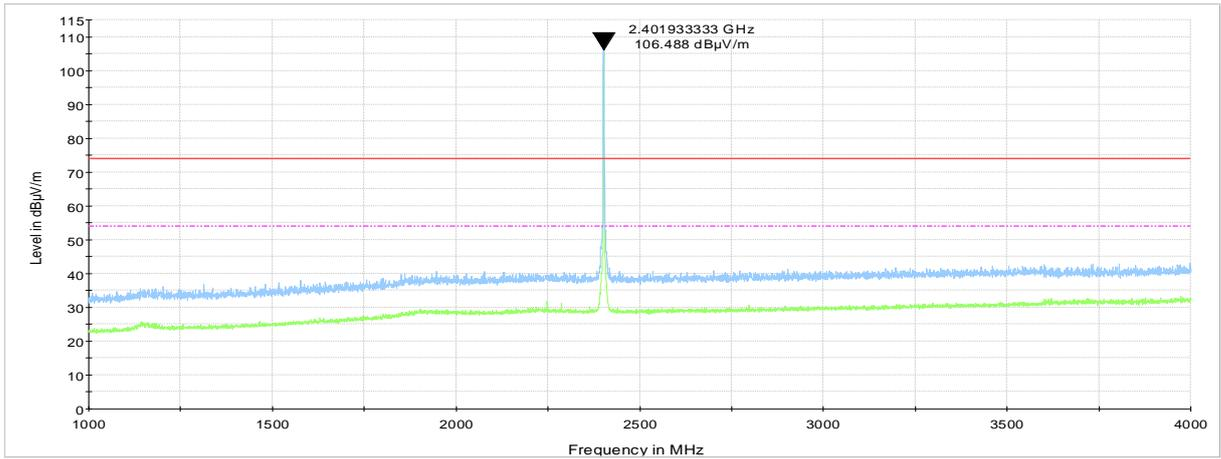

Plot 7.2.14 Radiated emission measurements from 1 to 4 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

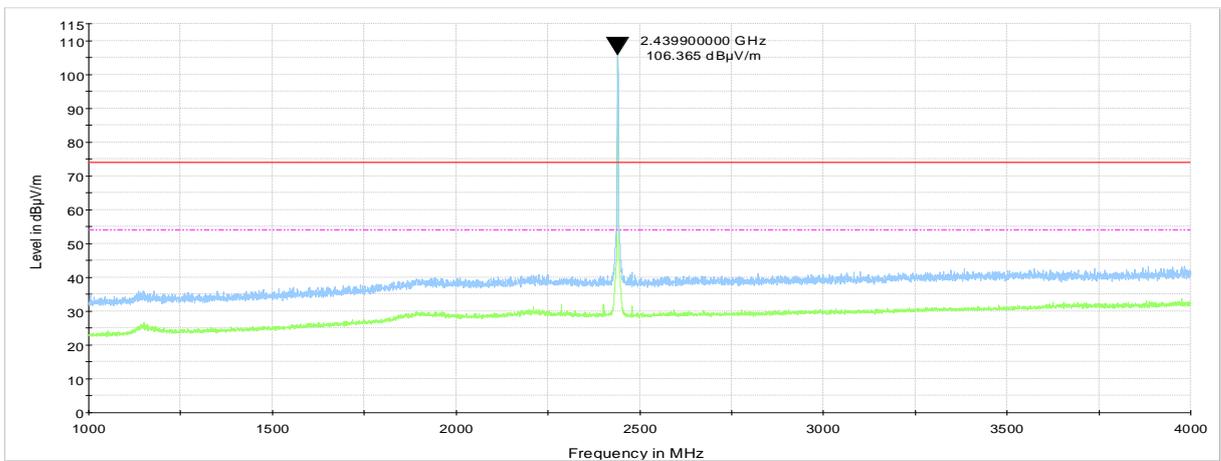




Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.2.15 Radiated emission measurements from 1 to 4 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

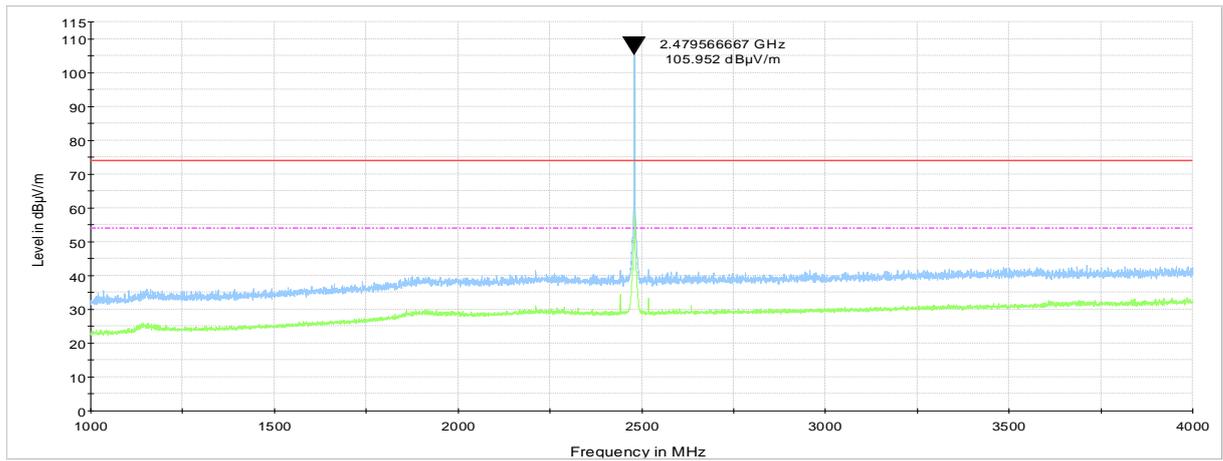




Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			


Plot 7.2.16 Radiated emission measurements from 4 to 18 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

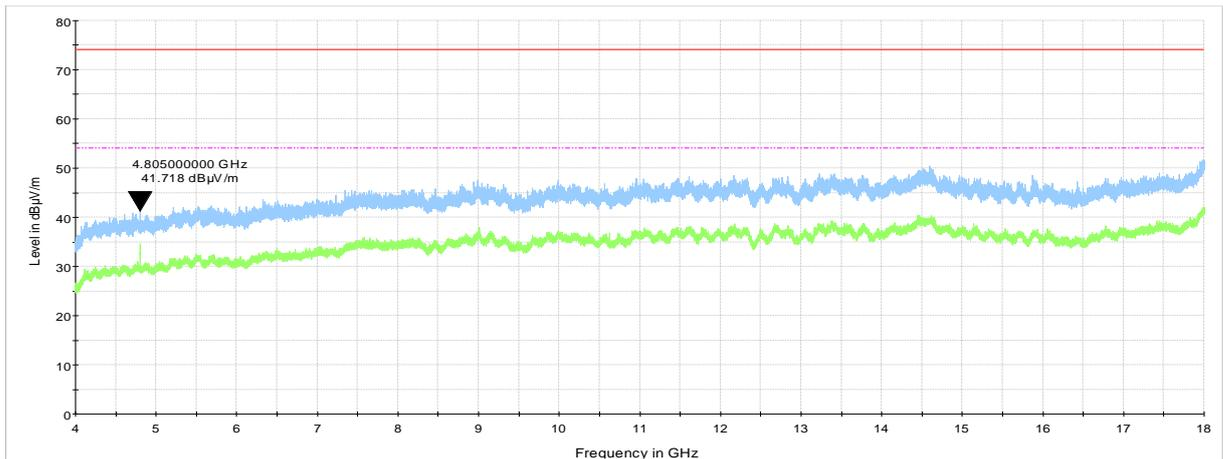

Plot 7.2.17 Radiated emission measurements from 4 to 18 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

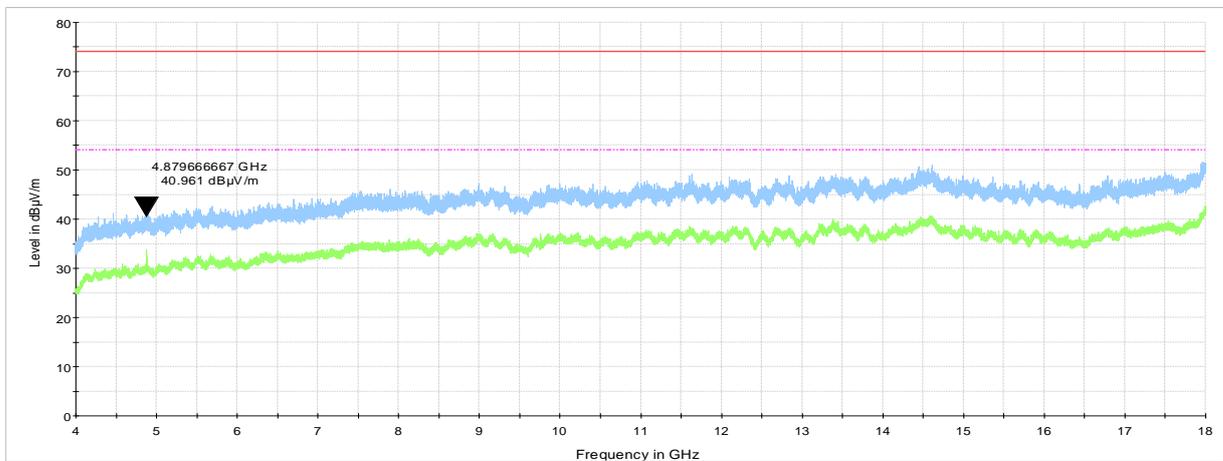




Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.2.18 Radiated emission measurements from 4 to 18 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

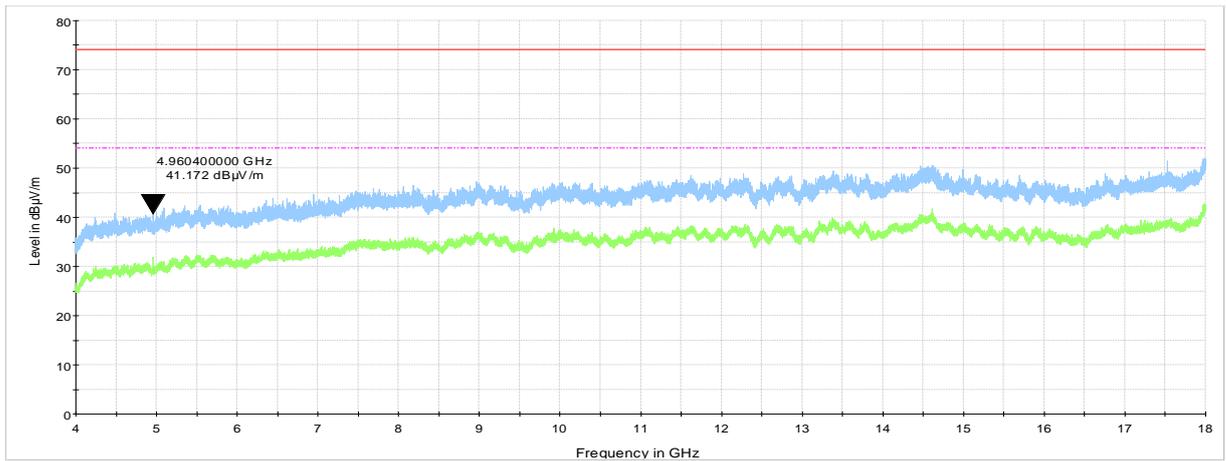




Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			


Plot 7.2.19 Radiated emission measurements from 18 GHz to 25 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

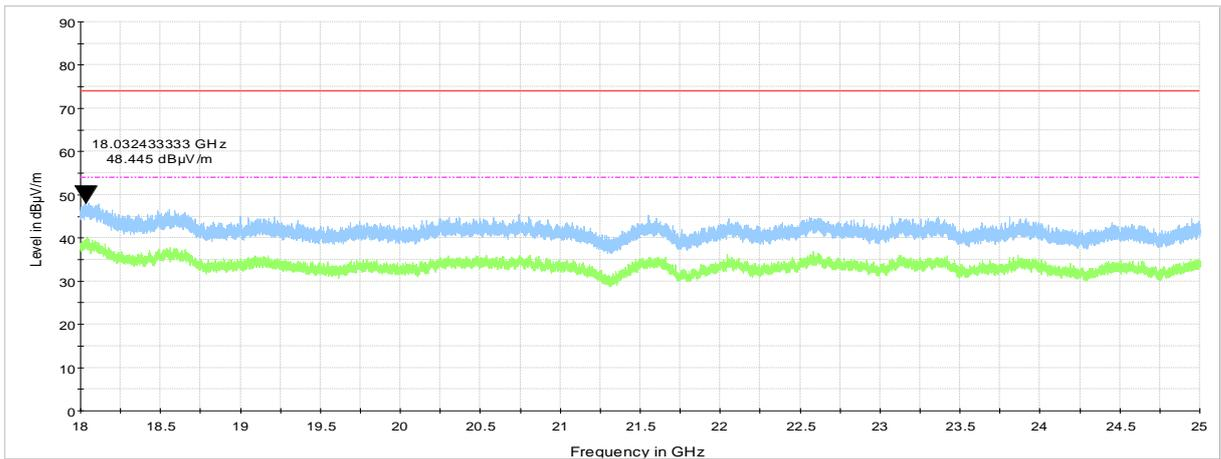

Plot 7.2.20 Radiated emission measurements from 18 GHz to 25 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

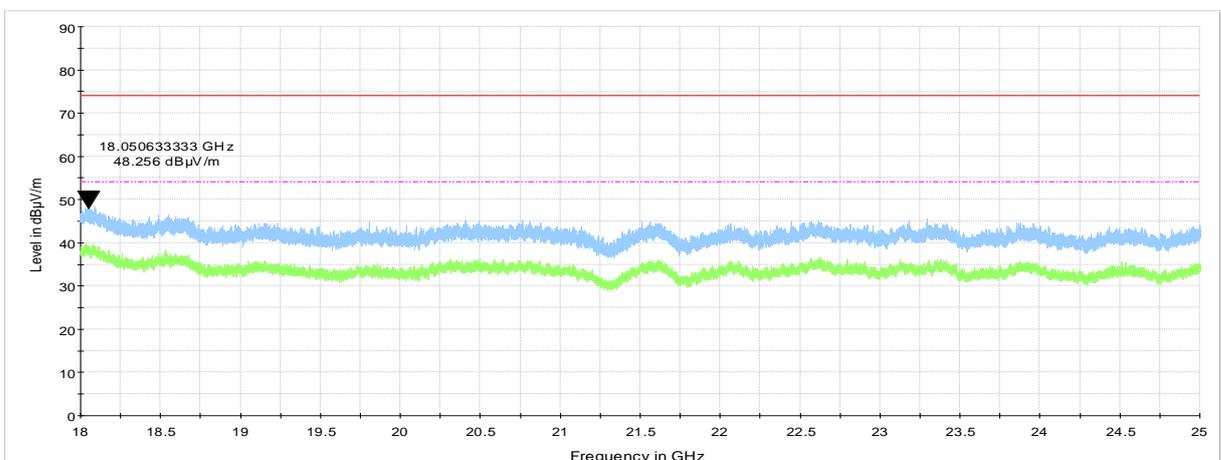




Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.2.21 Radiated emission measurements from 18 GHz to 25 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

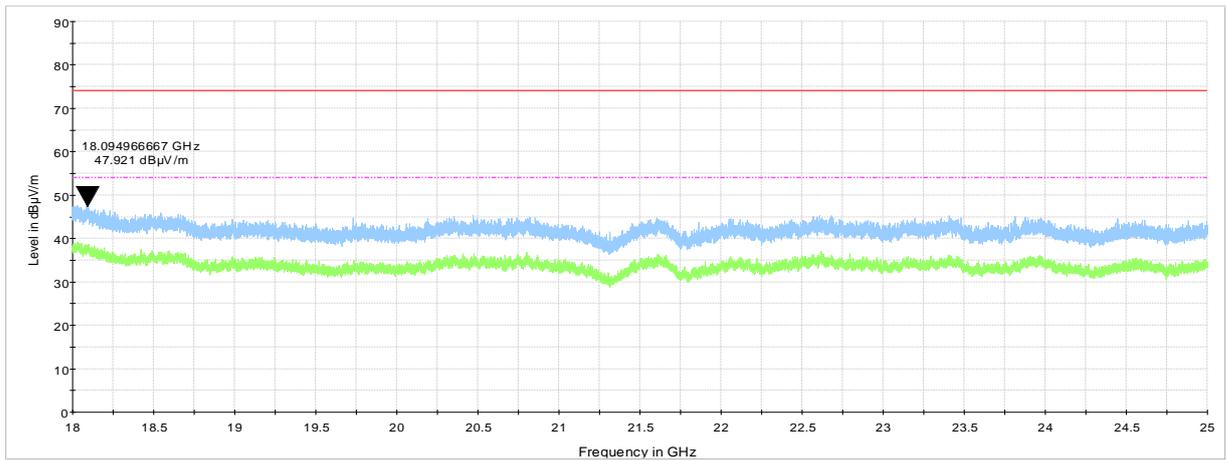



Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

7.3 Peak output power

7.3.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.3.1

Table 7.3.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
902.0 – 928.0	6.0	1.0	30.0	131.2
2400.0 – 2483.5				
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

** - Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{(30 \times P \times G)/r}$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.3.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.3.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.3.2 and associated plots.

7.3.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:


$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.3.2.6 The worst test results (the lowest margins) were recorded in Table 7.3.2.



Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Figure 7.3.1 Setup for carrier field strength measurements

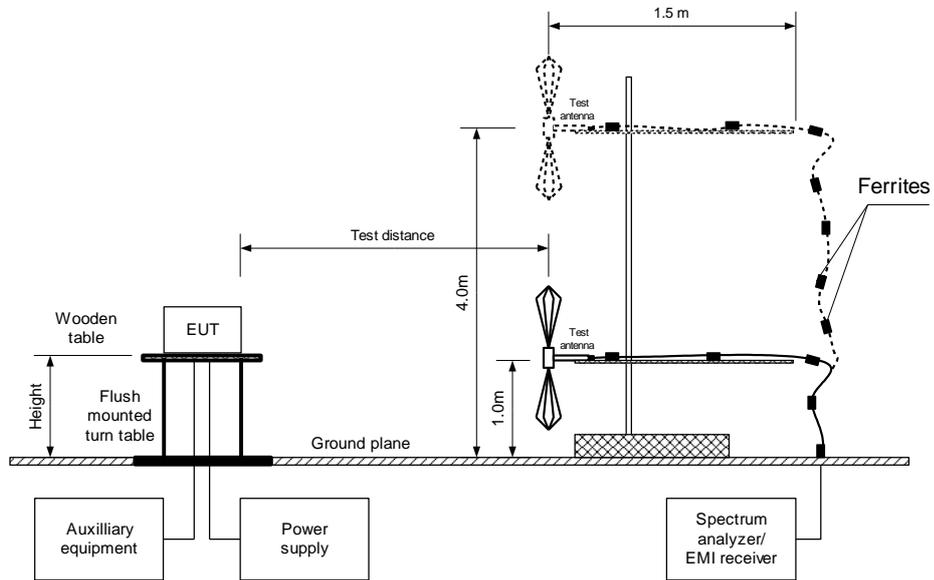



Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.3.2 Peak output power test results

ASSIGNED FREQUENCY: 2400.0 – 2483.5 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 1.5 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)
 MODULATION: GFSK
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402.0	110.88	horizontal	1.5	55	2.0	13.68	30	-16.32	Pass
2440.0	110.79	vertical	1.5	50	2.0	13.59	30	-16.41	Pass
2480.0	109.07	vertical	1.5	45	2.0	11.87	30	-18.13	Pass

*- EUT front panel refer to 0 degrees position of turntable.

** - Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi – 95.2 dB*

*** - Margin = Peak output power – specification limit.

Note: Maximum peak output power was obtained at Unom (115%Unom, 85%Unom) input power voltage.

Reference numbers of test equipment used

HL 3442	HL 3903	HL 5902	HL 4933				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			


Plot 7.3.1 Field strength of carrier at low frequency

ANTENNA POLARIZATION: Vertical

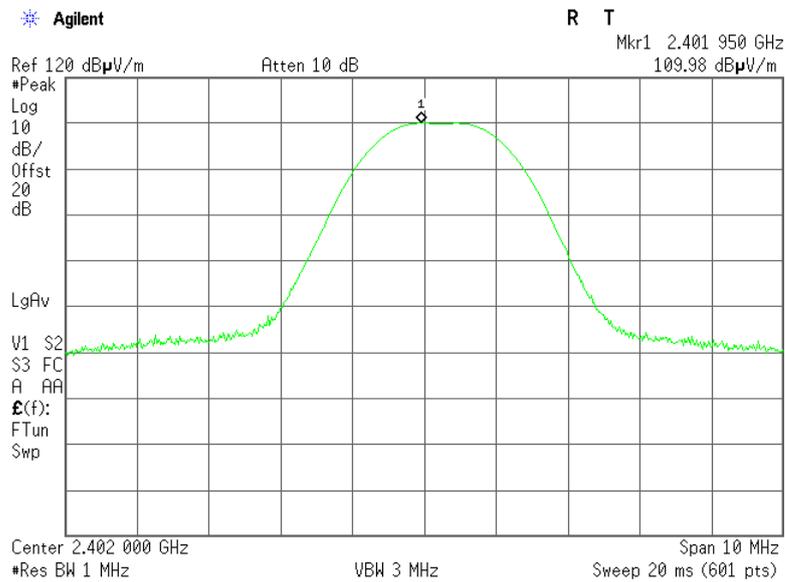

Plot 7.3.2 Field strength of carrier at low frequency

ANTENNA POLARIZATION: Horizontal

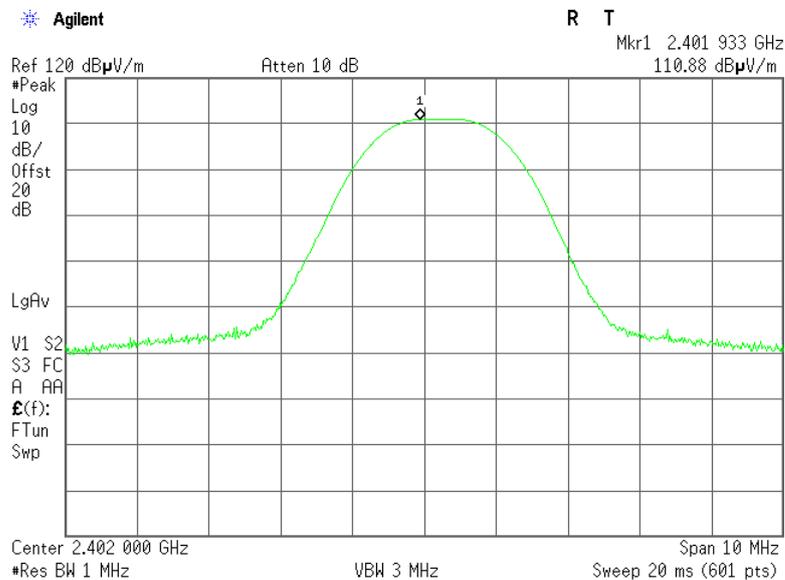




HERMON LABORATORIES

Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			


Plot 7.3.3 Field strength of carrier at mid frequency

ANTENNA POLARIZATION: Vertical

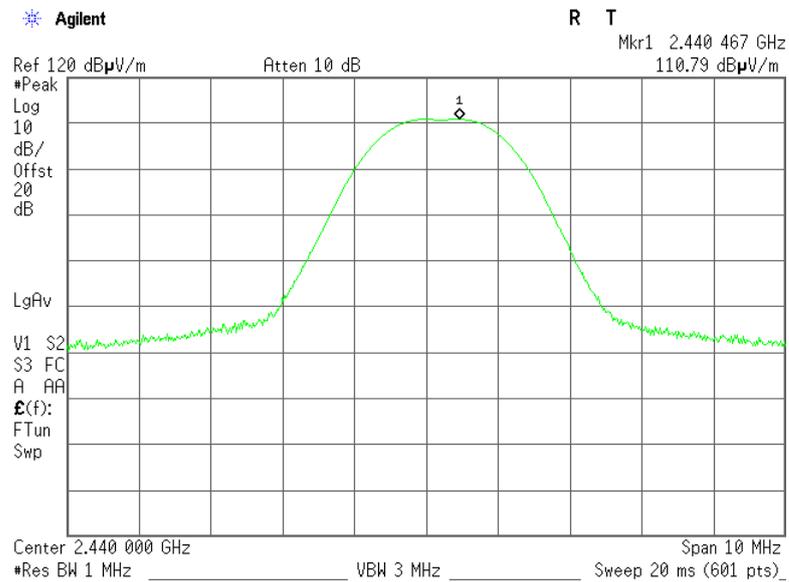

Plot 7.3.4 Field strength of carrier at mid frequency

ANTENNA POLARIZATION: Horizontal

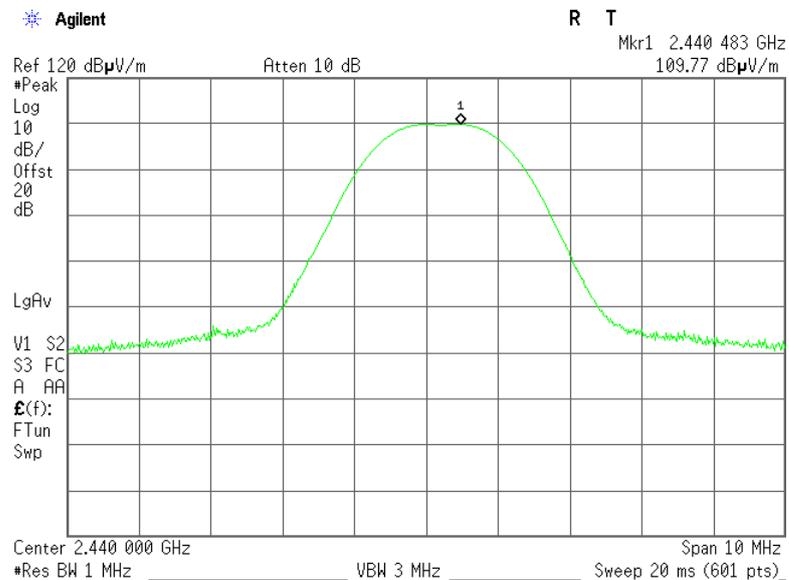




HERMON LABORATORIES

Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 19-May-21			
Temperature: 24 °C	Relative Humidity: 54 %	Air Pressure: 1010 hPa	Power: 120 VAC, 50 Hz
Remarks:			


Plot 7.3.5 Field strength of carrier at high frequency

ANTENNA POLARIZATION: Vertical

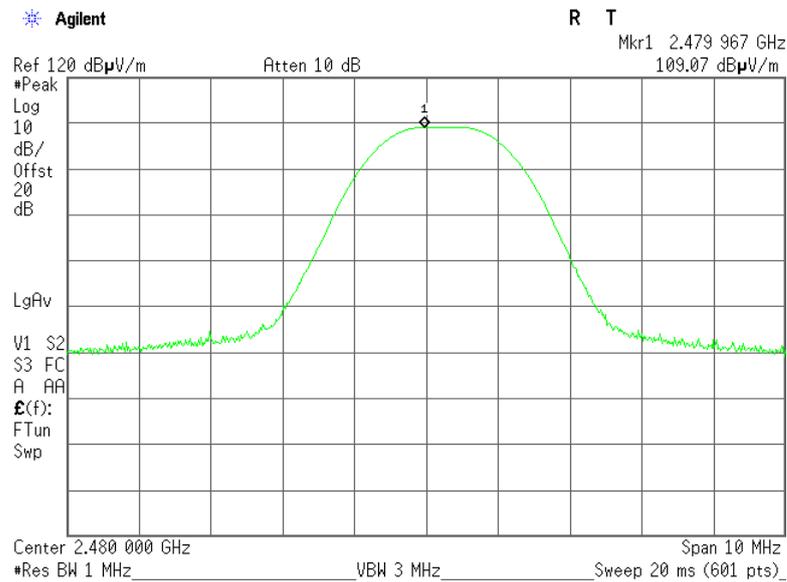

Plot 7.3.6 Field strength of carrier at high frequency

ANTENNA POLARIZATION: Horizontal

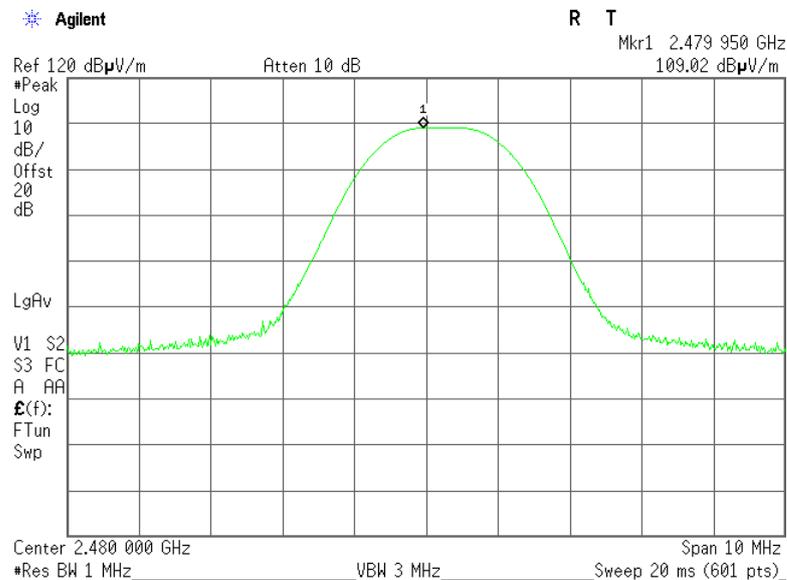



Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 20-May-21			
Temperature: 25 °C	Relative Humidity: 52 %	Air Pressure: 1007 hPa	Power: 120 VAC, 50 Hz
Remarks:			

7.4 Band edge radiated emissions

7.4.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Band edge emission limits

Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(μV/m)	
			Peak	Average
Peak	902.0 – 928.0	20.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Table 7.4.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.4.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.4.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.4.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.4.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.4.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.4.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.4.1 Band edge emission test setup





Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 20-May-21			
Temperature: 25 °C	Relative Humidity: 52 %	Air Pressure: 1007 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Table 7.4.2 Band edge emission outside restricted bands test results

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz
 DETECTOR USED: Peak
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: ≥ RBW
 MODULATION/BITRATE: GFSK
 DUTY CYCLE: 100%

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
2400.687	61.04	109.92	48.88	20	28.88	Pass

*- Margin = Attenuation below carrier – specification limit.

Table 7.4.3 Band edge emission inside restricted bands test results

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz
 DETECTOR USED: Peak
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 VIDEO BANDWIDTH: ≥ RBW
 MODULATION/BITRATE: GFSK
 DUTY CYCLE: 100%

Frequency, MHz	Peak field strength(VBW=3 MHz)			Average field strength(VBW=1 kHz)			Verdict
	Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB	Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB	
2388.6	59.86	74.0	-13.33	45.86	54.0	-8.05	Pass
2483.5	62.66	74	-11.34	50.31	54	-3.69	Pass

Reference numbers of test equipment used

HL 3442	HL 3903	HL 5902	HL 4933			
---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.




Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 20-May-21			
Temperature: 25 °C	Relative Humidity: 52 %	Air Pressure: 1007 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.4.1 The highest emission level within restricted band at low carrier frequency

ANTENNA POLARIZATION: Vertical

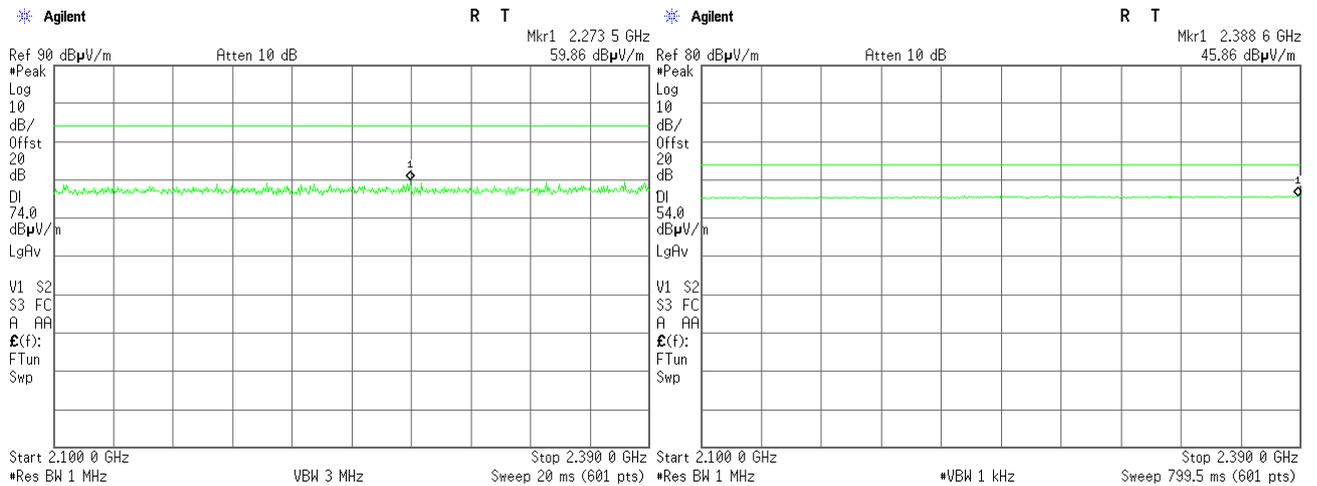

Plot 7.4.2 The highest emission level outside restricted band at low carrier frequency

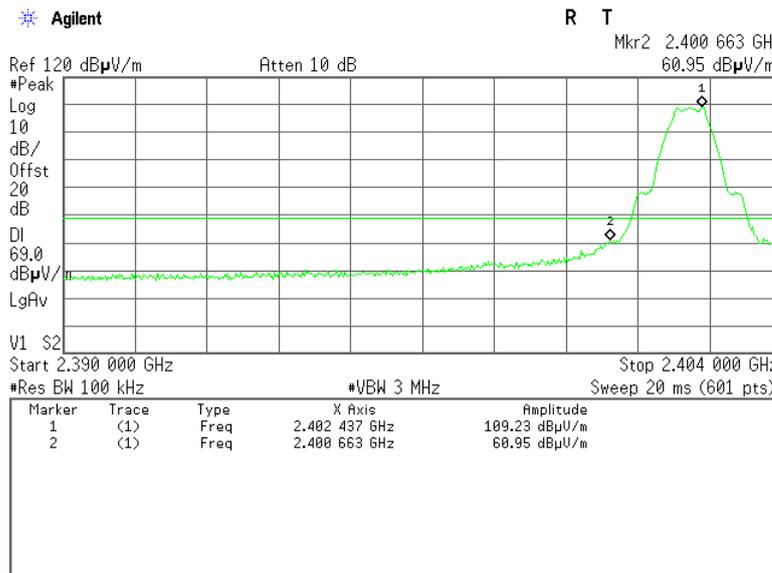




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 20-May-21			
Temperature: 25 °C	Relative Humidity: 52 %	Air Pressure: 1007 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.4.3 The highest emission level within restricted band at high carrier frequency

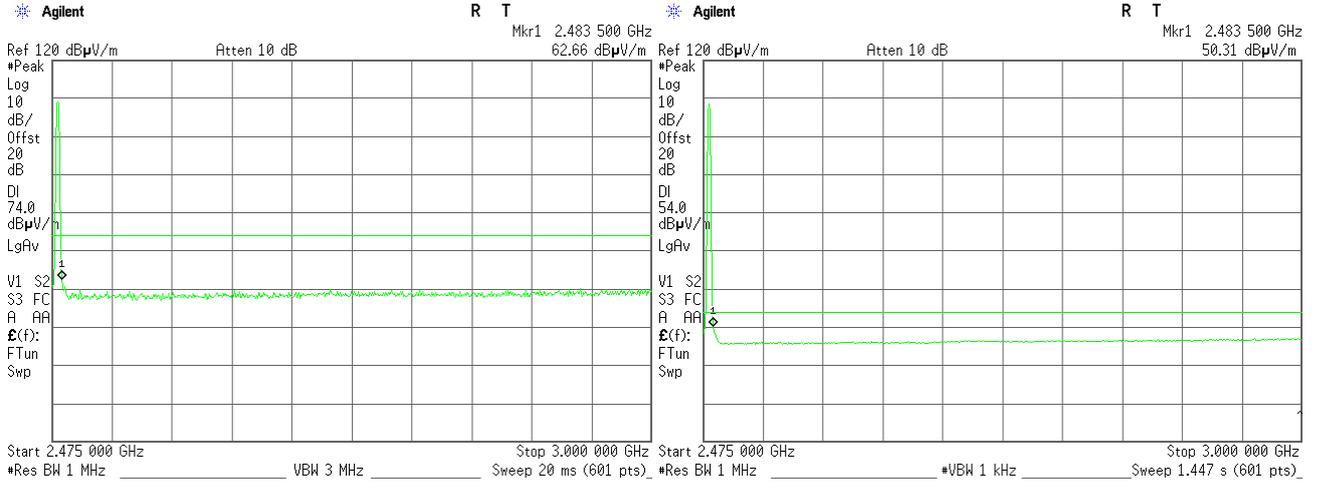




HERMON LABORATORIES


Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 20-May-21			
Temperature: 25 °C	Relative Humidity: 52 %	Air Pressure: 1007 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.4.4 The highest emission level within restricted band at low carrier frequency

ANTENNA POLARIZATION: Horizontal

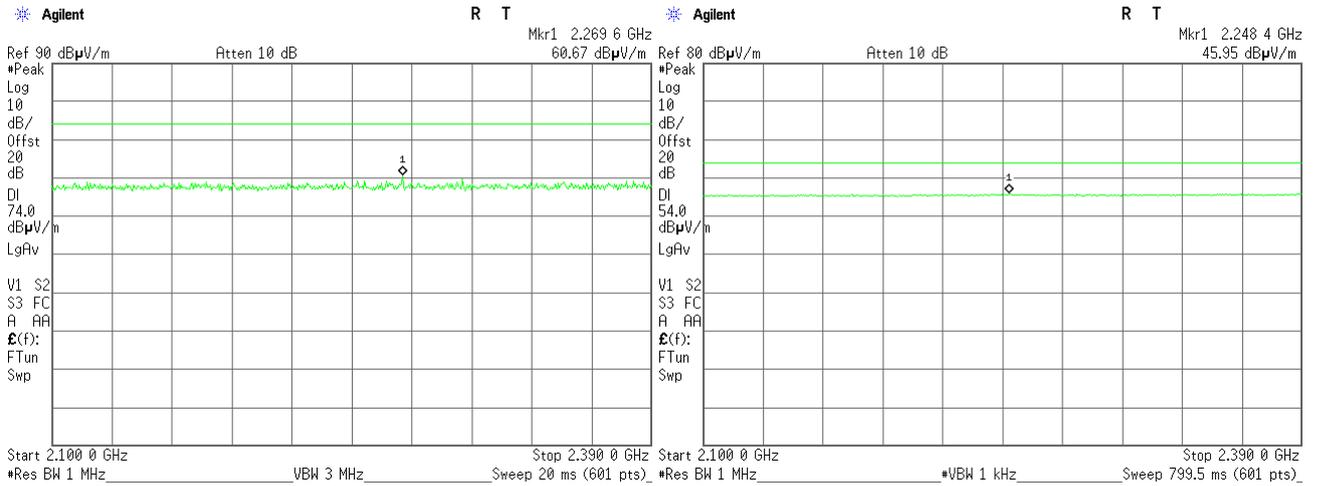

Plot 7.4.5 The highest emission level outside restricted band at low carrier frequency

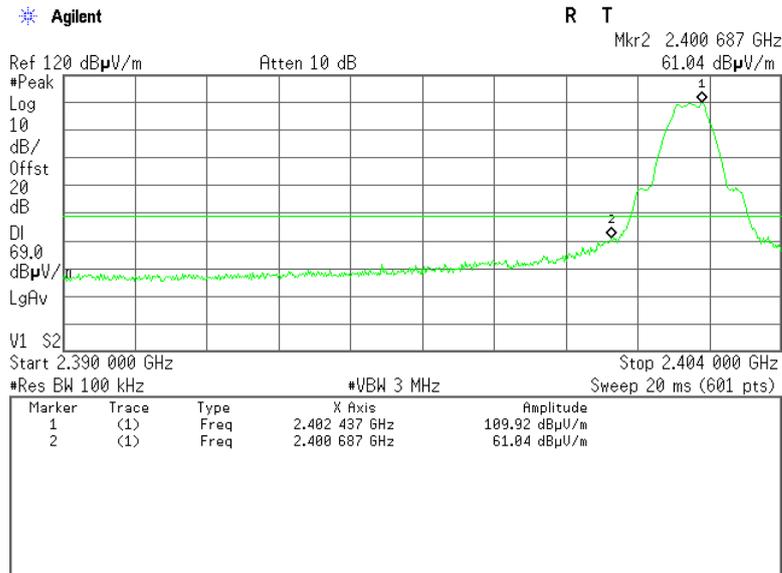




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 20-May-21			
Temperature: 25 °C	Relative Humidity: 52 %	Air Pressure: 1007 hPa	Power: 120 VAC, 50 Hz
Remarks:			

Plot 7.4.6 The highest emission level within restricted band at high carrier frequency

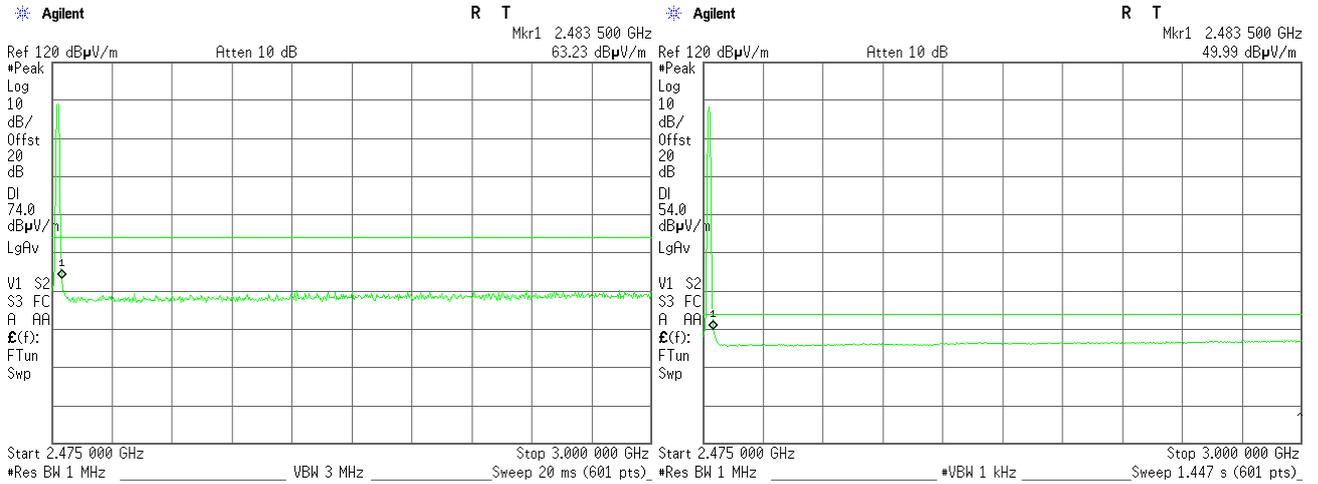



Test specification: FCC 47 CFR, Section 15.207 / RSS-Gen sec.8.8, Conducted emissions			
Test procedure: ANSI C63.4, Section 7.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1005 hPa	Power: 120 VAC, 60 Hz
Remarks: Tx			

7.5 Peak spectral power density

7.5.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μV/m)*
902.0 – 928.0	3.0	8.0	103.2
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.5.2 Test procedure for field strength measurements

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.


7.5.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.

7.5.2.5 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.5.2 and associated plots.



Test specification: FCC 47 CFR, Section 15.207 / RSS-Gen sec.8.8, Conducted emissions			
Test procedure: ANSI C63.4, Section 7.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1005 hPa	Power: 120 VAC, 60 Hz
Remarks: Tx			

Figure 7.5.1 Setup for carrier field strength measurements

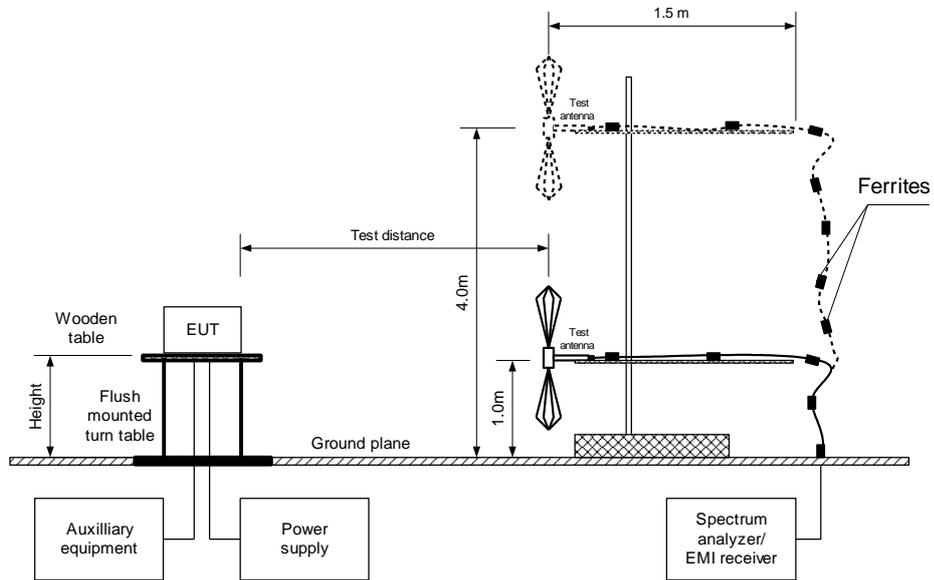



Test specification: FCC 47 CFR, Section 15.207 / RSS-Gen sec.8.8, Conducted emissions			
Test procedure: ANSI C63.4, Section 7.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1005 hPa	Power: 120 VAC, 60 Hz
Remarks: Tx			

Table 7.5.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY: 2400.0 – 2483.5 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 1.5 m
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 10 kHz
VIDEO BANDWIDTH: 1000 kHz
TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)
MODULATION: GFSK
BIT RATE: 1 Mbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
Low carrier frequency 2402 MHz							
2402.0	99.41	2.0	103.2	-5.79	vertical	1.5	52
2402.0	100.33	2.0	103.2	-4.87	horizontal	1.5	55
Mid carrier frequency 2440 MHz							
2440.0	100.60	2.0	103.2	-4.60	vertical	1.5	50
2440.0	99.91	2.0	103.2	-5.29	horizontal	1.5	48
High carrier frequency 2480 MHz							
2480.0	98.66	2.0	103.2	-6.54	vertical	1.5	45
2480.0	98.47	2.0	103.2	-6.73	horizontal	1.5	54

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 3442	HL 3903	HL 5902	HL 4933				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




Test specification: FCC 47 CFR, Section 15.207 / RSS-Gen sec.8.8, Conducted emissions			
Test procedure: ANSI C63.4, Section 7.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1005 hPa	Power: 120 VAC, 60 Hz
Remarks: Tx			

Plot 7.5.1 Peak spectral power density at low frequency

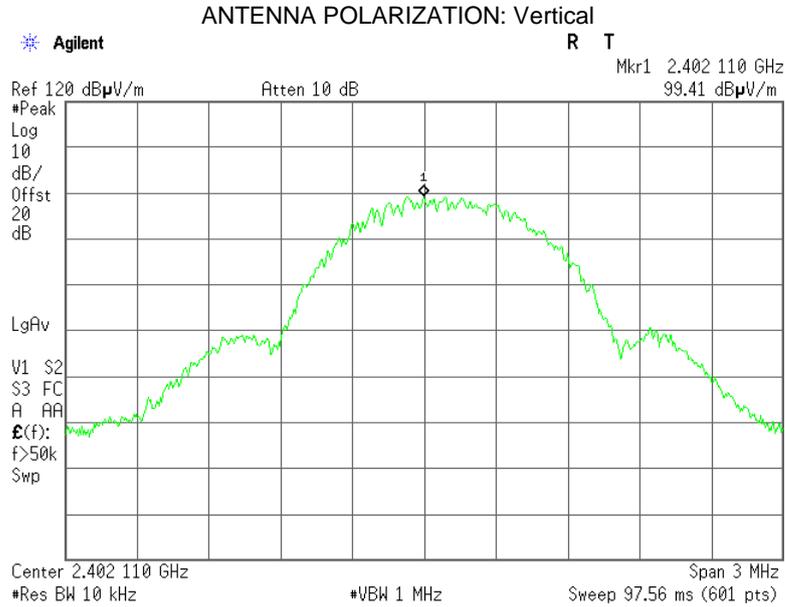


Plot 7.5.2 Peak spectral power density at low frequency

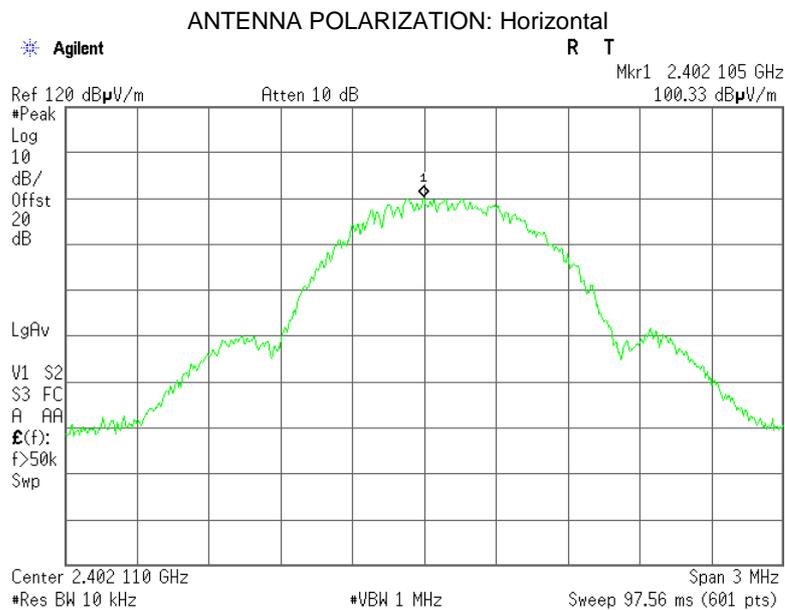




Test specification: FCC 47 CFR, Section 15.207 / RSS-Gen sec.8.8, Conducted emissions			
Test procedure: ANSI C63.4, Section 7.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1005 hPa	Power: 120 VAC, 60 Hz
Remarks: Tx			

Plot 7.5.3 Peak spectral power density at mid frequency

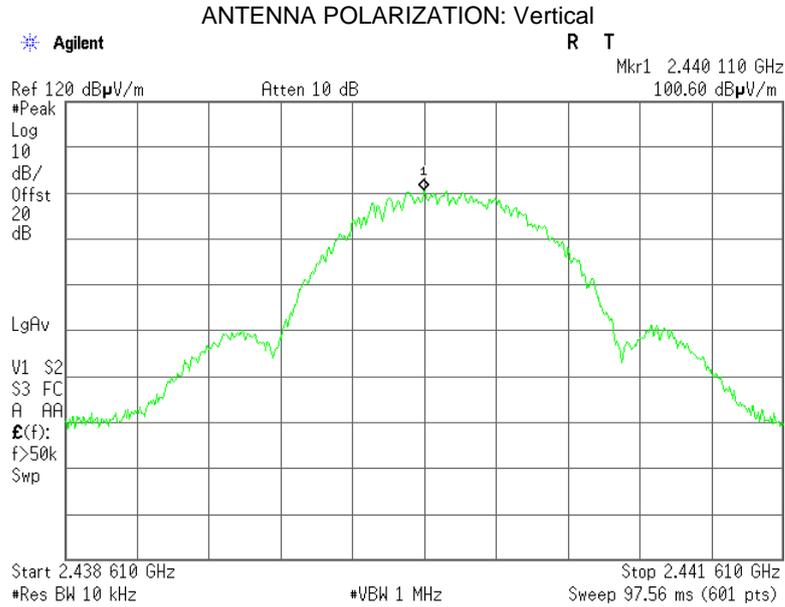

Plot 7.5.4 Peak spectral power density at mid frequency

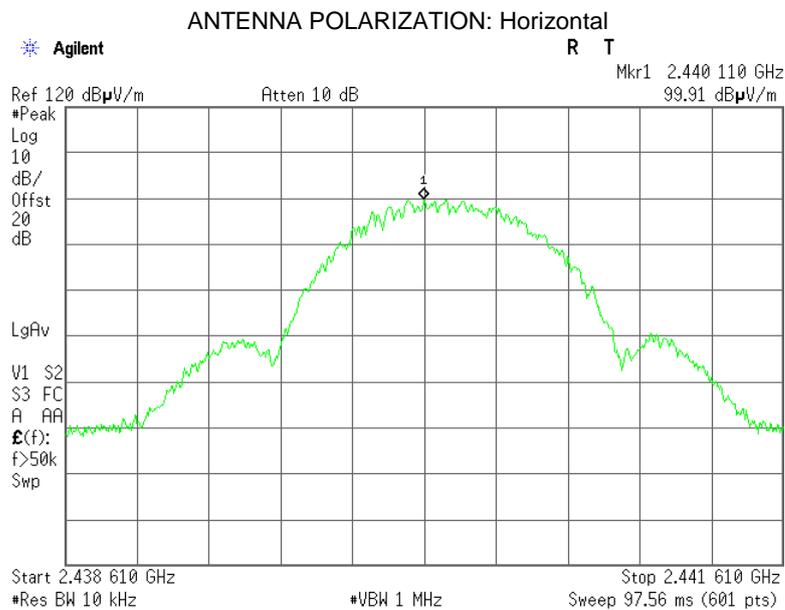




HERMON LABORATORIES

Test specification: FCC 47 CFR, Section 15.207 / RSS-Gen sec.8.8, Conducted emissions			
Test procedure: ANSI C63.4, Section 7.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1005 hPa	Power: 120 VAC, 60 Hz
Remarks: Tx			


Plot 7.5.5 Peak spectral power density at high frequency

ANTENNA POLARIZATION: Vertical

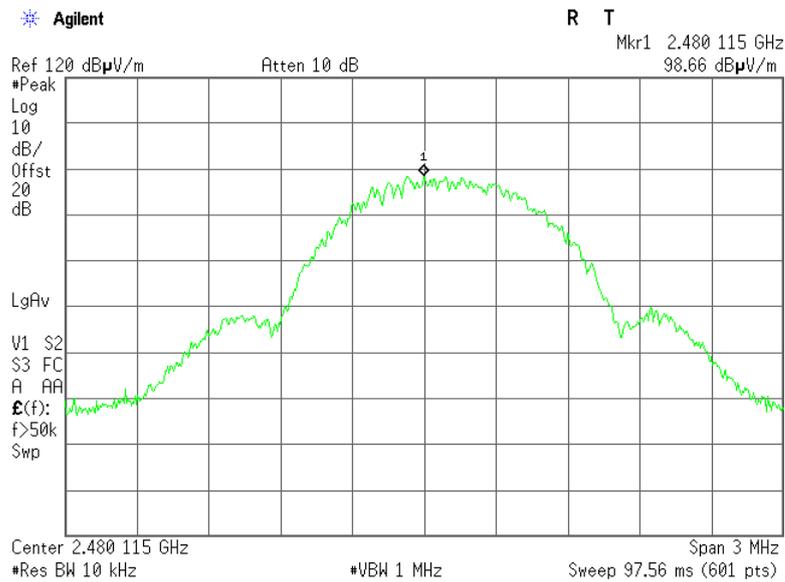

Plot 7.5.6 Peak spectral power density at high frequency

ANTENNA POLARIZATION: Horizontal

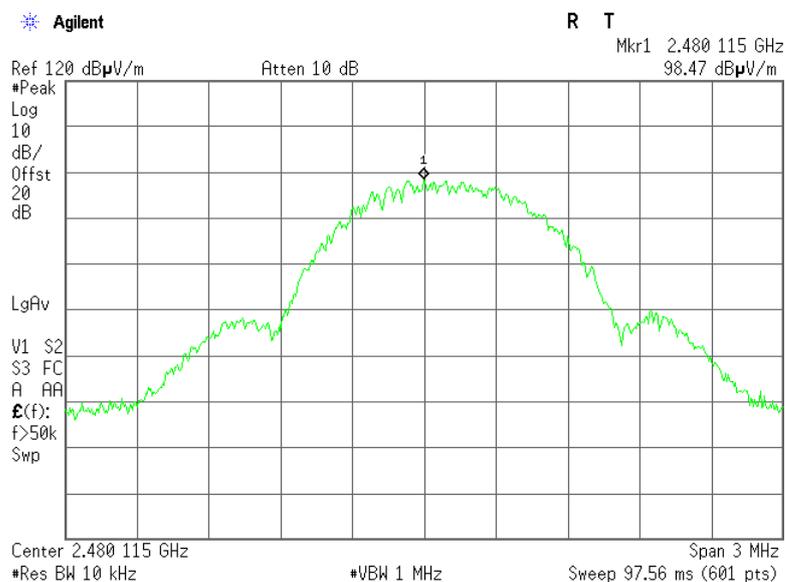



Test specification: FCC 47 CFR, Section 15.207 / RSS-Gen sec.8.8, Conducted emissions			
Test procedure: ANSI C63.4, Section 7.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1005 hPa	Power: 120 VAC, 60 Hz
Remarks: Tx			

7.6 Conducted emissions

7.6.1 General

This test was performed to measure the common mode conducted emissions at the EUT power port. The specification test limits are given in Table 7.6.1

Table 7.6.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μV)		Class A limit, dB(μV)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

* - The limit decreases linearly with the logarithm of frequency.


7.6.2 Test procedure

7.6.2.1 The EUT was set up as shown in Figure 7.6.1 and the associated photographs, energized and the EUT performance was checked.

7.6.2.2 The measurements were performed at the EUT power terminals with the LISN connected to the EMI receiver in the frequency range referred to in Table 7.6.2 The unused coaxial connector of the LISN was terminated with 50 Ohm.

7.6.2.3 The position of the EUT cables was varied to find the highest emission.

Figure 7.6.1 Setup for conducted emission measurements, table-top EUT

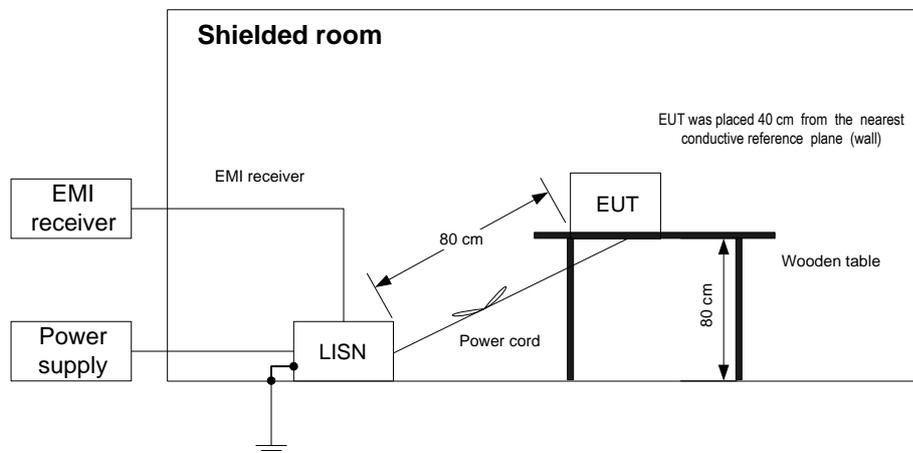



Test specification: FCC 47 CFR, Section 15.207 / RSS-Gen sec.8.8, Conducted emissions			
Test procedure: ANSI C63.4, Section 7.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1005 hPa	Power: 120 VAC, 60 Hz
Remarks: Tx			

Table 7.6.2 Conducted emission test results

LINE: AC mains
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.150	NA	41.2	66.0	-24.7	27.6	59.0	-31.3	L1	Pass
0.332	NA	34.4	59.4	-25.0	31.7	50.4	-18.7		
0.413	NA	37.0	57.5	-20.5	30.7	48.0	-17.2		
0.524	NA	32.8	56.0	-23.1	29.4	46.0	-16.5		
17.698	NA	32.4	60.0	-27.5	29.4	50.0	-20.5		
25.901	NA	32.8	60.0	-27.1	25.4	50.0	-24.5		
27.334	NA	32.5	60.0	-27.4	26.2	50.0	-23.7		
0.334	NA	34.6	59.3	-24.6	31.9	50.3	-18.4	L2	Pass
0.413	NA	37.5	57.5	-20.0	31.2	48.0	-16.7		
0.520	NA	31.9	56.0	-24.0	28.8	46.0	-17.1		
17.696	NA	30.9	60.0	-29.0	28.6	50.0	-21.3		
18.244	NA	30.2	60.0	-29.7	27.9	50.0	-22.0		
20.260	NA	30.3	60.0	-29.6	27.3	50.0	-22.7		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 5707	HL 787	HL 5476	HL 2888			
---------	--------	---------	---------	--	--	--


Full description is given in Appendix A.



Test specification: FCC 47 CFR, Section 15.207 / RSS-Gen sec.8.8, Conducted emissions			
Test procedure: ANSI C63.4, Section 7.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1005 hPa	Power: 120 VAC, 60 Hz
Remarks: Tx			

Plot 7.6.1 Conducted emission measurements

LINE: L1
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

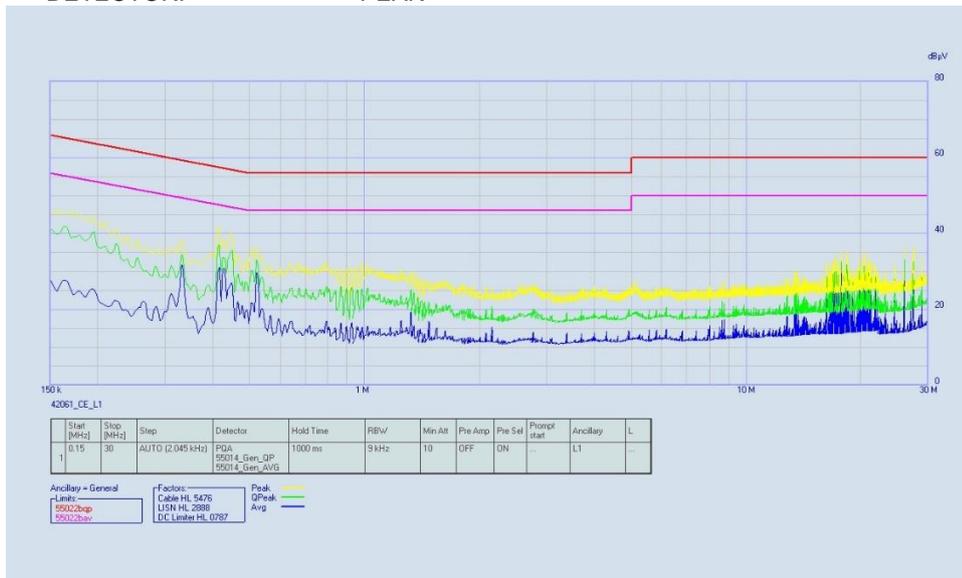

Plot 7.6.2 Conducted emission measurements

LINE: L2
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK





Test specification: FCC section 15.203, RSS-Gen section 6.8, Antenna requirement			
Test procedure: Visual inspection			
Test mode: Compliance		Verdict: PASS	
Date(s): 20-May-21			
Temperature: 25 °C	Relative Humidity: 52 %	Air Pressure: 1007 hPa	Power: 120 VAC, 50 Hz
Remarks:			

7.7 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.7.1.

Table 7.7.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	



Test specification: FCC 47 CFR, Section 15.107 / ICES-003, Section 6.1, Class B, Conducted emissions			
Test procedure: ANSI C63.4, Section 7.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1005 hPa	Power: 120 VAC, 60 Hz
Remarks: Rx			

8 Emissions tests according to FCC 47CFR part 15 subpart B and ICES-003 requirements

8.1 Conducted emissions

8.1.1 General

This test was performed to measure the common mode conducted emissions at the EUT power port. The specification test limits are given in Table 8.1.1

Table 8.1.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μV)		Class A limit, dB(μV)	
	QP	AVRG	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*	79	66
0.5 - 5.0	56	46	73	60
5.0 - 30	60	50	73	60

* - The limit decreases linearly with the logarithm of frequency.


8.1.2 Test procedure

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and the associated photographs, energized and the EUT performance was checked.

8.1.2.2 The measurements were performed at the EUT power terminals with the LISN connected to the EMI receiver in the frequency range referred to in Table 8.1.2. The unused coaxial connector of the LISN was terminated with 50 Ohm.

8.1.2.3 The position of the EUT cables was varied to find the highest emission.

Figure 8.1.1 Setup for conducted emission measurements, table-top EUT

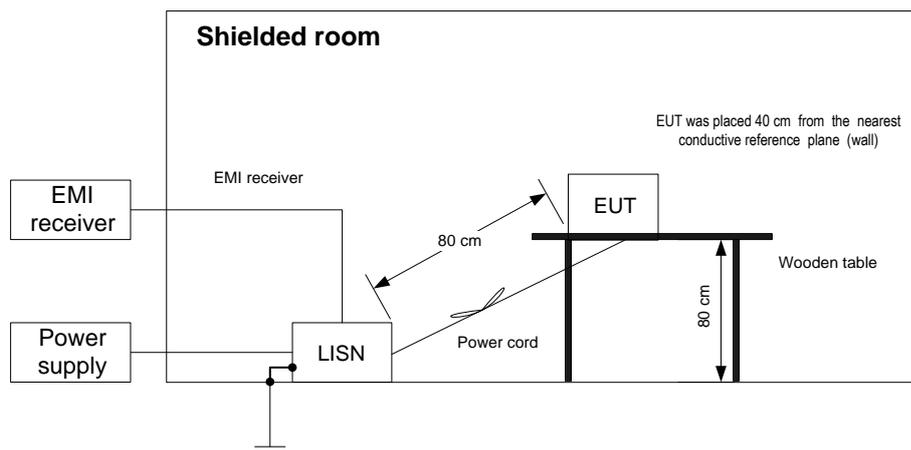



Test specification: FCC 47 CFR, Section 15.107 / ICES-003, Section 6.1, Class B, Conducted emissions			
Test procedure: ANSI C63.4, Section 7.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1005 hPa	Power: 120 VAC, 60 Hz
Remarks: Rx			

Table 8.1.2 Conducted emission test results

LINE: AC mains
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
0.332	NA	34.2	59.4	-25.1	31.5	50.4	-18.9	L1	Pass
0.415	NA	37.0	57.5	-20.4	31.0	48.0	-16.9		
0.522	NA	32.9	56.0	-23.1	29.9	46.0	-16.0		
17.696	NA	31.5	60.0	-28.4	28.6	50.0	-21.4		
18.244	NA	30.5	60.0	-29.5	27.6	50.0	-22.3		
19.712	NA	30.5	60.0	-29.5	25.9	50.0	-24.1		
0.462	NA	31.2	56.6	-25.4	23.4	46.8	-23.4	L2	Pass
0.524	NA	25.6	56.0	-30.3	21.2	46.0	-24.8		
17.698	NA	31.3	60.0	-28.6	29.3	50.0	-20.7		
18.246	NA	31.1	60.0	-28.8	29.2	50.0	-20.8		
20.260	NA	30.2	60.0	-29.7	27.4	50.0	-22.6		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 5707	HL 787	HL 5476	HL 2888				
---------	--------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: FCC 47 CFR, Section 15.107 / ICES-003, Section 6.1, Class B, Conducted emissions			
Test procedure: ANSI C63.4, Section 7.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 31-May-21			
Temperature: 24 °C	Relative Humidity: 39 %	Air Pressure: 1005 hPa	Power: 120 VAC, 60 Hz
Remarks: Rx			


Plot 8.1.1 Conducted emission measurements

LINE: L1
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK



Plot 8.1.2 Conducted emission measurements

LINE: L2
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

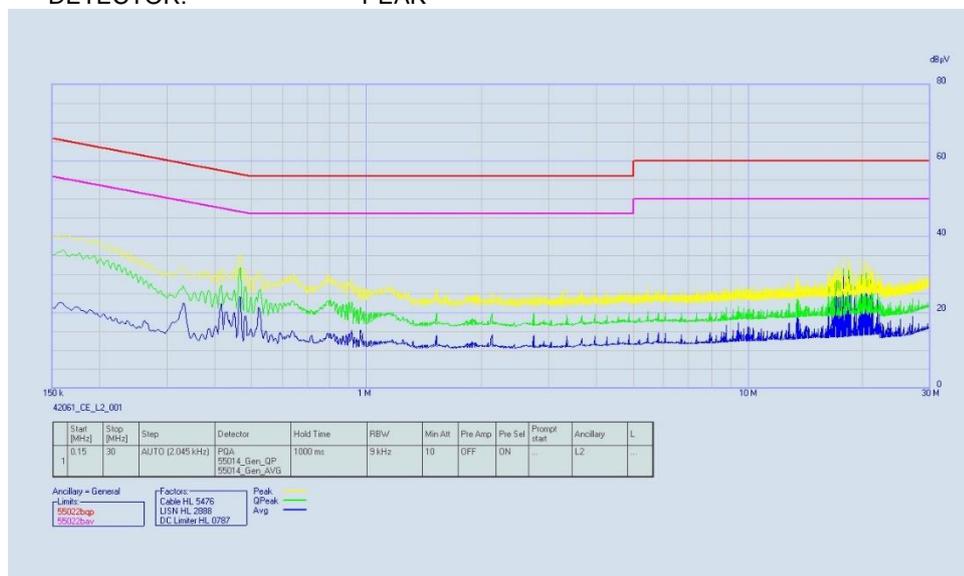



Test specification: FCC 47 CFR, Section 15.109 / ICES-003, Section 6.2, Class B, Radiated emissions			
Test procedure: ANSI C63.4, Section 8.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 24-May-21			
Temperature: 24 °C	Relative Humidity: 49 %	Air Pressure: 1008 hPa	Power: 120 VAC, 60 Hz
Remarks:			

8.2 Radiated emission measurements

8.2.1 General

This test was performed to measure radiated emissions from the EUT enclosure. The specification test limits are given in Table 8.2.1

Table 8.2.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μ V/m)		Class A limit, dB(μ V/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* - The limit for a test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $Lim_{S_2} = Lim_{S_1} + 20 \log(S_1/S_2)$, where S_1 and S_2 – the standard defined and the test distance respectively in meters.

8.2.2 Test procedure for measurements in semi-anechoic chamber

8.2.2.1 The EUT was set up as shown in Figure 8.2.1, energized and the performance check was conducted.

8.2.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.2.2.3 The worst test results (the lowest margins) were recorded in Table 8.2.2 and shown in the associated plots.



Test specification: FCC 47 CFR, Section 15.109 / ICES-003, Section 6.2, Class B, Radiated emissions			
Test procedure: ANSI C63.4, Section 8.3			
Test mode: Compliance	Verdict: PASS		
Date(s): 24-May-21			
Temperature: 24 °C	Relative Humidity: 49 %	Air Pressure: 1008 hPa	Power: 120 VAC, 60 Hz
Remarks:			

Figure 8.2.1 Setup for radiated emission measurements in anechoic chamber in 30 – 1000 MHz range, table-top EUT


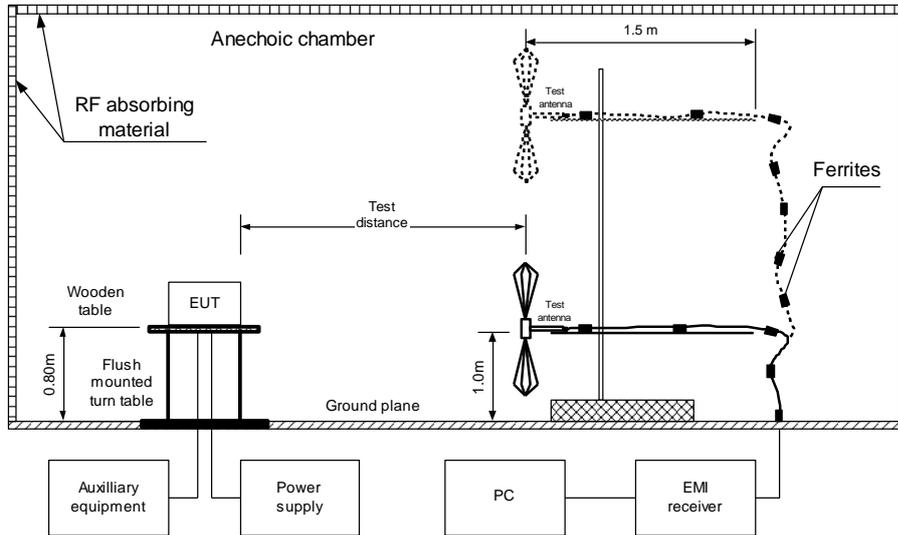


Figure 8.2.2 Setup for radiated emission measurements in 1000 – 13000 MHz range, table-top EUT



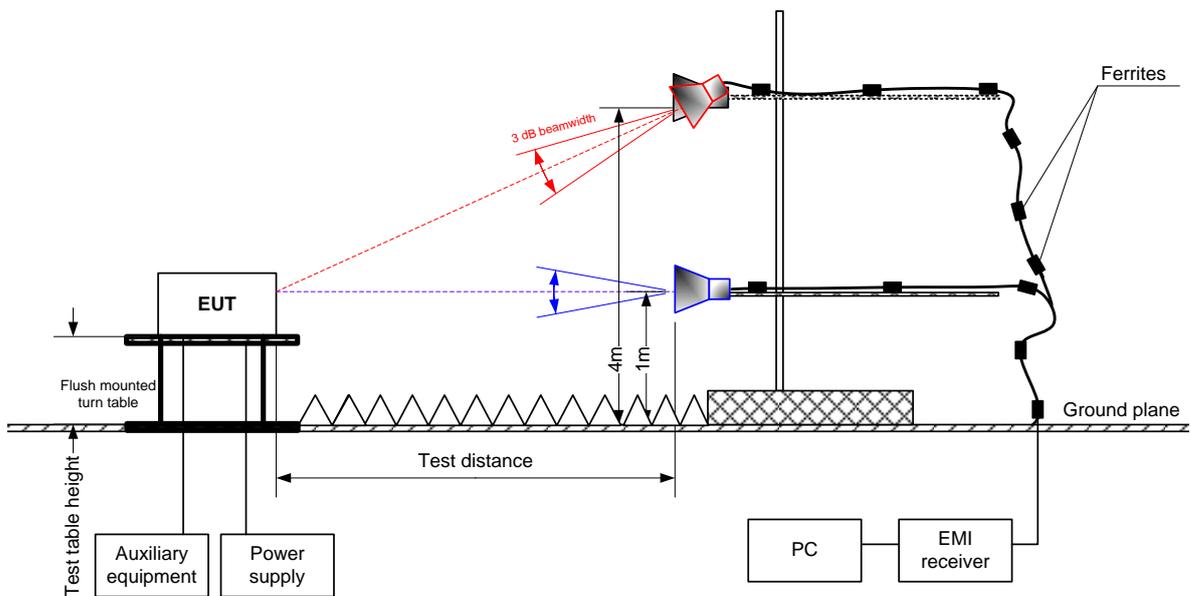

Test specification: FCC 47 CFR, Section 15.109 / ICES-003, Section 6.2, Class B, Radiated emissions			
Test procedure: ANSI C63.4, Section 8.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 24-May-21			
Temperature: 24 °C	Relative Humidity: 49 %	Air Pressure: 1008 hPa	Power: 120 VAC, 60 Hz
Remarks:			

Table 8.2.2 Radiated emission test results

EUT SET UP: TABLE-TOP
 TEST SITE: SEMI ANECHOIC CHAMBER
 TEST DISTANCE: 3 m
 DETECTORS USED: PEAK / QUASI-PEAK
 FREQUENCY RANGE: 30 MHz – 1000 MHz
 RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
34.279000	28.66	21.12	40.0	-18.88	Vertical	1.02	159	Pass
60.131167	26.65	20.36	40.0	-19.64	Vertical	1.02	296	
77.792333	29.12	25.66	40.0	-14.34	Vertical	1.02	13	
133.654500	34.03	30.54	43.5	-12.96	Vertical	1.02	318	
151.097167	32.11	26.80	43.5	-16.70	Vertical	1.02	296	
195.322833	34.68	31.85	43.5	-11.65	Vertical	1.04	240	
297.769000	41.62	38.04	46.0	-7.96	Horizontal	1.00	35	
299.346000	42.47	39.85	46.0	-6.15	Horizontal	1.00	180	
413.182833	30.63	25.79	46.0	-20.21	Horizontal	2.68	296	

TEST SITE: SEMI ANECHOIC CHAMBER
 TEST DISTANCE: 3 m
 DETECTORS USED: PEAK / AVERAGE
 FREQUENCY RANGE: 1000 MHz - 13000 MHz
 RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna tilt, degrees	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*					
All emissions are more than 20 dB below the limit											Pass

*- Margin = Measured emission - specification limit.
 **- EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 4360	HL 3903	HL 4933	HL 5288	HL 5085	HL 5902		
---------	---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.



Test specification: FCC 47 CFR, Section 15.109 / ICES-003, Section 6.2, Class B, Radiated emissions			
Test procedure: ANSI C63.4, Section 8.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 24-May-21			
Temperature: 24 °C	Relative Humidity: 49 %	Air Pressure: 1008 hPa	Power: 120 VAC, 60 Hz
Remarks:			


Plot 8.2.1 Radiated emission measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization

TEST SITE: Semi Anechoic chamber
TEST DISTANCE: 3 m

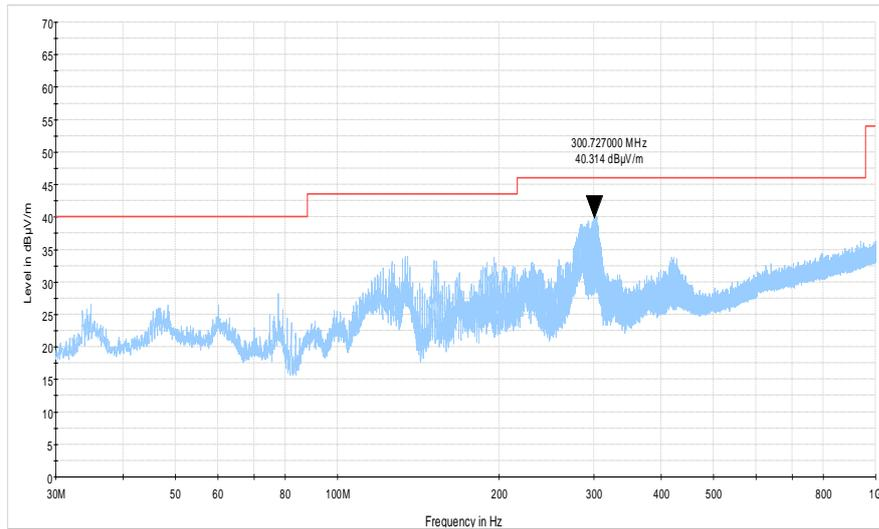

Plot 8.2.2 Radiated emission measurements above 1000 MHz, vertical and horizontal antenna polarization

TEST SITE: Semi Anechoic chamber
TEST DISTANCE: 3 m

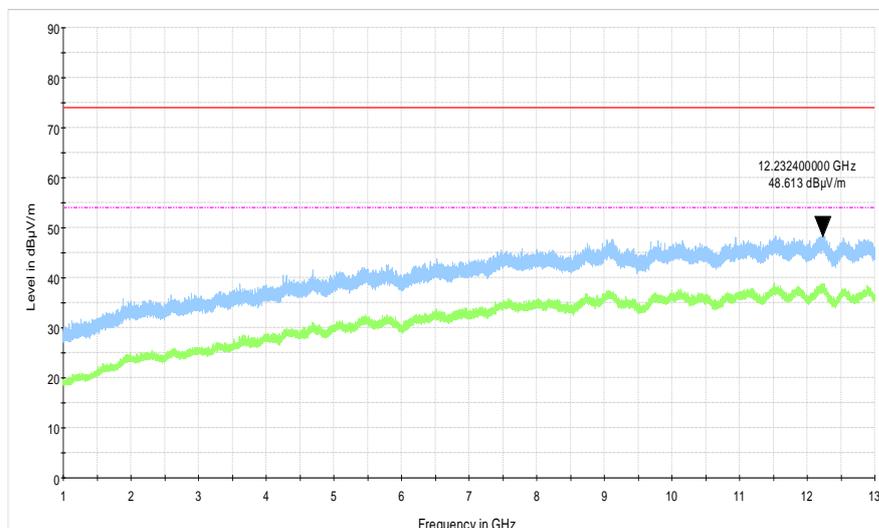

**9 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	28-Feb-21	28-Feb-22
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A0187 7	06-Oct-20	06-Oct-21
2888	LISN Two-line V-Network 50 Ohm / 50 uH + 5 Ohm, 16A, MIL STD 461E, CISPR 16-1	Rolf Heine	NNB-2/16Z	02/10018	14-Mar-21	14-Mar-22
3442	Precision Fixed Attenuator, 50 Ohm, 5 W, 20 dB, DC to 18 GHz	Mini-Circuits	BW-S20W5+	NA	25-Feb-21	25-Feb-22
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFLEX 102A	1226/2A	06-Apr-21	06-Apr-22
4135	Shield Box	TESCOM CO., LTD	TC-5916A	5916A0001 36	25-Apr-21	25-Apr-22
4355	Signal and Spectrum Analyzer, 9 kHz to 7 GHz	Rohde & Schwarz	FSV 7	101630	09-Sep-20	09-Sep-21
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	19-Jan-21	19-Jan-22
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	26-Jan-21	26-Jan-22
4956	Active horn antenna, 18 to 40 GHz	COM-POWER CORPORATION	AHA-840	105004	26-Jan-21	26-Jan-22
5085	Attenuator, 4 dB, DC - 6 GHz, 1 W	Mini-Circuits	UNAT-4+	NA	11-May-21	11-May-22
5112	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/1 1SK/11SK/ 5500MM	502494/2EA	19-Apr-21	19-Apr-22
5286	Band Pass Filter, 50 Ohm, 4.4 to 18 GHz, SMA/M-SMA/F	A-INFOMW	WBLB-T- HP-4.4-18- S	J108000003 05	05-Jun-19	05-Jun-21
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	08-Feb-19	08-Feb-22
5397	H-field near field probe, 3 cm	ETS Lindgren	7405-902	NA	16-Aug-20	16-Aug-22
5409	RF cable, 40 GHz, SMA-SMA, 2 m	Huber-Suhner	SF102EA/1 1SK/11SK/ 2000MM	503973/2EA	03-Aug-20	03-Aug-21
5476	Cable, BNC/BNC, 10.5 m	Western wire	MIL-C-17G	NA	14-May-20	14-May-21
5707	EMI receiver	PMM / Narda	PMM 9010F	060WW911 01	01-Feb-21	01-Feb-22
5902	RF cable, 18 GHz, 6.0m, N-type	Huber-Suhner	SF126EA/1 1N/11N/60 00		01-Dec-20	01-Dec-21



10 APPENDIX B Test equipment correction factors

HL 0446: Active Loop Antenna
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dBS/m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ A/m.



HL 2888 LISN Two-line V-Network 50 Ohm / 50 uH + 5 Ohm, 16A
Rolf Heine, model: NNB-2/16Z, s/n 02/10018, HL 2888

Voltage division factor (insertion loss)

Frequency,	L1, dB	L2, dB	Uncertainty, dB
150	0.09	0.07	±0.09
170	0.08	0.07	±0.09
200	0.08	0.06	±0.09
250	0.09	0.06	±0.09
300	0.09	0.06	±0.09
350	0.09	0.07	±0.09
400	0.09	0.07	±0.09
500	0.09	0.07	±0.09
600	0.09	0.07	±0.09
700	0.10	0.08	±0.09
800	0.10	0.08	±0.09
900	0.11	0.08	±0.09
1000	0.11	0.08	±0.09
1200	0.11	0.09	±0.16
1500	0.12	0.10	±0.16
2000	0.14	0.12	±0.16
2500	0.15	0.12	±0.16
3000	0.16	0.14	±0.16
4000	0.19	0.16	±0.16
5000	0.23	0.19	±0.16
7000	0.30	0.25	±0.16
10000	0.46	0.40	±0.16
15000	0.71	0.62	±0.16
20000	0.94	0.85	±0.16
30000	1.41	1.33	±0.32



HL 4933 Active Horn Antenna, 1 GHz to 18 GHz
COM-POWER CORPORATION AHA-118 , s/n 701046

Frequency, MHz	Measured antenna factor, dB/m
1000	-16.1
1050	-16.0
1100	-15.1
1150	-16.4
1200	-16.0
1250	-15.6
1300	-15.1
1350	-14.8
1400	-15.1
1450	-15.1
1500	-15.5
1550	-15.2
1600	-14.7
1650	-14.4
1700	-14.4
1750	-14.0
1800	-13.6
1850	-12.7
1900	-11.9
1950	-11.9
2000	-11.8
2050	-11.3
2100	-11.3
2150	-11.7
2200	-12.3
2250	-12.3
2300	-12.4
2350	-12.2
2400	-11.7
2450	-11.5
2500	-11.5
2550	-11.5
2600	-11.5
2650	-11.3
2700	-11.3
2750	-11.1
2800	-11.1
2850	-11.3
2900	-11.1
2950	-11.0
3000	-11.1
3050	-10.9
3100	-10.7
3150	-10.6

Frequency, MHz	Measured antenna factor, dB/m
3200	-11.2
3250	-10.8
3300	-10.8
3350	-10.7
3400	-10.3
3450	-10.2
3500	-10.1
3550	-10.4
3600	-10.5
3650	-10.4
3700	-10.4
3750	-10.3
3800	-10.1
3850	-10.0
3900	-9.9
3950	-9.8
4000	-9.7
4050	-9.3
4100	-8.6
4150	-8.2
4200	-8.3
4250	-8.5
4300	-8.5
4350	-8.3
4400	-8.0
4450	-7.7
4500	-7.6
4550	-7.4
4600	-7.5
4650	-7.8
4700	-7.6
4750	-6.8
4800	-6.1
4850	-5.7
4900	-5.8
4950	-5.8
5000	-6.0
5050	-5.7
5100	-5.4
5150	-5.1
5200	-4.6
5250	-4.6
5300	-4.8
5350	-5.1



Frequency, MHz	Measured antenna factor, dB/m
5400	-5.1
5450	-4.6
5500	-4.0
5550	-3.5
5600	-3.1
5650	-3.3
5700	-3.8
5750	-4.3
5800	-4.3
5850	-4.0
5900	-3.5
5950	-3.2
6000	-3.2
6050	-3.2
6100	-3.3
6150	-3.3
6200	-3.1
6250	-2.9
6300	-2.8
6350	-3.0
6400	-3.2
6450	-3.4
6500	-3.7
6550	-3.6
6600	-3.4
6650	-2.9
6700	-2.6
6750	-2.5
6800	-2.6
6850	-2.8
6900	-2.7
6950	-2.3
7000	-2.0
7050	-1.9
7100	-1.8
7150	-1.8
7200	-1.7
7250	-1.7
7300	-1.6
7350	-1.5
7400	-1.5
7450	-1.3
7500	-1.4
7550	-1.3
7600	-1.0
7650	-0.7
7700	-0.3
7750	0.1
7800	0.3
7850	0.4
7900	0.2
7950	0.1
8000	0.2
8050	0.3
8100	0.8
8150	1.1

Frequency, MHz	Measured antenna factor, dB/m
8200	1.1
8250	1.0
8300	0.8
8350	0.5
8400	0.3
8450	0.5
8500	0.8
8550	0.9
8600	0.9
8650	0.6
8700	0.0
8750	-0.3
8800	0.0
8850	0.5
8900	0.6
8950	0.4
9000	-0.3
9050	-1.0
9100	-1.2
9150	-0.6
9200	-0.1
9250	0.0
9300	-0.1
9350	-0.5
9400	-0.7
9450	-0.4
9500	0.2
9550	0.5
9600	0.5
9650	0.3
9700	0.0
9750	0.0
9800	0.6
9850	1.4
9900	1.8
9950	1.7
10000	1.4
10100	0.8
10200	1.2
10300	1.5
10400	1.1
10500	1.6
10600	3.0
10700	2.9
10800	1.3
10900	1.0
11000	1.1
11100	0.7
11200	1.1
11300	1.5
11400	1.4
11500	0.6
11600	1.0
11700	1.4
11800	0.7
11900	0.9



Frequency, MHz	Measured antenna factor, dB/m
12400	2.1
12500	1.2
12600	1.3
12700	2.4
12800	1.8
12900	0.6
13000	0.9
13100	1.1
13200	0.7
13300	0.9
13400	1.8
13500	2.1
13600	1.2
13700	0.8
13800	1.2
13900	1.5
14000	1.7
14100	2.2
14200	2.8
14300	3.0
14400	3.0
14500	3.3
14600	4.0
14700	5.4
14800	5.4
14900	4.7
15000	3.1
15100	2.0
15200	1.5
15300	1.4
15400	1.7

Frequency, MHz	Measured antenna factor, dB/m
15500	1.9
15600	1.2
15700	0.2
15800	0.6
15900	1.2
16000	0.6
16100	0.6
16200	1.9
16300	2.2
16400	0.9
16500	0.7
16600	1.7
16700	1.3
16800	1.0
16900	2.0
17000	2.4
17100	1.8
17200	1.8
17300	2.5
17400	2.7
17500	3.1
17600	3.7
17700	4.3
17800	4.8
17900	5.7
18000	5.1



HL 5112 RF cable, 40 GHz, 5.5 m, K-type,
Huber-Suhner, SF102EA/11SK/11SK/5500MM, s/n 502494/2EA, HL 5112

Insertion loss

Set / Applied, MHz	Measured, dB	Uncertainty, dB
100	0.70	±0.07
200	0.99	±0.08
300	1.21	±0.08
500	1.55	±0.08
1000	2.18	±0.08
1500	2.67	±0.08
2000	3.09	±0.08
2500	3.46	±0.10
3000	3.80	±0.10
3500	4.12	±0.10
4000	4.41	±0.10
4500	4.69	±0.10
5000	4.95	±0.10
5500	5.20	±0.10
6000	5.45	±0.10
6500	5.68	±0.10
7000	5.91	±0.10
7500	6.13	±0.10
8000	6.34	±0.10
8500	6.56	±0.10
9000	6.76	±0.10
9500	6.95	±0.10
10000	7.16	±0.10
10500	7.33	±0.10
11000	7.51	±0.10
11500	7.68	±0.10
12000	7.85	±0.10
12500	8.02	±0.13
13000	8.17	±0.13
13500	8.31	±0.13
14000	8.46	±0.13
14500	8.61	±0.18
15000	8.76	±0.18
15500	8.91	±0.18
16000	9.07	±0.18
16500	9.22	±0.18
17000	9.36	±0.18
17500	9.51	±0.18
18000	9.66	±0.18
18500	9.81	±0.23
19000	9.95	±0.23
19500	10.10	±0.23

Set / Applied, MHz	Measured, dB	Uncertainty, dB
20000	10.25	±0.23
20500	10.38	±0.23
21000	10.52	±0.23
21500	10.67	±0.23
22000	10.84	±0.23
22500	11.00	±0.29
23000	11.10	±0.29
23500	11.20	±0.29
24000	11.32	±0.29
24500	11.42	±0.29
25000	11.59	±0.23
25500	11.70	±0.23
26000	11.85	±0.23
26500	11.97	±0.23
27000	12.07	±0.33
27500	12.17	±0.33
28000	12.26	±0.40
28500	12.38	±0.40
29000	12.50	±0.40
29500	12.63	±0.40
30000	12.75	±0.40
30500	12.82	±0.33
31000	12.93	±0.33
31500	13.09	±0.33
32000	13.22	±0.33
32500	13.35	±0.33
33000	13.48	±0.33
33500	13.60	±0.33
34000	13.72	±0.33
34500	13.80	±0.40
35000	13.92	±0.40
35500	14.01	±0.40
36000	14.12	±0.40
36500	14.23	±0.40
37000	14.34	±0.33
37500	14.44	±0.33
38000	14.57	±0.33
38500	14.72	±0.33
39000	14.82	±0.33
39500	14.94	±0.33
40000	15.08	±0.47



HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HERMON LABORATORIES

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers for OATS are R-10808 for RE measurements below 1 GHz, G-20112 for RE measurements above 1 GHz, R-11082 for anechoic chamber for RE measurements below 1 GHz, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager



12 APPENDIX D Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



13 APPENDIX E

Specification references

FCC 47CFR part 15: 2019	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-247 Issue 2: 2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices
RSS-Gen Issue 5 with Am.1: 2019	General Requirements for Compliance of Radio Apparatus
ICES-003 Issue 6: 2019 (updated)	Information Technology Equipment (Including Digital Apparatus)— Limits and Methods of Measurement



14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT