

TEST REPORT

Reference No...... : WTX22X04081956W005
FCC ID : YHLBLUJ6S
Applicant : BLU Products, Inc.
Address : 10814 NW 33rd St # 100 Doral, FL 33172,USA
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Smart Phone
Model No...... : J6S
Standards : **FCC PART15 SUBPART B**
Date of Receipt sample ... : 2022-04-27
Date of Test..... : 2022-04-27 to 2022-05-24
Date of Issue : 2022-05-24
Test Report Form No. : WTX_FCC PART15B_001
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Jason Su

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND OPERATION MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	9
3. CONDUCTED EMISSIONS	10
3.1 TEST PROCEDURE	10
3.2 BASIC TEST SETUP BLOCK DIAGRAM	10
3.3 ENVIRONMENTAL CONDITIONS	10
3.4 SUMMARY OF TEST RESULTS	10
4. RADIATED EMISSION	13
4.1 TEST PROCEDURE	13
4.2 BLOCK DIAGRAM OF TEST SETUP	13
4.3 TEST RECEIVER SETUP	14
4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	14
4.5 ENVIRONMENTAL CONDITIONS	14
4.6 SUMMARY OF TEST RESULTS	14

Report version

Version No.	Date of issue	Description
Rev.00	2022-05-24	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Smart Phone
Trade Name:	BLU
Model No.:	J6S
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	DC3.8V
Rated Current:	/
Rated Power:	/
Power Adapter Model:	US-CR-1000 Input:AC100-240V, 50/60Hz, 0.2A Output:DC5.0V, 1000mA
Lowest Internal Frequency:	/
Highest Internal Frequency:	Above 108MHz
Classification of ITE:	Class B

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15 Subpart B:Unintentional Radiators.

ANSI C63.4-2014:American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	Power Supply Mode
TM1	Charging And Playing	Connect to the Adapter;	AC120V 60Hz for adapter
TM2	Downloading	Connect to the Notebook;	AC120V 60Hz for PC
TM3	Camera	Camera On	DC3.8V
TM4	FM	Worst case FM 98MHz	DC3.8V
TM5	GPS Receive	Receive 1575.42MHz	DC3.8V
TM6	GSM	Receiver	DC3.85V
TM7	WCDMA	Receiver	DC3.85V
Remark: Only show the worst case (TM1-TM5) in the test report.			

EUT Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
USB Cable	1.0	Unshielded	Without Ferrite	/

Special Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
Earphone Cable	1.0	Unshielded	Without Ferrite	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	ASUS	FA5061C	M8NRCX057996349

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Radiated Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
☒ Chamber A: Below 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☐ Chamber A: Above 1GHz					
Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
☐ Chamber B: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
☐ Chamber C: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
☒ Conducted Room 1#					
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-22	2023-03-21
AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
☐ Conducted Room 2#					
EMI Test Receiver	Rohde & Schwarz	ESPI	10129	2022-03-22	2023-03-21
LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.107(a) Conducted Emission	Compliant
§15.109(a) Radiated Emission	Compliant


N/A: not applicable

3. Conducted Emissions

3.1 Test Procedure

Test is conducting under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.2 Basic Test Setup Block Diagram

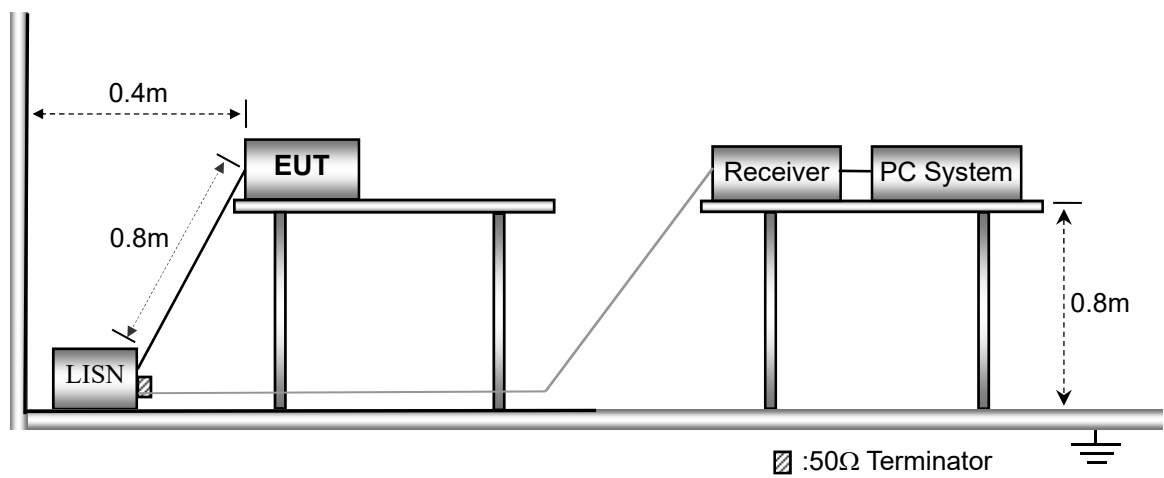


3.3 Environmental Conditions

Temperature:	23.5 °C
Relative Humidity:	54 %
ATM Pressure:	1014 mbar

3.4 Summary of Test Results


Please find the results below:

Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

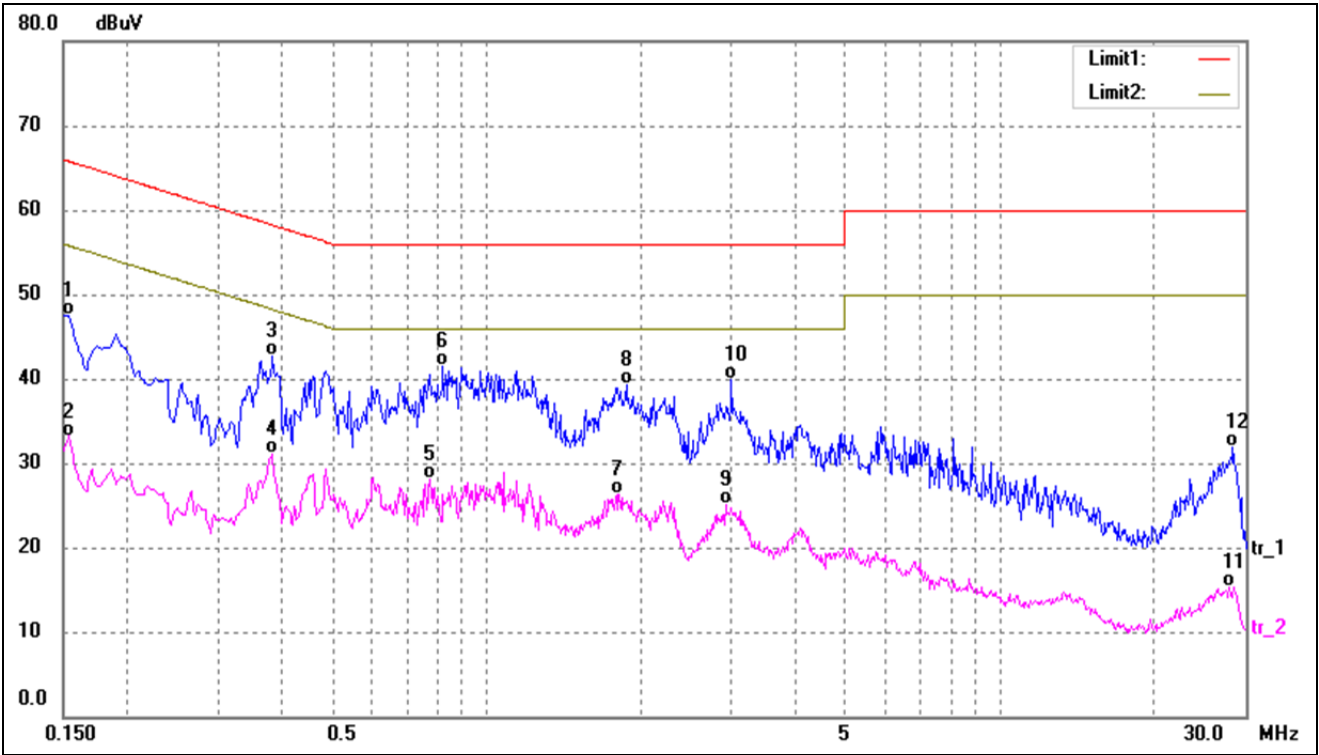

No.	Frequency	Reading	Correct	Result	Limit	Margin	Detector
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1539	37.21	10.37	47.58	65.78	-18.20	QP
2	0.1539	22.83	10.37	33.20	55.78	-22.58	AVG
3	0.3820	32.43	10.30	42.73	58.23	-15.50	QP
4	0.3820	20.76	10.30	31.06	48.23	-17.17	AVG
5	0.7780	17.61	10.43	28.04	46.00	-17.96	AVG
6*	0.8260	31.01	10.46	41.47	56.00	-14.53	QP
7	1.8140	16.15	10.21	26.36	46.00	-19.64	AVG
8	1.8740	29.15	10.18	39.33	56.00	-16.67	QP
9	2.9219	14.99	10.09	25.08	46.00	-20.92	AVG
10	3.0020	29.74	10.09	39.83	56.00	-16.17	QP
11	27.9860	5.12	10.23	15.35	50.00	-34.65	AVG
12	28.3020	21.70	10.23	31.93	60.00	-28.07	QP

Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

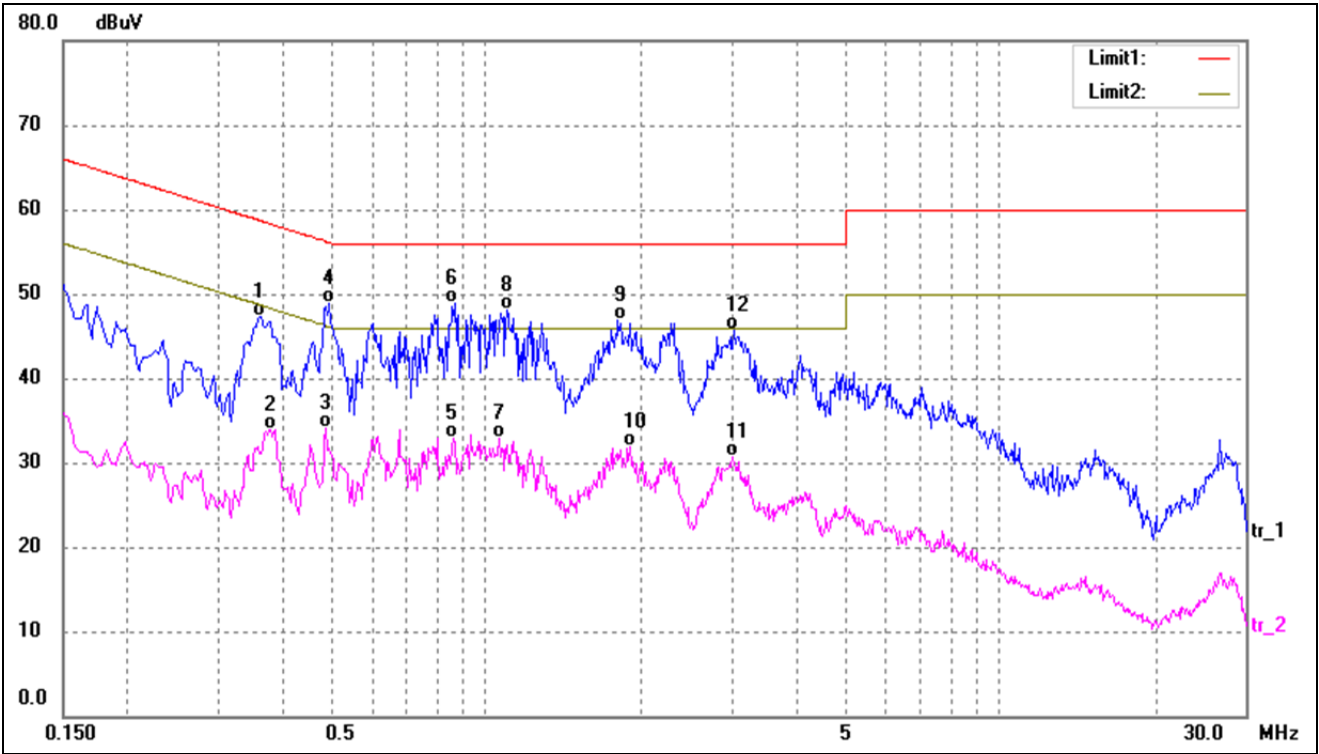

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3620	37.03	10.31	47.34	58.68	-11.34	QP
2	0.3780	23.67	10.30	33.97	48.32	-14.35	AVG
3	0.4860	23.93	10.26	34.19	46.24	-12.05	AVG
4	0.4940	38.60	10.26	48.86	56.10	-7.24	QP
5	0.8660	22.44	10.48	32.92	46.00	-13.08	AVG
6*	0.8700	38.35	10.48	48.83	56.00	-7.17	QP
7	1.0580	22.32	10.54	32.86	46.00	-13.14	AVG
8	1.0940	37.49	10.52	48.01	56.00	-7.99	QP
9	1.8060	36.71	10.22	46.93	56.00	-9.07	QP
10	1.9020	21.74	10.17	31.91	46.00	-14.09	AVG
11	3.0100	20.63	10.09	30.72	46.00	-15.28	AVG
12	3.0260	35.56	10.09	45.65	56.00	-10.35	QP


4. RADIATED EMISSION

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

4.2 Block Diagram of Test Setup

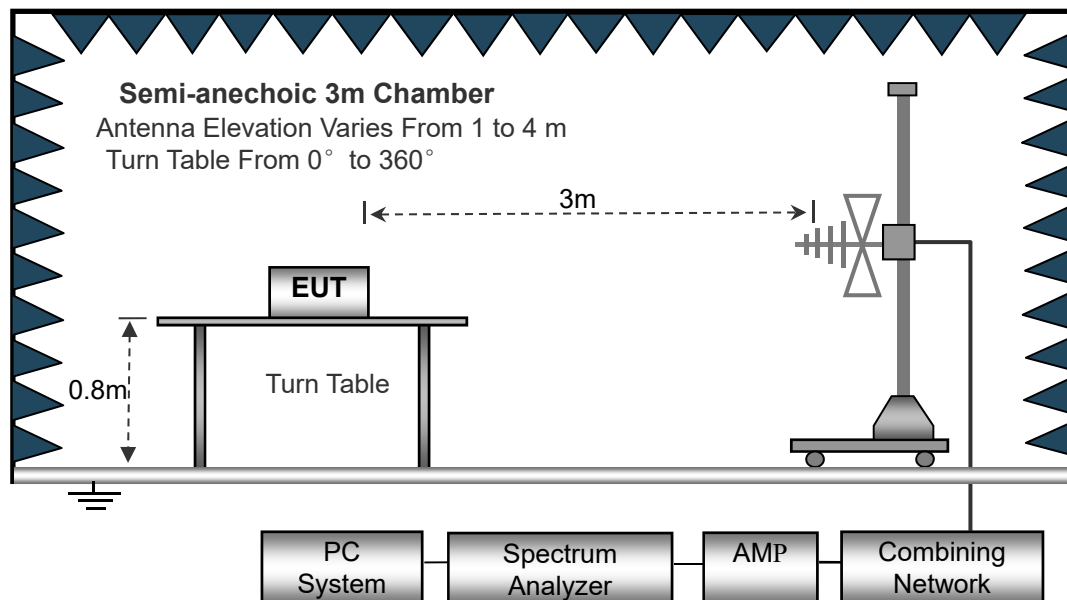

4.3 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\begin{aligned}\text{Corr. Ampl.} &= \text{Indicated Reading} + \text{Correct} \\ \text{Correct} &= \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.5 Environmental Conditions


Temperature:	23.5°C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar

4.6 Summary of Test Results

Please find the results below:


Below 1GHz

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

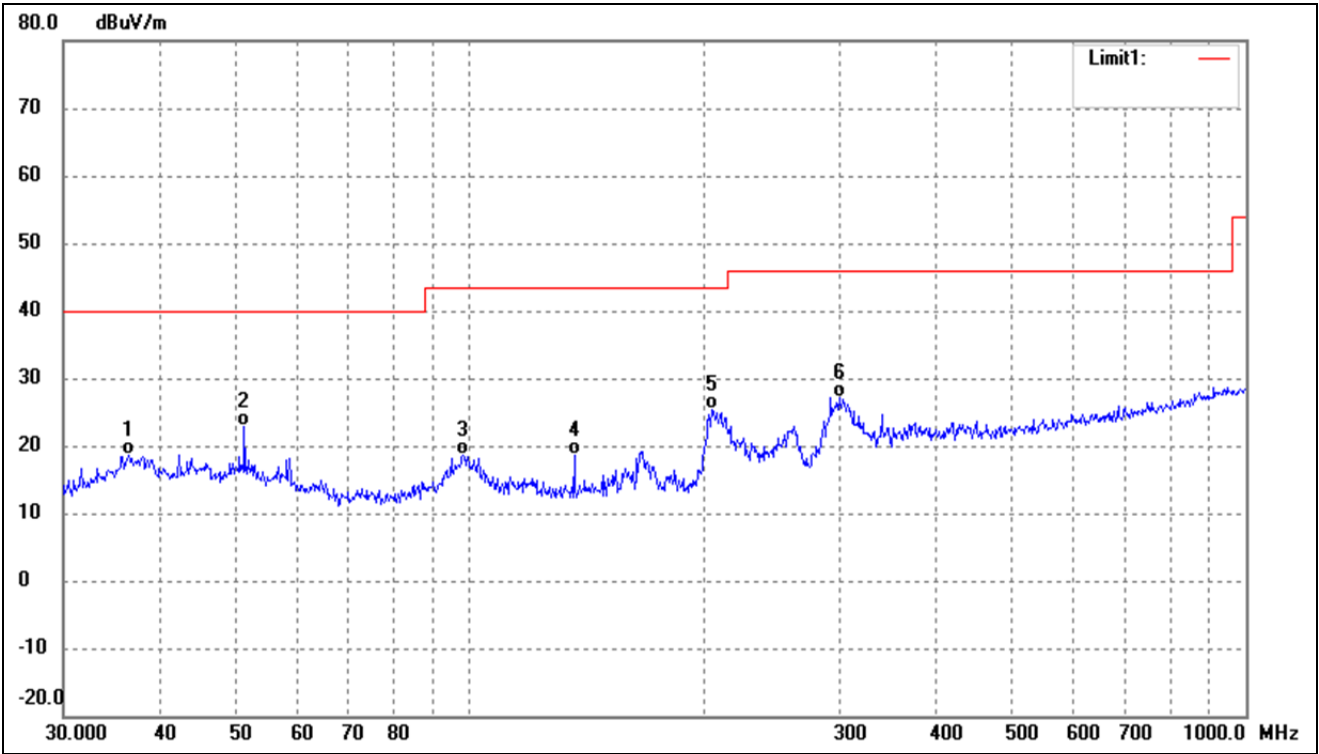


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.3814	30.10	-11.55	18.55	40.00	-21.45	-	-	QP
2	51.3005	34.07	-11.14	22.93	40.00	-17.07	-	-	QP
3	98.1419	30.75	-12.20	18.55	43.50	-24.95	-	-	QP
4	136.4598	33.65	-15.04	18.61	43.50	-24.89	-	-	QP
5	204.9551	37.70	-12.26	25.44	43.50	-18.06	-	-	QP
6	299.3158	36.48	-9.35	27.13	46.00	-18.87	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

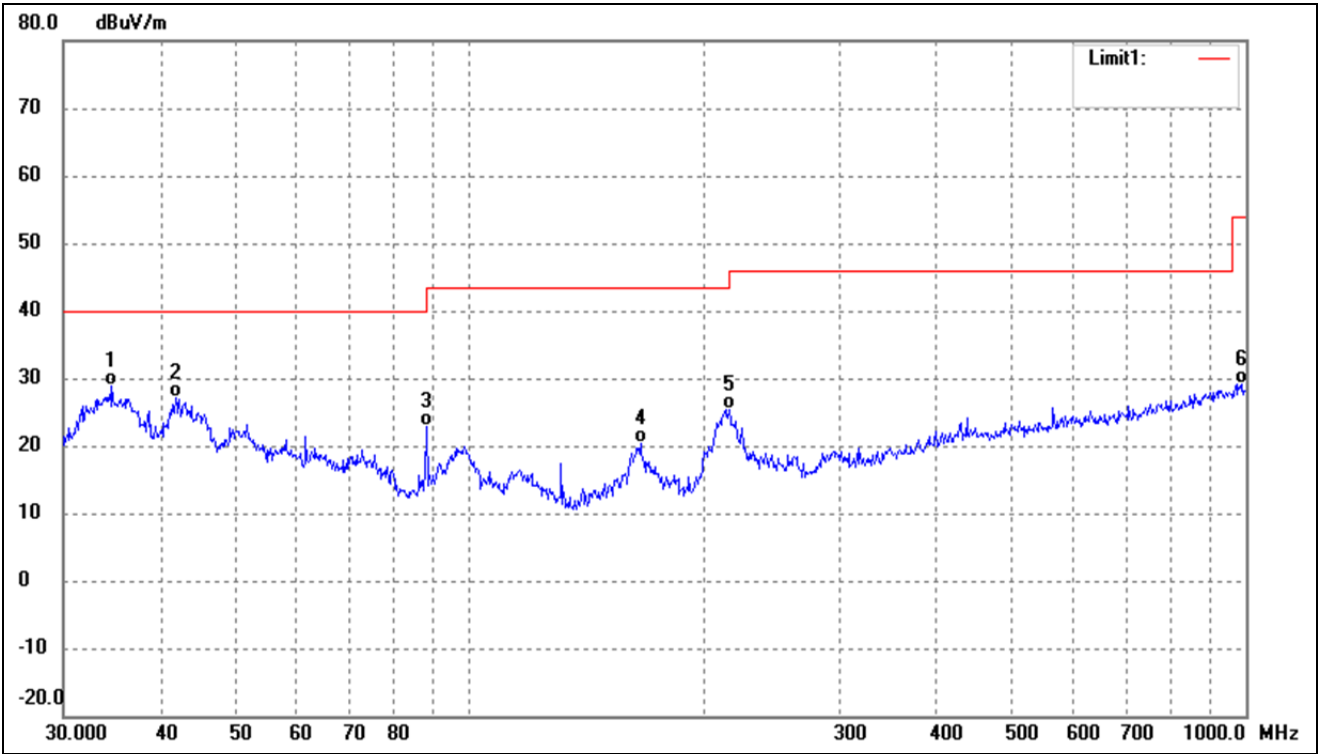


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	34.6385	40.68	-11.86	28.82	40.00	-11.18	-	-	QP
2	41.8596	37.92	-10.90	27.02	40.00	-12.98	-	-	QP
3	88.0329	36.30	-13.33	22.97	43.50	-20.53	-	-	QP
4	166.0680	34.96	-14.58	20.38	43.50	-23.12	-	-	QP
5	216.0240	37.41	-11.93	25.48	46.00	-20.52	-	-	QP
6	989.5355	27.86	1.30	29.16	54.00	-24.84	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

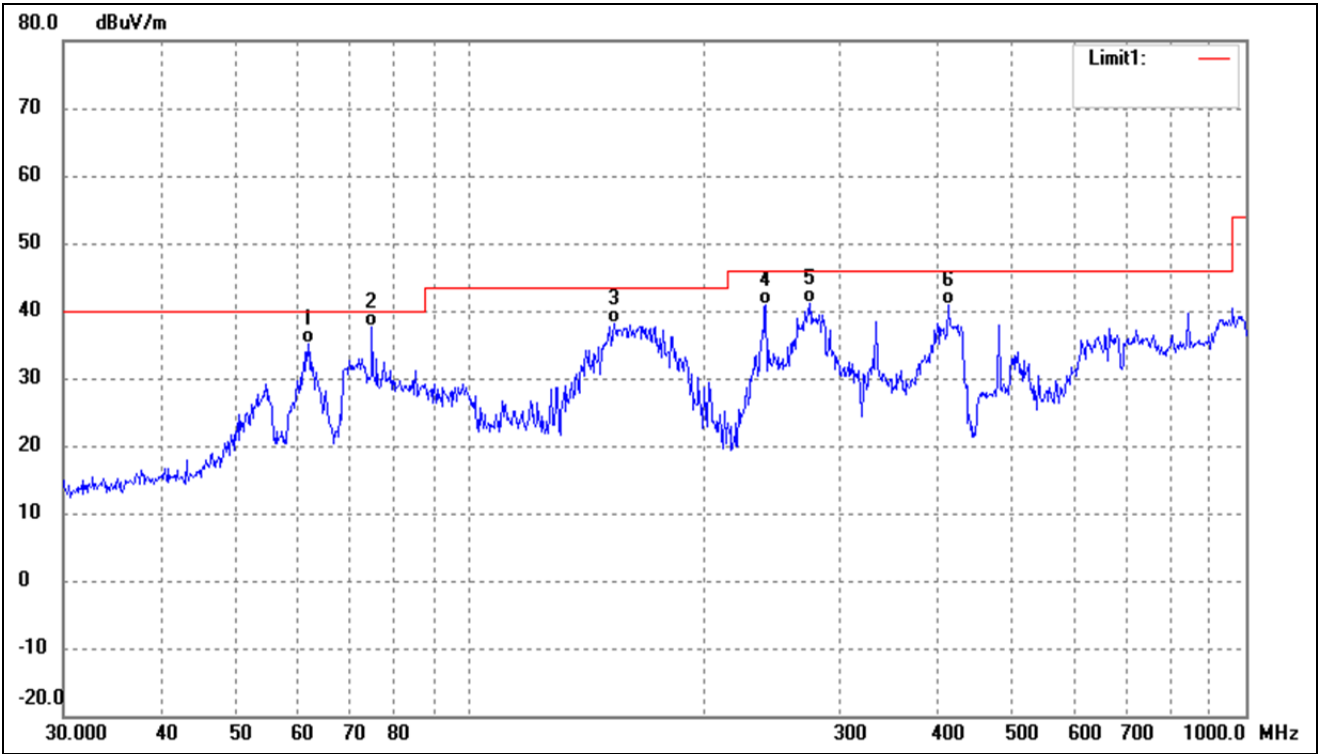


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	61.9951	48.47	-13.29	35.18	40.00	-4.82	-	-	QP
2	74.9191	52.72	-15.14	37.58	40.00	-2.42	-	-	QP
3	153.7384	53.20	-15.12	38.08	43.50	-5.42	-	-	QP
4	240.8300	51.95	-11.18	40.77	46.00	-5.23	-	-	QP
5	274.1938	51.16	-10.14	41.02	46.00	-4.98	-	-	QP
6	413.2706	46.74	-5.75	40.99	46.00	-5.01	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

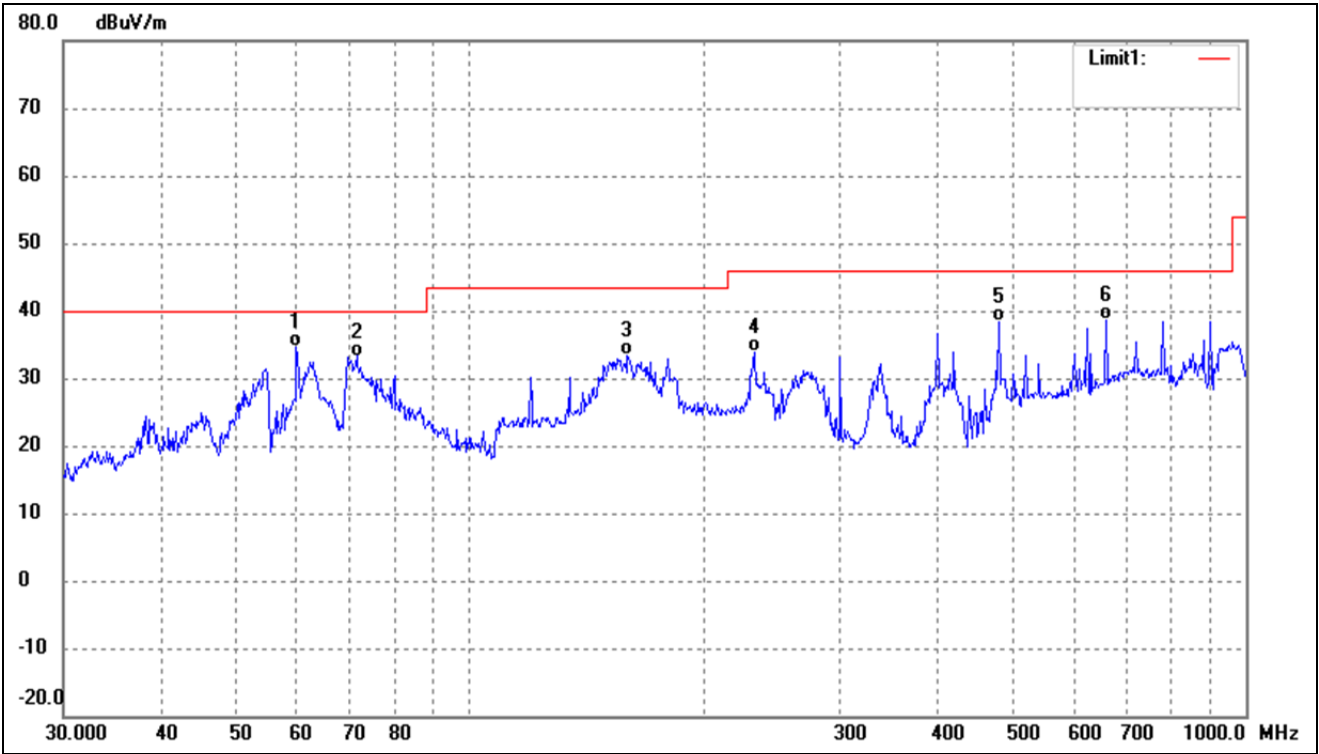


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	59.8588	47.46	-12.80	34.66	40.00	-5.34	-	-	QP
2	71.5806	48.63	-15.38	33.25	40.00	-6.75	-	-	QP
3	159.7844	48.22	-14.82	33.40	43.50	-10.10	-	-	QP
4	232.5318	45.33	-11.43	33.90	46.00	-12.10	-	-	QP
5	480.5276	43.46	-5.20	38.26	46.00	-7.74	-	-	QP
6	661.1503	41.80	-3.25	38.55	46.00	-7.45	-	-	QP

Test mode:	TM3	Polarity:	Horizontal
------------	-----	-----------	------------

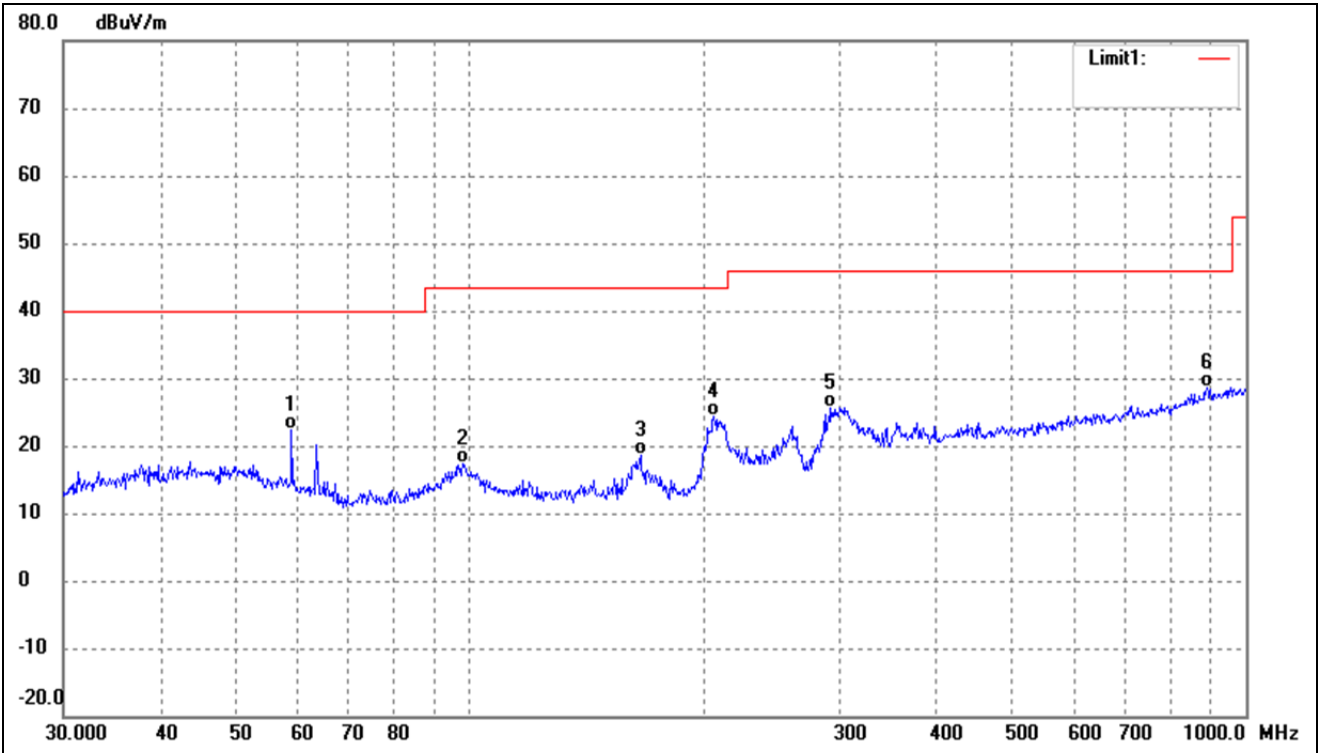


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	59.0251	35.13	-12.63	22.50	40.00	-17.50	-	-	QP
2	98.1419	29.58	-12.20	17.38	43.50	-26.12	-	-	QP
3	166.0680	33.09	-14.58	18.51	43.50	-24.99	-	-	QP
4	206.3976	36.71	-12.21	24.50	43.50	-19.00	-	-	QP
5	292.0583	35.31	-9.57	25.74	46.00	-20.26	-	-	QP
6	890.7278	28.21	0.30	28.51	46.00	-17.49	-	-	QP

Test mode:	TM3	Polarity:	Vertical
------------	-----	-----------	----------

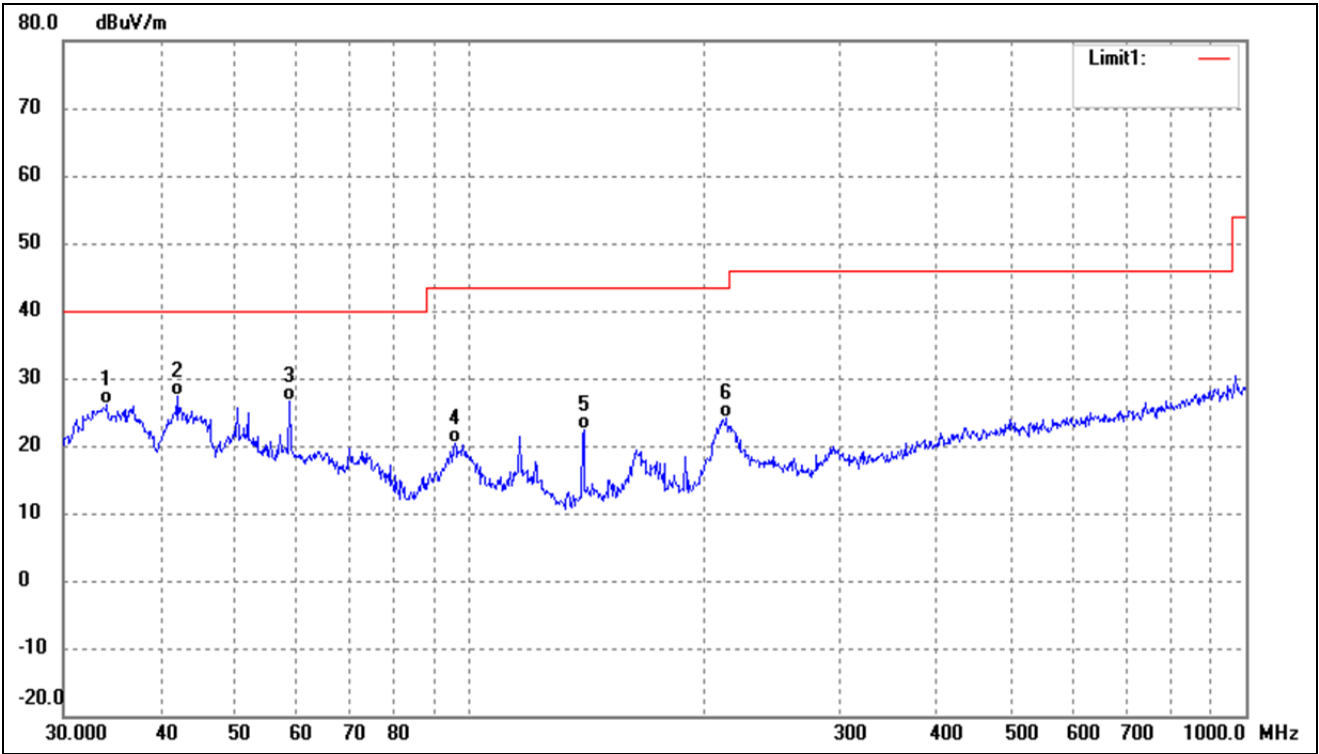


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	34.1561	38.04	-11.94	26.10	40.00	-13.90	-	-	QP
2	42.0066	38.31	-10.90	27.41	40.00	-12.59	-	-	QP
3	58.6126	39.19	-12.56	26.63	40.00	-13.37	-	-	QP
4	95.7622	32.83	-12.34	20.49	43.50	-23.01	-	-	QP
5	140.3421	37.46	-15.19	22.27	43.50	-21.23	-	-	QP
6	214.5143	35.99	-11.97	24.02	43.50	-19.48	-	-	QP

Test mode:	TM4	Polarity:	Horizontal
------------	-----	-----------	------------

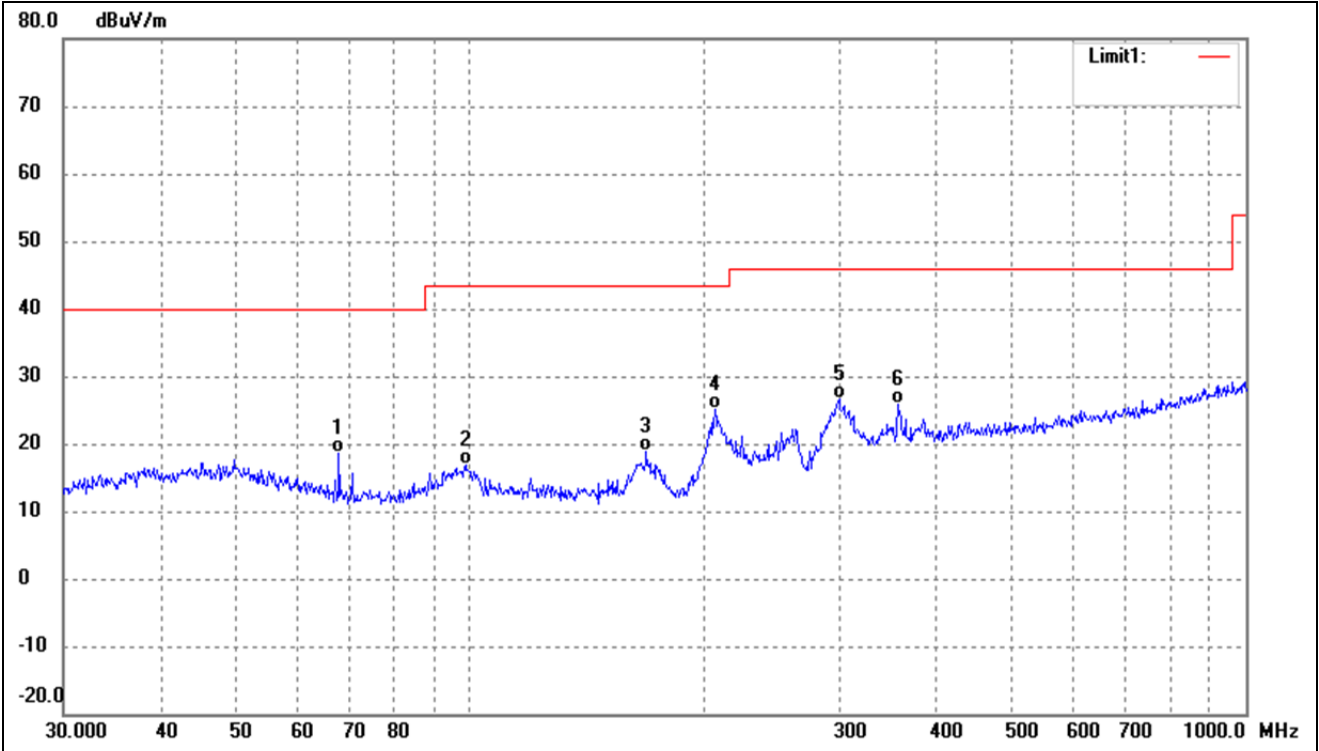


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	67.9129	33.54	-14.86	18.68	40.00	-21.32	-	-	QP
2	98.8326	29.09	-12.15	16.94	43.50	-26.56	-	-	QP
3	169.0054	33.21	-14.45	18.76	43.50	-24.74	-	-	QP
4	207.1226	37.24	-12.19	25.05	43.50	-18.45	-	-	QP
5	299.3158	36.08	-9.35	26.73	46.00	-19.27	-	-	QP
6	356.6758	33.41	-7.63	25.78	46.00	-20.22	-	-	QP

Test mode:	TM4	Polarity:	Vertical
------------	-----	-----------	----------

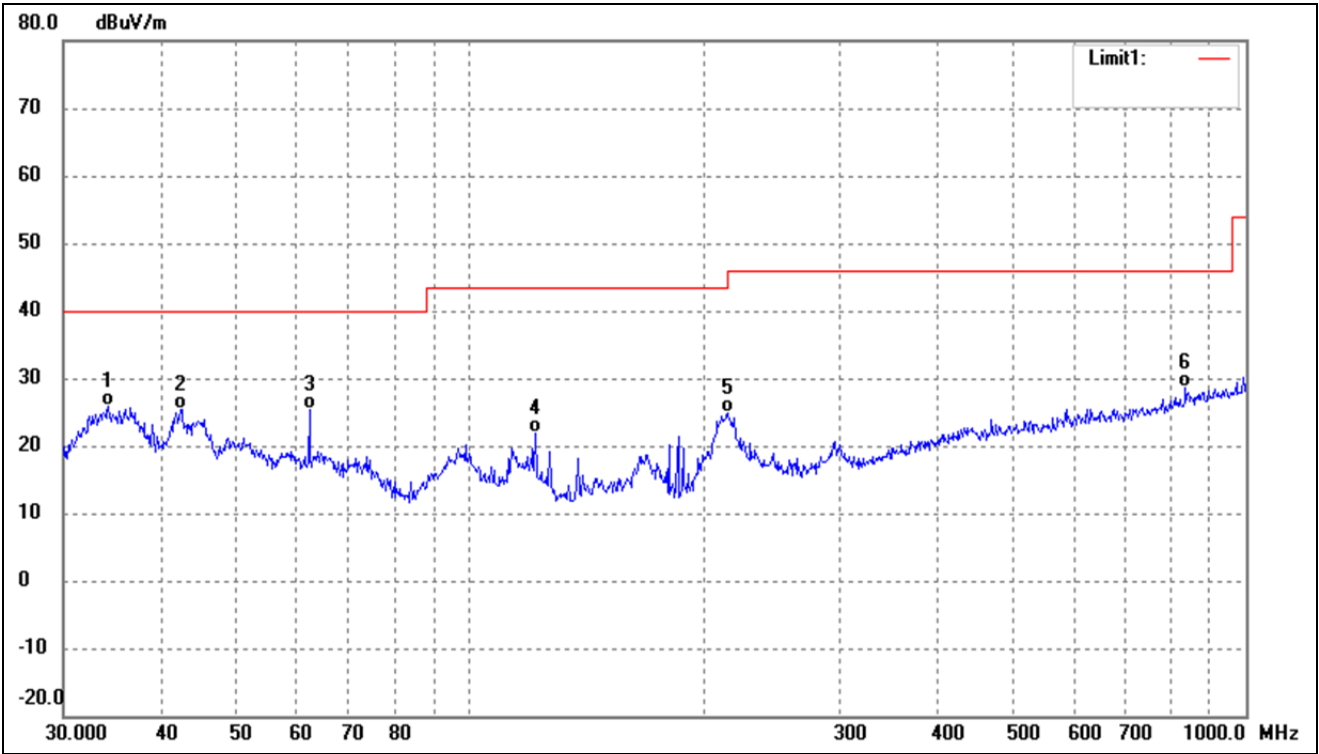


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	34.2760	37.70	-11.92	25.78	40.00	-14.22	-	-	QP
2	42.4508	36.27	-10.90	25.37	40.00	-14.63	-	-	QP
3	62.2128	38.62	-13.34	25.28	40.00	-14.72	-	-	QP
4	121.5486	35.84	-14.06	21.78	43.50	-21.72	-	-	QP
5	215.2678	36.82	-11.94	24.88	43.50	-18.62	-	-	QP
6	836.2443	29.39	-0.74	28.65	46.00	-17.35	-	-	QP

Test mode:	TM5	Polarity:	Horizontal
------------	-----	-----------	------------

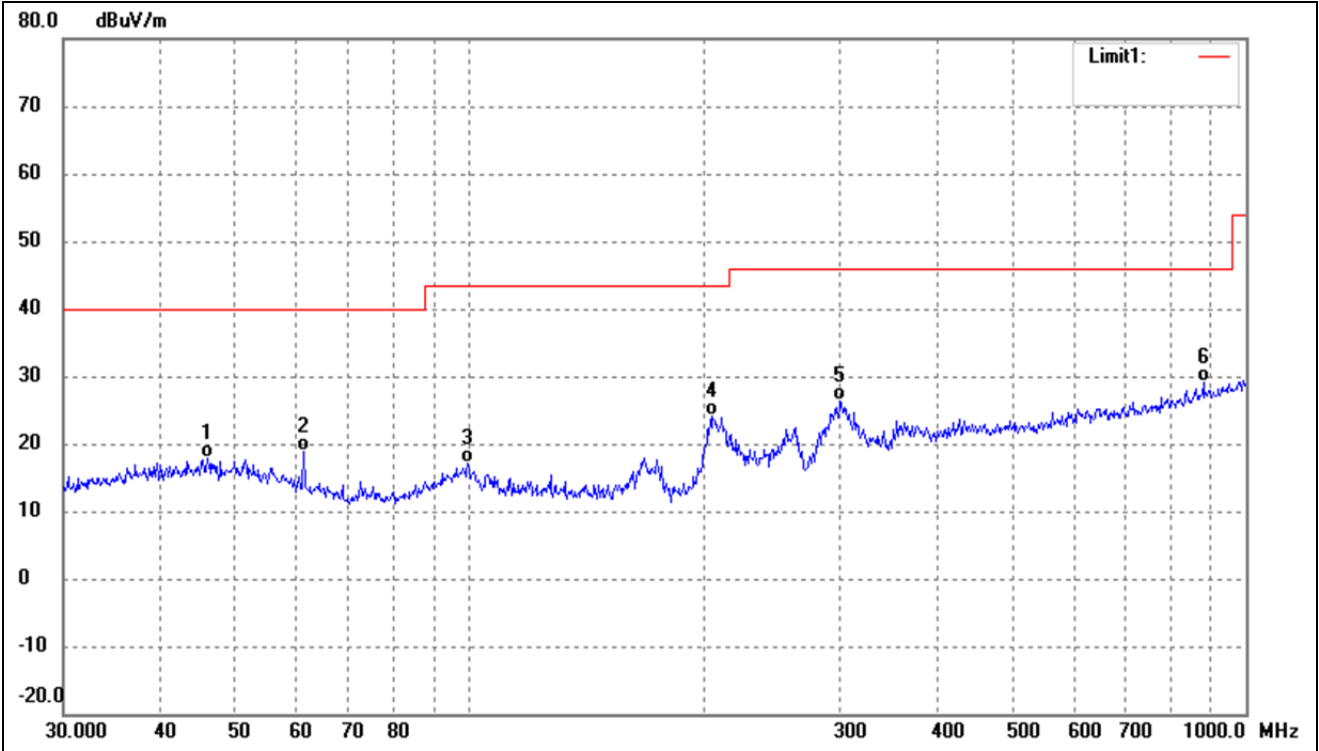

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.0164	28.71	-10.89	17.82	40.00	-22.18	-	-	QP
2	61.1316	31.98	-13.09	18.89	40.00	-21.11	-	-	QP
3	99.5281	29.26	-12.11	17.15	43.50	-26.35	-	-	QP
4	205.6751	36.41	-12.23	24.18	43.50	-19.32	-	-	QP
5	300.3672	35.77	-9.32	26.45	46.00	-19.55	-	-	QP
6	881.4067	29.12	0.13	29.25	46.00	-16.75	-	-	QP


Test mode:	TM5	Polarity:	Vertical
------------	-----	-----------	----------

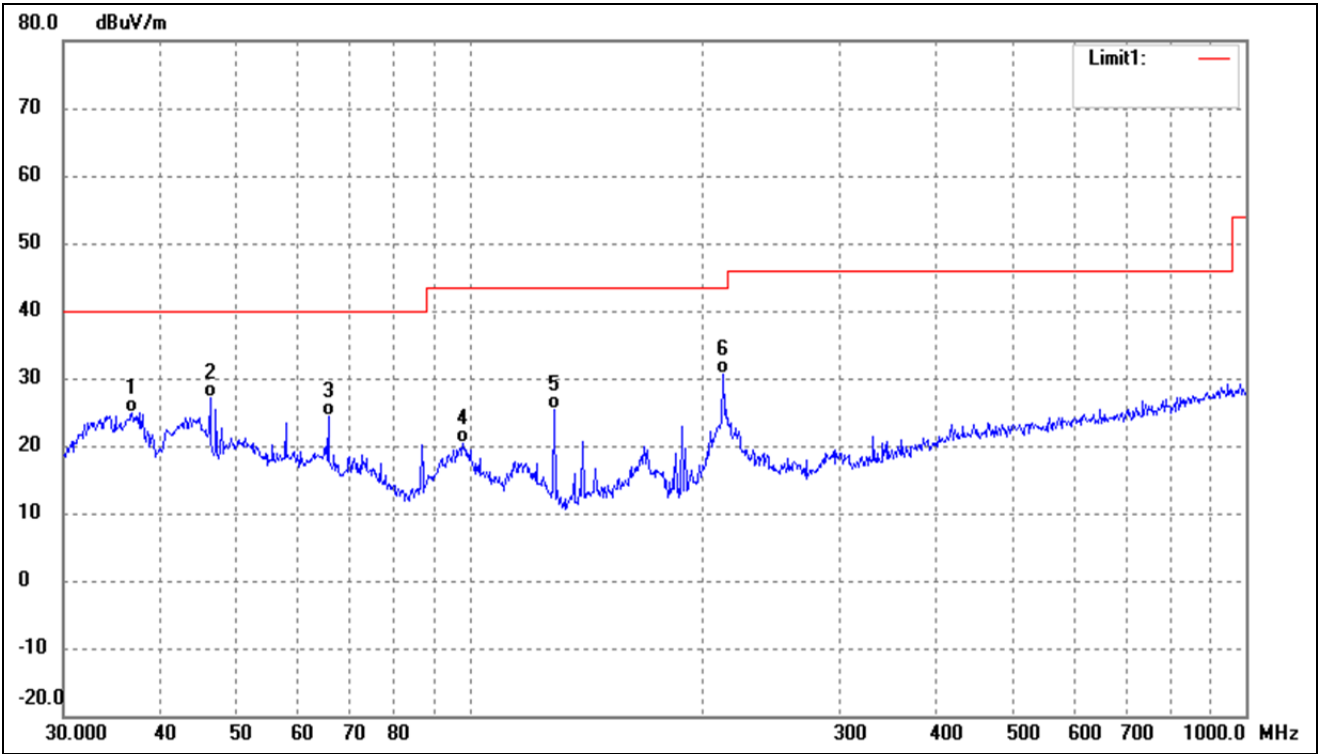

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.7662	36.39	-11.48	24.91	40.00	-15.09	-	-	QP
2	46.3402	38.02	-10.89	27.13	40.00	-12.87	-	-	QP
3	65.8031	38.51	-14.22	24.29	40.00	-15.71	-	-	QP
4	98.1419	32.51	-12.20	20.31	43.50	-23.19	-	-	QP
5	128.5630	40.17	-14.69	25.48	43.50	-18.02	-	-	QP
6	212.2695	42.55	-12.03	30.52	43.50	-12.98	-	-	QP


Above 1GHz

Test mode:	TM1 (worst case)	Polarity:	Horizontal
------------	------------------	-----------	------------

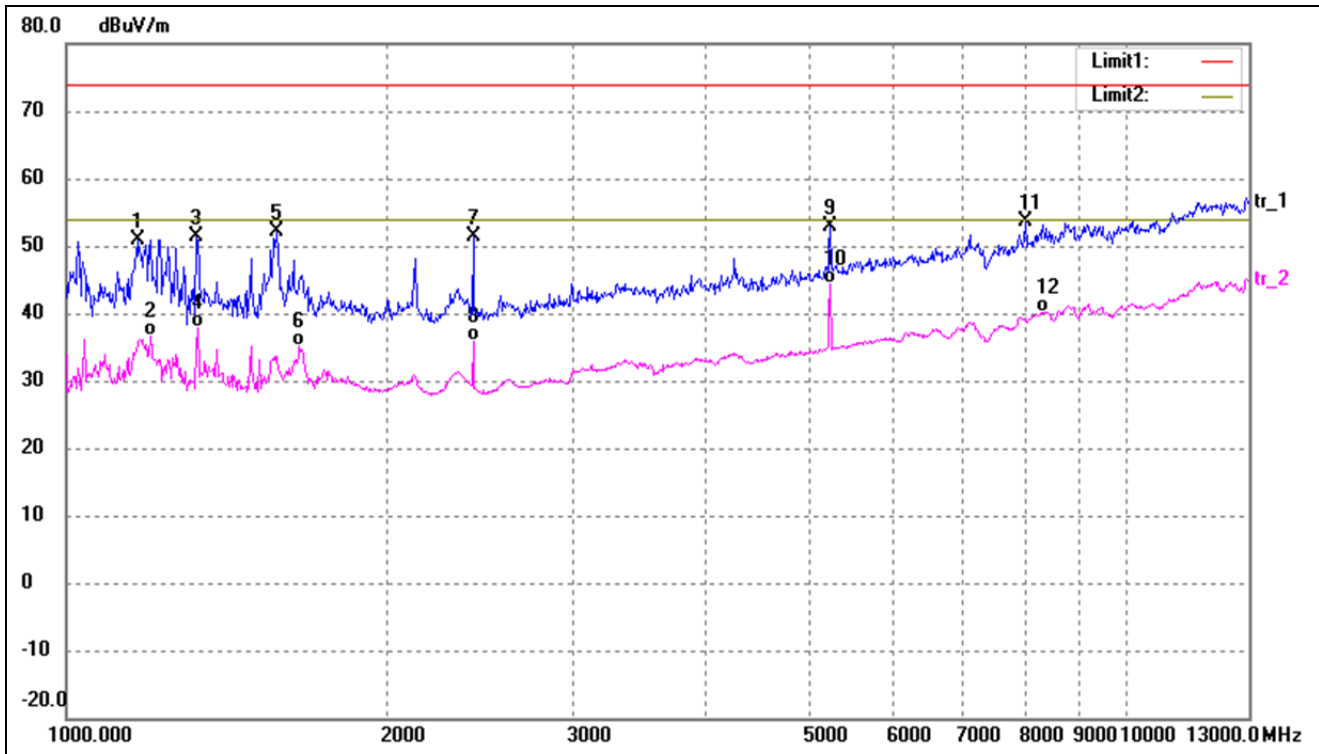

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	1169.366	65.32	-14.33	50.99	74.00	-23.01	-	-	peak
2	1199.748	50.73	-14.18	36.55	54.00	-17.45	-	-	AVG
3	1325.970	64.88	-13.54	51.34	74.00	-22.66	-	-	peak
4	1329.376	51.44	-13.53	37.91	54.00	-16.09	-	-	AVG
5	1578.636	64.57	-12.44	52.13	74.00	-21.87	-	-	peak
6	1657.474	47.22	-12.21	35.01	54.00	-18.99	-	-	AVG
7	2416.554	62.05	-10.66	51.39	74.00	-22.61	-	-	peak
8	2416.554	46.44	-10.66	35.78	54.00	-18.22	-	-	AVG
9	5243.333	58.08	-5.16	52.92	74.00	-21.08	-	-	peak
10	5243.333	49.42	-5.16	44.26	54.00	-9.74	-	-	AVG
11	8005.861	53.82	-0.28	53.54	74.00	-20.46	-	-	peak
12	8319.883	39.93	0.29	40.22	54.00	-13.78	-	-	AVG

Test mode:	TM1 (worst case)	Polarity:	Vertical
------------	------------------	-----------	----------

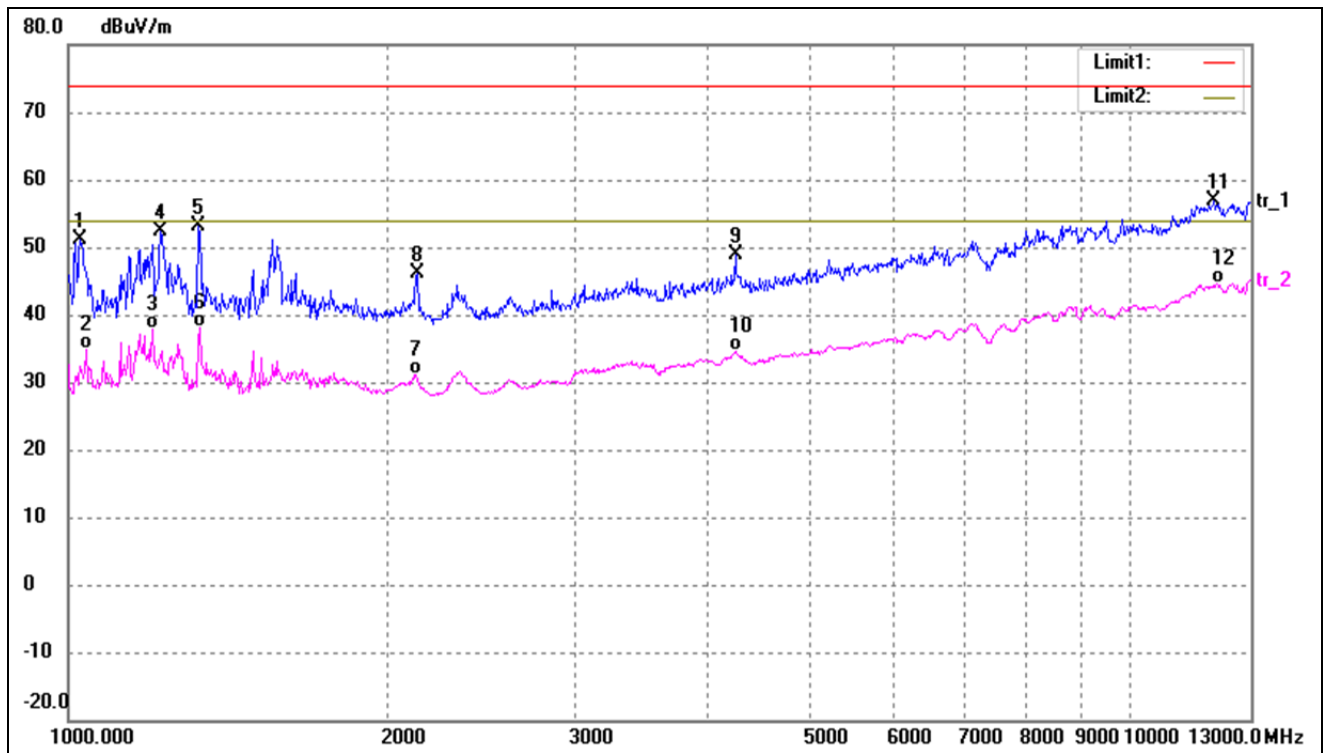

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	1025.981	66.23	-15.06	51.17	74.00	-22.83	-	-	peak
2	1039.224	49.90	-14.99	34.91	54.00	-19.09	-	-	AVG
3	1199.748	51.95	-14.18	37.77	54.00	-16.23	-	-	AVG
4	1221.483	66.49	-14.07	52.42	74.00	-21.58	-	-	peak
5	1325.970	66.61	-13.54	53.07	74.00	-20.93	-	-	peak
6	1329.376	51.70	-13.53	38.17	54.00	-15.83	-	-	AVG
7	2120.242	42.31	-11.07	31.24	54.00	-22.76	-	-	AVG
8	2131.146	57.13	-11.06	46.07	74.00	-27.93	-	-	peak
9	4248.778	56.19	-7.34	48.85	74.00	-25.15	-	-	peak
10	4248.778	42.05	-7.34	34.71	54.00	-19.29	-	-	AVG
11	12006.353	50.88	6.05	56.93	74.00	-17.07	-	-	peak
12	12068.103	38.48	6.12	44.60	54.00	-9.40	-	-	AVG

Remark: '-' Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

***** END OF REPORT *****