

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Zylux Acoustic Corporation.

HP Roar Wireless Speaker

Model Number: HP SR7250

FCC ID: XN6-SR7250

Prepared for : Zylux Acoustic Corporation.
3F, 22Lane 35, Jihu Road, Neihu Technology Park, Taipei,
114 Taiwan

Prepared By : EST Technology Co., Ltd.
Santun(guantai Road), Houjie Town, DongGuan City,
GuangDong, China.

Tel: 86-769-83081888-808



Report Number: ESTE-R1406006
Date of Test : May 16 ~ June 02, 2014
Date of Report : June 14, 2014

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities	7
2.3. Assistant equipment used for test.....	8
2.4. Block Diagram	8
2.5. Test mode	9
2.6. Channel List for Bluetooth.....	9
2.7. Test Equipment.....	10
3. MAXIMUM PEAK OUTPUT POWER	11
3.1. Limit	11
3.2. Test Procedure.....	11
3.3. Test Result.....	11
3.4. Test Data	12
4. 20 DB BANDWIDTH.....	16
4.1. Limit	16
4.2. Test Procedure.....	16
4.3. Test Result.....	16
4.4. Test Data	17
5. CARRIER FREQUENCY SEPARATION	21
5.1. Limit	21
5.2. Test Procedure.....	21
5.3. Test Result.....	21
5.4. Test Data	22
6. NUMBER OF HOPPING CHANNEL	26
6.1. Limit	26
6.2. Test Procedure.....	26
6.3. Test Result.....	26
6.4. Test Data	27
7. DWELL TIME	29
7.1. Limit	29
7.2. Test Result.....	29
7.3. Test Data	30
8. RADIATED EMISSIONS.....	36
8.1. Limit	36
8.2. Block Diagram of Test setup.....	37
8.3. Test Procedure.....	37
8.4. Test Result.....	37
8.5. Test Data	38

9.	BAND EDGE COMPLIANCE	74
9.1.	Limit	74
9.2.	Block Diagram of Test setup	74
9.3.	Test Procedure	74
9.4.	Test Result	74
9.5.	Test Data	75
10.	POWER LINE CONDUCTED EMISSIONS	91
10.1.	Limit	91
10.2.	Test Procedure	91
11.	ANTENNA REQUIREMENTS	94
11.1.	Limit	94
11.2.	Result	94
12.	TEST SETUP PHOTO	95
13.	PHOTOS OF EUT	97

Test Report Verification

Applicant:	Zylux Acoustic Corporation.		
Address:	3F, 22Lane 35, Jihu Road, Neihu Technology Park, Taipei, 114 Taiwan		
Manufacturer Address:	Zhao Yang ELEC. (SHENZHEN) CO.,LTD. Building 1 & Building 2, De Yong Jia Industrial Park, Guang Qiao Road, Yu Lv Community, Gong Ming Street, Guang Ming New District, Shenzhen		
E.U.T:	HP Roar Wireless Speaker		
Model Number:	HP SR7250		
Power Supply:	DC 3.7V From Internal Battery DC 5V From PC Input AC 100~240V 50/60Hz		
Test Voltage:	DC 3.7V From Internal Battery		
Trade Name:	HP	Serial No.:	-----
Date of Receipt:	May 16, 2014	Date of Test:	May 16 ~ June 02, 2014
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2013 ANSI C63.4:2009		
Test Result:	The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the ETSI EN FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: June 14, 2014		
Prepared by:	Tested by:	Approved by:	
 	 	 	
Ada / Assistant	Tony.Tang/ Engineer	IcemanHu / Manager	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	HP Roar Wireless Speaker	
Model Number	:	HP SR7250	
FCC ID	:	XN6-SR7250	
Operation frequency	:	2402MHz~2480MHz	
Number of channel	:	79	40
Antenna	:	Internal antenna, 0 dBi gain	
Modulation	:	FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK)	Bluetooth V4.0-BLE (GFSK)
Sample Type	:	Prototype production	

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) DA 00-705	PASS
20dB Bandwidth	FCC Part 15: 15.215 DA 00-705	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) DA 00-705	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.4: 2003 DA 00-705	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) DA 00-705	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.4: 2003 DA 00-705	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2.2. Test Facilities

EMC Lab : Certificated by CNAL, CHINA
 Registration No.: L5288
 Date of registration: October 28, 2011

 Certificated by FCC, USA
 Registration No.: 989591
 Date of registration: November 20, 2013

 Certificated by Industry Canada
 Registration No.: 46405-9405
 Test Side Number: 9405A-1
 Date of registration: January 03, 2013

 Certificated by VCCI, Japan
 Registration No.: R-3663 & C-4103
 Date of registration: July 25, 2011

 Certificated by TUV Rheinland, Germany
 Registration No.: UA 50195514 0001
 Date of registration: January 07, 2011

 Certificated by TUV/PS, Shenzhen
 Registration No.: SCN1017
 Date of registration: January 27, 2011

 Certificated by Intertek ETL SEMKO
 Registration No.: 2011-RTL-L1-18
 Date of registration: April 28, 2011

 Certificated by Siemic, Inc.
 Registration No.: SLCN021
 Date of registration: November 8, 2011

 Certificated by Nemko, Hong Kong
 Registration No.: 175193
 Date of registration: May 4, 2011

Name of Firm : EST Technology Co., Ltd.

Site Location : San Tun Management Zone, Houjie Town, Dongguan,
Guangdong, China

2.3. Assistant equipment used for test

2.3.1. PC

Manufacturer	:	DELL
M/N	:	Laititude E6420
Adapter	:	M/N: DA90PM111
		Input: AC 100-240V~50/60Hz 1.5A
		Output: DC 19.5V/4.62A

2.4. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground. EUT was be set into BT test mode by software before test.

EUT

(EUT: HP Roar Wireless Speaker)

2.5. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency
GFSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz
8-DPSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz

2.6. Channel List for Bluetooth

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

2.7. Test Equipment

2.7.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	July,30,13	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	July,30,13	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	July.25,13	1 Year

2.7.2. For radiated emission test(30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	July,23,13	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	July ,23,13	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	July ,29,13	1 Year
Signal Amplifier	Agilent	310N	187037	July .23,13	1 Year

2.7.3. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	BBHA9120D1 002	July.29,13	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	9718-212	July.23,13	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	July.23,13	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	July.21.13	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer

3.3. Test Result


EUT: HP Roar Wireless Speaker					
M/N: HP SR7250					
Test date: 2014-05-27		Test site: RF site		Tested by: Tony Tang	
Mode	Freq (MHz)	Result (dBm)	Limit		Margin (dB)
			dBm	W	
GFSK	2402	-0.236	30.00	1	30.236
	2441	1.826	30.00	1	28.174
	2480	2.160	30.00	1	27.840
8-DPSK	2402	-2.088	21.00	0.125	23.088
	2441	0.543	21.00	0.125	20.457
	2480	1.235	21.00	0.125	19.765
Conclusion: PASS					

3.4. Test Data


GFSK 2402 MHz

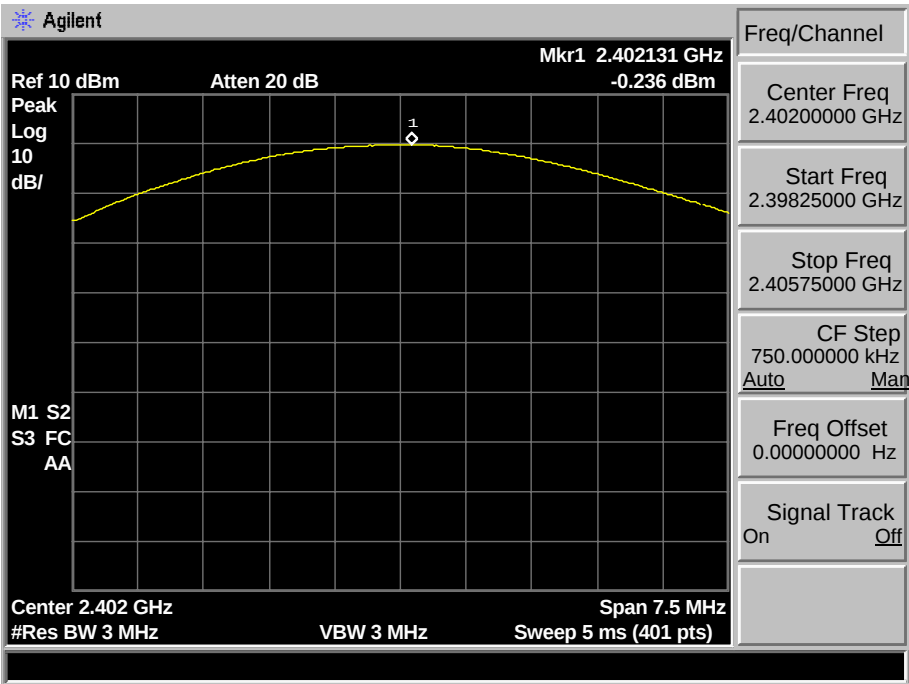


GFSK 2441 MHz

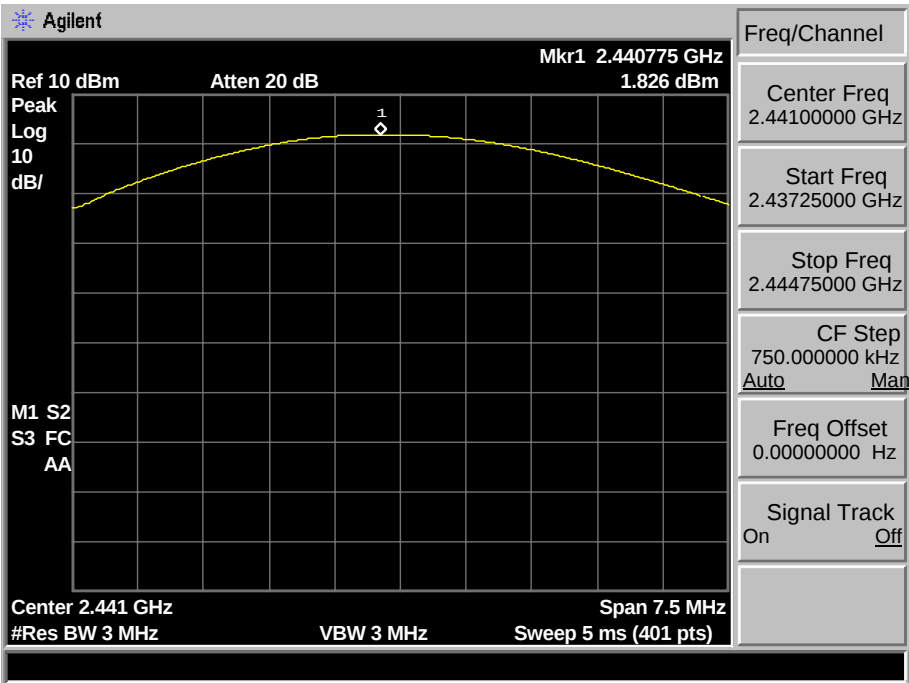


GFSK 2480 MHz

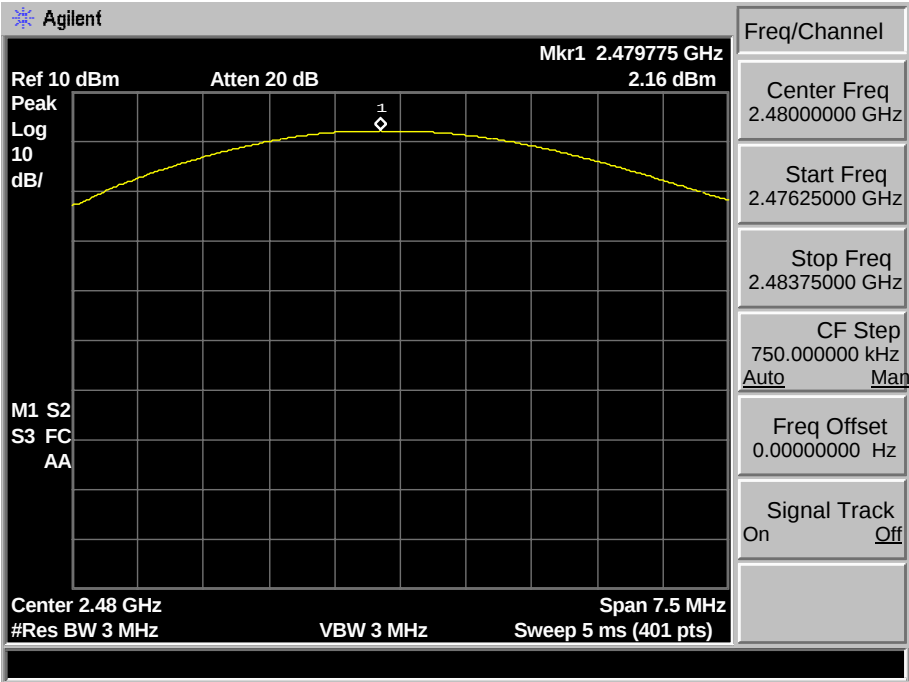


8-DPSK 2402 MHz

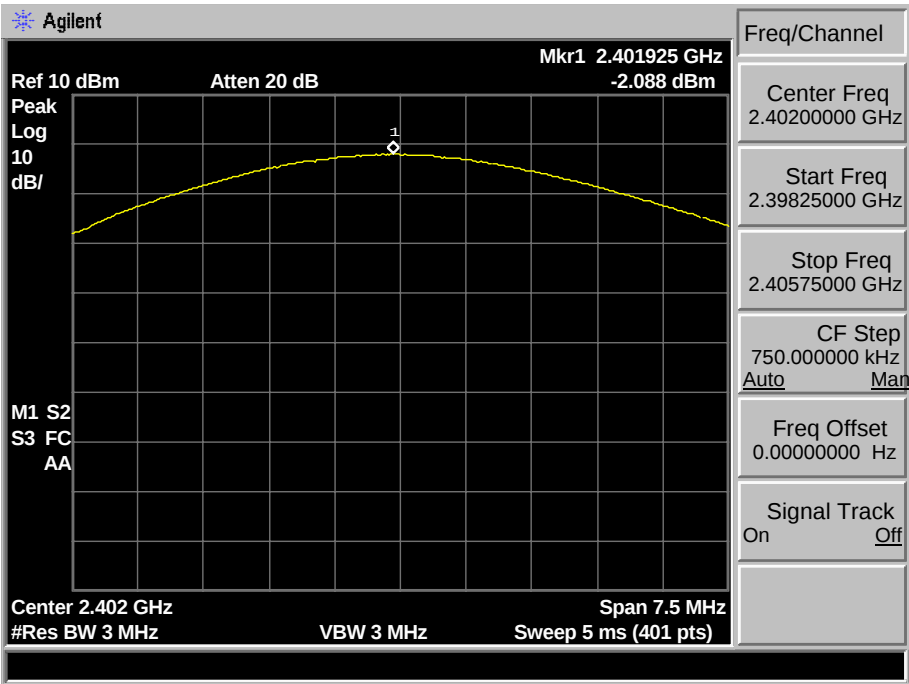

8-DPSK 2441 MHz

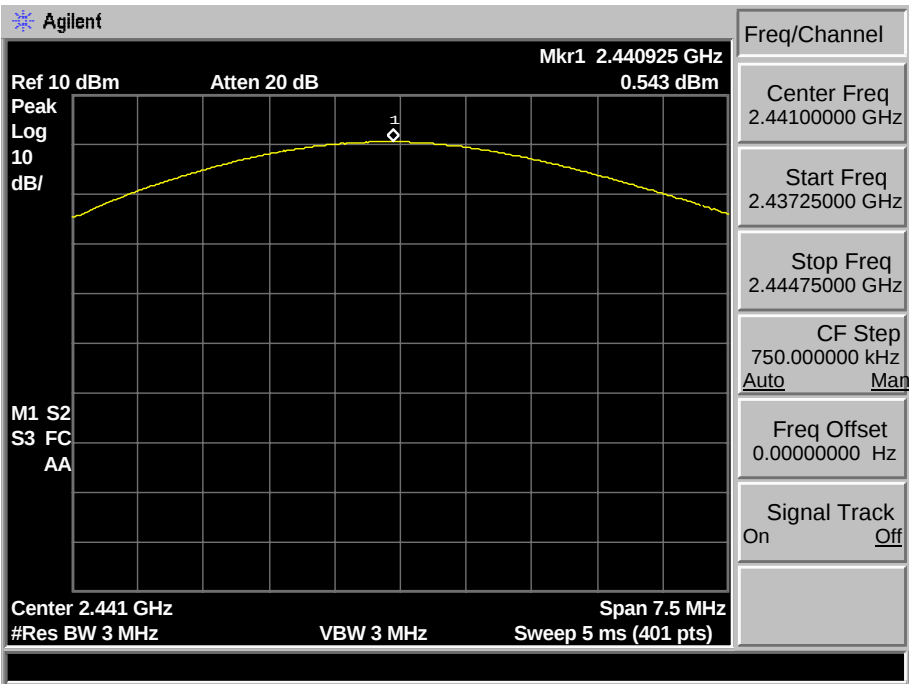

8-DPSK 2480 MHz

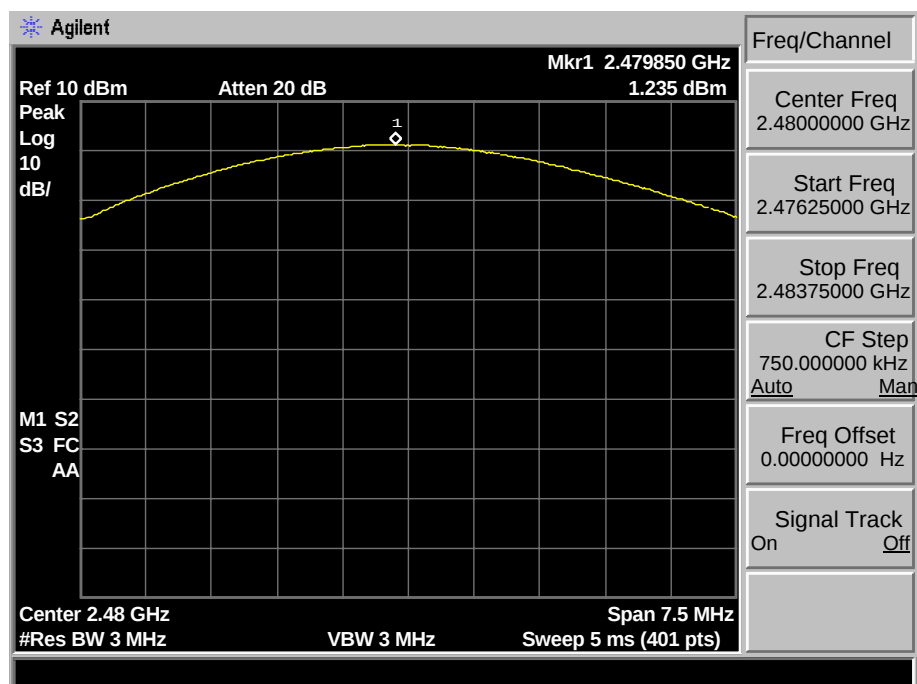

4. 20 DB BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure


The transmitter output was coupled to a spectrum analyzer via a antenna. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


EUT: HP Roar Wireless Speaker				
M/N: HP SR7250				
Test date: 2014-05-27		Test site: RF site		Tested by: Tony Tang
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
GFSK	2402	0.858	/	PASS
	2441	0.870	/	PASS
	2480	0.864	/	PASS
8-DPSK	2402	1.214	/	PASS
	2441	1.223	/	PASS
	2480	1.216	/	PASS

4.4. Test Data


GFSK 2402MHz

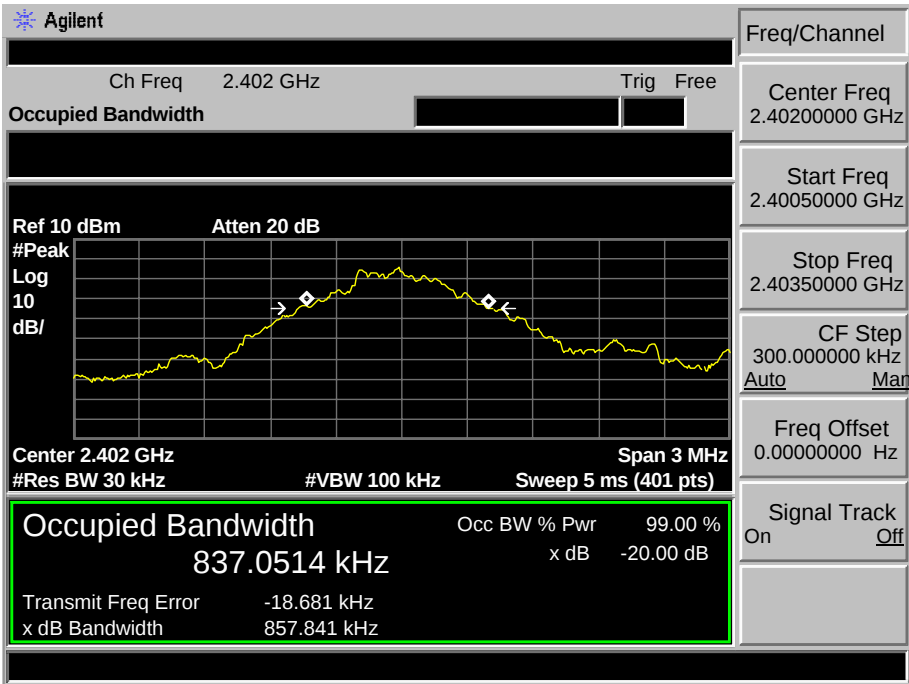


GFSK 2441MHz

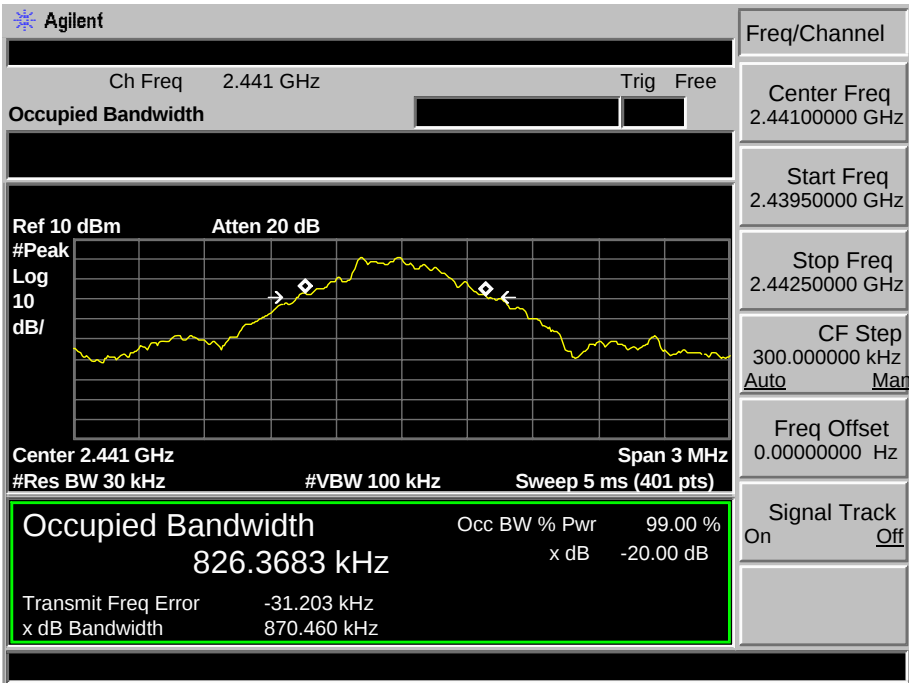


GFSK 2480MHz

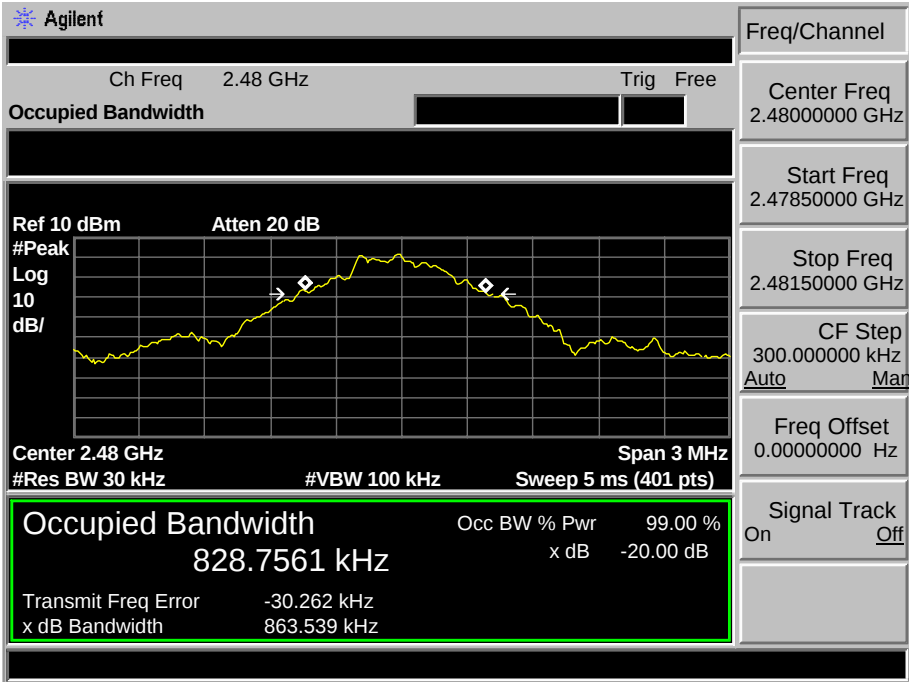


8-DPSK 2402MHz

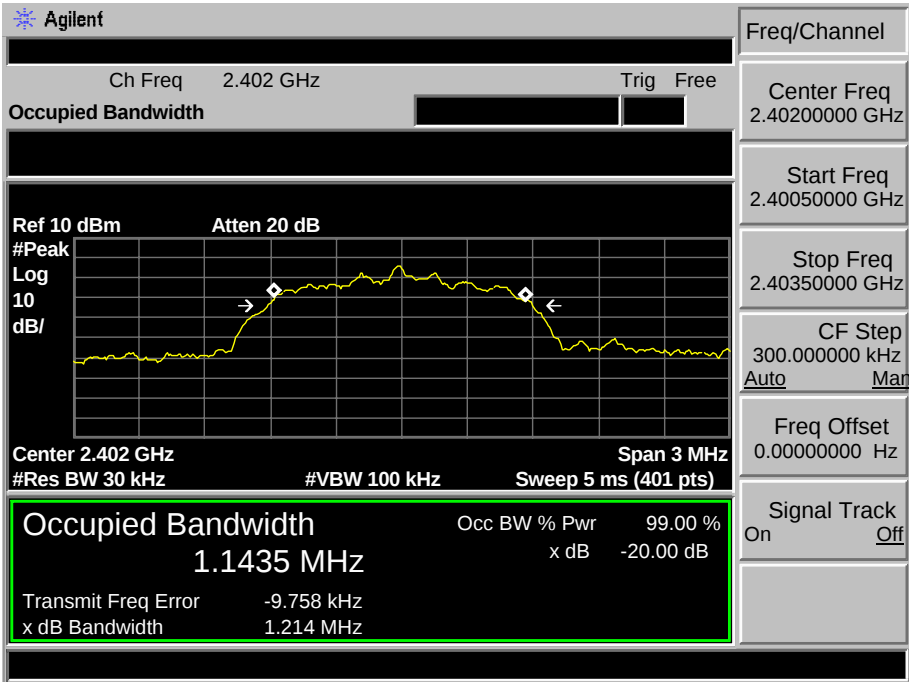

8-DPSK 2441MHz

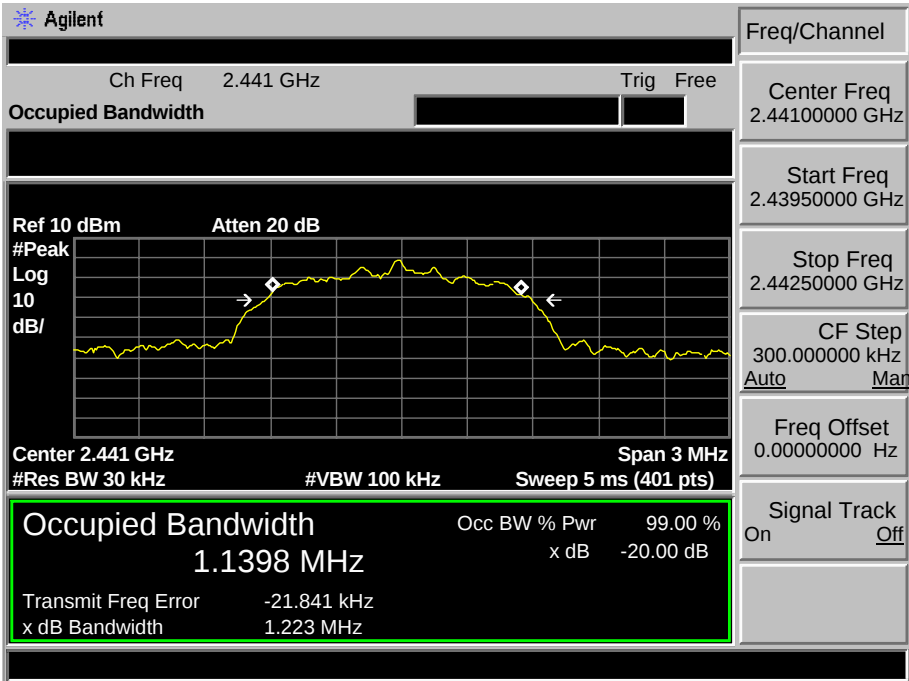

8-DPSK 2480MHz

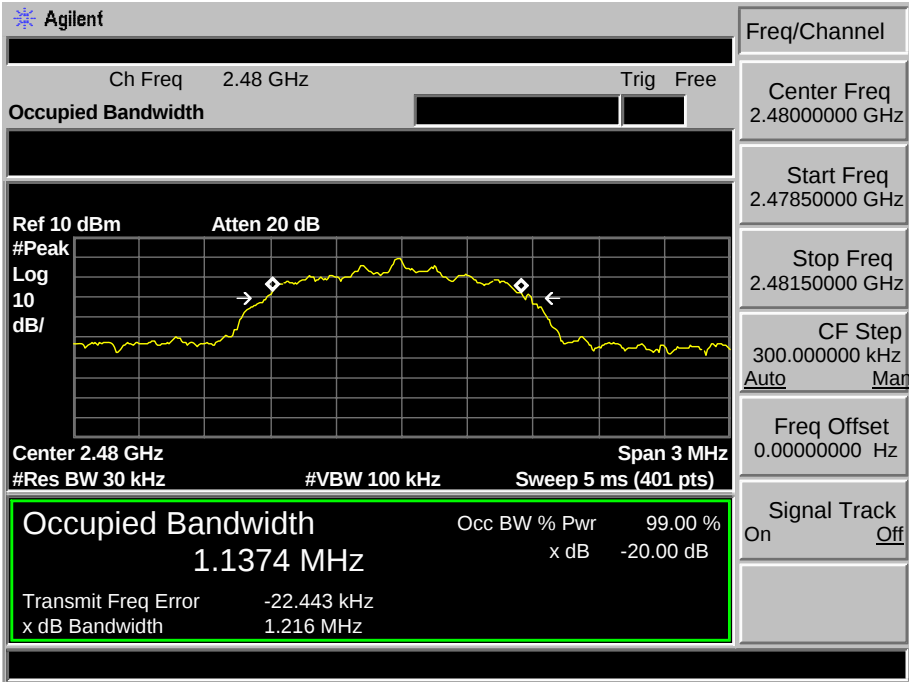

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW.


5.3. Test Result

EUT: HP Roar Wireless Speaker M/N: HP SR7250				
Test date: 2014-05-27		Test site: RF site		Tested by: Tony Tang
Mode	Channel	Channel separation (MHz)	Limit	Conclusion
GFSK	Low CH	1.000	0.858 MHz	PASS
	Mid CH	1.013	0.870 MHz	PASS
	High CH	1.006	0.864 MHz	PASS
8-DPSK	Low CH	1.006	> 2/3 of the 20dB Bandwidth or 25[kHz](whichever is greater)	PASS
	Mid CH	1.000		PASS
	High CH	1.013		PASS


5.4. Test Data

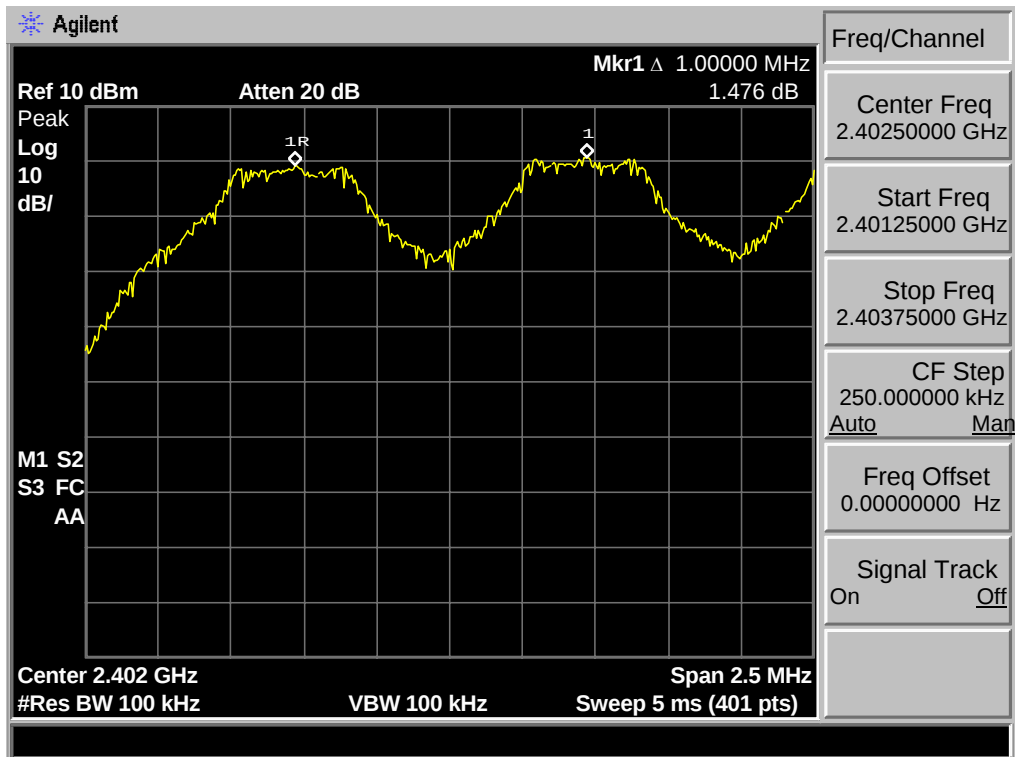GFSK
Low Channel


Mid Channel

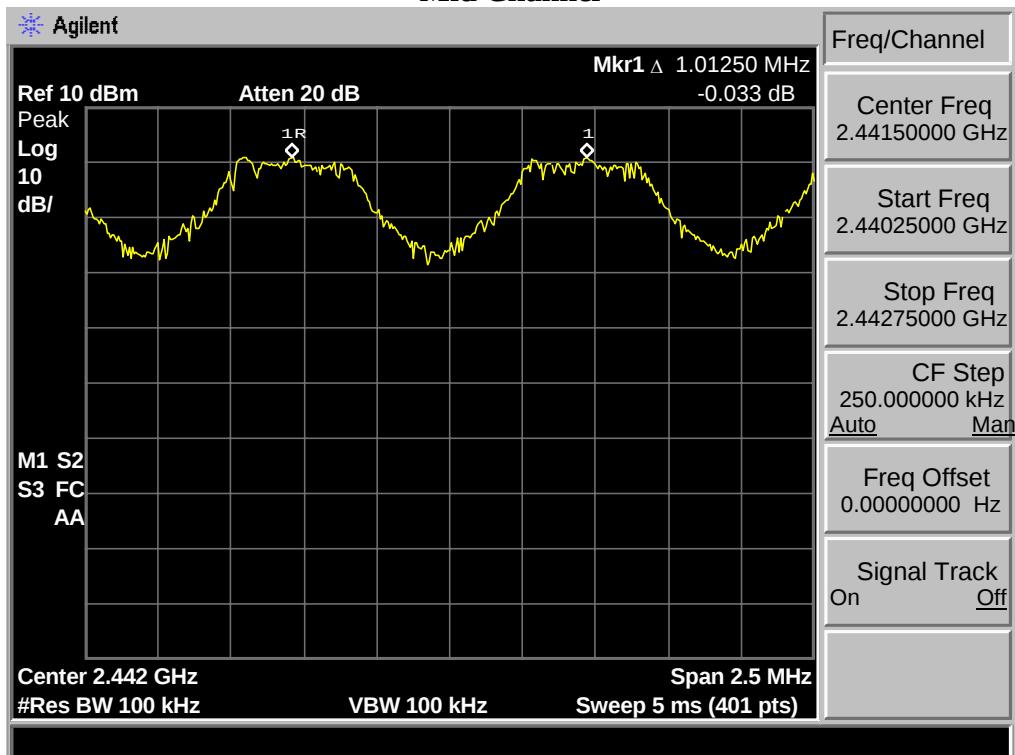


High Channel

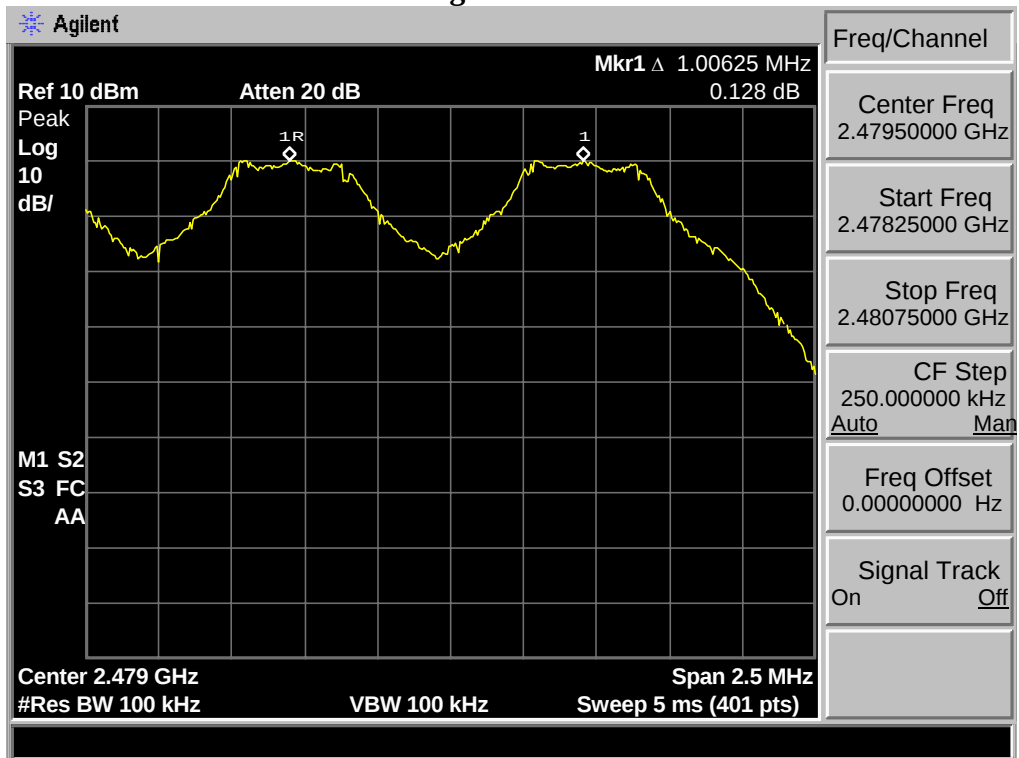


8-DPSK Low Channel

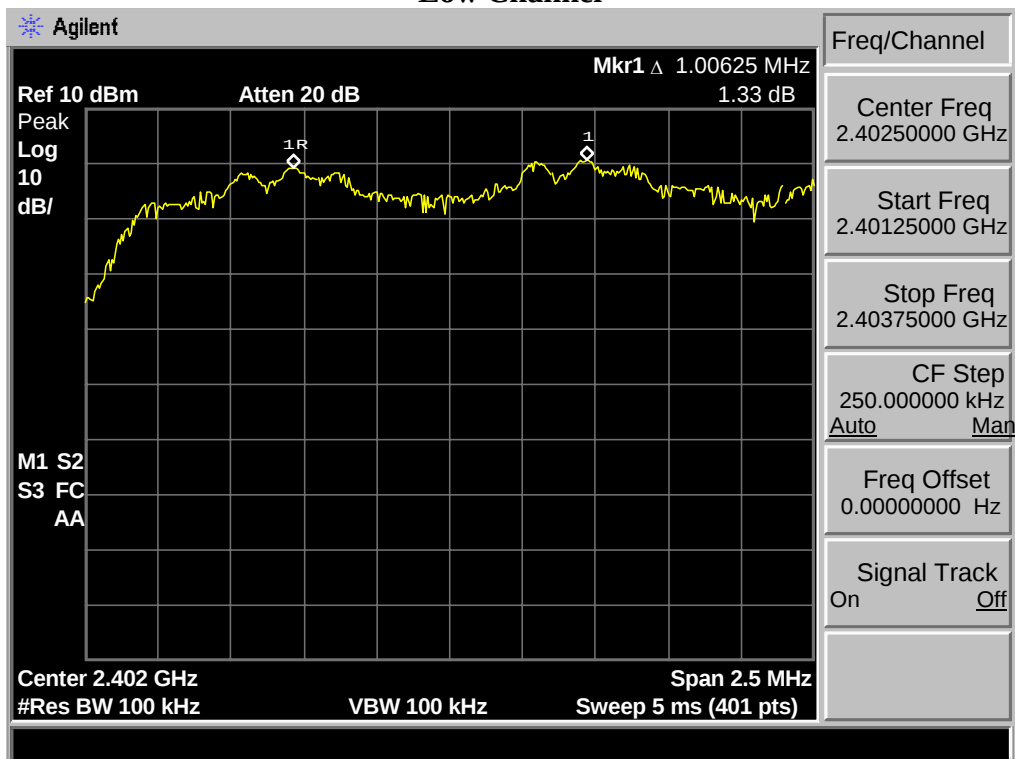

Mid Channel

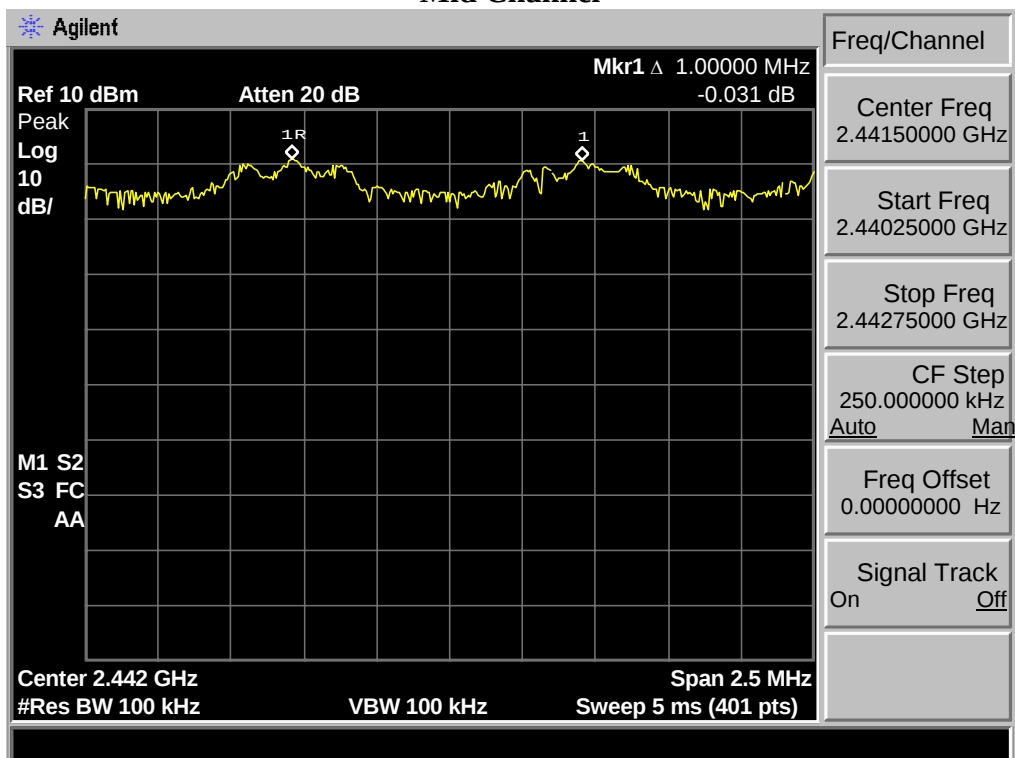

High Channel

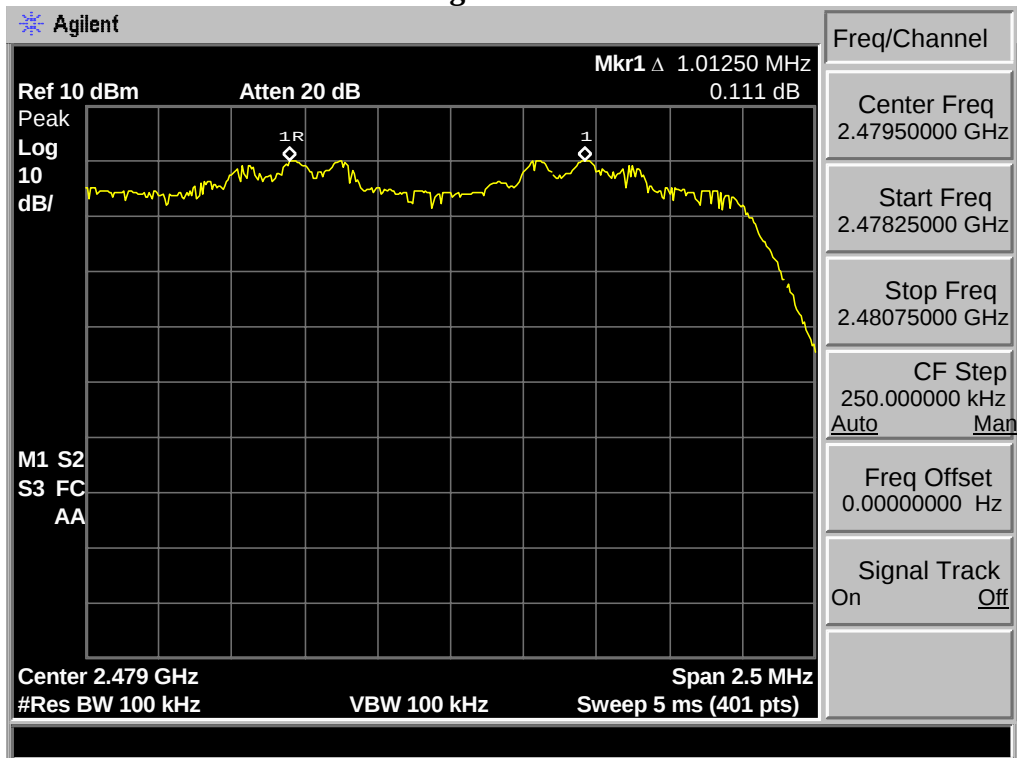

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure




The transmitter output was coupled to a spectrum analyzer via a antenna. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 300kHz VBW.

6.3. Test Result




EUT: HP Roar Wireless Speaker			
M/N: HP SR7250			
Test date: 2014-05-27		Test site: RF site	Tested by: Tony.Tang
Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
8-DPSK	79	>15	PASS

6.4. Test Data

GFSK

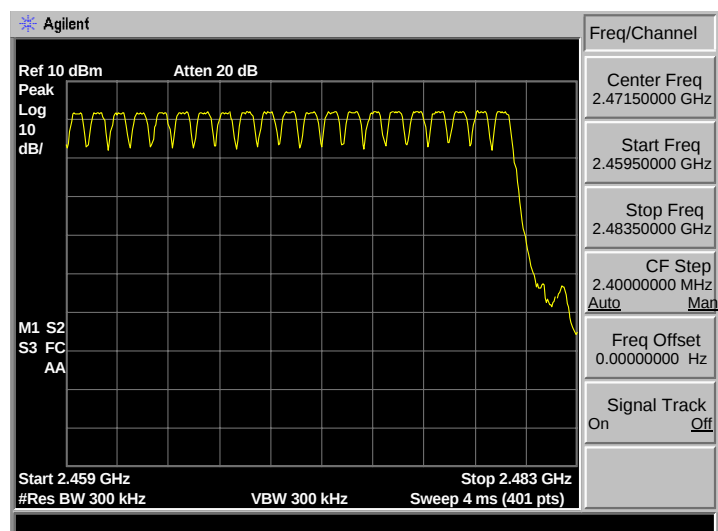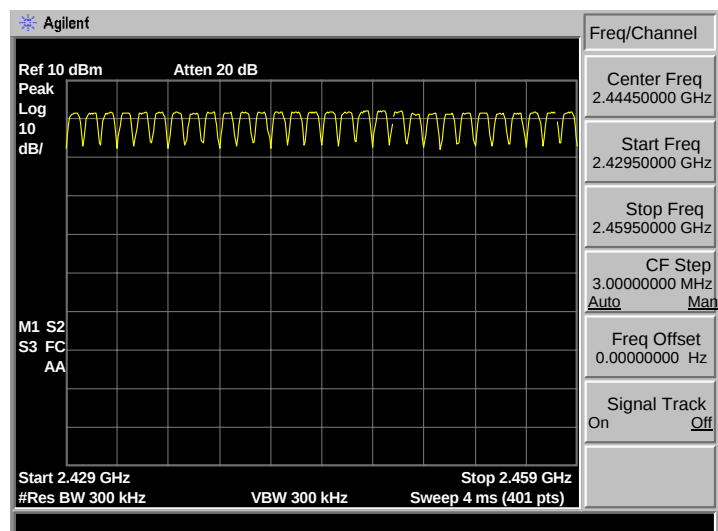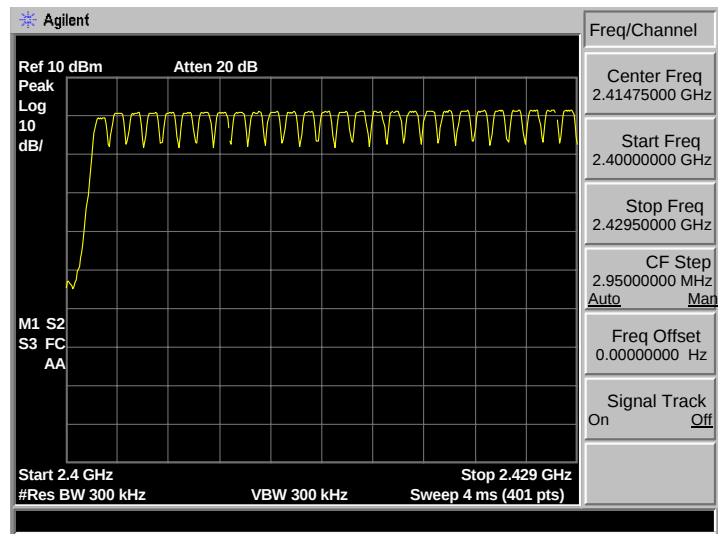

8-DPSK

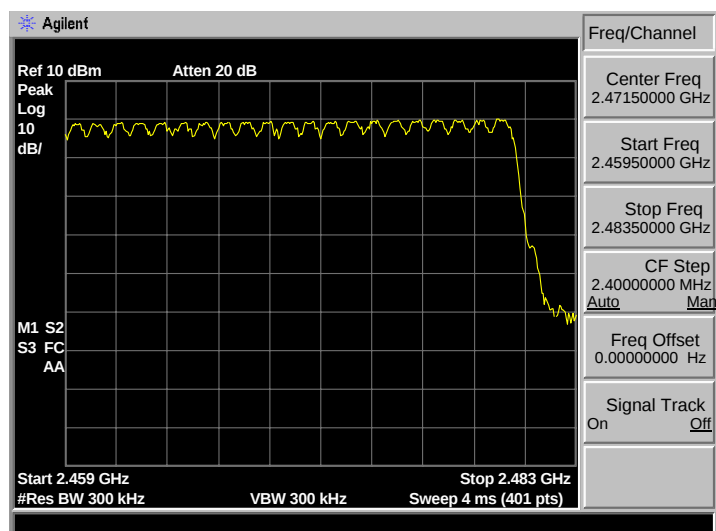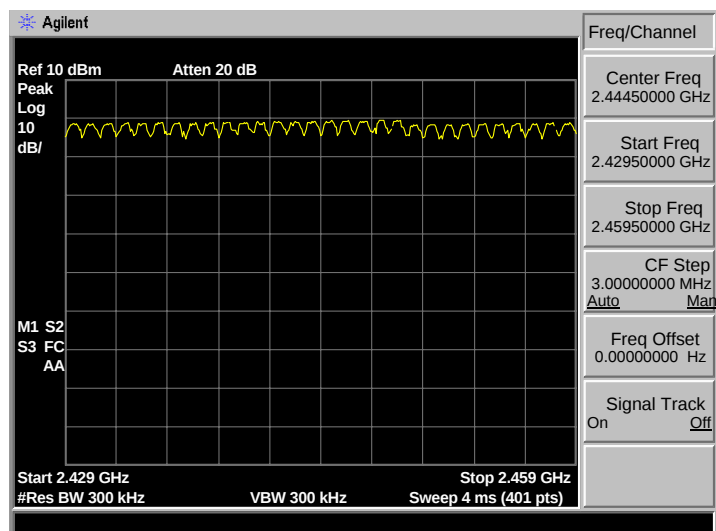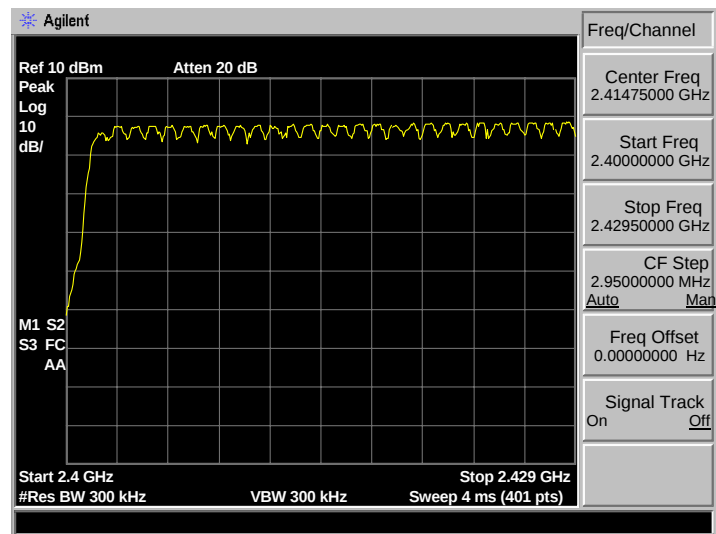

7. DWELL TIME

7.1. Limit



The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Result



EUT: HP Roar Wireless Speaker			
M/N: HP SR7250			
Test date: 2013-05-27		Test site: RF site	Tested by: Tony Tang
Mode	Dwell time (ms)	Limit	Conclusion
GFSK DH1	145.36	<400ms	PASS
GFSK DH3	273.34	<400ms	PASS
GFSK DH5	319.10	<400ms	PASS
8-DPSK DH1	151.68	<400ms	PASS
8-DPSK DH3	279.66	<400ms	PASS
8-DPSK DH5	321.25	<400ms	PASS

7.3. Test Data



GFSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.46\text{ms} = 145.36$

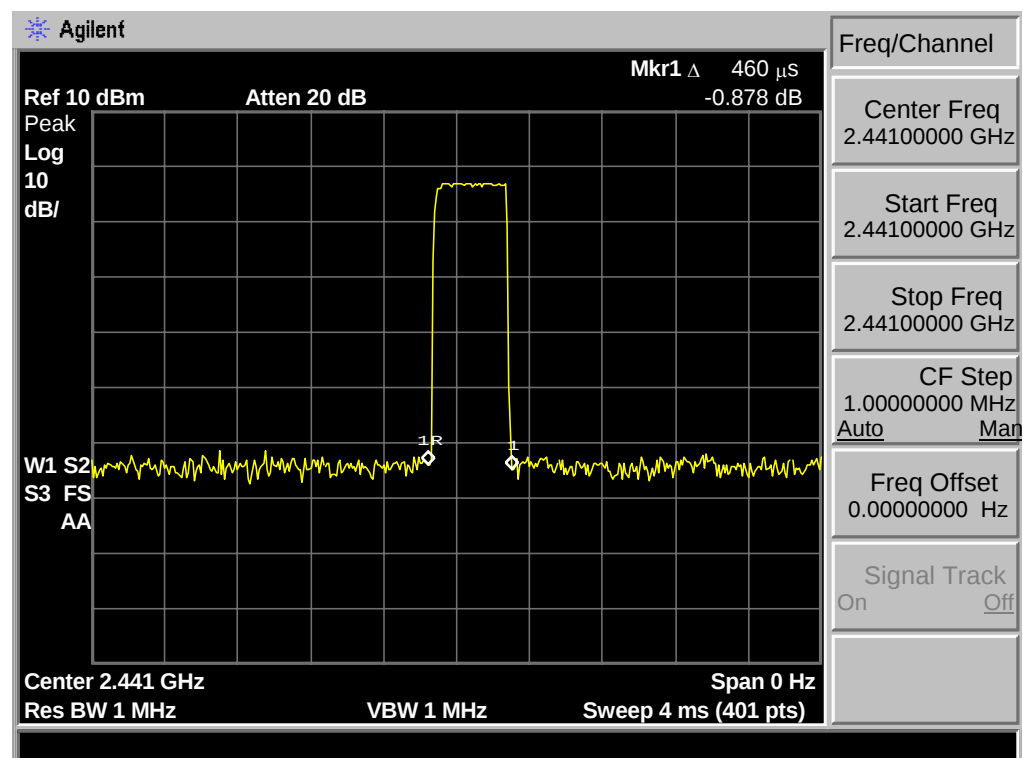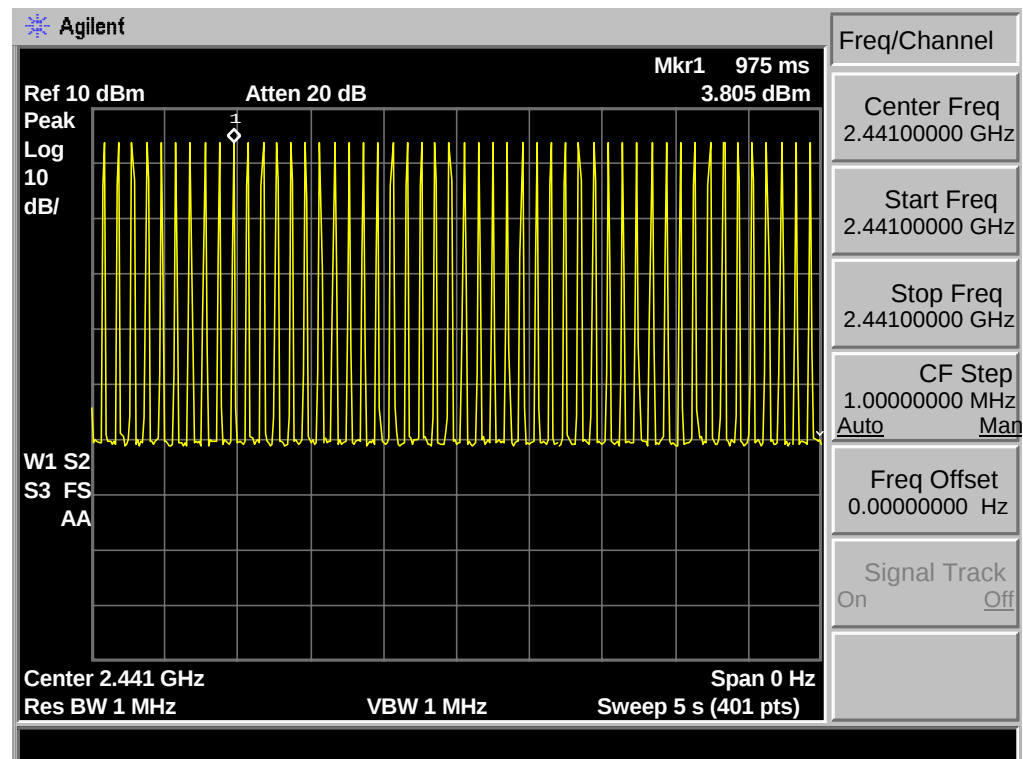



GFSK DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.73\text{ms} = 273.34$

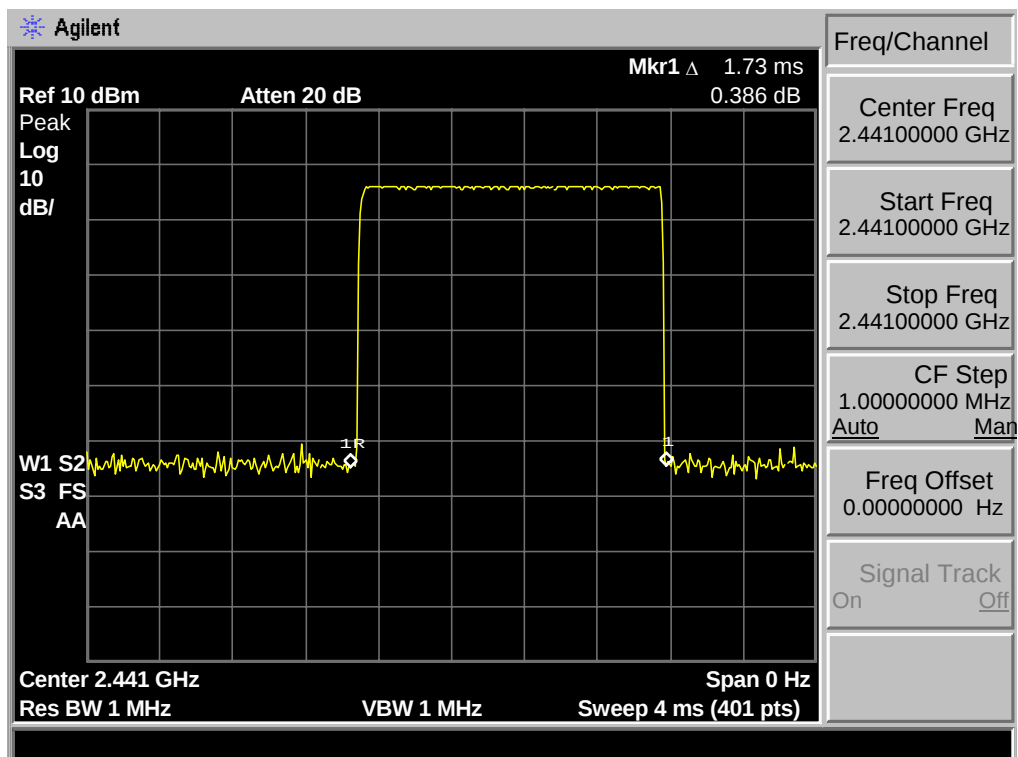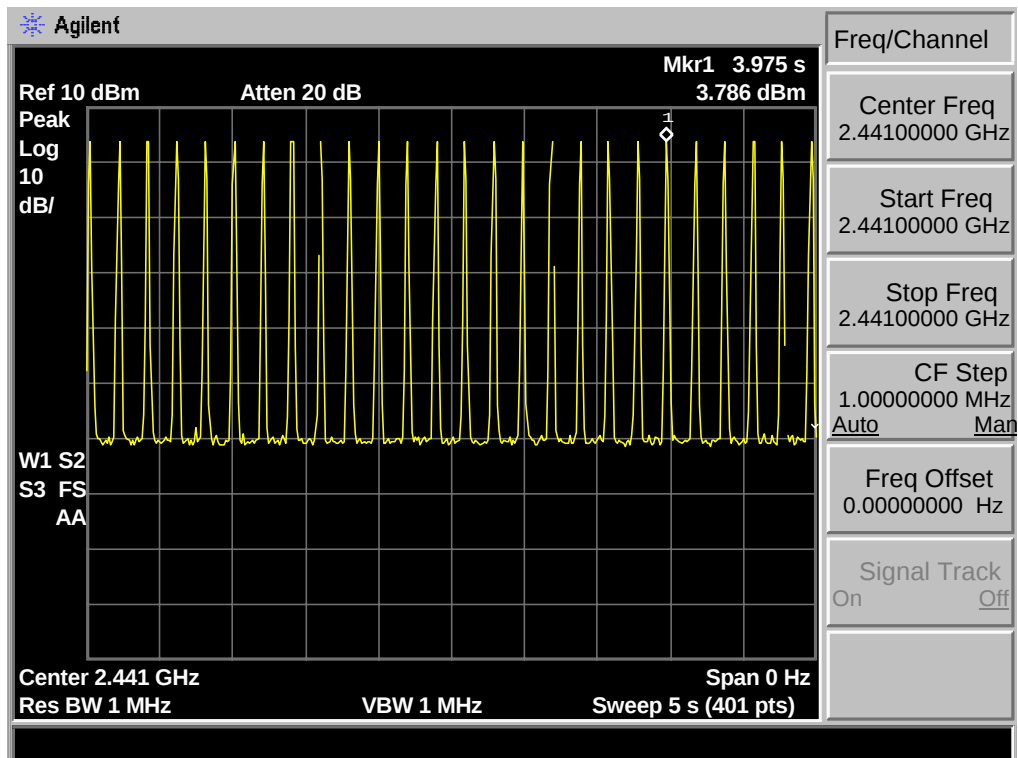



GSFK DH5 : $17\text{hop}/5\text{s} * 0.4 * 79 * 2.97\text{ms} = 319.10$

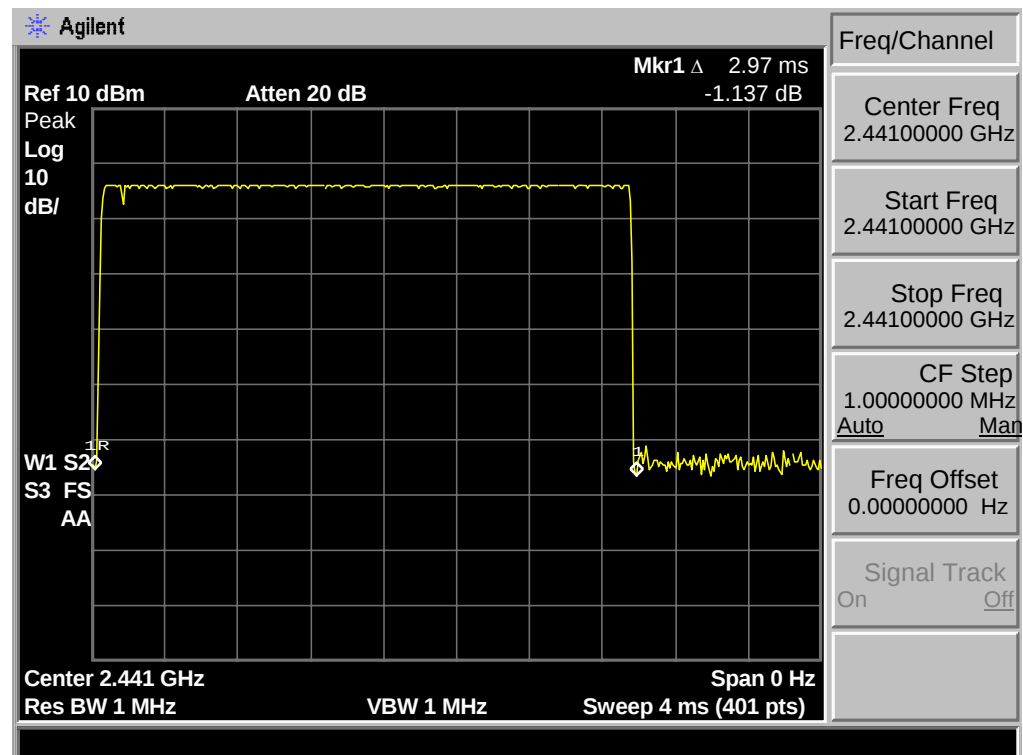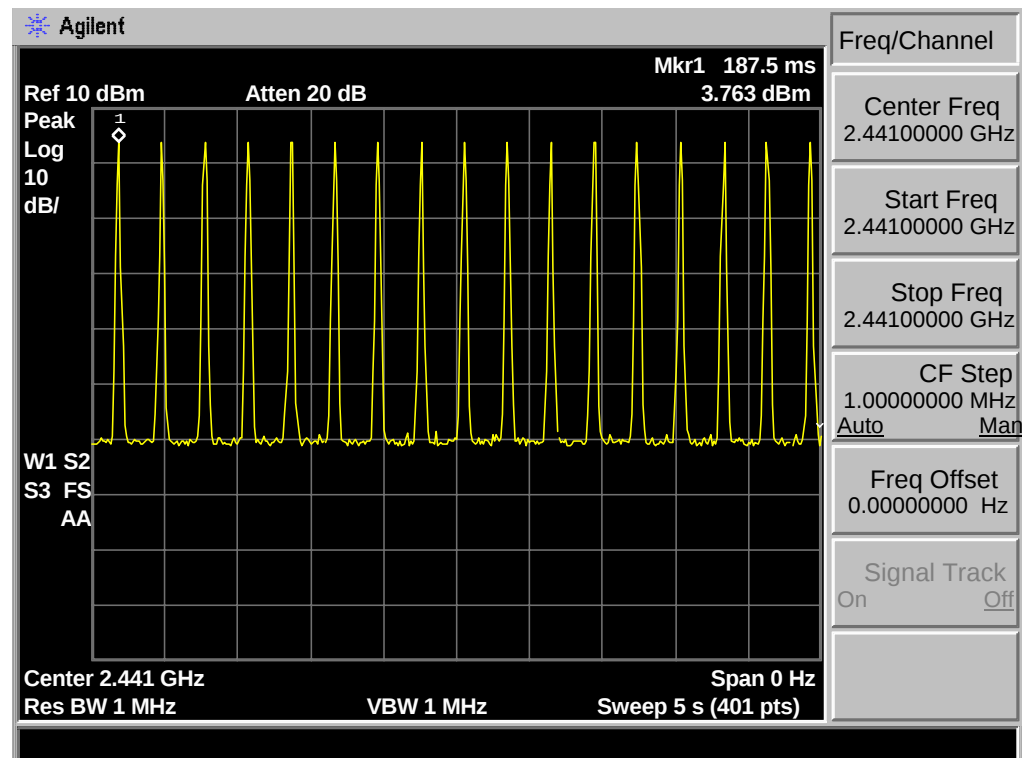



8-DPSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.48\text{ms} = 151.68$

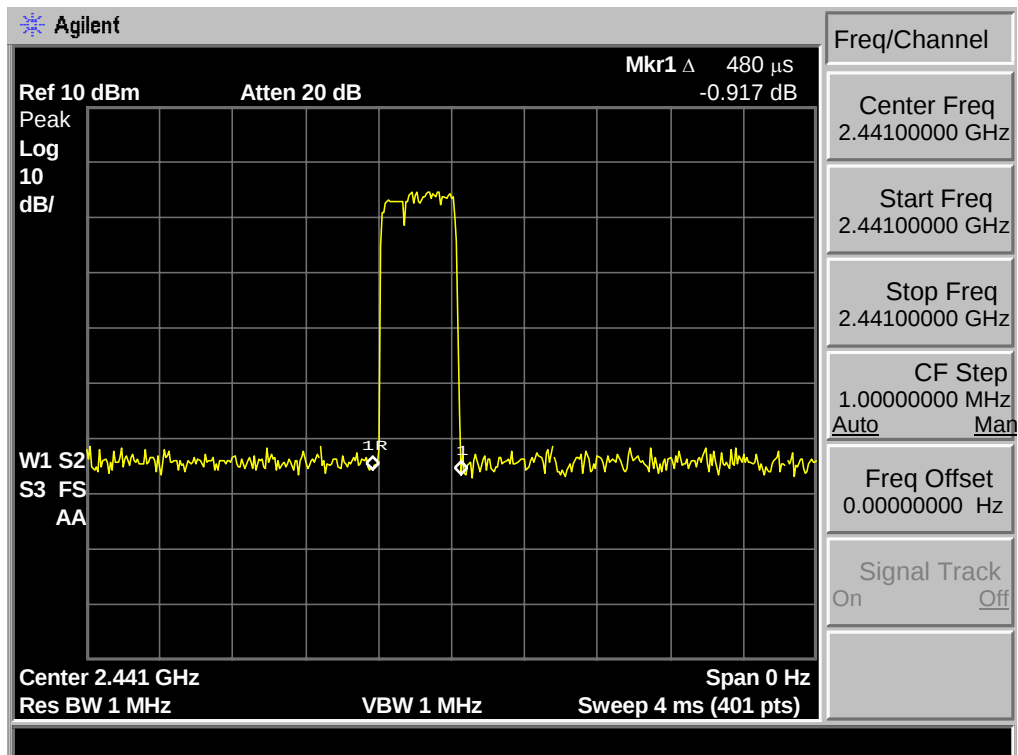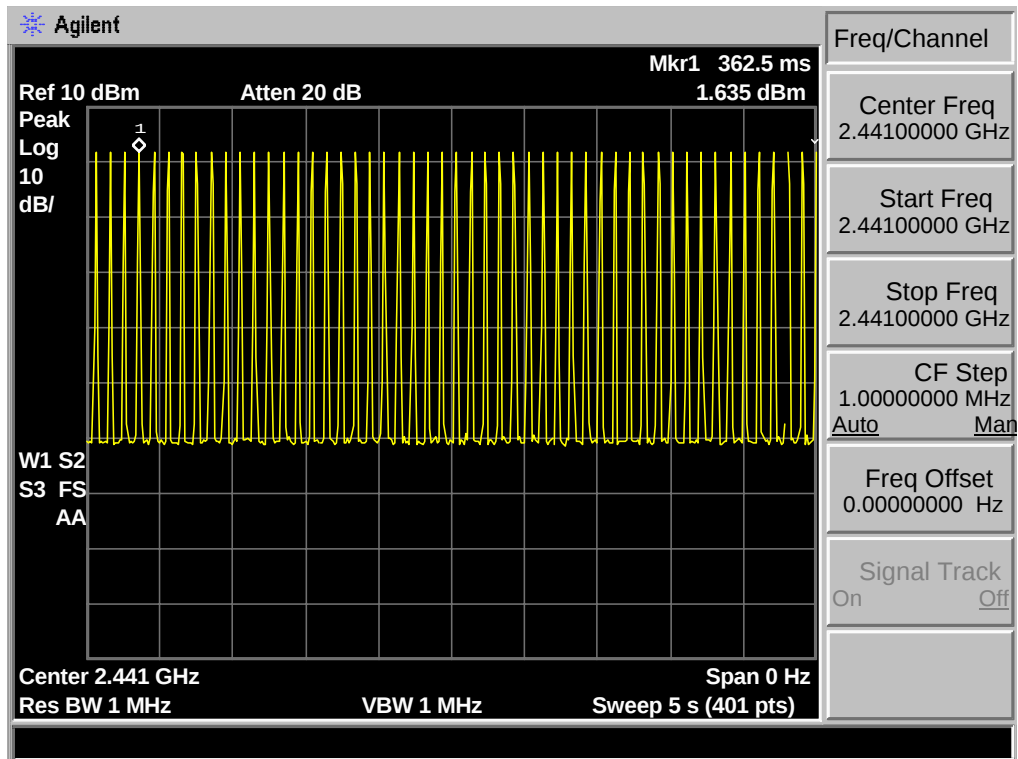

8-DPSK DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.77\text{ms} = 279.66$

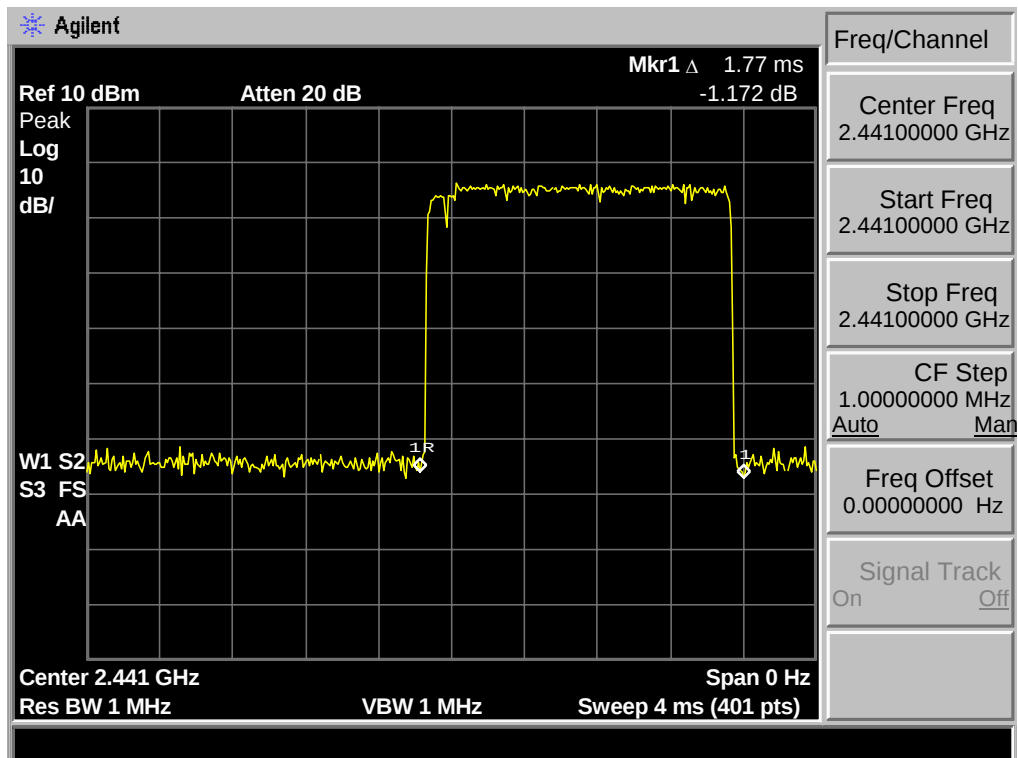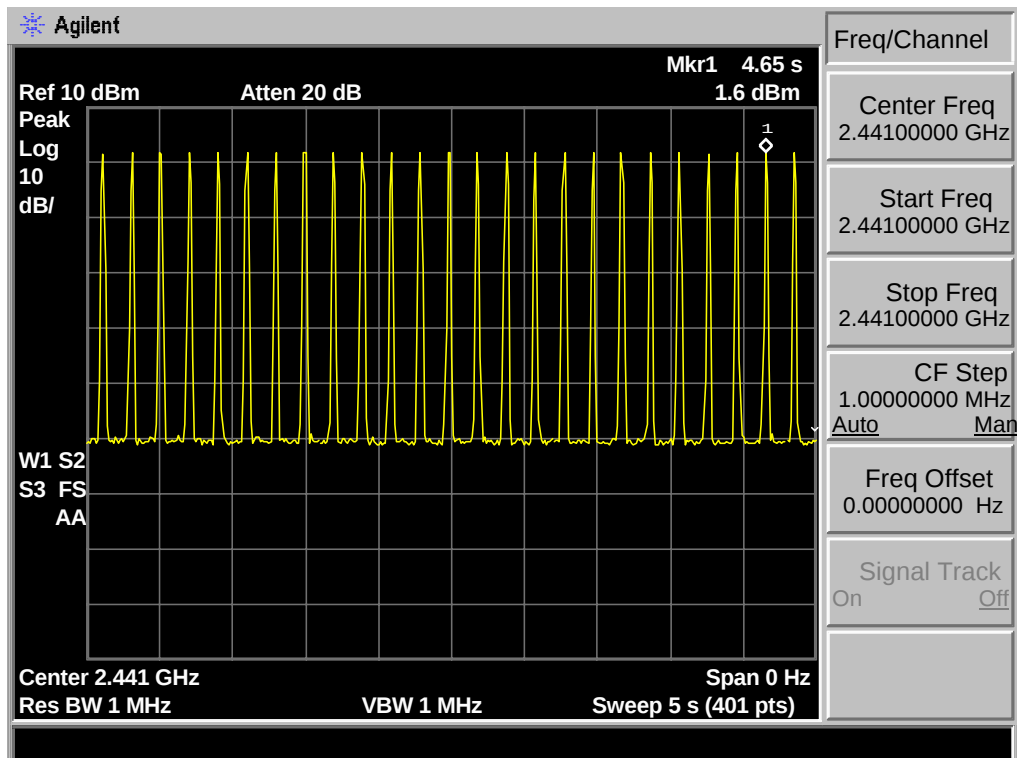

8-DPSK DH5 : $17\text{hop}/5\text{s} * 0.4 * 79 * 2.99\text{ms} = 321.25$

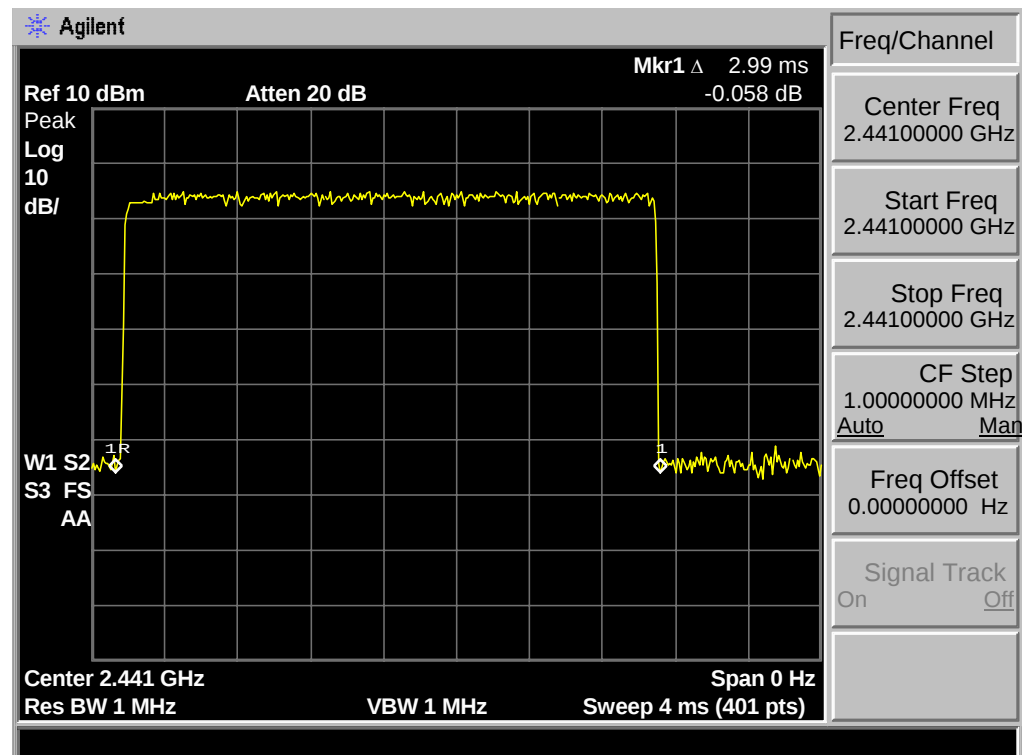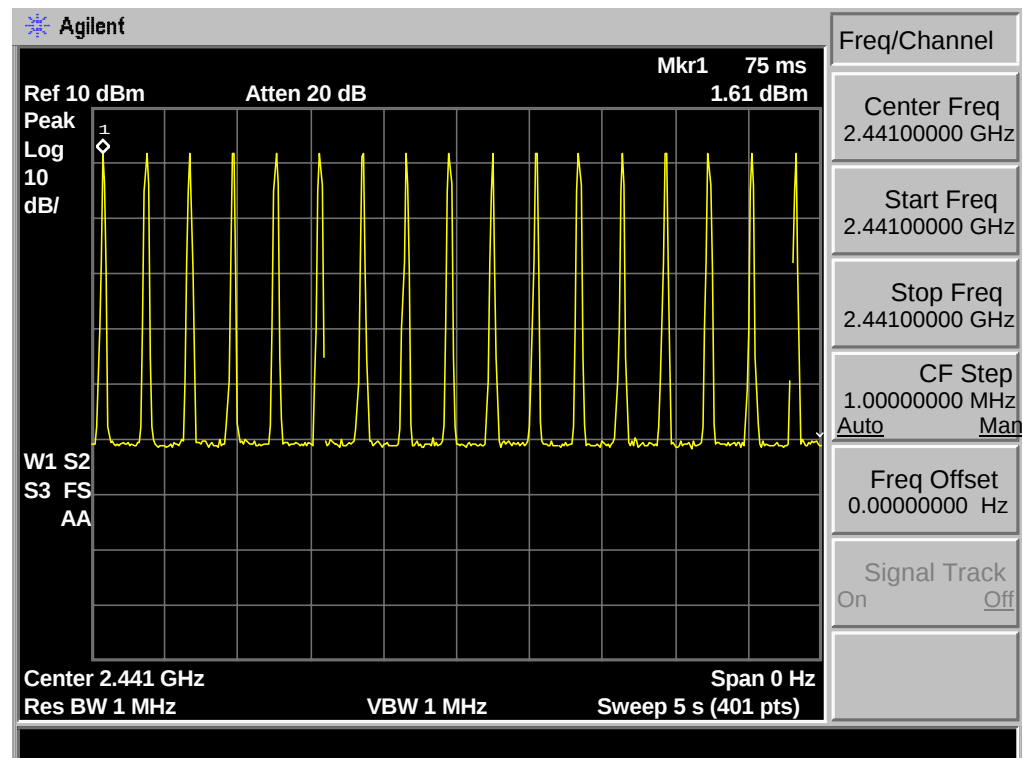

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup

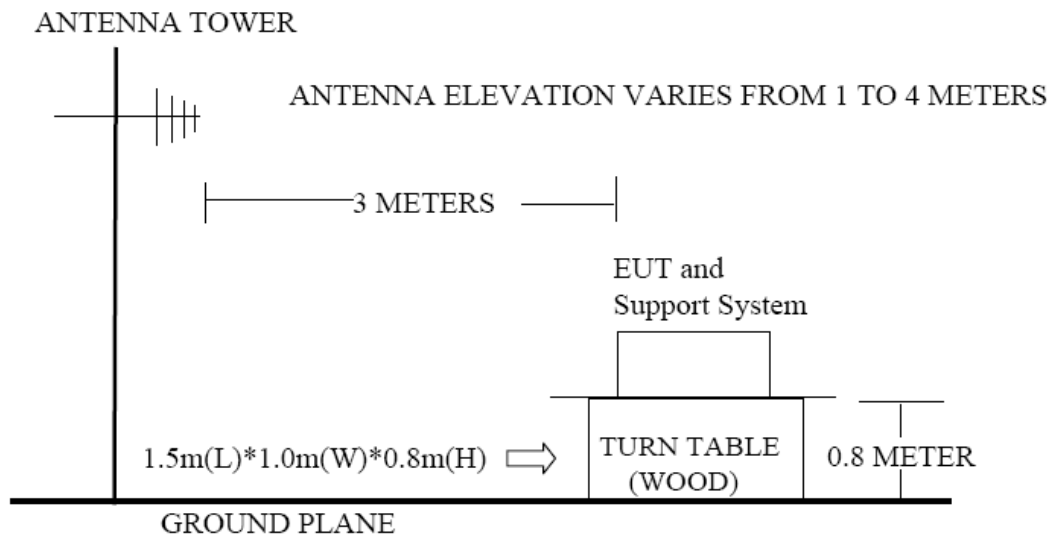

8.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

8.4. Test Result


30MHz—25GHz Radiated emissison Test result	
EUT: HP Roar Wireless Speaker	
M/N: HP SR7250	
Power: DC 3.7V From Internal Battery	
Test date: 2014-05-25~26 Test site: 3m Chamber Tested by: Tony Tang	
Test mode: Tx Mode	
Pass	

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz 、2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


8.5. Test Data

30 MHz – 1000 MHz

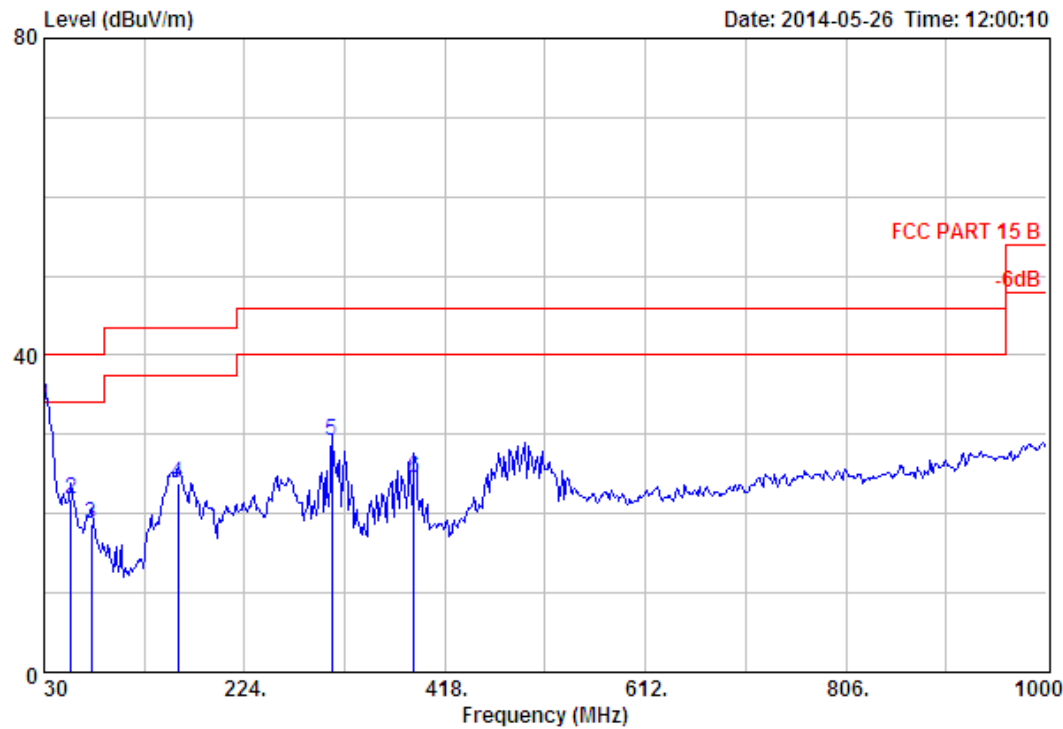


Site no.	: 3m Chamber	Data no.	: 419
Dis. / Ant.	: 3m 27137	Ant. pol.	: VERTICAL
Limit	: FCC PART 15 B		
Env. / Ins.	: Temp:25.6';Humi:56%;Press:101.52kPa		
Engineer	: Tony		
EUT	: HP Roar Wireless Speaker		
Power	: DC 3.7V		
M/N	: HP SR7250		
Test Mode	: GFSK TX 2402MHz		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	14.41	33.57	40.00	6.43	QP
2	56.19	5.21	0.96	15.67	21.84	40.00	18.16	QP
3	75.59	6.51	1.19	11.06	18.76	40.00	21.24	QP
4	159.98	10.36	1.71	11.84	23.91	43.50	19.59	QP
5	308.39	13.17	2.44	13.57	29.18	46.00	16.82	QP
6	387.93	15.48	2.65	6.47	24.60	46.00	21.40	QP

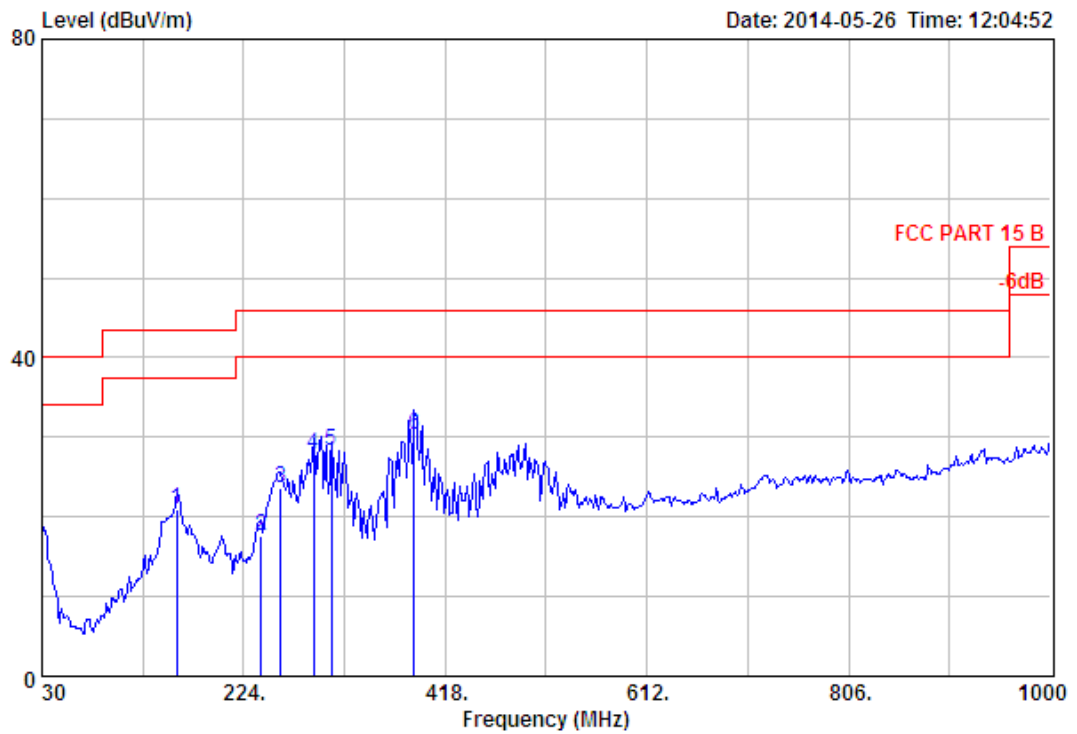


Site no. : 3m Chamber Data no. : 420
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2402MHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	159.98	10.36	1.71	8.95	21.02	43.50	22.48	QP
2	240.49	10.36	2.11	5.22	17.69	46.00	28.31	QP
3	259.89	12.97	2.25	8.39	23.61	46.00	22.39	QP
4	290.93	12.78	2.34	12.82	27.94	46.00	18.06	QP
5	308.39	13.17	2.44	12.70	28.31	46.00	17.69	QP
6	387.93	15.48	2.65	12.22	30.35	46.00	15.65	QP

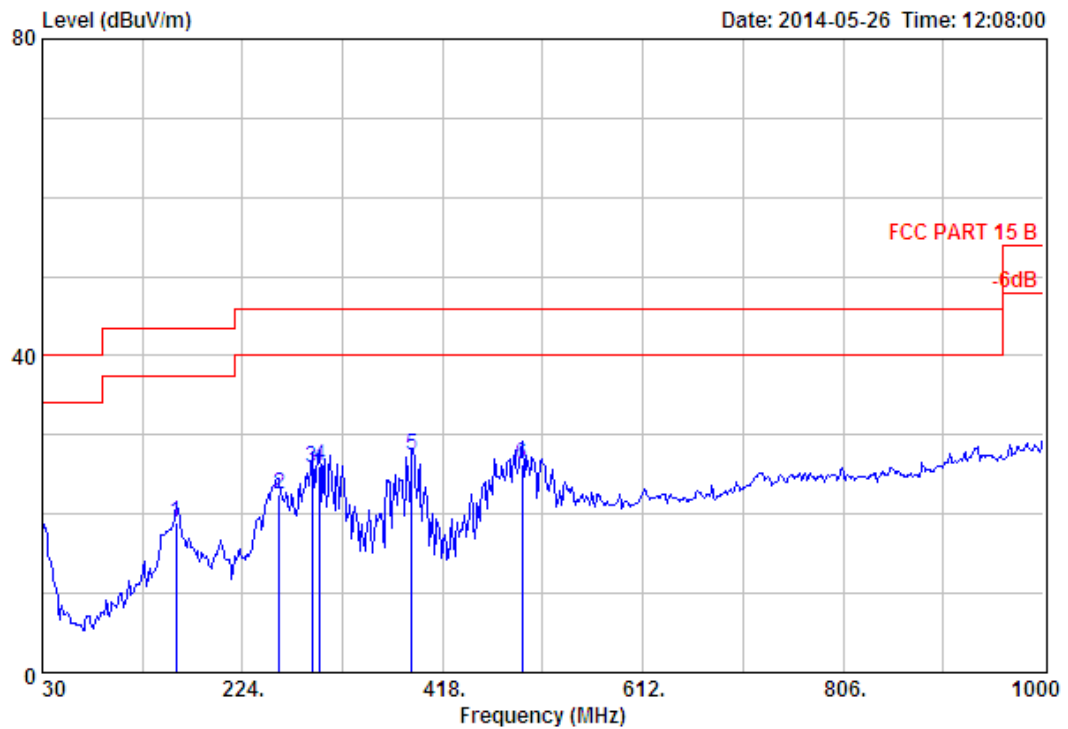


Site no. : 3m Chamber Data no. : 421
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	159.98	10.36	1.71	6.95	19.02	43.50	24.48	QP
2	259.89	12.97	2.25	7.39	22.61	46.00	23.39	QP
3	290.93	12.78	2.34	10.82	25.94	46.00	20.06	QP
4	298.69	13.00	2.40	10.77	26.17	46.00	19.83	QP
5	387.93	15.48	2.65	9.22	27.35	46.00	18.65	QP
6	494.63	17.84	3.12	5.34	26.30	46.00	19.70	QP

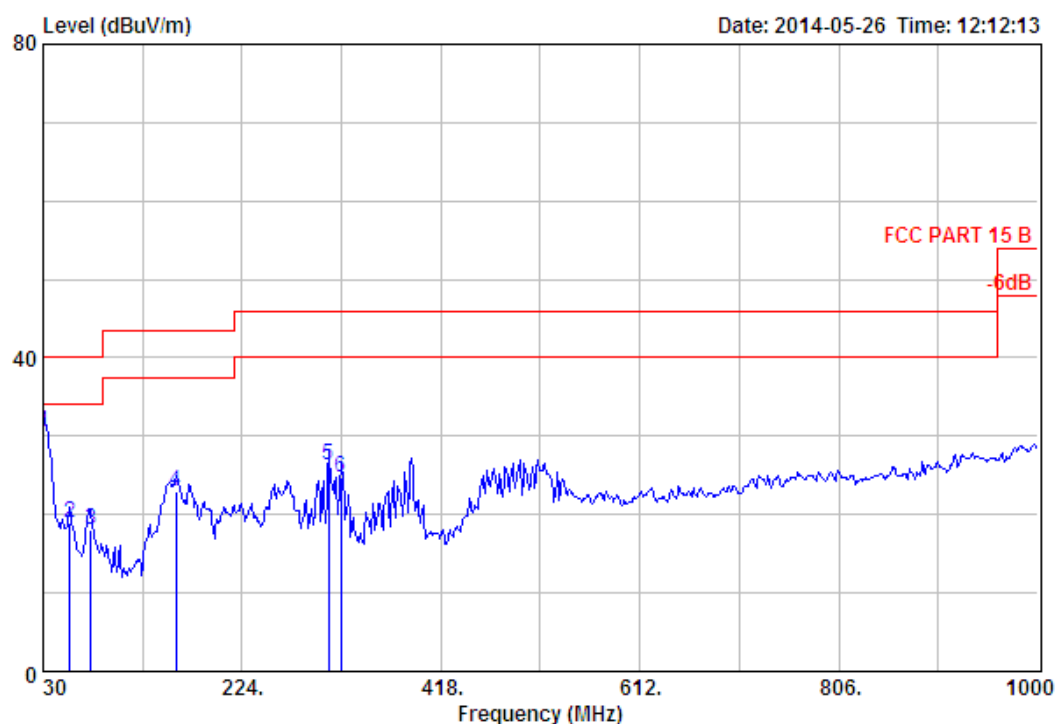


Site no. : 3m Chamber Data no. : 422
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	11.41	30.57	40.00	9.43	QP
2	56.19	5.21	0.96	12.67	18.84	40.00	21.16	QP
3	76.56	6.66	1.19	10.15	18.00	40.00	22.00	QP
4	159.98	10.36	1.71	10.84	22.91	43.50	20.59	QP
5	308.39	13.17	2.44	10.57	26.18	46.00	19.82	QP
6	320.03	13.57	2.40	8.87	24.84	46.00	21.16	QP

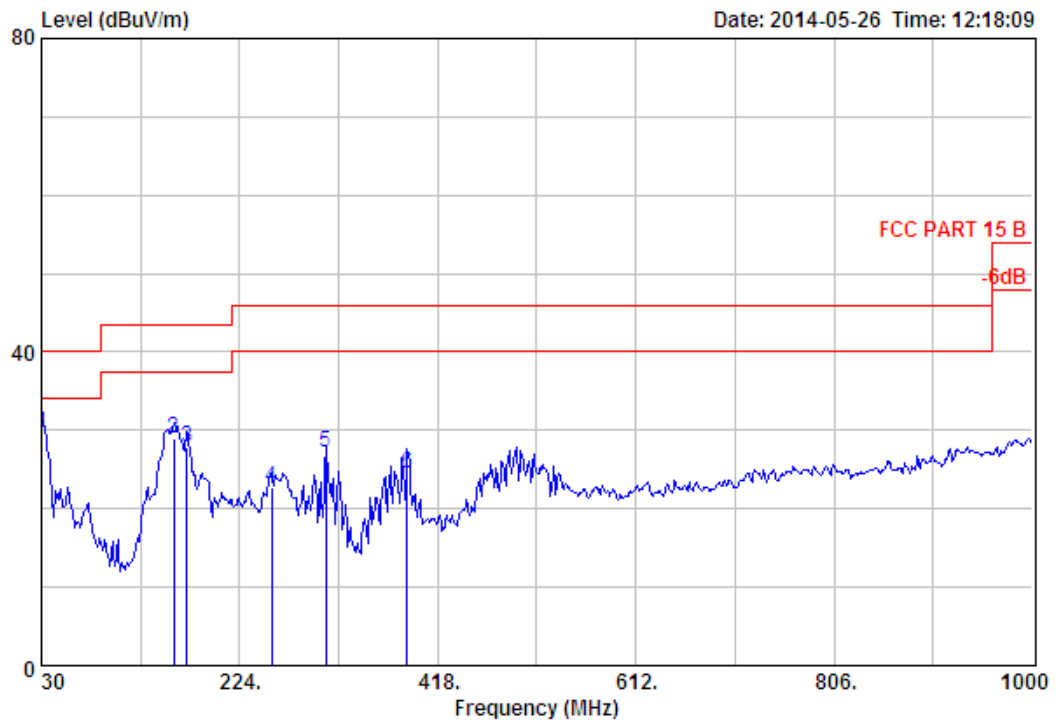


Site no. : 3m Chamber Data no. : 423
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	10.41	29.57	40.00	10.43	QP
2	159.98	10.36	1.71	16.84	28.91	43.50	14.59	QP
3	172.59	9.07	1.68	17.19	27.94	43.50	15.56	QP
4	255.04	12.41	2.13	8.30	22.84	46.00	23.16	QP
5	308.39	13.17	2.44	11.57	27.18	46.00	18.82	QP
6	387.93	15.48	2.65	6.47	24.60	46.00	21.40	QP

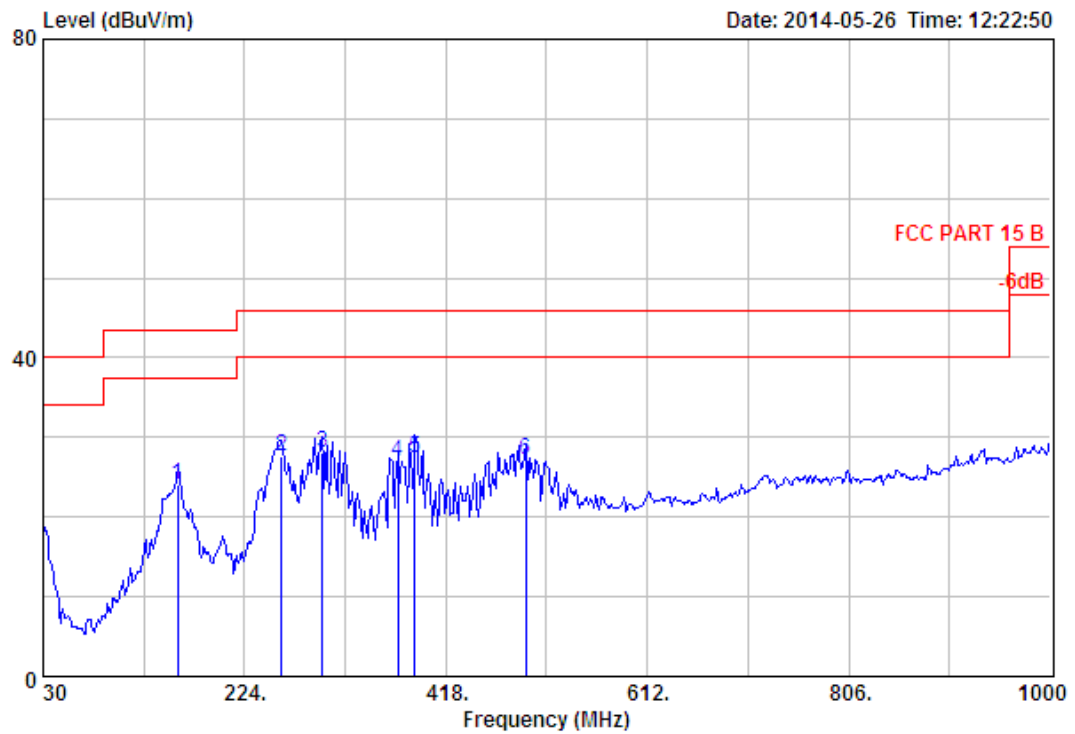


Site no. : 3m Chamber Data no. : 424
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	159.98	10.36	1.71	11.95	24.02	43.50	19.48	QP
2	259.89	12.97	2.25	12.39	27.61	46.00	18.39	QP
3	298.69	13.00	2.40	12.77	28.17	46.00	17.83	QP
4	371.44	14.89	2.67	9.50	27.06	46.00	18.94	QP
5	387.93	15.48	2.65	9.22	27.35	46.00	18.65	QP
6	494.63	17.84	3.12	6.34	27.30	46.00	18.70	QP

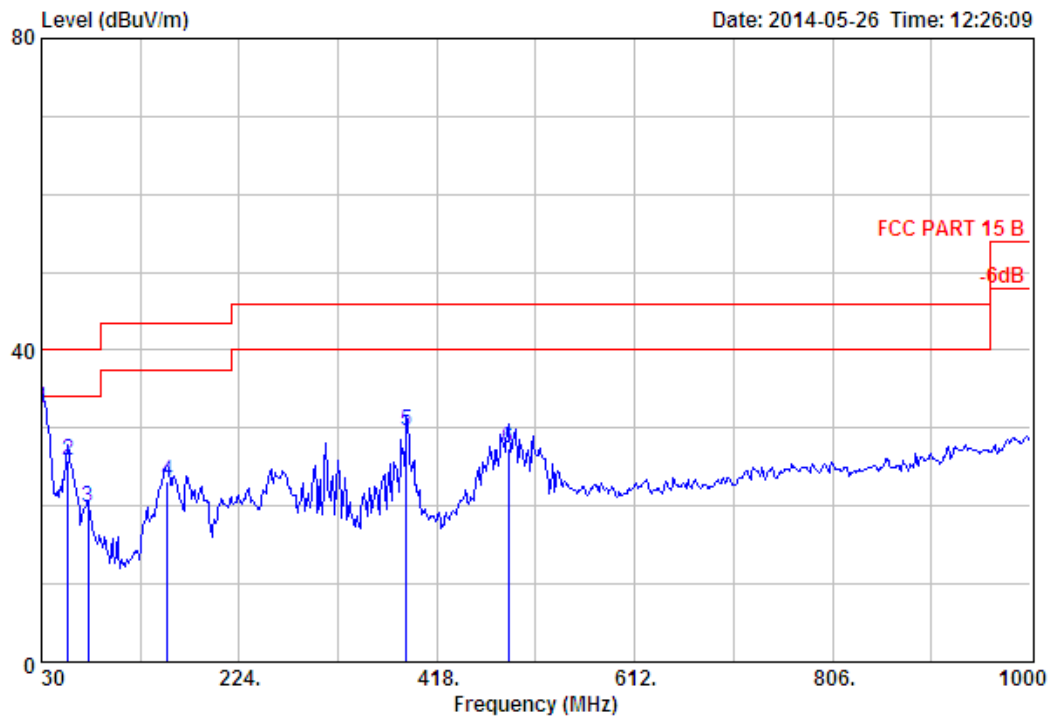


Site no. : 3m Chamber Data no. : 425
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	13.41	32.57	40.00	7.43	QP
2	56.19	5.21	0.96	19.67	25.84	40.00	14.16	QP
3	75.59	6.51	1.19	12.06	19.76	40.00	20.24	QP
4	153.19	10.75	1.63	10.71	23.09	43.50	20.41	QP
5	387.93	15.48	2.65	11.47	29.60	46.00	16.40	QP
6	487.84	17.74	3.15	6.62	27.51	46.00	18.49	QP

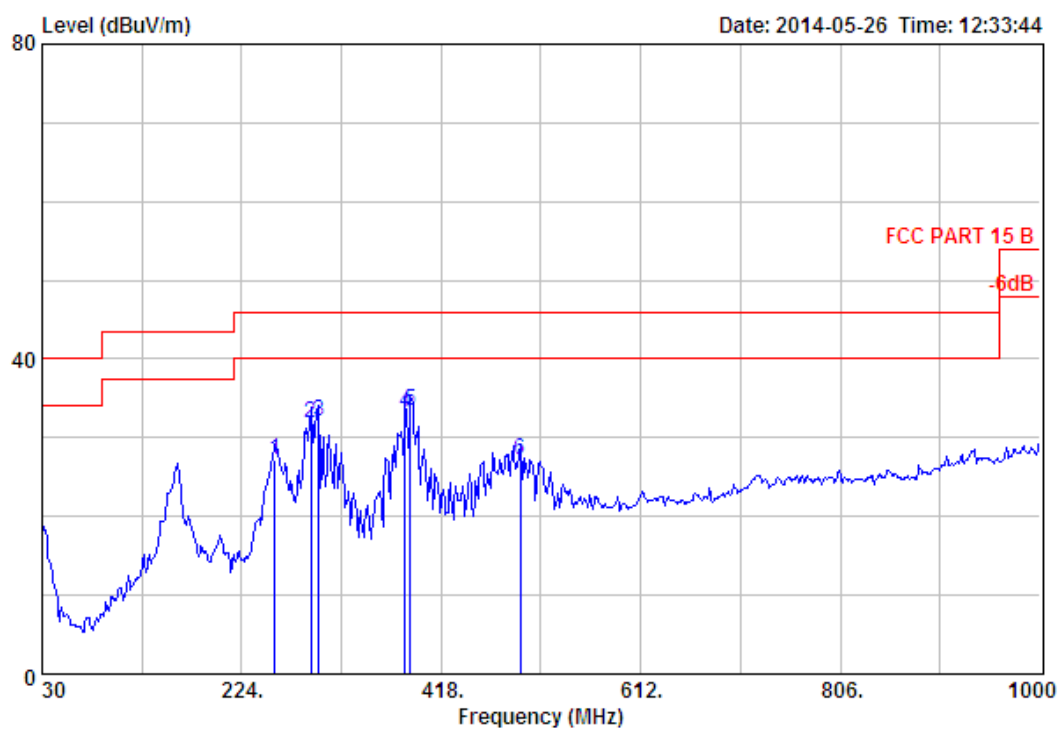


Site no. : 3m Chamber Data no. : 426
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2402MHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	256.01	12.52	2.15	12.50	27.17	46.00	18.83	QP
2	290.93	12.78	2.34	16.82	31.94	46.00	14.06	QP
3	298.69	13.00	2.40	16.77	32.17	46.00	13.83	QP
4	383.08	15.18	2.63	15.29	33.10	46.00	12.90	QP
5	387.93	15.48	2.65	15.22	33.35	46.00	12.65	QP
6	494.63	17.84	3.12	6.34	27.30	46.00	18.70	QP

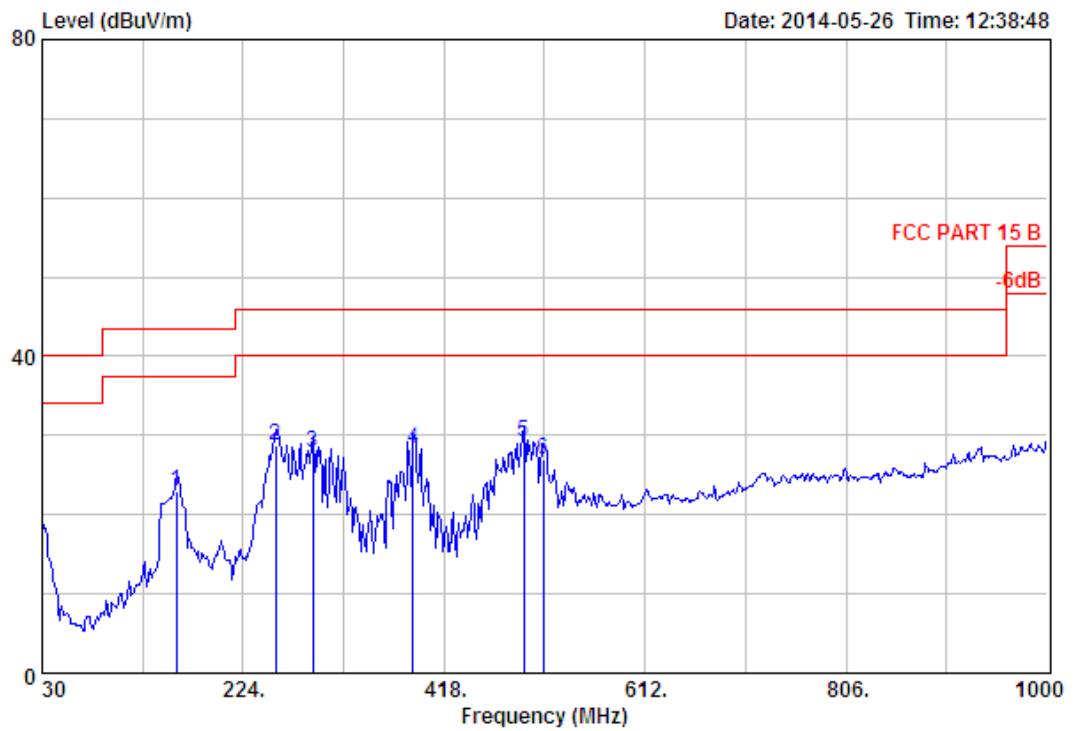


Site no. : 3m Chamber Data no. : 427
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	159.98	10.36	1.71	10.95	23.02	43.50	20.48	QP
2	255.04	12.41	2.13	14.26	28.80	46.00	17.20	QP
3	290.93	12.78	2.34	12.82	27.94	46.00	18.06	QP
4	387.93	15.48	2.65	10.22	28.35	46.00	17.65	QP
5	494.63	17.84	3.12	8.34	29.30	46.00	16.70	QP
6	514.03	17.95	3.18	5.91	27.04	46.00	18.96	QP

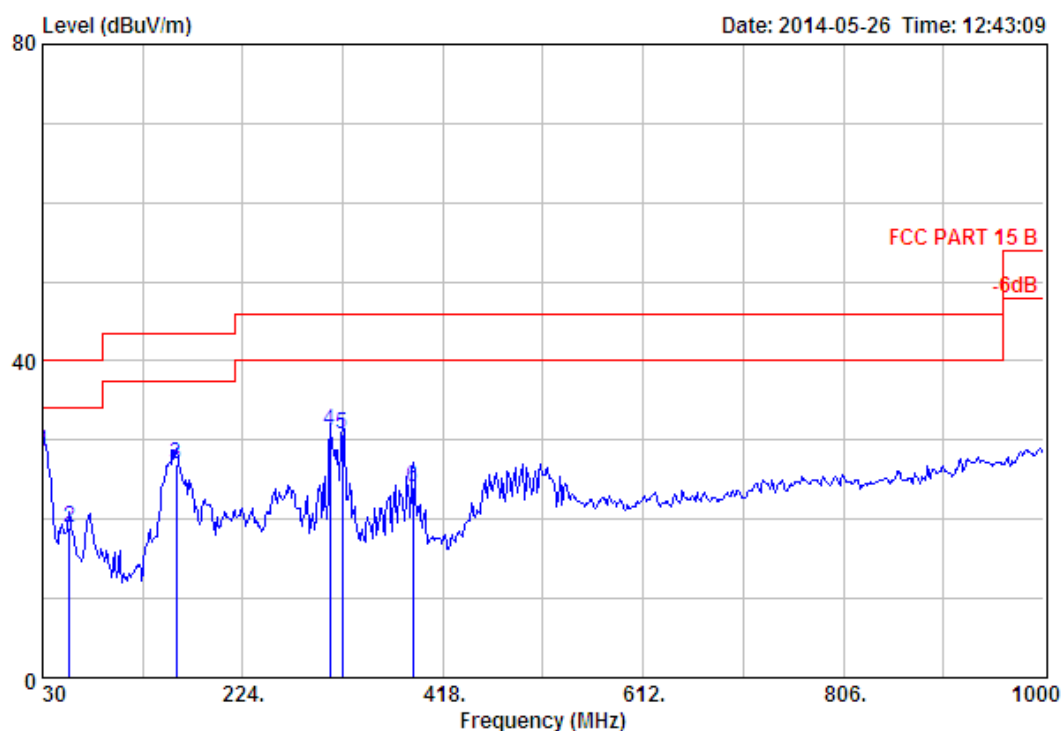


Site no. : 3m Chamber Data no. : 428
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	9.41	28.57	40.00	11.43	QP
2	56.19	5.21	0.96	12.67	18.84	40.00	21.16	QP
3	159.98	10.36	1.71	14.84	26.91	43.50	16.59	QP
4	308.39	13.17	2.44	15.57	31.18	46.00	14.82	QP
5	320.03	13.57	2.40	14.87	30.84	46.00	15.16	QP
6	388.90	15.54	2.65	5.93	24.12	46.00	21.88	QP

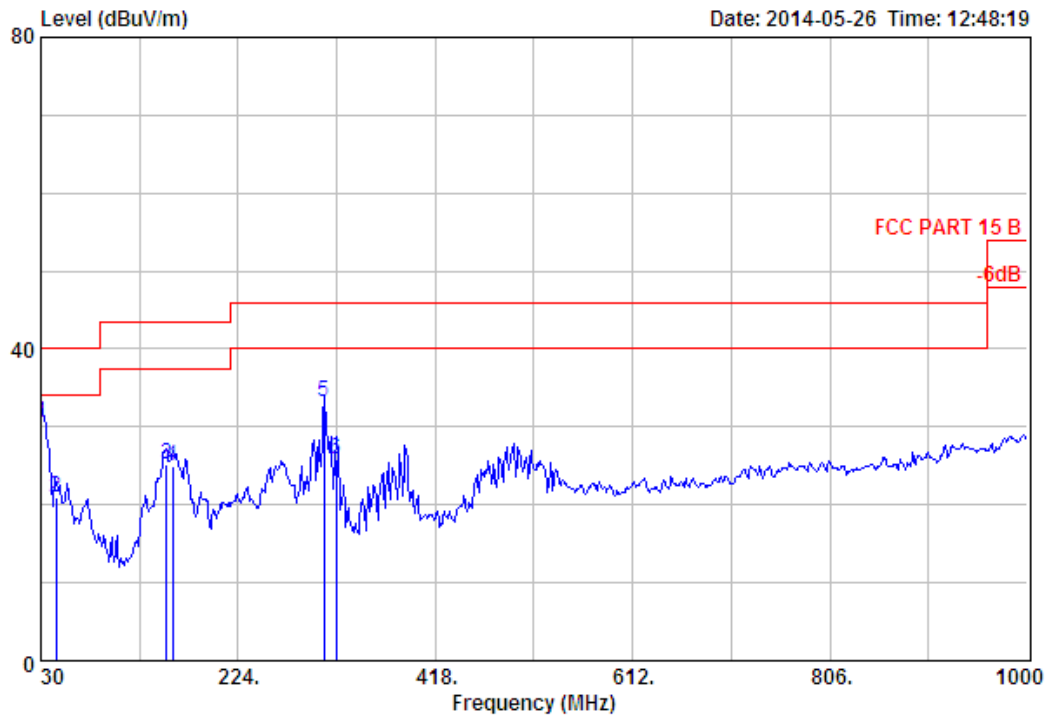

Site no. : 3m Chamber Data no. : 429
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2480MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.00	18.51	0.65	11.41	30.57	40.00	9.43	QP
2	44.55	10.07	0.85	10.01	20.93	40.00	19.07	QP
3	153.19	10.75	1.63	12.71	25.09	43.50	18.41	QP
4	159.98	10.36	1.71	12.84	24.91	43.50	18.59	QP
5	308.39	13.17	2.44	17.57	33.18	46.00	12.82	QP
6	320.03	13.57	2.40	9.87	25.84	46.00	20.16	QP

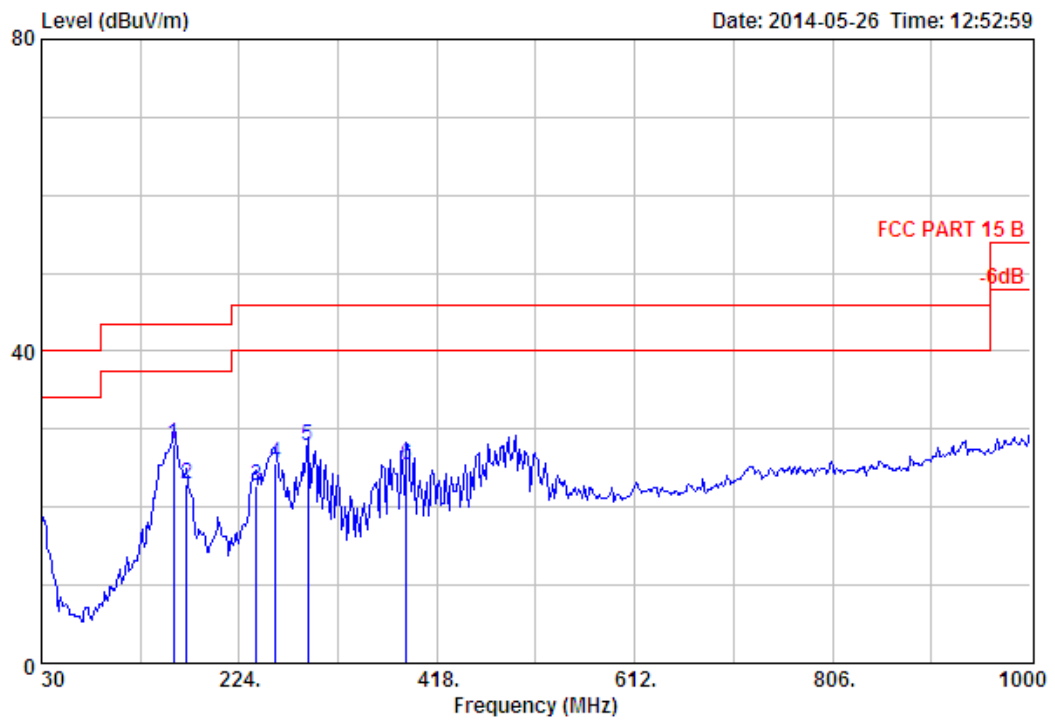

Site no. : 3m Chamber Data no. : 430
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	159.98	10.36	1.71	15.95	28.02	43.50	15.48	QP
2	172.59	9.07	1.68	12.26	23.01	43.50	20.49	QP
3	240.49	10.36	2.11	10.22	22.69	46.00	23.31	QP
4	259.89	12.97	2.25	10.39	25.61	46.00	20.39	QP
5	290.93	12.78	2.34	12.82	27.94	46.00	18.06	QP
6	387.93	15.48	2.65	7.22	25.35	46.00	20.65	QP


1000 MHz – 18000MHz

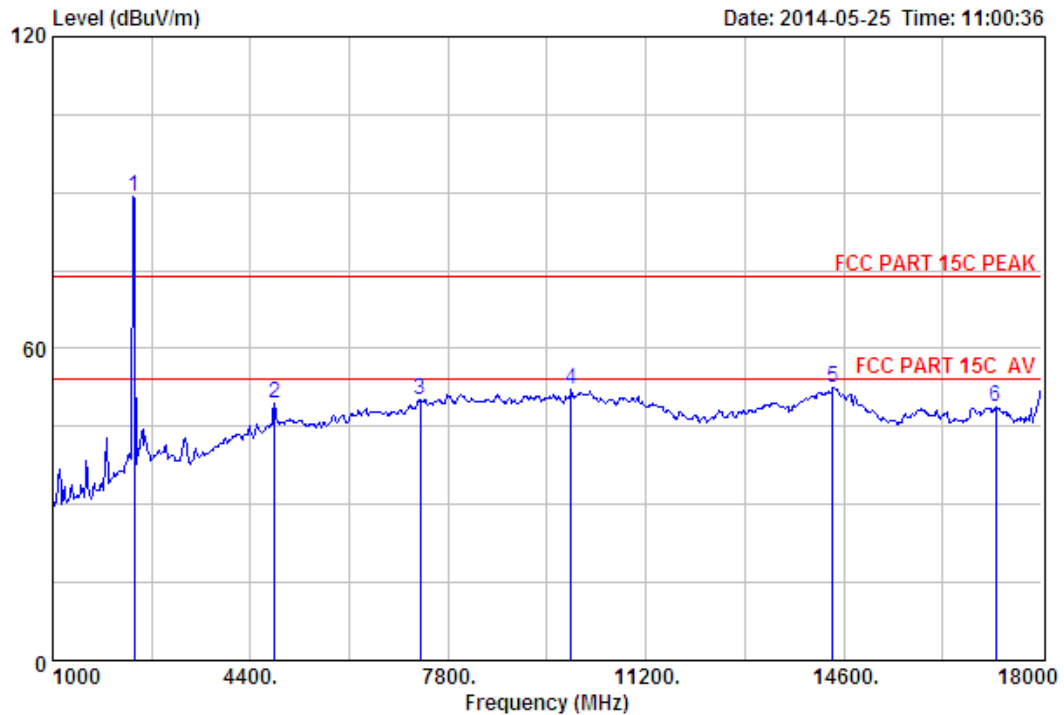

Site no. : 3m Chamber Data no. : 331
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.18	89.25	89.30	74.00	-15.30	Peak
2	4808.00	31.25	11.77	31.81	38.31	49.52	74.00	24.48	Peak
3	7324.00	36.55	11.57	31.99	33.98	50.11	74.00	23.89	Peak
4	9908.00	38.14	11.61	31.76	34.10	52.09	74.00	21.91	Peak
5	14413.00	41.80	10.92	32.78	32.52	52.46	74.00	21.54	Peak
6	17218.00	40.58	10.91	33.55	30.78	48.72	74.00	25.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

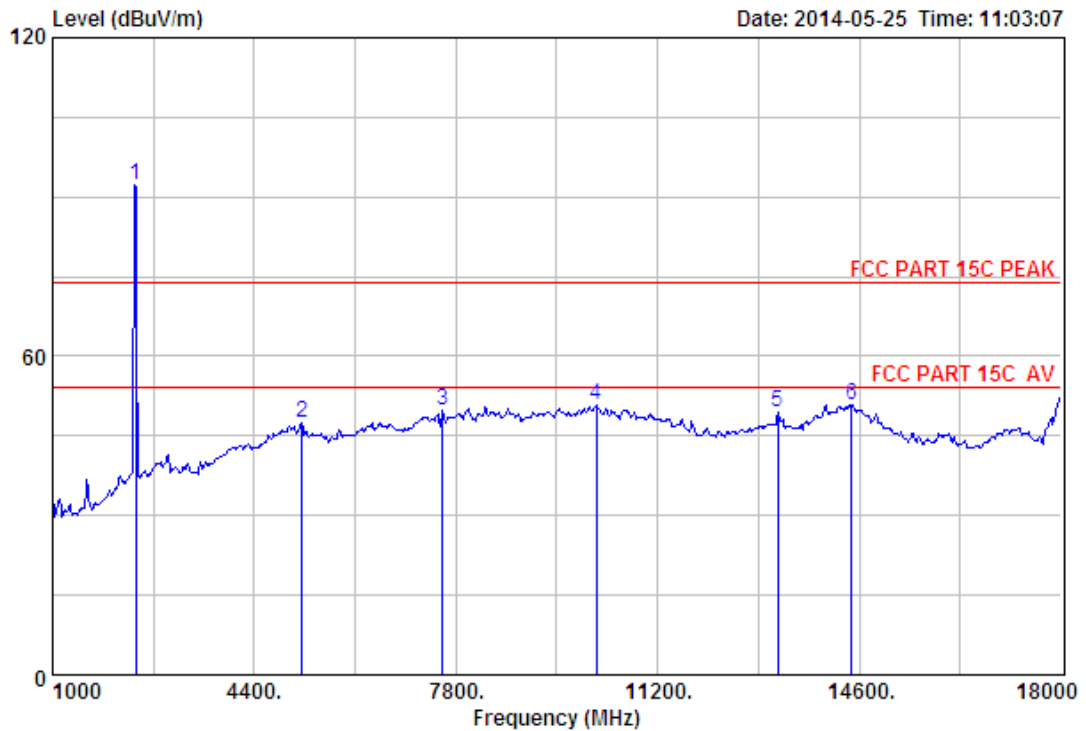

Site no. : 3m Chamber Data no. : 332
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2402MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2402.00	27.61	6.62	34.18	92.21	92.26	74.00	-18.26	Peak
2	5199.00	31.67	12.35	32.16	35.76	47.62	74.00	26.38	Peak
3	7579.00	36.39	11.58	31.78	33.61	49.80	74.00	24.20	Peak
4	10163.00	38.39	11.50	32.08	33.04	50.85	74.00	23.15	Peak
5	13223.00	39.42	11.46	34.68	33.35	49.55	74.00	24.45	Peak
6	14464.00	41.85	10.93	32.96	31.06	50.88	74.00	23.12	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

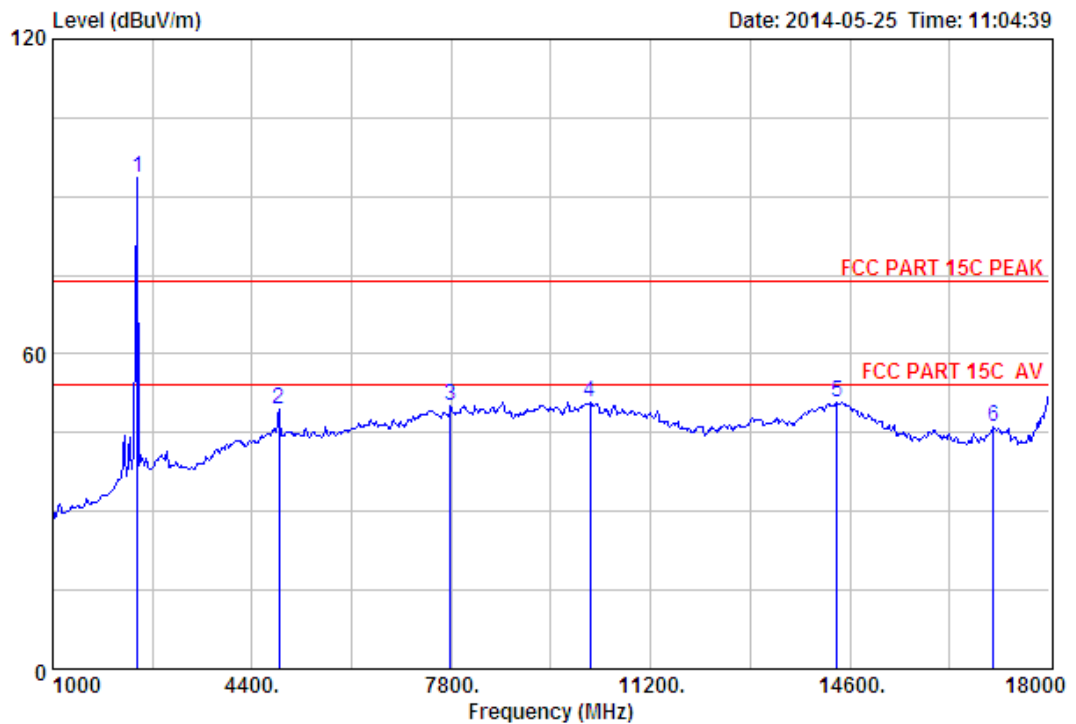

Site no. : 3m Chamber Data no. : 333
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.12	93.41	93.56	74.00	-19.56	Peak
2	4859.00	31.34	11.99	31.88	38.09	49.54	74.00	24.46	Peak
3	7783.00	36.59	11.50	31.45	33.61	50.25	74.00	23.75	Peak
4	10163.00	38.39	11.50	32.08	32.94	50.75	74.00	23.25	Peak
5	14379.00	41.77	10.92	32.88	30.90	50.71	74.00	23.29	Peak
6	17048.00	39.93	10.97	33.09	28.34	46.15	74.00	27.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

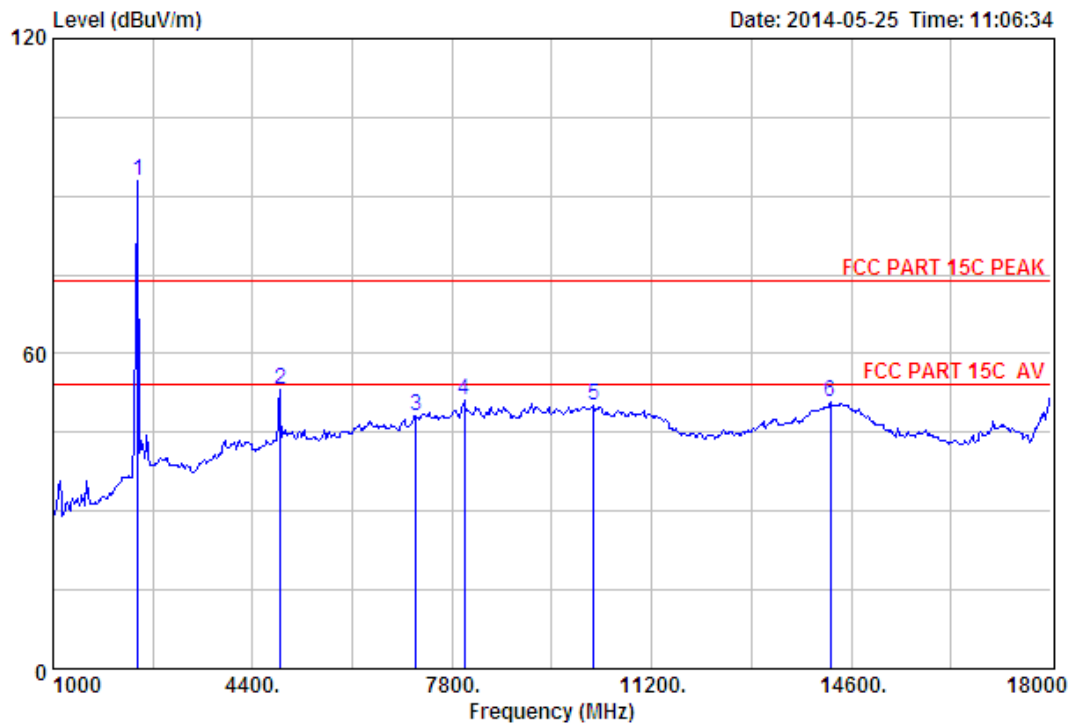

Site no. : 3m Chamber Data no. : 334
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.12	92.83	92.98	74.00	-18.98	Peak
2	4882.00	31.37	12.07	31.90	41.57	53.11	74.00	20.89	Peak
3	7188.00	36.43	11.53	32.14	32.26	48.08	74.00	25.92	Peak
4	8004.00	37.01	11.40	31.22	33.80	50.99	74.00	23.01	Peak
5	10214.00	38.48	11.47	32.17	32.30	50.08	74.00	23.92	Peak
6	14243.00	41.67	10.91	33.24	31.35	50.69	74.00	23.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

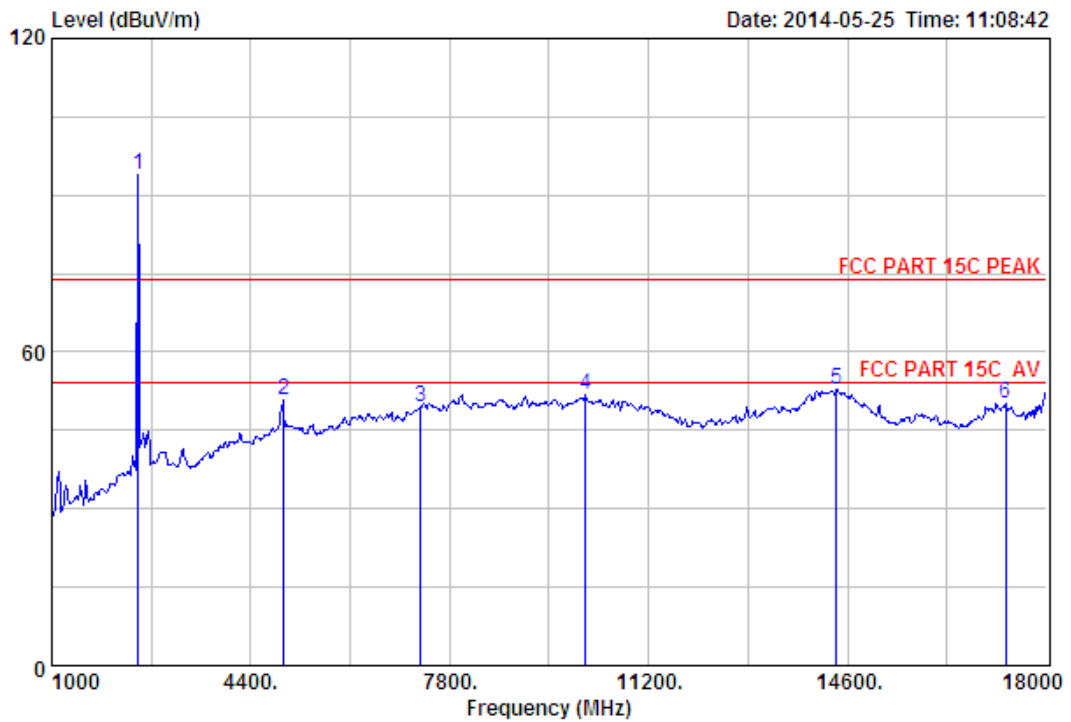

Site no. : 3m Chamber Data no. : 335
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	93.57	93.83	74.00	-19.83	Peak
2	4960.00	31.49	12.44	31.97	38.87	50.83	74.00	23.17	Peak
3	7307.00	36.55	11.57	32.00	33.24	49.36	74.00	24.64	Peak
4	10129.00	38.33	11.52	32.01	33.88	51.72	74.00	22.28	Peak
5	14413.00	41.80	10.92	32.78	33.03	52.97	74.00	21.03	Peak
6	17303.00	40.84	10.88	33.97	32.42	50.17	74.00	23.83	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

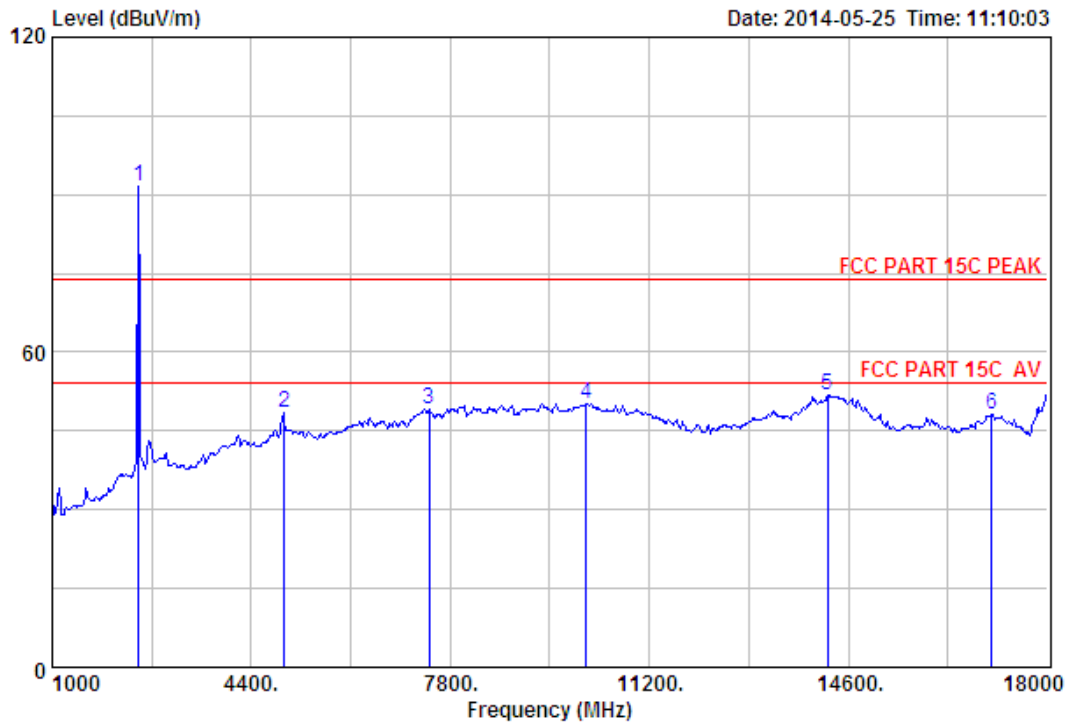

Site no. : 3m Chamber Data no. : 336
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2480MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.00	27.58	6.71	34.03	91.26	91.52	74.00	-17.52	Peak
2	4960.00	31.49	12.44	31.97	36.53	48.49	74.00	25.51	Peak
3	7443.00	36.54	11.61	31.93	32.96	49.18	74.00	24.82	Peak
4	10129.00	38.33	11.52	32.01	32.33	50.17	74.00	23.83	Peak
5	14243.00	41.67	10.91	33.24	32.47	51.81	74.00	22.19	Peak
6	17048.00	39.93	10.97	33.09	30.38	48.19	74.00	25.81	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

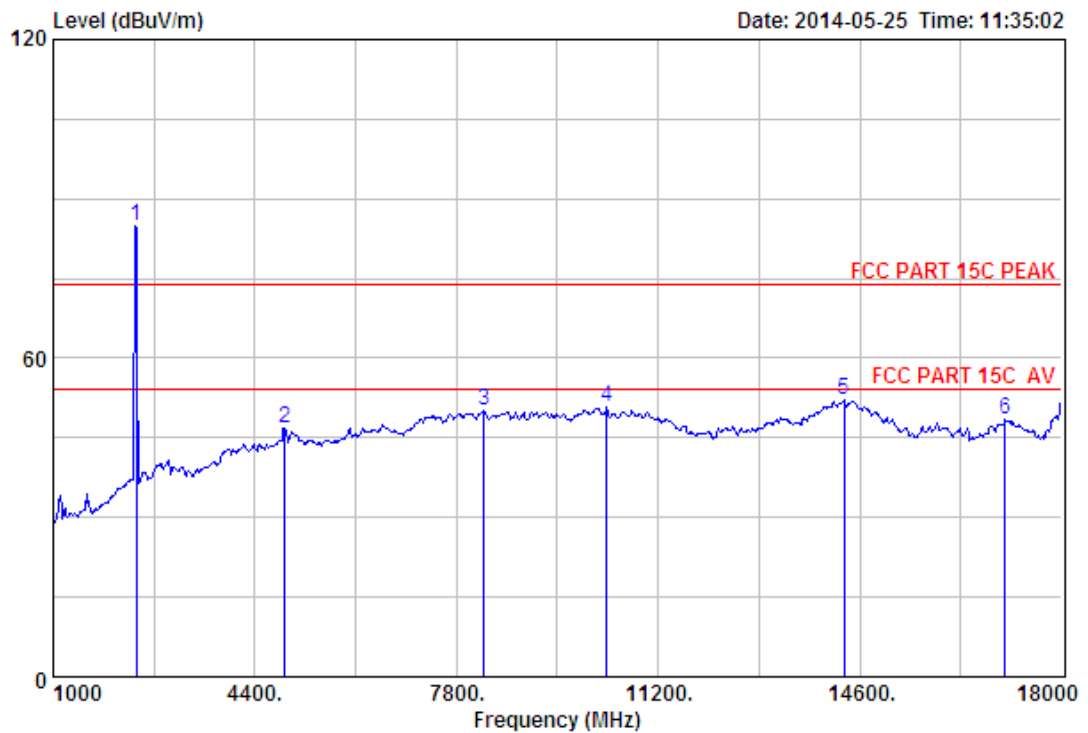

Site no. : 3m Chamber Data no. : 349
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2402MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	2402.00	27.61	6.62	34.18	84.96	85.01	74.00	-11.01	Peak
2	4910.00	31.42	12.22	31.93	34.94	46.65	74.00	27.35	Peak
3	8259.00	36.67	11.43	31.53	33.41	49.98	74.00	24.02	Peak
4	10333.00	38.68	11.40	32.40	33.12	50.80	74.00	23.20	Peak
5	14328.00	41.74	10.92	32.98	32.43	52.11	74.00	21.89	Peak
6	17048.00	39.93	10.97	33.09	30.62	48.43	74.00	25.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

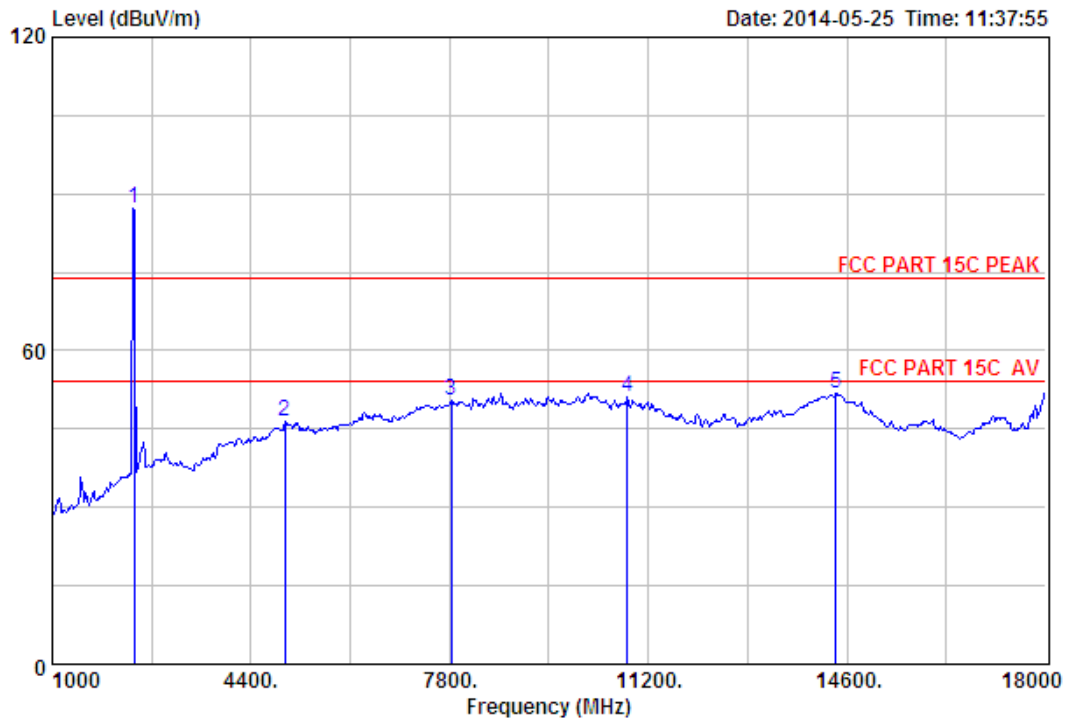

Site no. : 3m Chamber Data no. : 350
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.18	87.07	87.12	74.00	-13.12	Peak
2	4978.00	31.52	12.52	31.99	34.52	46.57	74.00	27.43	Peak
3	7834.00	36.68	11.47	31.40	33.83	50.58	74.00	23.42	Peak
4	10843.00	39.35	11.30	33.36	33.75	51.04	74.00	22.96	Peak
5	14413.00	41.80	10.92	32.78	31.84	51.78	74.00	22.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

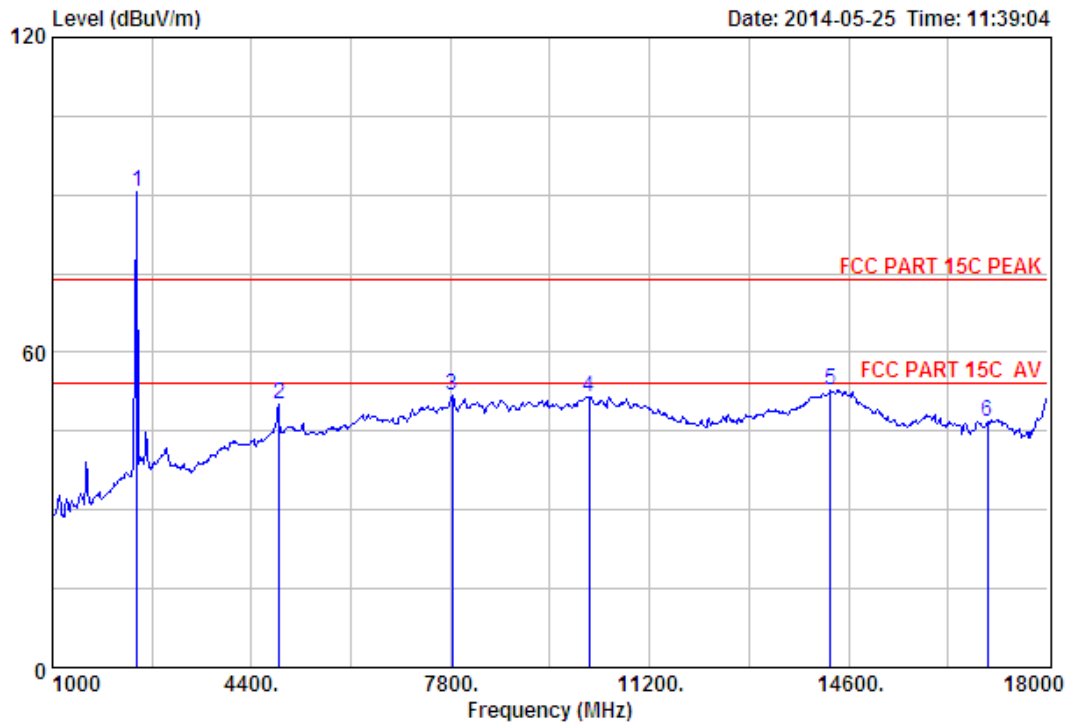

Site no. : 3m Chamber Data no. : 351
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.12	90.29	90.44	74.00	-16.44	Peak
2	4882.00	31.37	12.07	31.90	38.50	50.04	74.00	23.96	Peak
3	7834.00	36.68	11.47	31.40	35.15	51.90	74.00	22.10	Peak
4	10163.00	38.39	11.50	32.08	33.74	51.55	74.00	22.45	Peak
5	14294.00	41.71	10.92	33.08	33.13	52.68	74.00	21.32	Peak
6	16980.00	39.69	10.97	33.32	29.29	46.63	74.00	27.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

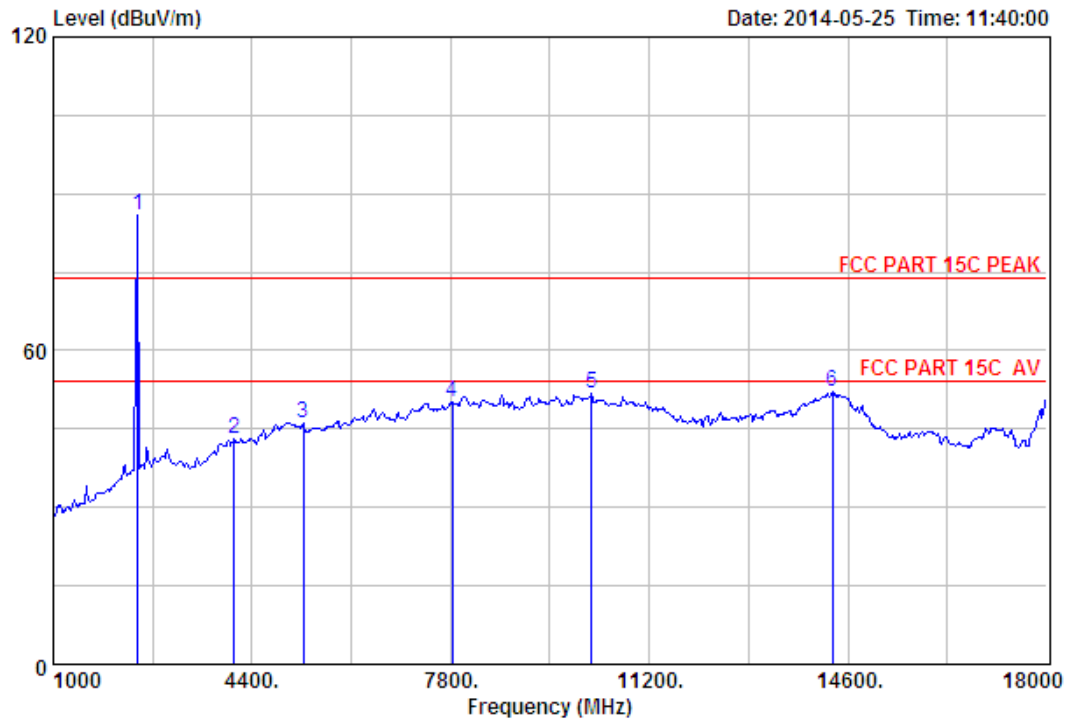

Site no. : 3m Chamber Data no. : 352
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.12	85.85	86.00	74.00	-12.00	Peak
2	4094.00	29.83	10.80	32.12	34.69	43.20	74.00	30.80	Peak
3	5284.00	31.70	12.25	32.22	34.47	46.20	74.00	27.80	Peak
4	7834.00	36.68	11.47	31.40	33.41	50.16	74.00	23.84	Peak
5	10214.00	38.48	11.47	32.17	33.90	51.68	74.00	22.32	Peak
6	14328.00	41.74	10.92	32.98	32.33	52.01	74.00	21.99	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

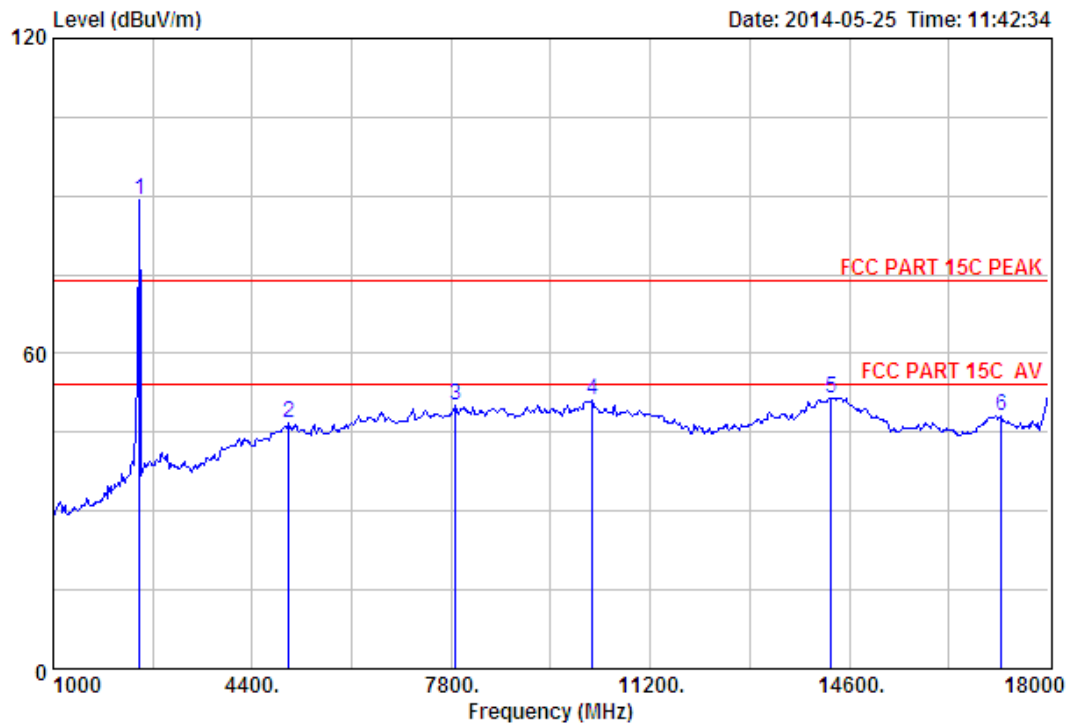

Site no. : 3m Chamber Data no. : 353
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	88.93	89.19	74.00	-15.19	Peak
2	5029.00	31.56	12.55	32.06	34.58	46.63	74.00	27.37	Peak
3	7868.00	36.74	11.46	31.35	33.45	50.30	74.00	23.70	Peak
4	10214.00	38.48	11.47	32.17	33.21	50.99	74.00	23.01	Peak
5	14294.00	41.71	10.92	33.08	32.06	51.61	74.00	22.39	Peak
6	17201.00	40.52	10.91	33.45	30.27	48.25	74.00	25.75	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

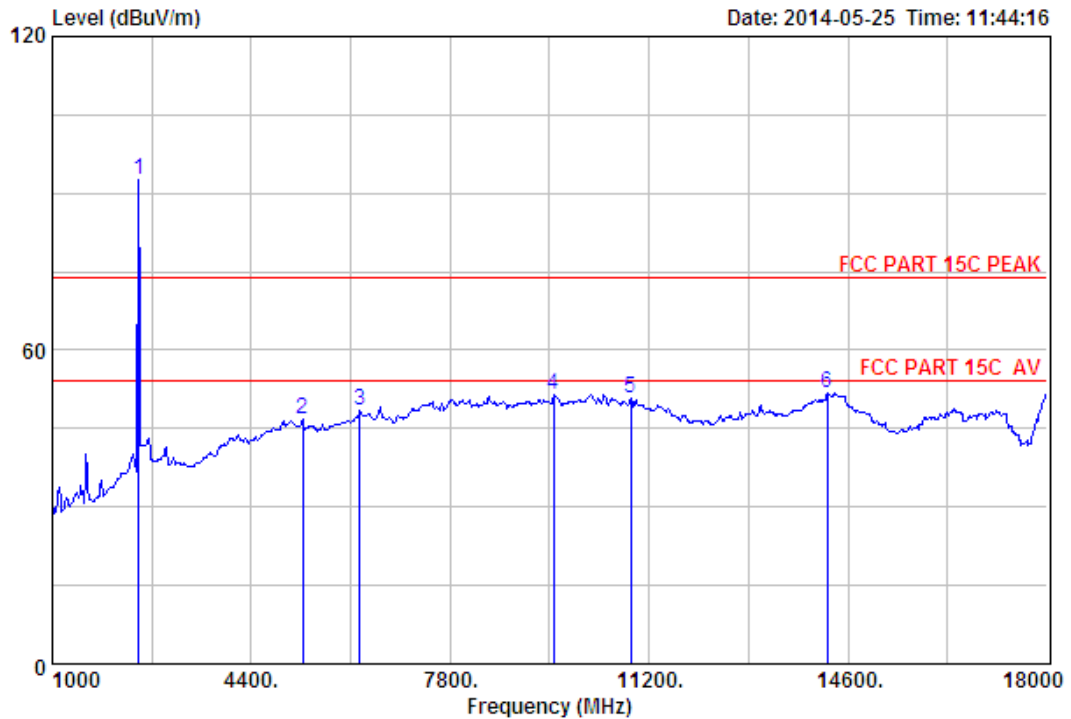


Site no. : 3m Chamber Data no. : 354
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2480MHz

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.00	27.58	6.71	34.03	92.44	92.70	74.00	-18.70	Peak
2	5284.00	31.70	12.25	32.22	35.22	46.95	74.00	27.05	Peak
3	6253.00	33.42	12.17	31.96	34.82	48.45	74.00	25.55	Peak
4	9568.00	37.94	11.69	31.93	33.61	51.31	74.00	22.69	Peak
5	10894.00	39.41	11.29	33.46	33.43	50.67	74.00	23.33	Peak
6	14243.00	41.67	10.91	33.24	32.50	51.84	74.00	22.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


18000MHz – 25000MHz

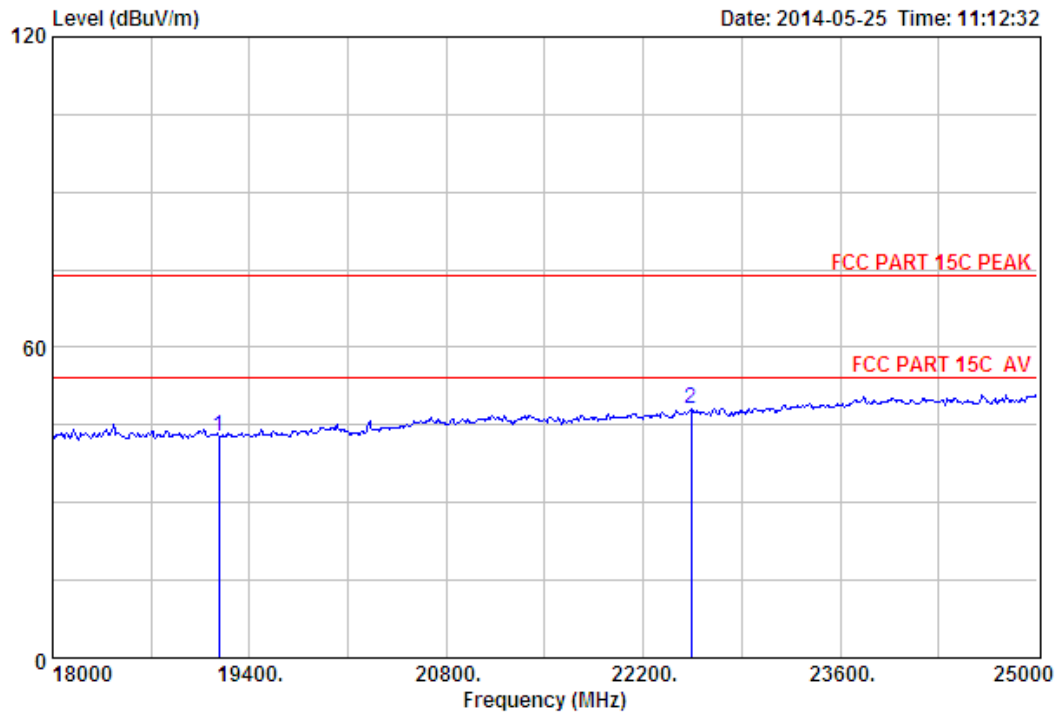

Site no. : 3m Chamber Data no. : 337
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2402MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	19183.00	45.60	18.75	36.00	14.30	42.65	74.00	31.35	Peak
2	22543.00	45.79	20.88	34.32	15.68	48.03	74.00	25.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

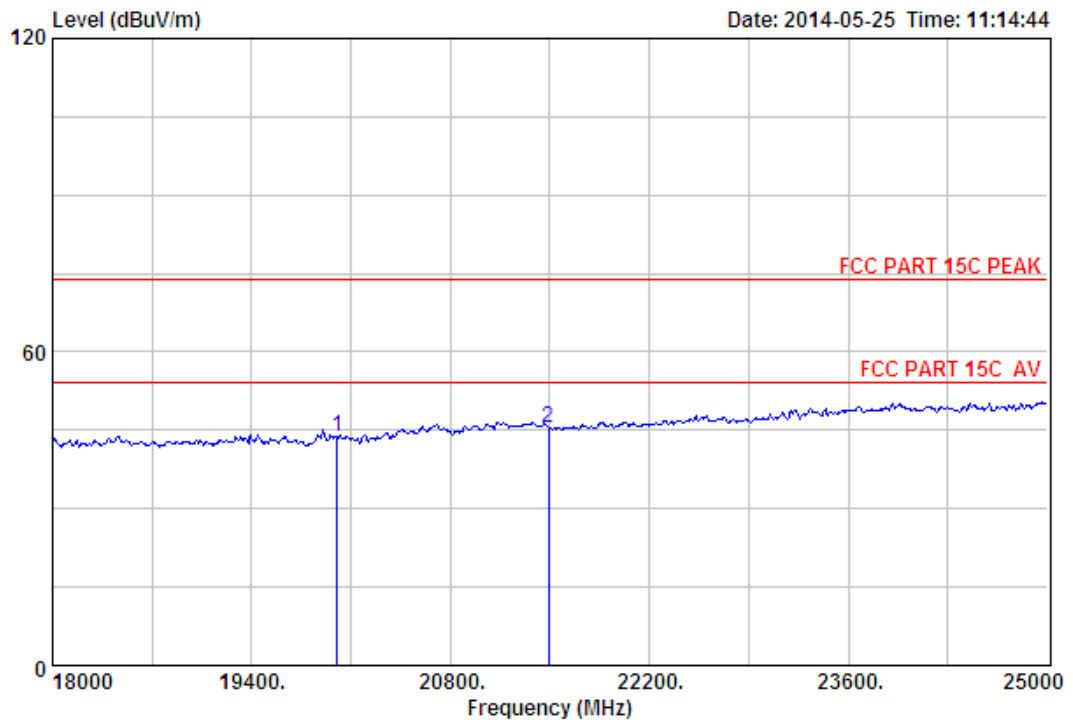

Site no. : 3m Chamber Data no. : 338
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2402MHz

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20002.00	46.10	19.68	36.70	14.59	43.67	74.00	30.33	Peak
2	21493.00	46.00	20.34	35.35	14.62	45.61	74.00	28.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

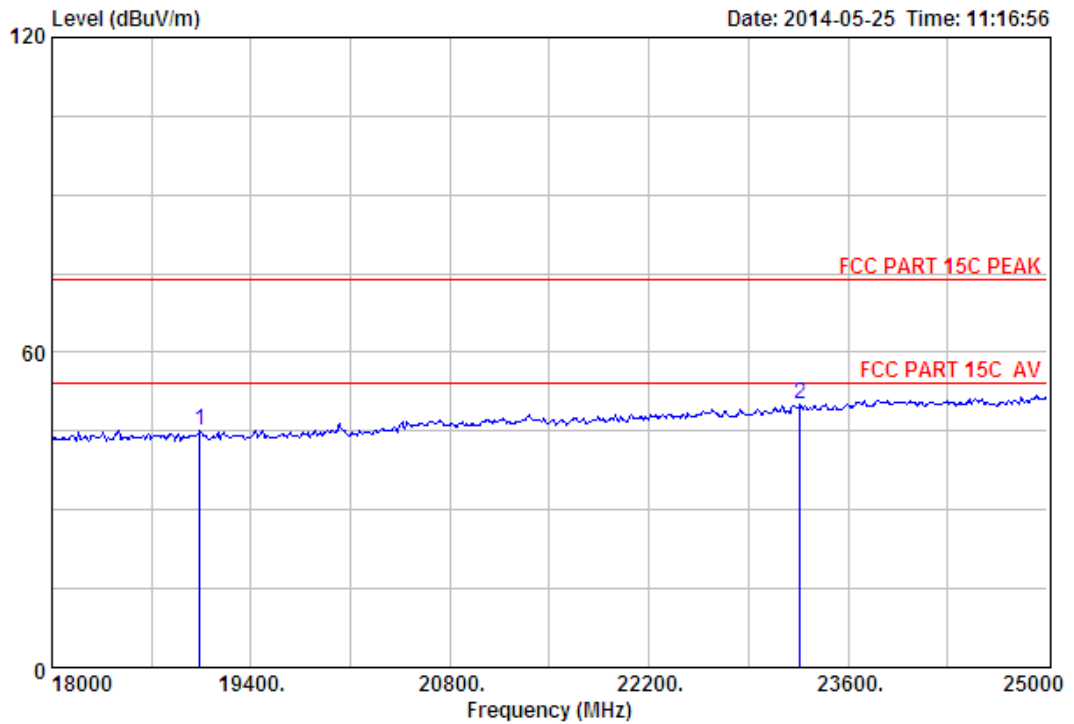

Site no. : 3m Chamber Data no. : 339
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2441MHz


	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	19043.00	45.44	18.59	35.89	16.94	45.08	74.00	28.92	Peak
2	23264.00	45.65	21.39	33.56	16.59	50.07	74.00	23.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

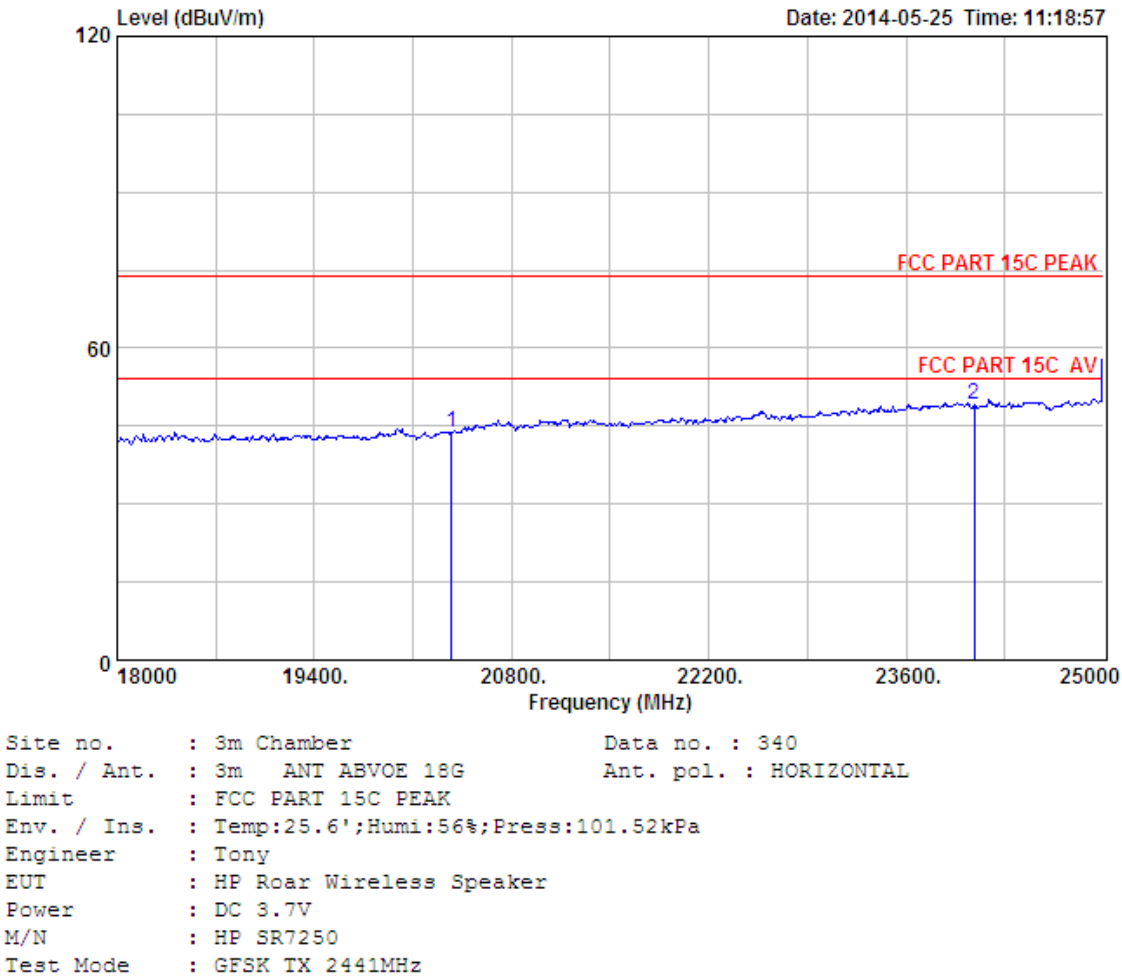

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	20373.00	46.03	19.85	36.36	14.30	43.82	74.00	30.18	Peak
2	24083.00	45.61	22.09	32.92	14.40	49.18	74.00	24.82	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

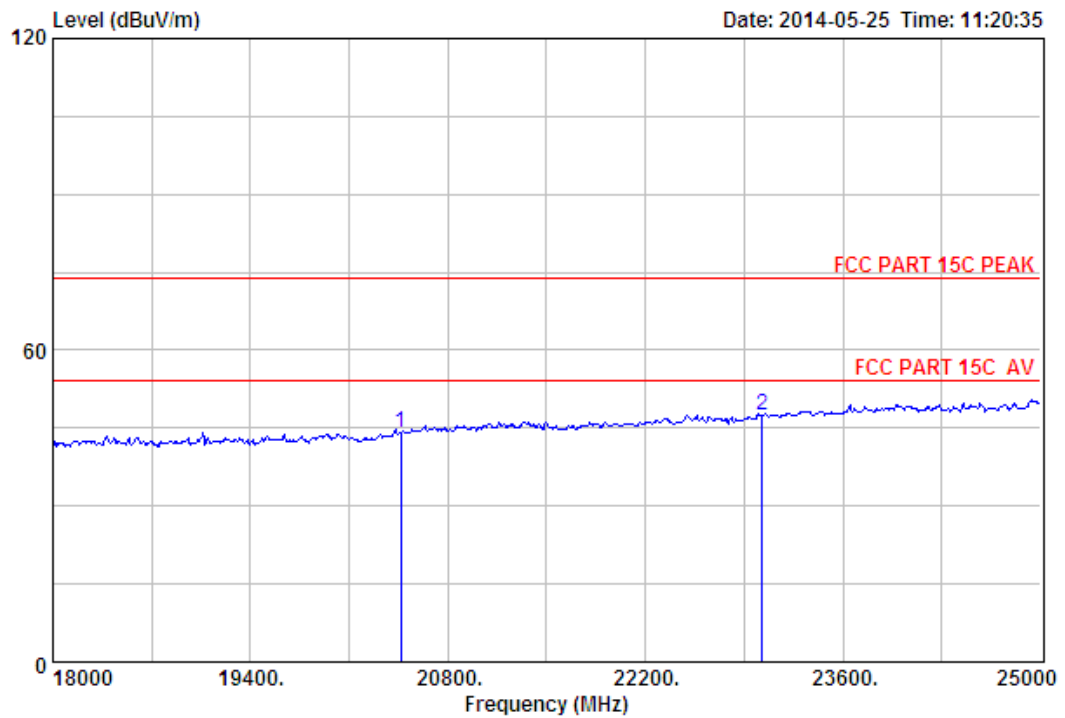

Site no. : 3m Chamber Data no. : 341
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2480MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20464.00	46.01	19.89	36.27	14.41	44.04	74.00	29.96	Peak
2	23026.00	45.60	21.17	33.82	14.44	47.39	74.00	26.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

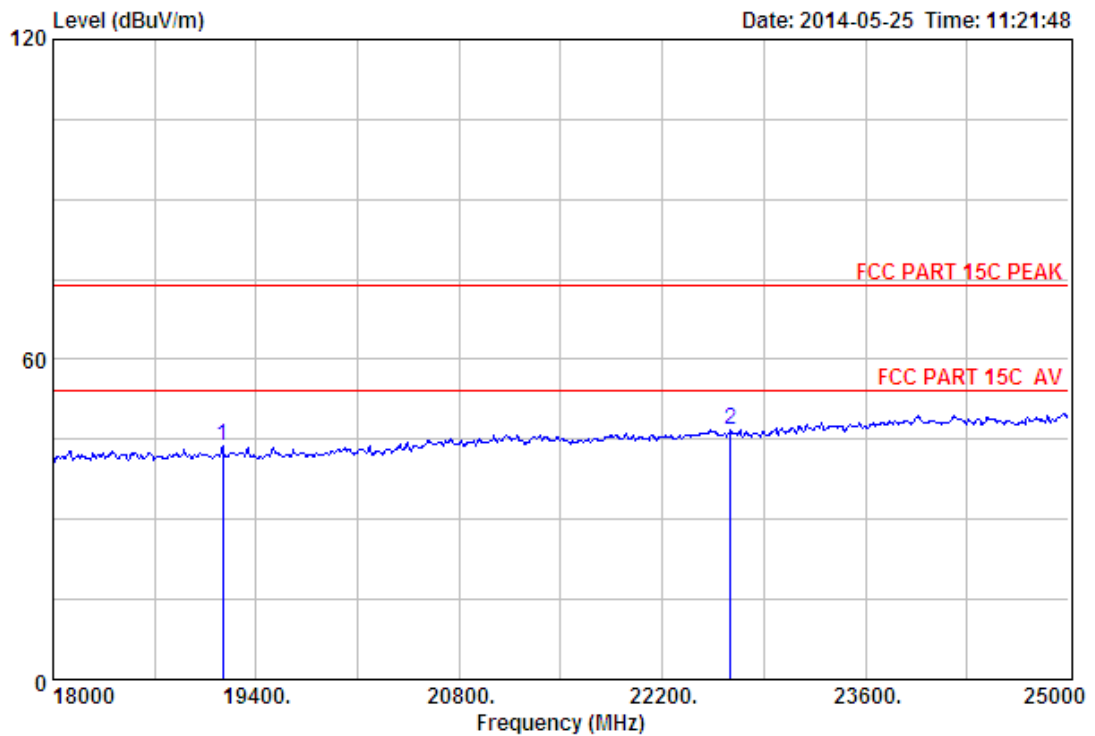

Site no. : 3m Chamber Data no. : 342
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2480MHz


		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	19169.00	45.57	18.74	36.00	15.56	43.87	74.00	30.13	Peak
2	22669.00	45.74	20.96	34.19	14.15	46.66	74.00	27.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

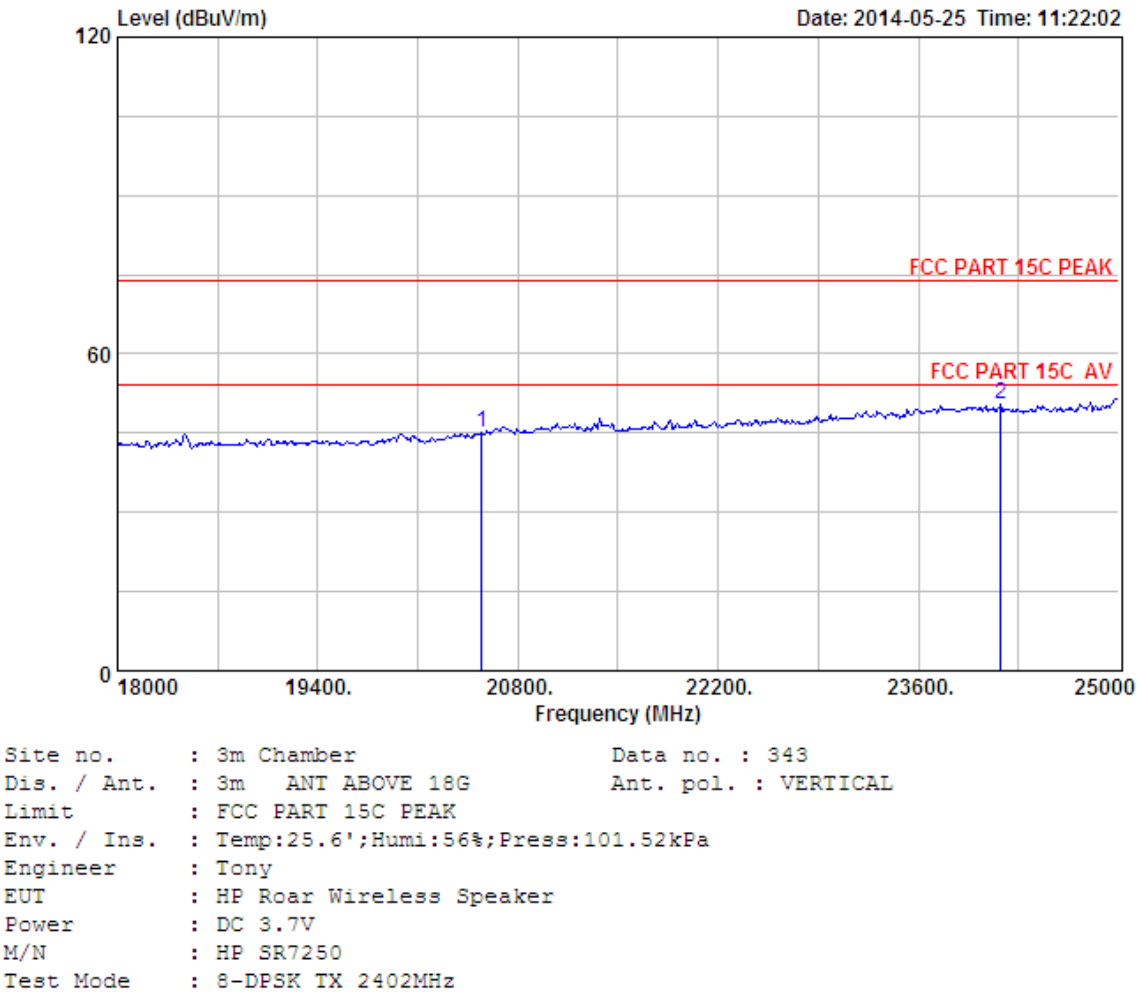

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	20548.00	46.03	19.93	36.21	15.30	45.05	74.00	28.95	Peak
2	24174.00	45.64	22.14	33.07	15.92	50.63	74.00	23.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

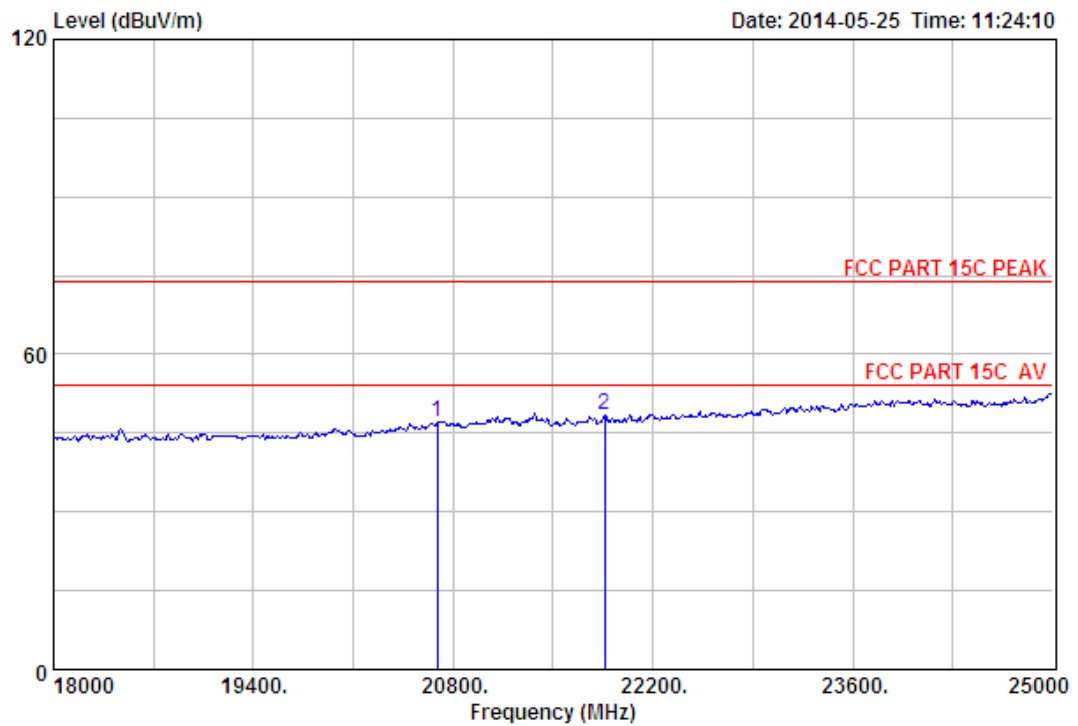

Site no. : 3m Chamber Data no. : 344
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2402MHz


	Ant.	Cable	Amp		Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	20688.00	46.11	19.99	36.07	17.15	47.18	74.00	26.82	Peak
2	21864.00	45.78	20.50	35.01	17.08	48.35	74.00	25.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

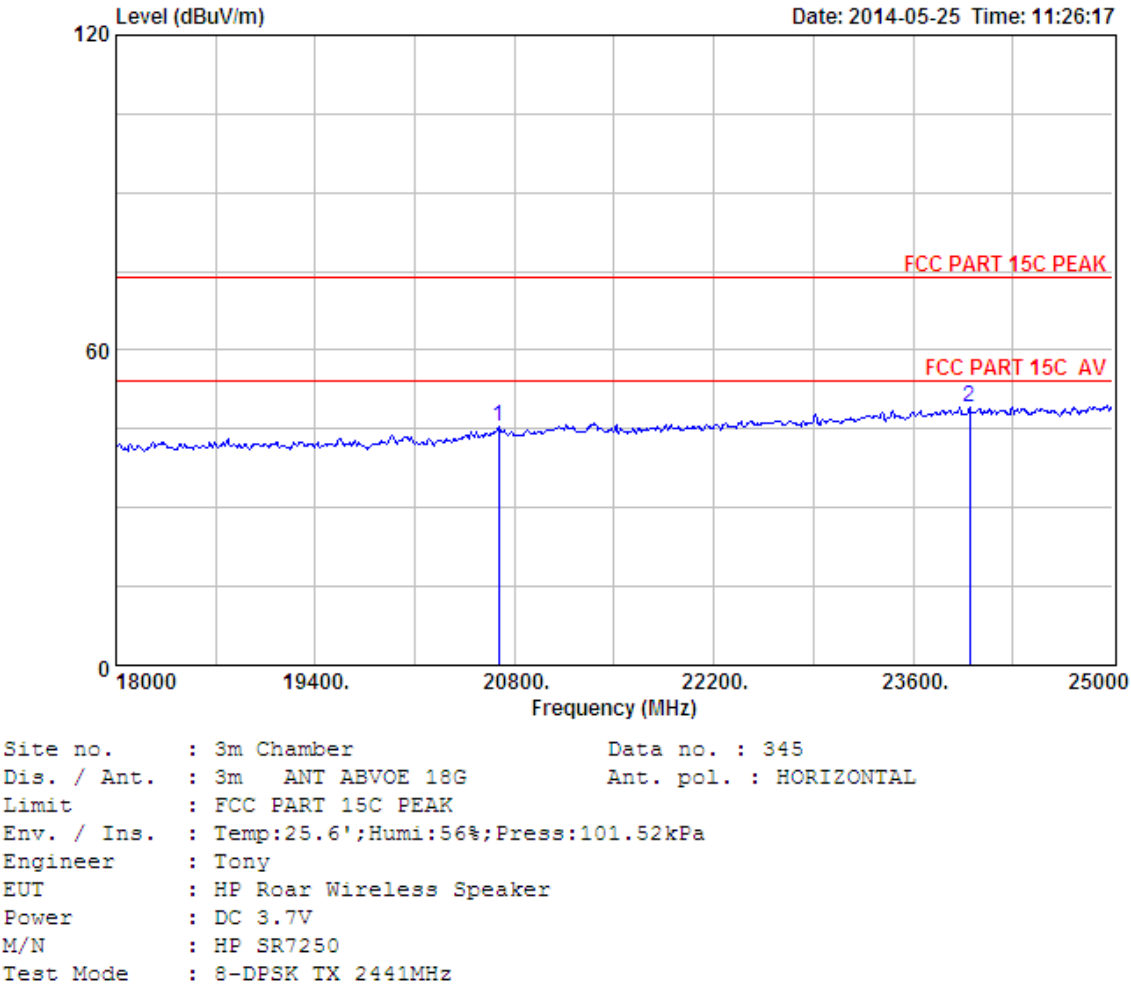

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	20688.00	46.11	19.99	36.07	15.40	45.43	74.00	28.57	Peak
2	23999.00	45.60	22.05	32.80	14.28	49.13	74.00	24.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

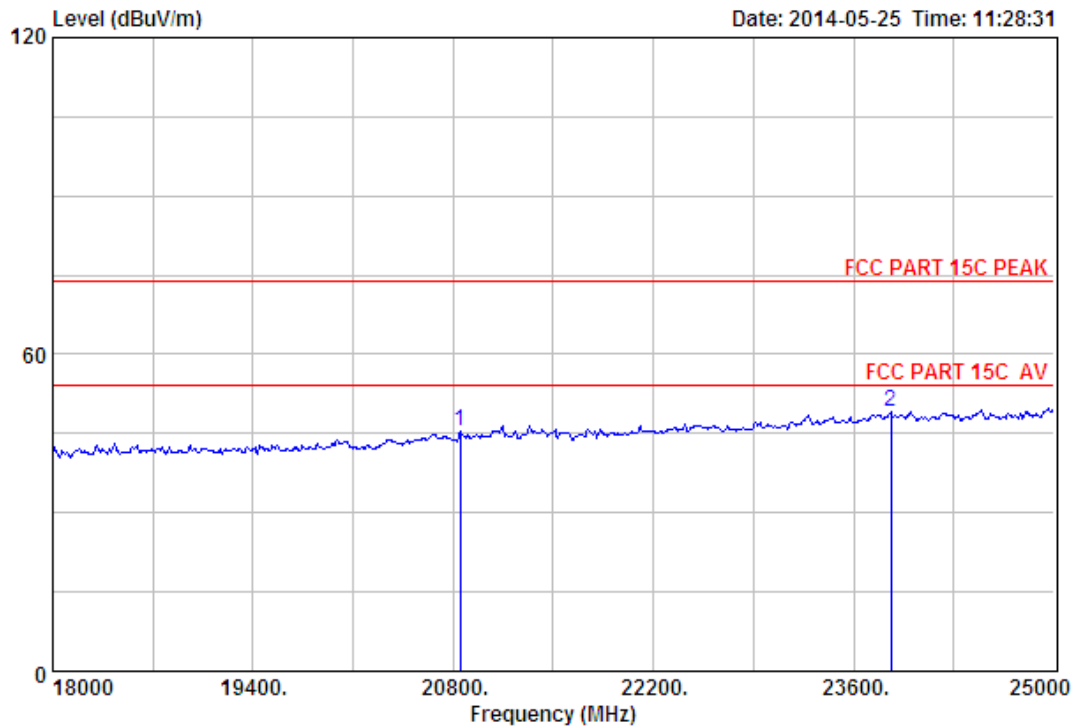

Site no. : 3m Chamber Data no. : 346
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2441MHz


		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20849.00	46.22	20.07	35.94	15.10	45.45	74.00	28.55	Peak
2	23859.00	45.63	21.92	32.96	14.45	49.04	74.00	24.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

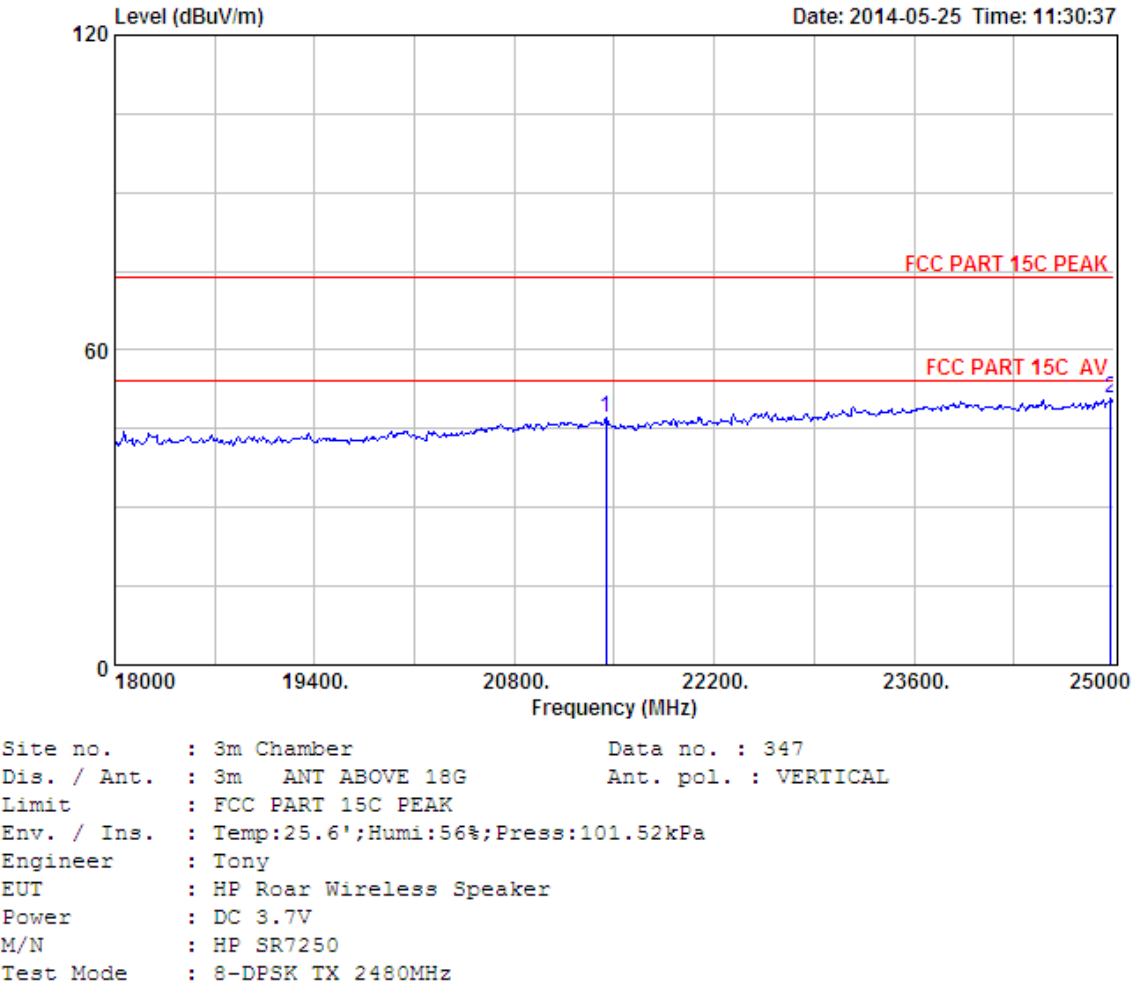

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 21444.00	46.03	20.32	35.40	16.08	47.03	74.00	26.97	Peak	
2 24979.00	46.08	22.58	34.31	16.30	50.65	74.00	23.35	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

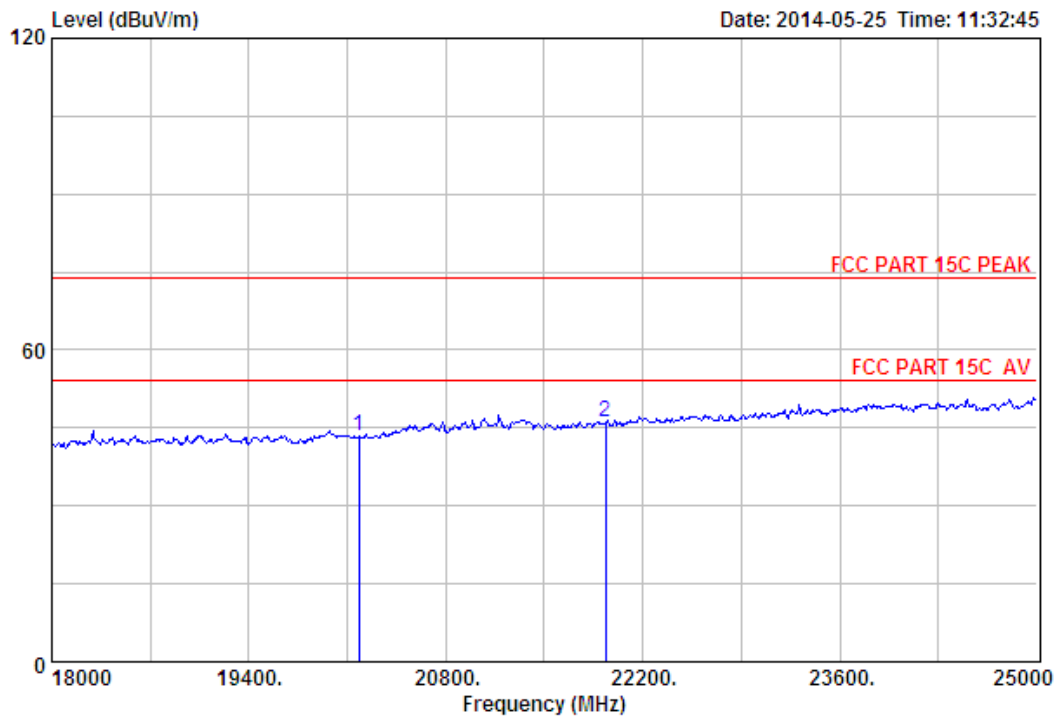

Site no. : 3m Chamber Data no. : 348
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2480MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission		Limits (dBUV/m)	Margin (dB)	Remark
					Level (dBUV/m)				
1 20184.00	46.07	19.77	36.54	14.01	43.31		74.00	30.69	Peak
2 21934.00	45.74	20.53	34.97	14.71	46.01		74.00	27.99	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

9. BAND EDGE COMPLIANCE

9.1. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.2. Block Diagram of Test setup

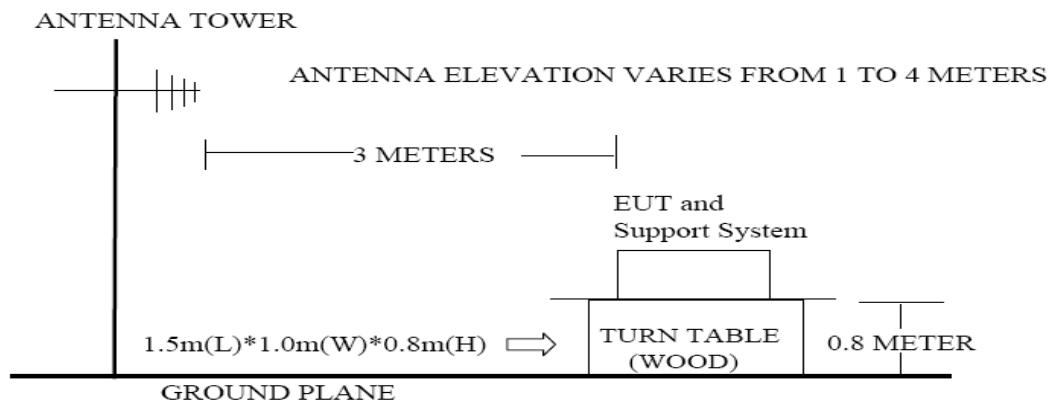

9.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


9.4. Test Result

EUT: HP Roar Wireless Speaker
M/N: HP SR7250
Power: DC 3.7V From Internal Battery
Test date: 2014-05-25 Test site: 3m Chamber Tested by: Tony Tang
Test mode: Tx Mode (Hopping On & No Hopping)
Pass

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.


- 2、 The frequency 2402MHz 、 2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

9.5. Test Data

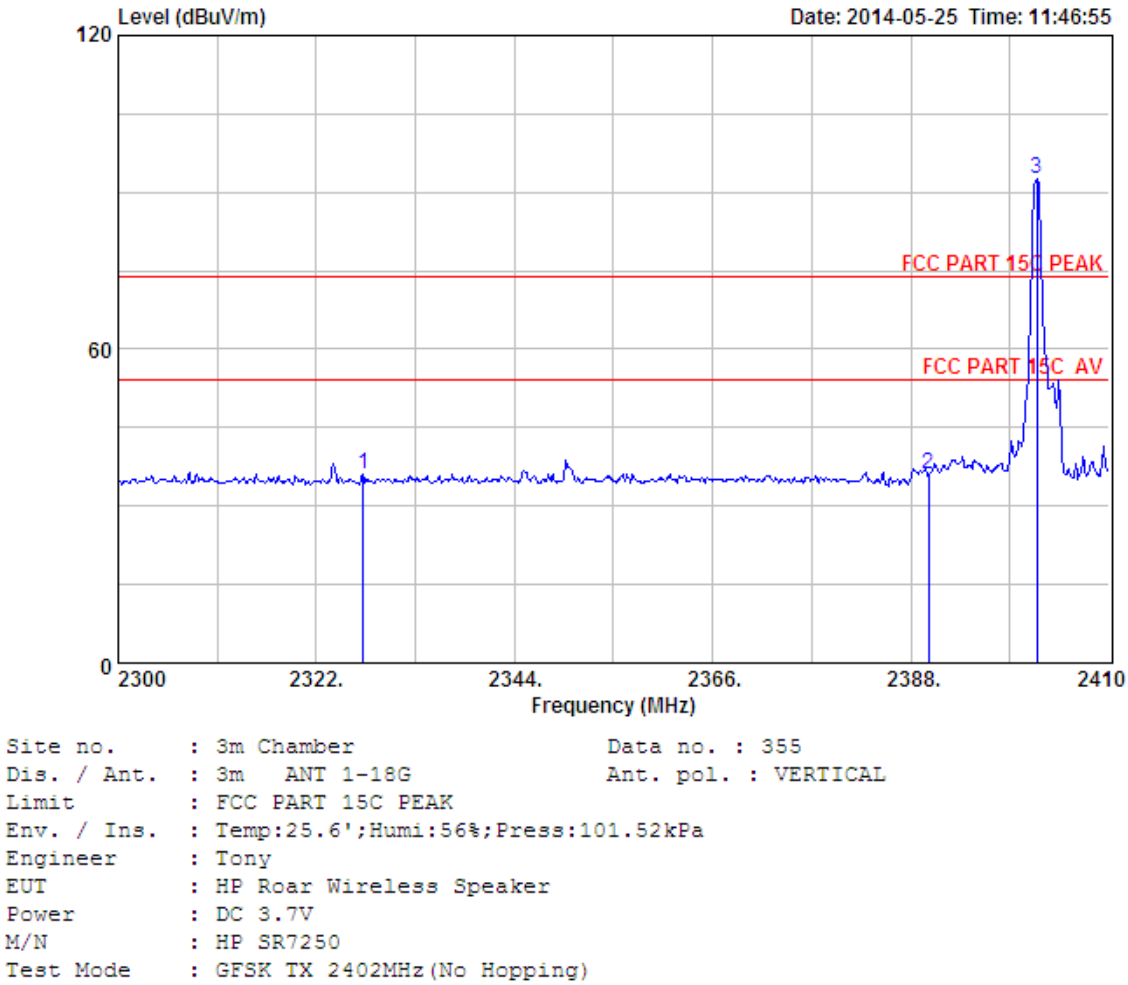

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2327.17	27.73	6.54	34.23	36.22	36.26	74.00	37.74	Peak
2	2390.00	27.64	6.62	34.19	35.96	36.03	74.00	37.97	Peak
3	2401.97	27.61	6.62	34.18	92.43	92.48	74.00	-18.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

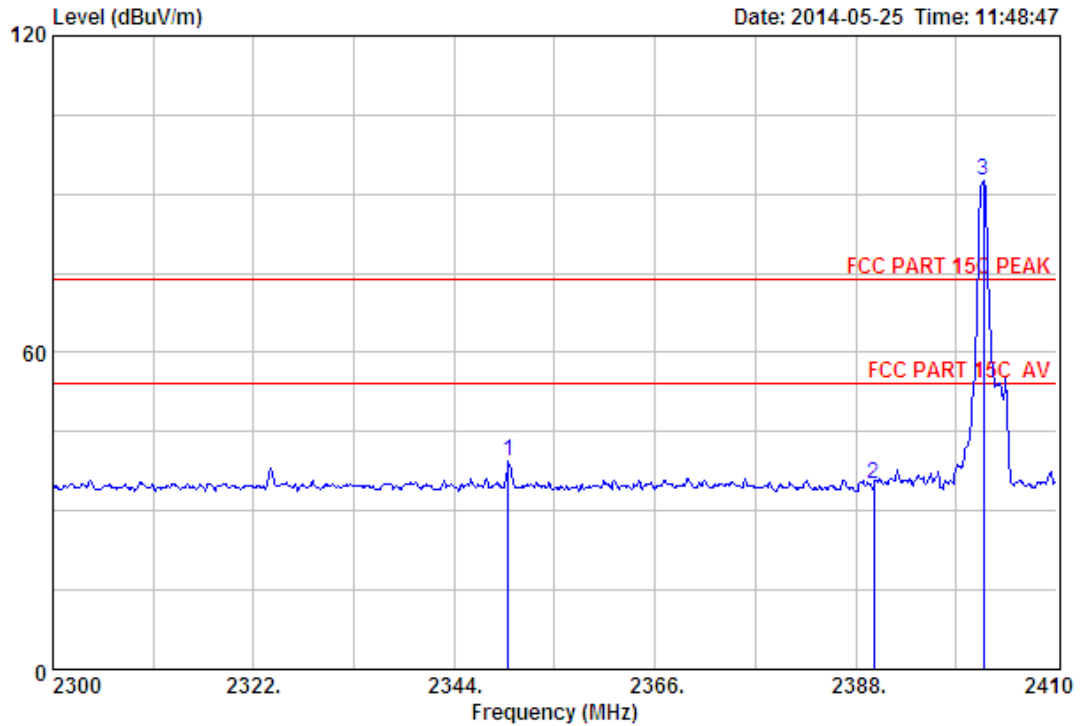

Site no. : 3m Chamber Data no. : 356
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2402MHz(No Hopping)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBUV)	(dBUV/m)	(dBUV/m)	(dB)	
1	2349.94	27.70	6.56	34.22	39.56	39.60	74.00	34.40	Peak
2	2390.00	27.64	6.62	34.19	34.87	34.94	74.00	39.06	Peak
3	2401.97	27.61	6.62	34.18	92.66	92.71	74.00	-18.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

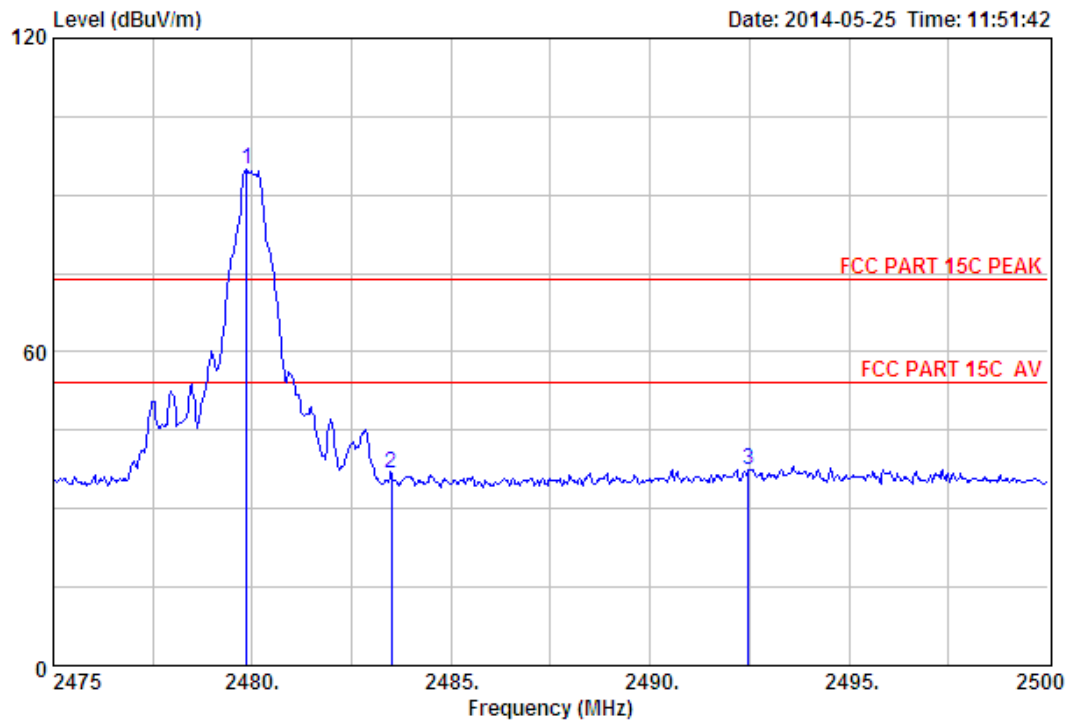

Site no. : 3m Chamber Data no. : 357
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2480MHz (No Hopping)

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.85	27.58	6.71	34.03	94.72	94.98	74.00	-20.98	Peak
2	2483.50	27.58	6.71	34.03	36.36	36.62	74.00	37.38	Peak
3	2492.48	27.58	6.73	34.03	37.31	37.59	74.00	36.41	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

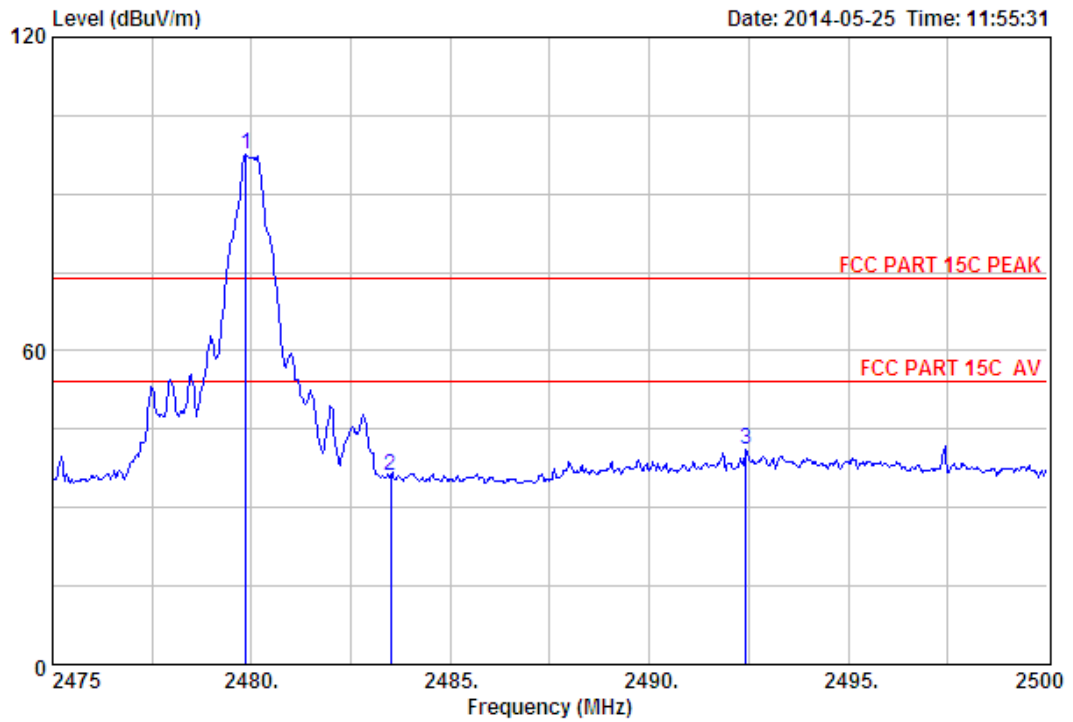

Site no. : 3m Chamber Data no. : 358
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2480MHz(No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission				
					Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.85	27.58	6.71	34.03	97.38	97.64	74.00	-23.64	Peak
2	2483.50	27.58	6.71	34.03	35.82	36.08	74.00	37.92	Peak
3	2492.43	27.58	6.73	34.03	40.88	41.16	74.00	32.84	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

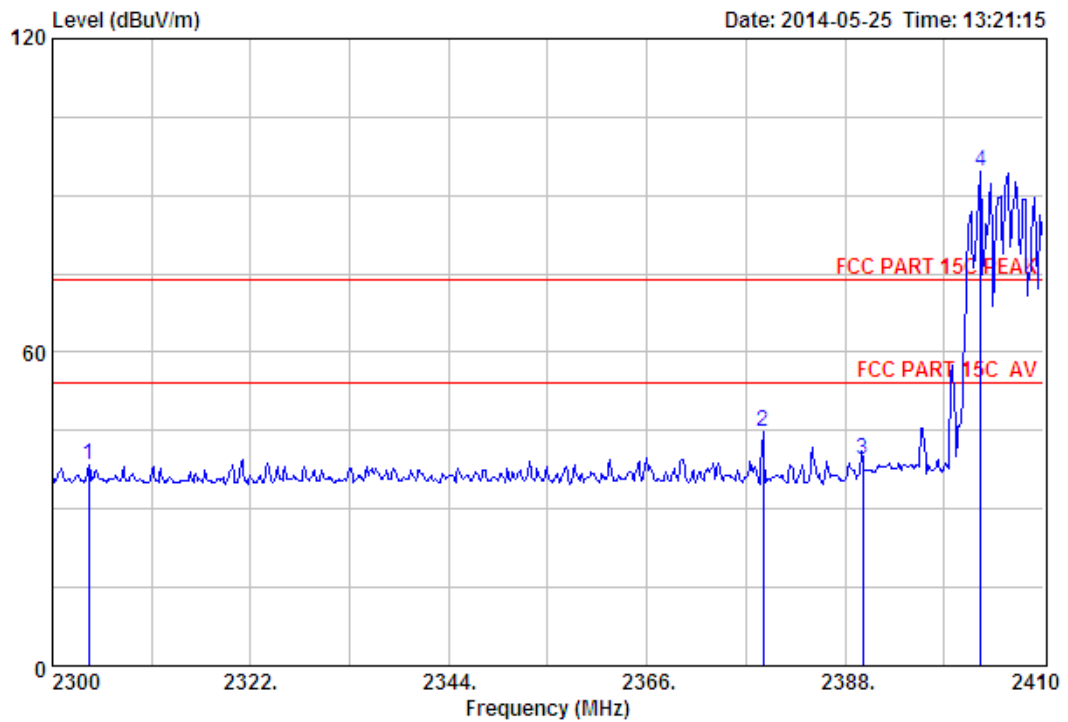

Site no. : 3m Chamber Data no. : 367
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2402MHz(Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2304.07	27.79	6.53	34.25	38.30	38.37	74.00	35.63	Peak
2	2378.87	27.64	6.60	34.19	44.72	44.77	74.00	29.23	Peak
3	2390.00	27.64	6.62	34.19	39.21	39.28	74.00	34.72	Peak
4	2403.07	27.61	6.64	34.18	94.50	94.57	74.00	-20.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

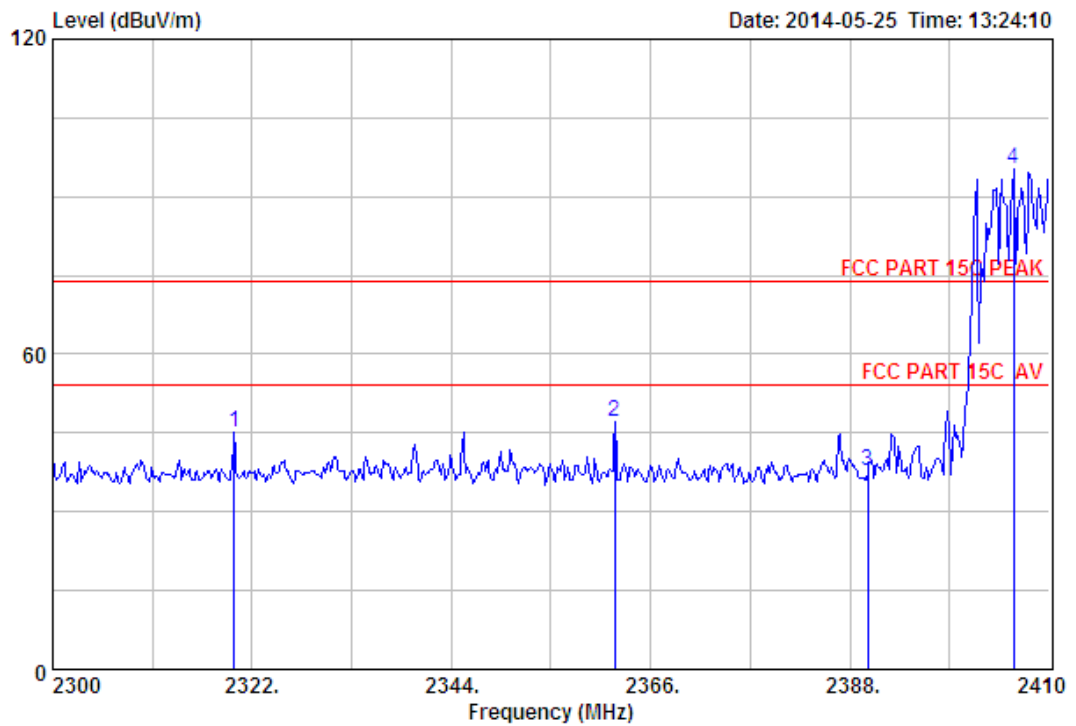

Site no. : 3m Chamber Data no. : 368
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2402MHz(Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2320.02	27.76	6.54	34.24	45.16	45.22	74.00	28.78	Peak
2	2362.04	27.67	6.58	34.20	46.97	47.02	74.00	26.98	Peak
3	2390.00	27.64	6.62	34.19	37.68	37.75	74.00	36.25	Peak
4	2406.04	27.61	6.64	34.18	95.19	95.26	74.00	-21.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

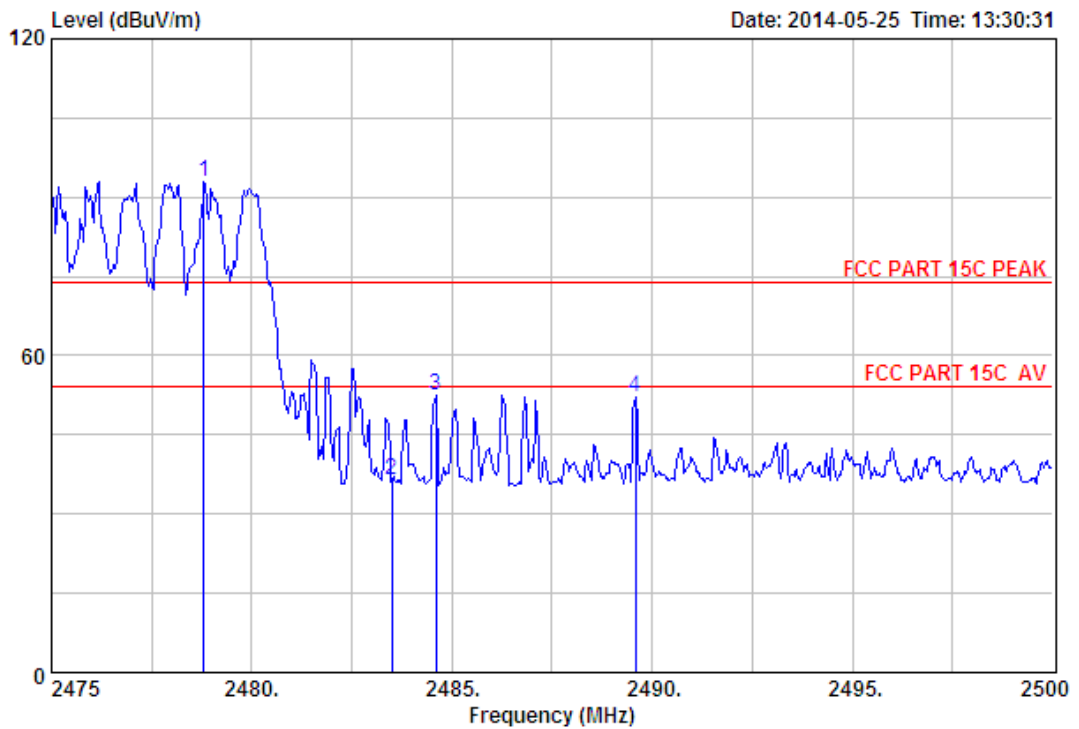

Site no. : 3m Chamber Data no. : 369
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2480MHz(Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2478.80	27.58	6.71	34.03	92.61	92.87	74.00	-18.87	Peak
2	2483.50	27.58	6.71	34.03	36.17	36.43	74.00	37.57	Peak
3	2484.60	27.58	6.71	34.03	52.32	52.58	74.00	21.42	Peak
4	2489.58	27.58	6.73	34.03	51.80	52.08	74.00	21.92	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

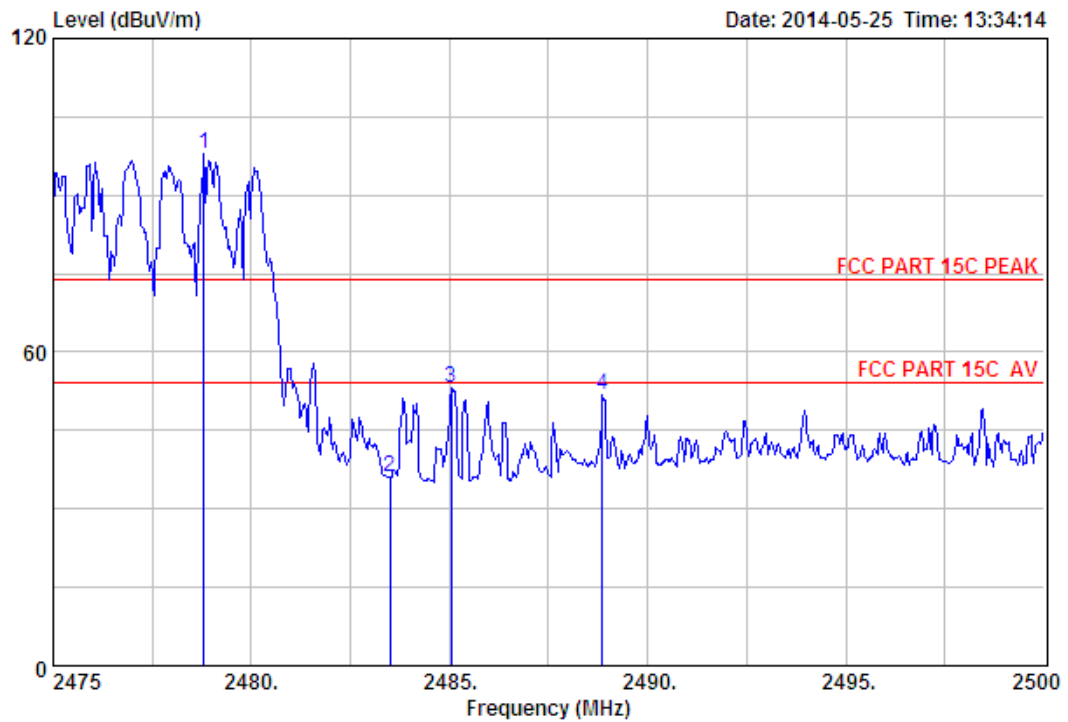

Site no. : 3m Chamber Data no. : 370
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : GFSK TX 2480MHz (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2478.80	27.58	6.71	34.03	97.75	98.01	74.00	-24.01	Peak
2	2483.50	27.58	6.71	34.03	35.94	36.20	74.00	37.80	Peak
3	2485.05	27.58	6.71	34.03	52.73	52.99	74.00	21.01	Peak
4	2488.85	27.58	6.73	34.03	51.58	51.86	74.00	22.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

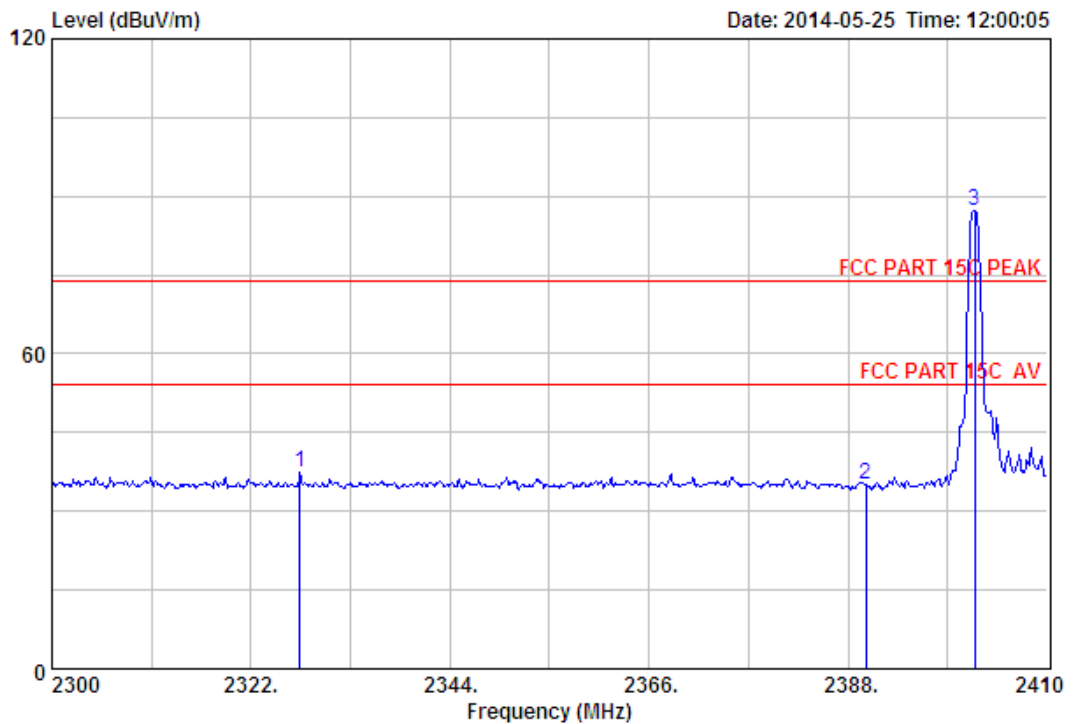

Site no. : 3m Chamber Data no. : 359
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2402MHz (No Hopping)

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2327.39	27.73	6.54	34.23	37.34	37.38	74.00	36.62	Peak
2	2390.00	27.64	6.62	34.19	35.04	35.11	74.00	38.89	Peak
3	2401.97	27.61	6.62	34.18	87.34	87.39	74.00	-13.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

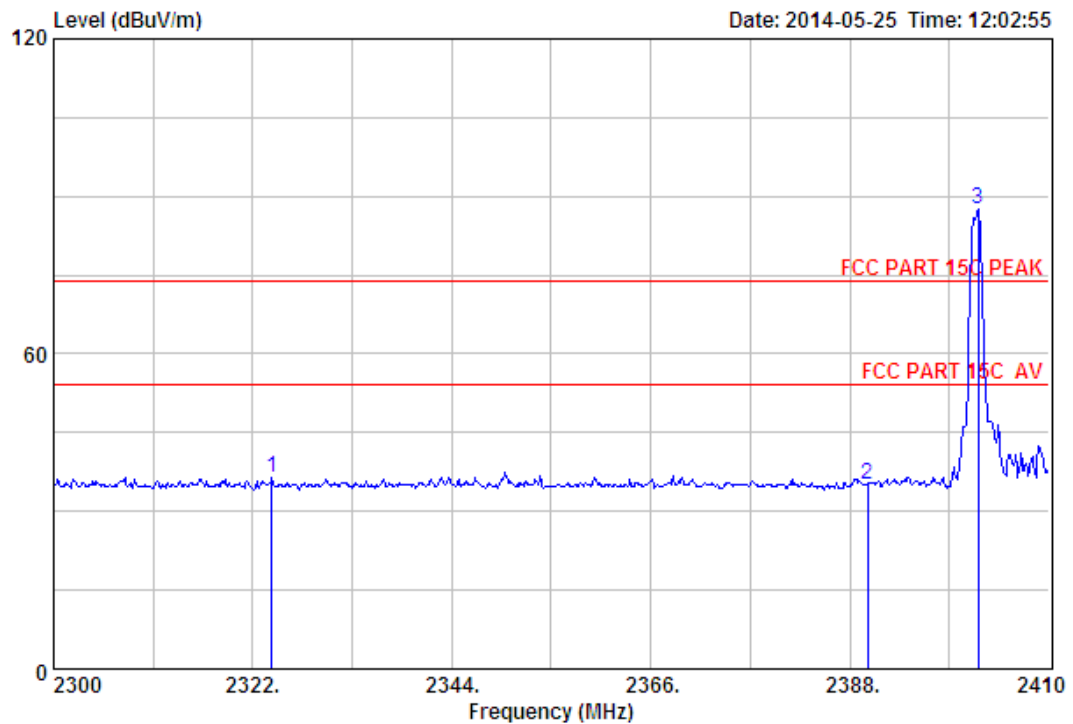

Site no. : 3m Chamber Data no. : 360
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2402MHz(No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)			
1	2324.09	27.73	6.54	34.23	36.50	36.54	74.00	37.46	Peak
2	2390.00	27.64	6.62	34.19	34.87	34.94	74.00	39.06	Peak
3	2402.19	27.61	6.62	34.18	87.37	87.42	74.00	-13.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

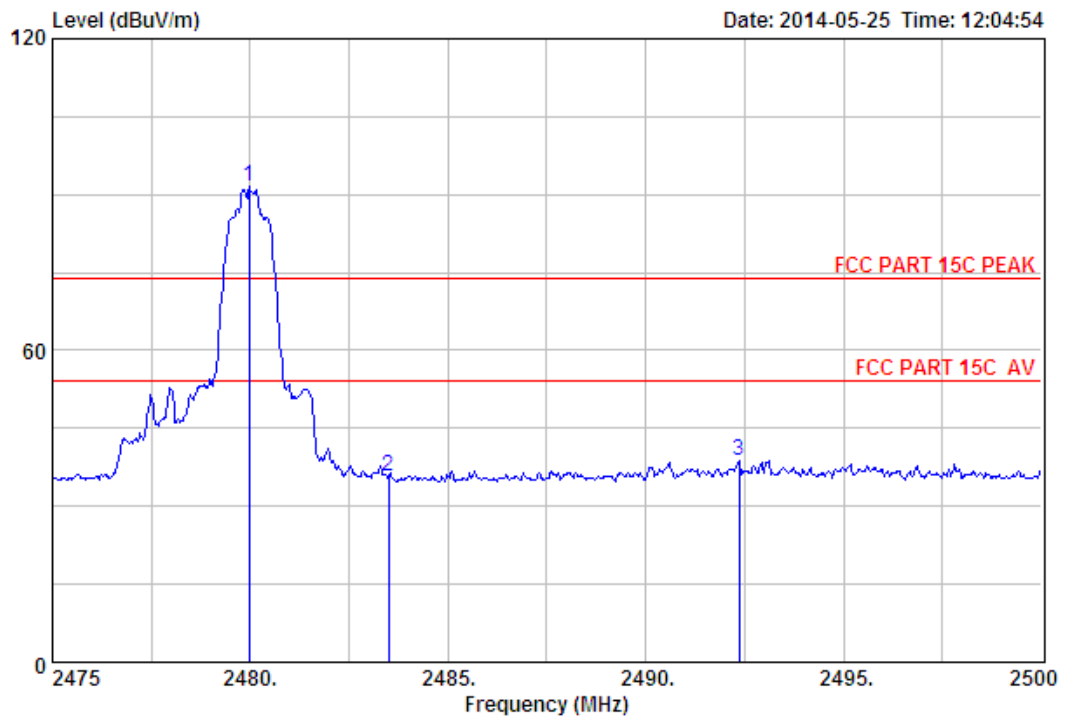

Site no. : 3m Chamber Data no. : 361
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	2479.98	27.58	6.71	34.03	91.24	91.50	74.00	-17.50	Peak
2	2483.50	27.58	6.71	34.03	35.55	35.81	74.00	38.19	Peak
3	2492.35	27.58	6.73	34.03	38.34	38.62	74.00	35.38	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

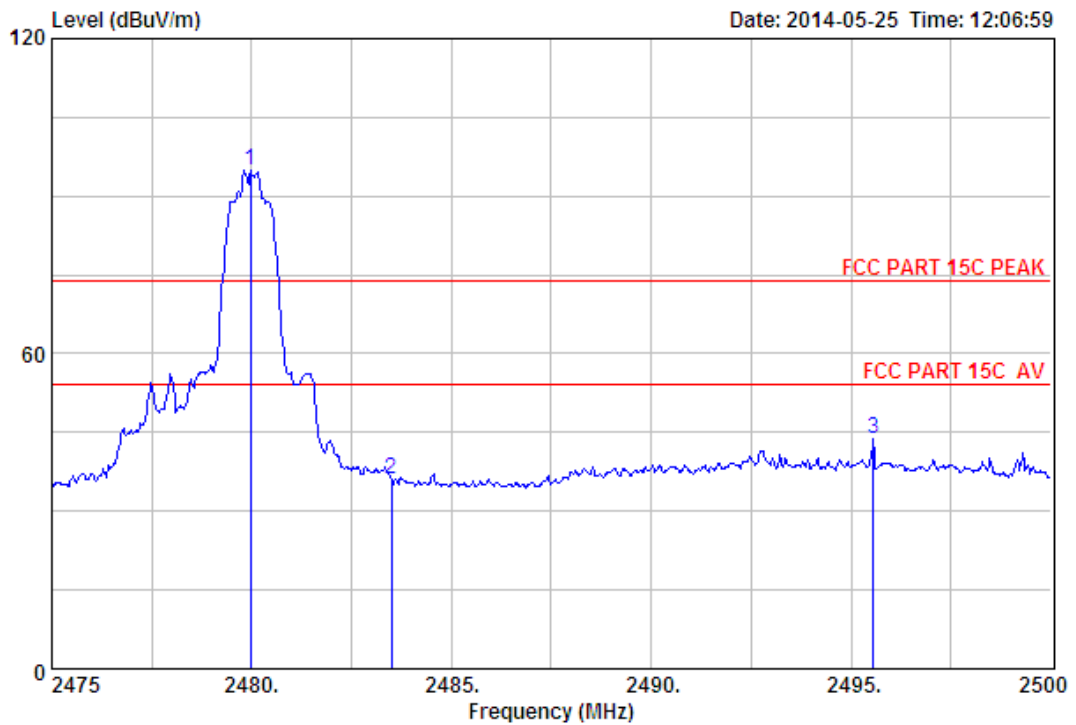

Site no. : 3m Chamber Data no. : 362
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.98	27.58	6.71	34.03	94.63	94.89	74.00	-20.89	Peak
2	2483.50	27.58	6.71	34.03	35.68	35.94	74.00	38.06	Peak
3	2495.55	27.57	6.73	34.00	43.43	43.73	74.00	30.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

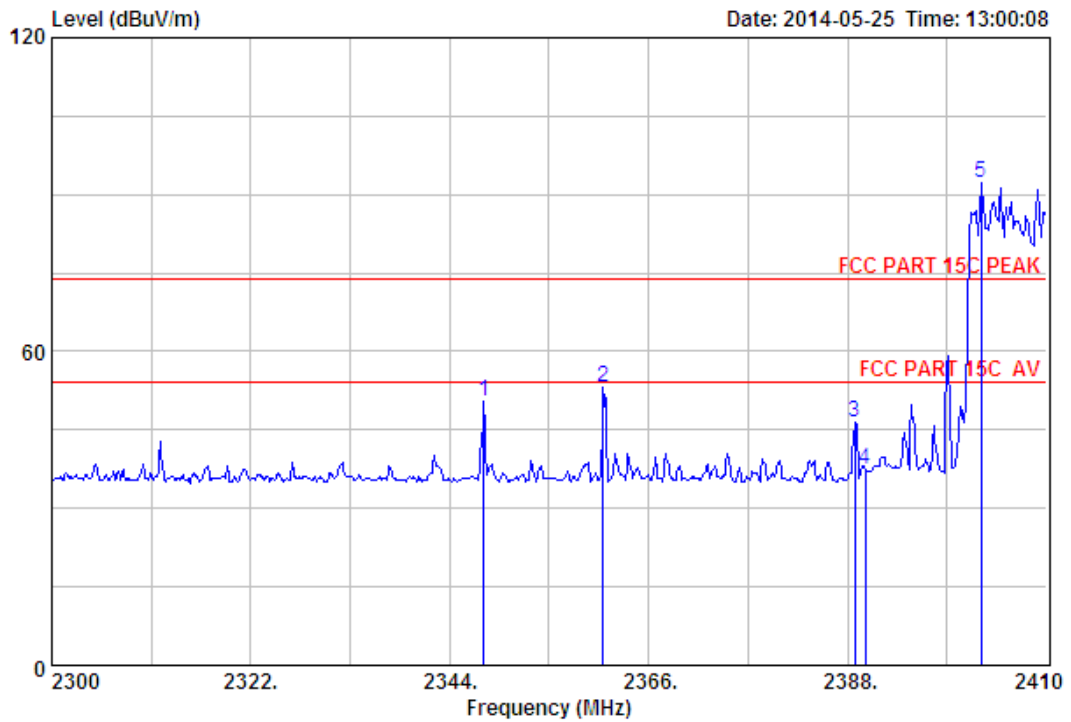

Site no. : 3m Chamber Data no. : 363
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2402MHz (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2347.74	27.70	6.56	34.22	50.36	50.40	74.00	23.60	Peak
2	2360.94	27.67	6.58	34.20	53.05	53.10	74.00	20.90	Peak
3	2388.77	27.64	6.62	34.19	46.49	46.56	74.00	27.44	Peak
4	2390.00	27.64	6.62	34.19	37.39	37.46	74.00	36.54	Peak
5	2402.74	27.61	6.64	34.18	92.33	92.40	74.00	-18.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

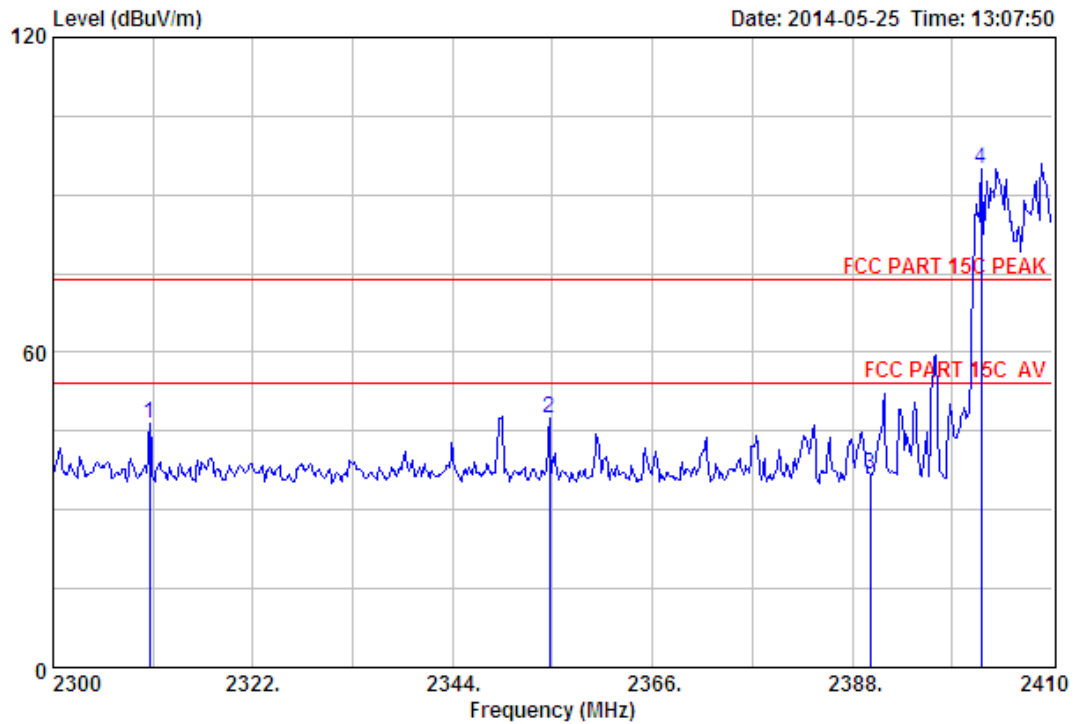

Site no. : 3m Chamber Data no. : 364
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2402MHz (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.67	27.76	6.53	34.24	46.49	46.54	74.00	27.46	Peak
2	2354.67	27.70	6.58	34.22	47.42	47.48	74.00	26.52	Peak
3	2390.00	27.64	6.62	34.19	36.59	36.66	74.00	37.34	Peak
4	2402.19	27.61	6.62	34.18	94.88	94.93	74.00	-20.93	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

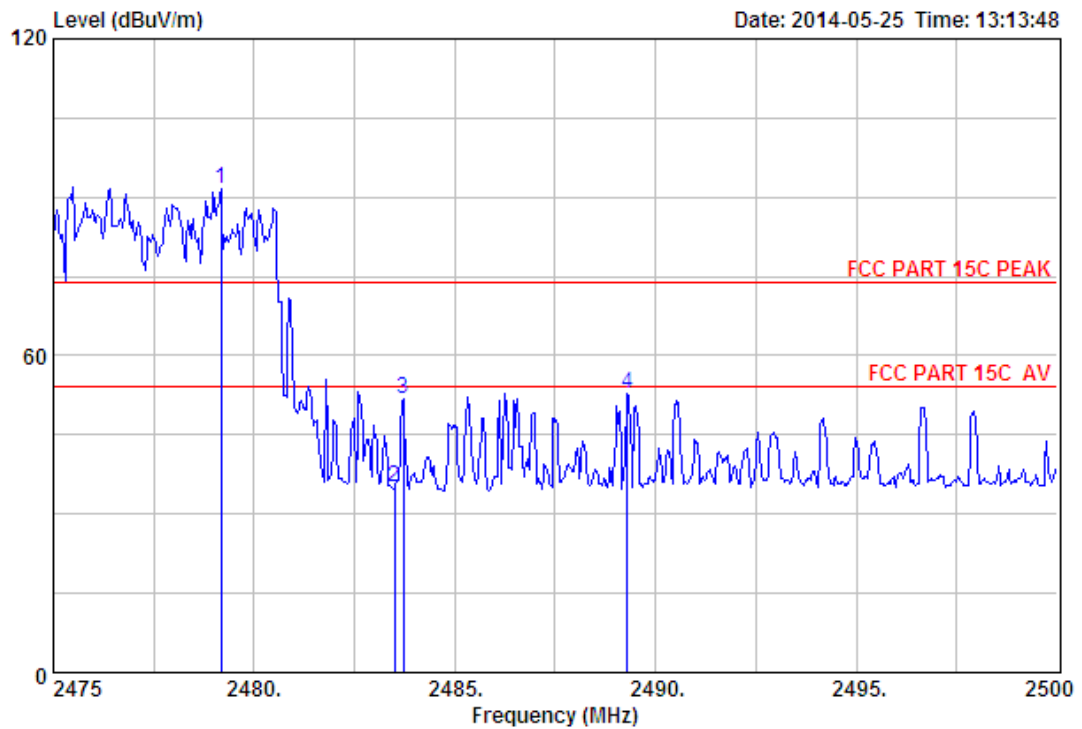

Site no. : 3m Chamber Data no. : 365
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2480MHz (Hopping On)

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.18	27.58	6.71	34.03	91.18	91.44	74.00	-17.44	Peak
2	2483.50	27.58	6.71	34.03	34.83	35.09	74.00	38.91	Peak
3	2483.73	27.58	6.71	34.03	51.68	51.94	74.00	22.06	Peak
4	2489.30	27.58	6.73	34.03	52.66	52.94	74.00	21.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

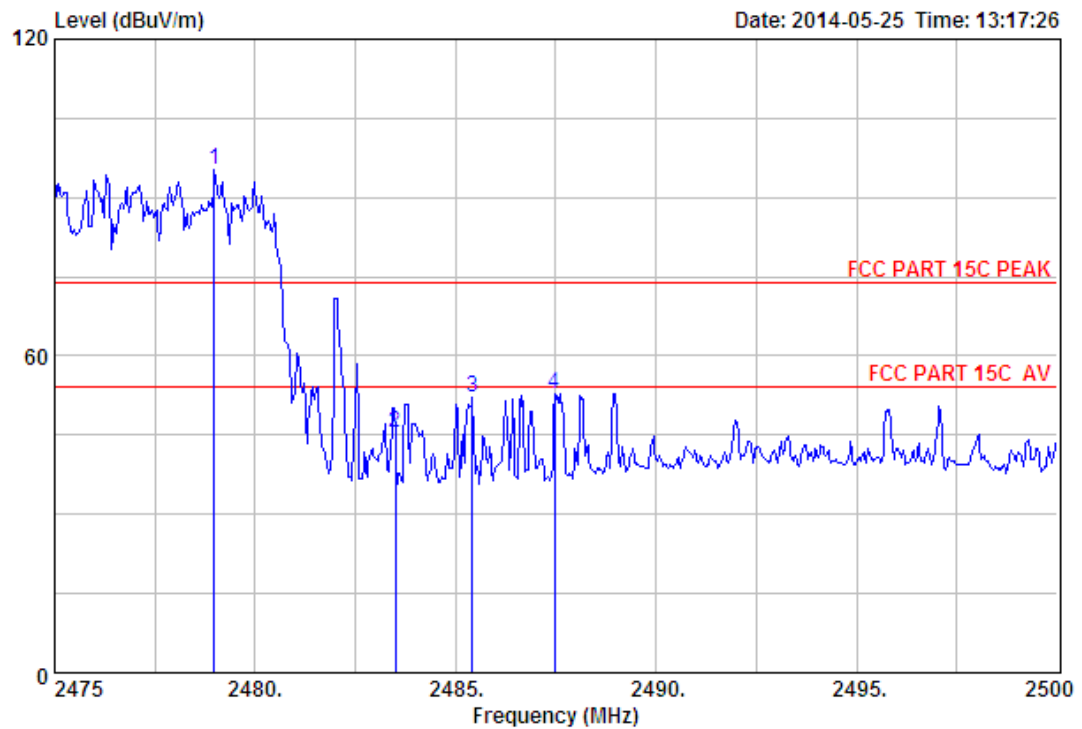

Site no. : 3m Chamber Data no. : 366
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 3.7V
 M/N : HP SR7250
 Test Mode : 8-DPSK TX 2480MHz (Hopping On)

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2478.98	27.58	6.71	34.03	94.88	95.14	74.00	-21.14	Peak
2	2483.50	27.58	6.71	34.03	45.08	45.34	74.00	28.66	Peak
3	2485.43	27.58	6.71	34.03	51.84	52.10	74.00	21.90	Peak
4	2487.48	27.58	6.71	34.03	52.52	52.78	74.00	21.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

10. POWER LINE CONDUCTED EMISSIONS

10.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.2. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT was charged from PC's USB port which connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

10.3. Test Result

0.15MHz—30MHz Conducted emission Test result	
EUT: HP Roar Wireless Speaker	M/N: HP SR7250
Power: DC 5V From PC Input AC 120V/60Hz	
Test date: 2014-05-20 Test site: 3m Chamber Tested by: Tony.Tang	
Test mode: Tx Mode	
Pass	


10.4. Test data

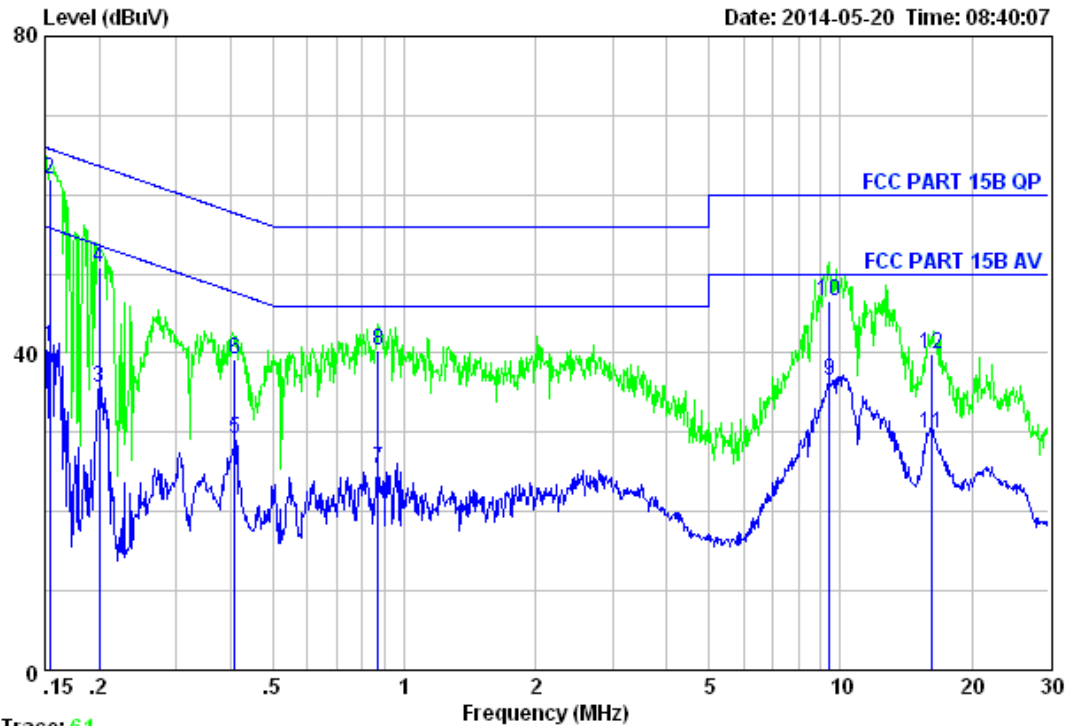

Trace: 61

Site no. : EST Conduction Shielded RoomData no. : 62
 Limit : FCC PART 15B QP LINE Phase : LINE
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 5V From PC Input AC 120V/60Hz
 M/N : HP SR7250
 Test Mode : TX Mode

		LISN	Cable		Emission			
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.15	9.61	9.81	21.47	40.89	55.78	14.89	Average
2	0.15	9.61	9.81	42.47	61.89	65.78	3.89	QP
3	0.20	9.61	9.80	16.29	35.70	53.62	17.92	Average
4	0.20	9.61	9.80	31.29	50.70	63.62	12.92	QP
5	0.41	9.61	9.82	9.69	29.12	47.68	18.56	Average
6	0.41	9.61	9.82	19.69	39.12	57.68	18.56	QP
7	0.87	9.62	9.82	5.97	25.41	46.00	20.59	Average
8	0.87	9.62	9.82	20.97	40.41	56.00	15.59	QP
9	9.45	9.66	9.88	17.00	36.54	50.00	13.46	Average
10	9.45	9.66	9.88	27.00	46.54	60.00	13.46	QP
11	16.14	9.69	9.92	10.24	29.85	50.00	20.15	Average
12	16.14	9.69	9.92	20.24	39.85	60.00	20.15	QP

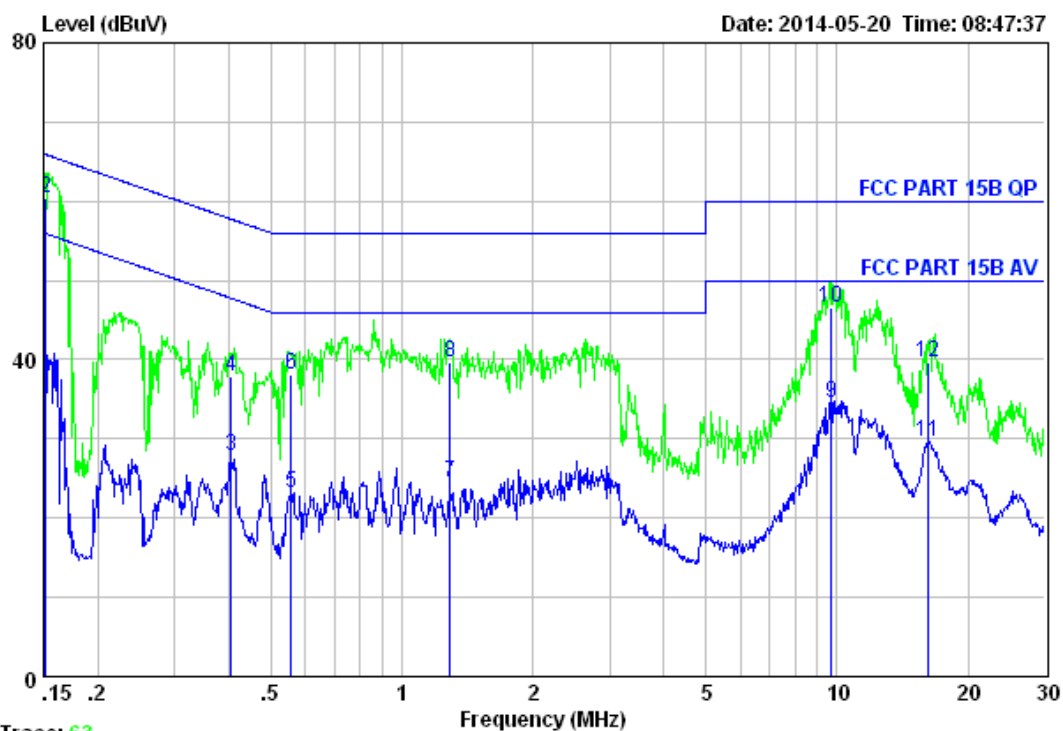

Trace: 63

Site no. : EST Conduction Shielded Room Data no. : 64
 Limit : FCC PART 15B QP LINE Phase : NEUTRAL
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa
 Engineer : Tony
 EUT : HP Roar Wireless Speaker
 Power : DC 5V From PC Input AC 120V/60Hz
 M/N : HP SR7250
 Test Mode : TX Mode

		LISN	Cable		Emission			
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.15	9.46	9.81	21.09	40.36	55.91	15.55	Average
2	0.15	9.46	9.81	41.09	60.36	65.91	5.55	QP
3	0.40	9.59	9.82	8.39	27.80	47.77	19.97	Average
4	0.40	9.59	9.82	18.39	37.80	57.77	19.97	QP
5	0.56	9.60	9.82	3.79	23.21	46.00	22.79	Average
6	0.56	9.60	9.82	18.79	38.21	56.00	17.79	QP
7	1.29	9.61	9.82	5.14	24.57	46.00	21.43	Average
8	1.29	9.61	9.82	20.14	39.57	56.00	16.43	QP
9	9.71	9.70	9.88	15.05	34.63	50.00	15.37	Average
10	9.71	9.70	9.88	27.05	46.63	60.00	13.37	QP
11	16.14	9.75	9.92	9.98	29.65	50.00	20.35	Average
12	16.14	9.75	9.92	19.98	39.65	60.00	20.35	QP

11.ANTENNA REQUIREMENTS

11.1.Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2.Result


The antennas used for this product are integral Patch Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0dBi.

12. TEST SETUP PHOTO

Conducted Test

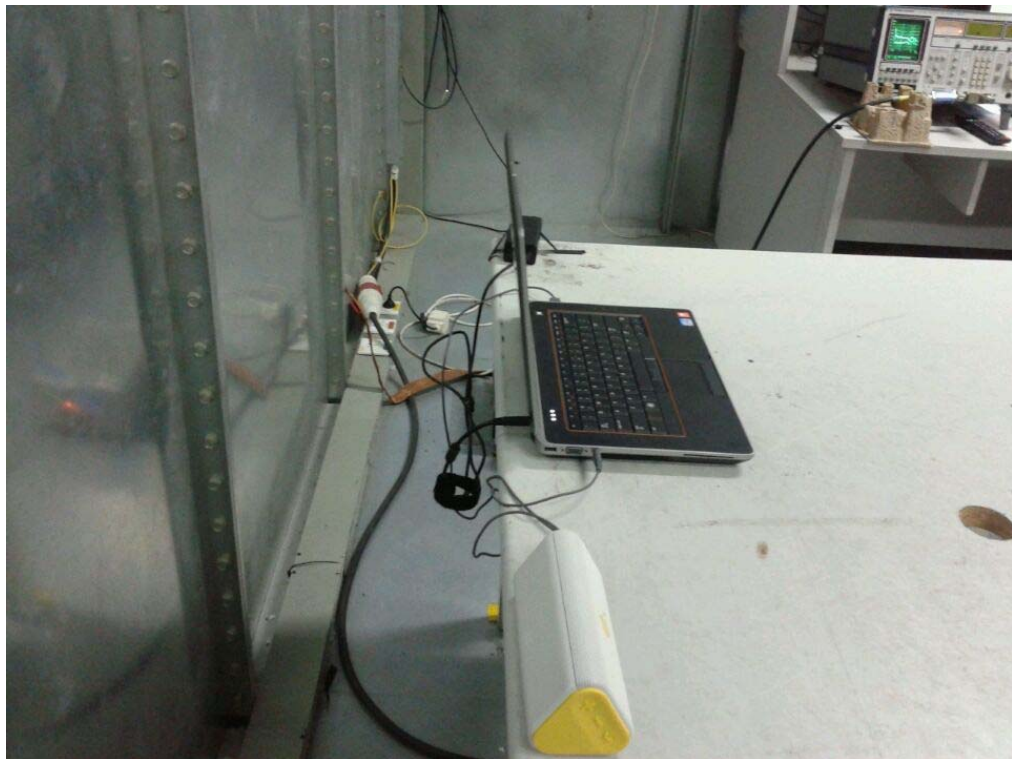

Radiated Test (30-1000 MHz)

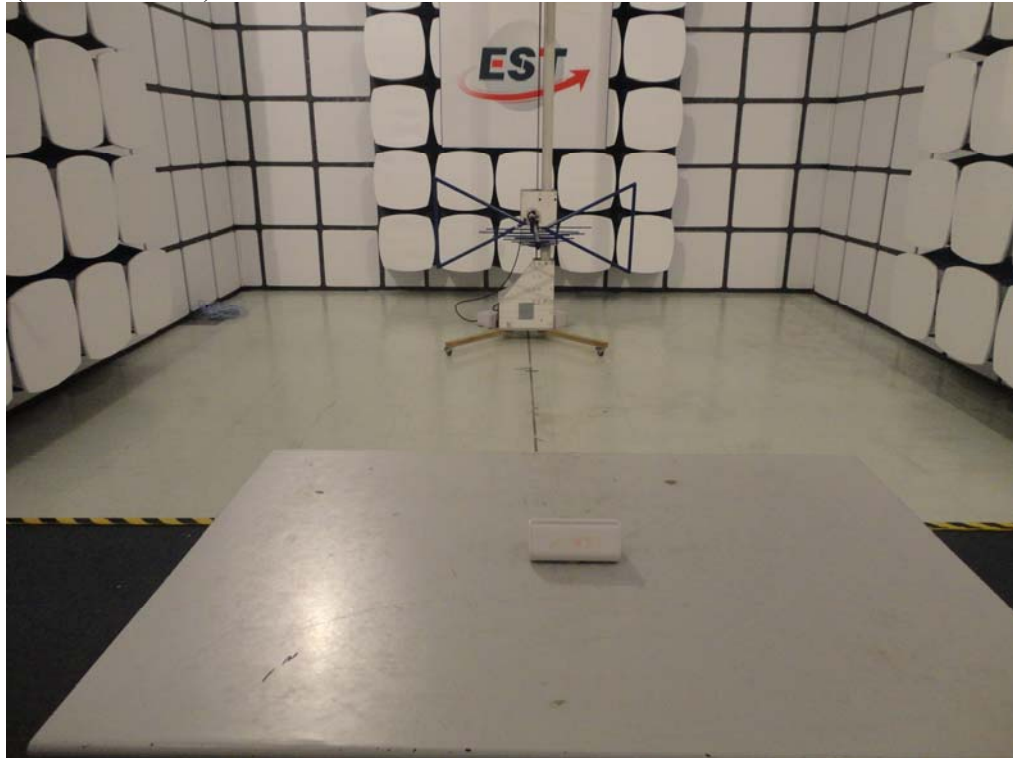

Radiated Test (1000-25000 MHz)



13. PHOTOS OF EUT

External Photos

M/N: HP SR7250




External Photos
M/N: HP SR7250





External Photos



M/N: HP SR7250

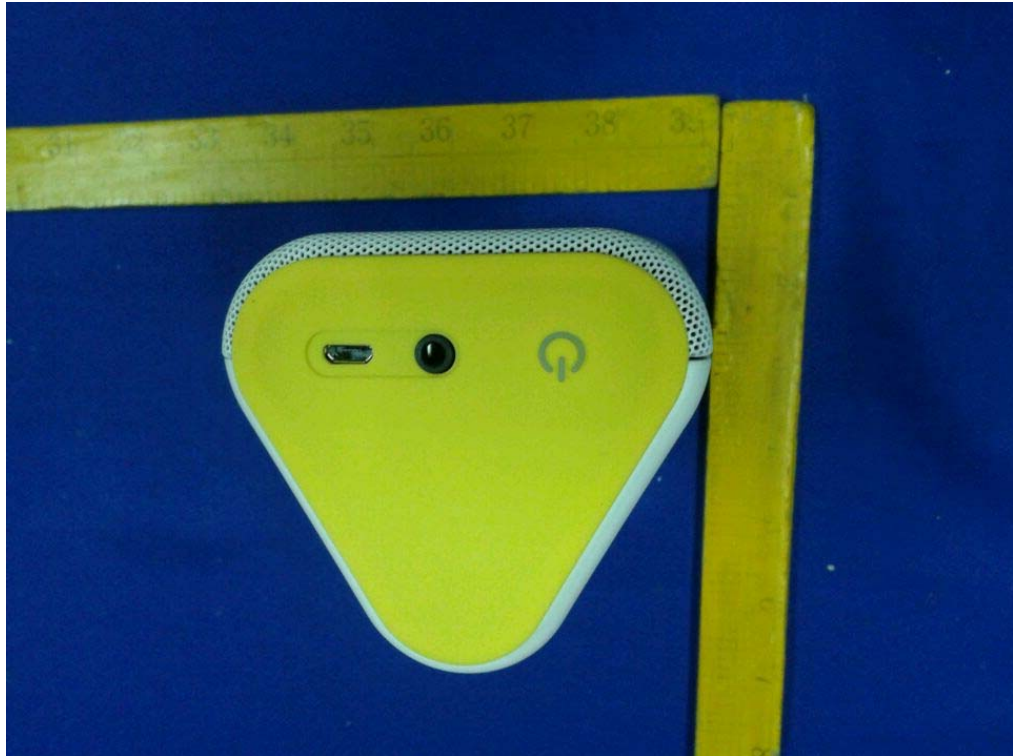

Internal Photos
M/N: HP SR7250

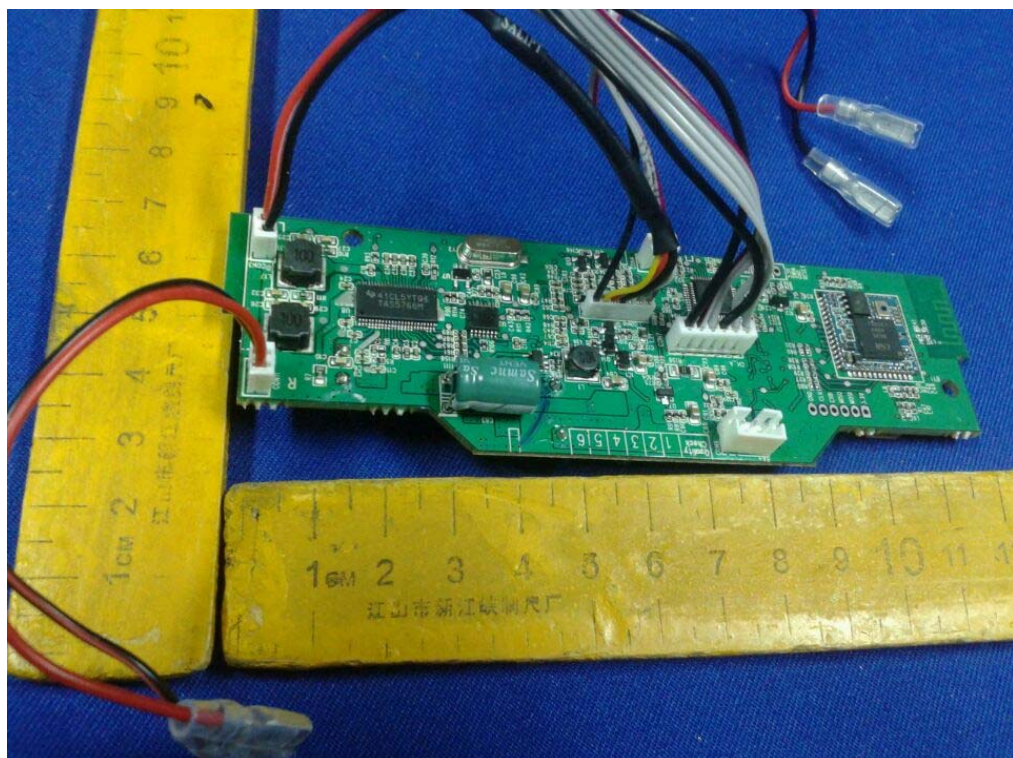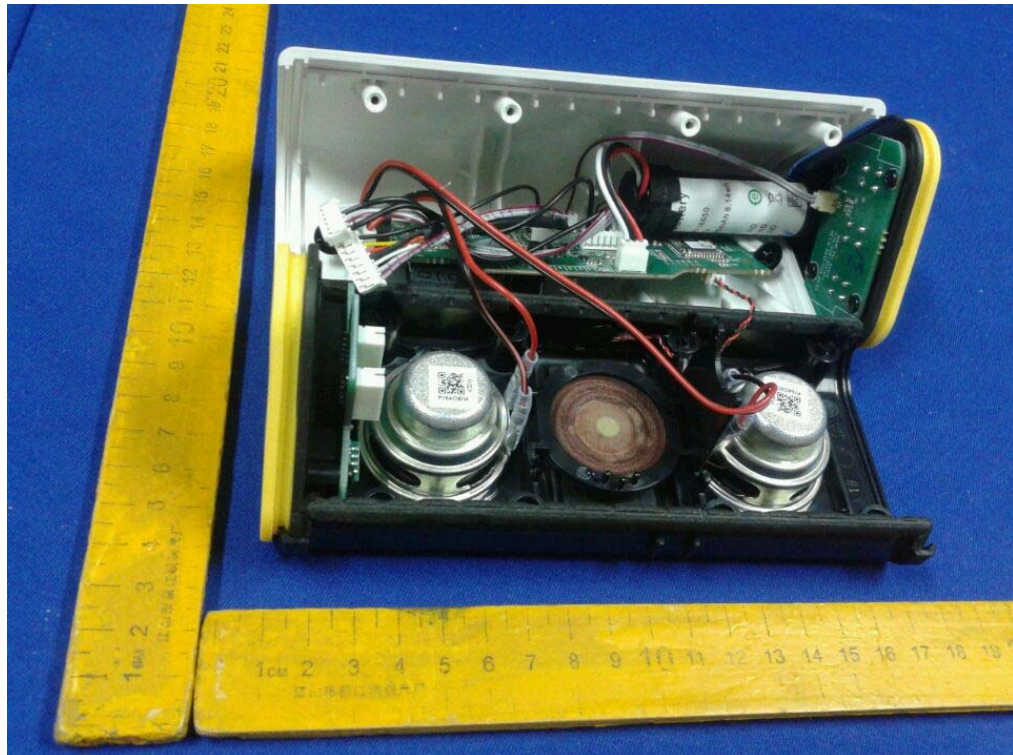


Internal Photos
M/N: HP SR7250

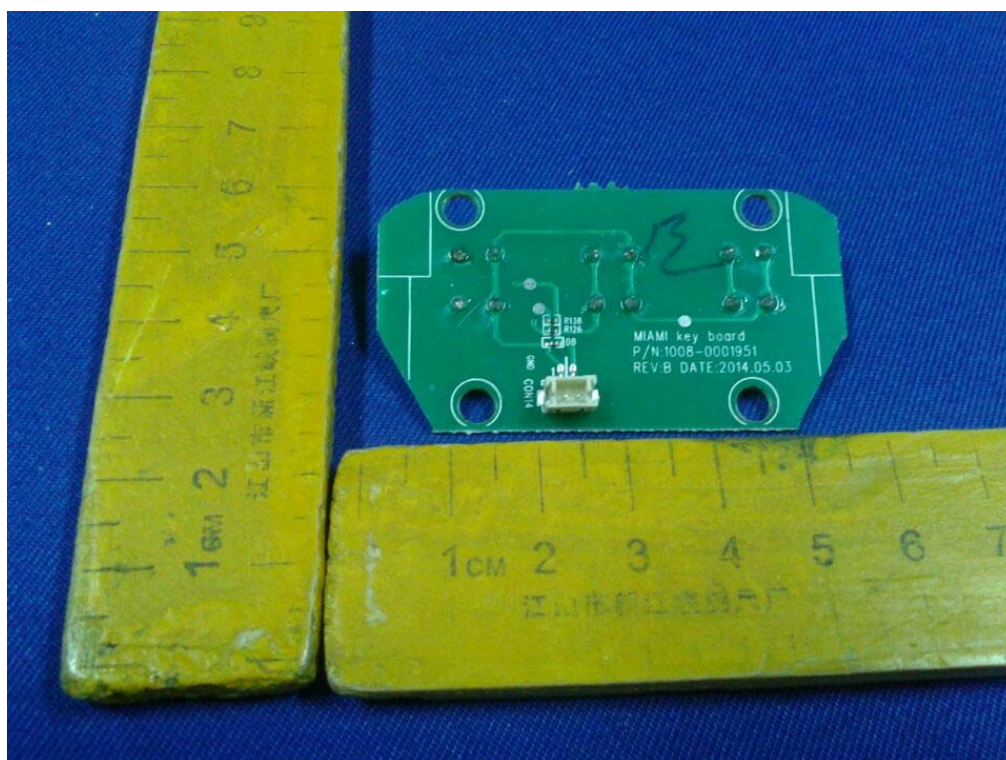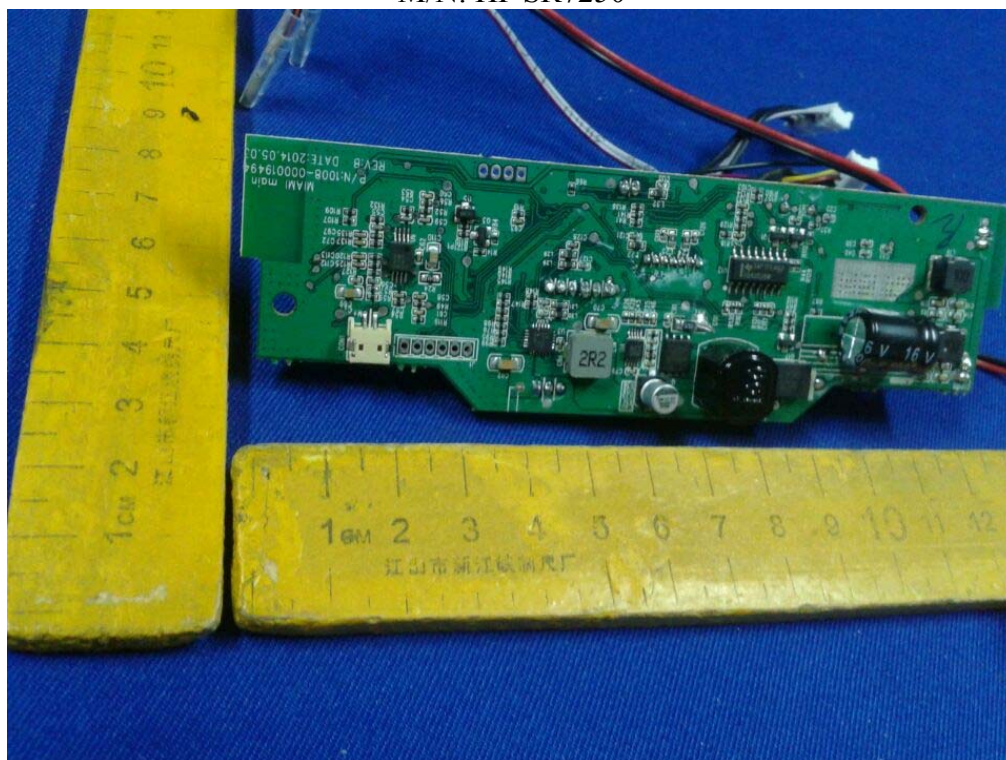

Internal Photos
M/N: HP SR7250



Internal Photos
M/N: HP SR7250

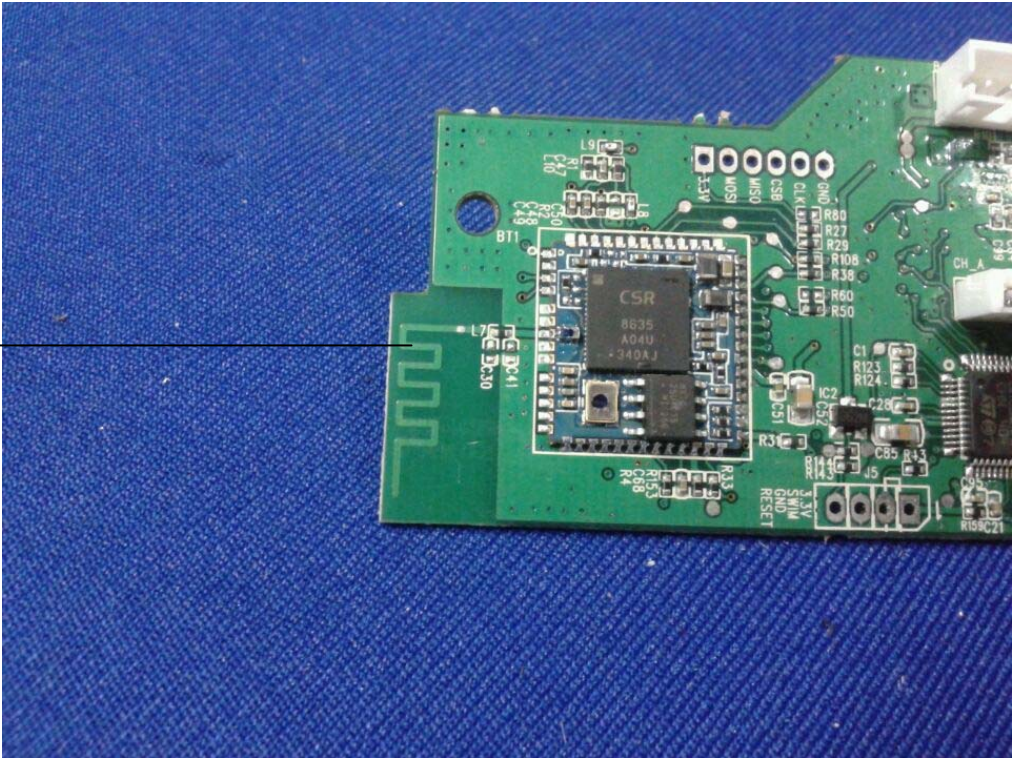

Bluetooth
Antenna

Internal Photos
M/N: HP SR7250

