

FCC RF Test Report

APPLICANT : Delphian Systems LLC
EQUIPMENT : BLE/ANT MODULE
BRAND NAME : Delphian
MODEL NAME : SRU532
MARKETING NAME : SRU532
FCC ID : 2AEHJSRU532
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jan. 05, 2016 and testing was completed on Mar. 19, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Descriptions of Test Mode	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Peak Output Power Measurement	17
3.3 Power Spectral Density Measurement	18
3.4 Conducted Band Edges and Spurious Emission Measurement	23
3.5 Radiated Band Edges and Spurious Emission Measurement	32
3.6 AC Conducted Emission Measurement.....	37
3.7 Antenna Requirements.....	41
4 LIST OF MEASURING EQUIPMENT.....	42
5 UNCERTAINTY OF EVALUATION.....	44
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B RADIATED TEST RESULTS	
APPENDIX C RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX D SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR610515	Rev. 01	Initial issue of report	May 11, 2016
FR610515	Rev. 02	Adding the description in section 2.1	May 12, 2016

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(1)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.10 dB at 2386.050 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 23.50 dB at 2.566 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Delphian Systems LLC

975, Weiland Rd #150, Buffalo Grove, IL 60089, United States

1.2 Manufacturer

Delphian Systems LLC

975, Weiland Rd #150, Buffalo Grove, IL 60089, United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	BLE/ANT MODULE
Brand Name	Delphian
Model Name	SRU532
Marketing Name	SRU532
FCC ID	2AEHJSRU532
EUT supports Radios application	Bluetooth v4.1 LE
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Ant. 1: 12.66 dBm (0.0185 W) Ant. 2: 17.06 dBm (0.0508 W)
99% Occupied Bandwidth	1.572MHz
Antenna Type	Ant. 1: Chip Antenna type with gain -0.71 dBi Ant. 2: SMA Antenna type with gain 0.00 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH05-HY	CO05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855		
Test Site No.	Sporton Site No.		
	03CH12-HY		

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

<Ant. 1>

Channel	Frequency	Bluetooth 4.10 – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	12.61 dBm
Ch19	2440MHz	12.66 dBm
Ch39	2480MHz	11.55 dBm

<Ant. 2>

Channel	Frequency	Bluetooth 4.1 – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	17.06 dBm
Ch19	2440MHz	16.85 dBm
Ch39	2480MHz	15.66 dBm

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report. X plane as worst plane for Ant. 1 and Y plane as worst plane for Ant. 2
- b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.1 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps for Ant. 1 Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps for Ant. 1 Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps for Ant. 1 Mode 4: Bluetooth Tx CH00_2402 MHz_1Mbps for Ant. 2 Mode 5: Bluetooth Tx CH19_2440 MHz_1Mbps for Ant. 2 Mode 5: Bluetooth Tx CH39_2480 MHz_1Mbps for Ant. 2
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps for Ant. 1 Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps for Ant. 1 Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps for Ant. 1 Mode 4: Bluetooth Tx CH00_2402 MHz_1Mbps for Ant. 2 Mode 5: Bluetooth Tx CH19_2440 MHz_1Mbps for Ant. 2 Mode 6: Bluetooth Tx CH39_2480 MHz_1Mbps for Ant. 2
AC Conducted Emission	Mode 1: BLE Tx + Adapter for Ant. 1 Mode 2: BLE Tx + Adapter for Ant. 2
Remark: 1. The worst case of conducted emission is mode 2; only the test data of it was reported. 2. For Conducted TCs, the conducted power of Ant. 2 was worse than Ant. 1. So all the tests were performance with Ant. 2.	

2.3 Connection Diagram of Test System


<Bluetooth 4.1 – LE Tx Mode for Ant. 1>

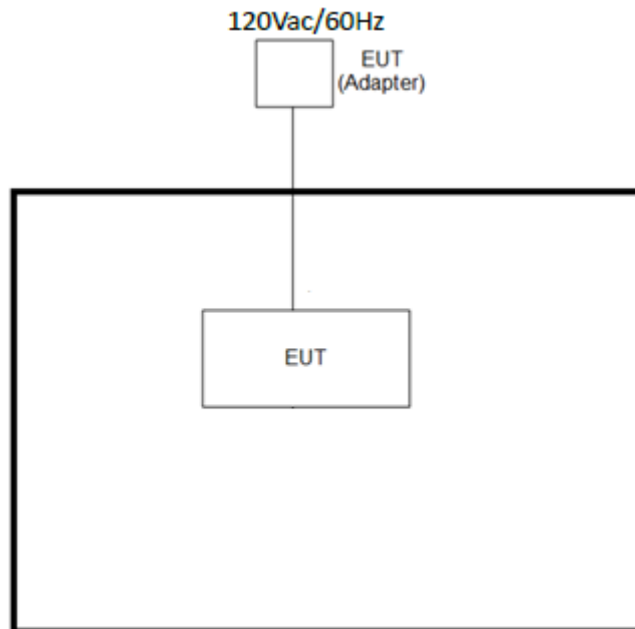


<Bluetooth 4.1 – LE Tx Mode for Ant. 2>

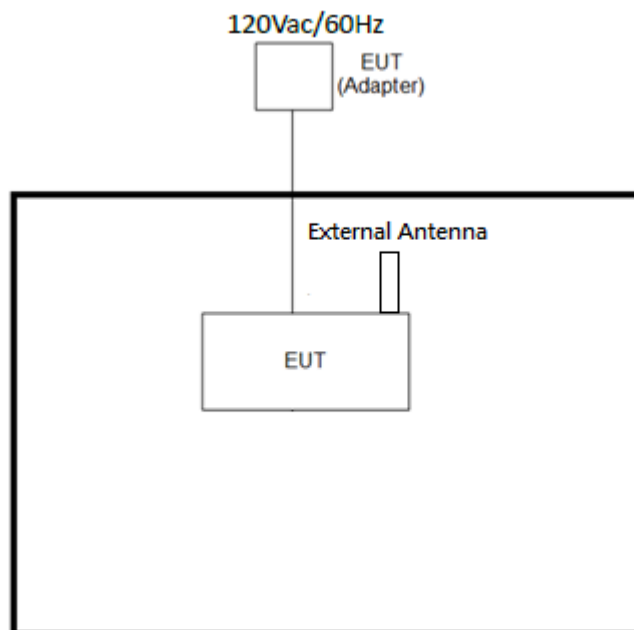

<AC Conducted Emission Mode for Ant. 1>

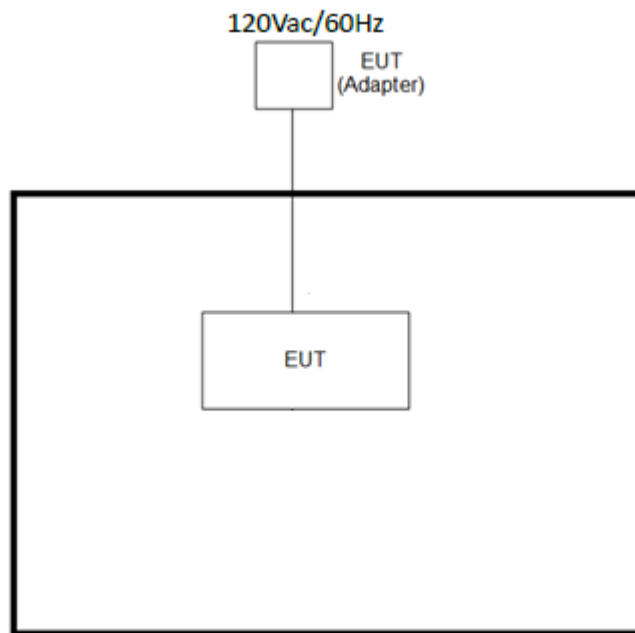

<AC Conducted Emission Mode for Ant. 2>

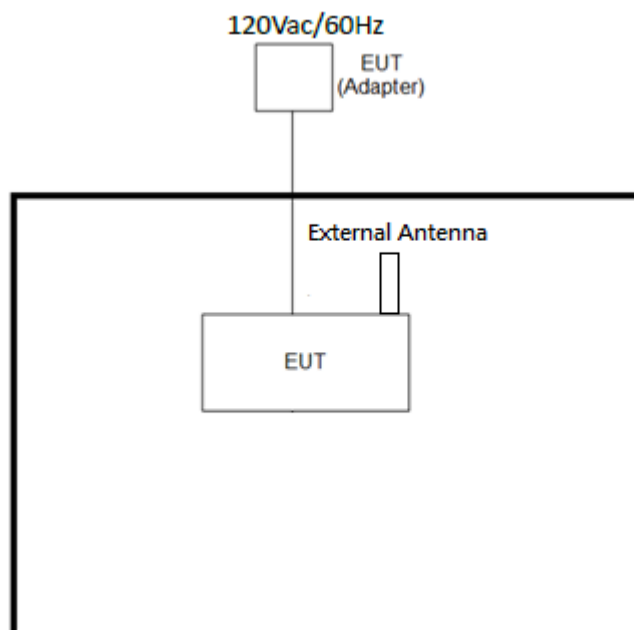

2.4 Support Unit used in test configuration and system

None.

2.5 EUT Operation Test Setup

For Bluetooth function, programmed RF utility, "PUTTY" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Test data refer to Appendix A.


6 dB Bandwidth Plot on Channel 00

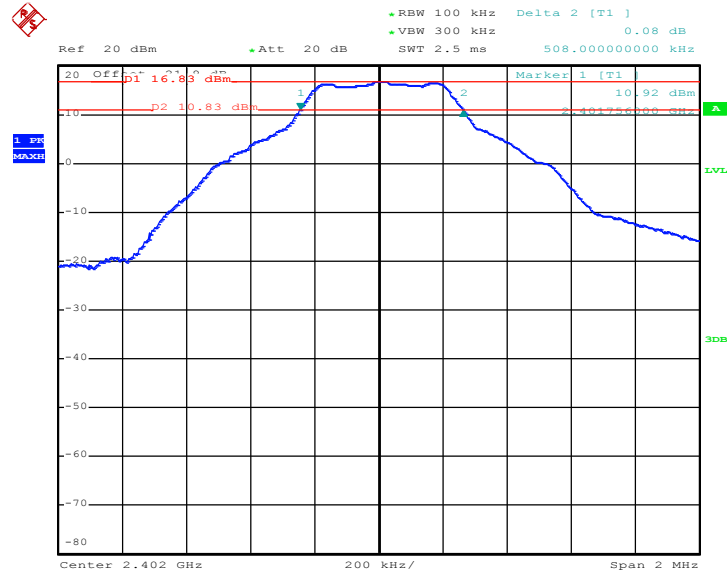

Date: 9.MAR.2016 10:30:06




6 dB Bandwidth Plot on Channel 19

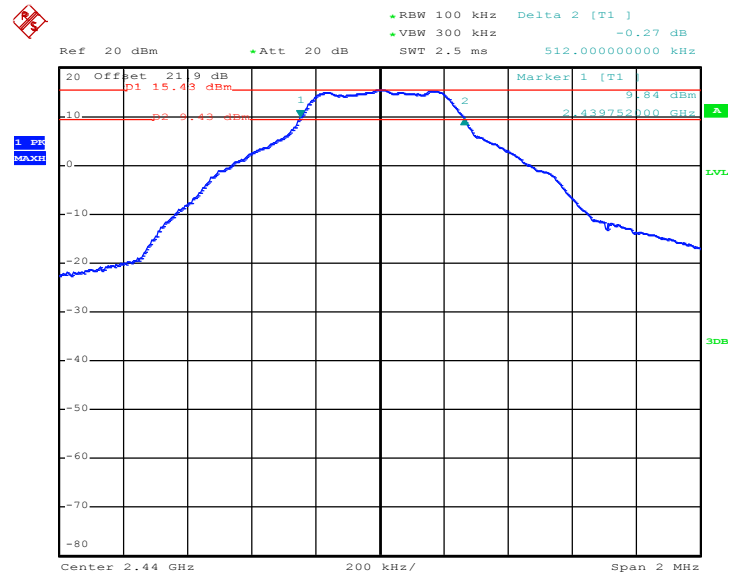

Date: 9.MAR.2016 10:36:45

6 dB Bandwidth Plot on Channel 39

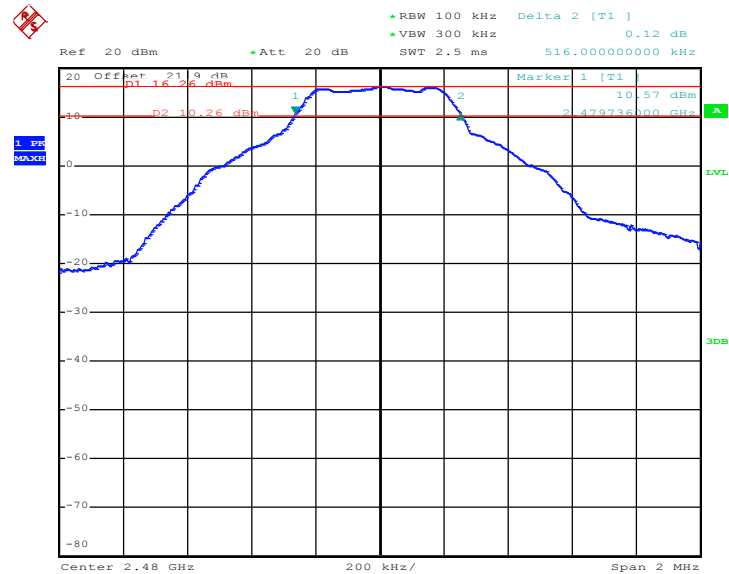


Date: 9.MAR.2016 10:42:31




3.1.6 Test Result of 99% Occupied Bandwidth

Test data refer to Appendix A.


99% Bandwidth Plot on Channel 00

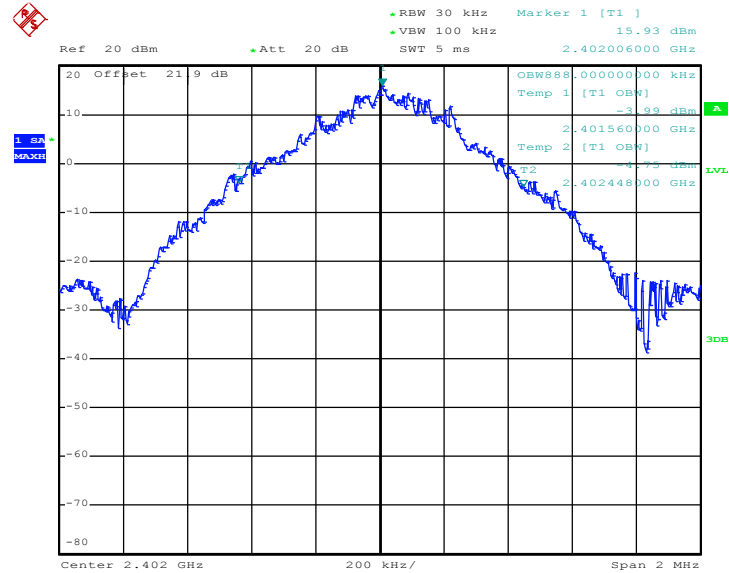

Date: 9.MAR.2016 10:31:45

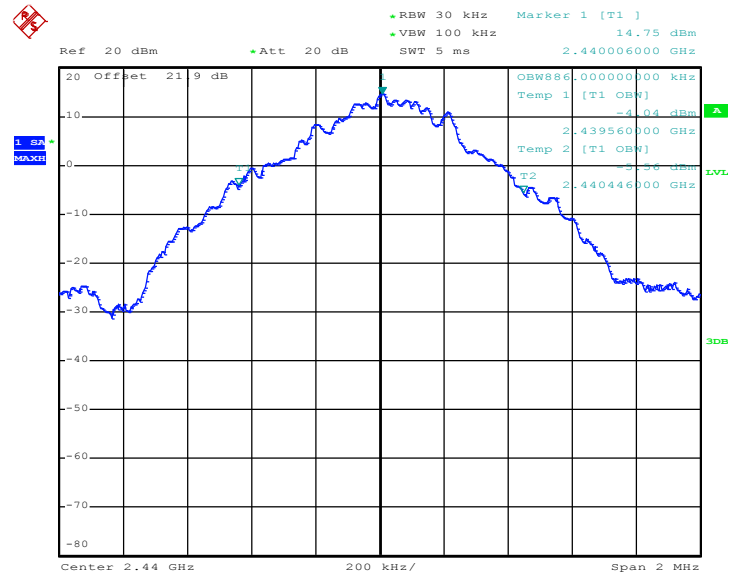99% Occupied Bandwidth Plot on Channel 19


Date: 9.MAR.2016 10:40:25

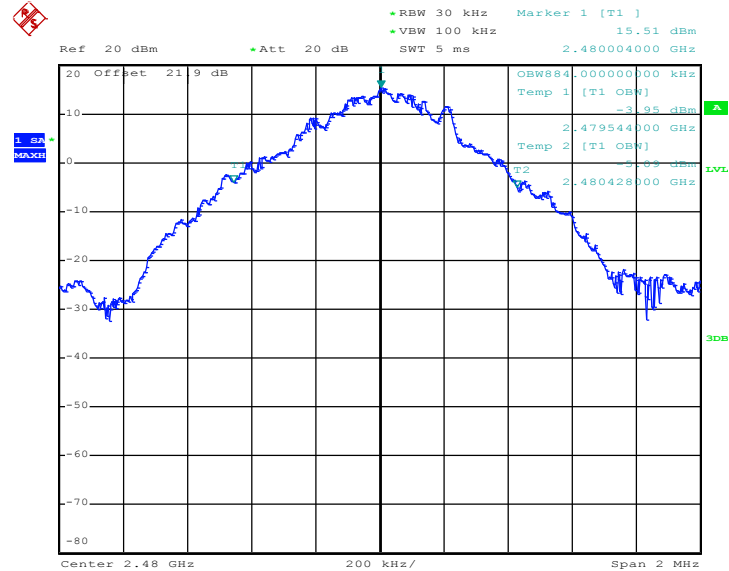99% Occupied Bandwidth Plot on Channel 39


Date: 9.MAR.2016 10:45:12

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

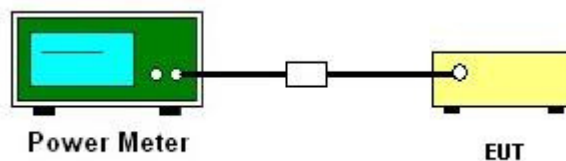

3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

3.2.6 Test Result of Peak Output Power Plots

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

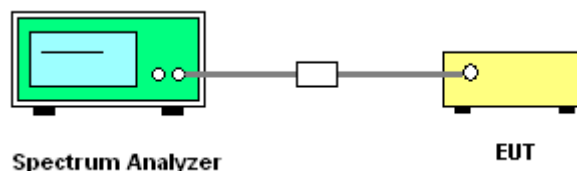




3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.

3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

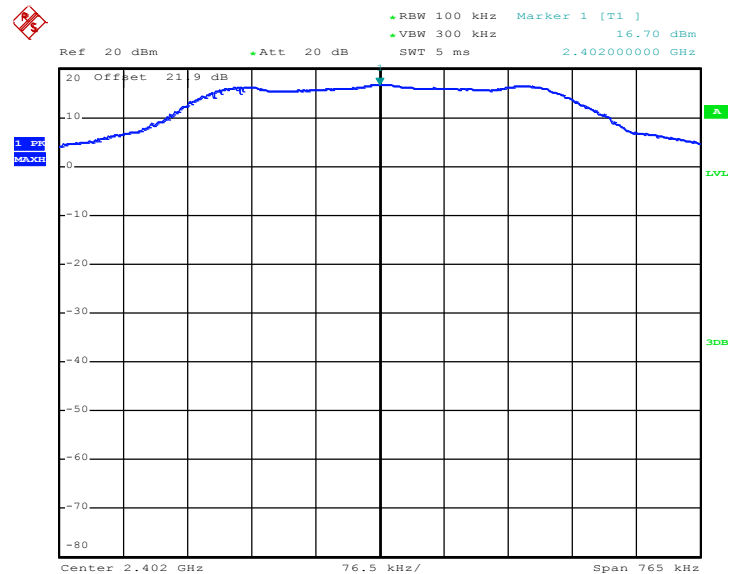

Date: 9.MAR.2016 10:30:55




PSD 100kHz Plot on Channel 19

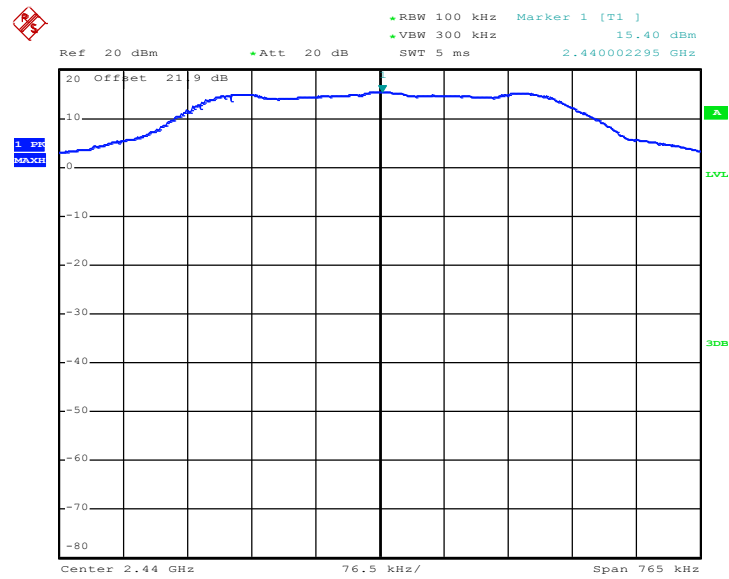

Date: 9.MAR.2016 10:38:27

PSD 100kHz Plot on Channel 39

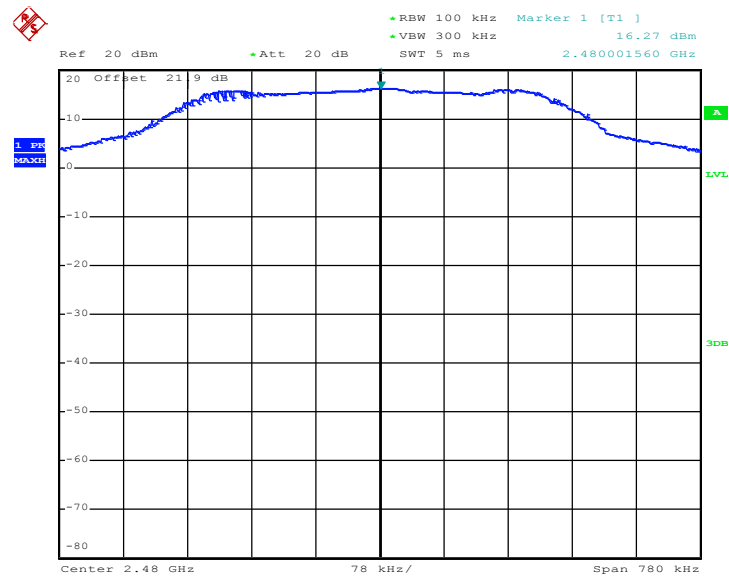


Date: 9.MAR.2016 10:43:05



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

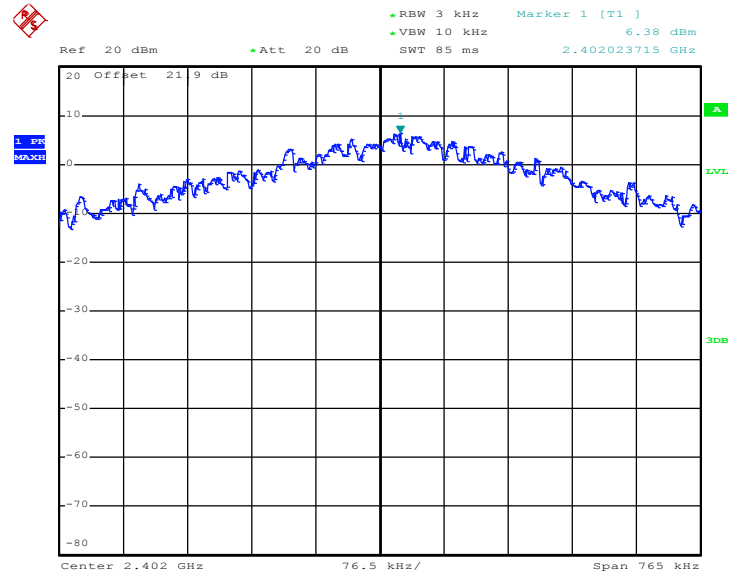

Date: 9.MAR.2016 10:30:25




PSD 3kHz Plot on Channel 19

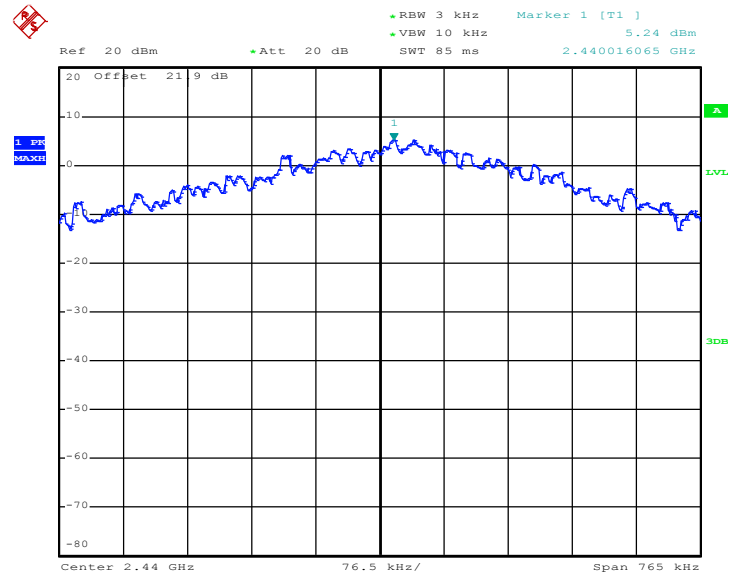

Date: 9.MAR.2016 10:37:35

PSD 3kHz Plot on Channel 39

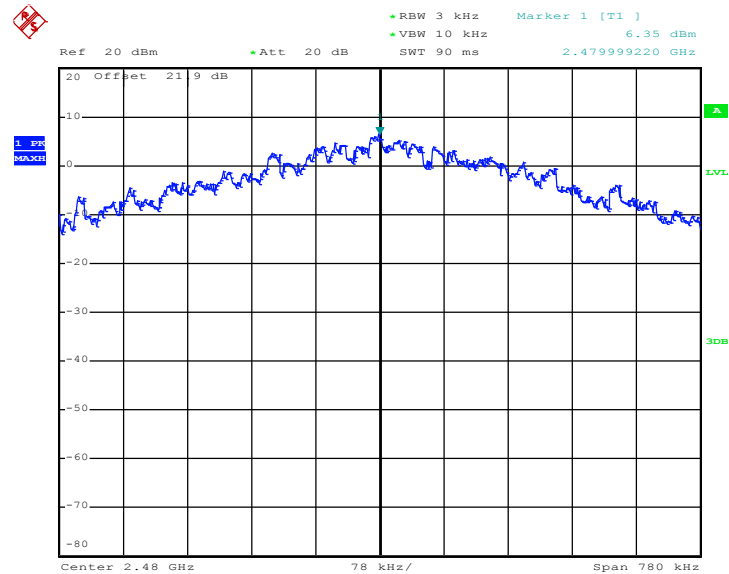

Date: 9.MAR.2016 10:42:48

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

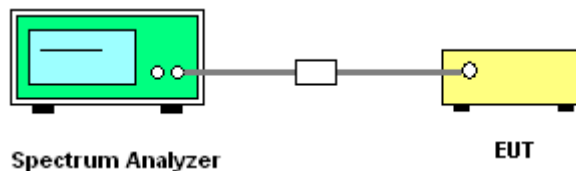

3.4.5 Test Result of Conducted Band Edges Plots


Low Band Edge Plot on Channel 00

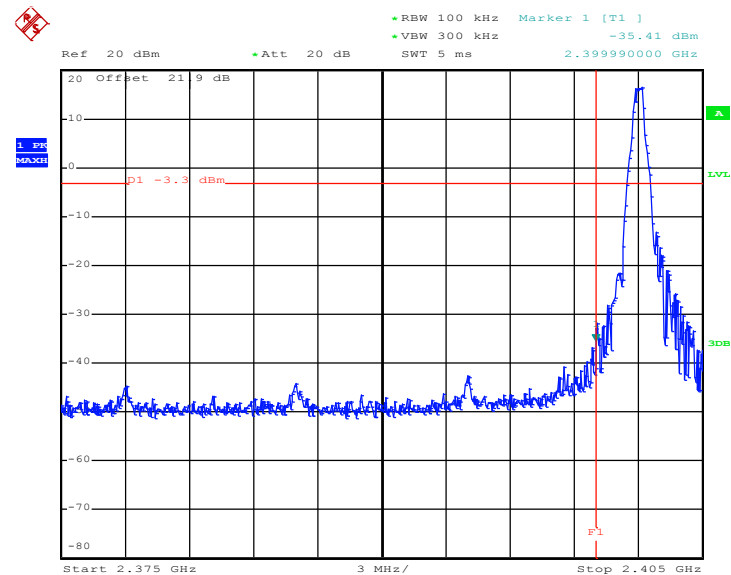

Date: 9.MAR.2016 10:31:10



High Band Edge Plot on Channel 39

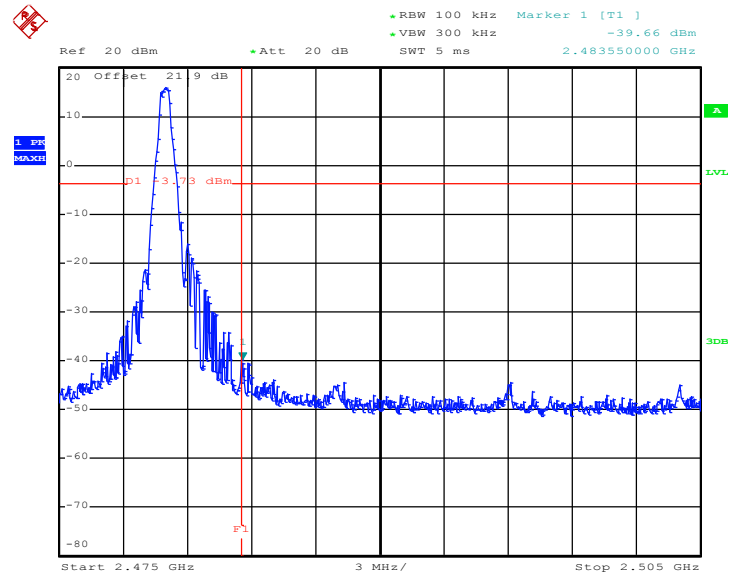


Date: 9.MAR.2016 10:43:28



3.4.6 Test Result of Conducted Spurious Emission Plots


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

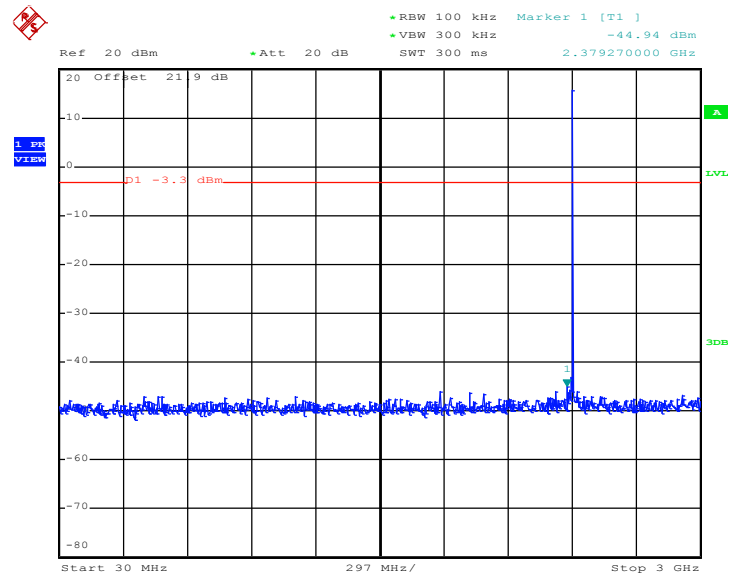

Date: 9.MAR.2016 10:32:19




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

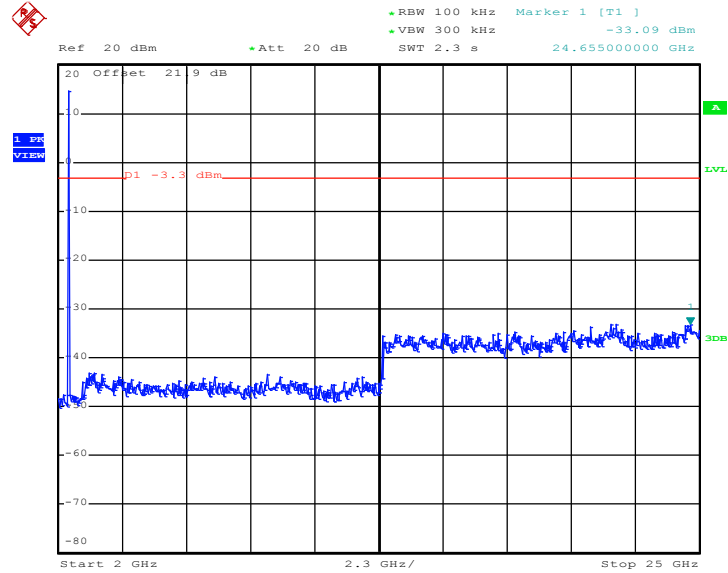

Date: 9.MAR.2016 10:32:27




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

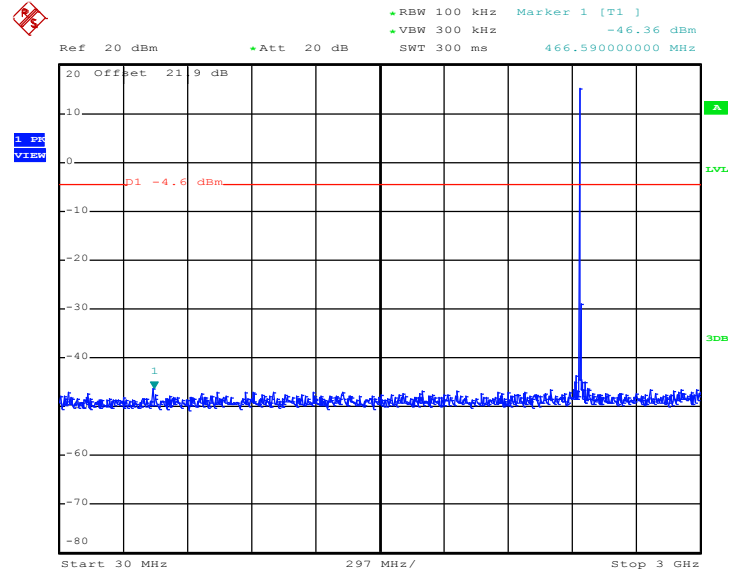

Date: 9.MAR.2016 10:39:35




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

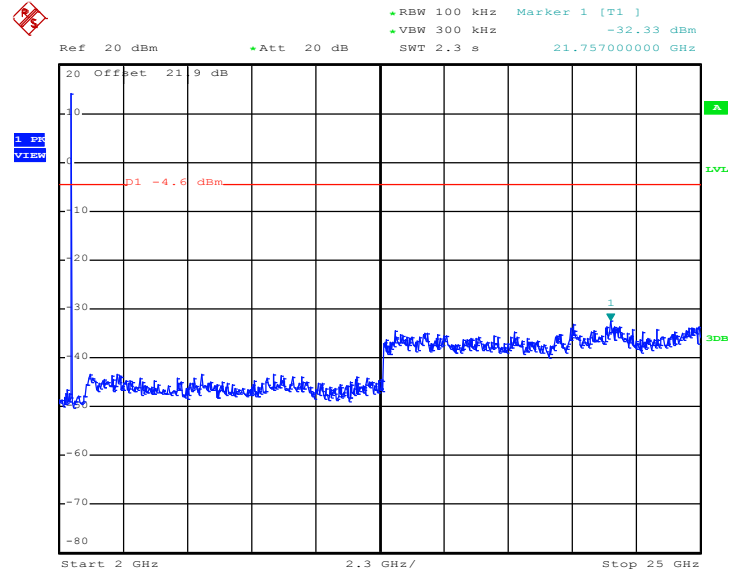

Date: 9.MAR.2016 10:38:56




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

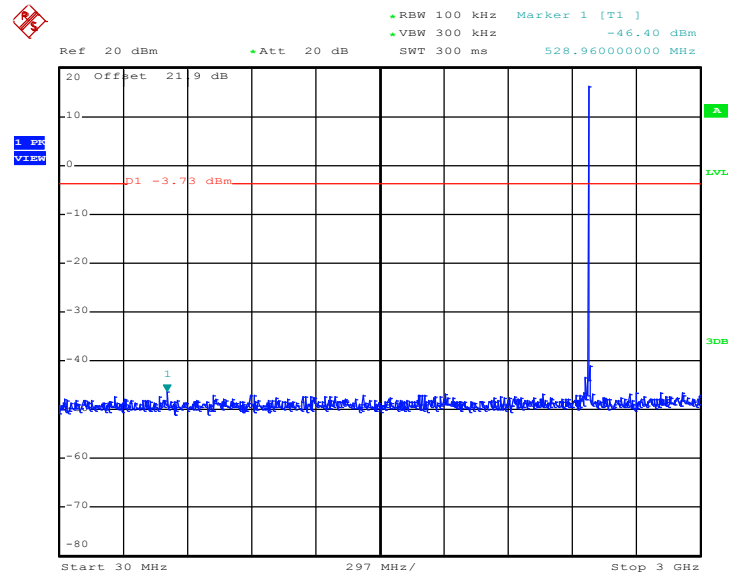

Date: 9.MAR.2016 10:44:22



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

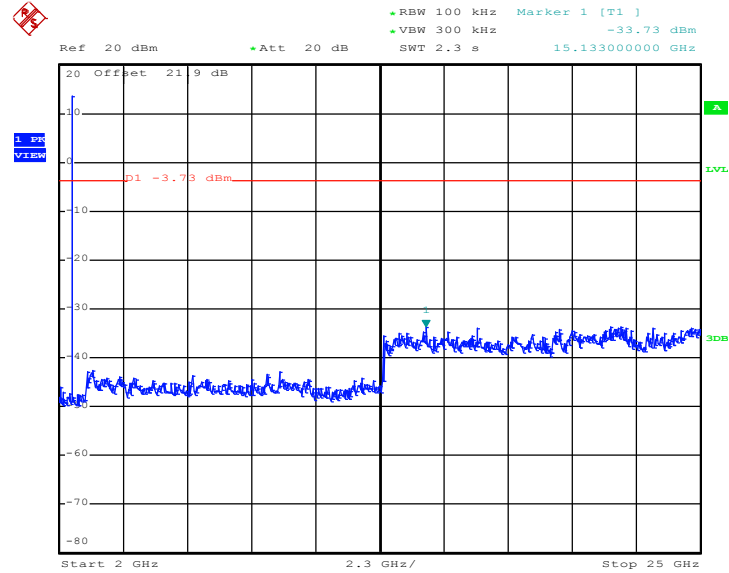

Date: 9.MAR.2016 10:43:50

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μ s)	1/T(kHz)	VBW Setting
Bluetooth 4.1 - LE	91.53	1080	0.93	1kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

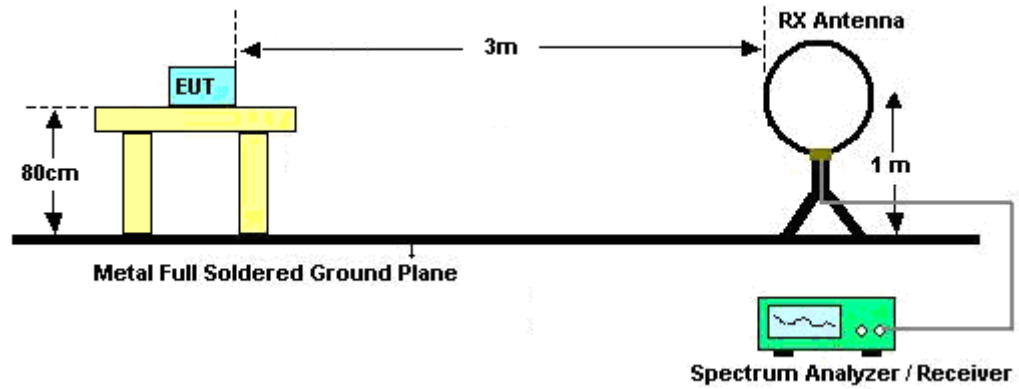

For radiated emissions from 30MHz to 1GHz

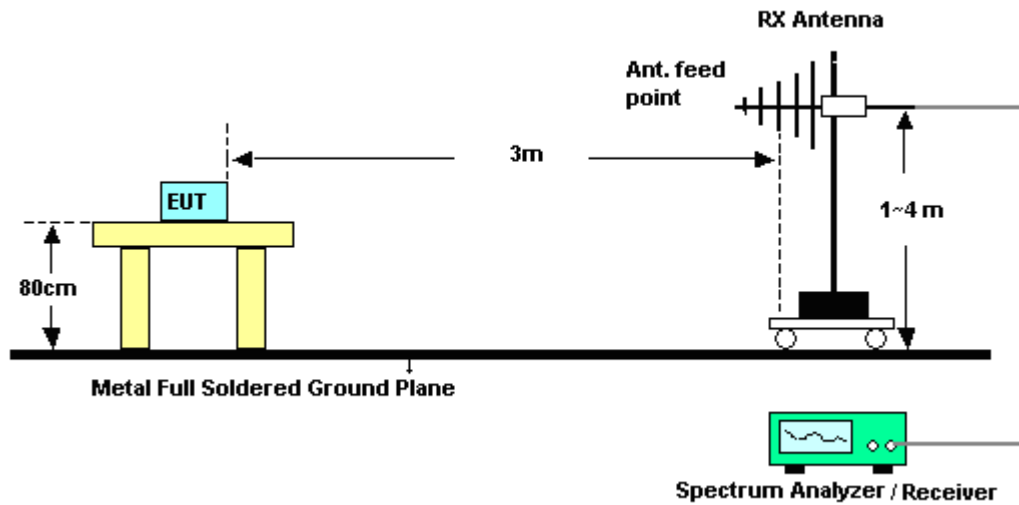

For radiated emissions above 1GHz

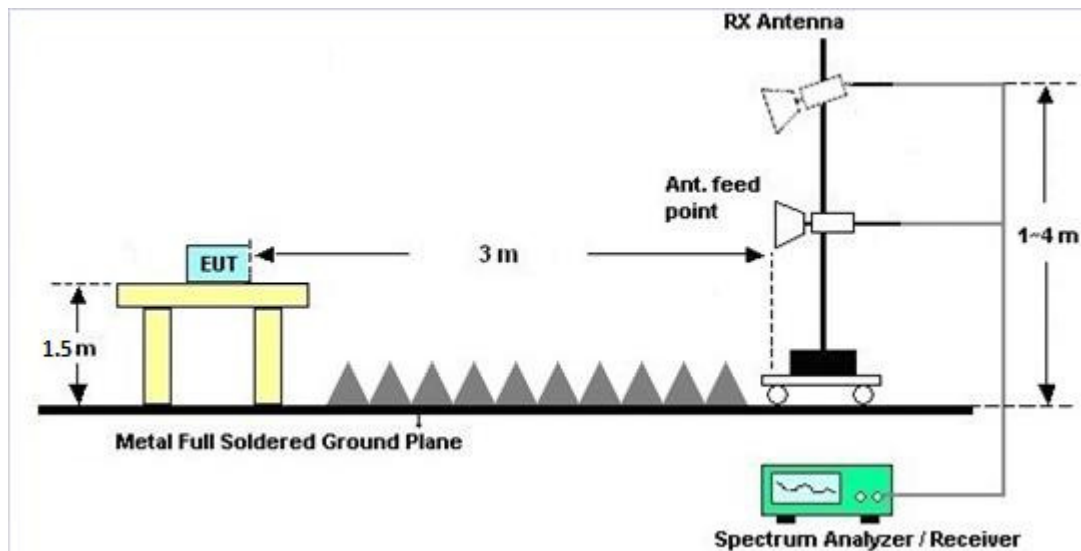

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

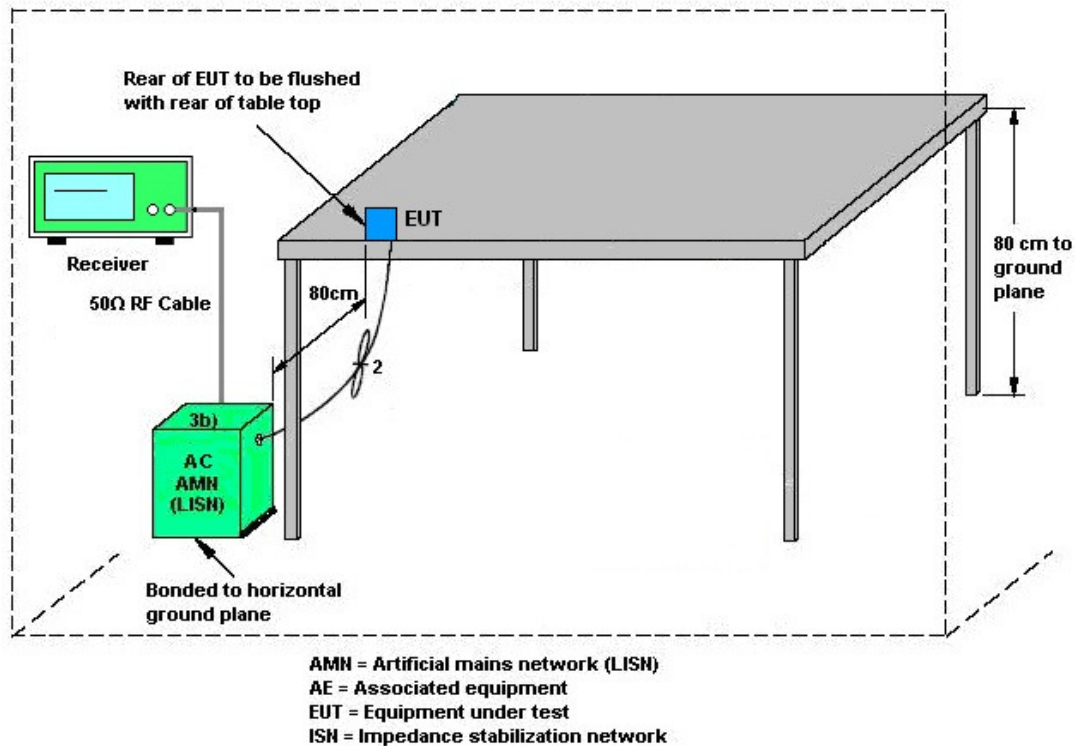

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	22~23°C
Test Engineer :	Derreck Chen	Relative Humidity :	53~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	BLE Tx + Adapter for Ant. 2		

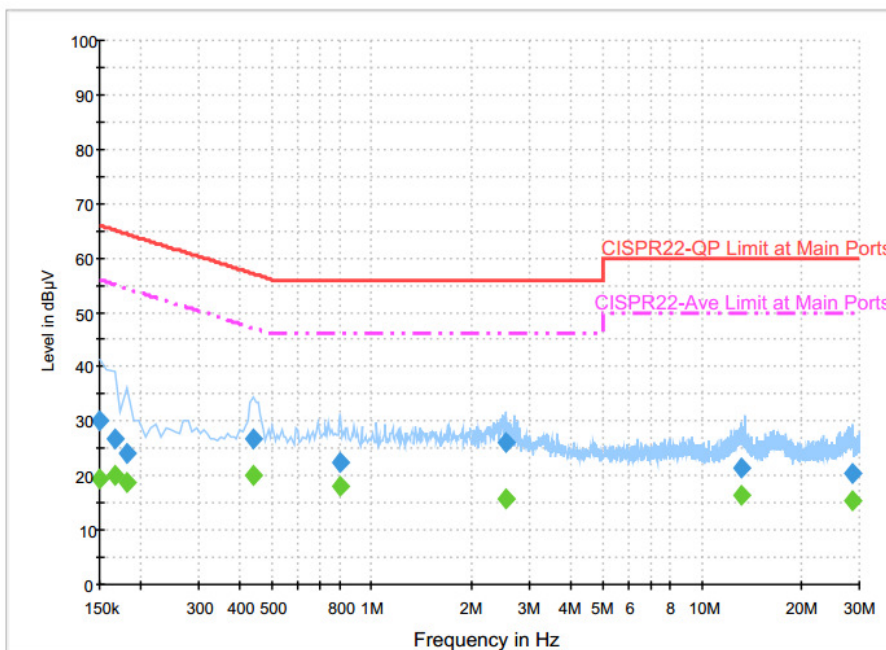

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	30.1	Off	L1	19.6	35.9	66.0
0.166000	26.6	Off	L1	19.6	38.6	65.2
0.182000	23.9	Off	L1	19.6	40.5	64.4
0.438000	26.9	Off	L1	19.6	30.2	57.1
0.806000	22.3	Off	L1	19.6	33.7	56.0
2.542000	26.1	Off	L1	19.6	29.9	56.0
13.246000	21.2	Off	L1	19.8	38.8	60.0
28.502000	20.3	Off	L1	19.9	39.7	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	19.4	Off	L1	19.6	36.6	56.0
0.166000	20.0	Off	L1	19.6	35.2	55.2
0.182000	18.8	Off	L1	19.6	35.6	54.4
0.438000	19.9	Off	L1	19.6	27.2	47.1
0.806000	18.1	Off	L1	19.6	27.9	46.0
2.542000	15.9	Off	L1	19.6	30.1	46.0
13.246000	16.4	Off	L1	19.8	33.6	50.0
28.502000	15.5	Off	L1	19.9	34.5	50.0



Test Mode :	Mode 2	Temperature :	22~23°C
Test Engineer :	Derreck Chen	Relative Humidity :	53~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	BLE Tx + Adapter for Ant. 2		

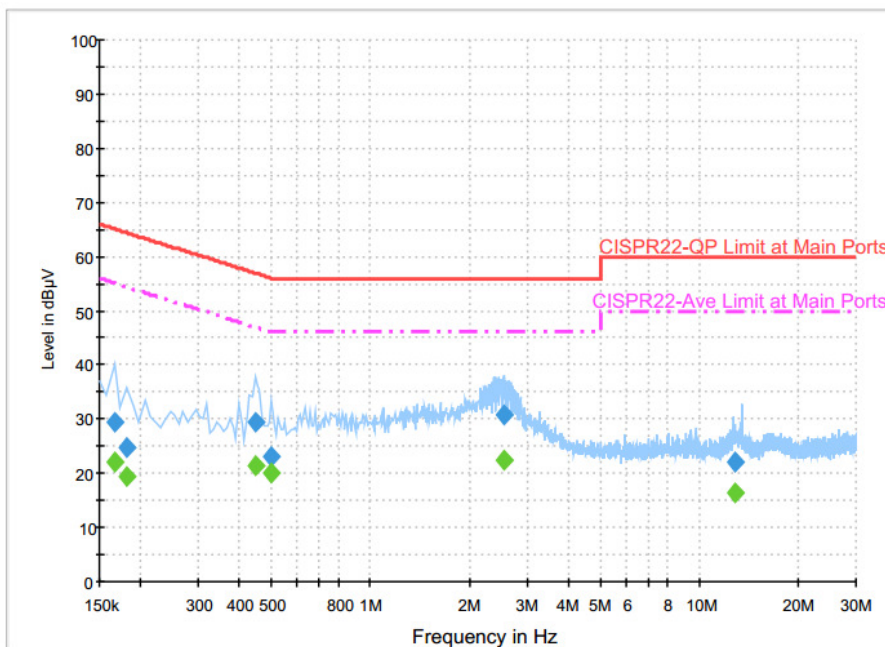**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	29.3	Off	N	19.6	35.9	65.2
0.182000	24.6	Off	N	19.6	39.8	64.4
0.446000	29.5	Off	N	19.6	27.4	56.9
0.502000	23.1	Off	N	19.6	32.9	56.0
2.566000	30.8	Off	N	19.6	25.2	56.0
12.830000	22.0	Off	N	19.8	38.0	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	22.1	Off	N	19.6	33.1	55.2
0.182000	19.4	Off	N	19.6	35.0	54.4
0.446000	21.3	Off	N	19.6	25.6	46.9
0.502000	20.1	Off	N	19.6	25.9	46.0
2.566000	22.5	Off	N	19.6	23.5	46.0
12.830000	16.4	Off	N	19.8	33.6	50.0



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1132003	300MHz~40GHz	Aug. 12, 2015	Mar. 09, 2016	Aug. 11, 2016	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1126017	300MHz~40GHz	Aug. 12, 2015	Mar. 09, 2016	Aug. 11, 2016	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 23, 2015	Mar. 09, 2016	Nov. 22, 2016	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Mar. 19, 2016	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 26, 2015	Mar. 19, 2016	Aug. 25, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2015	Mar. 19, 2016	Dec. 01, 2016	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 08, 2016	Mar. 19, 2016	Jan. 07, 2017	Conduction (CO05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Mar. 12, 2016	Sep. 01, 2016	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111D	35419	30MHz~1GHz	Jan. 13, 2016	Mar. 12, 2016	Jan. 12, 2017	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 21, 2015	Mar. 12, 2016	Aug. 20, 2016	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	Apr. 20, 2015	Mar. 12, 2016	Apr. 19, 2016	Radiation (03CH07-HY)
Amplifier	Sonoma-Instrument	310 N	187282	10MHz-1000MHz	Dec. 31, 2015	Mar. 12, 2016	Dec. 30, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 20, 2015	Mar. 12, 2016	Apr. 19, 2016	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 19, 2015	Mar. 12, 2016	Oct. 18, 2016	Radiation (03CH07-HY)
Preamplifier	MITEQ	JS44-180040 00-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	Mar. 12, 2016	Jun. 01, 2016	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Feb. 27, 2016	Mar. 12, 2016	Feb. 26, 2017	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Mar. 12, 2016	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF780208368	Control Ant Mast	N/A	Mar. 12, 2016	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Mar. 12, 2016	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 degree	N/A	Mar. 12, 2016	N/A	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Mar. 17, 2016 ~ Mar. 19, 2016	Sep. 01, 2016	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D	37059	30MHz~1GHz	Dec. 29, 2015	Mar. 17, 2016 ~ Mar. 19, 2016	Dec. 28, 2016	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Nov. 02, 2015	Mar. 17, 2016 ~ Mar. 19, 2016	Nov. 01, 2016	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 02, 2015	Mar. 17, 2016 ~ Mar. 19, 2016	Nov. 01, 2016	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103A	161075	10MHz~1GHz	Apr. 09, 2015	Mar. 17, 2016 ~ Mar. 19, 2016	Apr. 08, 2016	Radiation (03CH12-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1815698	1GHz~18GHz	Dec. 14, 2015	Mar. 17, 2016 ~ Mar. 19, 2016	Dec. 13, 2016	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	Jan. 05, 2016	Mar. 17, 2016 ~ Mar. 19, 2016	Jan. 04, 2017	Radiation (03CH12-HY)
Preamplifier	MITEQ	JS44-180040 00-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	Mar. 17, 2016 ~ Mar. 19, 2016	Jun. 01, 2016	Radiation (03CH12-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 21, 2015	Mar. 17, 2016 ~ Mar. 19, 2016	Dec. 20, 2016	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Mar. 17, 2016 ~ Mar. 19, 2016	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1m~4m	N/A	Mar. 17, 2016 ~ Mar. 19, 2016	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Mar. 17, 2016 ~ Mar. 19, 2016	N/A	Radiation (03CH12-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
--	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) for 03CH07-HY

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.60
--	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) for 03CH12-HY

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.40
--	------



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Luffy Lin	Temperature:	21~25	°C
Test Date:	2016/3/9	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	0.89	0.51	0.50	Pass
BLE	1Mbps	1	19	2440	0.89	0.51	0.50	Pass
BLE	1Mbps	1	39	2480	0.88	0.52	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	17.06	30.00	0.00	17.06	36.00	Pass
BLE	1Mbps	1	19	2440	16.85	30.00	0.00	16.85	36.00	Pass
BLE	1Mbps	1	39	2480	15.66	30.00	0.00	15.66	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	0.38	16.98
BLE	1Mbps	1	19	2440	0.38	16.80
BLE	1Mbps	1	39	2480	0.38	15.63

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	16.70	6.38	0.00	8.00	Pass
BLE	1Mbps	1	19	2440	15.40	5.24	0.00	8.00	Pass
BLE	1Mbps	1	39	2480	16.27	6.35	0.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Luke Chang, Ricky Su, and Nick Yu	Temperature :	23~24°C
		Relative Humidity :	54~56%

<Ant. 1>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		2386.05	59.78	-14.22	74	54.63	32.18	7.31	34.34	127	321	P	H
		2386.05	53.9	-0.1	54	48.75	32.18	7.31	34.34	127	321	A	H
	*	2401.67	106.72	-	-	101.54	32.18	7.31	34.31	127	321	P	H
	*	2402.004	105.99	-	-	100.81	32.18	7.31	34.31	127	321	A	H
													H
													H
		2385.96	57.82	-16.18	74	52.67	32.18	7.31	34.34	280	95	P	V
		2385.96	51.2	-2.8	54	46.05	32.18	7.31	34.34	280	95	A	V
	*	2402.004	103.52	-	-	98.34	32.18	7.31	34.31	280	95	P	V
	*	2402.004	102.78	-	-	97.6	32.18	7.31	34.31	280	95	A	V
													V
													V
BLE CH 19 2440MHz		2360.04	55.9	-18.1	74	50.91	32.13	7.24	34.38	127	323	P	H
		2375.97	47.93	-6.07	54	42.89	32.16	7.24	34.36	127	323	A	H
	*	2440.331	104.31	-	-	98.96	32.24	7.36	34.25	127	323	P	H
	*	2439.997	103.62	-	-	98.27	32.24	7.36	34.25	127	323	A	H
		2488.4	56.11	-17.89	74	50.58	32.3	7.4	34.17	127	323	P	H
		2487.92	47.95	-6.05	54	42.42	32.3	7.4	34.17	127	323	A	H
		2388.57	55.77	-18.23	74	50.61	32.18	7.31	34.33	250	317	P	V
		2360.31	46.38	-7.62	54	41.39	32.13	7.24	34.38	250	317	A	V
	*	2440.331	99.65	-	-	94.3	32.24	7.36	34.25	250	317	P	V
	*	2440.08	99.03	-	-	93.68	32.24	7.36	34.25	250	317	A	V
		2497.72	56.62	-17.38	74	51.07	32.3	7.4	34.15	250	317	P	V
		2487.92	47.06	-6.94	54	41.53	32.3	7.4	34.17	250	317	A	V



BLE CH 39 2480MHz	*	2479.659	102.74	-	-	97.24	32.28	7.4	34.18	100	238	P	H
	*	2479.993	102.01	-	-	96.51	32.28	7.4	34.18	100	238	A	H
		2483.64	64.26	-9.74	74	58.76	32.28	7.4	34.18	100	238	P	H
		2483.52	49.27	-4.73	54	43.77	32.28	7.4	34.18	100	238	A	H
													H
													H
	*	2479.659	99.53	-	-	94.03	32.28	7.4	34.18	105	347	P	V
	*	2479.993	98.79	-	-	93.29	32.28	7.4	34.18	105	347	A	V
		2483.52	60.85	-13.15	74	55.35	32.28	7.4	34.18	105	347	P	V
		2483.56	47.55	-6.45	54	42.05	32.28	7.4	34.18	105	347	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	54.74	-19.26	74	68.33	34.25	11.83	59.67	100	0	P	H
		4804	51.53	-2.47	54	65.12	34.25	11.83	59.67	100	0	A	H
													H
													H
		4804	52.34	-21.66	74	65.93	34.25	11.83	59.67	100	69	P	V
		4804	49.52	-4.48	54	63.11	34.25	11.83	59.67	100	69	A	V
													V
													V
BLE CH 19 2440MHz		4880	50.74	-23.26	74	64.48	34.3	11.53	59.57	100	0	P	H
		7320	50.55	-23.45	74	59.63	35.6	13.81	58.49	100	0	P	H
													H
													H
		4880	50.2	-23.8	74	63.94	34.3	11.53	59.57	100	0	P	V
		7320	54.12	-19.88	74	63.2	35.6	13.81	58.49	300	172	P	V
		7320	50.58	-3.42	54	59.66	35.6	13.81	58.49	300	172	A	V
													V
BLE CH 39 2480MHz		4960	50.19	-23.81	74	64.05	34.37	11.22	59.45	100	0	P	H
		7440	48.65	-25.35	74	57.64	35.6	14.05	58.64	100	0	P	H
													H
													H
		4960	48.29	-25.71	74	62.15	34.37	11.22	59.45	100	0	P	V
		7440	54.4	-19.6	74	63.39	35.6	14.05	58.64	290	174	P	V
		7440	48.5	-5.5	54	57.49	35.6	14.05	58.64	290	174	A	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		31.35	23.39	-16.61	40	29.19	25.46	1.07	32.33	200	0	P	H
		130.17	20.44	-23.06	43.5	32.79	18.3	1.55	32.2			P	H
		288.12	25.19	-20.81	46	35.34	19.62	2.32	32.09			P	H
		351.8	26.17	-19.83	46	34.51	21.25	2.5	32.09			P	H
		713	28.12	-17.88	46	29.91	26.6	3.74	32.13			P	H
		967.1	32.13	-21.87	54	28.66	30.23	4.07	30.83			P	H
													H
													H
													H
													H
													H
													H
		33.51	26.92	-13.08	40	34.33	23.84	1.07	32.32	100	0	P	V
		163.92	24.88	-18.62	43.5	38.72	16.6	1.78	32.22			P	V
		278.67	23.08	-22.92	46	33.54	19.32	2.32	32.1			P	V
		503	24.1	-21.9	46	28.92	24.22	3.14	32.18			P	V
		754.3	28.78	-17.22	46	29.75	27.25	3.82	32.04			P	V
		997.2	32.65	-21.35	54	28.93	30.29	3.98	30.55			P	V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



<Ant. 2>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2386.14	58.75	-15.25	74	58.25	27.05	7.45	34	137	241	P	H
		2386.05	51.54	-2.46	54	51.04	27.05	7.45	34	137	241	A	H
	*	2402	109.07	-	-	108.57	27.05	7.45	34	137	241	P	H
	*	2402	108.31	-	-	107.81	27.05	7.45	34	137	241	A	H
													H
													H
		2386.05	60.33	-13.67	74	59.83	27.05	7.45	34	131	79	P	V
		2385.96	51.7	-2.3	54	51.2	27.05	7.45	34	131	79	A	V
	*	2402	110.41	-	-	109.91	27.05	7.45	34	131	79	P	V
	*	2402	109.7	-	-	109.2	27.05	7.45	34	131	79	A	V
													V
													V
BLE CH 19 2440MHz		2328.09	55.21	-18.79	74	54.95	26.89	7.3	33.93	106	240	P	H
		2376.06	46.35	-7.65	54	45.95	27.01	7.37	33.98	106	240	A	H
	*	2440	106.5	-	-	105.88	27.18	7.49	34.05	106	240	P	H
	*	2440	105.72	-	-	105.1	27.18	7.49	34.05	106	240	A	H
		2495.6	54.23	-19.77	74	53.5	27.3	7.53	34.1	106	240	P	H
		2488	44.19	-9.81	54	43.46	27.3	7.53	34.1	106	240	A	H
		2375.88	56.1	-17.9	74	55.7	27.01	7.37	33.98	100	76	P	V
		2376.06	46.74	-7.26	54	46.34	27.01	7.37	33.98	100	76	A	V
	*	2440	109.01	-	-	108.39	27.18	7.49	34.05	100	76	P	V
	*	2440	108.21	-	-	107.59	27.18	7.49	34.05	100	76	A	V
		2487.84	54.71	-19.29	74	53.98	27.3	7.53	34.1	100	76	P	V
		2487.88	45.78	-8.22	54	45.05	27.3	7.53	34.1	100	76	A	V



BLE CH 39 2480MHz	*	2480	105.17	-	-	104.46	27.26	7.53	34.08	100	240	P	H
	*	2480	104.41	-	-	103.7	27.26	7.53	34.08	100	240	A	H
		2483.52	64.24	-9.76	74	63.53	27.26	7.53	34.08	100	240	P	H
		2483.52	45.27	-8.73	54	44.56	27.26	7.53	34.08	100	240	A	H
													H
													H
	*	2480	107.01	-	-	106.3	27.26	7.53	34.08	120	277	P	V
	*	2480	106.23	-	-	105.52	27.26	7.53	34.08	120	277	A	V
		2483.52	65.11	-8.89	74	64.4	27.26	7.53	34.08	120	277	P	V
		2496.08	46.87	-7.13	54	46.14	27.3	7.53	34.1	120	277	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4806	53.65	-20.35	74	69.98	31.23	10.59	58.15	100	19	P	H
		4806	51.18	-2.82	54	67.51	31.23	10.59	58.15	100	19	A	H
													H
													H
		4806	50.99	-23.01	74	67.32	31.23	10.59	58.15	100	0	P	V
													V
													V
													V
BLE CH 19 2440MHz		4878	51.75	-22.25	74	67.63	31.33	10.89	58.1	100	21	P	H
		4878	49.1	-4.9	54	64.98	31.33	10.89	58.1	100	21	A	H
		7320	48.39	-25.61	74	57.19	36.12	14.18	59.1	100	0	P	H
													H
		4878	51.78	-22.22	74	67.66	31.33	10.89	58.1	100	78	P	V
		4878	49.85	-4.15	54	65.73	31.33	10.89	58.1	100	78	A	V
		7320	52.12	-21.88	74	60.92	36.12	14.18	59.1	100	139	P	V
		7320	46.6	-7.4	54	55.4	36.12	14.18	59.1	100	139	A	V
BLE CH 39 2480MHz		4962	50.32	-23.68	74	65.71	31.45	11.19	58.03	100	0	P	H
		7440	46.55	-27.45	74	54.94	36.46	14.32	59.17	100	0	P	H
													H
													H
		4962	52.08	-21.92	74	67.47	31.45	11.19	58.03	100	80	P	V
		4962	48.92	-5.08	54	64.31	31.45	11.19	58.03	100	80	A	V
		7440	49.79	-24.21	74	58.18	36.46	14.32	59.17	100	0	P	V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		55.65	31.62	-8.38	40	47.95	13.35	0.78	30.46	100	32	P	H
		132.87	34.17	-9.33	43.5	45.17	17.94	1.43	30.37			P	H
		173.64	29.78	-13.72	43.5	42.68	15.68	1.75	30.33			P	H
		559.7	27.92	-18.08	46	29.67	24.67	3.3	29.72			P	H
		750.8	30.57	-15.43	46	28.45	27.6	3.97	29.45			P	H
		969.2	34.28	-19.72	54	28.49	30.07	4.75	29.03			P	H
													H
													H
													H
													H
													H
													H
													H
		30.54	31.46	-8.54	40	35.62	25.26	0.78	30.2	100	124	P	V
		82.92	30.54	-9.46	40	45.88	14.03	1.06	30.43			P	V
		212.25	32.67	-10.83	43.5	45.17	16.08	1.7	30.28			P	V
		496.7	26.04	-19.96	46	28.85	23.93	3.08	29.82			P	V
		714.4	29.98	-16.02	46	28.83	26.75	3.89	29.49			P	V
		899.9	34.2	-11.8	46	30.12	28.9	4.45	29.27			P	V
													V
													V
													V
													V
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.







Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Luke Chang, Ricky Su, and Nick Yu	Temperature :	23~24°C
		Relative Humidity :	54~56%

<Ant. 1>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

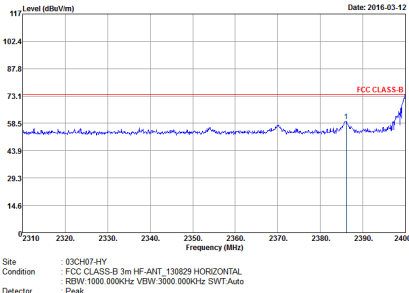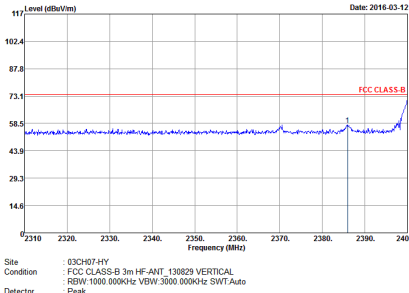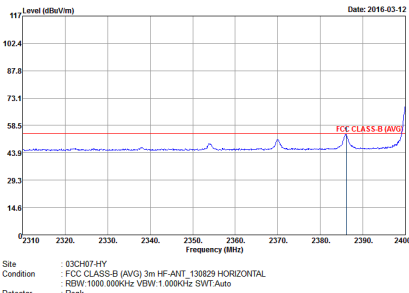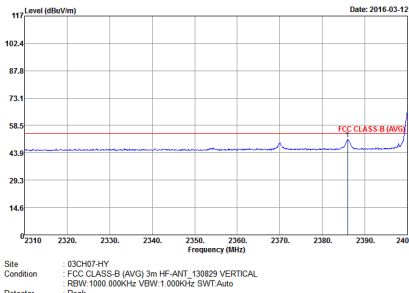BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>
Avg.	 <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:1.000kHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:1.000kHz SWT:Auto Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Horizontal	Vertical
Peak	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:3000.000kHz SWT:Auto Detector : Peak</p>
Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VSW:1.000kHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VSW:1.000kHz SWT:Auto Detector : Peak</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Vertical
Peak	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3500.000kHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3500.000kHz SWT:Auto Detector : Peak</p>
Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:1.000kHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:1.000kHz SWT:Auto Detector : Peak</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak</p>
Avg.	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 HORIZONTAL RBW:1000.000kHz VBW:1.000kHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH07-HY Condition : FCC CLASS-B (AVG) 3m HF-ANT_130829 VERTICAL RBW:1000.000kHz VBW:1.000kHz SWT:Auto Detector : Peak</p>

2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

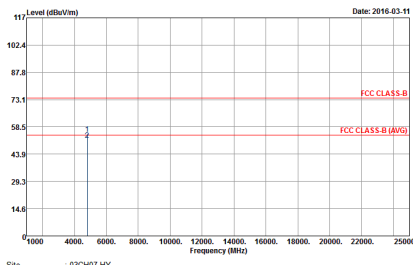
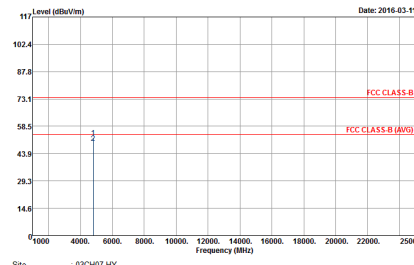
BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL</p>

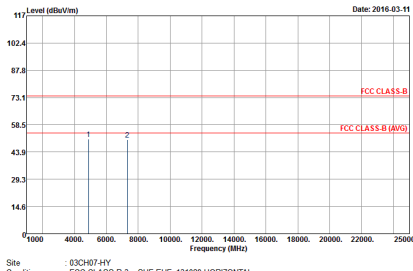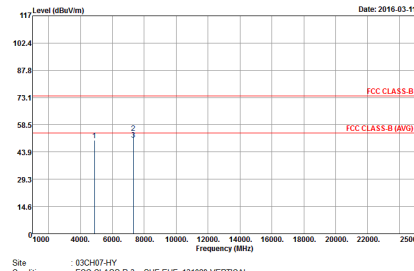BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL</p>

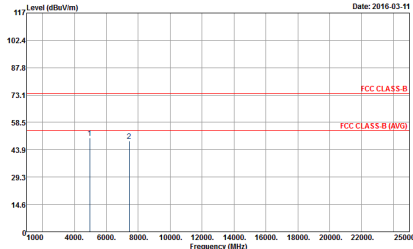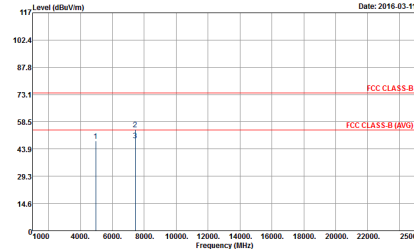

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 HORIZONTAL</p>	 <p>Site : 03CH07-HY Condition : FCC CLASS-B 3m SHF-EHF_131029 VERTICAL</p>

Emission below 1GHz
2.4GHz BLE (LF)

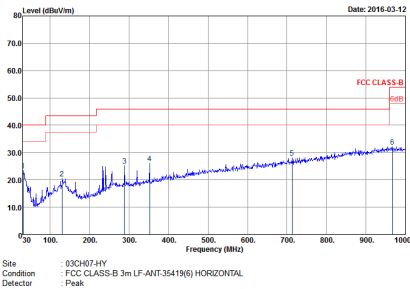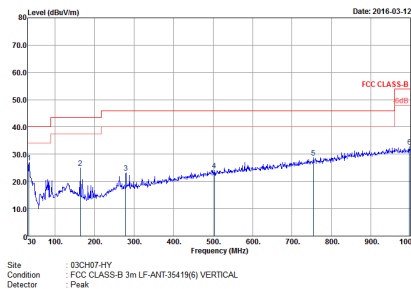BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
1	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH741Y Condition : FCC CLASS-B 3m LF-ANT:35419(6) HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH741Y Condition : FCC CLASS-B 3m LF-ANT:35419(6) VERTICAL Detector : Peak</p>











<Ant. 2>

Note symbol





-L	Low channel location
-R	High channel location

2.4GHz 2400~2483.5MHz
BLE (Band Edge @ 3m)

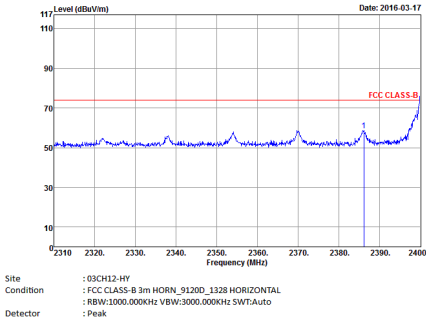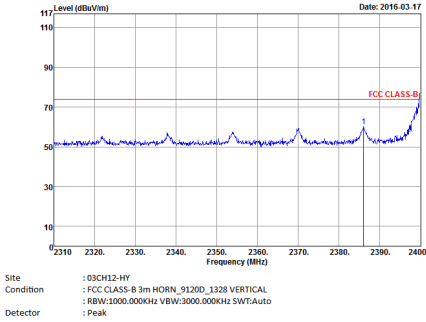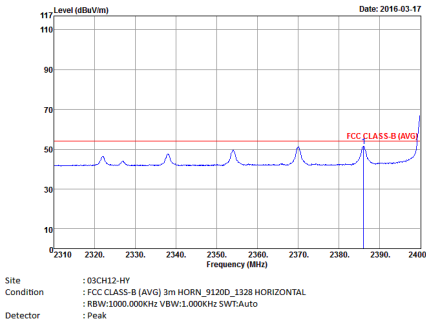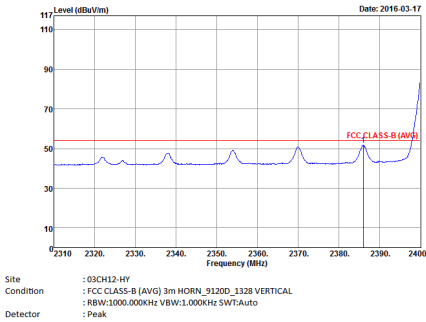BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak	 <p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak</p>	 <p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Peak</p>
	 <p>Site : 03CH12-HY Condition : FCC CLASS-B (AVG) 3m HORN_91200_1328 HORIZONTAL Detector : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Peak</p>	 <p>Site : 03CH12-HY Condition : FCC CLASS-B (AVG) 3m HORN_91200_1328 VERTICAL Detector : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Peak</p>

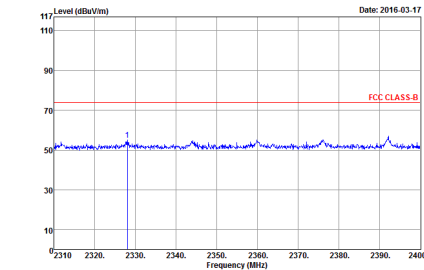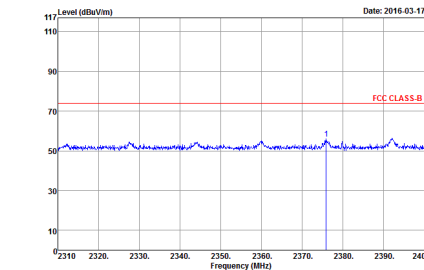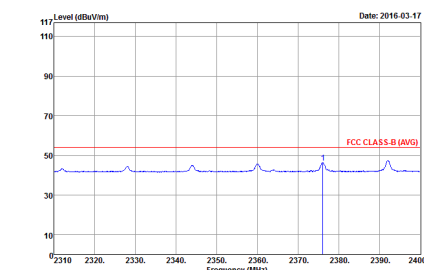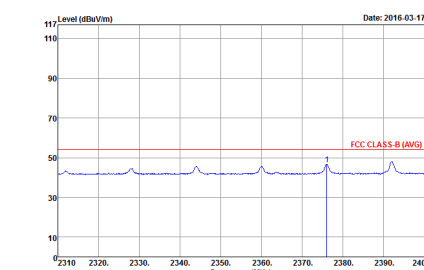BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Horizontal	Vertical
Peak	 <p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	 <p>Site : 03CH12-HY Condition : FCC CLASS-B (AVG) 3m HORN_91200_1328 HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak</p>	 <p>Site : 03CH12-HY Condition : FCC CLASS-B (AVG) 3m HORN_91200_1328 VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak</p>

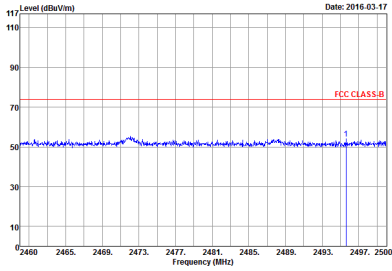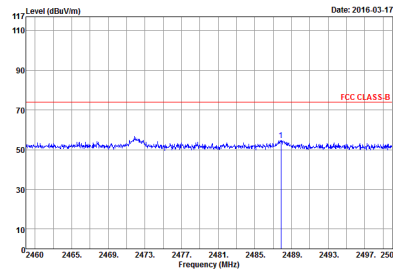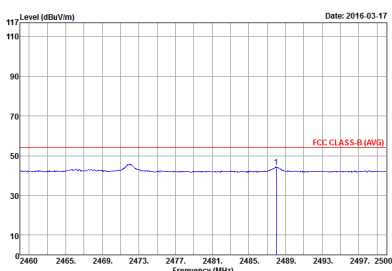
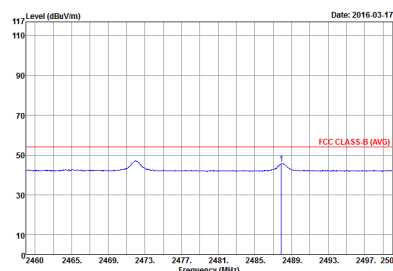


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Vertical
Peak	<p>The plot shows the peak level in dBuV/m versus frequency in MHz for the horizontal polarization. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line at 70 dBuV/m indicates the FCC CLASS-B limit. The blue trace shows a noisy baseline around 50 dBuV/m with a sharp peak at 2489 MHz reaching approximately 60 dBuV/m.</p> <p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 HORIZONTAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>The plot shows the peak level in dBuV/m versus frequency in MHz for the vertical polarization. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line at 70 dBuV/m indicates the FCC CLASS-B limit. The blue trace shows a noisy baseline around 50 dBuV/m with a sharp peak at 2489 MHz reaching approximately 60 dBuV/m.</p> <p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	<p>The plot shows the average level in dBuV/m versus frequency in MHz for the horizontal polarization. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line at 55 dBuV/m indicates the FCC CLASS-B (AVG) limit. The blue trace shows a noisy baseline around 45 dBuV/m with a sharp peak at 2489 MHz reaching approximately 50 dBuV/m.</p> <p>Site : 03CH12-HY Condition : FCC CLASS-B (AVG) 3m HORN_91200_1328 HORIZONTAL Detector : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak</p>	<p>The plot shows the average level in dBuV/m versus frequency in MHz for the vertical polarization. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A red horizontal line at 55 dBuV/m indicates the FCC CLASS-B (AVG) limit. The blue trace shows a noisy baseline around 45 dBuV/m with a sharp peak at 2489 MHz reaching approximately 50 dBuV/m.</p> <p>Site : 03CH12-HY Condition : FCC CLASS-B (AVG) 3m HORN_91200_1328 VERTICAL Detector : RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	<p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak</p>
Avg.	<p>Site : 03CH12-HY Condition : FCC CLASS-B (AVG) 3m HORN_91200_1328 HORIZONTAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak</p>	<p>Site : 03CH12-HY Condition : FCC CLASS-B (AVG) 3m HORN_91200_1328 VERTICAL RBW:1000.000KHz VBW:1.000KHz SWT:Auto Detector : Peak</p>

2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

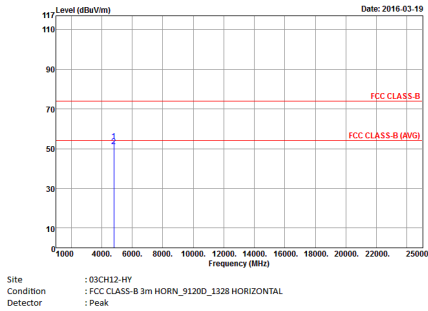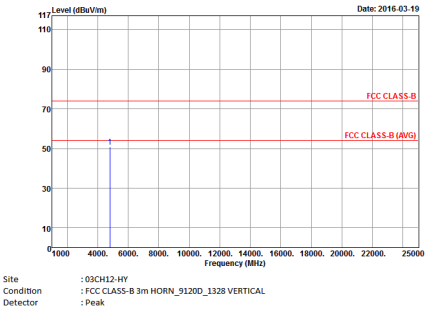BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 VERTICAL Detector : Peak</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak Avg.	<p>117 110 90 70 50 30 10 0</p> <p>Level (dBuV/m)</p> <p>Date: 2016-03-19</p> <p>Frequency (MHz)</p> <p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 HORIZONTAL Detector : Peak</p>	<p>117 110 90 70 50 30 10 0</p> <p>Level (dBuV/m)</p> <p>Date: 2016-03-19</p> <p>Frequency (MHz)</p> <p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 VERTICAL Detector : Peak</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	<div><p>Level (dBuV/m)</p><p>Date: 2016-03-19</p><p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 HORIZONTAL Detector : Peak</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2016-03-19</p><p>Site : 03CH12-HY Condition : FCC CLASS-B 3m HORN_91200_1328 VERTICAL Detector : Peak</p></div>



Emission below 1GHz

2.4GHz BLE (LF)

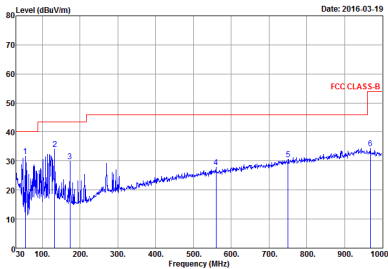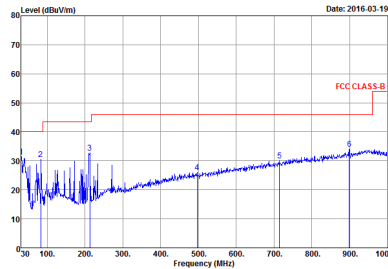BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
1	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH12-HY Condition : FCC CLASS-B 3m BILOG_6111D_37059 HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH12-HY Condition : FCC CLASS-B 3m BILOG_6111D_37059 VERTICAL Detector : Peak</p>