



10 Maximum conducted output power

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013


Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.


10.1 Test Procedure

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05 section 8.3.2.2.
2. The RF output of EUT Connect the antenna port(s) to the spectrum analyzer input. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.


10.2 Test Result

TestMode	Antenna	Frequency[MHz]	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	19.25	≤30.00	PASS
11B	Ant1	2437	17.90	≤30.00	PASS
11B	Ant1	2462	17.80	≤30.00	PASS
11G	Ant1	2412	19.71	≤30.00	PASS
11G	Ant1	2437	18.93	≤30.00	PASS
11G	Ant1	2462	18.46	≤30.00	PASS
11N20SISO	Ant1	2412	18.39	≤30.00	PASS
11N20SISO	Ant1	2437	17.45	≤30.00	PASS
11N20SISO	Ant1	2462	17.07	≤30.00	PASS
11N40SISO	Ant1	2422	18.96	≤30.00	PASS
11N40SISO	Ant1	2437	18.09	≤30.00	PASS
11N40SISO	Ant1	2452	18.06	≤30.00	PASS

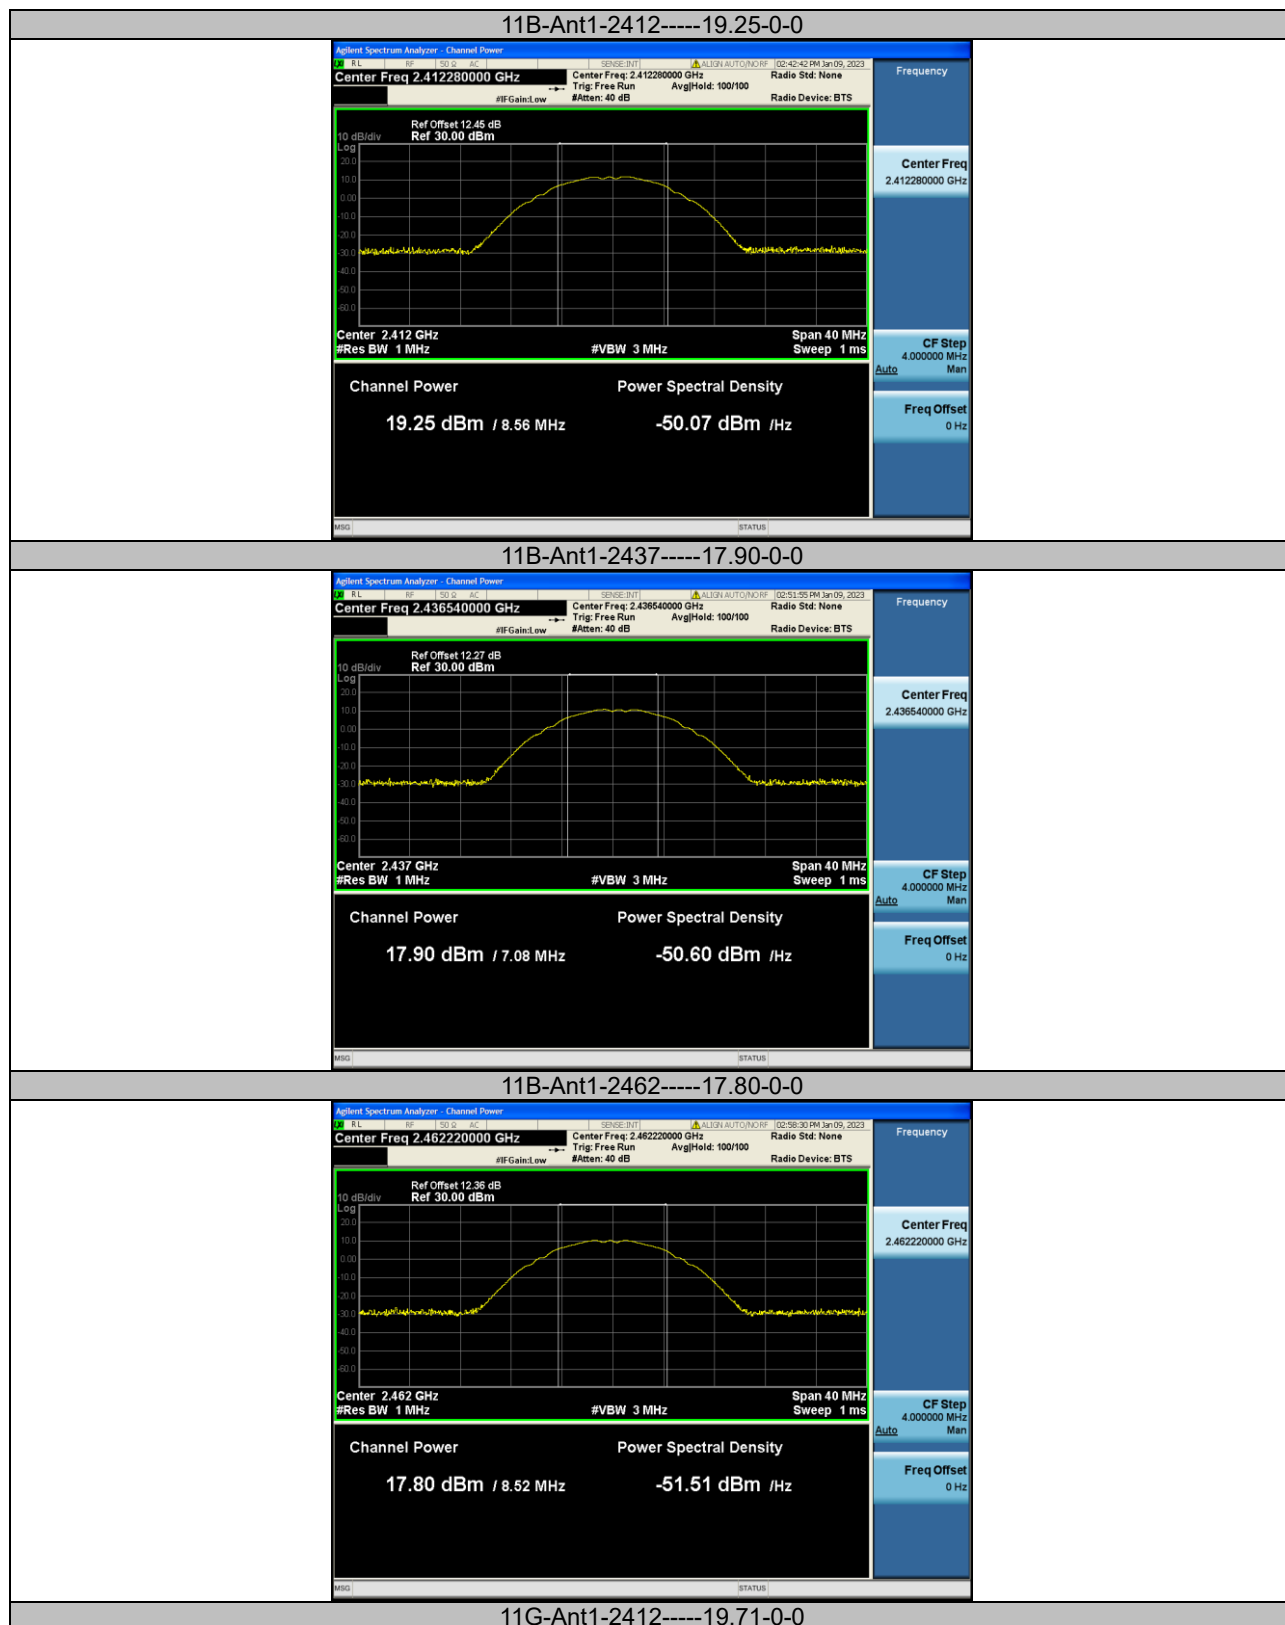


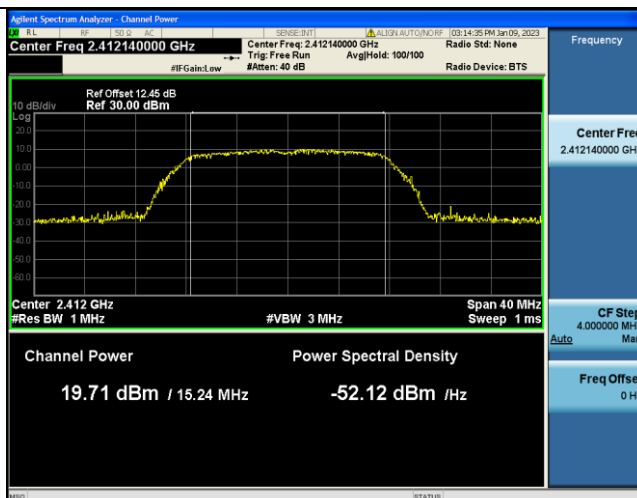


11G-Ant1-2437-----18.93-0-0

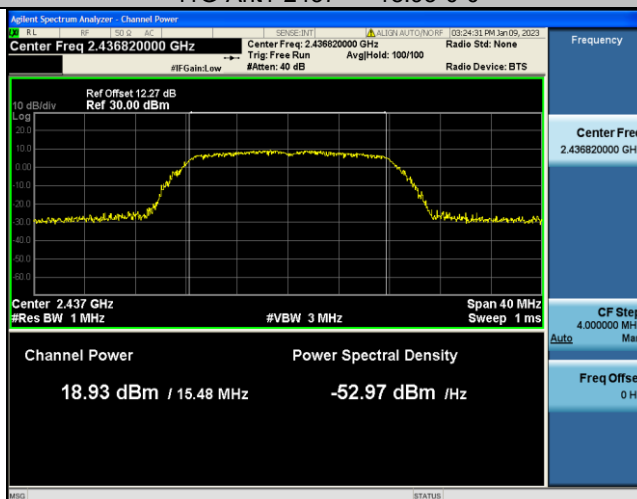


11G-Ant1-2462-----18.46-0-0

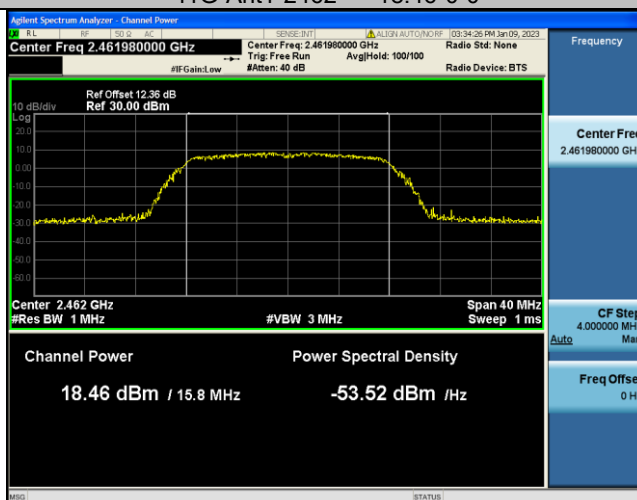


11N20SISO-Ant1-2412-----18.39-0-0

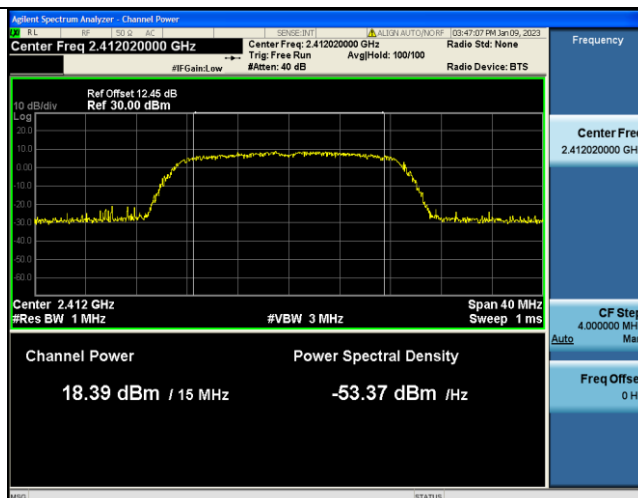


11N20SISO-Ant1-2437-----17.45-0-0

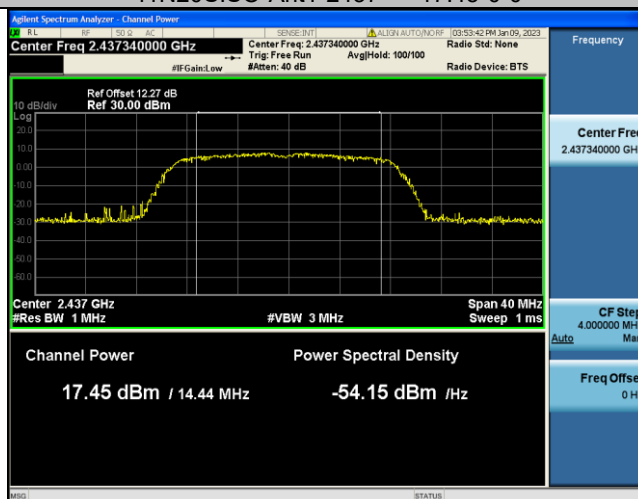


11N20SISO-Ant1-2462-----17.07-0-0

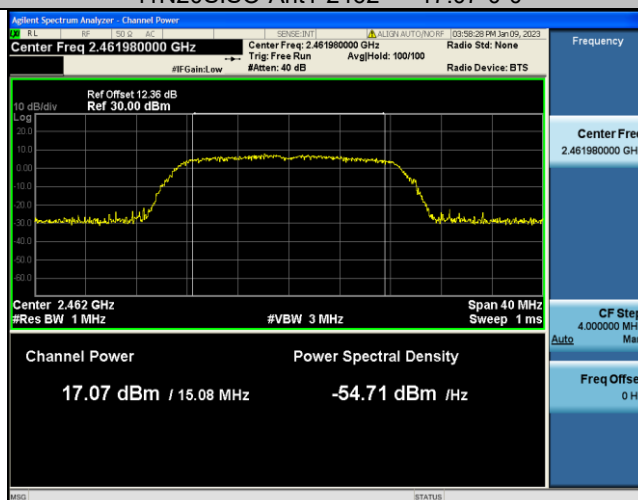


11N40SISO-Ant1-2422-----18.96-0-0

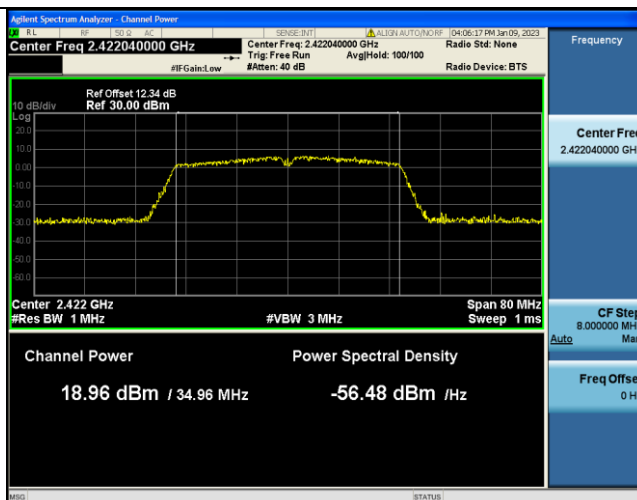

11N40SISO-Ant1-2437-----18.09-0-0

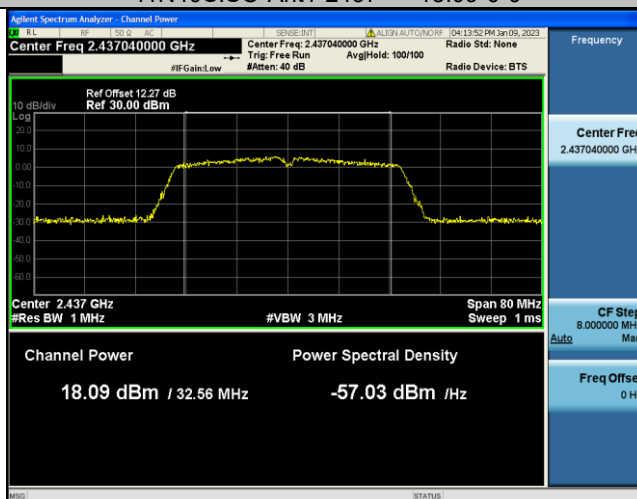

11N40SISO-Ant1-2452-----18.06-0-0

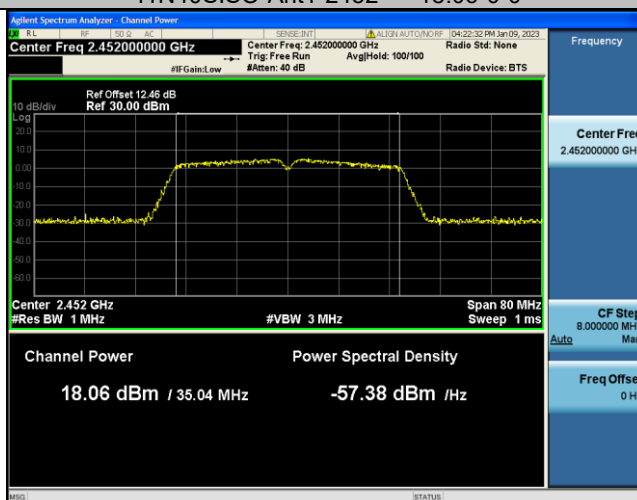



11 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

11.1 Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span = 1.5 times the DTS bandwidth
RBW = 3KHz, VBW = 10KHz
Sweep time = auto couple
Detector = peak
Trace mode =max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW(no less than 3KHz) and repeat.

11.2 Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-4.29	≤8.00	PASS
11B	Ant1	2437	-5.35	≤8.00	PASS
11B	Ant1	2462	-6.49	≤8.00	PASS
11G	Ant1	2412	-10.19	≤8.00	PASS
11G	Ant1	2437	-11.29	≤8.00	PASS
11G	Ant1	2462	-10.56	≤8.00	PASS
11N20SISO	Ant1	2412	-11.75	≤8.00	PASS
11N20SISO	Ant1	2437	-11.82	≤8.00	PASS
11N20SISO	Ant1	2462	-13.89	≤8.00	PASS
11N40SISO	Ant1	2422	-14.92	≤8.00	PASS
11N40SISO	Ant1	2437	-14.09	≤8.00	PASS
11N40SISO	Ant1	2452	-15.92	≤8.00	PASS



11B-Ant1-2412--4.29-0.00-0.00-0.00




11B-Ant1-2437--5.35-0.00-0.00-0.00




11B-Ant1-2462--6.49-0.00-0.00-0.00




11G-Ant1-2412--10.19-0.00-0.00-0.00

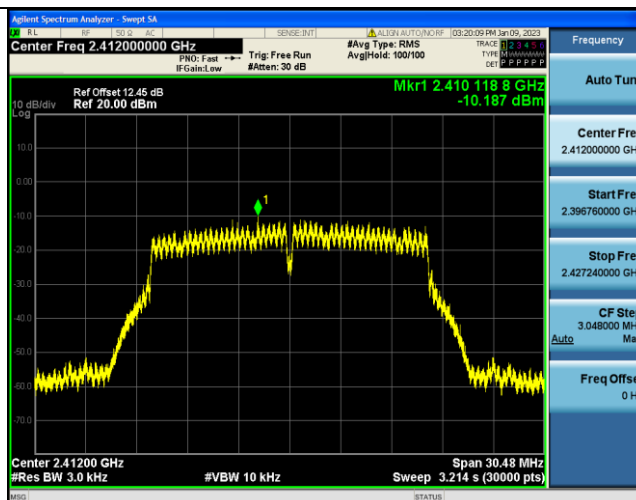


11G-Ant1-2437--11.29-0.00-0.00-0.00

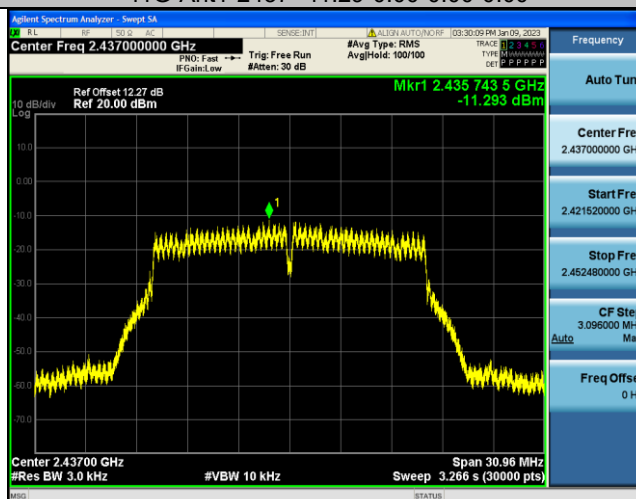


11G-Ant1-2462--10.56-0.00-0.00-0.00

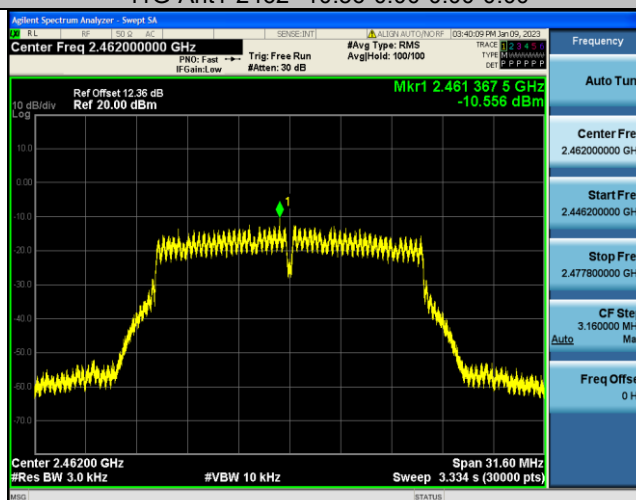


11N20SISO-Ant1-2412--11.75-0.00-0.00-0.00

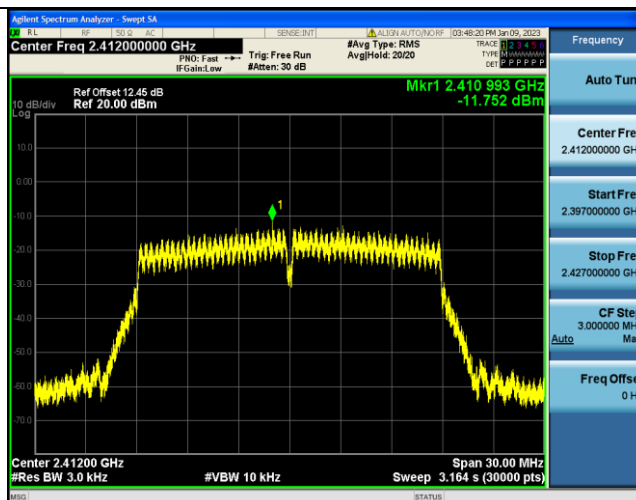


11N20SISO-Ant1-2437--11.82-0.00-0.00-0.00

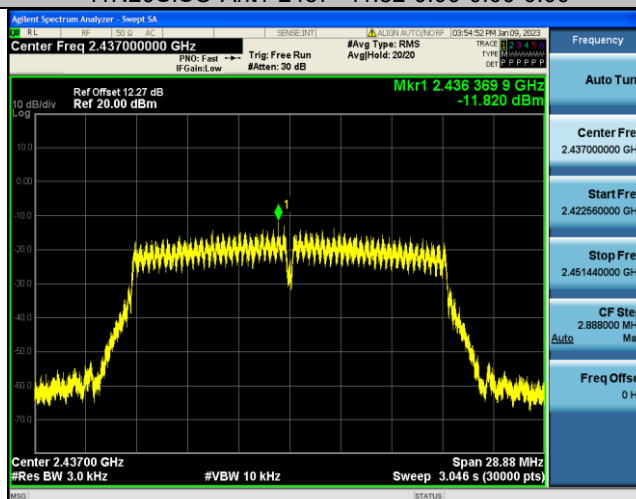


11N20SISO-Ant1-2462--13.89-0.00-0.00-0.00

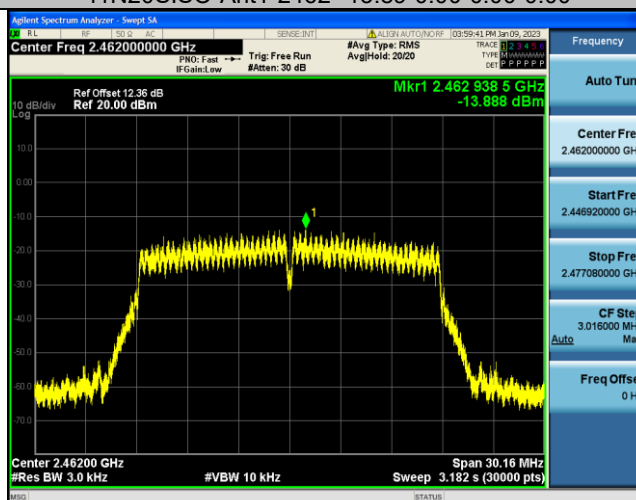


11N40SISO-Ant1-2422--14.92-0.00-0.00-0.00

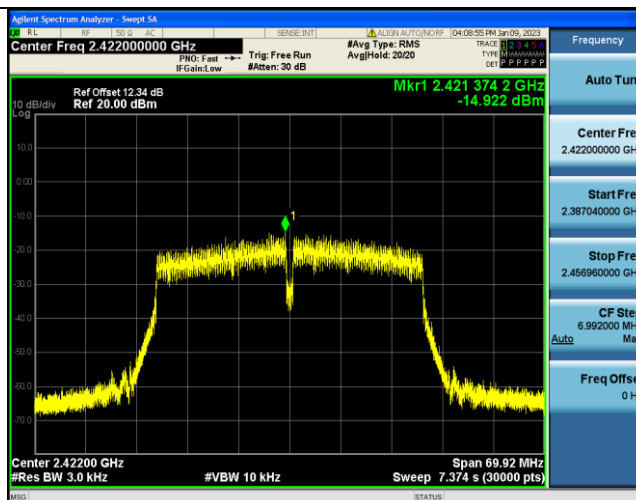

11N40SISO-Ant1-2437--14.09-0.00-0.00-0.00

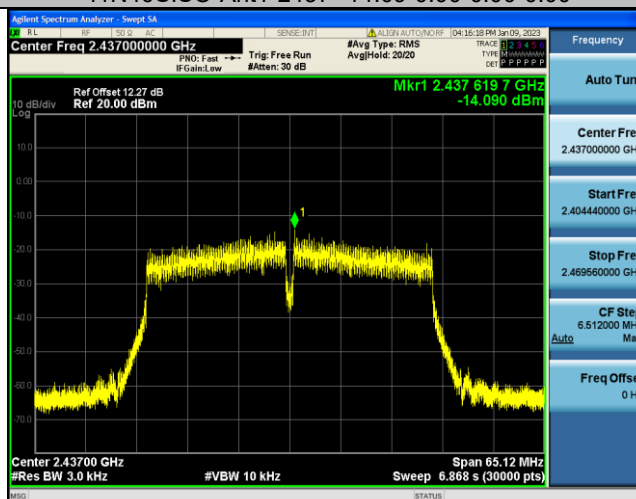

11N40SISO-Ant1-2452--15.92-0.00-0.00-0.00

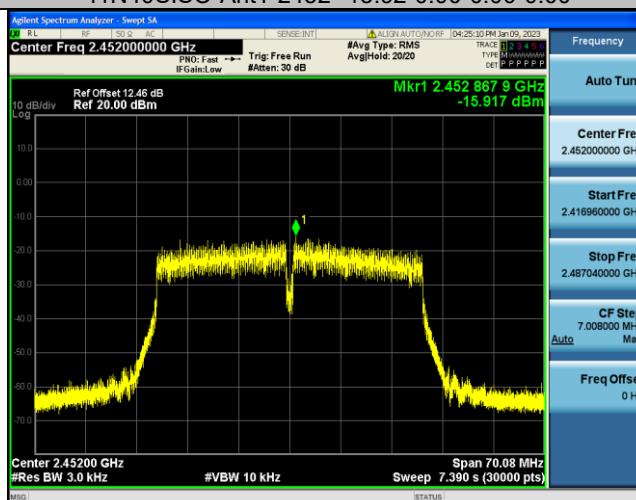


12 Antenna Application

12.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result

The EUT'S antenna, permanent attached antenna, is PIFA Antenna. The antenna's gain is 2.7 dBi and meets the requirement.

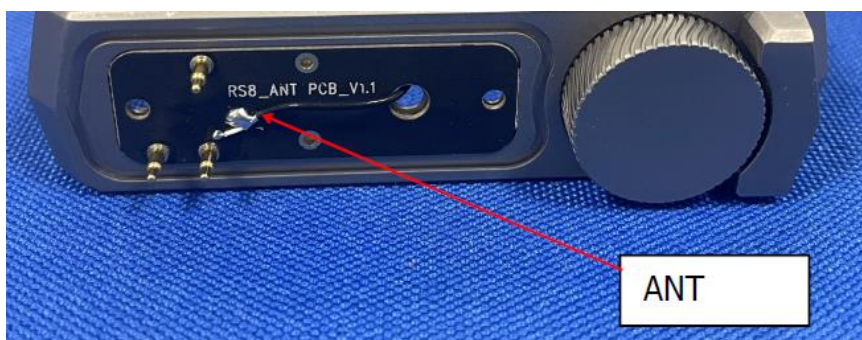


13 Test Setup


Conducted Emissions




Radiated Spurious Emissions
From 30MHz-1000MHz

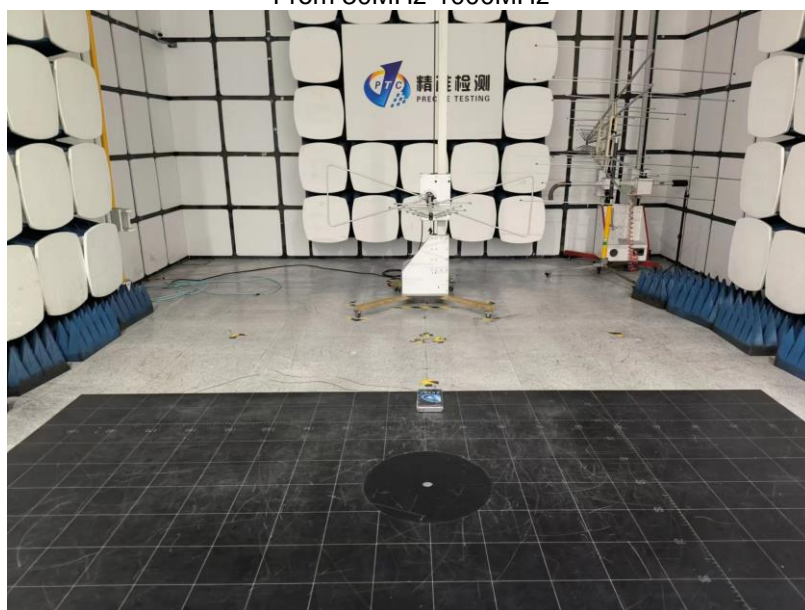


Test frequency from Above 1GHz

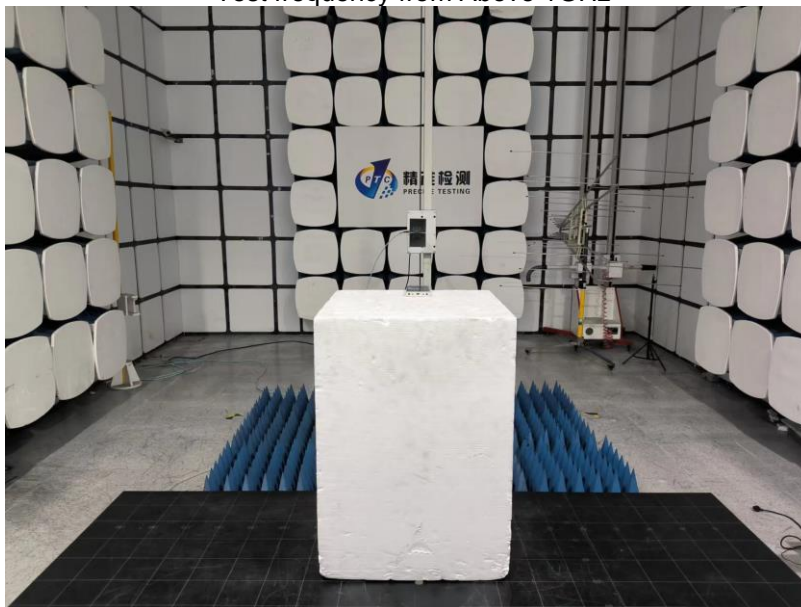



14 EUT PHOTOS

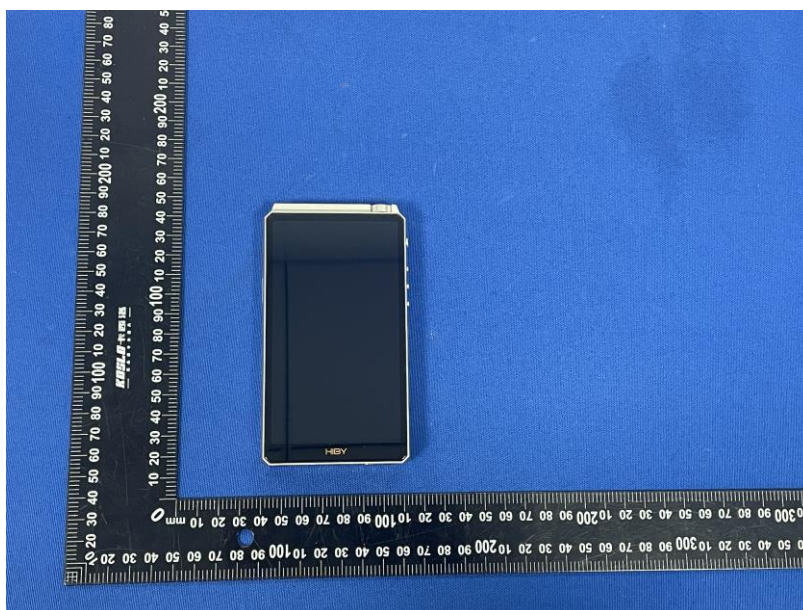


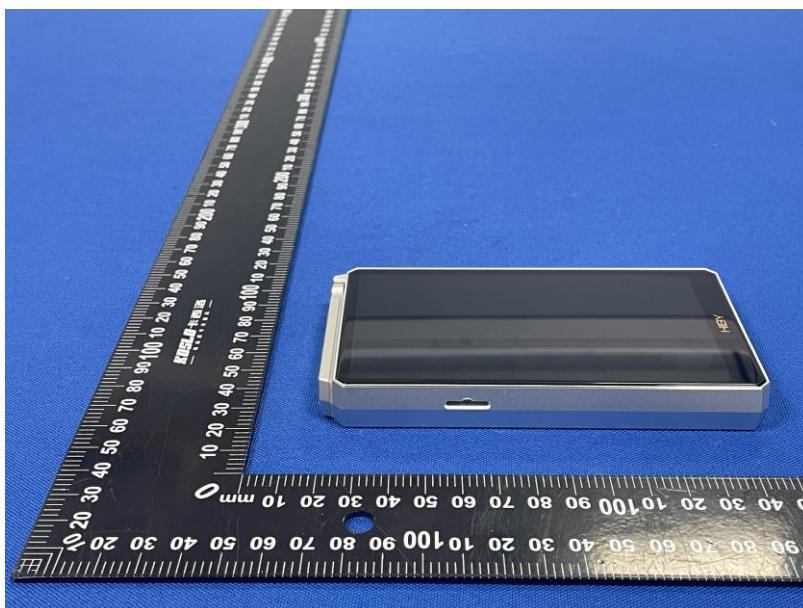



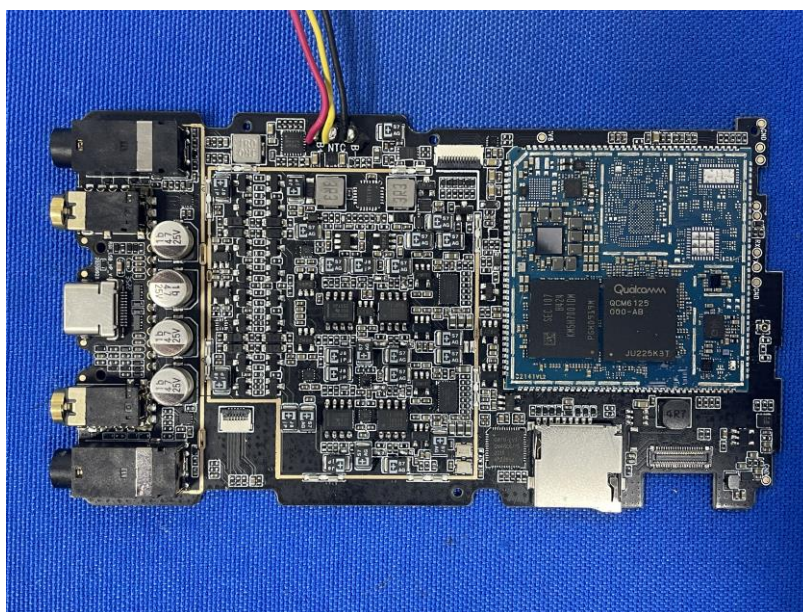

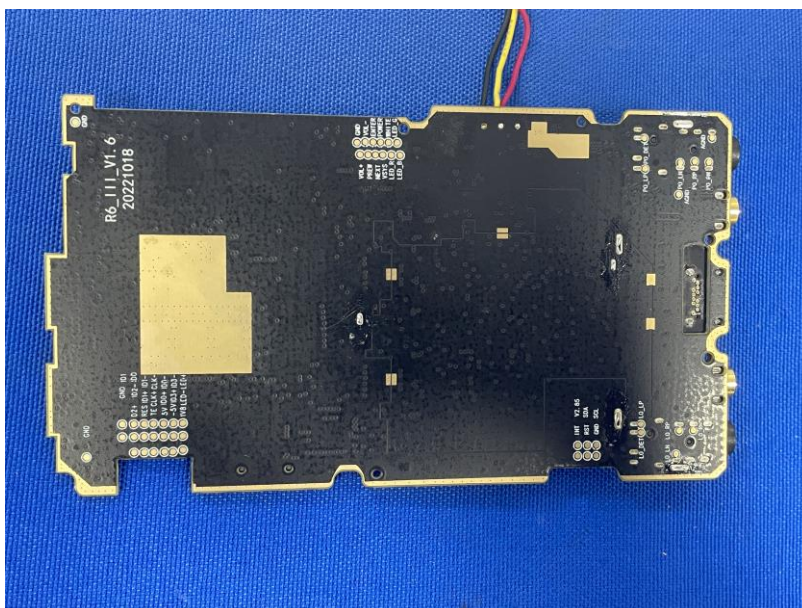

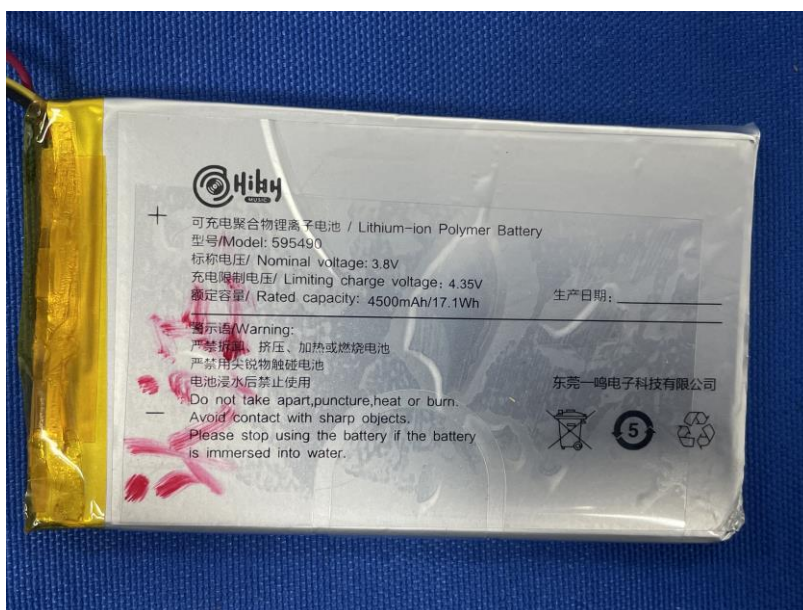

*****THE END REPORT*****