



**FCC 47 CFR PART 15 SUBPART C**  
**CERTIFICATION TEST REPORT**

*For*

**Tablet**

**MODEL NUMBER: M081**

**FCC ID: 2AAGE5081WNC**

**REPORT NUMBER: 1102260408-RF-4**

**ISSUE DATE: October 24, 2022**

*Prepared for*

**Chengdu Vantron Technology Co., Ltd.**  
**No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, ChengDu, China**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**  
**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**



### Revision History

Rev.	Issue Date	Revisions	Revised By
V0	October 24, 2022	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	Transmitter 20dB Bandwidth	Part 15.215 (c)	PASS
2	Transmitter Frequency Stability (Temperature & Voltage Variation)	CFR 47 FCC §15.225(e)	PASS
3	Fundamental Field Strength	CFR 47 FCC §5.225(a)(b)(c)(d)	PASS
4	Radiated Emissions	CFR 47 FCC§15.209(a) CFR 47 FCC§15.225(d)	PASS
5	Band Edge Radiated Emissions	CFR 47 FCC §15.209(a) CFR 47 FCC §15.225(c)(d)	PASS
6	Conducted Emission Test for AC Power Port	CFR 47 FCC §15.207	PASS
7	Antenna Requirement	CFR 47 FCC §15.203	Pass
This test report is only published to and used by the applicant, and it is not for evidence purpose in China.			



## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b>	<b>5</b>
<b>2. TEST METHODOLOGY</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY</b>	<b>7</b>
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. MEASUREMENT UNCERTAINTY	7
<b>5. EQUIPMENT UNDER TEST</b>	<b>8</b>
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM FIELD STRENGTH	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. DESCRIPTION OF TEST SETUP	9
5.5. MEASURING INSTRUMENT AND SOFTWARE USED	10
<b>6. ANTENNA PORT TEST RESULTS</b>	<b>11</b>
6.1. 20dB BANDWIDTH	11
6.2. TRANSMITTER FREQUENCY STABILITY	13
<b>7. RADIATED EMISSION TEST RESULTS</b>	<b>16</b>
7.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS	22
7.2. SPURIOUS EMISSIONS BELOW 1GHz AND ABOVE 30 MHz	23
7.3. SPURIOUS EMISSIONS BELOW 30 MHz	25
<b>8. AC POWER LINE CONDUCTED EMISSIONS</b>	<b>28</b>
<b>9. ANTENNA REQUIREMENTS</b>	<b>34</b>



## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Chengdu Vantron Technology Co., Ltd.  
Address: No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, ChengDu, China

### Manufacturer Information

Company Name: Chengdu Vantron Technology Co., Ltd.  
Address: No.5 GaoPeng Road, Hi-Tech Zone, Chengdu, SiChuan, ChengDu, China

### EUT Information

Product Name: Tablet  
Model Name: M081  
Sample Received Date: September 21, 2022  
Sample Status: Normal  
Sample ID: NA  
Date of Tested: September 21 to October 24, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:

Kebo Zhang  
Senior Project Engineer  
Approved By:

Stephen Guo  
Laboratory Manager

Checked By:

Denny Huang  
Senior Project Engineer



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p><b>IC (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note:

1. All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
2. The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
3. For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62dB
Radiation Emission test (include Fundamental emission) (9KHz-30MHz)	2.2dB
Radiation Emission test (include Fundamental emission) (30MHz-1GHz)	4.00dB
Radiation Emission test (1GHz to 26GHz) (include Fundamental emission)	5.78dB (1GHz-18Gz)
	5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

Product Name	Tablet	
Model	M081	
Product Description	Operation Frequency	13.56MHz
Modulation	ASK	
Power Supply	AC 120 V, 60 Hz	

### 5.2. MAXIMUM FIELD STRENGTH

Frequency (MHz)	Max Peak field strength (dB $\mu$ V/m)
13.56	9.63

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
13.56	coil antenna	0



## 5.4. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	Earphone	Apple	/	/
2	NFC Card	/	/	/

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	AC Adapter	TEKA	TEKA-TC050300US	Input: 100-240V~, 50/60Hz, 0.5A Max Output: DC 5V, 3A

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

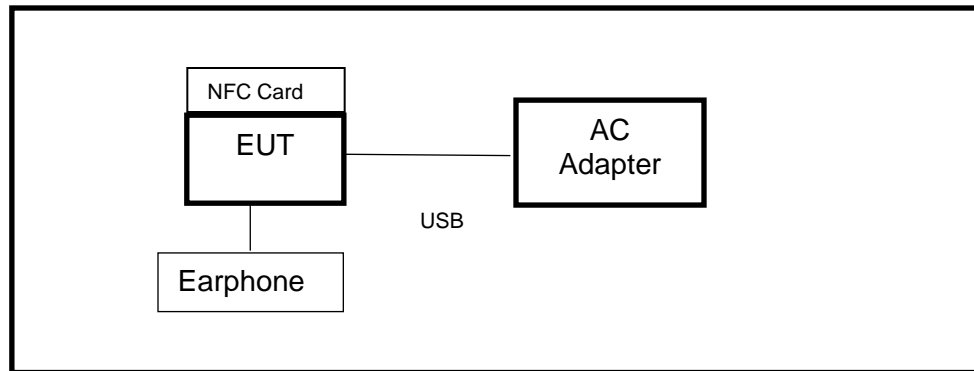

Note: NFC support both ISO /IEC 14443A and ISO /IEC 14443B. All lowest and highest data rates as per the standards are supported - 106 kbps, 212 kbps, 424 kbps and 848 kbps, all the modes had been tested, but only the worst data (ISO 14443A 106 kbps) was recorded in the report.

Note: Test was performed with tag and without tag, but only the worst case data (without tag) was recorded in the report.

## 5.5. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.30, 2021	Oct.29, 2022
Two-Line V-Network	R&S	ENV216	101983	Oct.30, 2021	Oct.29, 2022
Software					
Description		Manufacturer		Name	Version
Test Software for Conducted Emissions		Farad		EZ-EMC	Ver. UL-3A1

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Apr.02,2022	Apr.01,2023
Signal Analyzer	R&S	FSV40	101118	Oct.30, 2021	Oct.29, 2022
Software					
Description		Manufacturer		Name	Version
Tonsend SRD Test System		Tonsend		JS1120-3 RF Test System	2.6.77.0518

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Software					
Description		Manufacturer		Name	Version
Test Software for Radiated Emissions		Farad		EZ-EMC	Ver. UL-3A1

Other Instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal & Spectrum analyzer	R&S	FSW	1312.8000K26-103950-sj	Oct.31, 2021	Oct.30, 2022



## 6. ANTENNA PORT TEST RESULTS

### 6.1. 20dB BANDWIDTH

#### LIMITS


FCC Part15 (15.247) Subpart C RSS-247 ISSUE 2		
Section	Test Item	Limit
ANSI C63.10 Section 6.9.2	20dB% Bandwidth	For reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1 kHz. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

Note: Because the measured signal is CW or CW-like adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

#### TEST SETUP




#### TEST ENVIRONMENT

Temperature	25.1 °C	Relative Humidity	55 %
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

## RESULTS

Frequency (MHz)	20dB Bandwidth (kHz)
13.56	2.33

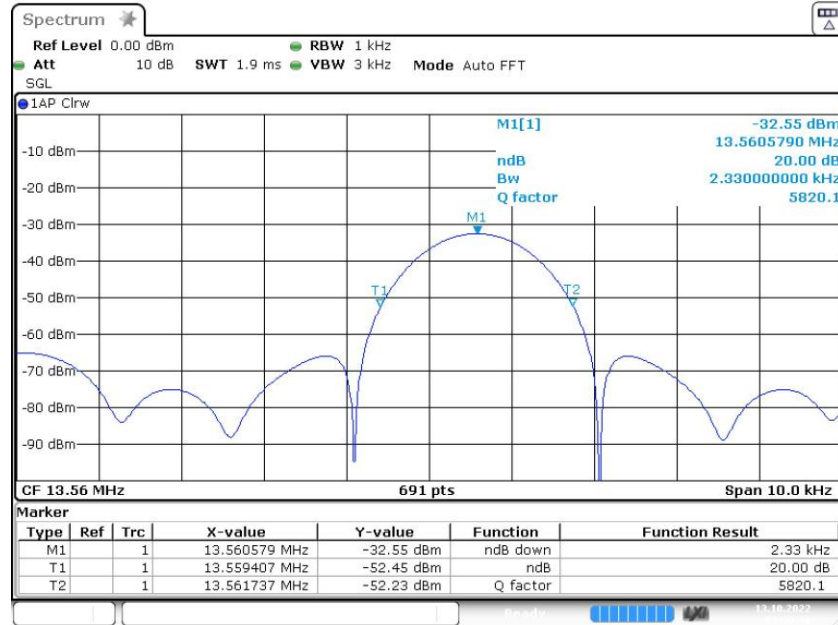

Date: 13.OCT.2022 09:46:48

## 6.2. TRANSMITTER FREQUENCY STABILITY

### LIMITS

CFR 47 FCC §15.225(e)

ISED RSS-210 Annex B B.5

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of 0 degrees to + 40 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.


### TEST SETUP AND PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	10 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

### TEST SETUP

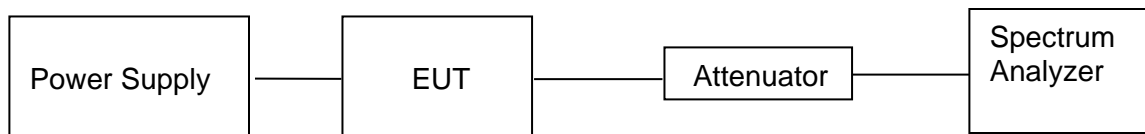

**TEST ENVIRONMENT**

Temperature	20°C	Relative Humidity	55%
Atmosphere Pressure	101kPa	Test Voltage	/

**TEST RESULTS**

Maximum frequency error of the EUT with variations in ambient temperature

Temperature (°C)	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
0	13.5605	13.5603	13.5610	13.5605
10	13.5607	13.5605	13.5595	13.5594
20	13.5598	13.5601	13.5605	13.5608
30	13.5592	13.5603	13.5602	13.5605
40	13.5609	13.5599	13.5596	13.5610
Maximum frequency error	0.0066%	0.0037%	0.0074%	0.0074%
Limit	0.01%			
Result	Pass	Pass	Pass	Pass



Maximum frequency error of the EUT with 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

Supply Voltage by adapter	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
138 Vac, 60Hz	13.5603	13.5605	13.5595	13.5601
120 Vac, 60Hz	13.5609	13.5601	13.5606	13.5605
102 Vac, 60Hz	13.5598	13.5610	13.5609	13.5595
Maximum frequency error	0.0066%	0.0074%	0.0066%	0.0037%
Limit	0.01%			
Result	Pass	Pass	Pass	Pass



## 7. RADIATED EMISSION TEST RESULTS

### LIMITS

Fundamental field strength

FCC Reference:	Part 15.225(a)(b)(c)(d) & 15.209(a)
ISED Canada Reference:	RSS-Gen 6.13 & RSS-210 B.6 & RSS-GEN Clause 8.9
Test Method Used:	ANSI C63.10 Sections 6.3, 6.4 and 6.5

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Field Strength (dB $\mu\text{V/m}$ )	Measured Distance (Meters)
13.553-13.567	15848	84	30
13.410-13.553/13.567-13.710	334	50.47	30
13.110-13.410/13.710-14.010	106	40.51	30

Note(s):

1. The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

2. The limit is specified at a test distance of 30 meters. However, as specified by FCC Section 15.31 (f)(2) / RSS-Gen Section 6.4, measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).





## Radiation Disturbance Test Limit for FCC (Class B) (9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30MHz.

## Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c




IC Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands <sup>Note 1</sup>		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

## TEST SETUP AND PROCEDURE

Below 30 MHz

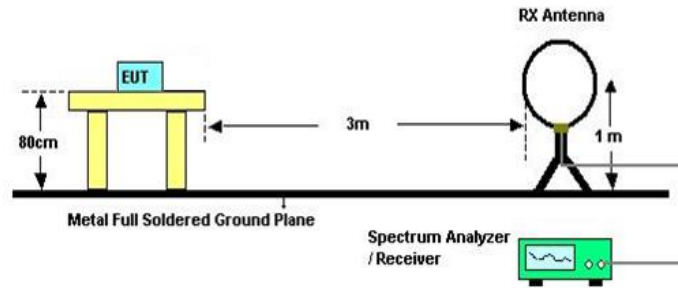


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

- The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
- The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
- The EUT was placed on a turntable with 80 cm above ground.
- The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
- The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
- For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
- Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
- The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377\Omega$ . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to  $Y-51.5 = Z$  dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

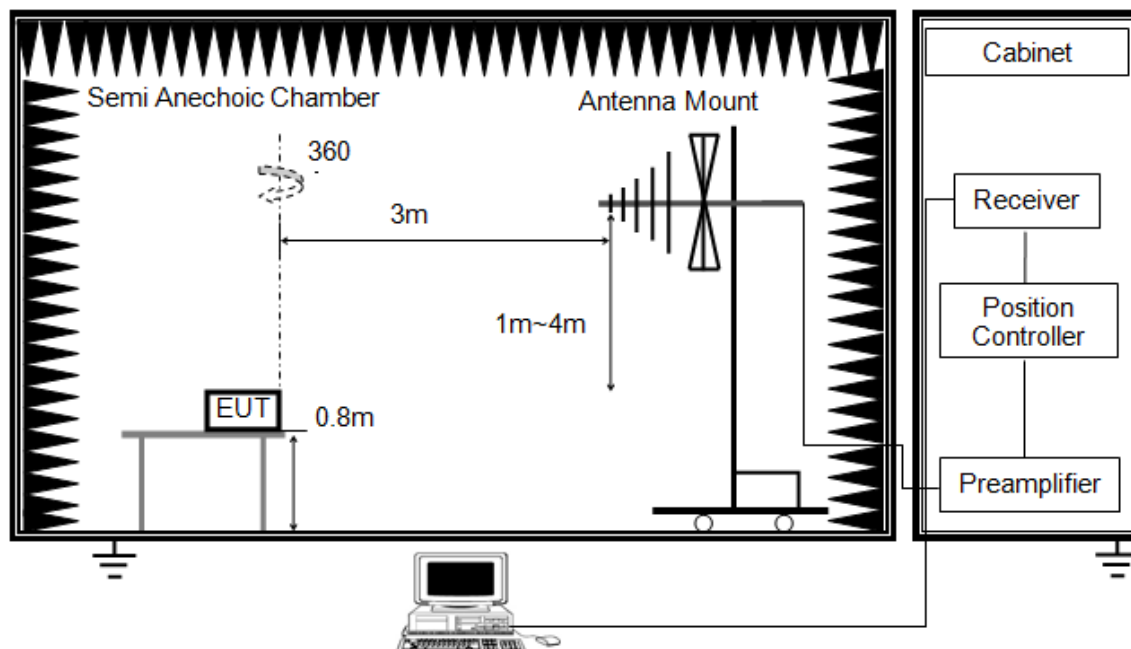


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

X axis, Y axis, Z axis positions:

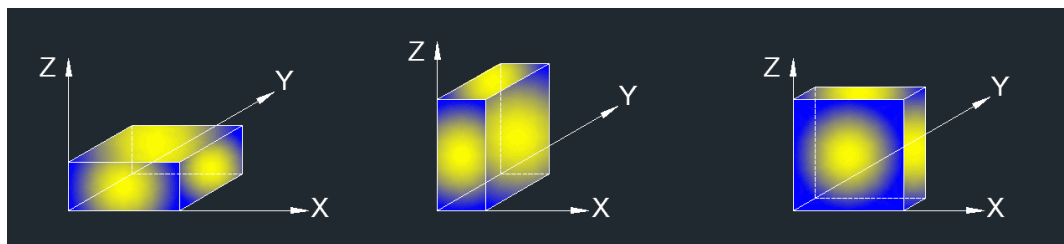

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


## TEST ENVIRONMENT

Temperature	24.4°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

## RESULTS

## 7.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS

### FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

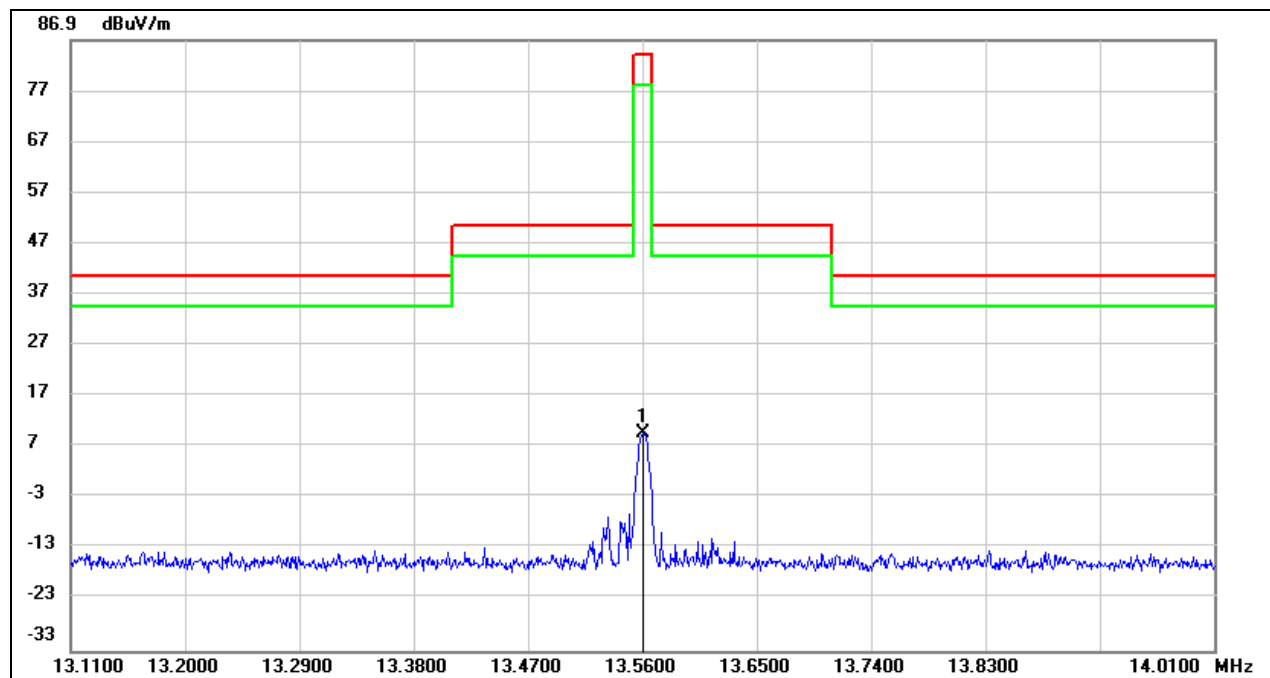


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13.5600	71.04	-61.41	9.63	84.00	-74.37	peak

Note: 1. Result Level = Read Level + Correct Factor.

2. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

## 7.2. SPURIOUS EMISSIONS BELOW 1GHz AND ABOVE 30 MHz

### SPURIOUS EMISSIONS (HORIZONTAL)

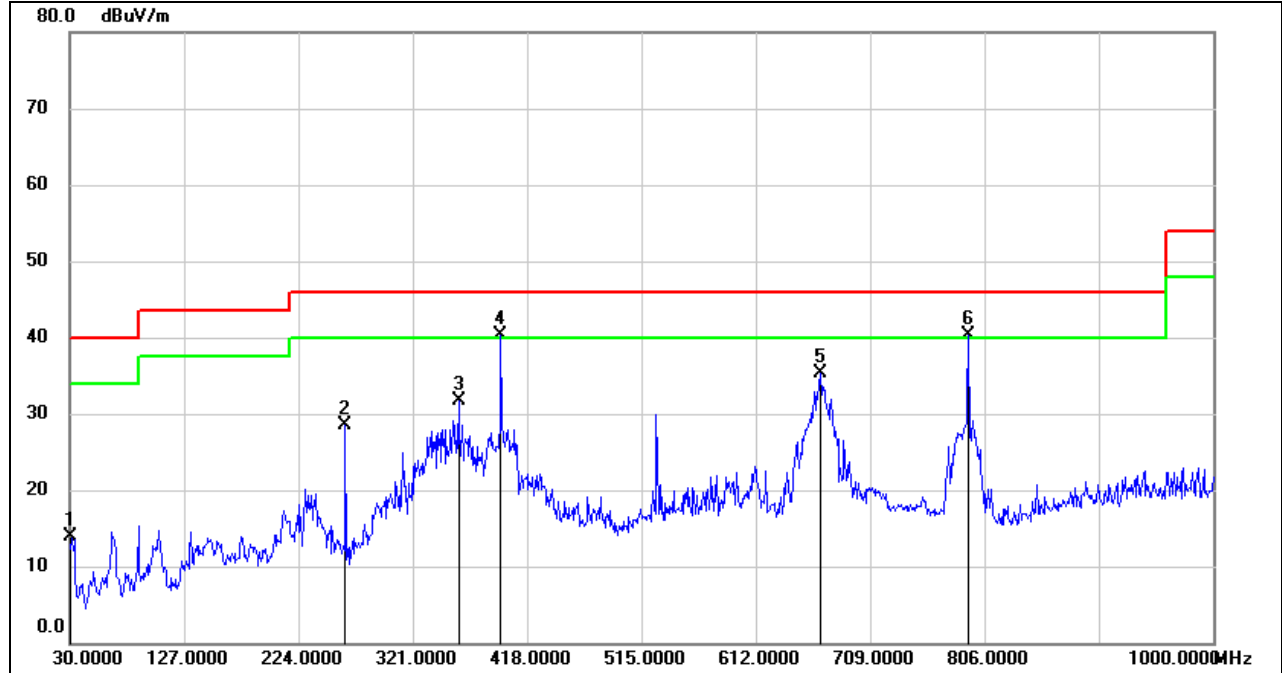


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	32.90	-18.94	13.96	40.00	-26.04	QP
2	263.7700	46.83	-18.25	28.58	46.00	-17.42	QP
3	359.8000	45.74	-14.10	31.64	46.00	-14.36	QP
4	395.6900	53.80	-13.41	40.39	46.00	-5.61	QP
5	667.2900	44.03	-8.65	35.38	46.00	-10.62	QP
6	792.4200	47.70	-7.37	40.33	46.00	-5.67	QP

Note: 1. Result Level = Read Level + Correct Factor.



**HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)**

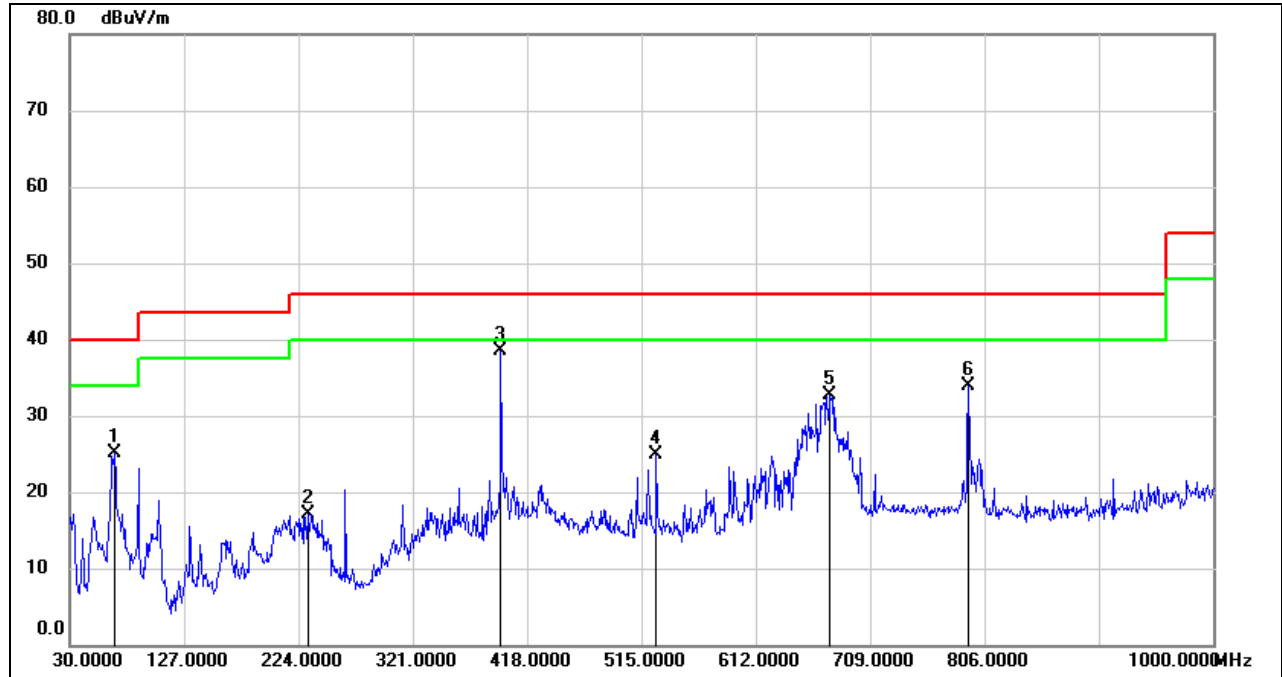


Note: 1. Result Level = Read Level + Correct Factor.



### 7.3. SPURIOUS EMISSIONS BELOW 30 MHz

#### SPURIOUS EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

0.09 kHz ~ 150 kHz

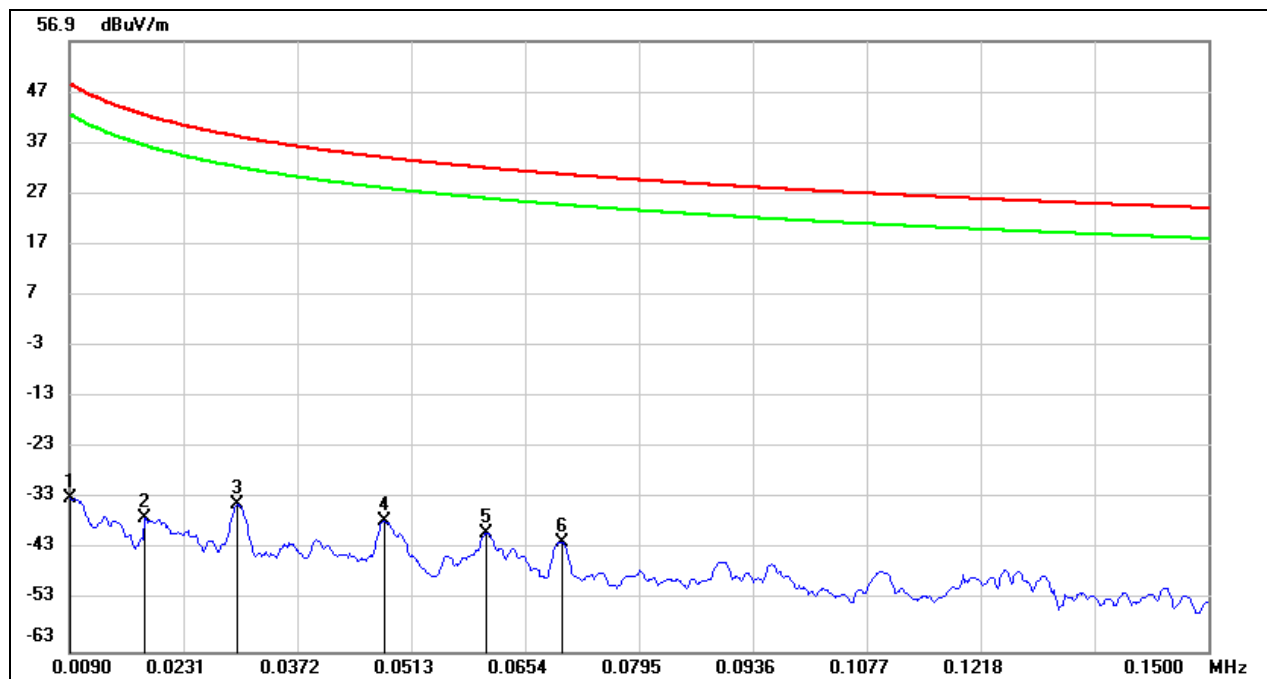


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0091	68.29	-101.21	-32.92	48.28	-81.20	peak
2	0.0183	64.24	-101.08	-36.84	42.35	-79.19	peak
3	0.0297	66.85	-101.11	-34.26	38.15	-72.41	peak
4	0.0478	63.77	-101.35	-37.58	34.01	-71.59	peak
5	0.0606	61.39	-101.17	-39.78	31.95	-71.73	peak
6	0.0700	59.45	-100.98	-41.53	30.70	-72.23	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

### 150 kHz ~ 490 kHz

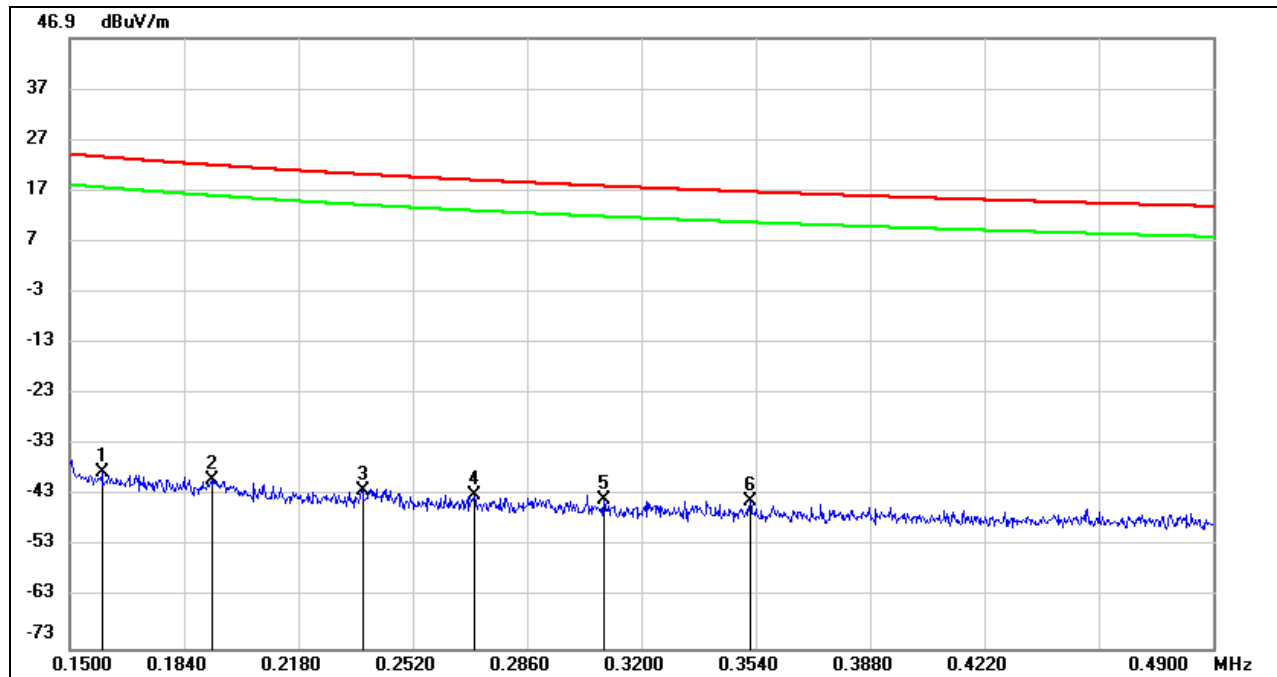


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1595	63.49	-101.88	-38.39	23.55	-61.94	peak
2	0.1922	61.85	-101.85	-40.00	21.93	-61.93	peak
3	0.2367	59.65	-101.80	-42.15	20.12	-62.27	peak
4	0.2704	58.82	-101.78	-42.96	18.96	-61.92	peak
5	0.3088	57.95	-101.78	-43.83	17.81	-61.64	peak
6	0.3523	57.61	-101.76	-44.15	16.66	-60.81	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

### 490 kHz ~ 30 MHz

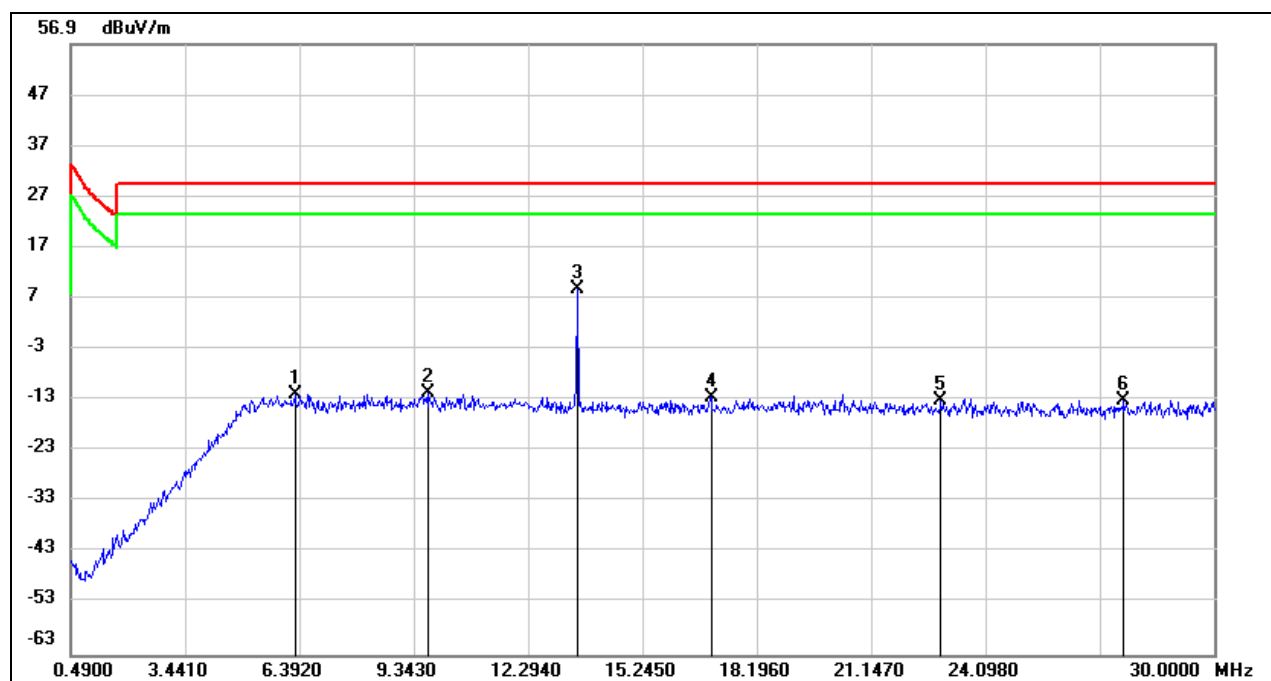

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6.2740	49.68	-61.74	-12.06	29.54	-41.60	peak
2	9.7266	49.53	-61.24	-11.71	29.54	-41.25	peak
3	13.5629	70.24	-61.41	8.83	/	/	Fundamental
4	17.0155	48.83	-61.33	-12.50	29.54	-42.04	peak
5	22.9470	47.90	-61.02	-13.12	29.54	-42.66	peak
6	27.6687	47.75	-60.80	-13.05	29.54	-42.59	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

4. About the Fundamental emission test result please refer to section 7.1.



## 8. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS


Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

## TEST SETUP AND PROCEDURE

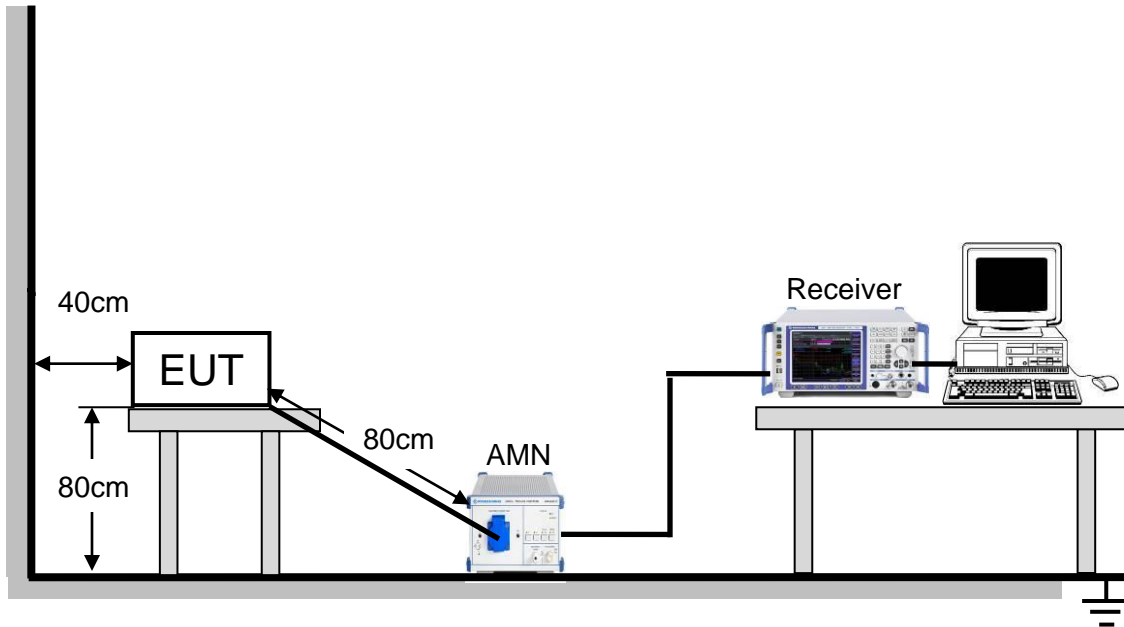


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was placed on the top of a rotating table 0.8 meters above the horizontal ground plane and being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
4. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. LISN at least 80 cm from nearest part of EUT chassis.
6. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.
7. The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

**TEST ENVIRONMENT**

Temperature	22°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V,60Hz

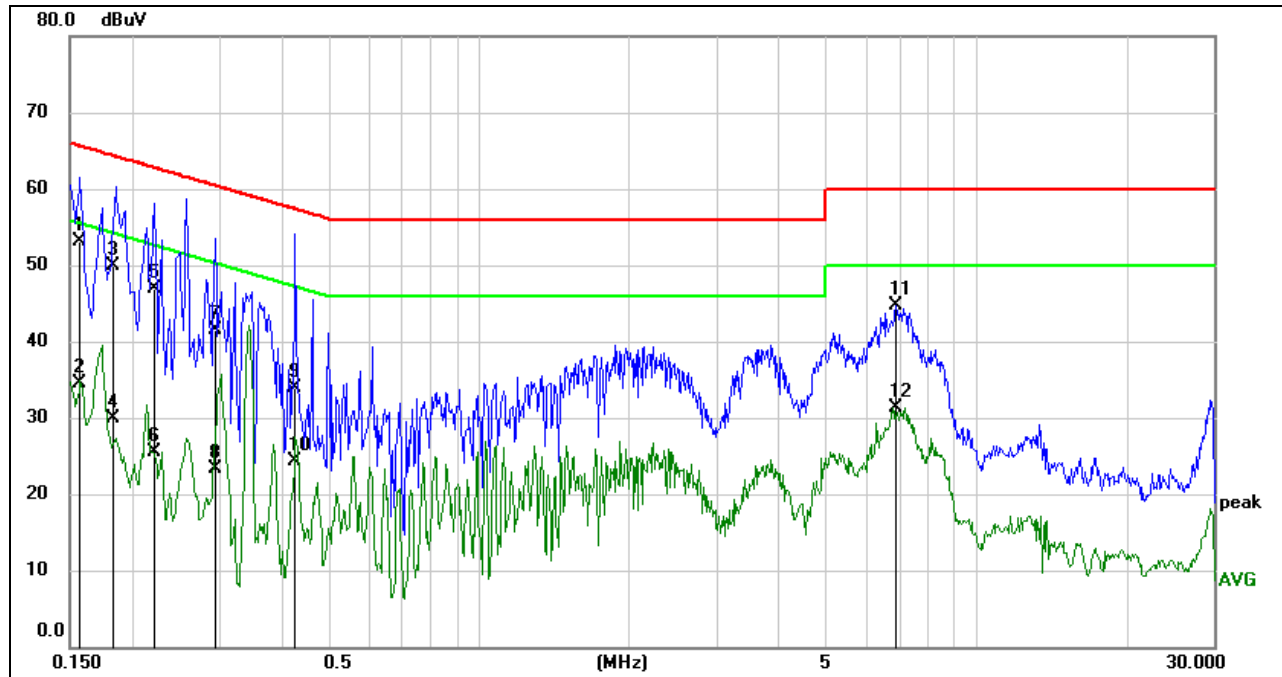
**LINE N RESULTS with modified sample (transmitter terminated into a dummy load)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1573	43.46	9.59	53.05	65.61	-12.56	QP
2	0.1573	25.01	9.59	34.60	55.61	-21.01	AVG
3	0.1831	40.38	9.59	49.97	64.34	-14.37	QP
4	0.1831	20.33	9.59	29.92	54.34	-24.42	AVG
5	0.2219	37.31	9.57	46.88	62.75	-15.87	QP
6	0.2219	15.96	9.57	25.53	52.75	-27.22	AVG
7	0.2935	32.02	9.50	41.52	60.42	-18.90	QP
8	0.2935	13.80	9.50	23.30	50.42	-27.12	AVG
9	0.4267	24.44	9.37	33.81	57.32	-23.51	QP
10	0.4267	15.02	9.37	24.39	47.32	-22.93	AVG
11	6.8779	35.12	9.63	44.75	60.00	-15.25	QP
12	6.8779	21.69	9.63	31.32	50.00	-18.68	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

### LINE L RESULTS with modified sample (transmitter terminated into a dummy load)

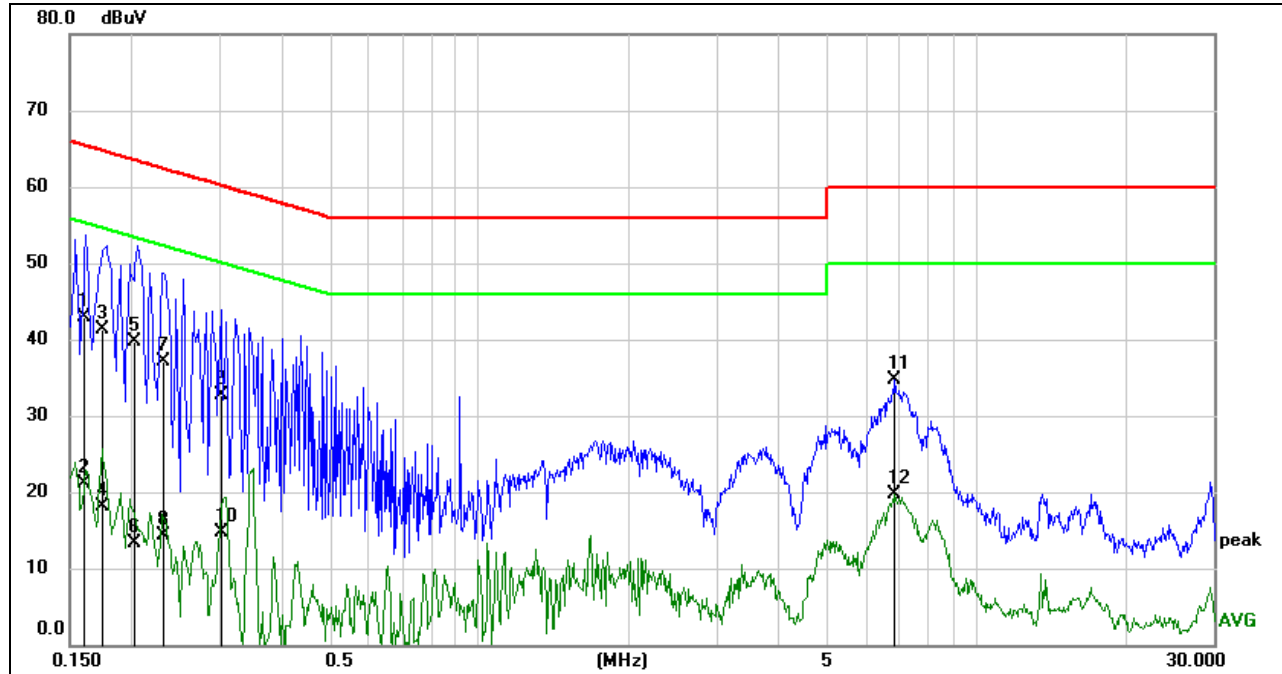


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1598	42.85	0.00	42.85	65.47	-22.62	QP
2	0.1598	21.11	0.00	21.11	55.47	-34.36	AVG
3	0.1743	41.22	0.00	41.22	64.75	-23.53	QP
4	0.1743	18.04	0.00	18.04	54.75	-36.71	AVG
5	0.2026	39.63	0.00	39.63	63.50	-23.87	QP
6	0.2026	13.31	0.00	13.31	53.50	-40.19	AVG
7	0.2321	37.16	0.00	37.16	62.37	-25.21	QP
8	0.2321	14.30	0.00	14.30	52.37	-38.07	AVG
9	0.3011	32.79	0.00	32.79	60.21	-27.42	QP
10	0.3011	14.74	0.00	14.74	50.21	-35.47	AVG
11	6.8738	34.75	0.00	34.75	60.00	-25.25	QP
12	6.8738	19.64	0.00	19.64	50.00	-30.36	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

### LINE N RESULTS with unmodified sample (antenna present)

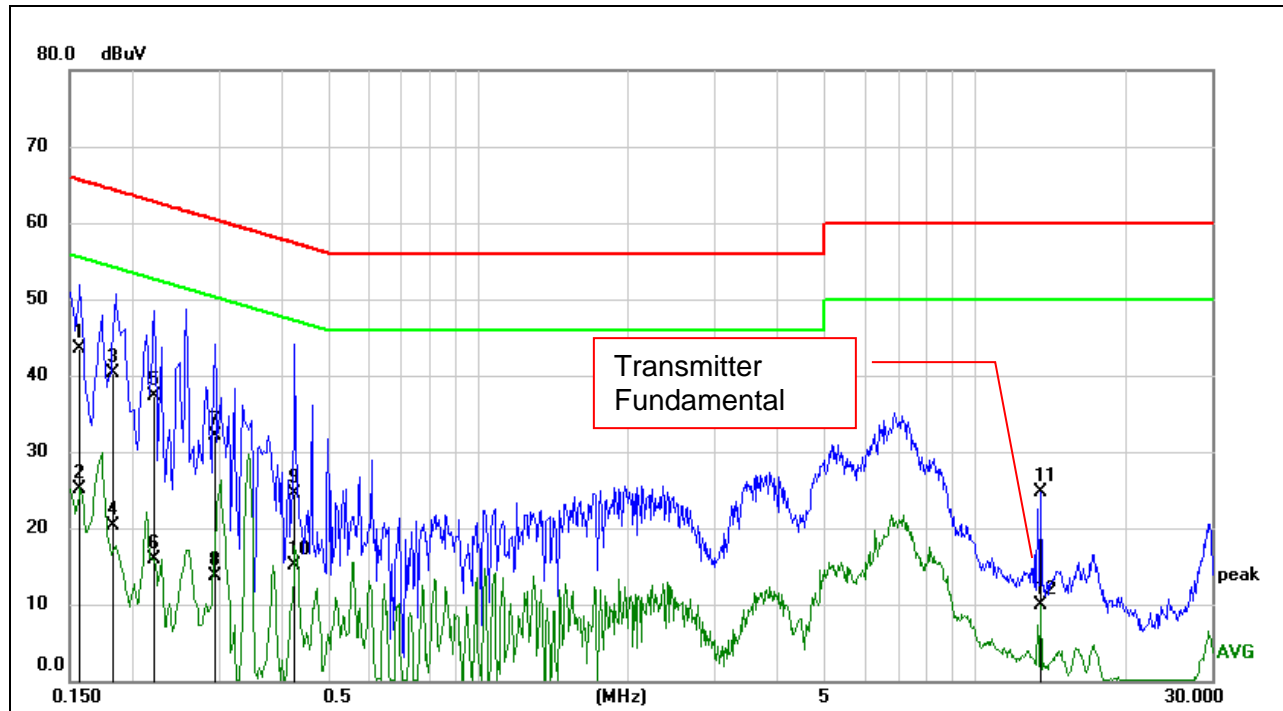


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1573	43.46	0.00	43.46	65.61	-22.15	QP
2	0.1573	25.01	0.00	25.01	55.61	-30.60	AVG
3	0.1831	40.38	0.00	40.38	64.34	-23.96	QP
4	0.1831	20.33	0.00	20.33	54.34	-34.01	AVG
5	0.2219	37.31	0.00	37.31	62.75	-25.44	QP
6	0.2219	15.96	0.00	15.96	52.75	-36.79	AVG
7	0.2935	32.02	0.00	32.02	60.42	-28.40	QP
8	0.2935	13.80	0.00	13.80	50.42	-36.62	AVG
9	0.4267	24.44	0.00	24.44	57.32	-32.88	QP
10	0.4267	15.02	0.00	15.02	47.32	-32.30	AVG
11	13.5579	24.66	0.00	24.66	60.00	-35.34	QP
12	13.5579	9.86	0.00	9.86	50.00	-40.14	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.



### LINE L RESULTS with unmodified sample (antenna present)

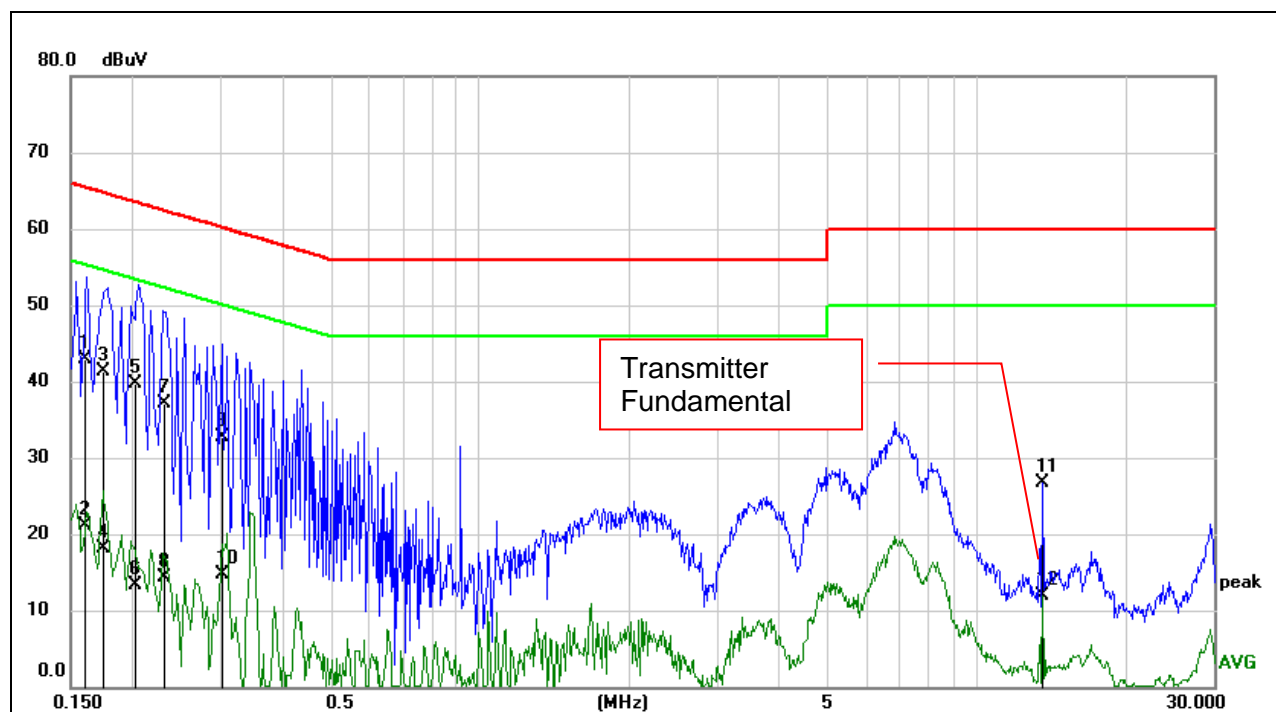

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1598	42.85	0.00	42.85	65.47	-22.62	QP
2	0.1598	21.11	0.00	21.11	55.47	-34.36	AVG
3	0.1743	41.22	0.00	41.22	64.75	-23.53	QP
4	0.1743	18.04	0.00	18.04	54.75	-36.71	AVG
5	0.2026	39.63	0.00	39.63	63.50	-23.87	QP
6	0.2026	13.31	0.00	13.31	53.50	-40.19	AVG
7	0.2321	37.16	0.00	37.16	62.37	-25.21	QP
8	0.2321	14.30	0.00	14.30	52.37	-38.07	AVG
9	0.3011	32.79	0.00	32.79	60.21	-27.42	QP
10	0.3011	14.74	0.00	14.74	50.21	-35.47	AVG
11	13.6019	26.68	0.00	26.68	60.00	-33.32	QP
12	13.6019	11.93	0.00	11.93	50.00	-38.07	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.



## 9. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies

---

**END OF REPORT**