



TEST REPORT FOR BLE TESTING

Report No.: SRTC2024-9004(F)-24081205(E)

Product Name: Smart Phone

Brand Name: SHARP

Applicant: SHARP CORPORATION

Manufacturer: SHARP CORPORATION

Specification: FCC Part 15 Subpart C (2023)

FCC ID: APYHRO00333

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388



1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Test Site 1:	15th Building, No.30 Shixing Street, Shijingshan District
Test Site 2:	No.80, Zhaojiachang, Beizang, Daxing District
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Designation Number:	CN1267
Registration number:	239125

1.3 Applicant's details

Company:	SHARP CORPORATION
Address:	1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan
City:	Osaka
Country or Region:	Japan
Contacted person:	Mr. Taihei Ohtsuka

1.4 Manufacturer's details

Company:	SHARP CORPORATION
Address:	1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan
City:	Osaka
Country or Region:	Japan
Contacted person:	Mr. Taihei Ohtsuka



1.5 Test Environment

Date of Receipt of test sample at SRTC:	2024/8/12
Testing Start Date:	2024/8/13
Testing End Date:	2024/9/14

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	40
Maximum Extreme	55	---
Minimum Extreme	-10	---

Normal Supply Voltage (V d.c.):	4.0
Maximum Extreme Supply Voltage (V d.c.):	4.3
Minimum Extreme Supply Voltage (V d.c.):	3.7

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Range:	2.402GHz~2.480GHz
Number of Channel:	40
Modulation Type:	GFSK
Equipment Class:	DTS
Channel Spacing:	2MHz
Data Rate:	LE 1Mbps/2Mbps LE Coded 125kbps/500kbps
Power Supply:	Battery/DC supply
Software Revision:	A718G
Hardware Revision:	DVT
IMEI:	Conducted: 004401231827854 Radiated: 004401231830239
Antenna type:	Refer to Note
Antenna connector:	Refer to Note



Antenna requirement (FCC Part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT is permanently attached.
- There are no provisions for connection to an external antenna.

Note: The antenna provides to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency band	Antenna type	Connector Type
N/A	N/A	ANT4:-4.3dBi ANT8:-1.7dBi	2.4GHz~2.4835GHz	PIFA	N/A

The antenna gain is provided by the customer and involved in the calculation and influence of the test results. Our laboratory takes the value declared by the customer as the criterion, and the customer is responsible for the antenna gain value. Manufacturers ensure that their designs will not be modified by the user or third party's arbitrary antenna parameters and performance.

2.2Description of Test Modes

40 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE ≥ 1G	RE<1G	PLC	APCM	-
GFSK	√	√	√	√	-

Where

RE ≥ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible



combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	19	GFSK	1

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
0 to 39	0, 19, 39	GFSK	1

2.3 Duty Cycle of Test Signal

Duty cycle of test signal is < 98 %, duty factor shall be considered.

Ant4

Modulation Type	Duty Cycle	Correction factor(dB)
GFSK (LE 1Mbps)	66.50%	1.77
GFSK (LE 2Mbps)	60.90%	2.15
GFSK (Coded 125K)	92.00%	0.36
GFSK (Coded 500K)	97.80%	0.10



Ant8

Modulation Type	Duty Cycle	Correction factor(dB)
GFSK (LE 1Mbps)	66.40%	1.78
GFSK (LE 2Mbps)	61.30%	2.13
GFSK (Coded 125K)	92.00%	0.36
GFSK (Coded 500K)	97.80%	0.10

2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:

Equipment:	Li-Ion
Manufacturer:	ATL
Model Number:	UBATIA321AFN2

3 REFERENCE SPECIFICATION

Specification	Version	Title
FCC Part15 Subpart C	2023	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 v05r02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

4 KEY TO NOTES AND RESULT CODES



Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.



5 RESULT SUMMARY

No.	Test case	Reference	Verdict	Test Site
1	6dB Bandwidth	15.247(a)(2)	Pass	1
2	Transmitter Output Power	15.247(b)(3))	Pass	1
3	Transmitter Power Spectral Density	15.247(e))	Pass	1
4	Conducted Out of band emission measurement	15.247(d)	Pass	1
5	Band-edge	15.247(d)	Pass	1
6	Antenna requirement	15.203	Pass(refer to section 2.1)	1

Test Site 1: 15th Building, No.30 Shixing Street, Shijingshan District


This Test Report Is Approved by: Mr. Peng Zhen 	Review by: Mr. Li Bin 
Tested and Issued by: Mr. LiangXisheng 	Approved date: 20240914



No.: SRTC2024-9004(F)-24081205(E)
FCC ID: APYHRO00333

No.	Test case	Reference	Verdict	Test Site
7	Band-edge	15.247(d)	Pass	2
8	Spurious Radiated Emissions	15.205/15.209/15.247(d)	Pass	2
9	AC Power line Conducted Emission	15.207	Pass	2

Test Site 2: No.80, Zhaojiachang, Beizang, Daxing District

This Test Report Is Approved by: Mr. Liu Wei 	Review by: Mr. Guo Yu 
Tested and Issued by: Mr. Dong Qifeng 	Approved date: 20240914



6 TEST RESULT

6.1 6dB Bandwidth

6.1.1 Test limit

Part15.247 (a) (2)

The minimum permissible 6dB bandwidth is 500 kHz

6.1.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2


KDB 558074 D01 v05r02 – Section 8.2

6.1.3 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

6.1.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.1.5 Test result

The test results are shown in Appendix A.



6.2 Transmitter Output Power

6.2.1 Test limit

Part15.247 (b) (3)

The maximum permissible conducted output power is 1 Watt.

6.2.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3

ANSI C63.10-2013 – Section 11.9.2.2.4

KDB 558074 D01 v05r02 – Section 8.3.1.3

6.2.3 Test Settings

Peak Power Measurement


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.2.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

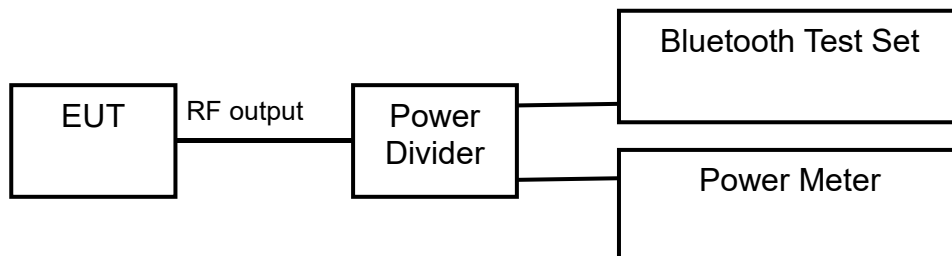

6.2.5 Test result

The test results are shown in Appendix A.



6.3 Transmitter Power Spectral Density

6.3.1 Test limit

Part 15.247 (e)

The maximum permissible power spectral density is 8.0 dBm in any 3 kHz band.

6.3.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD


KDB 558074 D01 v05r02 – Section 8.4

6.3.3 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.3.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.3.5 Test result

The test results are shown in Appendix A.

6.4 Conducted Out of band emission measurement

6.4.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.4.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.5

6.4.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 MHz
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

6.4.4 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.4.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.4.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.



6.5 Band-edge measurement

6.5.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.5.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

6.5.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 MHz
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

6.5.4 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.5.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.



6.6 Spurious Radiated Emissions

6.6.1 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.6.2 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits



6.6.3 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05r02– Section 12.2.7

For Radiated emission below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

- Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

For Radiated emission above 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.



For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.6.4 Test Settings

Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)

Frequency	Detector
<1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.5 Test Setup


For Radiated emission below 30MHz

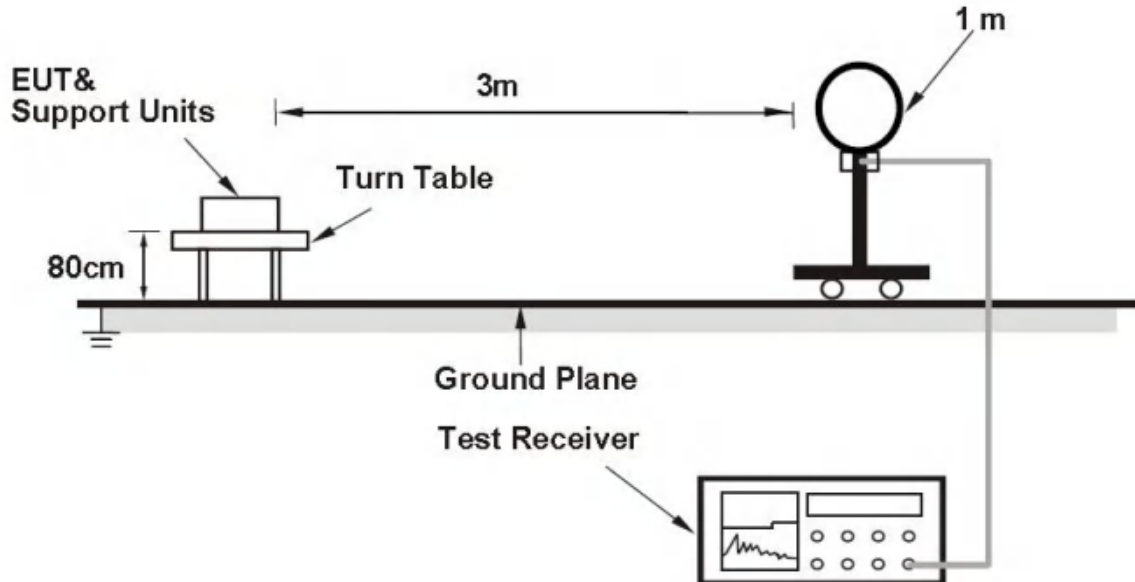

For Radiated emission 30MHz to 1GHz

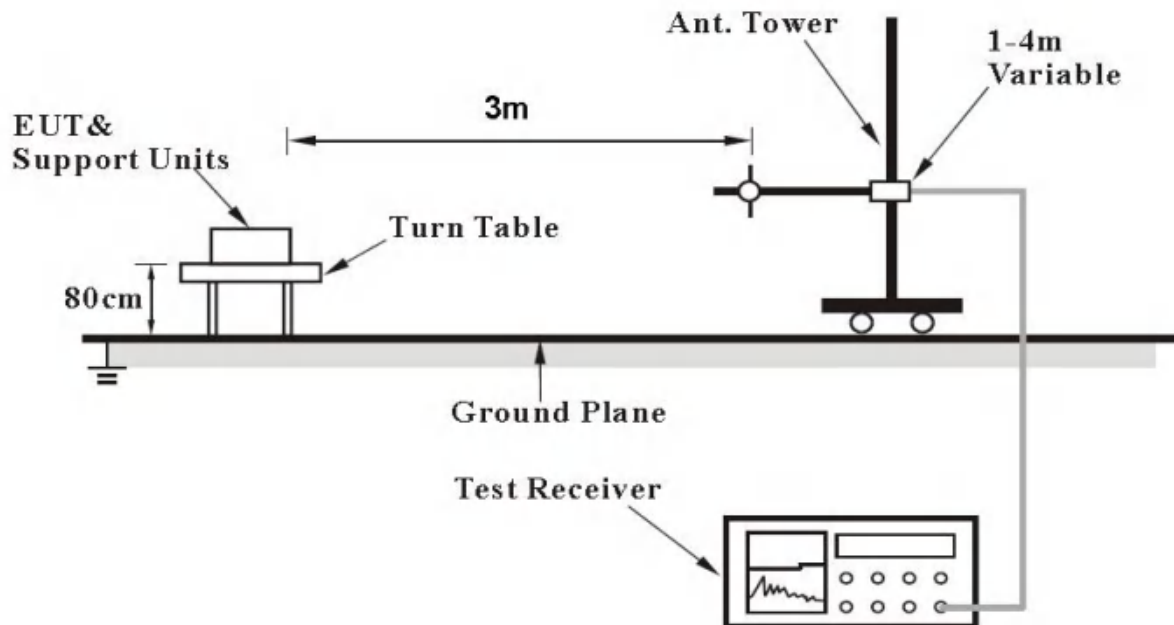

For Radiated emission above 1GHz

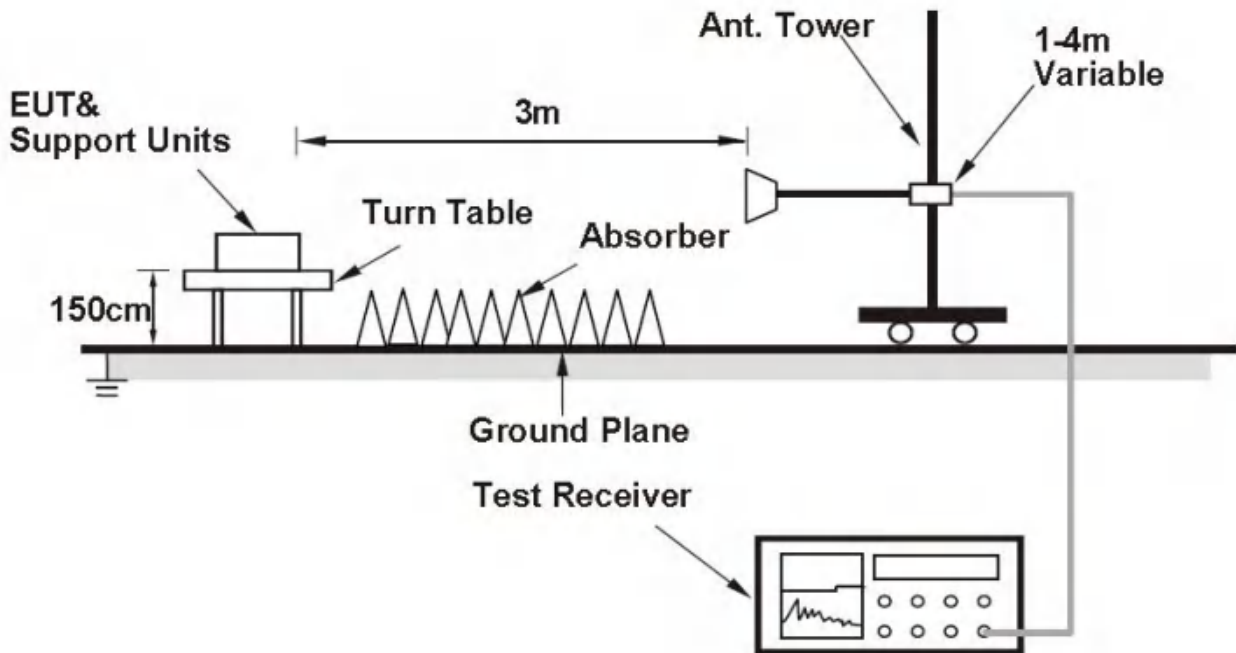

6.6.6 Test result

The test results are shown in Appendix B.



6.7 AC Power line Conducted Emission

6.7.1 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.7.2 Test Procedures


a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.
The EUT shall test under the power AC120V/60Hz.

6.7.3 Test Setup

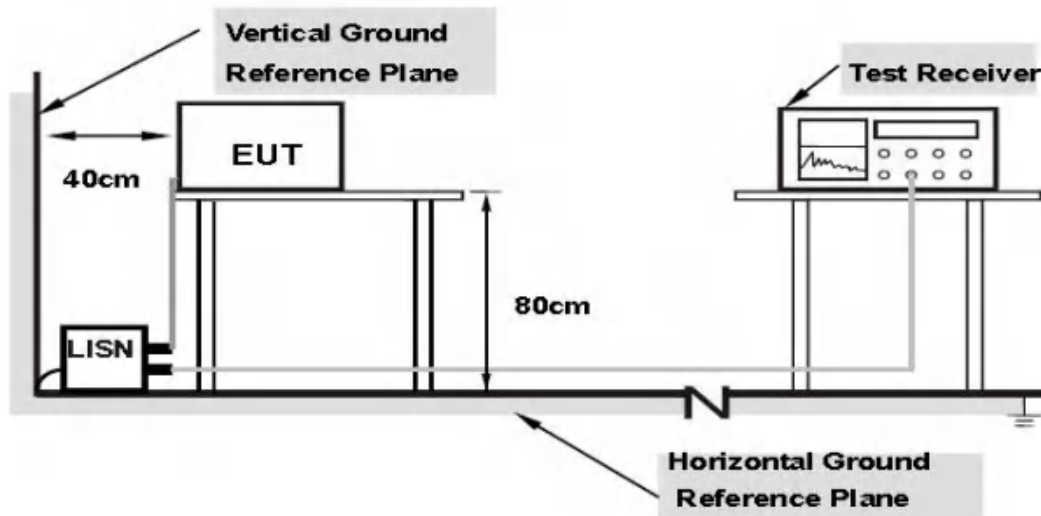

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.4 Test result

The test results are shown in AppendixB.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
6dB Bandwidth	3kHz	
Peak power output	0.67dB	
Transmitter Power Spectral Density	0.75dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB
Spurious Radiated Emissions	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	

Note 1: According to the test specification limit (The test results fully compliance with the test standard limit requirements)

Note 2: According to test specification limits plus uncertainties (The test results exceed the standard limit requirements and meet the standard requirements after adding the system uncertainty)

Note 3: Test operation mode is Note 1



8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer / FSV	ROHDE & SCHWARZ	101065	2024.06.21	2025.06.20
2.	Signal Analyzer / N9020A	Agilent	MY48010771	2024.03.06	2025.03.05
3.	Bluetooth Test Set / MT8852B	Anritsu	1329003	2024.06.21	2025.06.20
4.	Power Divider / 11667A	HP	19632	2024.06.21	2025.06.20
5.	Signal Generator / SMBV100A	R&S	260910	2024.06.21	2025.06.20
6.	Power Meter E4416A	Agilent	MY52370013	2024.03.06	2025.03.05
7.	Power Sensor E9323A	Agilent	MY52150008	2024.03.06	2025.03.05
8.	Temperature chamber / SH241	ESPEC	92013758	2024.06.21	2025.06.20
9.	Fully-Anechoic Chamber / 12.65m×8.03m×7.50m	FRANKONIA	----	----	----
10.	Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m	FRANKONIA	---	----	----
11.	Turn table Diameter:1m	FRANKONIA	----	----	----
12.	Turn table Diameter:5m	FRANKONIA	----	----	----
13.	Antenna master FAC(MA4.0)	MATURO	----	----	----
14.	Antenna master SAC(MA4.0)	MATURO	----	----	----
15.	Shielding room / 9.080m×5.255m×3.525m	FRANKONIA	----	----	----
16.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2024.06.21	2025.06.20
17.	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2024.06.21	2025.06.20
18.	Ultra log antenna / HL562	R&S	100016	2024.06.21	2025.06.20
19.	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2024.06.21	2025.06.20
20.	EMI test receiver / ESI 40	R&S	100015	2024.06.21	2025.06.20
21.	EMI test receiver / ESCS30	R&S	100029	2024.06.21	2025.06.20
22.	Receive antenna / HL562	R&S	100167	2024.06.21	2025.06.20
23.	AMN / ENV216	R&S	3560.6550.12	2024.06.21	2025.06.20
24.	WLAN AP WIA3300-20 (FCC ID: 2AHKT-WIA3300-20)	SKSpruce	8152017060700339	---	---
25.	Notebook E470c	Lenovo	PF10UZW7	---	---
26.	Loop Antenna	R&S	100340	2024.08.21	2025.08.20
27.	FCC auto test system / RT9200BW-2	Radiosky	V2.05	/	/
28.	EMI test software / EMC32	R&S	V10.20.01	/	/



APPENDIX A – TEST DATA OF CONDUCTED EMISSION

BLE (ANT4 Antenna gain:-4.3dBi)

1 Duty Cycle and Antenna Gain

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK (LE 1Mbps)	2402	Fig.1	66.50%	1.77	-4.30

Note:Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK (LE 2Mbps)	2402	Fig.2	60.90%	2.15	-4.30

Note:Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$


Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
Coded 125K	2402	Fig.3	92.00%	0.36	-4.30

Note:Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
Coded 500K	2402	Fig.4	97.80%	0.10	-4.30

Note:Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode: GFSK (LE 1Mbps)

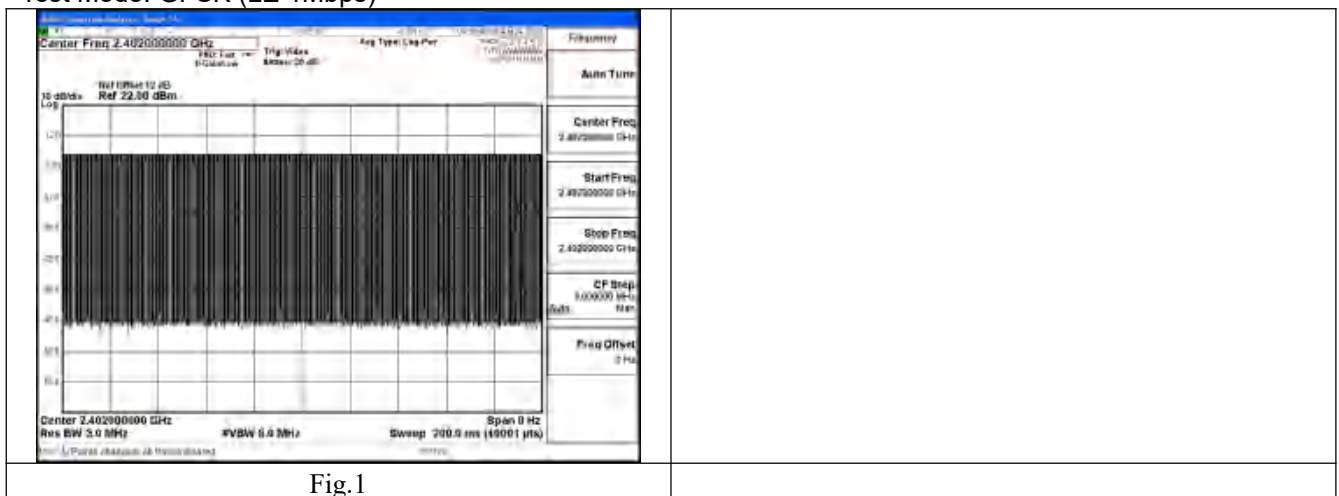



Test Mode: GFSK (LE 2Mbps)

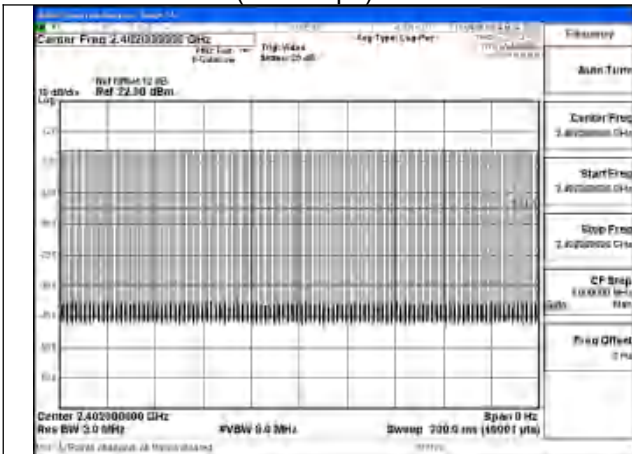


Fig.2

Test Mode: Coded 125K

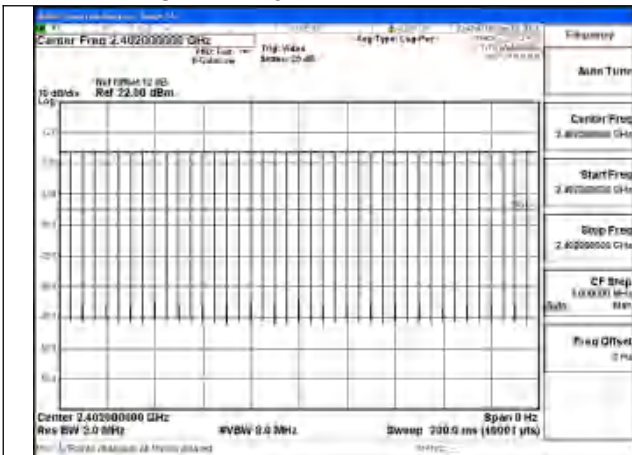


Fig.3

Test Mode: Coded 500K



Fig.4



2 EIRP Conducted Power

Modulation type	Conducted Peak Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	5.68	5.71	5.81
GFSK (LE 2Mbps)	5.68	5.82	5.96
Coded 125K	6.02	5.88	5.70
Coded 500K	5.90	5.88	5.66

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	5.28	5.24	5.48
GFSK (LE 2Mbps)	5.09	5.42	5.07
Coded 125K	6.13	5.26	5.61
Coded 500K	5.61	5.65	5.34

EIRP

Modulation type	Peak EIRP(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	1.38	1.41	1.51
GFSK (LE 2Mbps)	1.38	1.52	1.66
Coded 125K	1.72	1.58	1.40
Coded 500K	1.60	1.58	1.36

Modulation type	Average EIRP(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	0.98	0.94	1.18
GFSK (LE 2Mbps)	0.79	1.12	0.77
Coded 125K	1.83	0.96	1.31
Coded 500K	1.31	1.35	1.04

EIRP (dBm)=Conducted Power(dBm)+Antenna Gain(dBi)



**3 Occupied Bandwidth
6dB Bandwidth**

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
GFSK (LE 1Mbps)	2402	678.5
GFSK (LE 1Mbps)	2440	678.3
GFSK (LE 1Mbps)	2480	685.8


Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
GFSK (LE 2Mbps)	2402	1295.6
GFSK (LE 2Mbps)	2440	1369.0
GFSK (LE 2Mbps)	2480	1331.6

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
Coded 125K	2402	706.4
Coded 125K	2440	706.5
Coded 125K	2480	703.7

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
Coded 500K	2402	647.0
Coded 500K	2440	648.0
Coded 500K	2480	646.4




Test Mode: GFSK (LE 1Mbps)

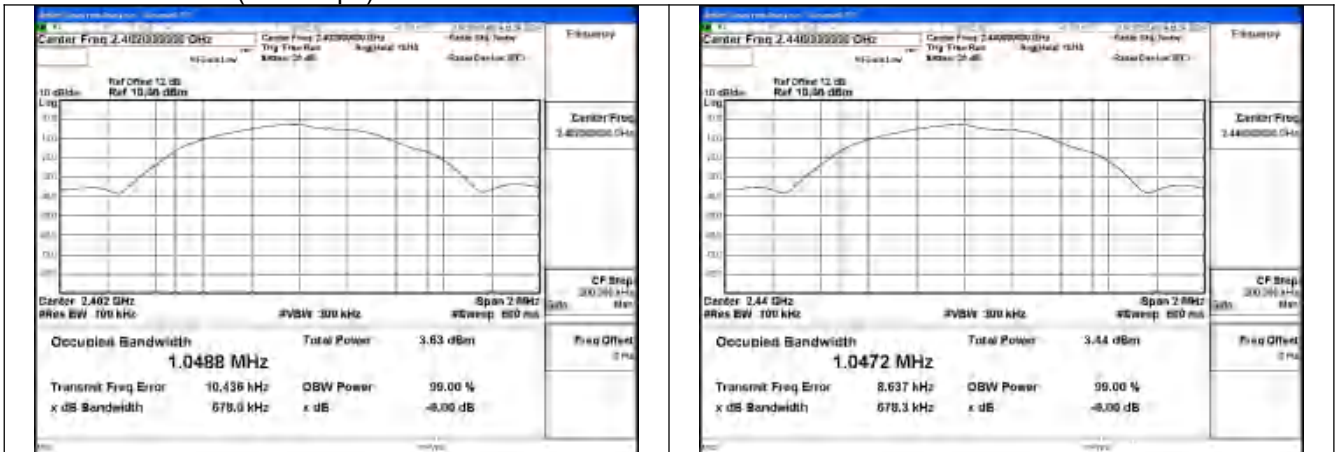

Test Mode:GFSK (LE 1Mbps) 2402MHz


Test Mode:GFSK (LE 1Mbps) 2440MHz

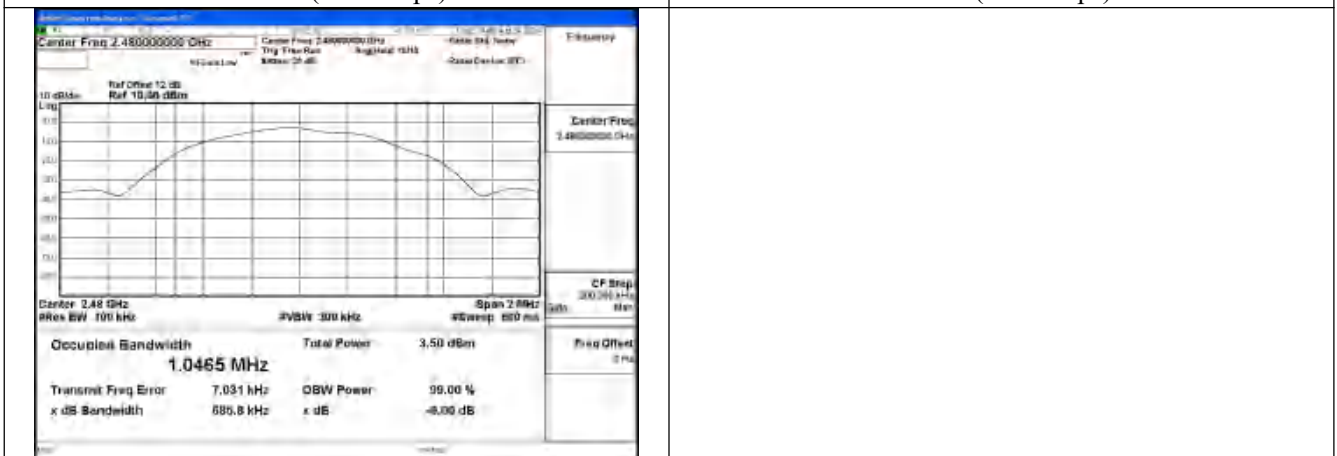


Test Mode:GFSK (LE 1Mbps) 2480MHz




Test Mode: GFSK (LE 2Mbps)

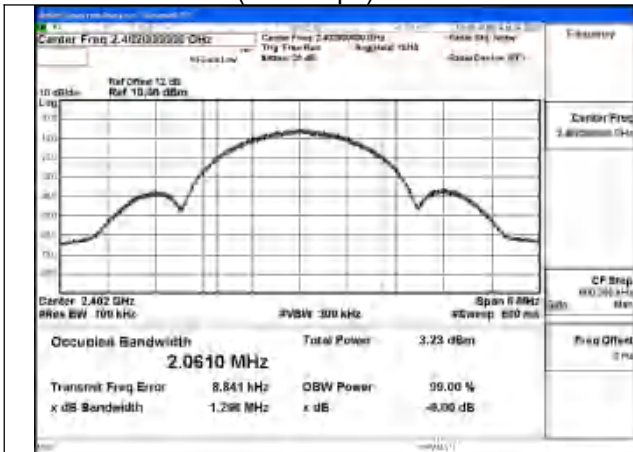

Test Mode:GFSK (LE 2Mbps) 2402MHz

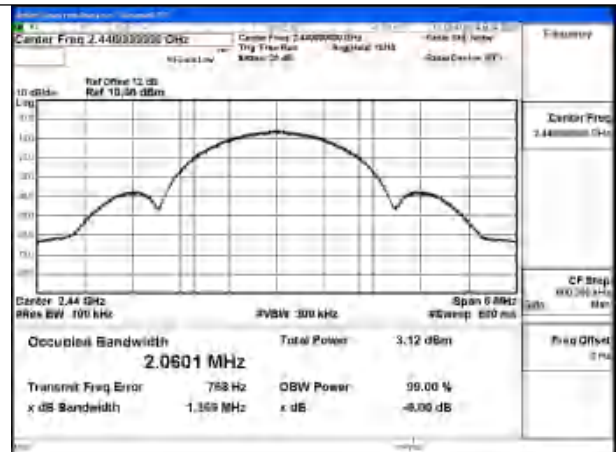


Test Mode:GFSK (LE 2Mbps) 2440MHz

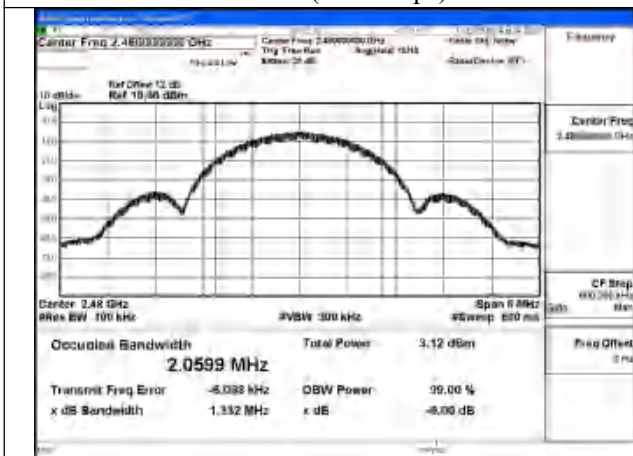


Test Mode:GFSK (LE 2Mbps) 2480MHz




Test Mode: Coded 125K

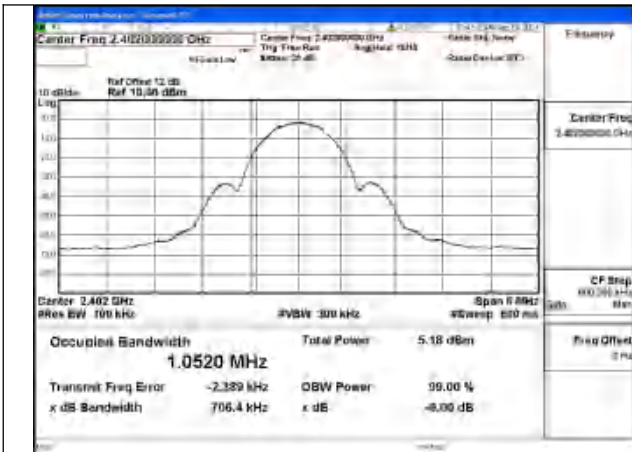

Test Mode:Coded 125K 2402MHz

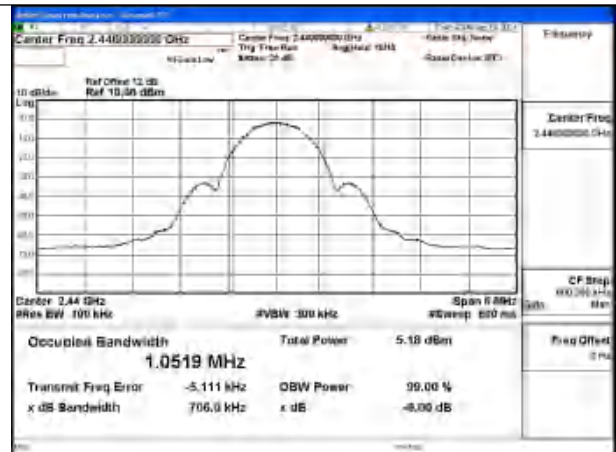


Test Mode:Coded 125K 2440MHz

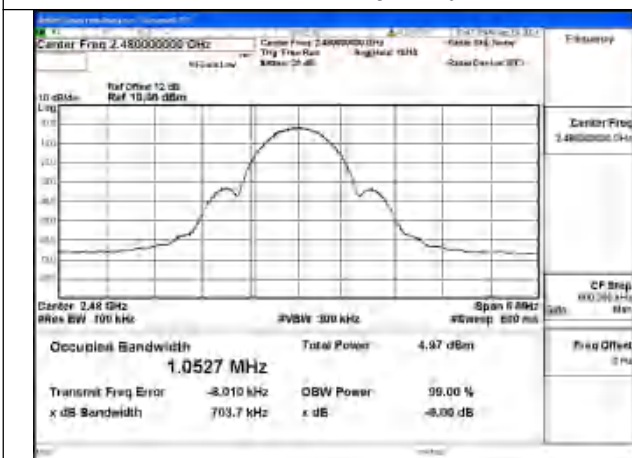


Test Mode:Coded 125K 2480MHz



Test Mode: Coded 500K

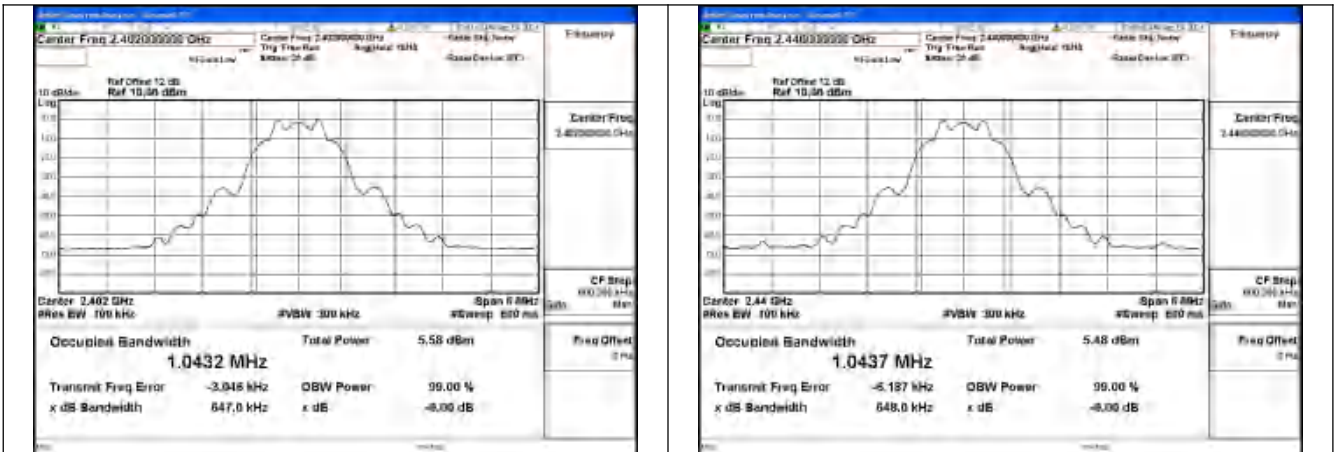


Test Mode:Coded 500K 2402MHz

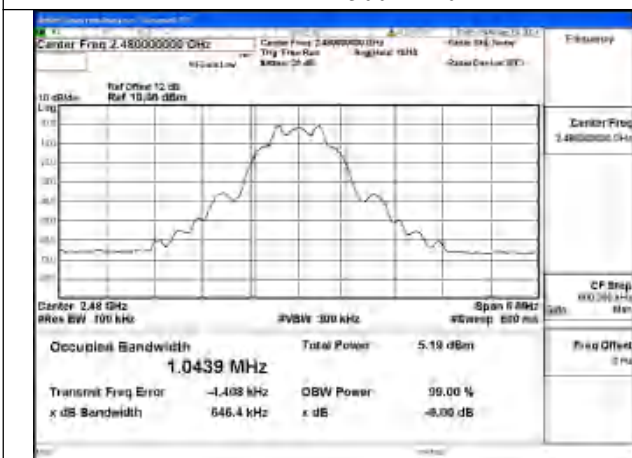

Test Mode:Coded 500K 2480MHz

Test Mode:Coded 500K 2440MHz

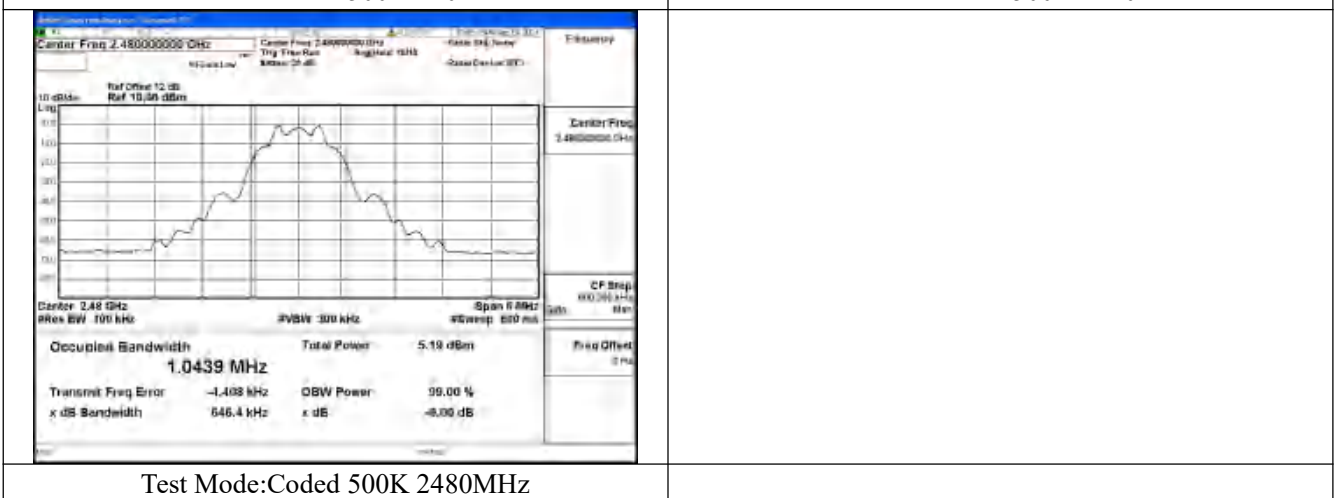



99% Bandwidth

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK (LE 1Mbps)	2402	1024.9
GFSK (LE 1Mbps)	2440	1023.8
GFSK (LE 1Mbps)	2480	1023.4




Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK (LE 2Mbps)	2402	2049.0
GFSK (LE 2Mbps)	2440	2047.9
GFSK (LE 2Mbps)	2480	2049.6

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
Coded 125K	2402	1030.6
Coded 125K	2440	1029.5
Coded 125K	2480	1030.8

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
Coded 500K	2402	1022.3
Coded 500K	2440	1021.7
Coded 500K	2480	1024.2




Test Mode: GFSK (LE 1Mbps)

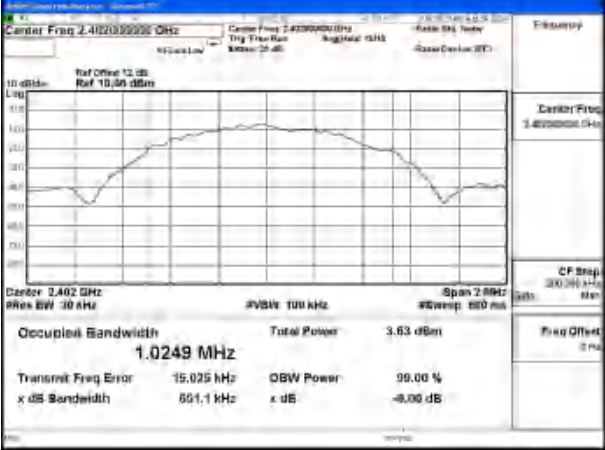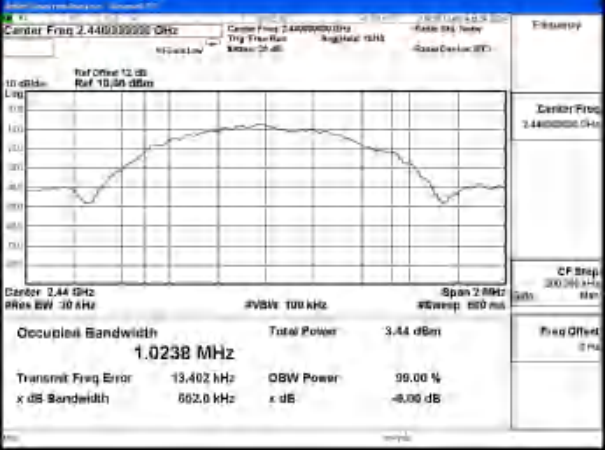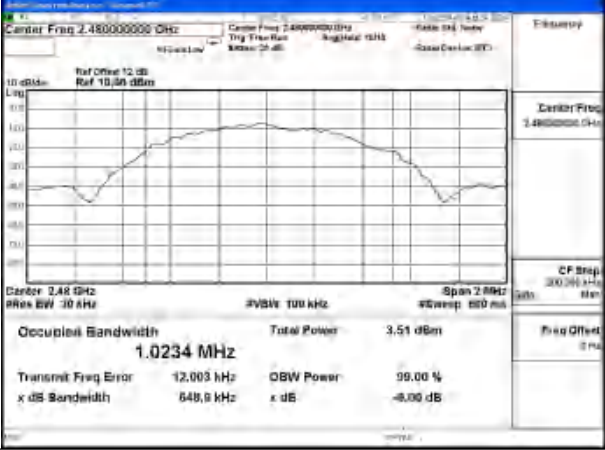
 Center Freq: 2.402000000 GHz Occupied Bandwidth: 1.0249 MHz Total Power: 3.63 dBm Transmit Freq Error: 15.025 kHz x dB Bandwidth: 661.1 kHz OBW Power: 99.00 % x dB: -6.00 dB	 Center Freq: 2.440000000 GHz Occupied Bandwidth: 1.0238 MHz Total Power: 3.44 dBm Transmit Freq Error: 13.402 kHz x dB Bandwidth: 662.0 kHz OBW Power: 99.00 % x dB: -6.00 dB
Test Mode:GFSK (LE 1Mbps) 2402MHz	Test Mode:GFSK (LE 1Mbps) 2440MHz
 Center Freq: 2.480000000 GHz Occupied Bandwidth: 1.0234 MHz Total Power: 3.51 dBm Transmit Freq Error: 12.003 kHz x dB Bandwidth: 648.6 kHz OBW Power: 99.00 % x dB: -6.00 dB	
Test Mode:GFSK (LE 1Mbps) 2480MHz	




Test Mode: GFSK (LE 2Mbps)

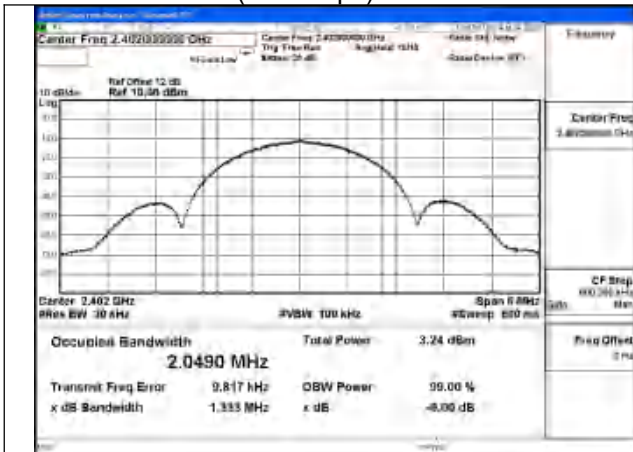

Test Mode:GFSK (LE 2Mbps) 2402MHz

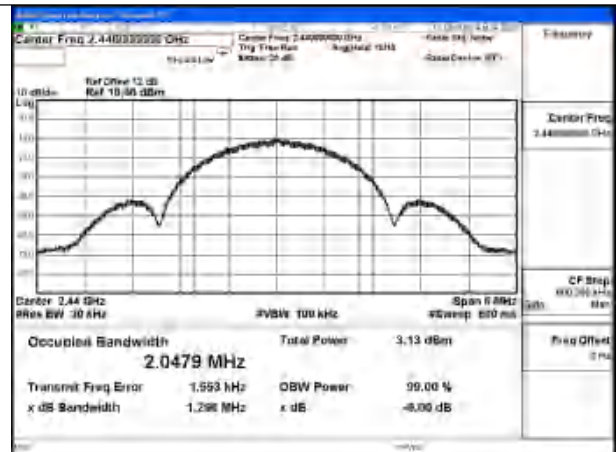


Test Mode:GFSK (LE 2Mbps) 2440MHz

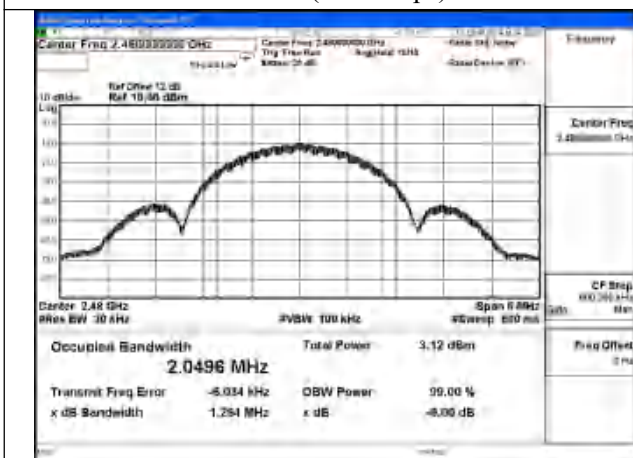


Test Mode:GFSK (LE 2Mbps) 2480MHz




Test Mode: Coded 125K

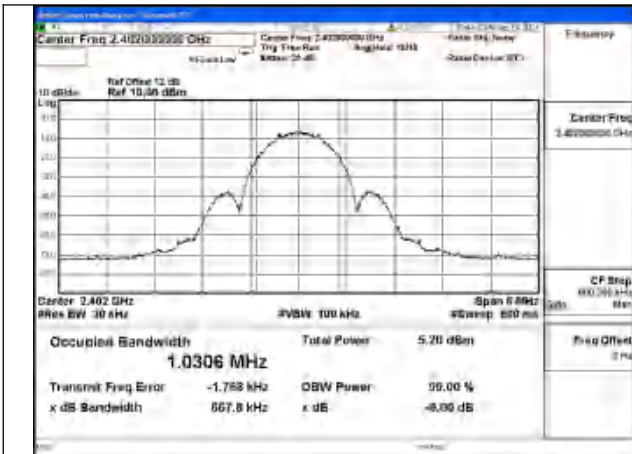

Test Mode:Coded 125K 2402MHz

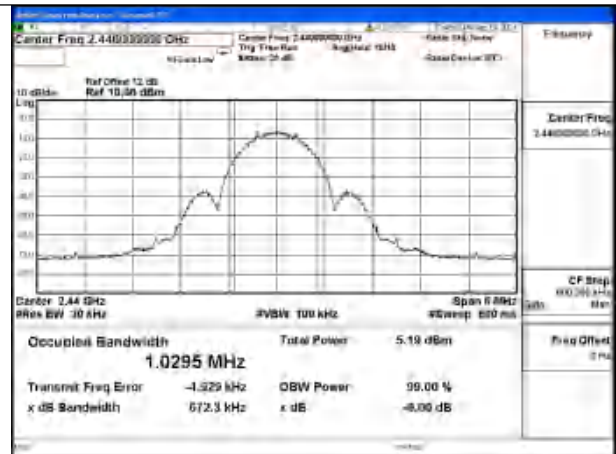


Test Mode:Coded 125K 2440MHz

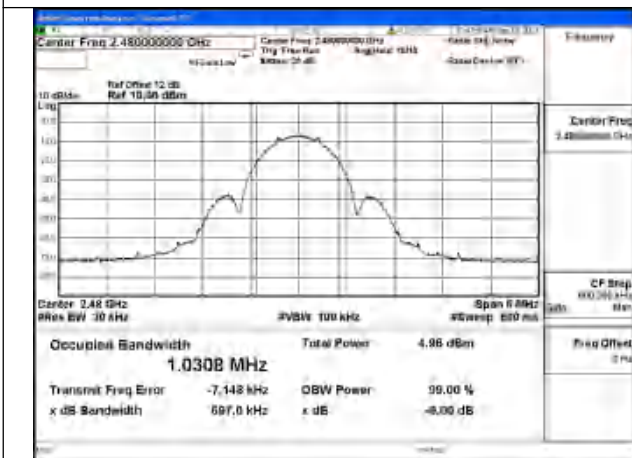

Test Mode:Coded 125K 2480MHz




Test Mode: Coded 500K

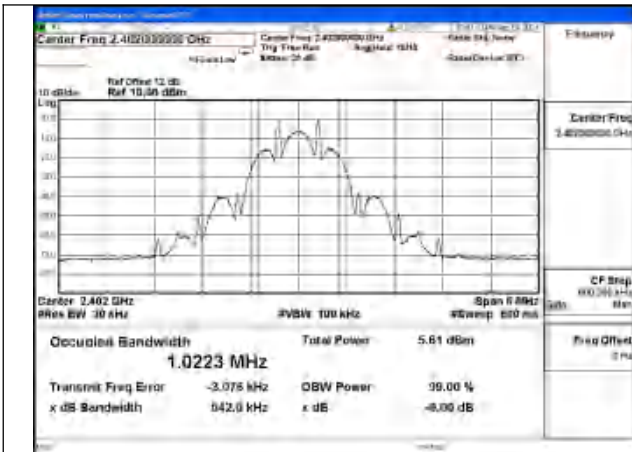

Test Mode:Coded 500K 2402MHz



Test Mode:Coded 500K 2440MHz

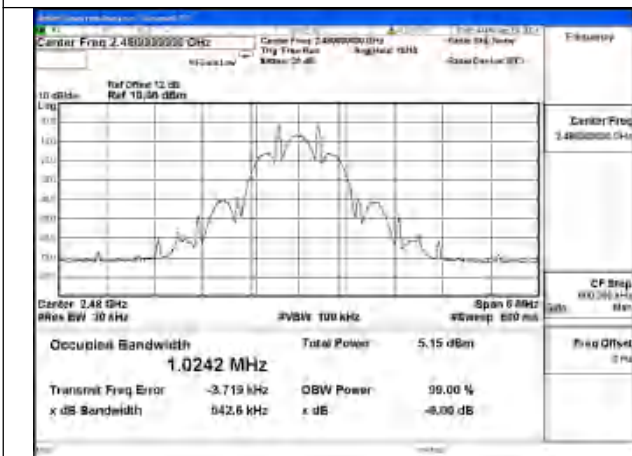

Test Mode:Coded 500K 2480MHz



4 Transmitter PowerSpectral Density

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
GFSK (LE 1Mbps)	2402	0	-9.8
GFSK (LE 1Mbps)	2440	19	-10.0
GFSK (LE 1Mbps)	2480	39	-9.9

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
GFSK (LE 2Mbps)	2402	0	-13.5
GFSK (LE 2Mbps)	2440	19	-13.6
GFSK (LE 2Mbps)	2480	39	-13.6

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
Coded 125K	2402	0	-1.0
Coded 125K	2440	19	-0.9
Coded 125K	2480	39	-1.2


Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
Coded 500K	2402	0	-0.6
Coded 500K	2440	19	-0.7
Coded 500K	2480	39	-0.9




Test Mode: GFSK (LE 1Mbps)




Test Mode:GFSK (LE 1Mbps) 2402MHz

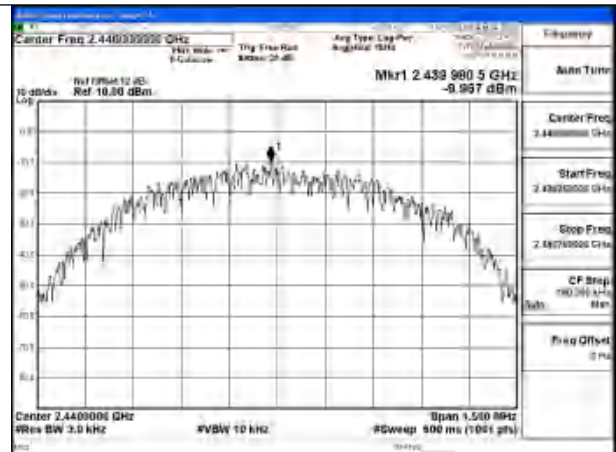

Test Mode:GFSK (LE 1Mbps) 2440MHz

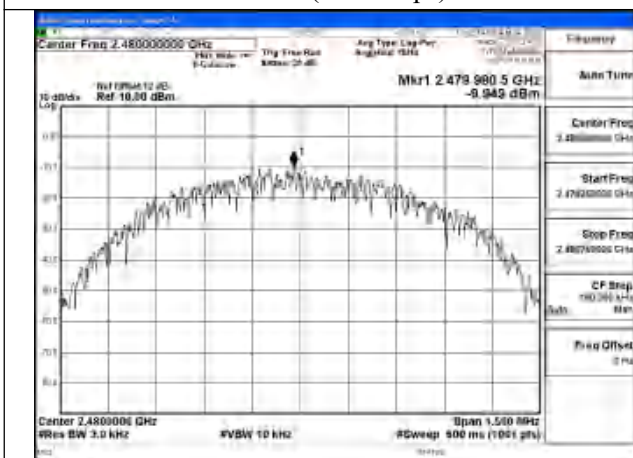


Test Mode:GFSK (LE 1Mbps) 2480MHz






Test Mode: GFSK (LE 2Mbps)

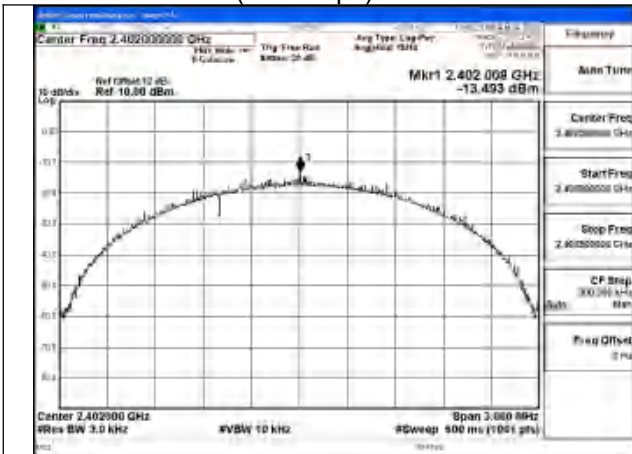

Test Mode:GFSK (LE 2Mbps) 2402MHz



Test Mode:GFSK (LE 2Mbps) 2440MHz

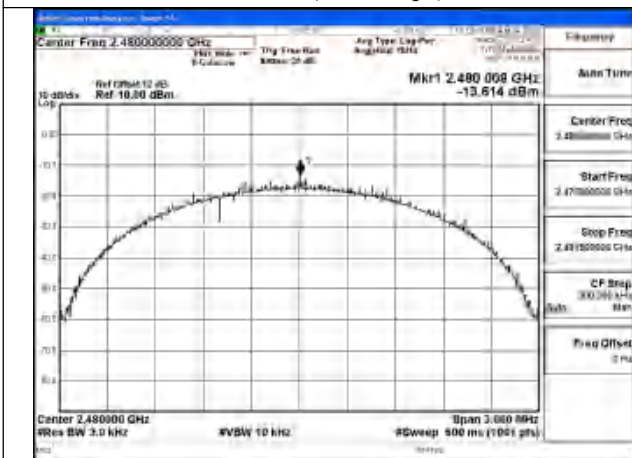


Test Mode:GFSK (LE 2Mbps) 2480MHz







Test Mode: Coded 125K

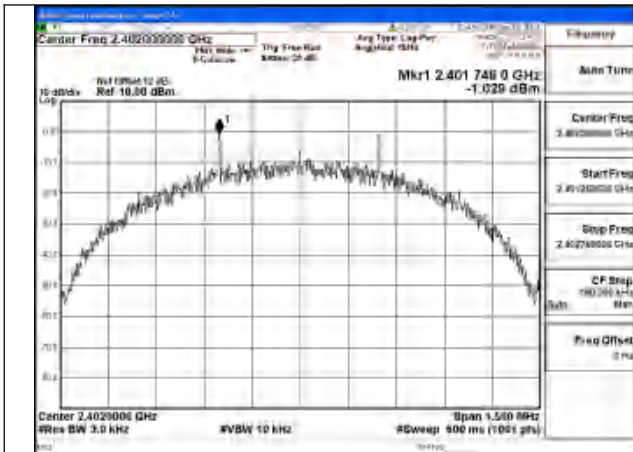

Test Mode:Coded 125K 2402MHz

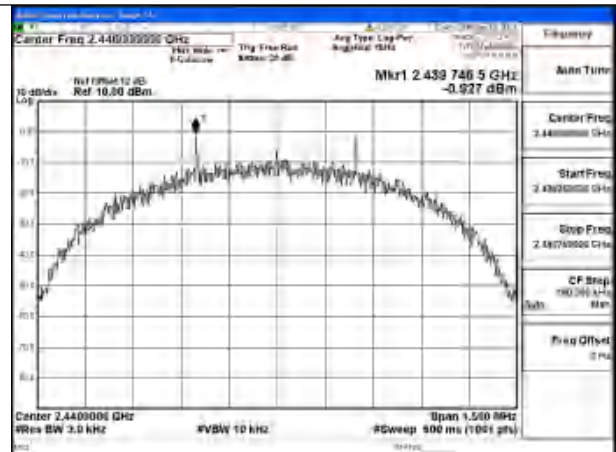


Test Mode:Coded 125K 2440MHz

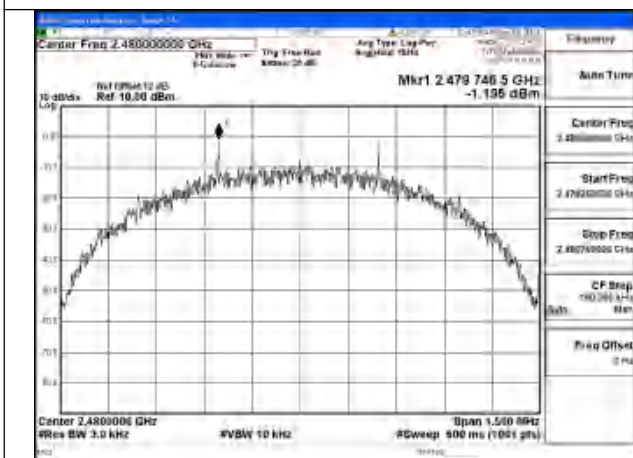


Test Mode:Coded 125K 2480MHz




Test Mode: Coded 500K

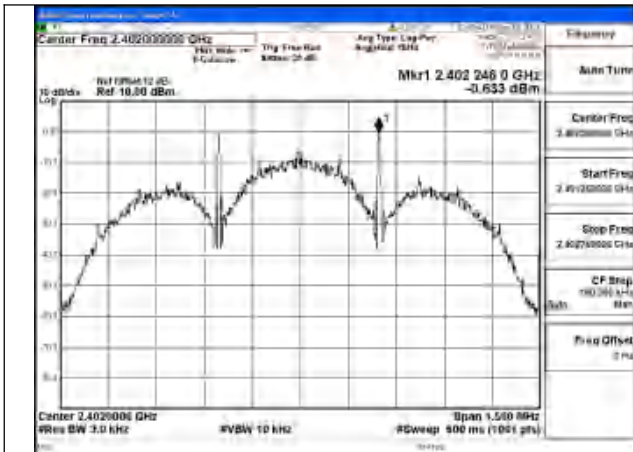

Test Mode:Coded 500K 2402MHz

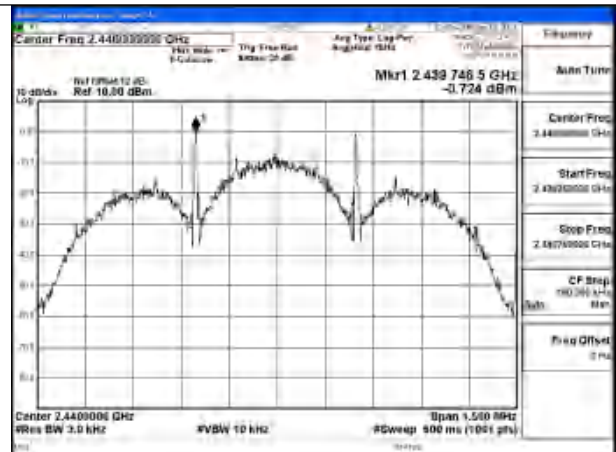

Test Mode:Coded 500K 2440MHz

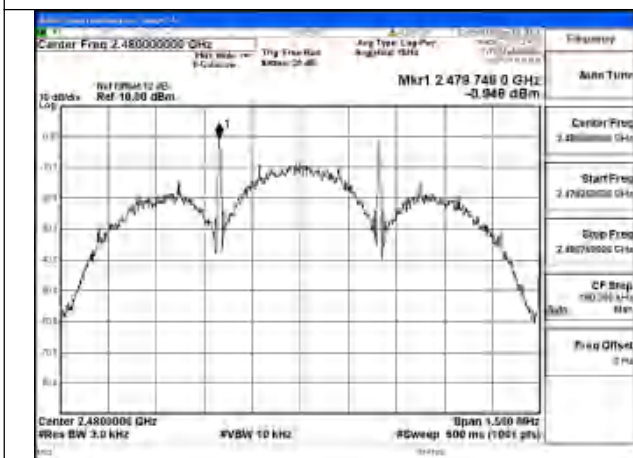


Test Mode:Coded 500K 2480MHz






5 Conducted Out of band emission measurement

Test Mode: GFSK (LE 1Mbps)

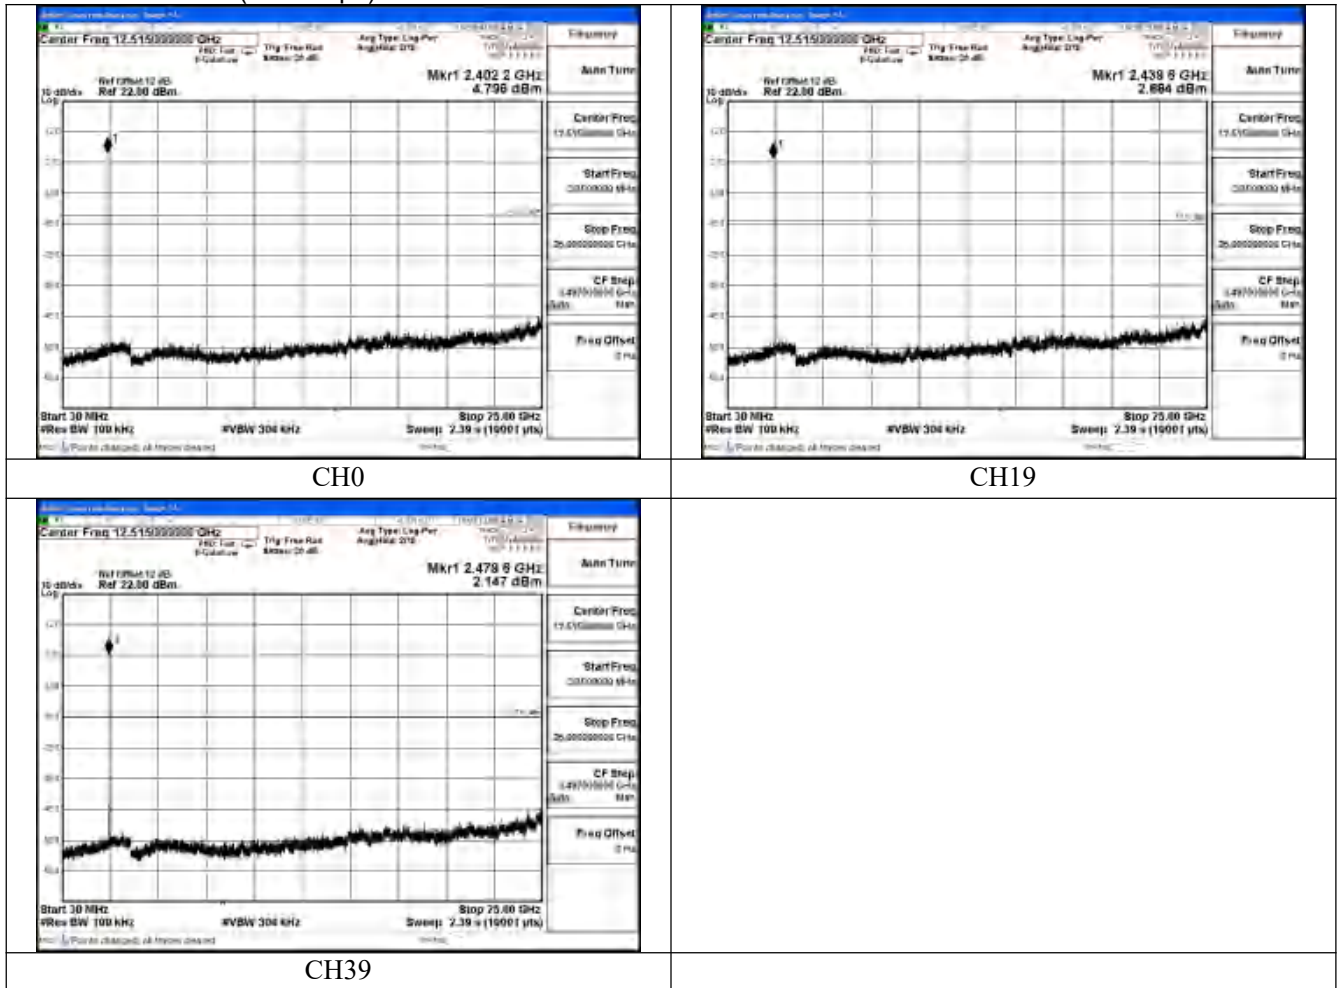




Test Mode: GFSK (LE 2Mbps)

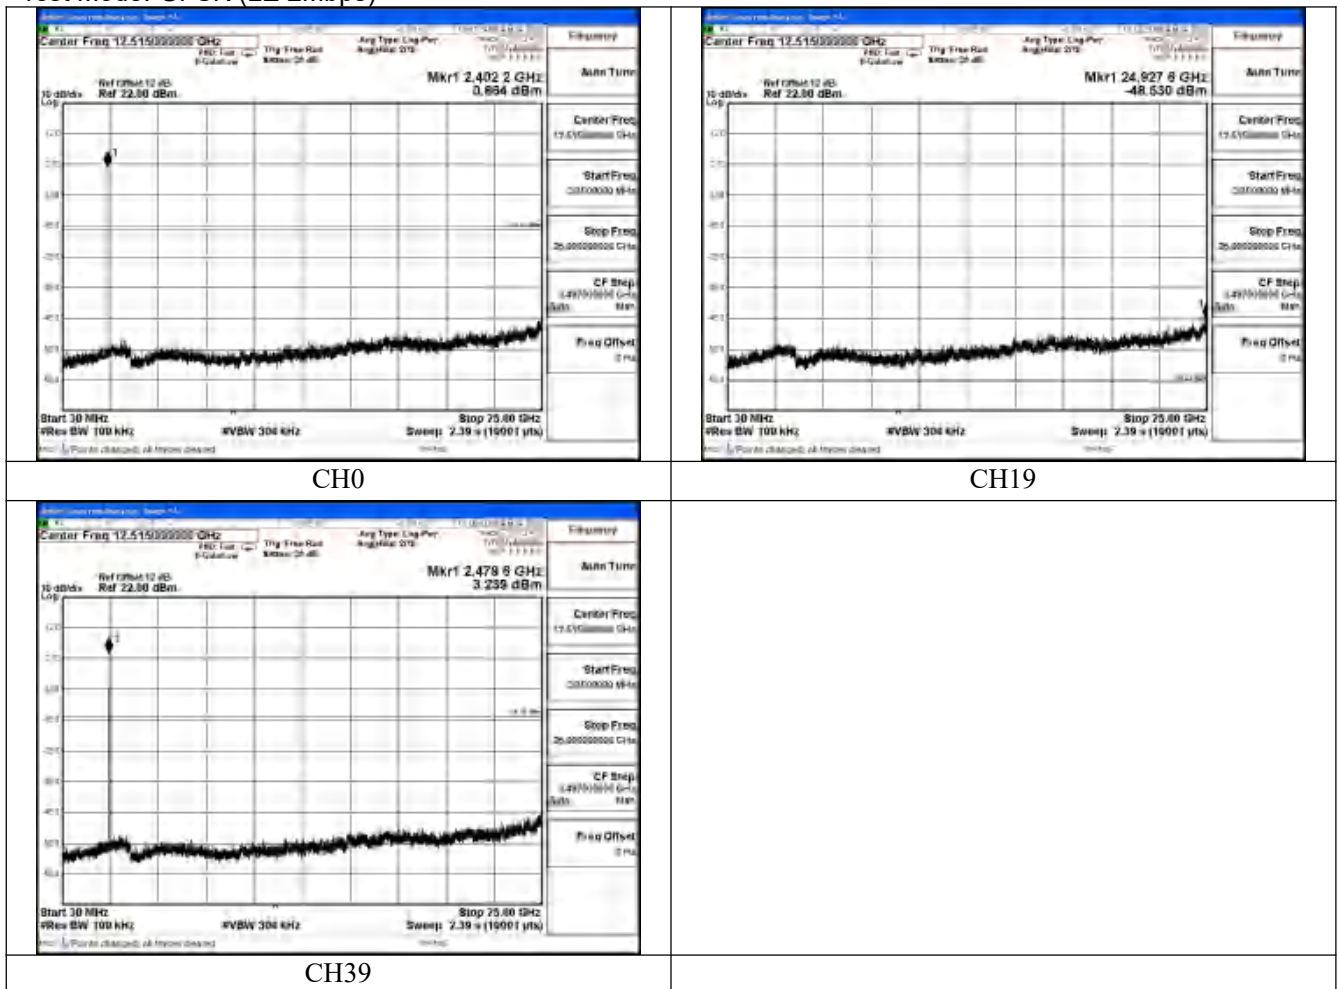




Test Mode: Coded 125K

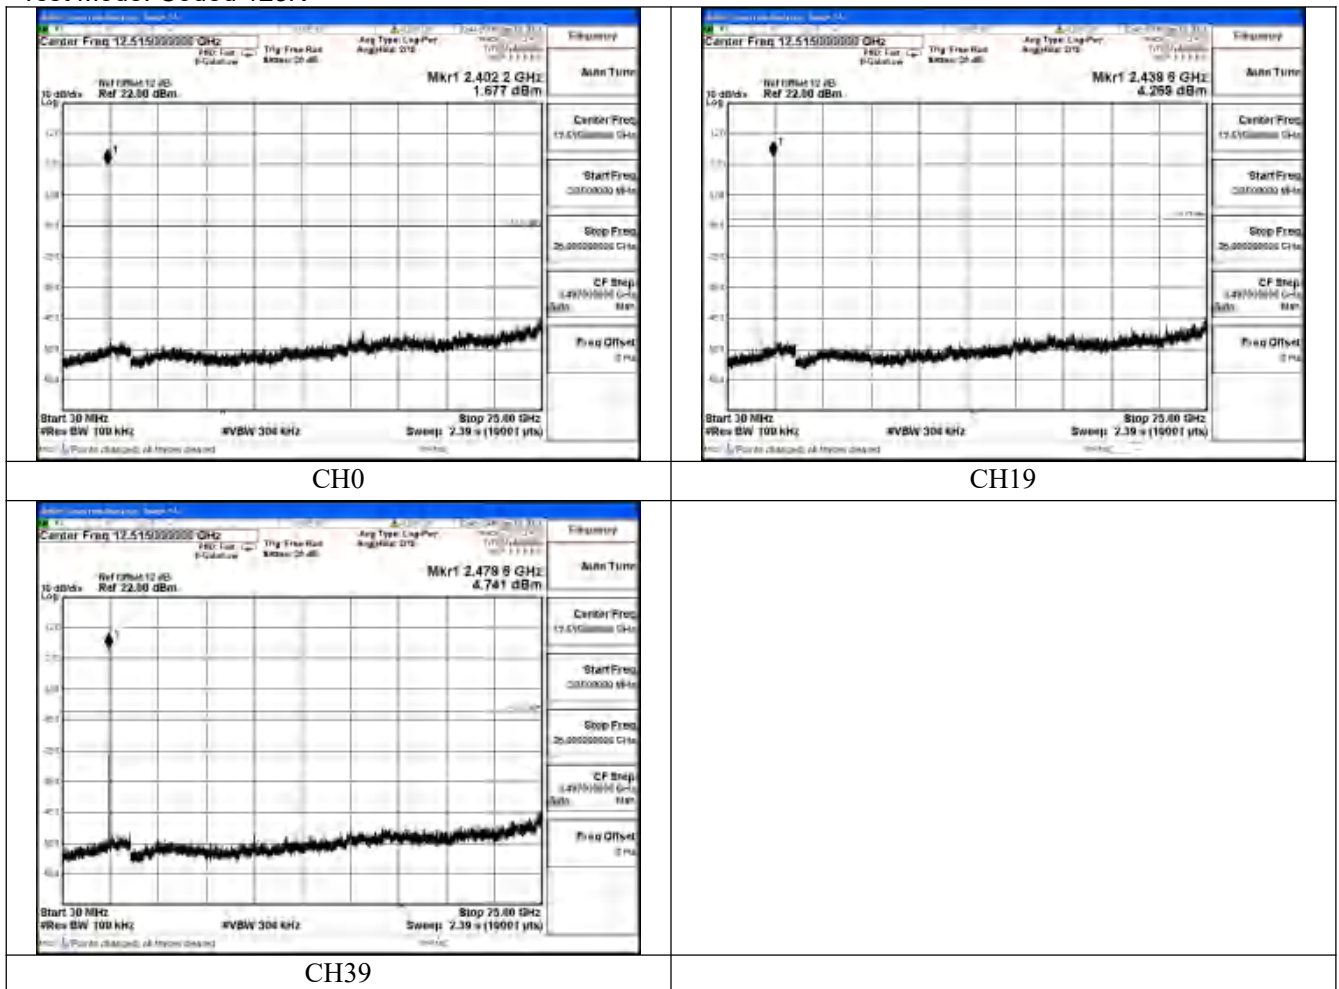



Test Mode: Coded 500K

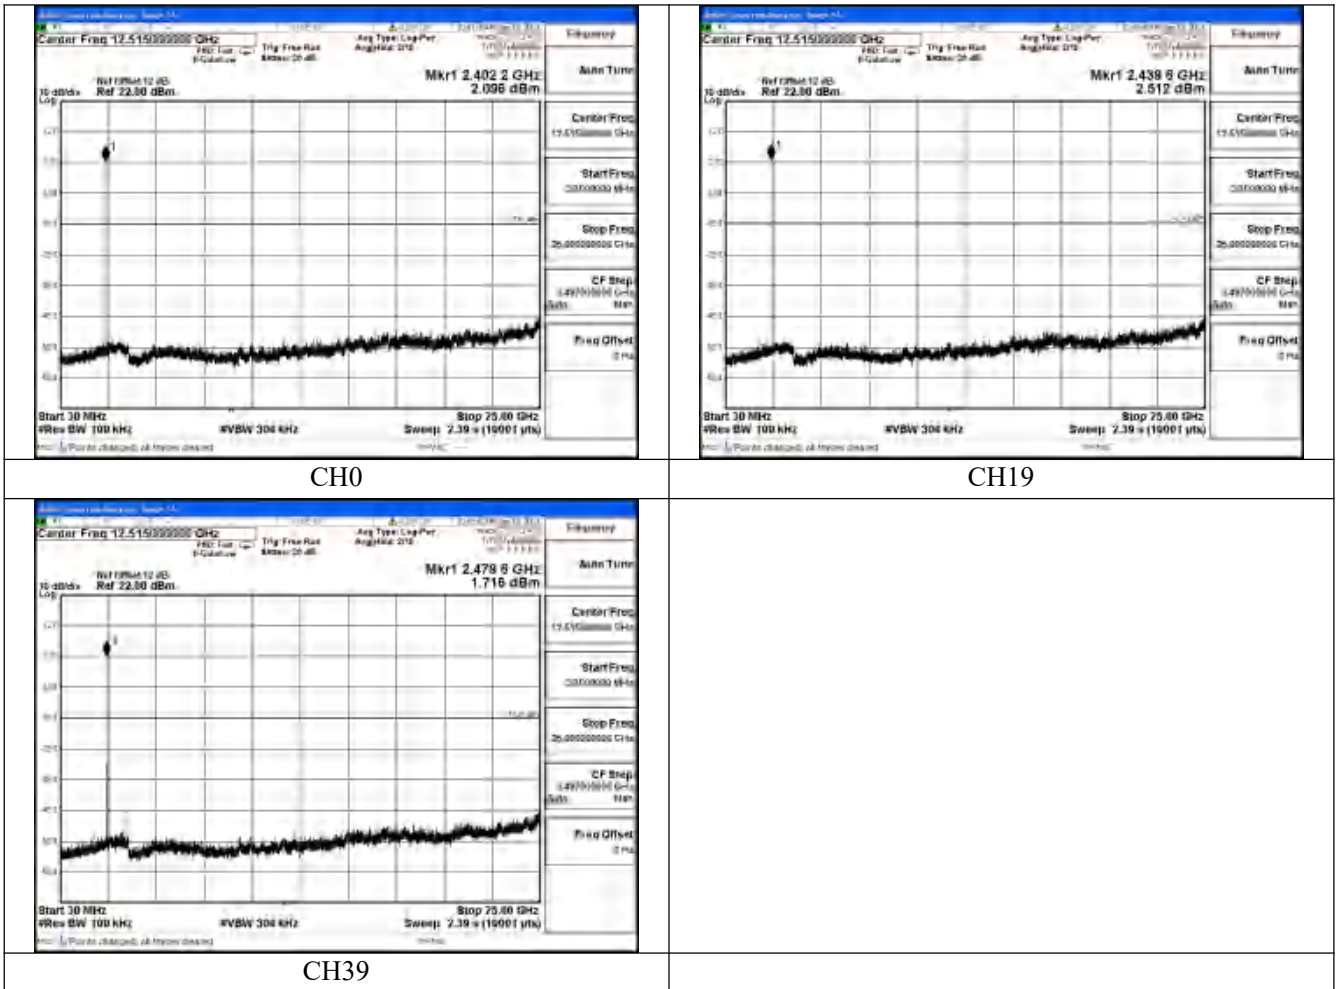



6 Band Edge measurement

Test Mode: GFSK (LE 1Mbps)




CH0



CH39

Test Mode: GFSK (LE 2Mbps)

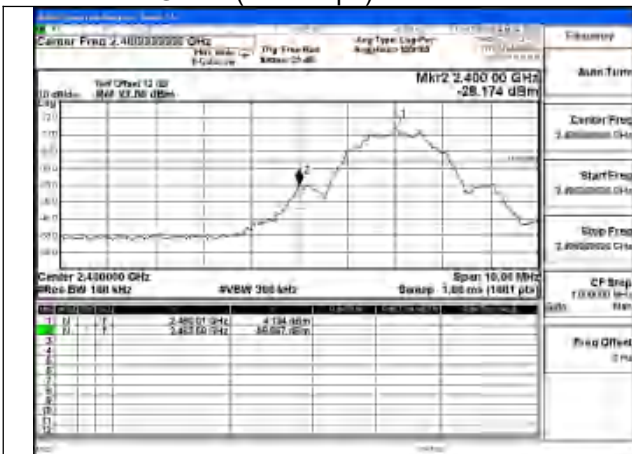

CH0



CH39

Test Mode: Coded 125K




CH0



CH39



Test Mode: Coded 500K

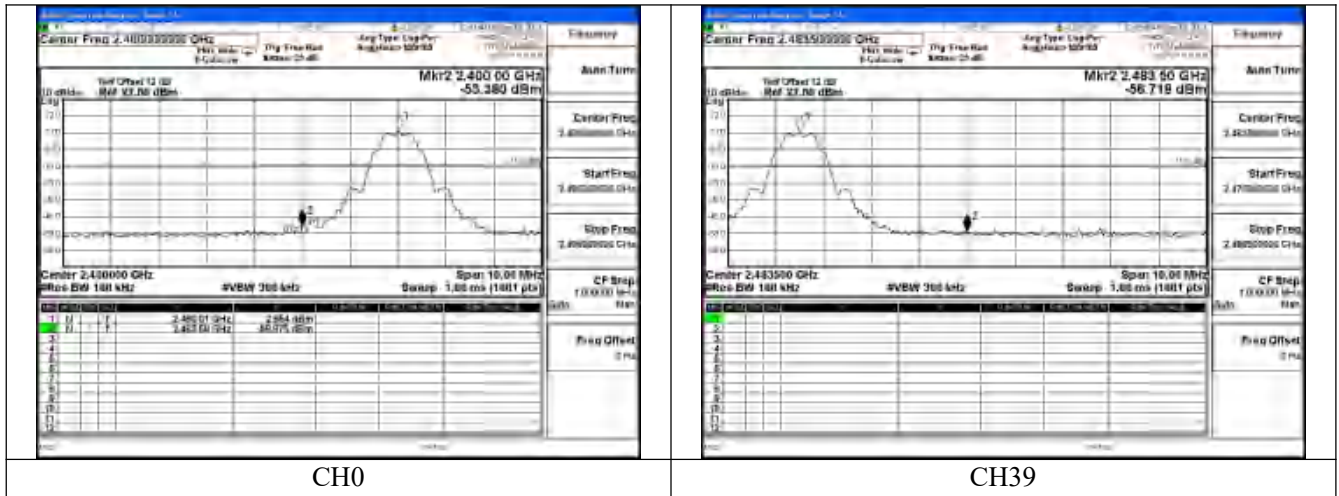



BLE (ANT8 Antenna gain:-1.7dBi)

1 Duty Cycle and Antenna Gain

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK (LE 1Mbps)	2402	Fig.1	66.40%	1.78	-1.70

Note:Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
GFSK (LE 2Mbps)	2402	Fig.2	61.30%	2.13	-1.70

Note:Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$


Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
Coded 125K	2402	Fig.3	92.00%	0.36	-1.70

Note:Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode	Frequency (MHz)	Plot	Duty Cycle	Correction Factor(dB)	Antenna Gain(dBi)
Coded 500K	2402	Fig.4	97.80%	0.10	-1.70

Note:Correction Factor= $10 \cdot \log(1/\text{Duty Cycle})$

Test Mode: GFSK (LE 1Mbps)

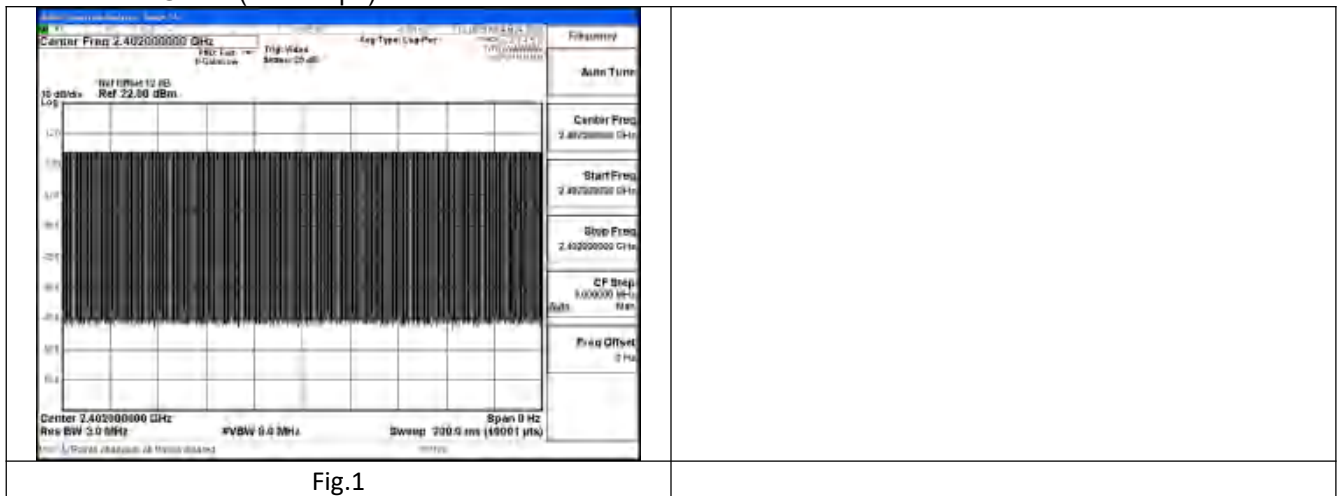



No.: SRTC2024-9004(F)-24081205(E)
FCC ID: APYHRO00333

Test Mode: GFSK (LE 2Mbps)

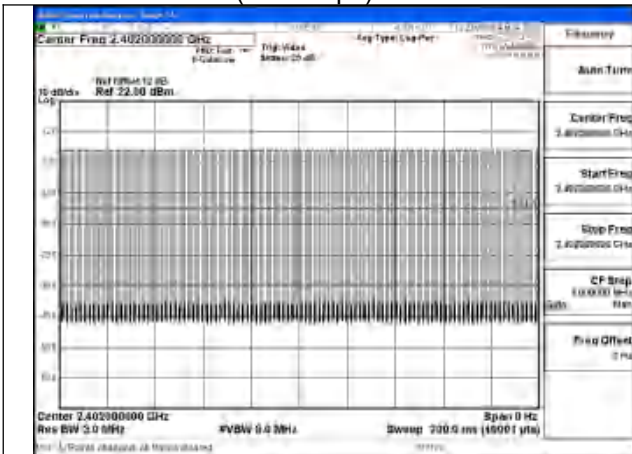


Fig.2

Test Mode: Coded 125K

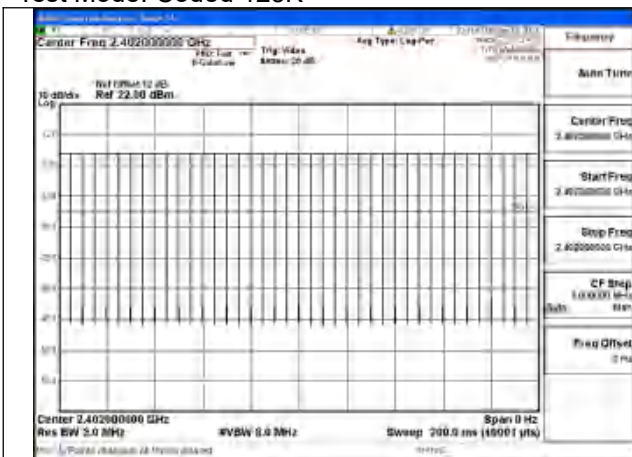


Fig.3

Test Mode: Coded 500K

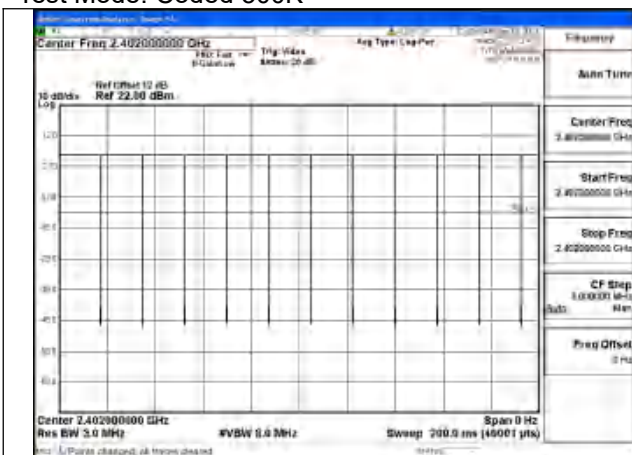


Fig.4



2 EIRP Conducted Power

Modulation type	Conducted Peak Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	5.75	6.35	6.30
GFSK (LE 2Mbps)	5.80	6.38	6.29
Coded 125K	5.88	6.35	6.29
Coded 500K	5.88	6.29	6.19

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	5.49	5.89	5.47
GFSK (LE 2Mbps)	5.96	5.96	5.82
Coded 125K	5.21	6.25	5.87
Coded 500K	5.73	6.16	5.77

EIRP

Modulation type	Peak EIRP(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	4.05	4.65	4.60
GFSK (LE 2Mbps)	4.10	4.68	4.59
Coded 125K	4.18	4.65	4.59
Coded 500K	4.18	4.59	4.49

Modulation type	Average EIRP(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	3.79	4.19	3.77
GFSK (LE 2Mbps)	4.26	4.26	4.12
Coded 125K	3.51	4.55	4.17
Coded 500K	4.03	4.46	4.07

EIRP (dBm)=Conducted Power(dBm)+Antenna Gain(dBi)



3 Occupied Bandwidth
6dB Bandwidth

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
GFSK (LE 1Mbps)	2402	680.1
GFSK (LE 1Mbps)	2440	683.5
GFSK (LE 1Mbps)	2480	683.9




Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
GFSK (LE 2Mbps)	2402	1315.3
GFSK (LE 2Mbps)	2440	1386.7
GFSK (LE 2Mbps)	2480	1386.1

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
Coded 125K	2402	708.0
Coded 125K	2440	707.0
Coded 125K	2480	718.7

Test Mode	Carrier frequency (MHz)	6dB Bandwidth(KHz)
Coded 500K	2402	648.0
Coded 500K	2440	645.8
Coded 500K	2480	646.3




Test Mode: GFSK (LE 1Mbps)

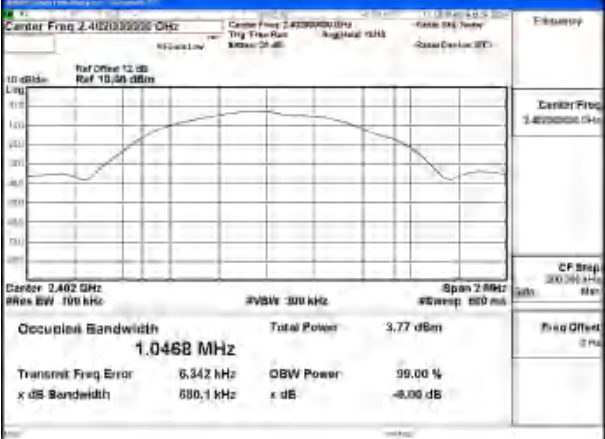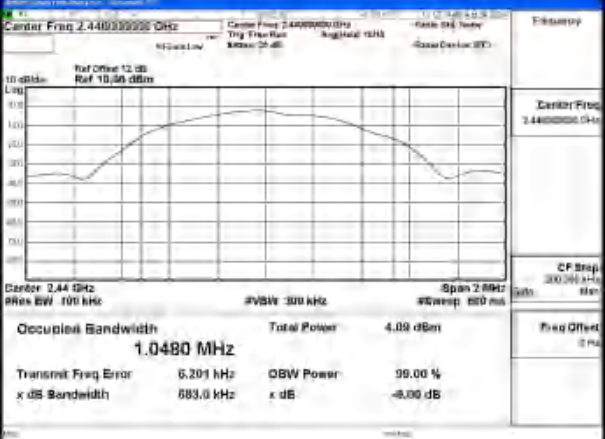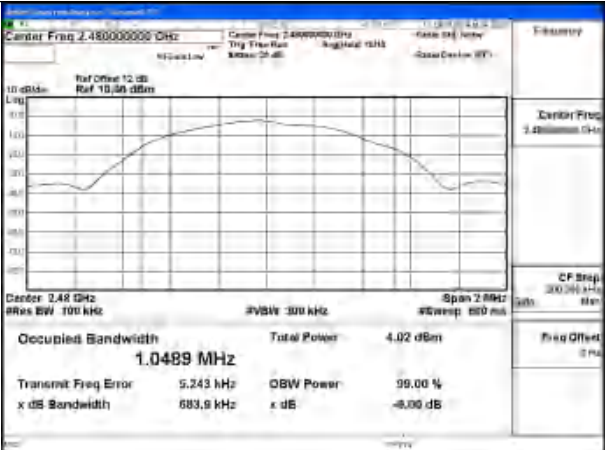 Center Freq: 2.40200000 GHz Occupied Bandwidth: 1.0468 MHz Total Power: 3.77 dBm Transmit Freq Error: 5.342 kHz x dB Bandwidth: 680.1 kHz OBW Power: 99.00 % x dB: -6.00 dB	 Center Freq: 2.44000000 GHz Occupied Bandwidth: 1.0480 MHz Total Power: 4.08 dBm Transmit Freq Error: 5.204 kHz x dB Bandwidth: 683.0 kHz OBW Power: 99.00 % x dB: -6.00 dB
Test Mode:GFSK (LE 1Mbps) 2402MHz	Test Mode:GFSK (LE 1Mbps) 2440MHz
 Center Freq: 2.48000000 GHz Occupied Bandwidth: 1.0489 MHz Total Power: 4.02 dBm Transmit Freq Error: 5.243 kHz x dB Bandwidth: 683.8 kHz OBW Power: 99.00 % x dB: -6.00 dB	
Test Mode:GFSK (LE 1Mbps) 2480MHz	




No.: SRTC2024-9004(F)-24081205(E)
FCC ID: APYHRO00333


Test Mode: GFSK (LE 2Mbps)

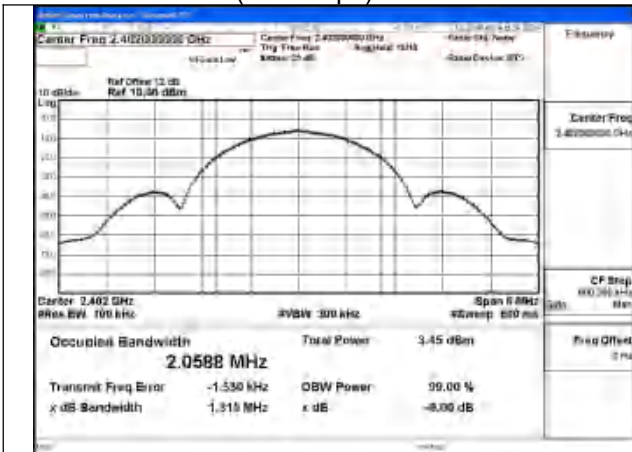

Test Mode:GFSK (LE 2Mbps) 2402MHz

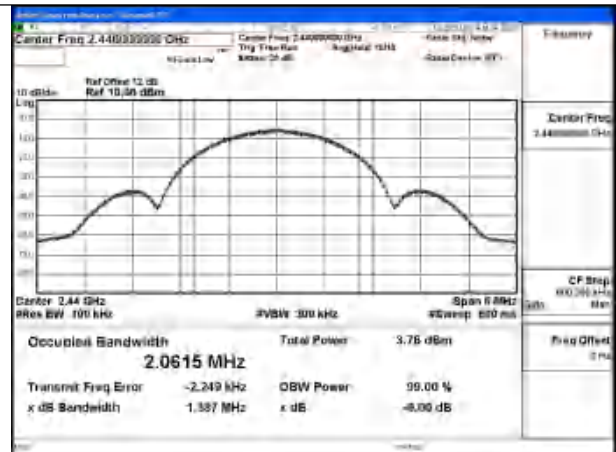


Test Mode:GFSK (LE 2Mbps) 2440MHz

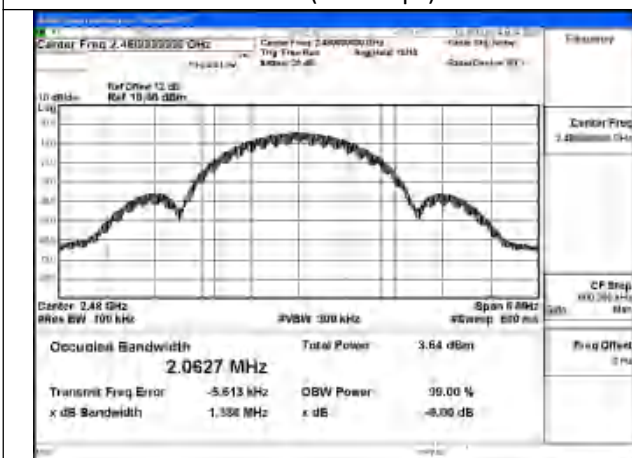


Test Mode:GFSK (LE 2Mbps) 2480MHz




Test Mode: Coded 125K

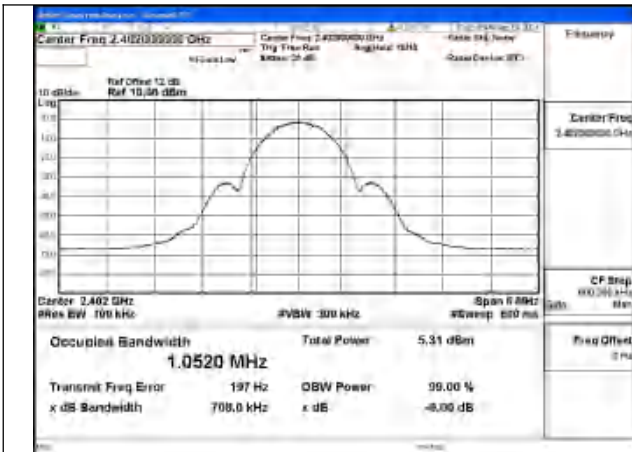


Test Mode:Coded 125K 2402MHz

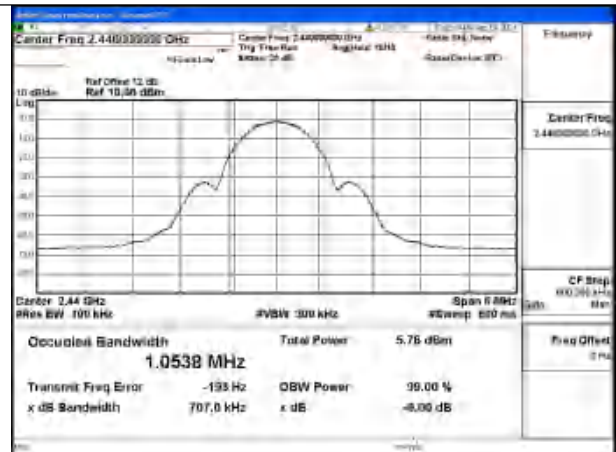

Test Mode:Coded 125K 2440MHz

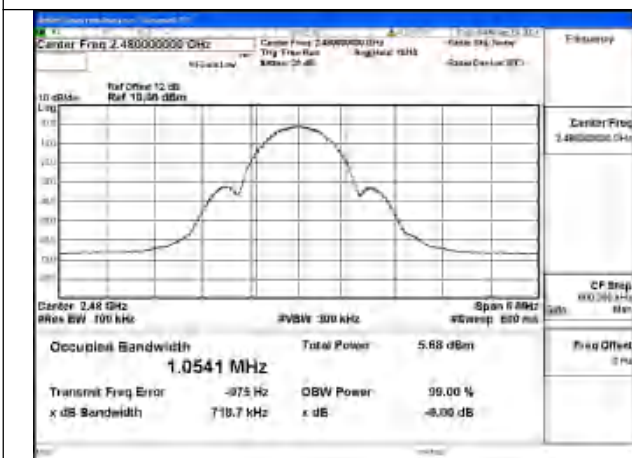

Test Mode:Coded 125K 2480MHz



The screenshot shows a Spectrum Analyzer window with the following details:

- Header:** Center Freq 2.402000000 GHz, Span 5 MHz, Res BW 100 kHz, #FVBW 300 kHz, #Span 500 MHz.
- Plot:** A spectral plot with a peak at 10 dBm. The y-axis is labeled 'dBm' and ranges from -10 to 110. The x-axis is labeled 'MHz' and ranges from 2.400 to 2.405.
- Table:**

Occupied Bandwidth	Total Power	5.61 dBm	
1.0427 MHz			
Transmit Freq Error	352 Hz	OBW Power	99.00 %
x dB Bandwidth	549.0 kHz	x dB	-8.00 dB

Center Freq 2.446399999 GHz
 Span 6 MHz
 Res BW 100 kHz
 #VBW 300 kHz
 #Sweep 600 ms

Ref Offset 12 dB
 Ref 10.00 dBm

Center Freq 2.446399999 GHz
 Span 6 MHz
 Res BW 100 kHz
 #VBW 300 kHz
 #Sweep 600 ms

Occupied Bandwidth
 Total Power
 6.03 dBm

1.0435 MHz
 -3.383 kHz
 99.00 dBm

Transmit Freq Error
 x dB Bandwidth
 640.8 kHz
 x dB

Frequency
 Center Freq
 2.446399999 GHz

CP Strip
 600.000 MHz
 100.000 MHz

Freq Offset
 0.000 MHz

The screenshot shows the HP 8594C Spectrum Analyzer interface. The main display is a frequency plot with a peak at 2.48 GHz. The x-axis is labeled 'FREQ' and ranges from 2.47 GHz to 2.49 GHz. The y-axis is labeled 'dBm' and ranges from -100 to 0. The peak is labeled '2.48 GHz' and '10.00 dBm'. The plot is titled 'Center Freq 2.480000000 GHz' and 'Span 6.000 MHz'. The resolution bandwidth is set to 100 kHz. The occupied bandwidth is 1.0443 MHz. The total power is 5.91 dBm. The transmit frequency error is -1.524 kHz. The OBW power is 99.00 %.

Parameter	Value
Center Freq	2.480000000 GHz
Span	6.000 MHz
Res BW	100 kHz
Occupied Bandwidth	1.0443 MHz
Total Power	5.91 dBm
Transmit Freq Error	-1.524 kHz
OBW Power	99.00 %
x dB Bandwidth	646.3 kHz
x dB	-8.00 dB





99% Bandwidth

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK (LE 1Mbps)	2402	1023.2
GFSK (LE 1Mbps)	2440	1024.5
GFSK (LE 1Mbps)	2480	1025.3

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
GFSK (LE 2Mbps)	2402	2048.2
GFSK (LE 2Mbps)	2440	2049.8
GFSK (LE 2Mbps)	2480	2051.5

Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
Coded 125K	2402	1030.6
Coded 125K	2440	1031.0
Coded 125K	2480	1031.8


Test Mode	Carrier frequency (MHz)	99% Bandwidth(kHz)
Coded 500K	2402	1021.2
Coded 500K	2440	1021.9
Coded 500K	2480	1021.3




Test Mode: GFSK (LE 1Mbps)




Test Mode:GFSK (LE 1Mbps) 2402MHz

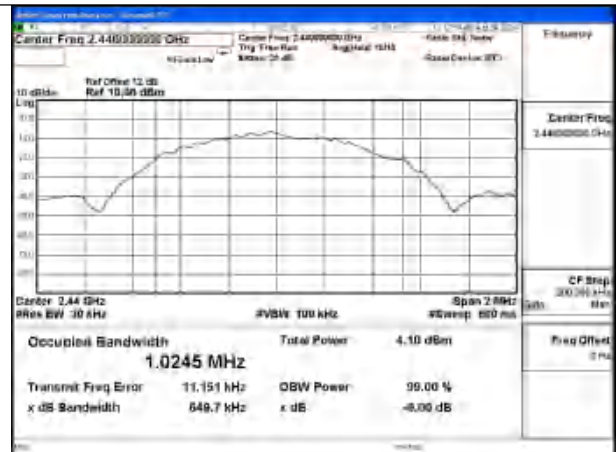

Test Mode:GFSK (LE 1Mbps) 2440MHz

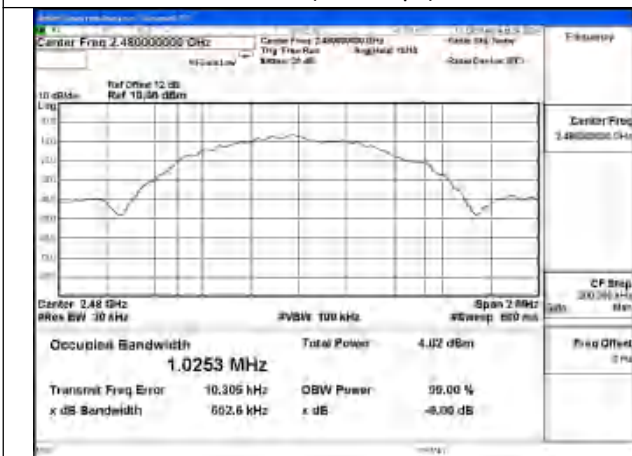

Test Mode:GFSK (LE 1Mbps) 2480MHz

[illegible]

Center Freq 2.448999999 GHz Ref Offset 12 dB Ref 10.00 dBm Center 2.44 GHz Span 6 MHz RBW 30 kHz VBW 100 kHz Sweep 600 ms		Frequency Center Freq 2.448999999 GHz CP Stop 100.00 MHz Max Prep Offset 0 MHz
Occupied Bandwidth 2.0498 MHz Transmit Freq Error ± 130 kHz ± dB Bandwidth 1.215 MHz		Total Power 3.78 dBm OBW Power 99.00 % ± dB -8.00 dB

HP 8594C Spectrum Analyzer

Center Freq 2.480000000 GHz

Span 5 MHz

Ref: 10 dB

Ref: 10 dB

Occupied Bandwidth

2.0515 MHz

Transmit Freq Error

-5.181 kHz

x dB Bandwidth

1.288 MHz

Total Power

3.64 dBm

OBW Power

99.00 %


x dB

-8.00 dB







Test Mode: Coded 125K

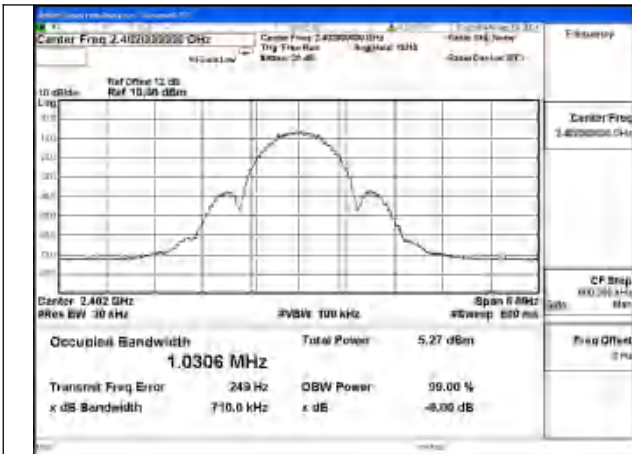

Test Mode:Coded 125K 2402MHz

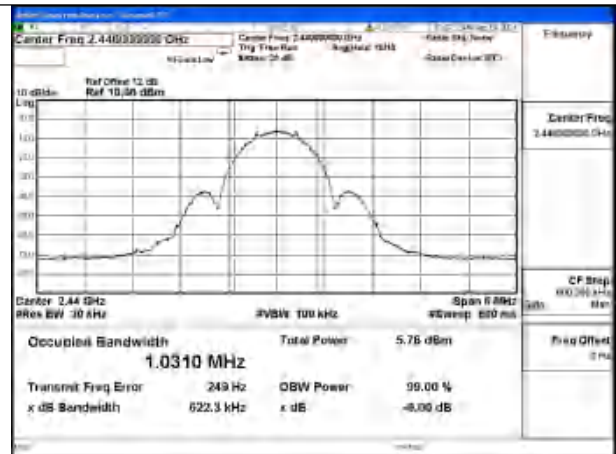

Test Mode:Coded 125K 2440MHz

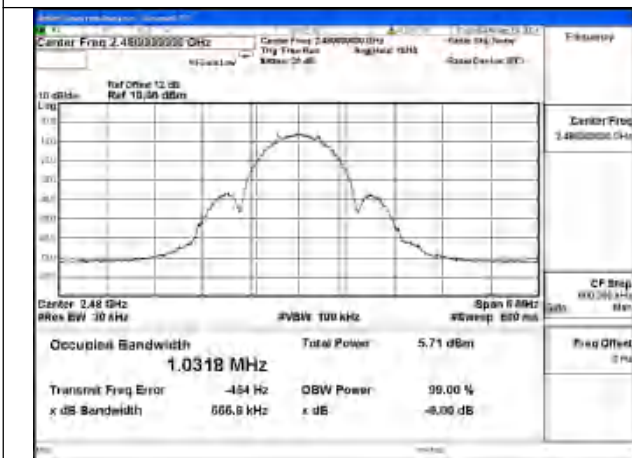


Test Mode:Coded 125K 2480MHz




Test Mode: Coded 500K



Test Mode:Coded 500K 2402MHz

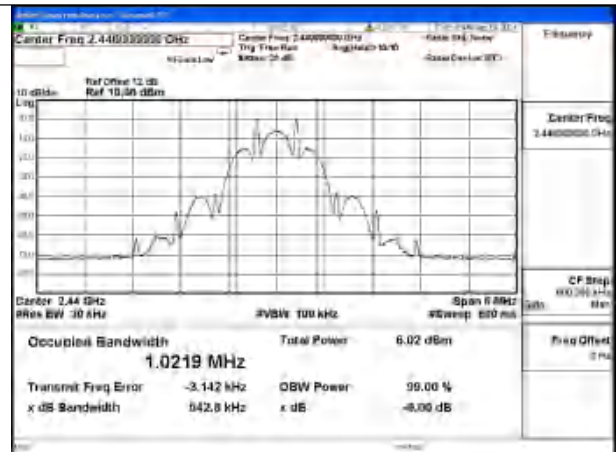

Test Mode:Coded 500K 2440MHz

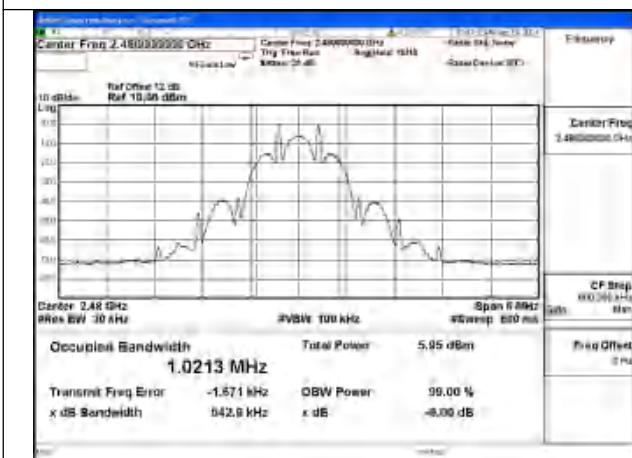

Test Mode:Coded 500K 2480MHz



4 Transmitter PowerSpectral Density

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
GFSK (LE 1Mbps)	2402	0	-9.7
GFSK (LE 1Mbps)	2440	19	-9.3
GFSK (LE 1Mbps)	2480	39	-9.4

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
GFSK (LE 2Mbps)	2402	0	-13.3
GFSK (LE 2Mbps)	2440	19	-13.3
GFSK (LE 2Mbps)	2480	39	-13.2

Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
Coded 125K	2402	0	-7.3
Coded 125K	2440	19	-5.5
Coded 125K	2480	39	-0.7


Test Mode	Carrier frequency (MHz)	Channel No.	Power Density (dBm/3kHz)
Coded 500K	2402	0	-0.6
Coded 500K	2440	19	-0.1
Coded 500K	2480	39	-0.2




Test Mode: GFSK (LE 1Mbps)



Test Mode:GFSK (LE 1Mbps) 2402MHz

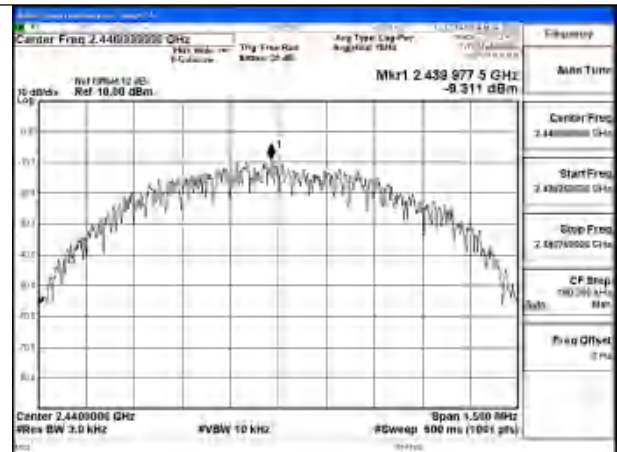


Test Mode:GFSK (LE 1Mbps) 2440MHz

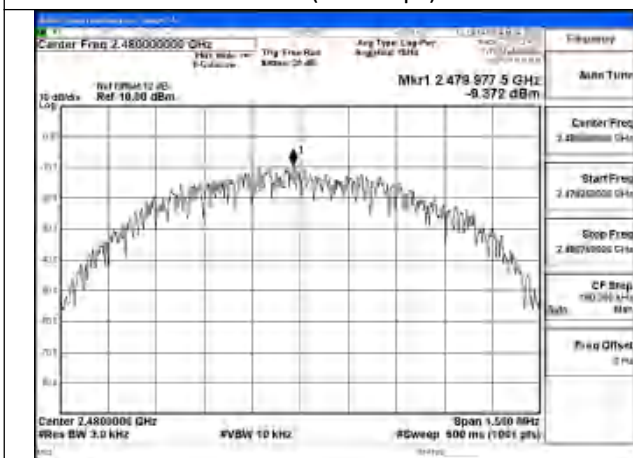

Test Mode:GFSK (LE 1Mbps) 2480MHz




Test Mode: GFSK (LE 2Mbps)

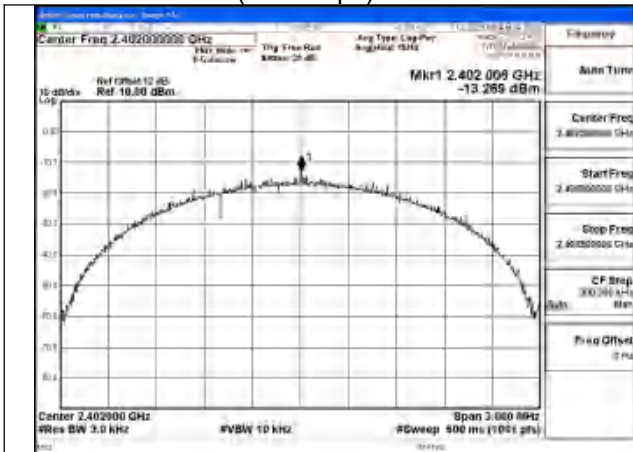

Test Mode:GFSK (LE 2Mbps) 2402MHz




Test Mode:GFSK (LE 2Mbps) 2440MHz

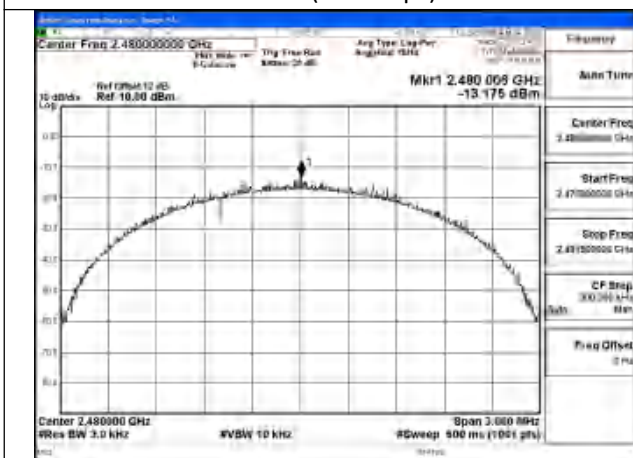


Test Mode:GFSK (LE 2Mbps) 2480MHz




Test Mode: Coded 125K

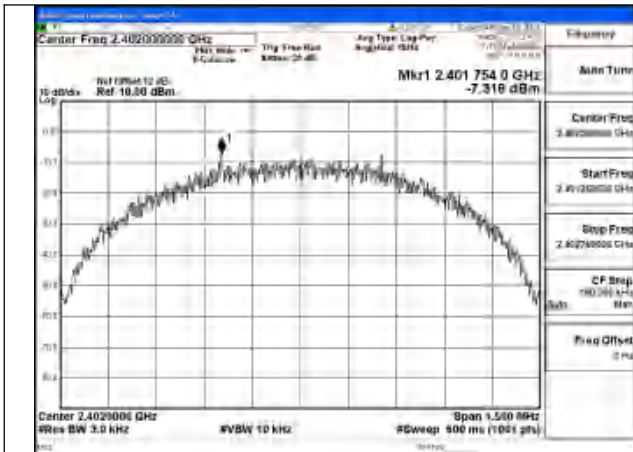

Test Mode:Coded 125K 2402MHz

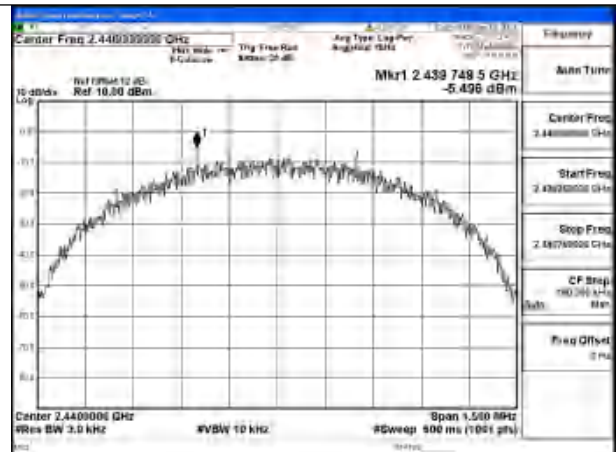

Test Mode:Coded 125K 2440MHz

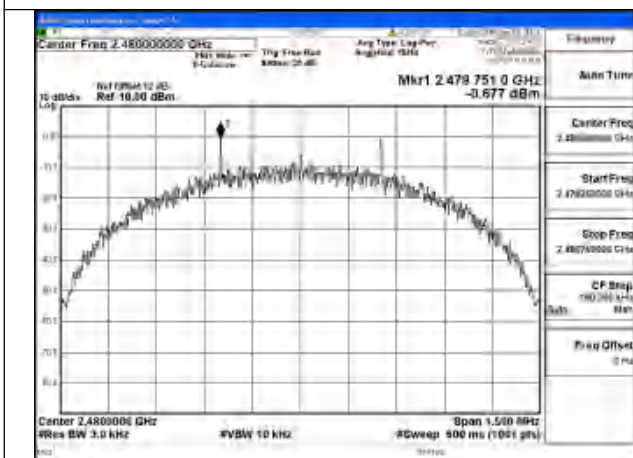


Test Mode:Coded 125K 2480MHz







Test Mode: Coded 500K

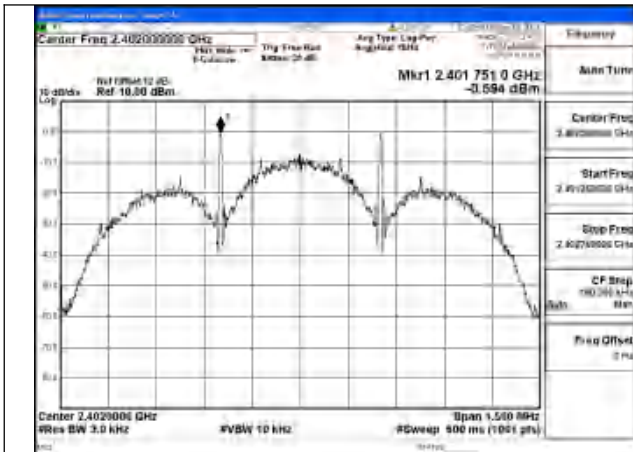

Test Mode:Coded 500K 2402MHz

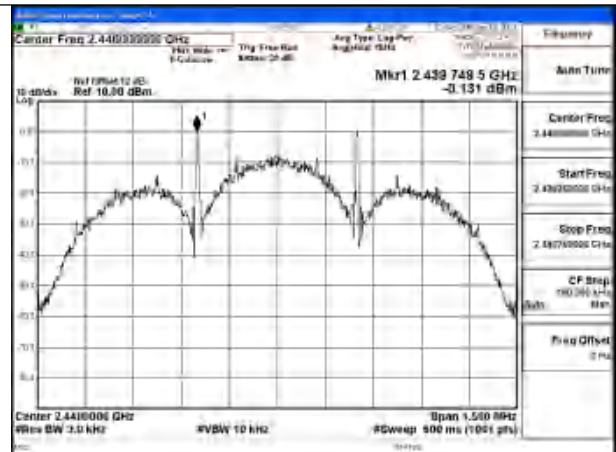

Test Mode:Coded 500K 2440MHz

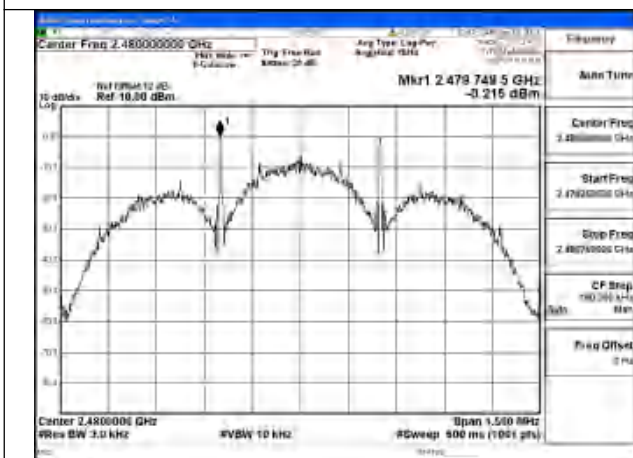


Test Mode:Coded 500K 2480MHz




5 Conducted Out of band emission measurement

Test Mode: GFSK (LE 1Mbps)

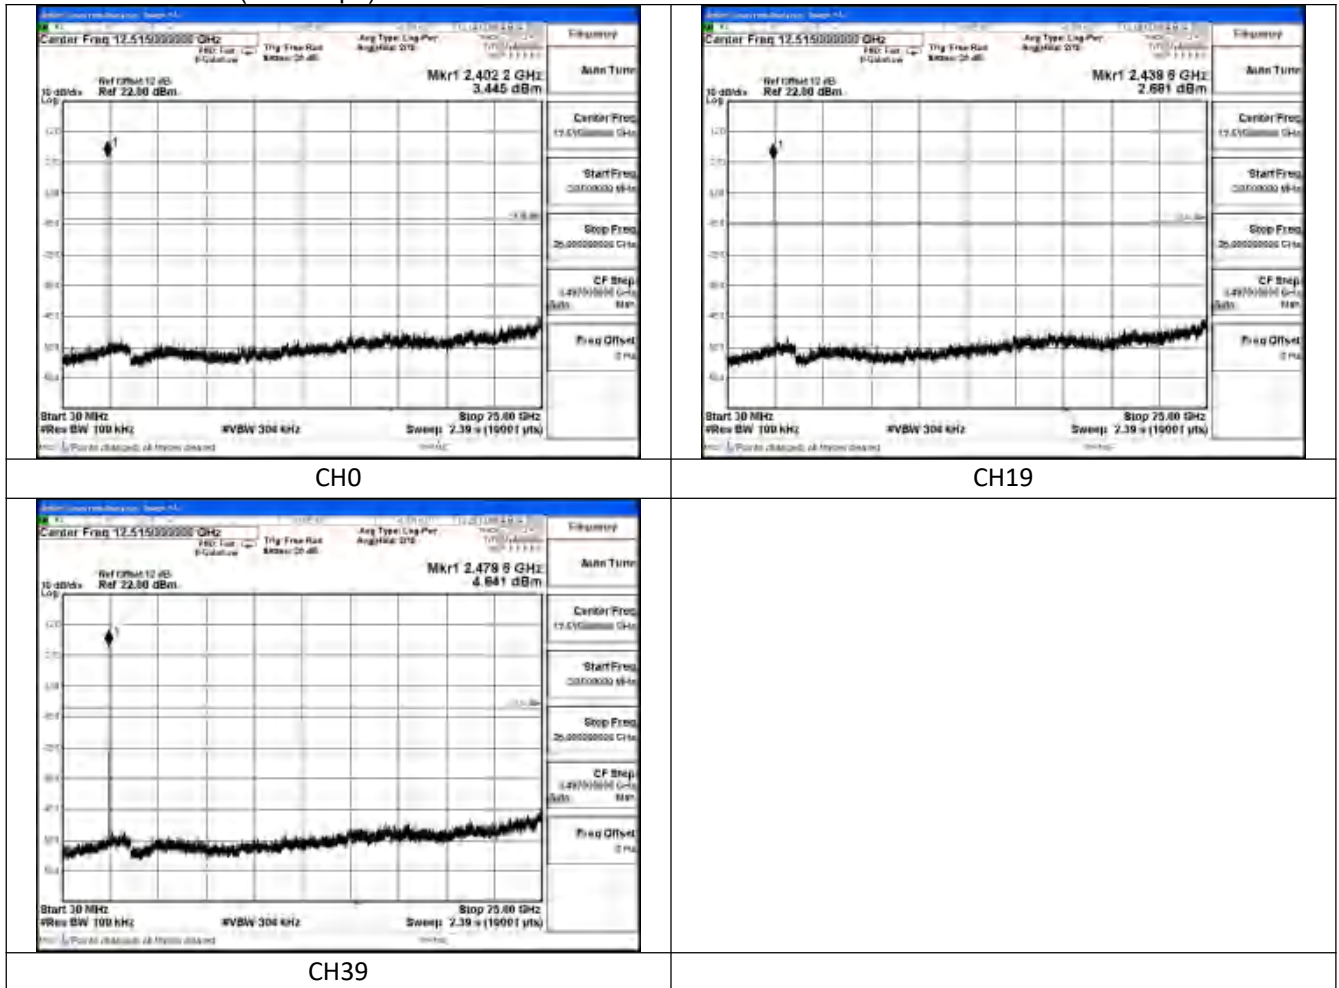




Test Mode: GFSK (LE 2Mbps)

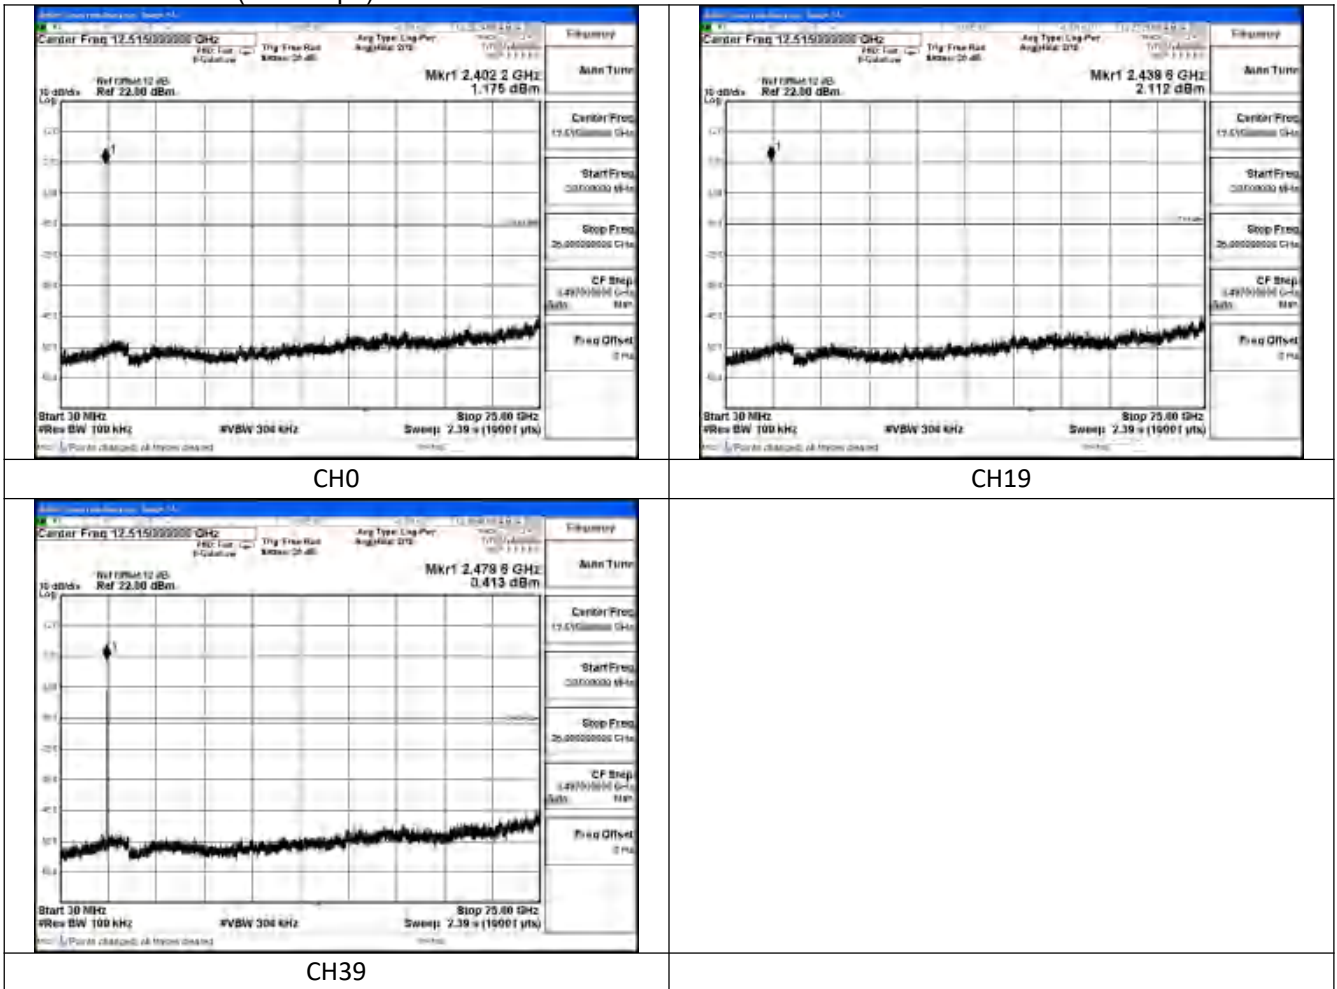




Test Mode: Coded 125K

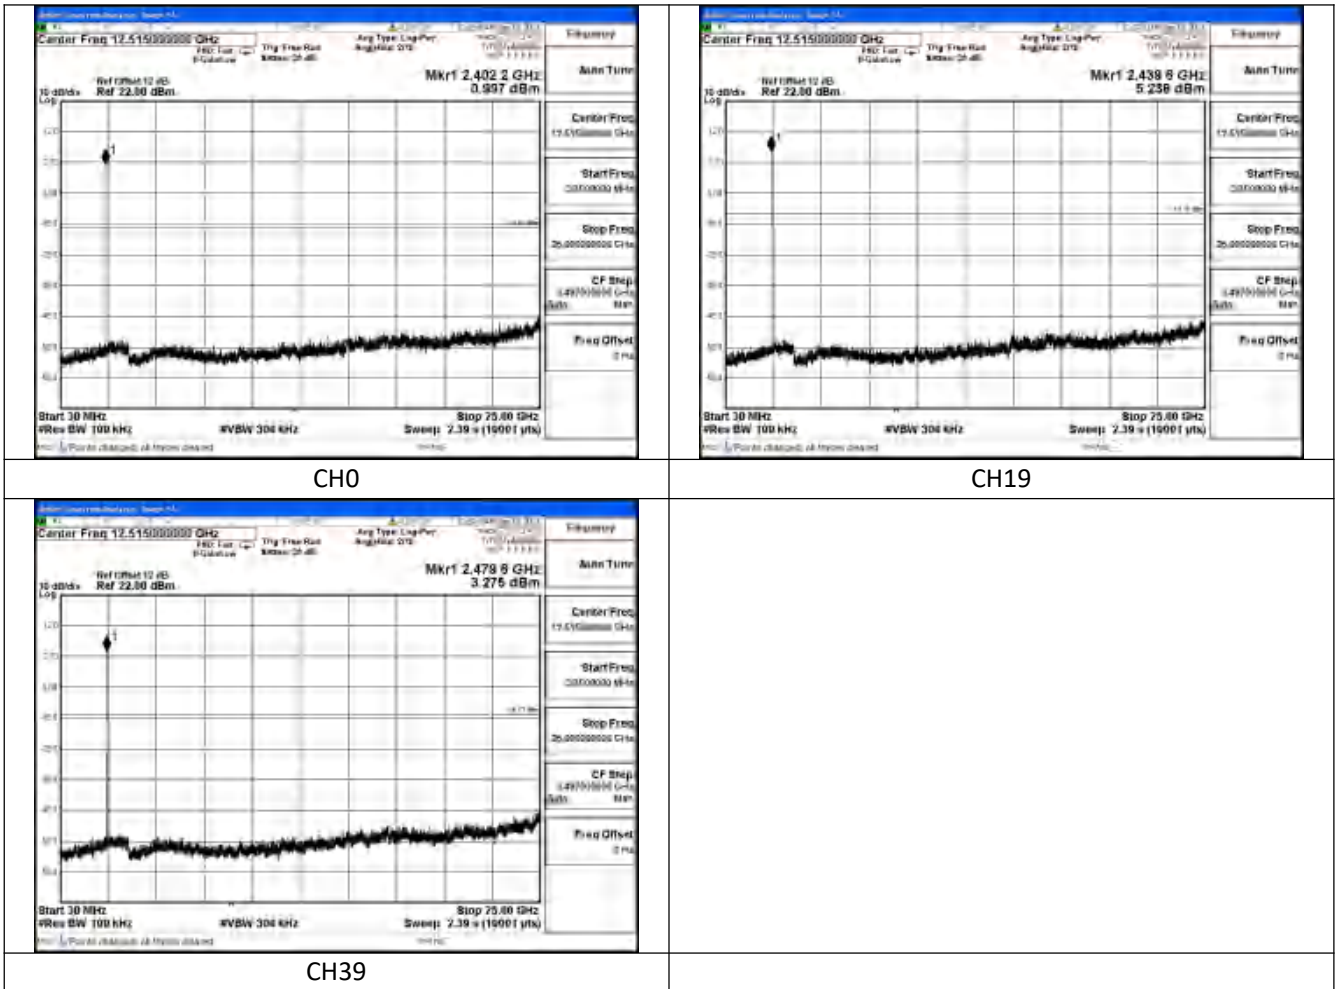



Test Mode: Coded 500K

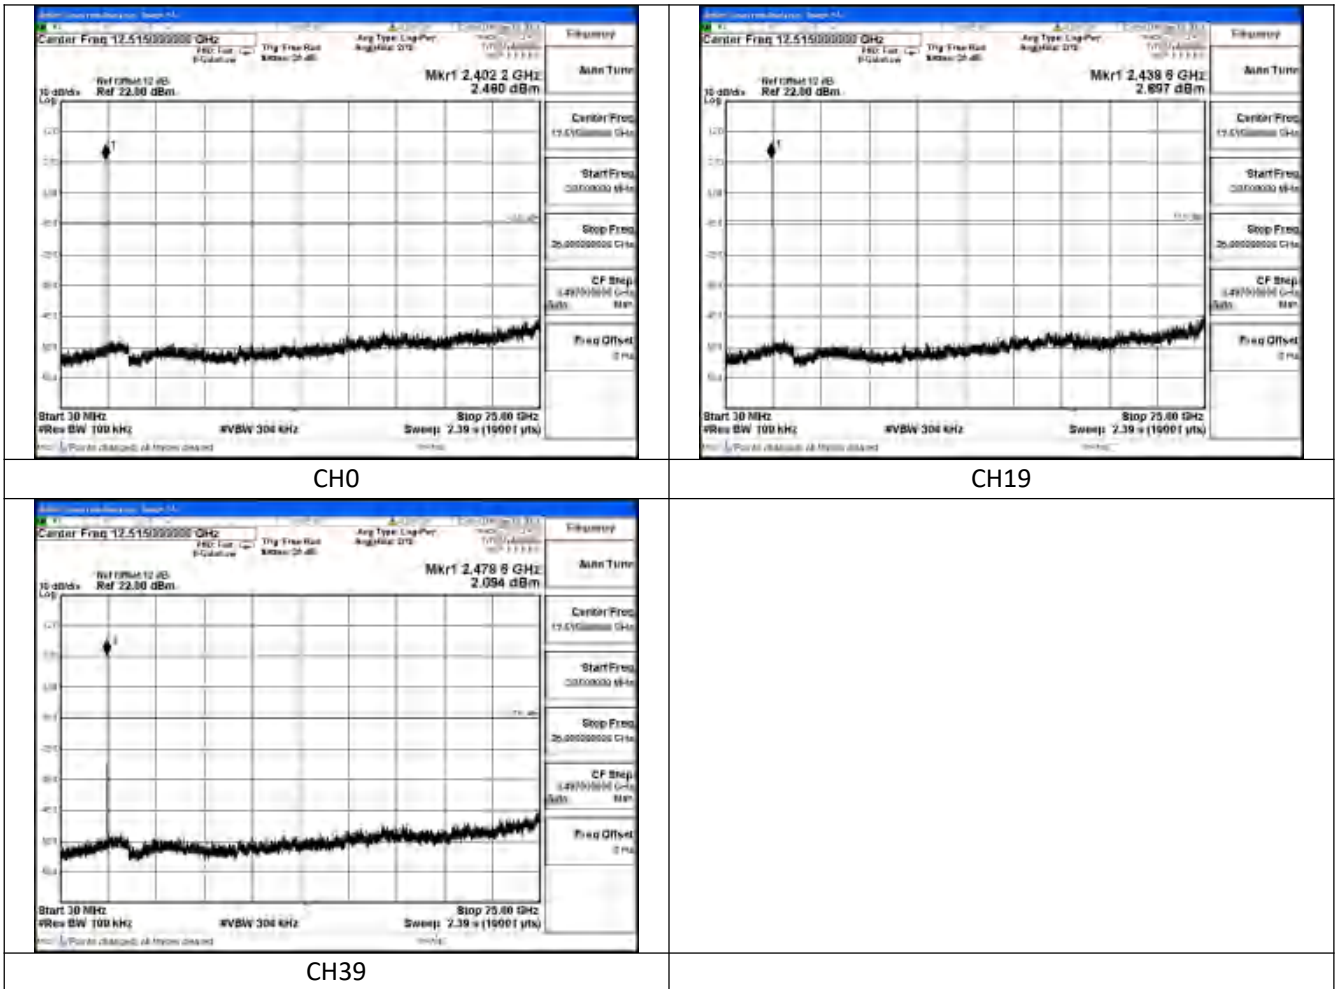



6 Band Edge measurement

Test Mode: GFSK (LE 1Mbps)



CH0



CH39

Test Mode: GFSK (LE 2Mbps)




CH0



CH39

Test Mode: Coded 125K

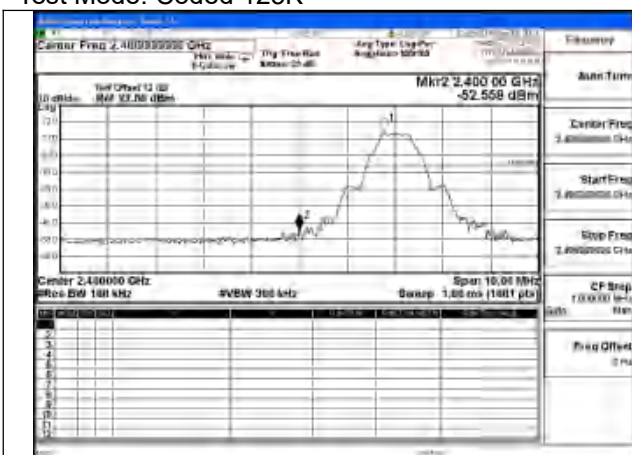

CH0



CH39



No.: SRTC2024-9004(F)-24081205(E)
FCC ID: APYHRO00333

Test Mode: Coded 500K



CH0



CH39




APPENDIX B – TEST DATA OF RADIATED EMISSION

Note: The worst channel results are reflected in the report.

Note: The scanned graph represents the maximum of both horizontal and vertical polarizations and is not a single horizontal or vertical polarization scan.

Radiated Emission Band Edge

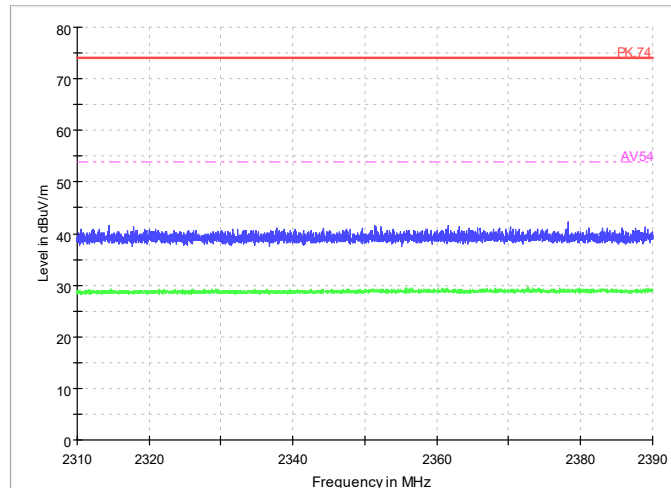


Carrier frequency (MHz): 2402

Channel No.:0

Test Mode: GFSK (LE 1Mbps)

Polarity: Vertical

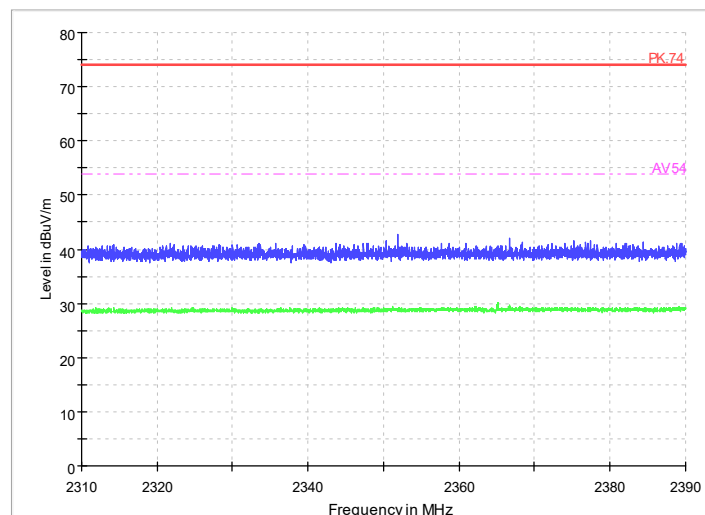


Carrier frequency (MHz): 2402


Channel No.:0

Test Mode: GFSK (LE 1Mbps)


Polarity: Horizontal

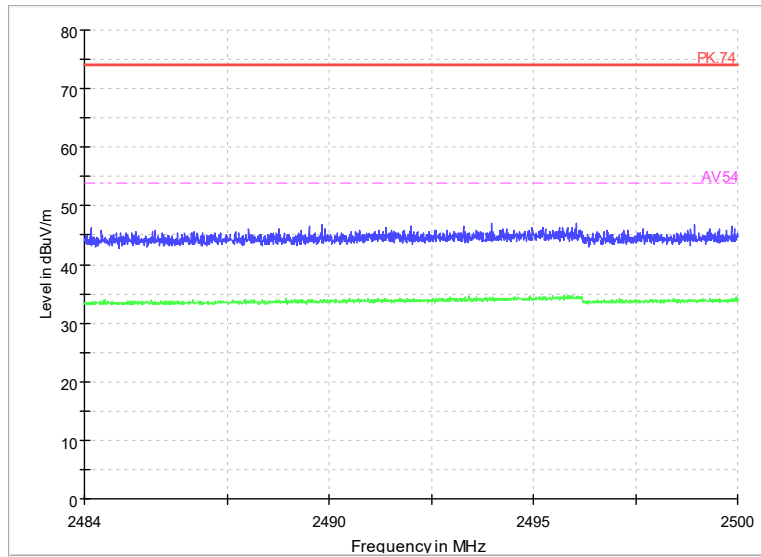


Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: GFSK (LE 1Mbps)
Polarity: Vertical

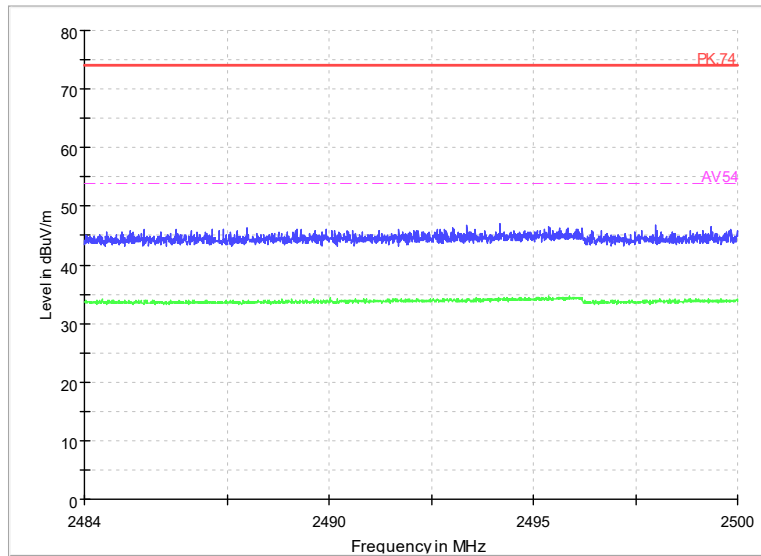


Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: GFSK (LE 1Mbps)
Polarity: Horizontal

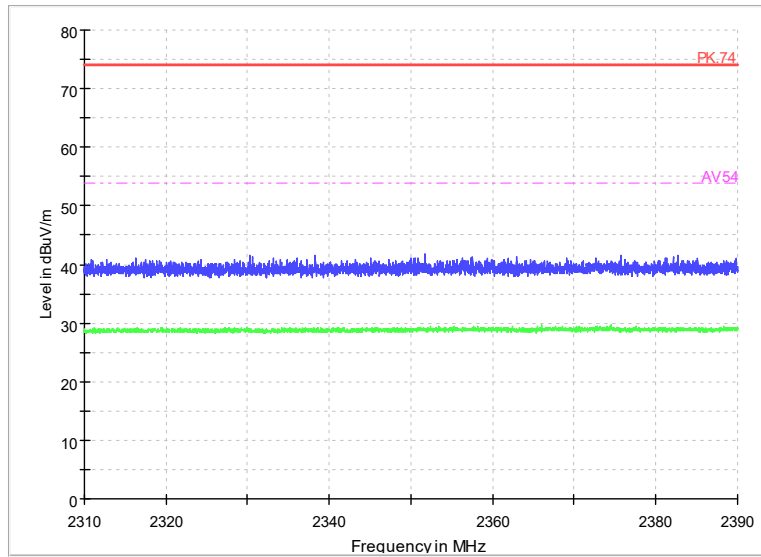


Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: GFSK (LE 2Mbps)
Polarity: Vertical

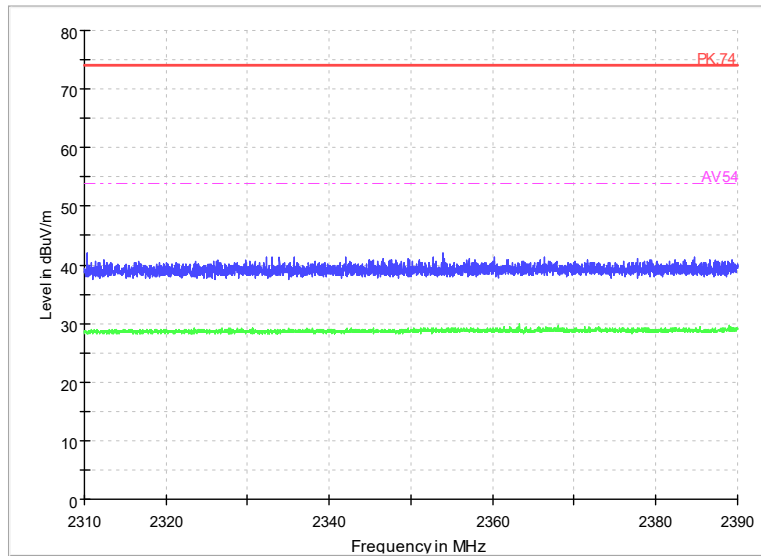


Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: GFSK (LE 2Mbps)
Polarity: Horizontal

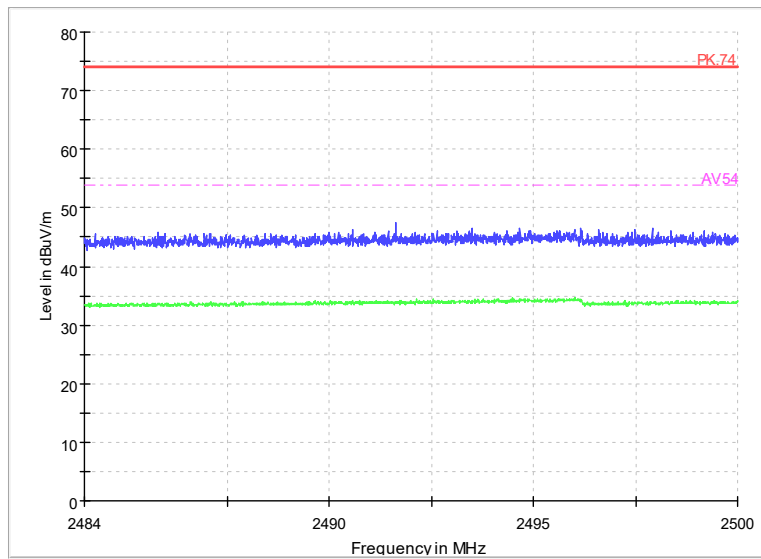


Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: GFSK (LE 2Mbps)
Polarity: Vertical

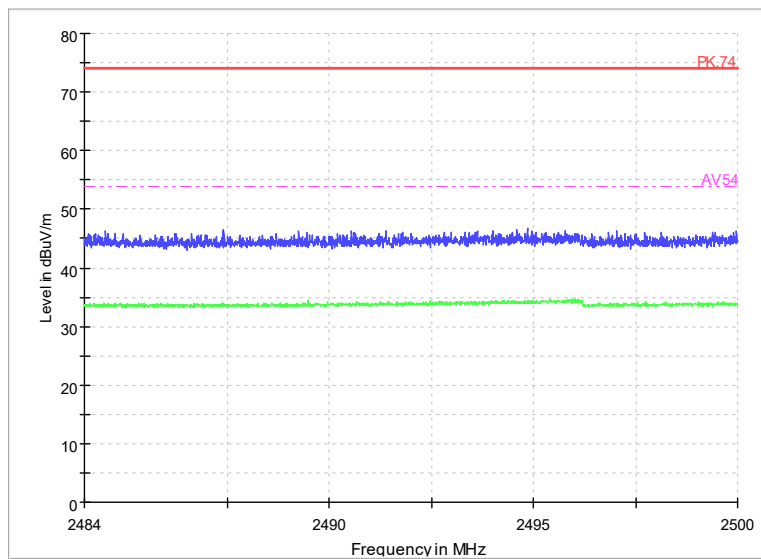


Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: GFSK (LE 2Mbps)
Polarity: Horizontal

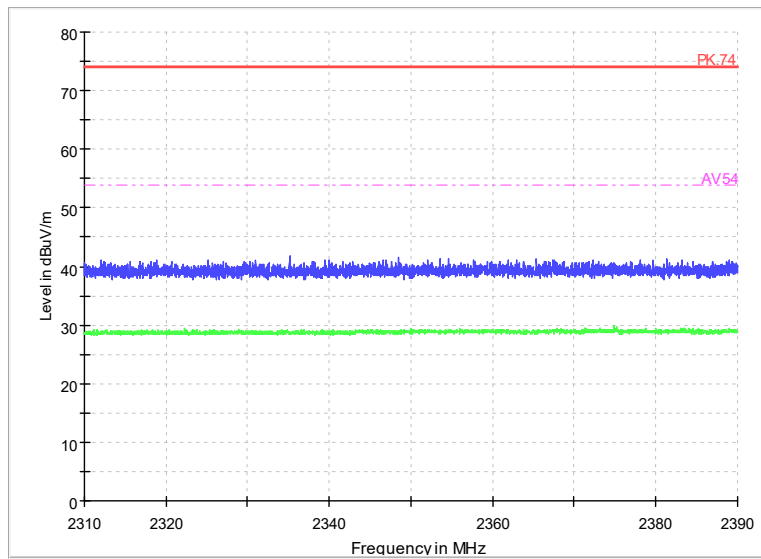


Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: Coded 125K
Polarity: Vertical

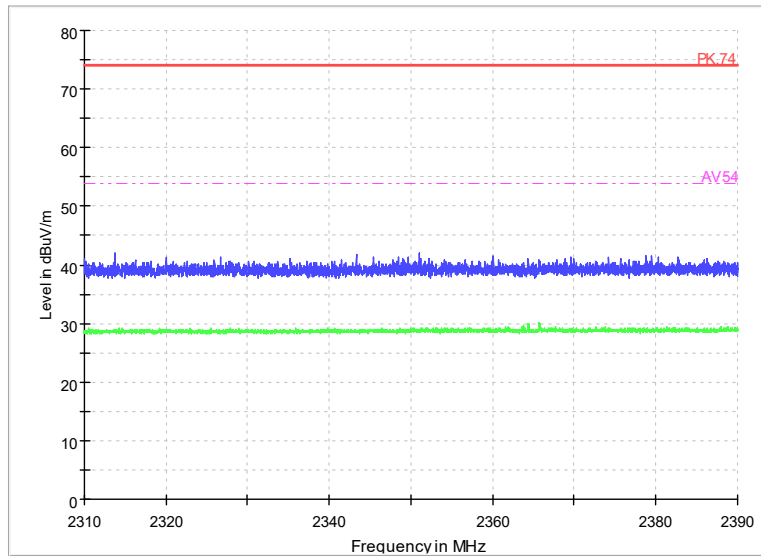


Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: Coded 125K
Polarity: Horizontal

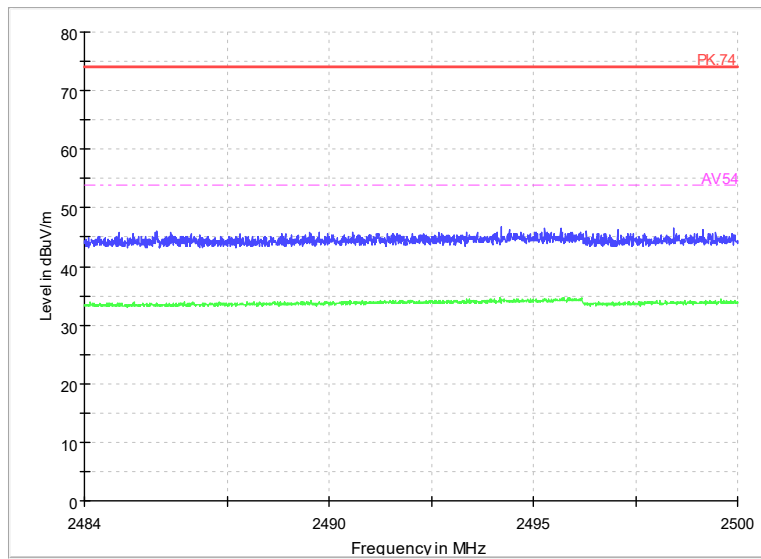


Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: Coded 125K
Polarity: Vertical

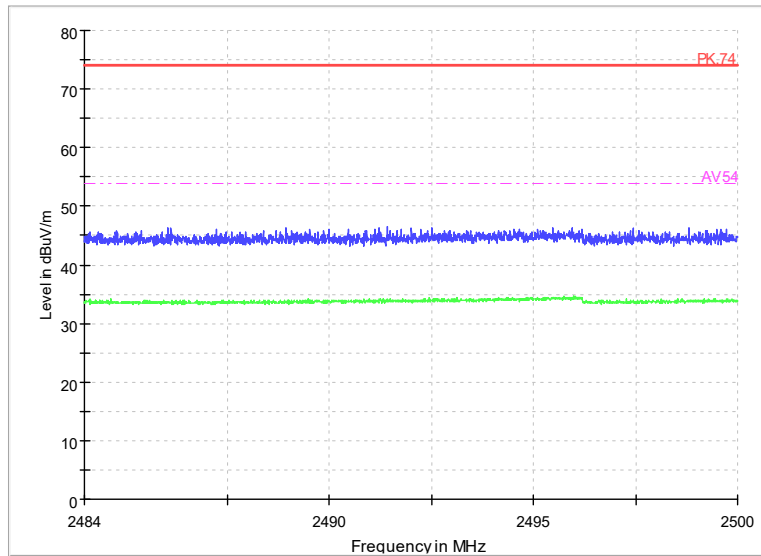


Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: Coded 125K
Polarity: Horizontal

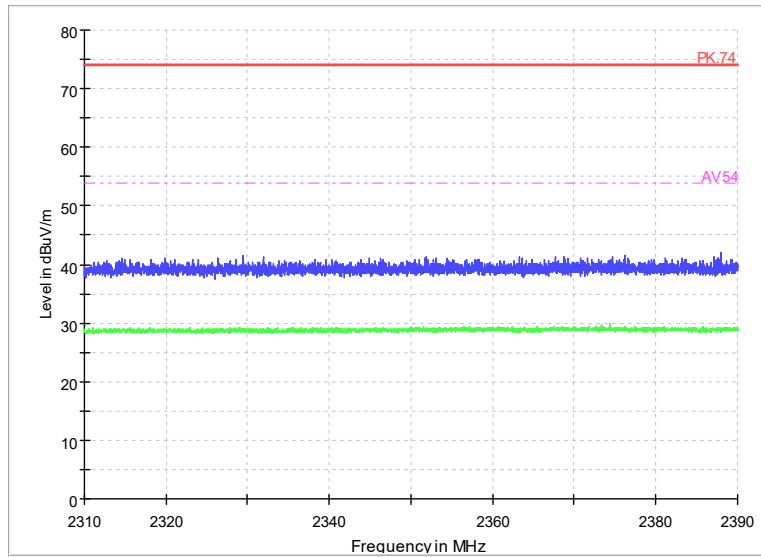


Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: Coded 500K
Polarity: Vertical

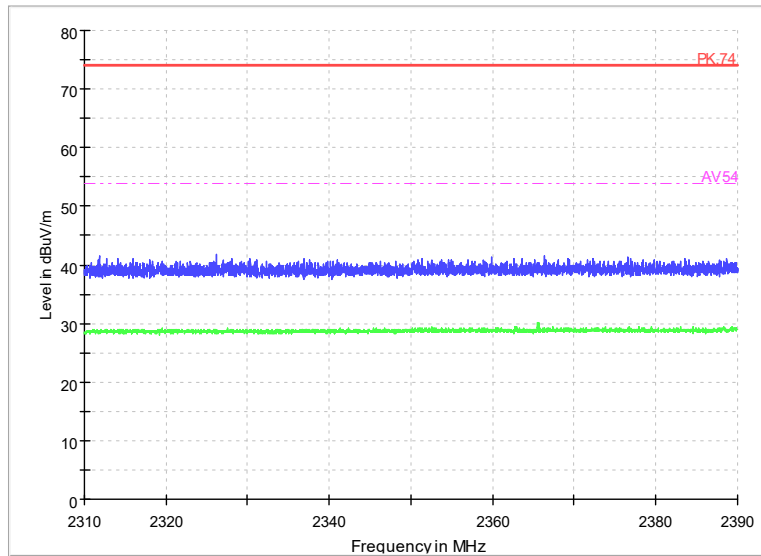

Carrier frequency (MHz): 2402
Channel No.:0
Test Mode: Coded 500K
Polarity: Horizontal

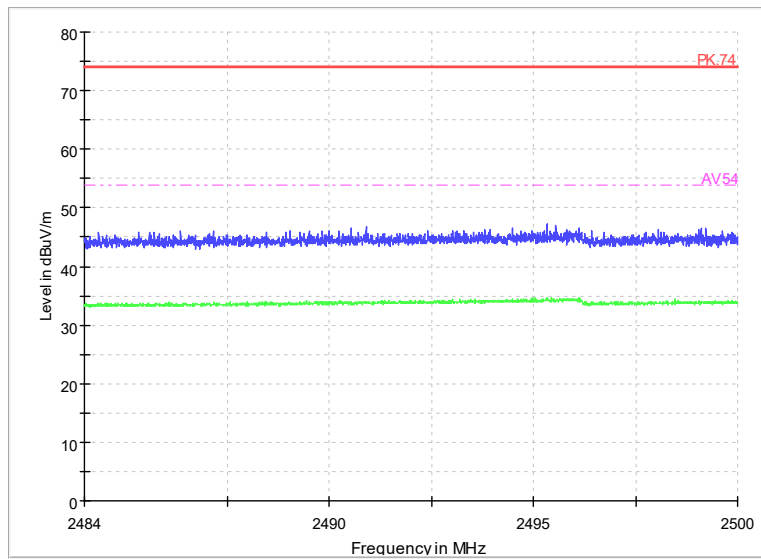

Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: Coded 500K
Polarity: Vertical

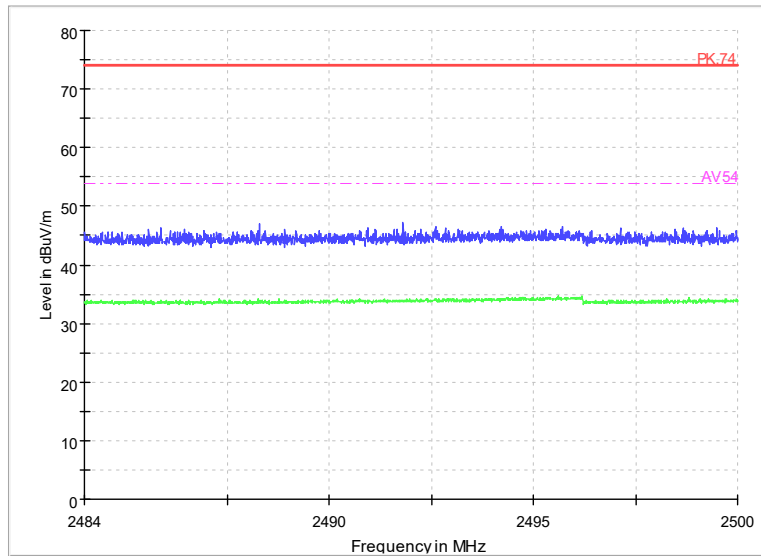

Carrier frequency (MHz): 2480
Channel No.:39
Test Mode: Coded 500K
Polarity: Horizontal



Sample Calculations

After comparison, the worst case attitude is EUT lay down.

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: $(11.71\text{dB}\mu\text{V/m}) = (23.97\text{dBuV}) + (-12.8\text{dB/m})$, the corresponding frequency is 30.5335MHz.

For GFSK (LE 1Mbps)

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.5335	11.17	-12.8	23.97	Vertical	40	28.83
81.0705	17.57	-23.7	41.27	Vertical	40	22.43
115.4085	17.48	-21.5	38.98	Vertical	43.5	26.02
230.0625	12.15	-21.1	33.25	Vertical	46	33.85
512.3325	10.79	-11.8	22.59	Vertical	46	35.21
909.596	16.64	-4.6	21.24	Vertical	46	29.36

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30	12.29	-12.6	24.89	Vertical	40	27.71
80.9735	17.25	-23.7	40.95	Vertical	40	22.75
111.383	17.76	-21.6	39.36	Vertical	43.5	25.74
214.8335	10.17	-21.9	32.07	Vertical	43.5	33.33
538.086	11.11	-11.4	22.51	Vertical	46	34.89
943.7885	17.05	-4.2	21.25	Vertical	46	28.95

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.097	12.14	-12.6	24.74	Vertical	40	27.86
78.985	14.95	-23.9	38.85	Vertical	40	25.05
109.831	17.7	-21.6	39.3	Vertical	43.5	25.8
215.173	10.04	-21.9	31.94	Vertical	43.5	33.46
519.947	11.01	-11.8	22.81	Vertical	46	34.99
931.7605	17.03	-4.3	21.33	Vertical	46	28.97

For GFSK (LE 2Mbps)

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
34.0255	10.69	-14.6	25.29	Vertical	40	29.31
81.0705	17.46	-23.7	41.16	Vertical	40	22.54
110.025	17.3	-21.6	38.9	Vertical	43.5	26.2



212.748	9.74	-22	31.74	Vertical	43.5	33.76
554.673	10.84	-11.1	21.94	Vertical	46	35.16
955.5255	17.03	-4	21.03	Vertical	46	28.97

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.3395	11.67	-12.7	24.37	Vertical	40	28.33
81.0705	17.64	-23.7	41.34	Vertical	40	22.36
115.457	17.57	-21.5	39.07	Vertical	43.5	25.93
234.6215	12.52	-20.9	33.42	Vertical	46	33.48
513.0115	10.88	-11.8	22.68	Vertical	46	35.12
941.412	17.04	-4.2	21.24	Vertical	46	28.96

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.1455	11.99	-12.6	24.59	Vertical	40	28.01
76.9965	14.76	-23.9	38.66	Vertical	40	25.24
115.8935	17.24	-21.4	38.64	Vertical	43.5	26.26
233.9425	12.69	-21	33.69	Vertical	46	33.31
491.2835	10.05	-12.3	22.35	Vertical	46	35.95
917.9865	16.72	-4.4	21.12	Vertical	46	29.28

For Coded 125K

Channel No.:0

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.5335	11.14	-12.8	23.94	Vertical	40	28.86
80.9735	16.24	-23.7	39.94	Vertical	40	23.76
111.383	17.38	-21.6	38.98	Vertical	43.5	26.12
234.8155	12.47	-20.9	33.37	Vertical	46	33.53
514.1755	10.95	-11.8	22.75	Vertical	46	35.05
886.51	16.11	-5	21.11	Vertical	46	29.89

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
34.074	10.72	-14.6	25.32	Vertical	40	29.28
80.9735	16.5	-23.7	40.2	Vertical	40	23.5
114.196	17.07	-21.5	38.57	Vertical	43.5	26.43
208.577	8.95	-22.2	31.15	Vertical	43.5	34.55
543.227	11.15	-11.3	22.45	Vertical	46	34.85
921.624	16.8	-4.4	21.2	Vertical	46	29.2

Channel No.:39



Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
34.6075	10.7	-14.9	25.6	Vertical	40	29.3
78.985	14.92	-23.9	38.82	Vertical	40	25.08
111.383	17.11	-21.6	38.71	Vertical	43.5	26.39
215.2215	9.94	-21.9	31.84	Vertical	43.5	33.56
502.875	10.4	-12	22.4	Vertical	46	35.6
957.611	16.94	-4	20.94	Vertical	46	29.06

For Coded 500K
Channel No.:0


Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.194	11.89	-12.6	24.49	Vertical	40	28.11
81.022	17.58	-23.7	41.28	Vertical	40	22.42
109.2005	17.32	-21.7	39.02	Vertical	43.5	26.18
214.5425	10.04	-21.9	31.94	Vertical	43.5	33.46
521.7415	11	-11.7	22.7	Vertical	46	35
959.26	17.04	-4	21.04	Vertical	46	28.96

Channel No.:19

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.1455	11.99	-12.6	24.59	Vertical	40	28.01
80.9735	16.3	-23.7	40	Vertical	40	23.7
115.457	17.46	-21.5	38.96	Vertical	43.5	26.04
234.1365	12.78	-21	33.78	Vertical	46	33.22
519.0255	11.01	-11.8	22.81	Vertical	46	34.99
906.201	16.52	-4.7	21.22	Vertical	46	29.48

Channel No.:39

Frequency (MHz)	Result (dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)	Margin (dB)
30.0485	12.17	-12.6	24.77	Vertical	40	27.83
81.022	16.06	-23.7	39.76	Vertical	40	23.94
113.42	16.45	-21.5	37.95	Vertical	43.5	27.05
230.014	10.34	-21.1	31.44	Vertical	46	35.66
496.5215	10.23	-12.2	22.43	Vertical	46	35.77
958.8235	16.98	-4	20.98	Vertical	46	29.02

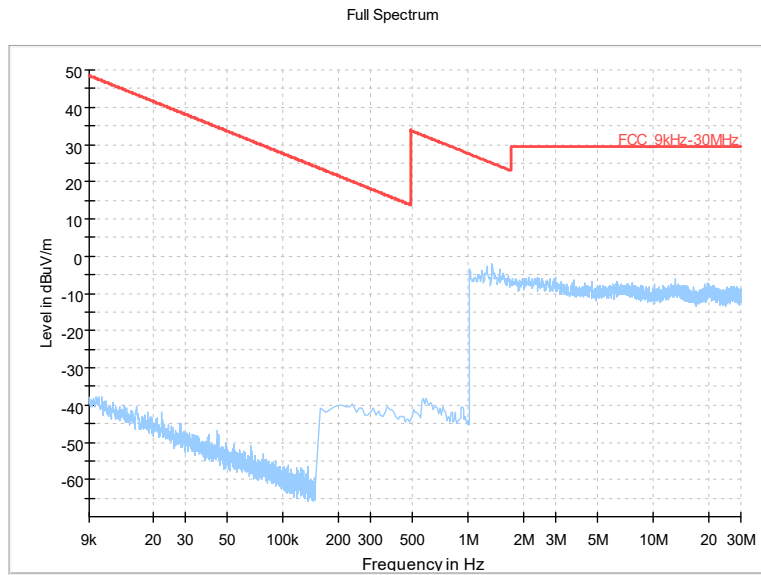


Frequency Range: 9kHz -30MHz

Detector: QP mode

Note: The relevant tests have been performed in order to verify in which mode would have the worst features, the result show above is the worst case.

Channel No.:0

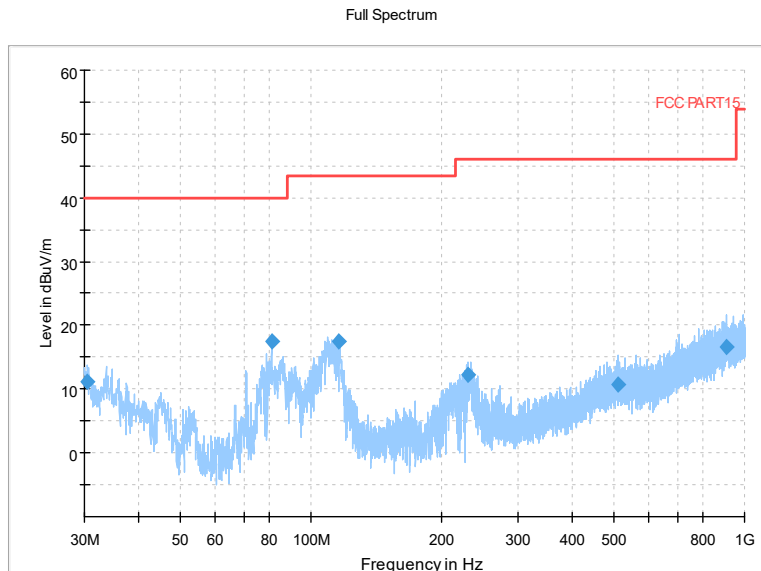


Frequency Range: 30MHz-1GHz

Detector: QP mode


Modulation type: GFSK (LE 1Mbps)

Full Spectrum

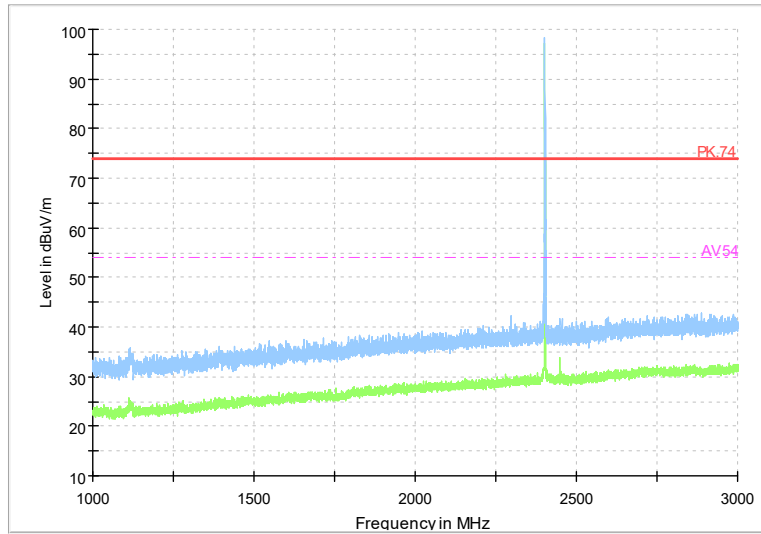


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

Full Spectrum

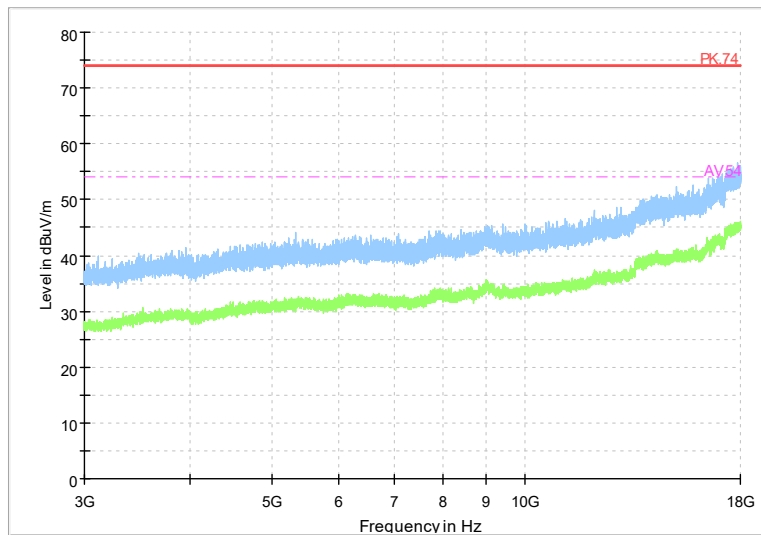

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)


Full Spectrum

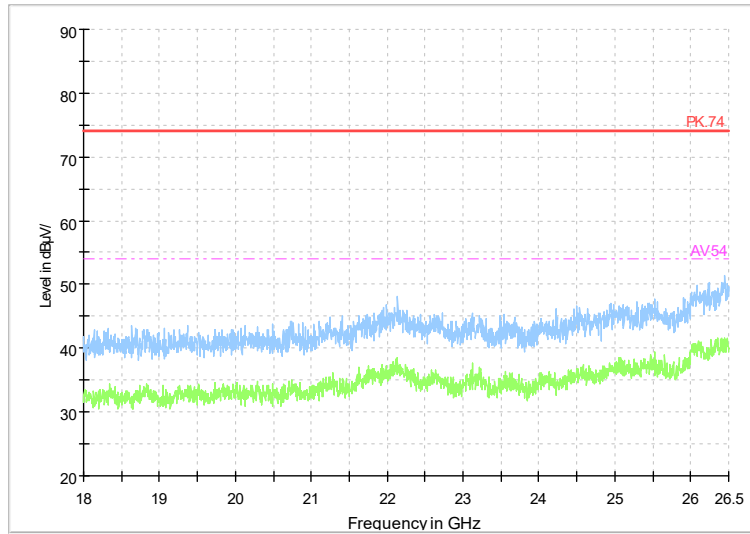

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)


Channel No.:19

Full Spectrum

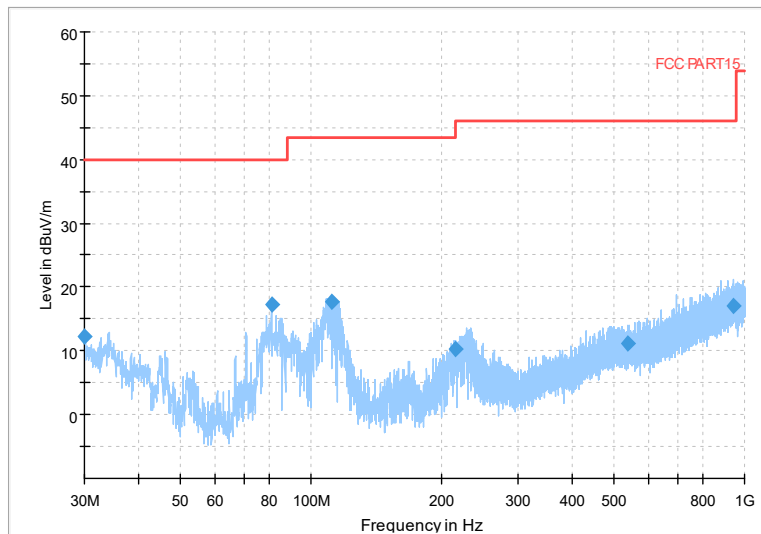


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: GFSK (LE 1Mbps)

Full Spectrum

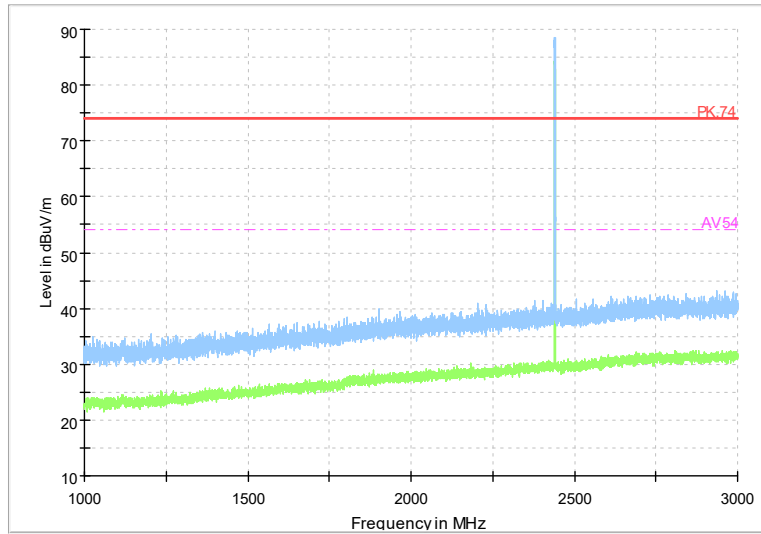

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)


Full Spectrum

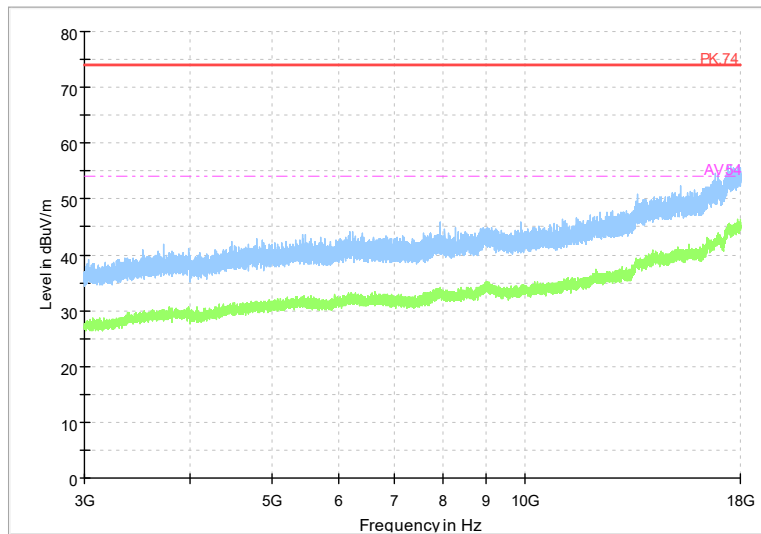

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)




Full Spectrum

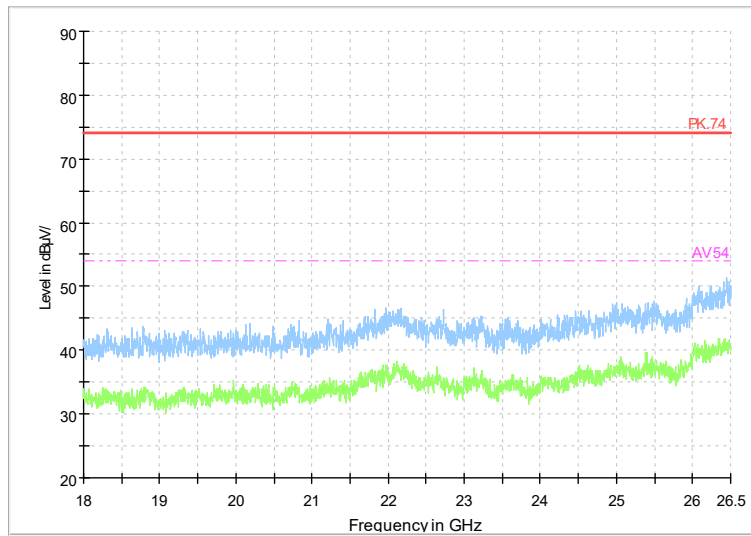


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)



Channel No.:39

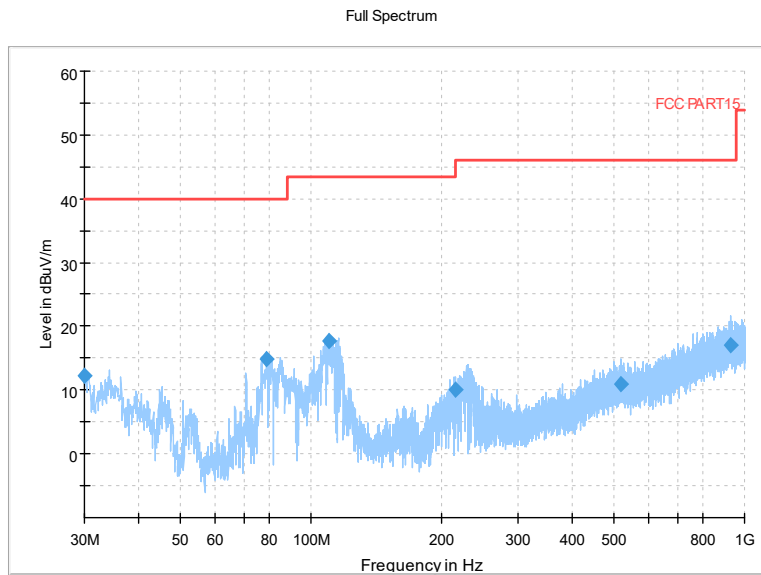


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: GFSK (LE 1Mbps)

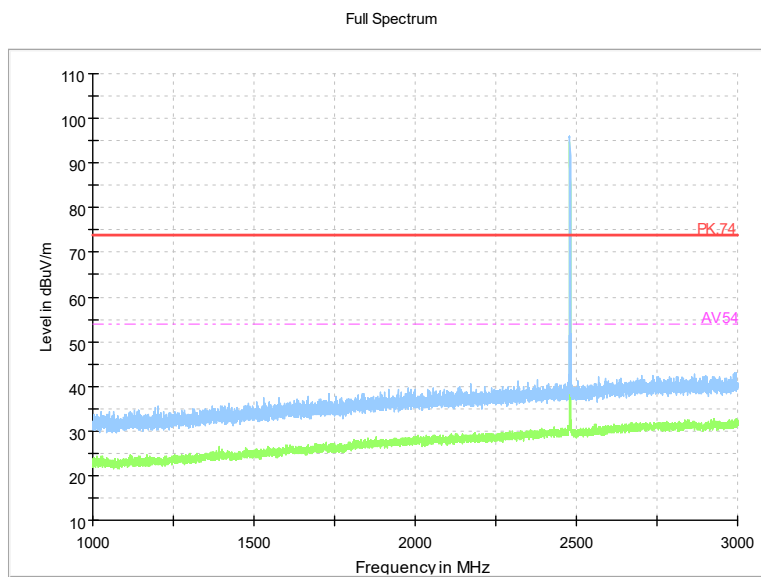


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

Full Spectrum

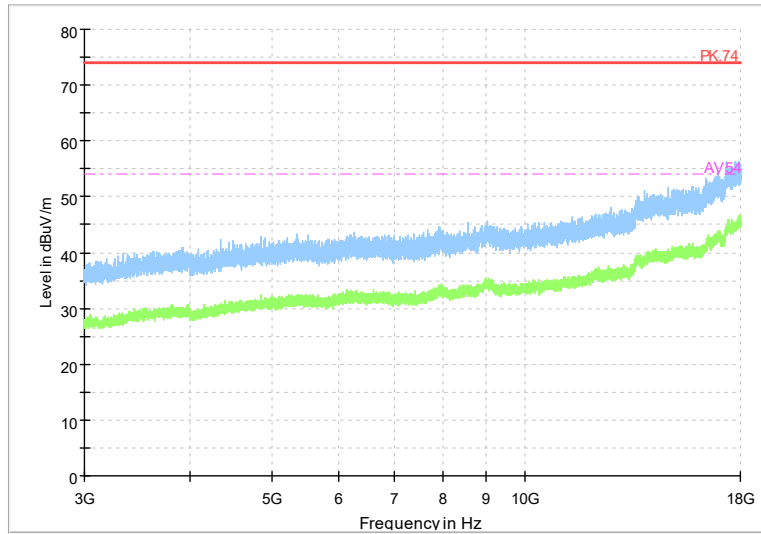


Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

Full Spectrum

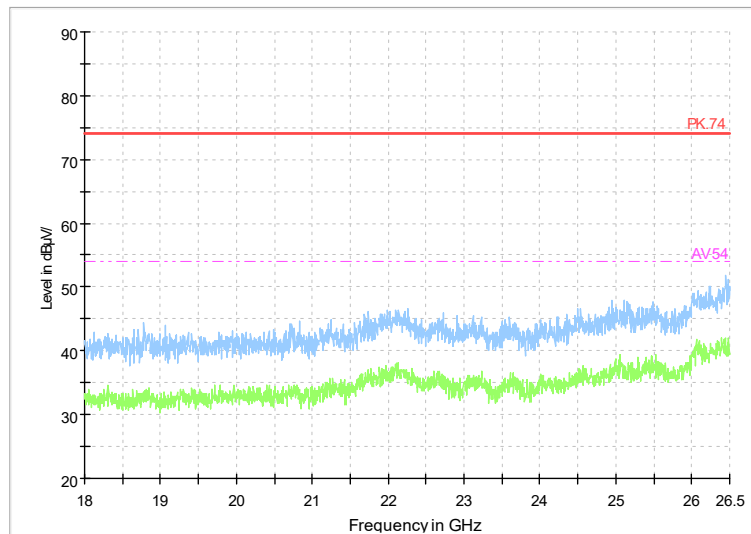


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 1Mbps)

Channel No.:0

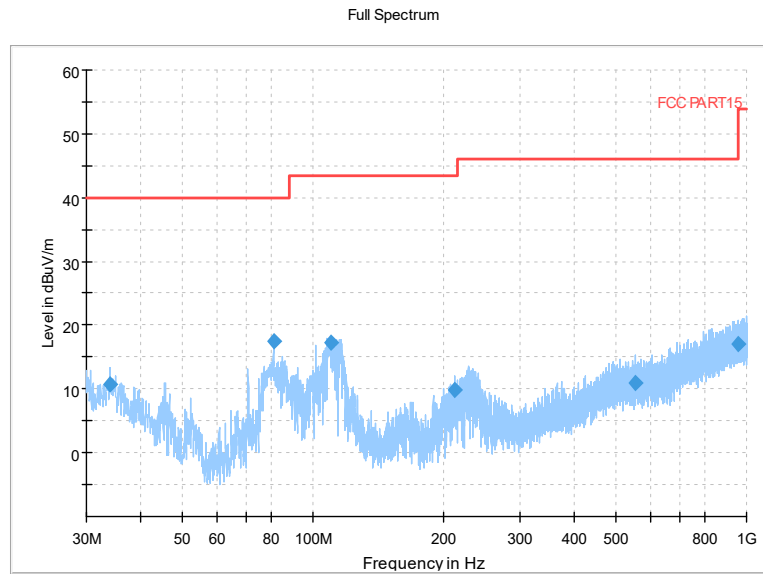


Frequency Range: 30MHz-1GHz
Detector:QP mode
Modulation type: GFSK (LE 2Mbps)

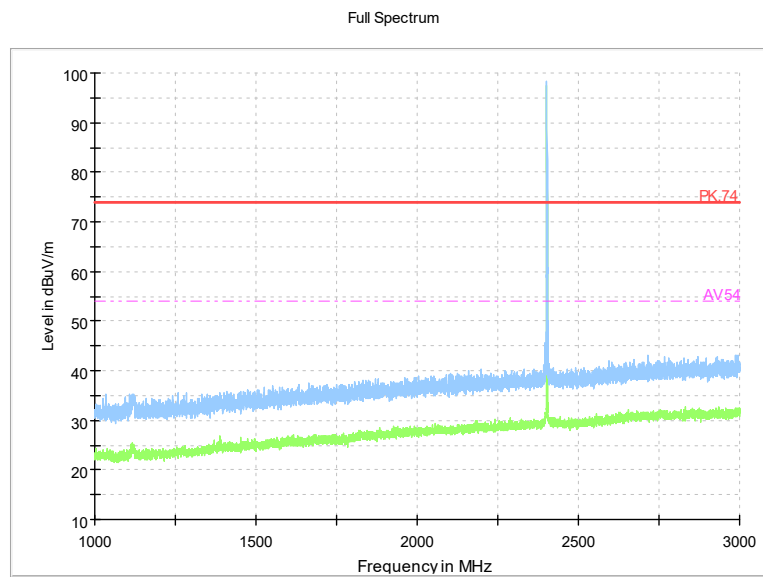


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)

Full Spectrum

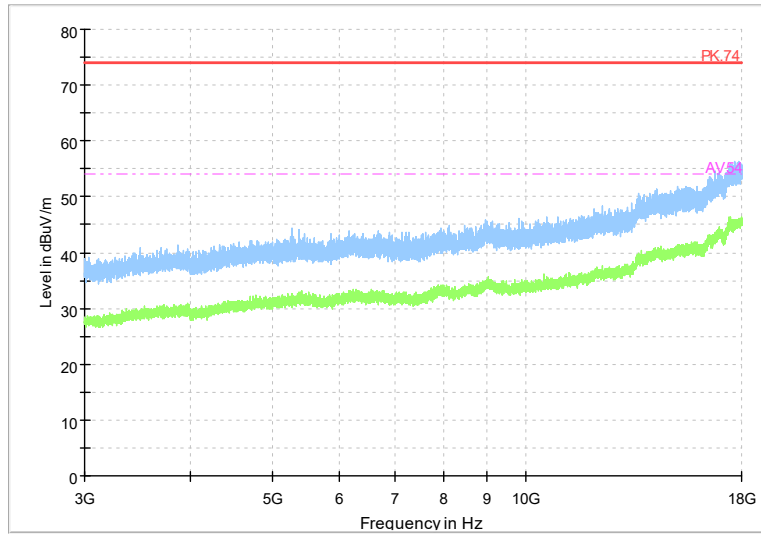

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)


Full Spectrum

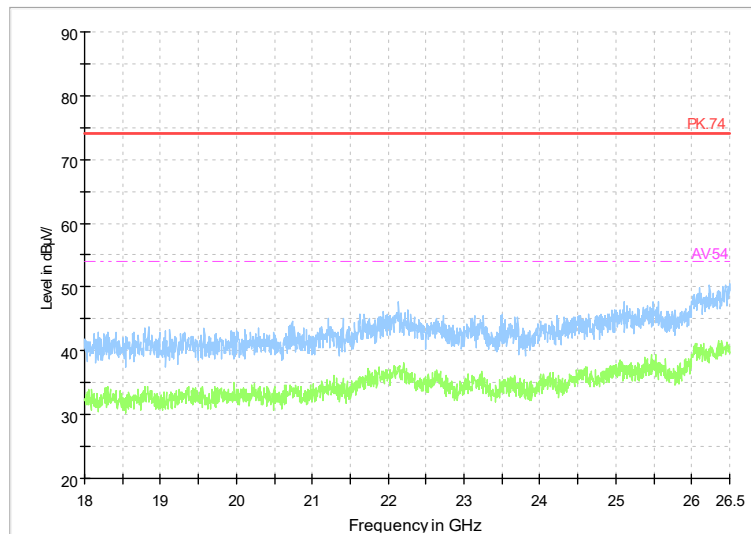


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)



Channel No.:19

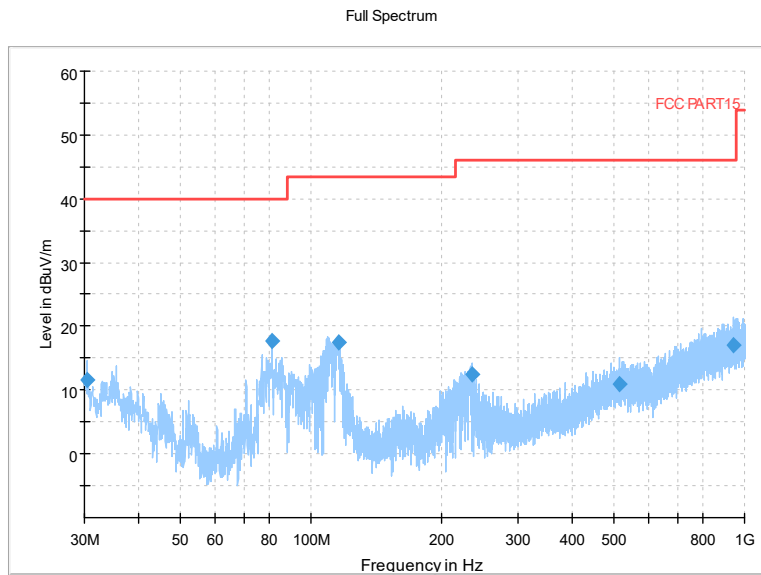


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: GFSK (LE 2Mbps)

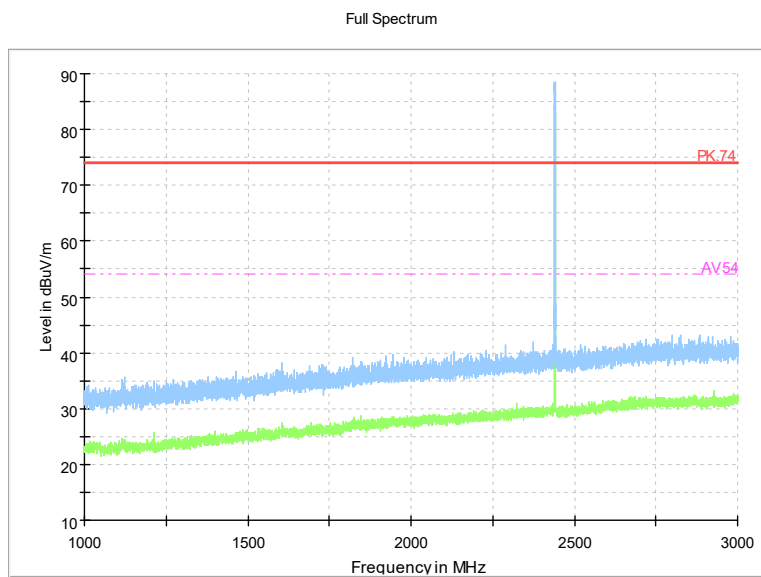


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)

Full Spectrum

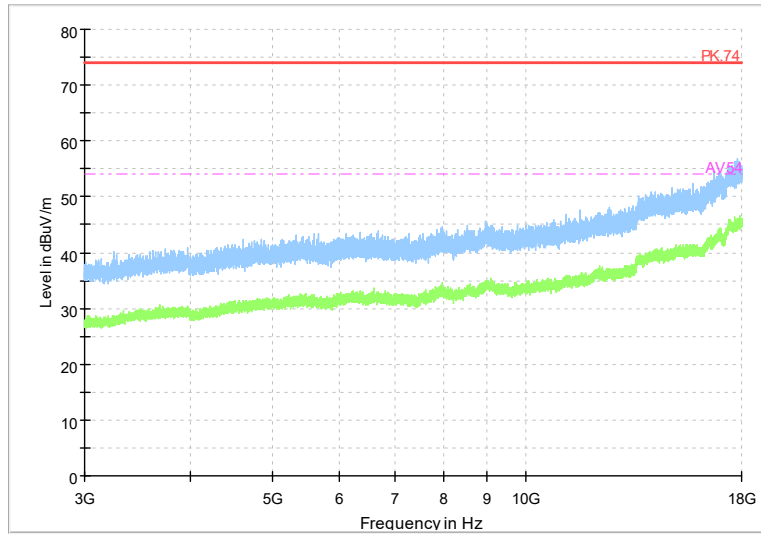

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)


Full Spectrum

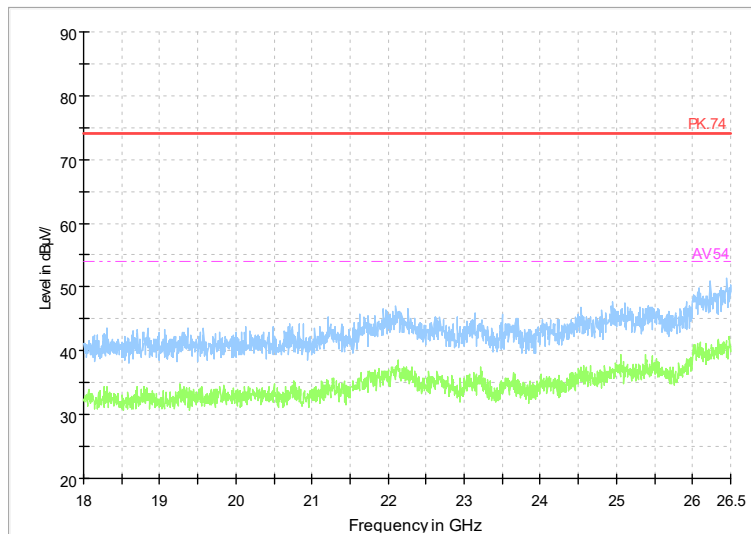


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)



Channel No.:39

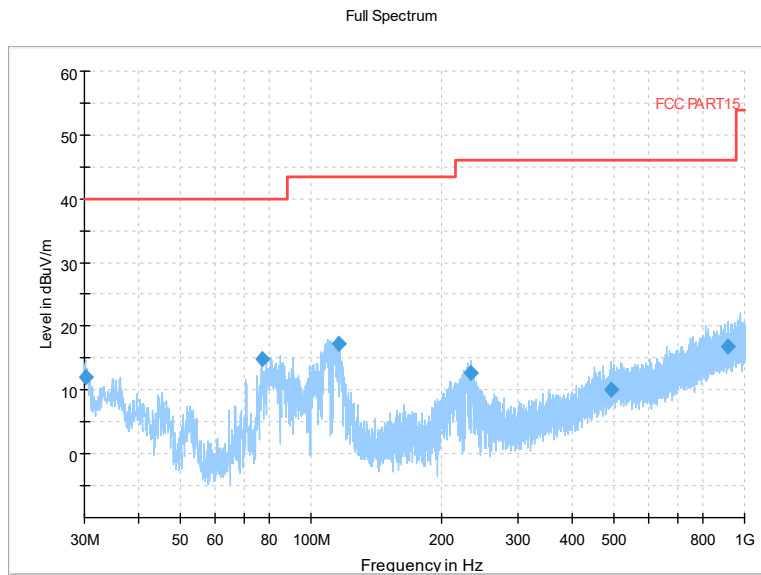


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: GFSK (LE 2Mbps)

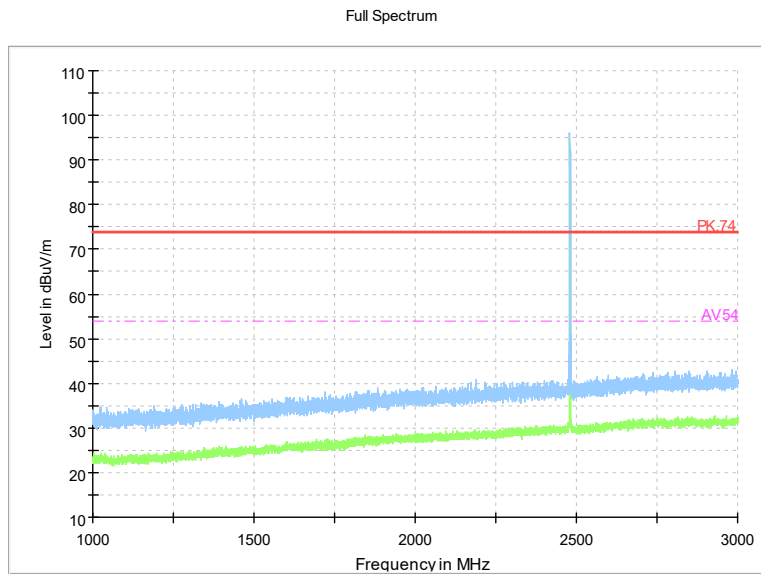


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)

Full Spectrum

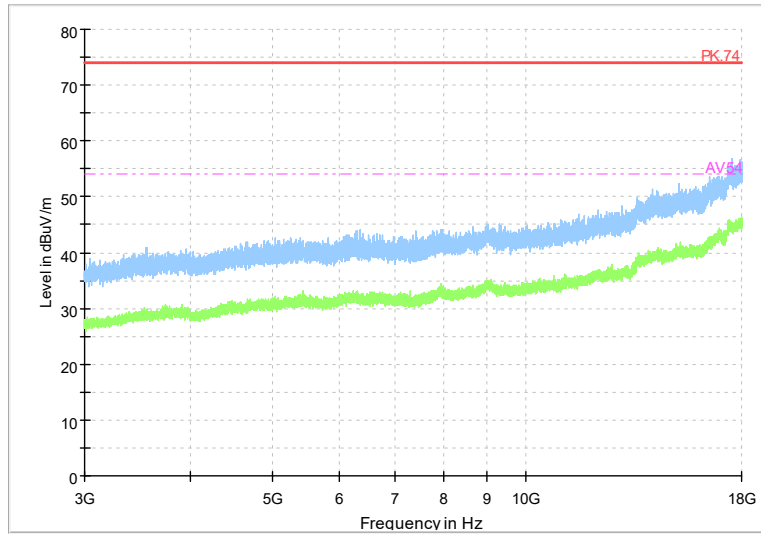

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)


Full Spectrum

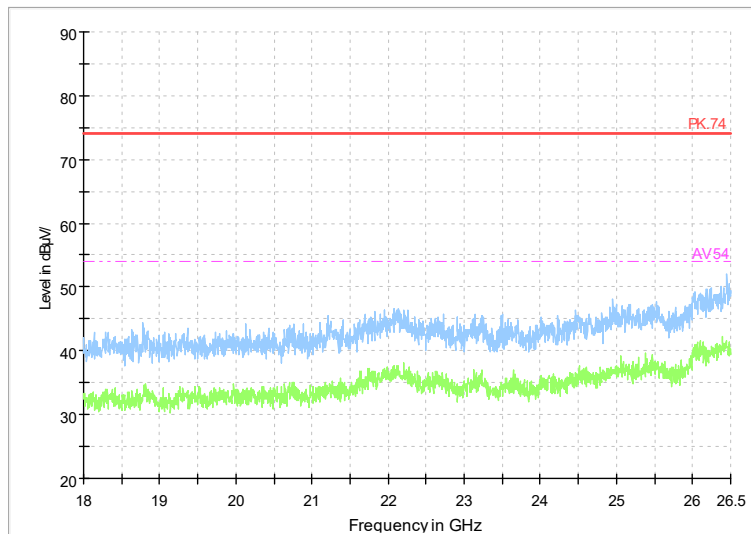

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: GFSK (LE 2Mbps)


Channel No.:0

Full Spectrum

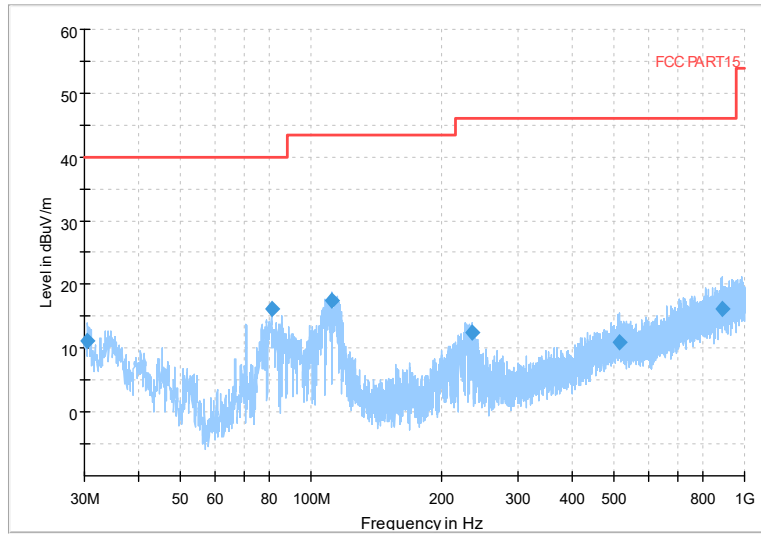

Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: Coded 125K


Full Spectrum

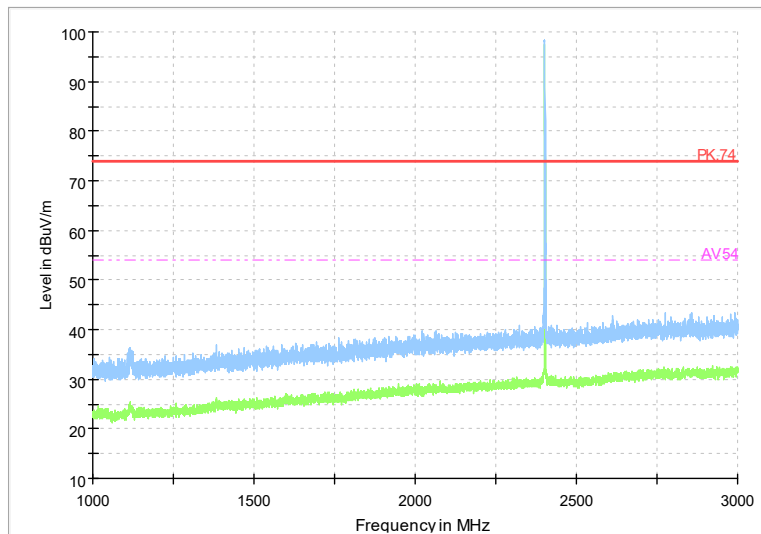

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K




Full Spectrum

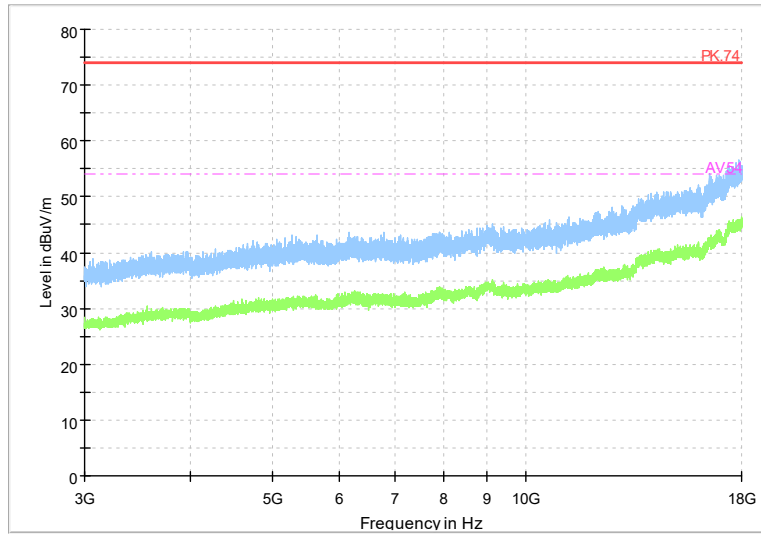

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K


Full Spectrum

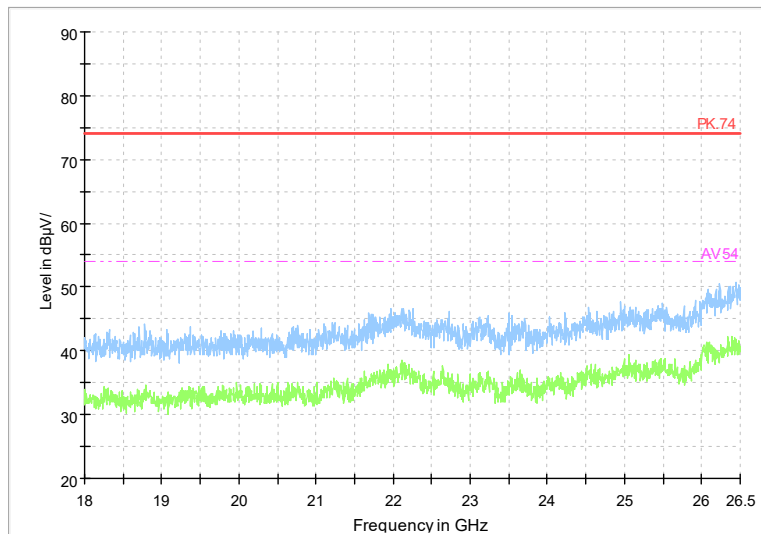


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K



Channel No.:19

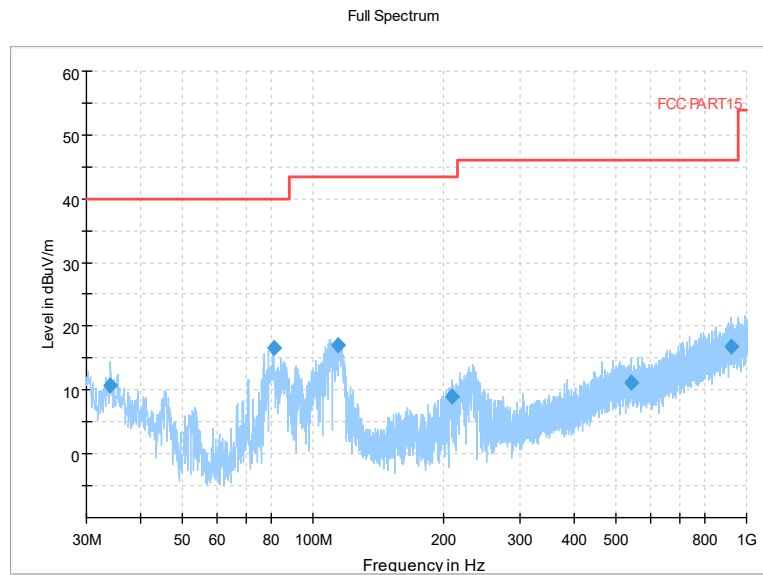


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: Coded 125K

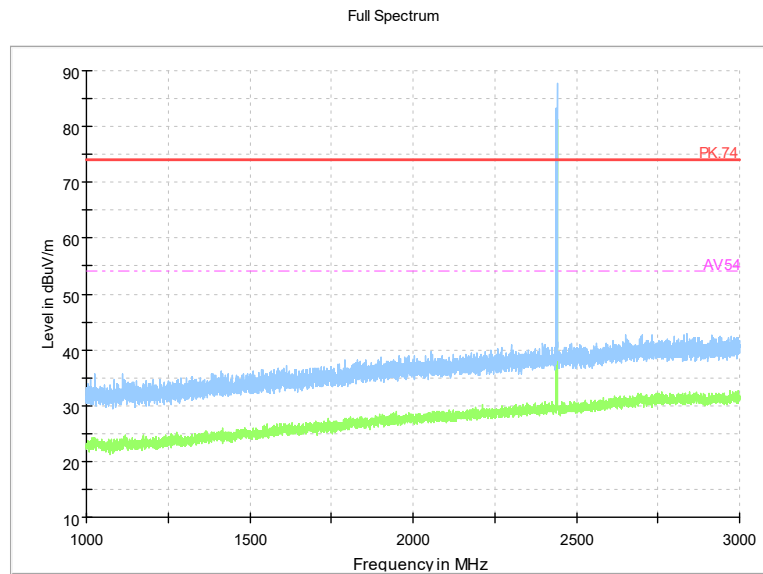

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K




Full Spectrum

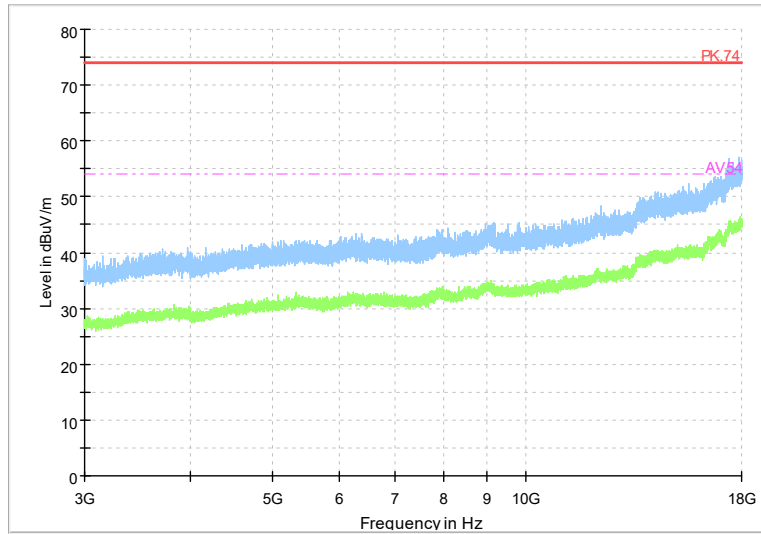

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K


Full Spectrum

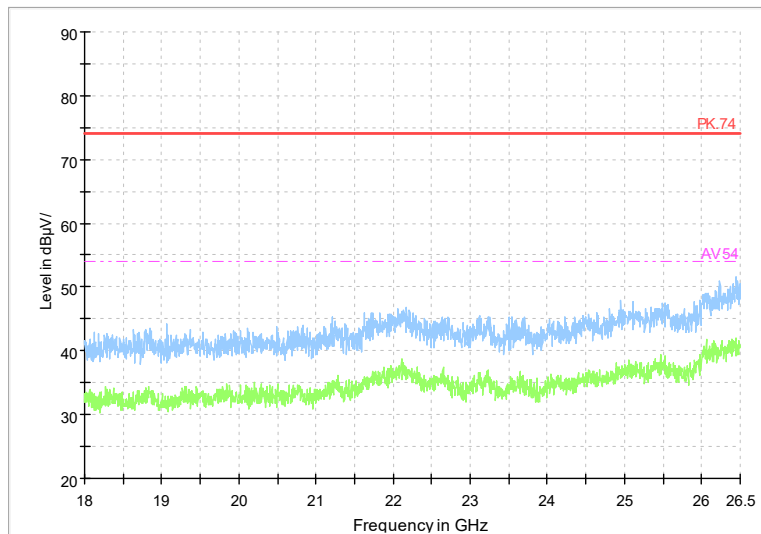


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K



Channel No.:39

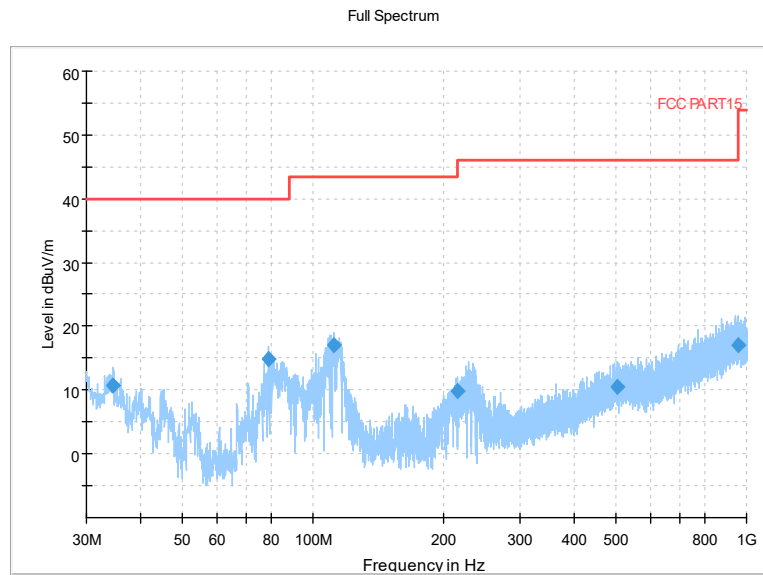


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: Coded 125K

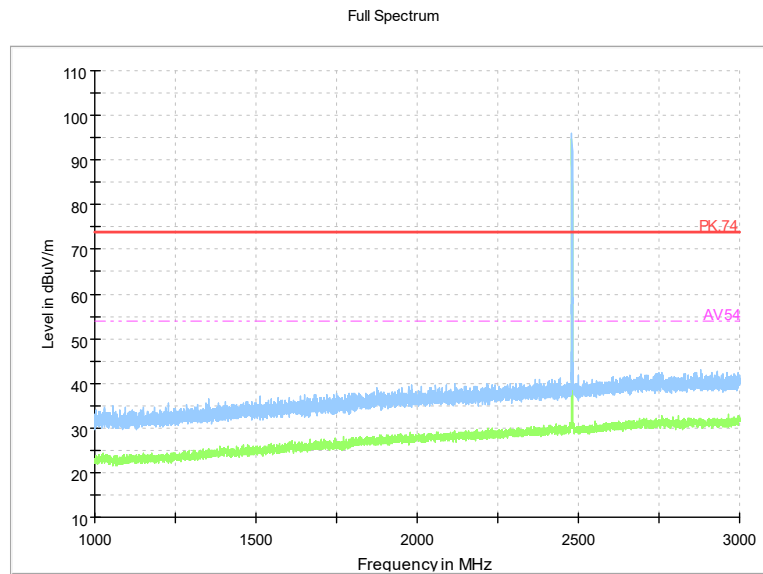

Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K




Full Spectrum

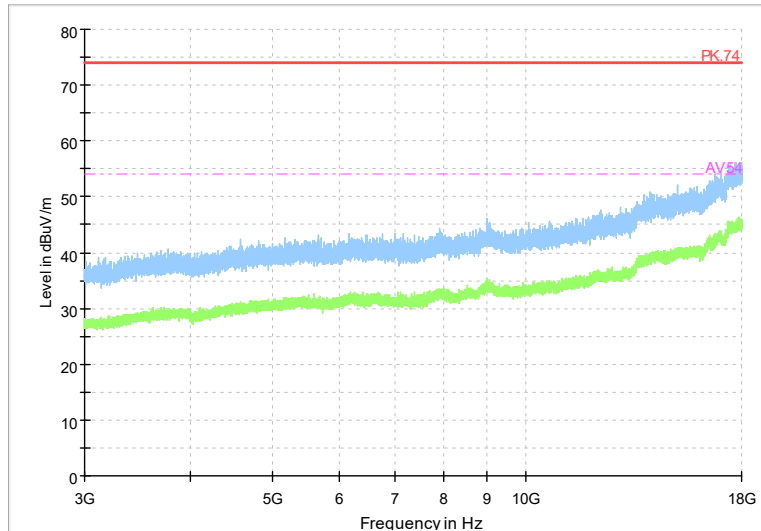

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K


Full Spectrum

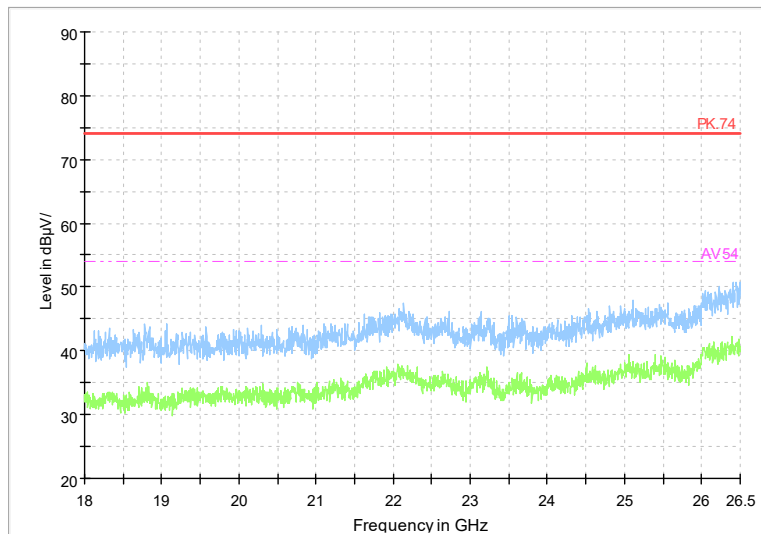

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: Coded 125K


Channel No.:0

Full Spectrum

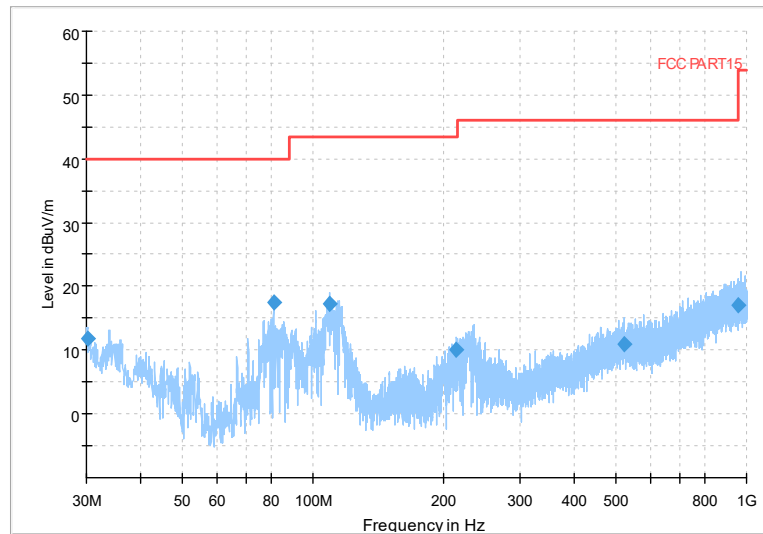


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: Coded 500K

Full Spectrum

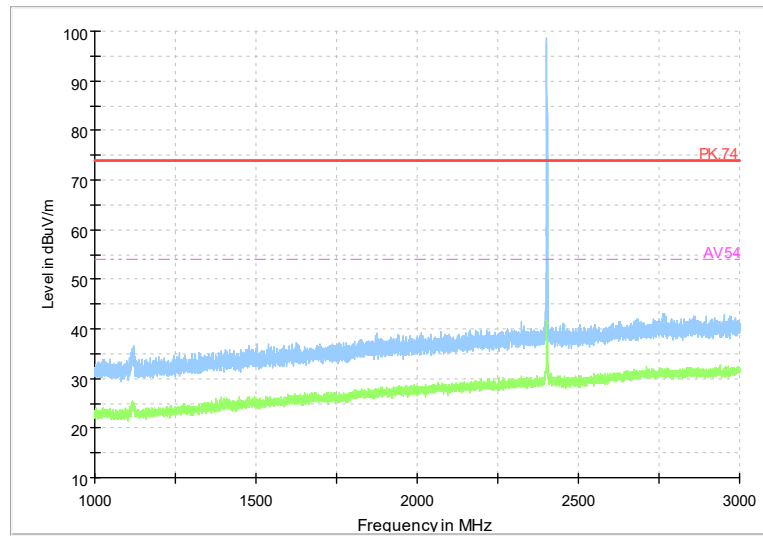


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K

Full Spectrum

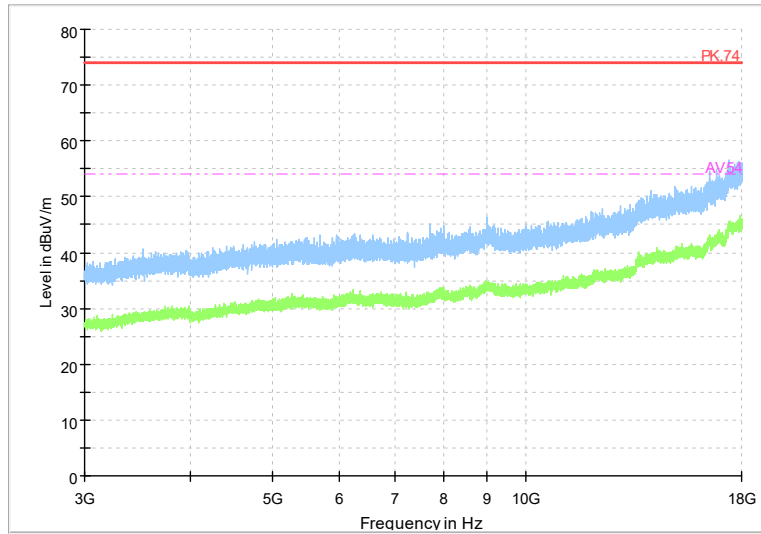

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K


Full Spectrum

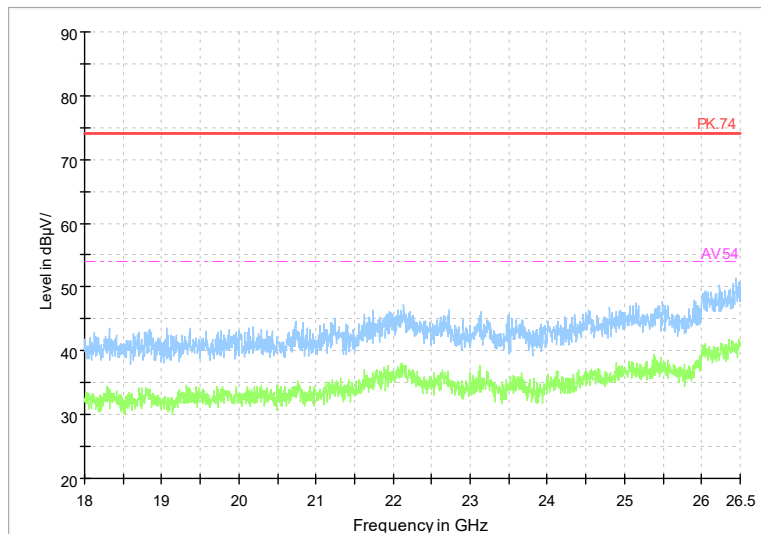


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K



Channel No.:19

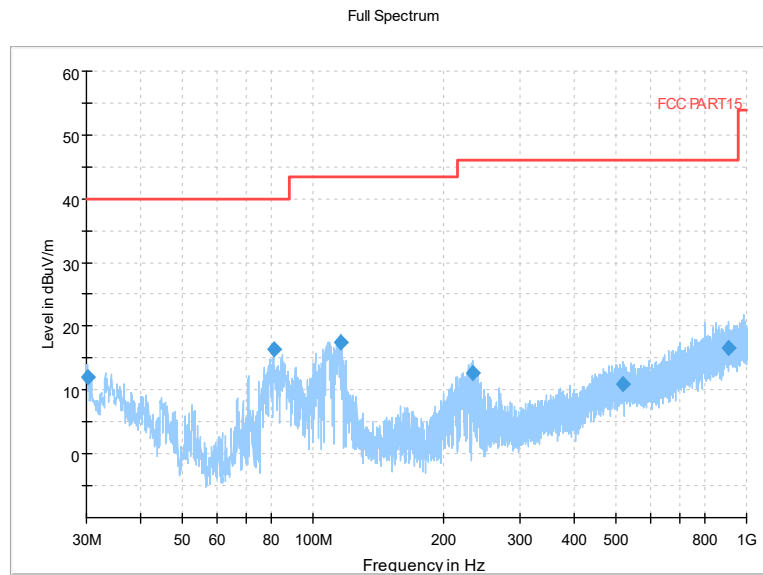


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: Coded 500K

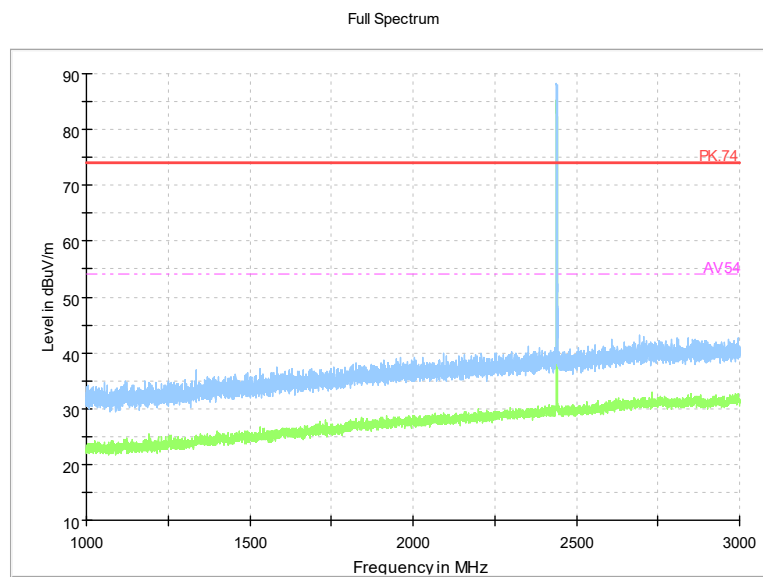


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K

Full Spectrum

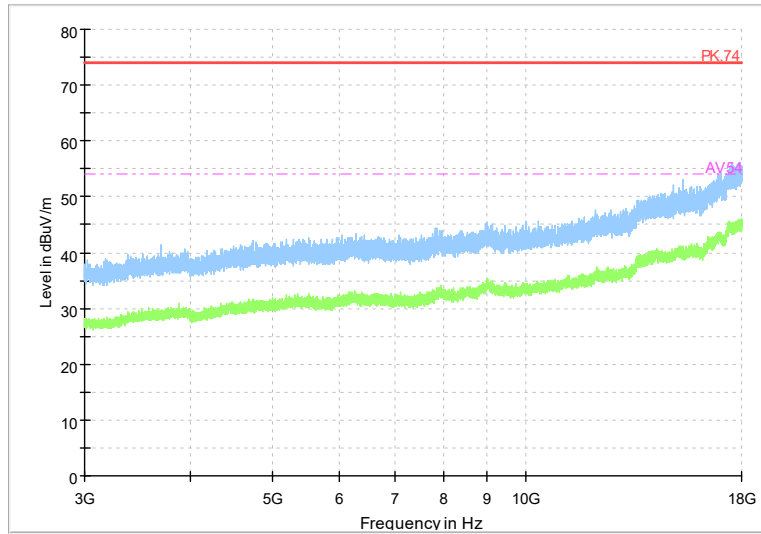

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K


Full Spectrum

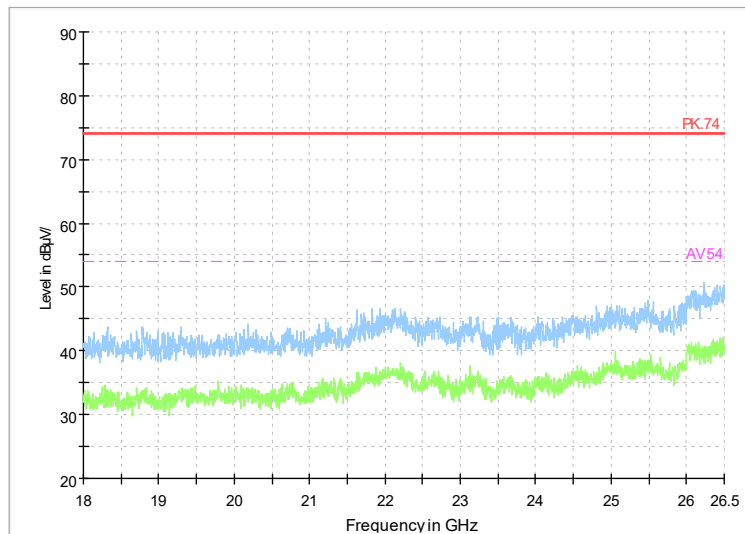


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K



Channel No.:39

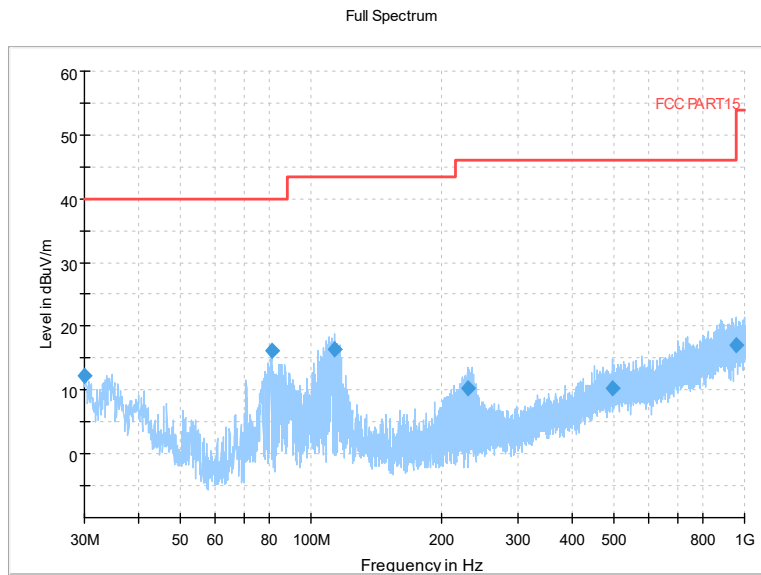


Frequency Range: 30MHz-1GHz
Detector: QP mode
Modulation type: Coded 500K

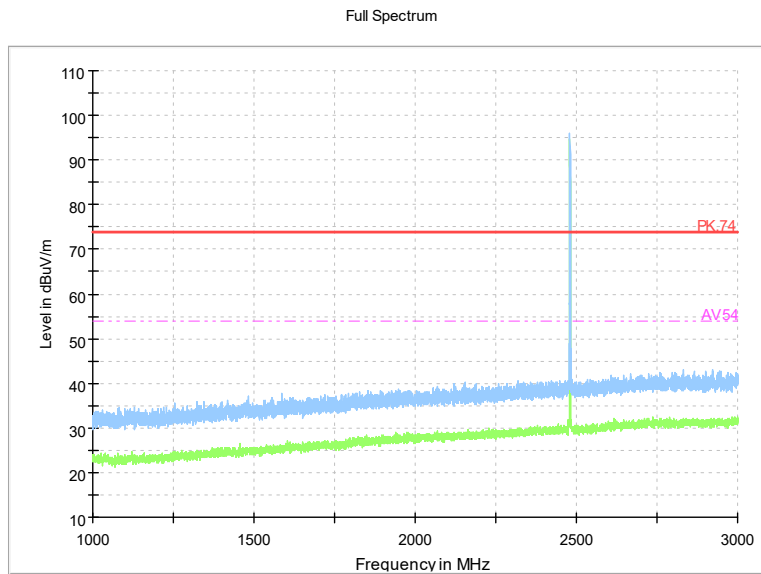


Frequency Range: 1GHz-3GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K

Full Spectrum

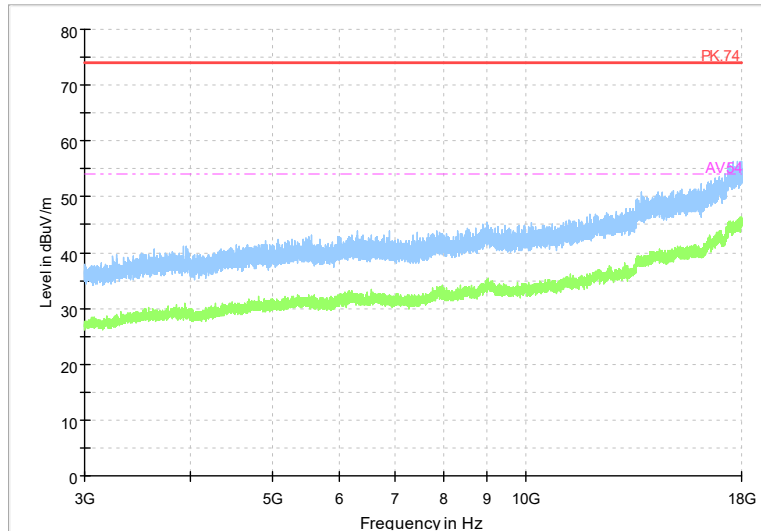

Frequency Range: 3GHz-18GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K

Full Spectrum

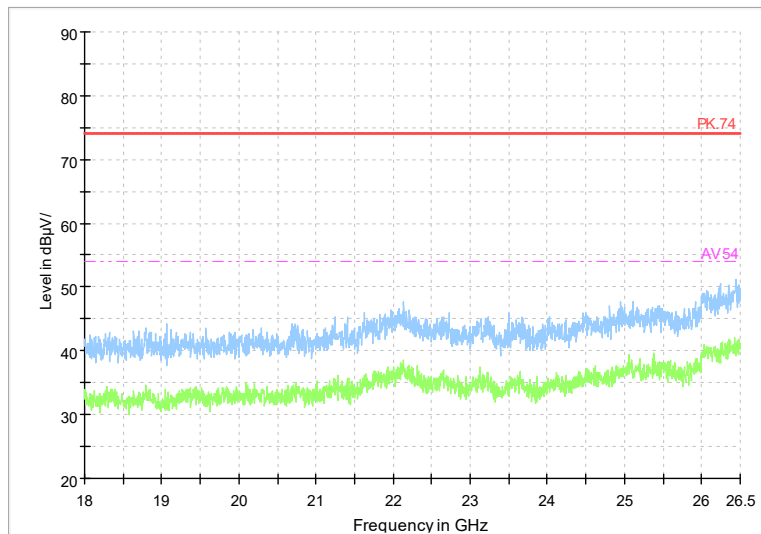

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: Coded 500K


AC Power line Conducted Emission

A "reference path loss" Corr.(dB) is established and the $L_{\text{cable}} + \text{ATT} + \text{VDF}$ is the attenuation of "reference path loss", and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{\text{result}} = P_{\text{mea}} + \text{Corr. (dB)}$$

Sample calculation: $(32.01 \text{ dB}\mu\text{V}) = (2.41 \text{ dB}\mu\text{V}) + (29.6 \text{ dB})$, the corresponding frequency is 0.15 MHz.

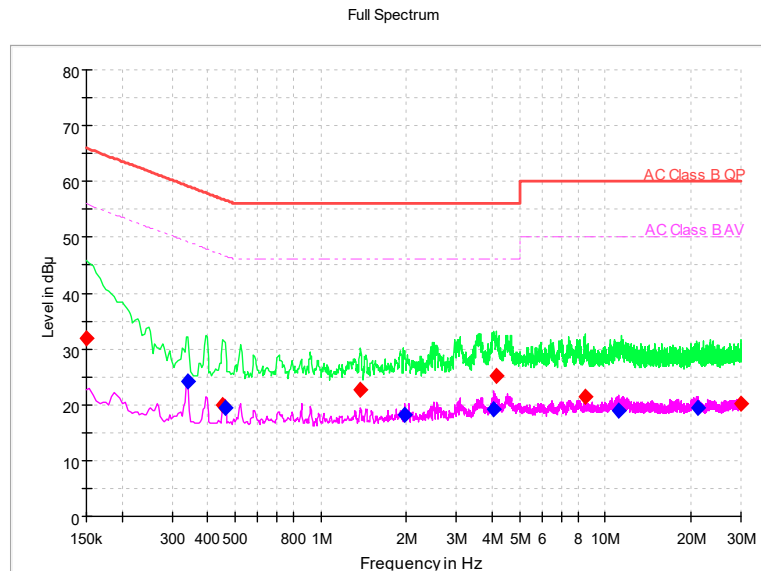

L+N Line

MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Pmea QuasiPeak (dBμV)	Pmea Average (dBμV)
0.15	32.01	---	66	33.99	N	29.6	2.41	---
0.341893	---	24.08	49.16	25.08	L1	29.6	---	-5.52
0.452764	19.91	---	56.82	36.91	L1	29.6	-9.69	---
0.461293	---	19.5	46.67	27.17	L1	29.6	---	-10.1
1.382379	22.65	---	56	33.35	L1	29.6	-6.95	---
1.975114	---	18.28	46	27.72	L1	29.6	---	-11.32
4.068879	---	19.2	46	26.8	L1	29.6	---	-10.4
4.137107	25.06	---	56	30.94	L1	29.6	-4.54	---
8.508	21.39	---	60	38.61	L1	29.8	-8.41	---
11.10921	---	19.02	50	30.98	L1	29.9	---	-10.88
21.10896	---	19.42	50	30.58	L1	30.3	---	-10.88
29.95735	20.29	---	60	39.71	N	30.7	-10.41	---



---End of Test Report---