



# TEST REPORT

## FCC ID: 2ANIFDS02S

### IC: 24572-DS02S

Product	:	Smart Dimmer Switch
Model Name	:	DS02S
Brand	:	TREATLIFE
Report No.	:	PTC19042801301E-FC01
<b>Prepared for</b>		
ShenZhen RuiMaiDe(RMD) Technology Co., LTD		
# 02-J201,Jinhetian Commercial Center,No.329 Longhuan 3 <sup>rd</sup> Street,Longhua District ShenZhen,China		
<b>Prepared by</b>		
Dongguan Precise Testing & Certification Corp., LTD.		
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China		



## 1 TEST RESULT CERTIFICATION

Applicant's name : ShenZhen RuiMaiDe(RMD) Technology Co., LTD

Address : # 02-J201,Jinhetian Commercial Center,No.329 Longhuan 3<sup>rd</sup> Street,Longhua District ShenZhen,China

Manufacture's name : ShenZhen RuiMaiDe(RMD) Technology Co., LTD

Address : # 02-J201,Jinhetian Commercial Center,No.329 Longhuan 3<sup>rd</sup> Street,Longhua District ShenZhen,China

Product name : Smart Dimmer Switch

Model name : DS02S

Standards : FCC CFR47 Part 15 Section 15.247  
RSS-Gen Issue 5 , RSS-247 Issue 2

Test procedure : ANSI C63.10:2013

Test Date : June 08, 2019 to June 16, 2018

Date of Issue : June 26, 2018

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads "Leo Yang" with a checkmark at the end.

Leo Yang / Engineer

Technical Manager:

A handwritten signature in black ink that appears to read "Chris Du".

Chris Du / Manager



## Contents

	<b>Page</b>
<b>1 TEST RESULT CERTIFICATION.....</b>	<b>2</b>
<b>2 TEST SUMMARY .....</b>	<b>5</b>
<b>3 GENERAL INFORMATION .....</b>	<b>6</b>
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 CHANNEL LIST .....	7
3.3 TEST SITE .....	10
<b>4 EQUIPMENT DURING TEST .....</b>	<b>11</b>
4.1 EQUIPMENTS LIST .....	11
4.2 MEASUREMENT UNCERTAINTY.....	13
4.3 DESCRIPTION OF SUPPORT UNITS.....	14
<b>5 CONDUCTED EMISSION.....</b>	<b>15</b>
5.1 E.U.T. OPERATION .....	15
5.2 EUT SETUP .....	15
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	16
5.4 MEASUREMENT PROCEDURE.....	16
5.5 CONDUCTED EMISSION LIMIT.....	16
5.6 MEASUREMENT DESCRIPTION .....	16
5.7 CONDUCTED EMISSION TEST RESULT.....	16
<b>6 RADIATED SPURIOUS EMISSIONS.....</b>	<b>19</b>
6.1 EUT OPERATION.....	19
6.2 TEST SETUP .....	20
6.3 SPECTRUM ANALYZER SETUP .....	21
6.4 TEST PROCEDURE.....	22
6.5 SUMMARY OF TEST RESULTS .....	23
<b>7 CONDUCTED SPURIOUS EMISSION.....</b>	<b>29</b>
7.1 TEST PROCEDURE.....	29
7.2 TEST RESULT .....	29
<b>8 BAND EDGE MEASUREMENT .....</b>	<b>35</b>
8.1 TEST PROCEDURE.....	35



8.2	TEST RESULT .....	36
<b>9</b>	<b>6DB BANDWIDTH MEASUREMENT .....</b>	<b>39</b>
9.1	TEST PROCEDURE.....	39
9.2	TEST RESULT .....	39
<b>10</b>	<b>MAXIMUM PEAK OUTPUT POWER .....</b>	<b>45</b>
10.1	TEST PROCEDURE.....	45
10.2	TEST RESULT .....	45
<b>11</b>	<b>POWER SPECTRAL DENSITY .....</b>	<b>46</b>
11.1	TEST PROCEDURE.....	46
11.2	TEST RESULT .....	46
<b>12</b>	<b>ANTENNA APPLICATION .....</b>	<b>53</b>
12.1	ANTENNA REQUIREMENT .....	53
12.2	RESULT .....	53
<b>13</b>	<b>TEST SETUP .....</b>	<b>54</b>
<b>14</b>	<b>EUT PHOTOS.....</b>	<b>56</b>



## 2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207 RSS-Gen Issue 5 8.8	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d) RSS-Gen Issue 5 8.9	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a) RSS-247 Issue 5 5.5	PASS
6dB Bandwidth	15.247(a)(2) RSS-Gen Issue 5 6.6	PASS
Maximum Peak Output Power	15.247(b)(1) RSS-247 Issue 5 5.4(d)	PASS
Power Spectral Density	15.247(e) RSS-247 Issue 5 5.2(b)	PASS
Antenna Requirement	15.203 RSS-Gen Issue 5 6.8	PASS
Remark: N/A: Not Applicable		



### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name	:	Smart Dimmer Switch
Model Name	:	DS02S
Specification	:	802.11b/g/n HT20
Operation Frequency	:	2412-2462MHz
Number of Channel	:	11 channels
Type of Modulation	:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Antenna installation	:	PCB Antenna
Antenna Gain	:	2.5 dBi
Power supply	:	AC 100-240V, 50-60Hz
Hardware Version	:	V1.1
Software Version	:	V1.0



### 3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462




The maximum duty cycle as following table:

Test Mode	T <sub>on</sub> (ms)	T <sub>on+off</sub> (ms)	Duty Cycle(%)
802.11b	100	100	100%
802.11g	100	100	100%
802.11n(HT20)	100	100	100%

Test Plots:


### 802.11b

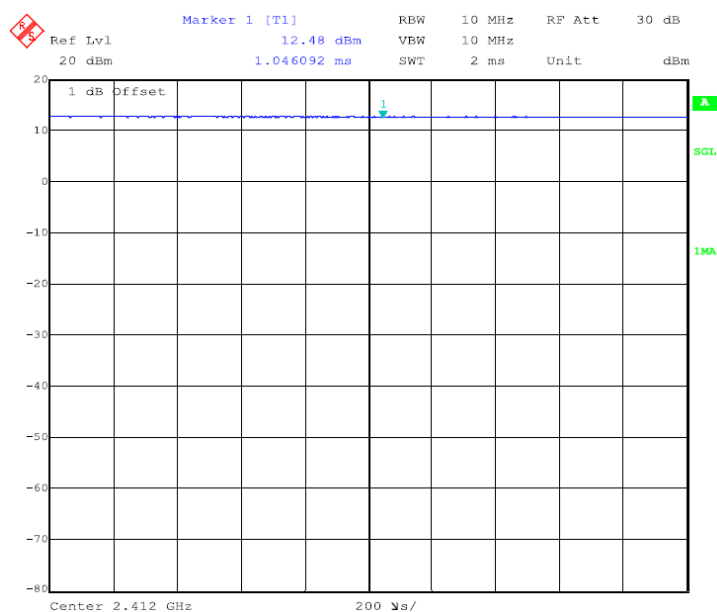






### 802.11g

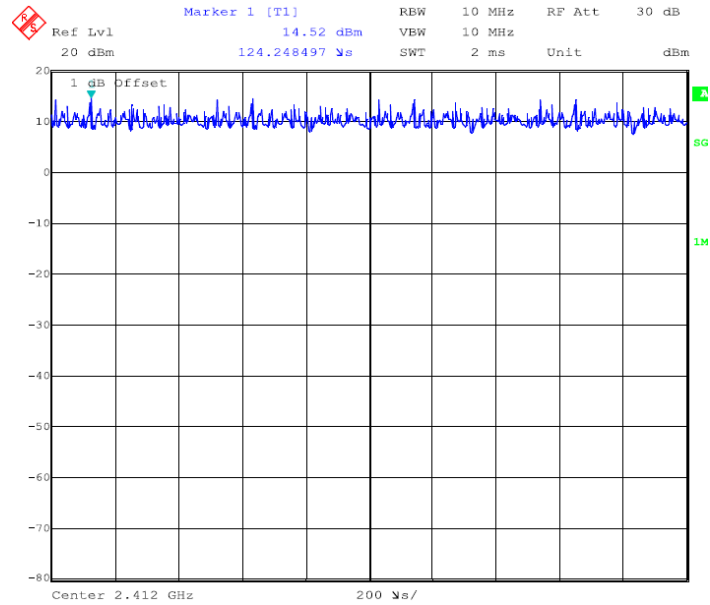

### 802.11n(HT20)

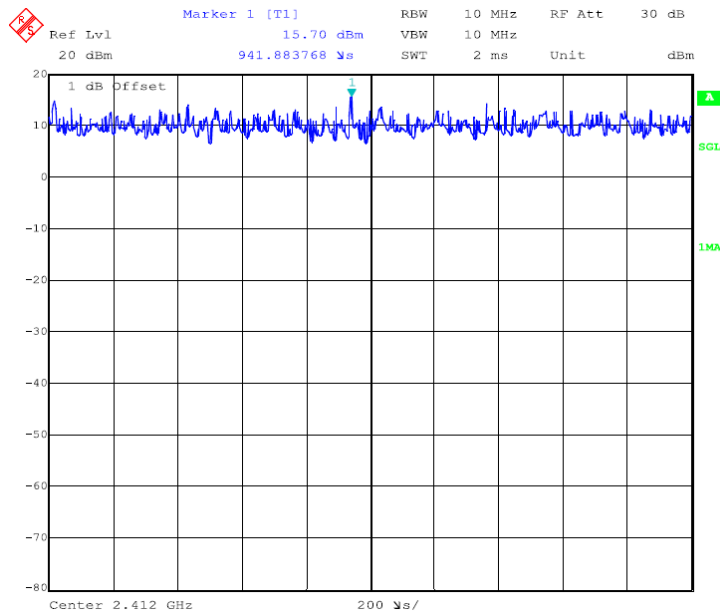



Report No.: PTC19042801301E-FC01

### 3.3 Test Site

Dongguan Precise Testing & Certification Corp., Ltd.

Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1

Test Lab: Shenzhen BCTC Testing Co., Ltd.

Address: BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Registered No.: 712850

Test items: Radiated Spurious Emission(18GHz to 25GHz)



## 4 Equipment During Test

### 4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	MY56070279	10Hz-30GHz	Sep.19, 2019
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Sep.19, 2019
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Sep.19, 2019
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Sep.19, 2019

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions(Test Frequency from 9KHz-18GHz)

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Sep.19, 2019
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Sep.19, 2019
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Sep.19, 2019
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Sep.19, 2019
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Sep.19, 2019
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Sep.19, 2019
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Sep.19, 2019
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Sep.19, 2019
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Sep.19, 2019



Report No.: PTC19042801301E-FC01

Radiated Emission (Test Frequency from 18GHz-25GHz)(For Shenzhen BCTC Testing Co., Ltd.)

<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Due</b>
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-26.5GHz	Aug.25, 2019
Test Receiver	R&S	ESPI	101396	9KHz-7GHz	Aug.25, 2019
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Aug.25, 2019
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug.25, 2019
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug.25, 2019
Antenna Connector	Florida RF Labs	N/A	RF01#	N/A	Aug.25, 2019

Conducted Emissions

<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Due</b>
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Sep.19, 2019
Artificial Mains Network	Rohde&Schwarz	L2-16B	000WX31025	9KHz-300MHz	Sep.19, 2019
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Sep.19, 2019



## 4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$



Report No.: PTC19042801301E-FC01

### 4.3 Description of Support Units

Equipment	Model No.	Series No.
N/A	N/A	N/A

## 5 Conducted Emission

Test Requirement:	:	FCC CFR 47 Part 15 Section 15.207
	:	RSS-Gen[8.8]
Test Method	:	ANSI C63.10: 2013
Test Result	:	PASS
Frequency Range	:	150kHz to 30MHz
Class/Severity	:	Class B


### 5.1 E.U.T. Operation

Operating Environment :


Temperature	:	24.6 °C
Humidity	:	53 % RH
Atmospheric Pressure	:	101.12kPa

### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

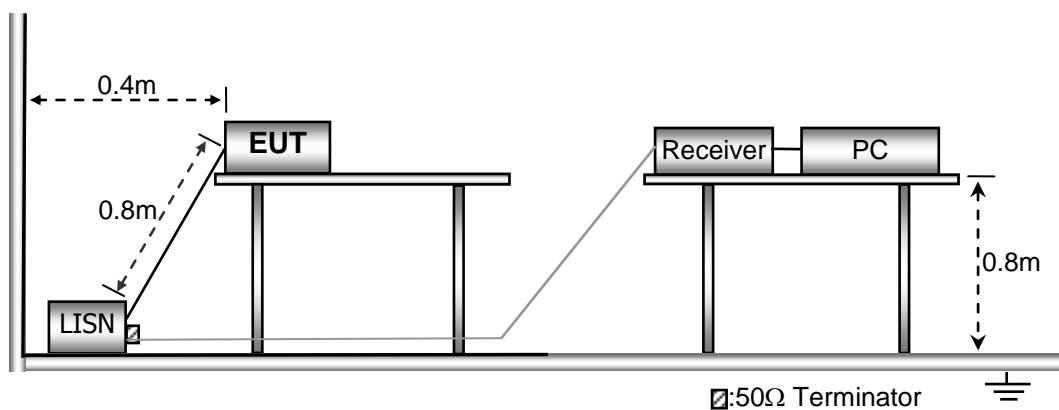

### 5.3 Test SET-UP (Block Diagram of Configuration)

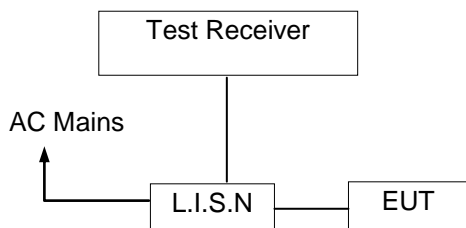

### 5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 5.5 Conducted Emission Limit

#### Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

#### Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


### 5.7 Conducted Emission Test Result

Pass.

Please refer to the following pages.




Line-AC 120V/60Hz

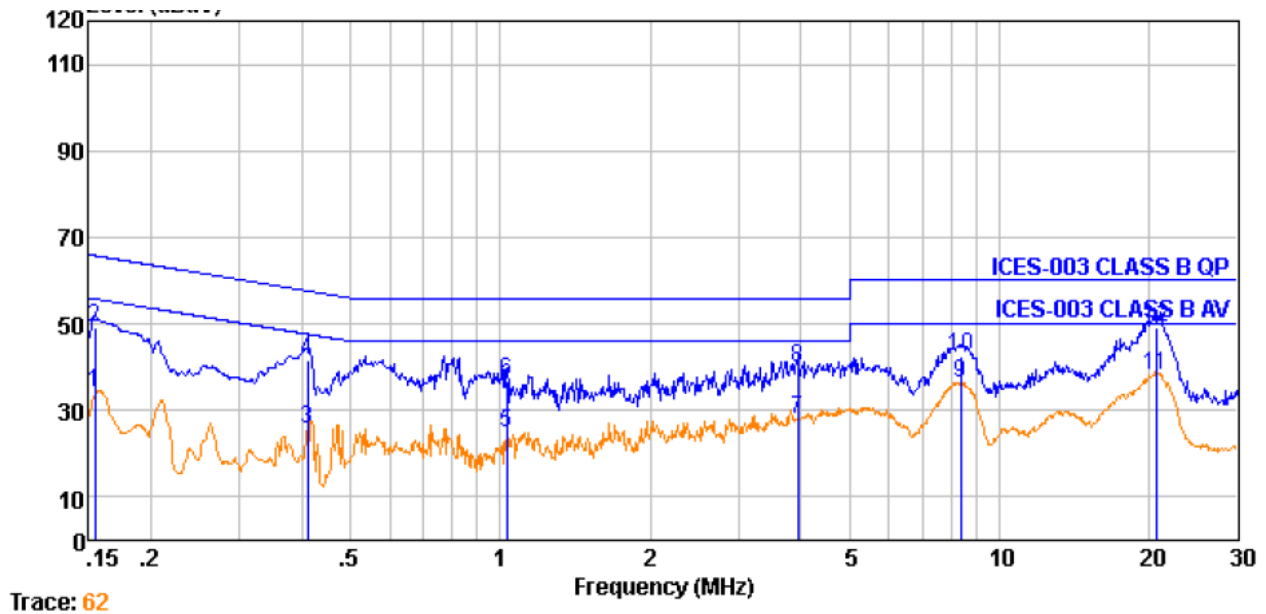

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.154	0.21	9.50	24.32	34.03	55.78	-21.75	Average
2.	0.154	0.21	9.50	39.37	49.08	65.78	-16.70	QP
3.	0.410	0.41	9.74	15.41	25.56	47.64	-22.08	Average
4.	0.410	0.41	9.74	31.46	41.61	57.64	-16.03	QP
5.	1.032	0.46	9.82	14.36	24.64	46.00	-21.36	Average
6.	1.032	0.46	9.82	26.40	36.68	56.00	-19.32	QP
7.	3.943	0.47	9.90	17.56	27.93	46.00	-18.07	Average
8.	3.943	0.47	9.90	29.59	39.96	56.00	-16.04	QP
9.	8.367	0.56	9.97	25.75	36.28	50.00	-13.72	Average
10.	8.367	0.56	9.97	31.79	42.32	60.00	-17.68	QP
11.	20.594	0.41	9.85	27.98	38.24	50.00	-11.76	Average
12.	20.594	0.41	9.85	38.96	49.22	60.00	-10.78	QP

Neutral-AC 120V/60Hz

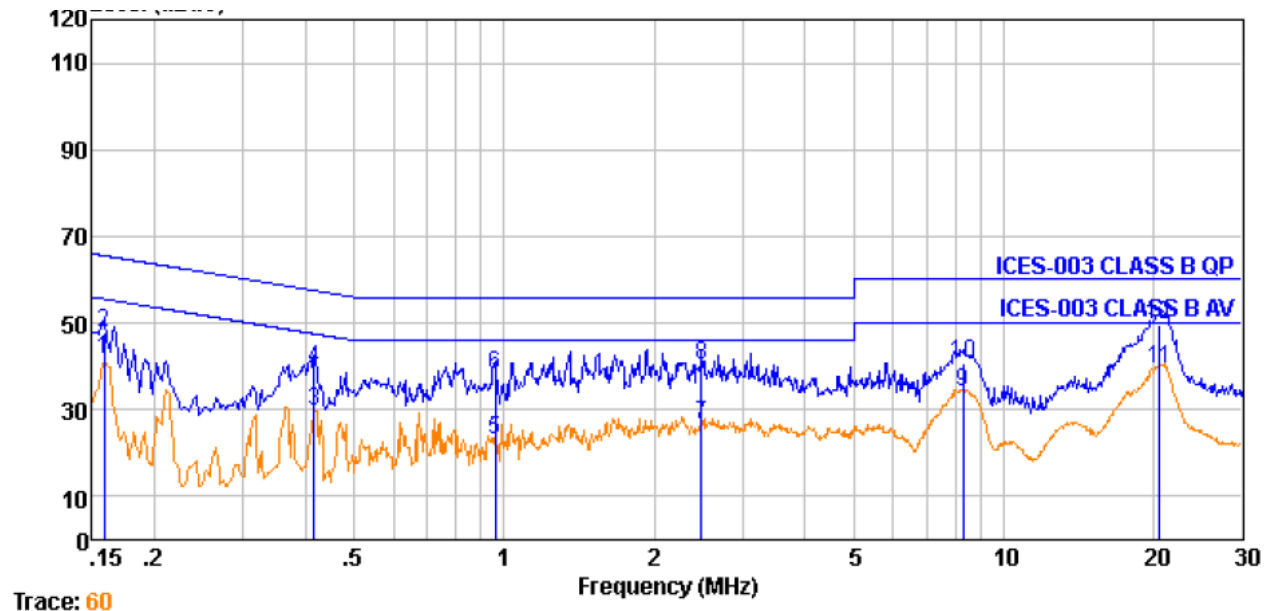

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.158	0.22	9.54	31.84	41.60	55.56	-13.96	Average
2.	0.158	0.22	9.54	37.87	47.63	65.56	-17.93	QP
3.	0.417	0.41	9.77	19.32	29.50	47.51	-18.01	Average
4.	0.417	0.41	9.77	29.36	39.54	57.51	-17.97	QP
5.	0.958	0.46	9.85	12.76	23.07	46.00	-22.93	Average
6.	0.958	0.46	9.85	27.79	38.10	56.00	-17.90	QP
7.	2.487	0.47	9.90	16.00	26.37	46.00	-19.63	Average
8.	2.487	0.47	9.90	30.05	40.42	56.00	-15.58	QP
9.	8.279	0.55	9.99	23.40	33.94	50.00	-16.06	Average
10.	8.279	0.55	9.99	30.38	40.92	60.00	-19.08	QP
11.	20.486	0.41	9.97	29.25	39.63	50.00	-10.37	Average
12.	20.486	0.41	9.97	39.29	49.67	60.00	-10.33	QP



## 6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247  
RSS-247[5.5]

Test Method : ANSI C63.10:2013

Test Result : PASS

Measurement Distance : 3m

Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 6.1 EUT Operation

Operating Environment :

Temperature: : 24.5 °C

Humidity: : 51 % RH


Atmospheric Pressure: : 100.03kPa

Test Voltage : DC 3.7V Battery


## 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

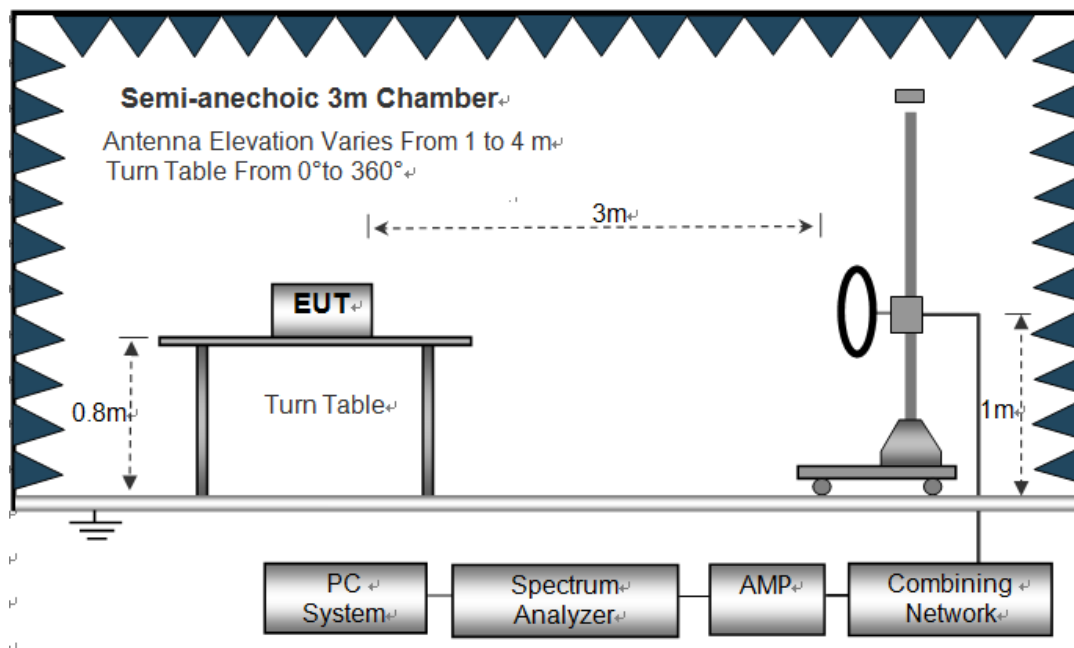

The test setup for emission measurement from 30 MHz to 1 GHz.

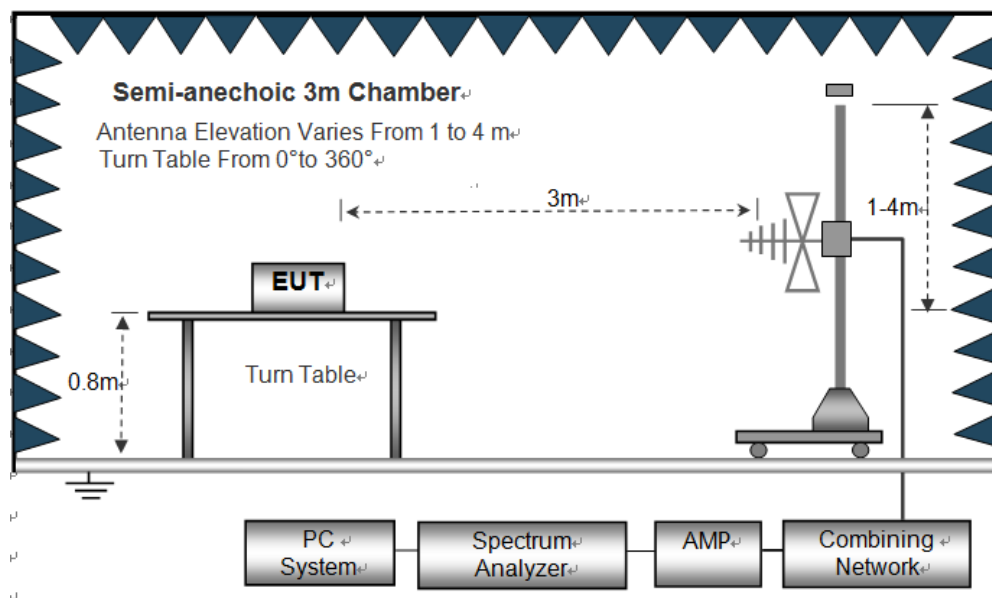

The test setup for emission measurement above 1 GHz

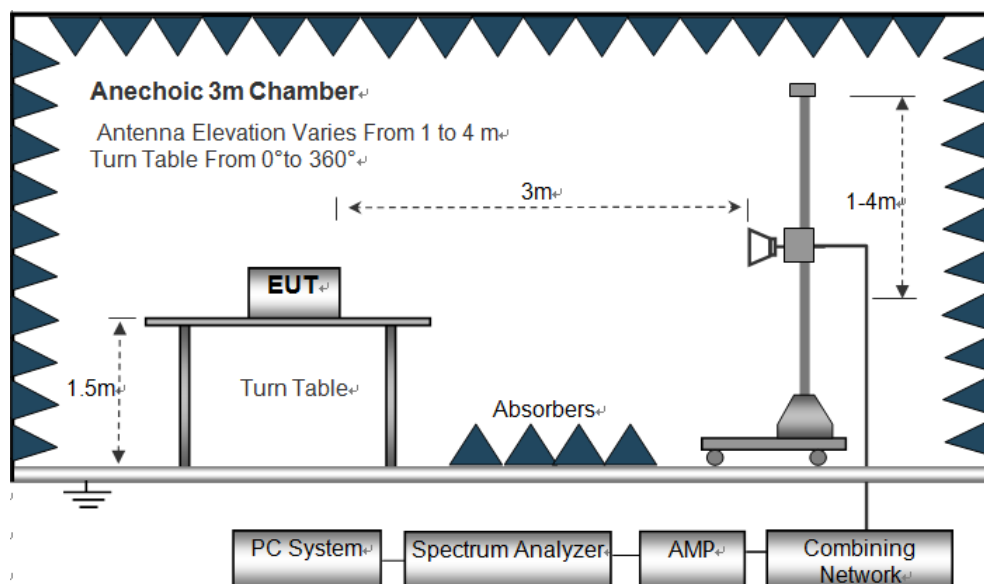

### 6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



## 6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room



## 6.5 Summary of Test Results

### Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

#### Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40\log(\text{Specific distance} / \text{test distance})$  (dB);


Limit line = Specific limits (dBuV) + distance extrapolation factor.

### Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:

Antenna Polarization: Horizontal

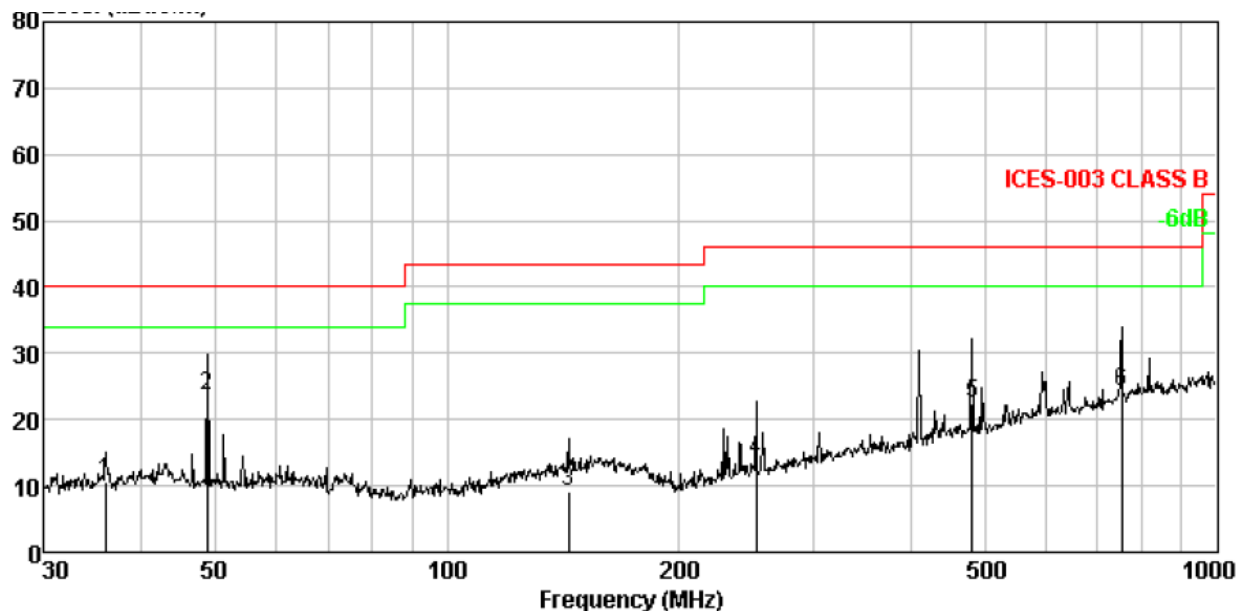


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	36.001	0.00	13.44	27.26	30.03	10.67	40.00	-29.33	QP
2.	48.843	0.00	12.49	41.35	30.14	23.70	40.00	-16.30	QP
3.	143.830	0.00	13.57	26.12	30.52	9.17	43.50	-34.33	QP
4.	252.063	0.00	11.97	32.63	30.71	13.89	46.00	-32.11	QP
5.	480.528	0.00	16.89	36.37	30.94	22.32	46.00	-23.68	QP
6.	752.743	0.00	21.36	33.90	31.09	24.17	46.00	-21.83	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Antenna Polarization: Vertical

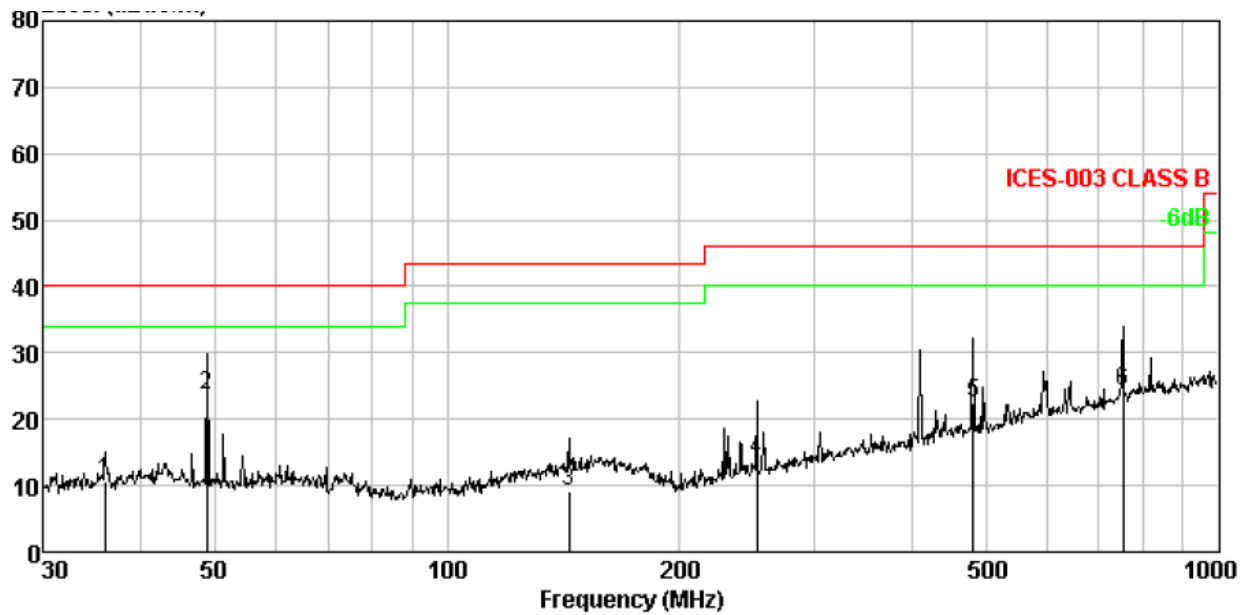

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	36.001	0.00	13.44	27.26	30.03	10.67	40.00	-29.33	QP
2.	48.843	0.00	12.49	41.35	30.14	23.70	40.00	-16.30	QP
3.	143.830	0.00	13.57	26.12	30.52	9.17	43.50	-34.33	QP
4.	252.063	0.00	11.97	32.63	30.71	13.89	46.00	-32.11	QP
5.	480.528	0.00	16.89	36.37	30.94	22.32	46.00	-23.68	QP
6.	752.743	0.00	21.36	33.90	31.09	24.17	46.00	-21.83	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



## Test Frequency: From 1GHz to 18GHz

Low Channel (2412MHz) Worst case 802.11b

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4824	24.15	AV	V	36.12	10.60	40.22	30.65	54	-23.35
4824	25.33	AV	H	36.12	10.60	40.22	31.83	54	-22.17
4824	32.15	PK	V	36.12	10.60	40.22	38.65	74	-35.35
4824	31.47	PK	H	36.12	10.60	40.22	37.97	74	-36.03
16884	27.56	AV	V	36.25	10.63	40.18	34.26	54	-19.74
16884	26.99	AV	H	36.25	10.63	40.18	33.69	54	-20.31
16884	34.08	PK	V	36.25	10.63	40.18	40.78	74	-33.22
16884	33.24	PK	H	36.25	10.63	40.18	39.94	74	-34.06

Middle Channel (2437MHz) Worst case 802.11b

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874	25.43	AV	V	36.14	10.61	40.24	31.94	54	-22.06
4874	26.55	AV	H	36.14	10.61	40.24	33.06	54	-20.94
4874	33.18	PK	V	36.14	10.61	40.24	39.69	74	-34.31
4874	34.21	PK	H	36.14	10.61	40.24	40.72	74	-33.28
17059	25.38	AV	V	36.28	10.65	40.17	32.14	54	-21.86
17059	27.13	AV	H	36.28	10.65	40.17	33.89	54	-20.11
17059	34.05	PK	V	36.28	10.65	40.17	40.81	74	-33.19
17059	35.62	PK	H	36.28	10.65	40.17	42.38	74	-31.62

High Channel (2462MHz) Worst case 802.11b

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4924	26.31	AV	V	36.15	10.63	40.25	32.84	54	-21.16
4924	27.05	AV	H	36.15	10.63	40.25	33.58	54	-20.42
4924	34.15	PK	V	36.15	10.63	40.25	40.68	74	-33.32
4924	35.09	PK	H	36.15	10.63	40.25	41.62	74	-32.38
17234	27.11	AV	V	36.29	10.67	40.18	33.89	54	-20.11
17234	27.35	AV	H	36.29	10.67	40.18	34.13	54	-19.87
17234	35.09	PK	V	36.29	10.67	40.18	41.87	74	-32.13
17234	36.12	PK	H	36.29	10.67	40.18	42.9	74	-31.1

Note:

1. The testing has been conformed to 10\*2462MHz=24620MHz.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
Emission Level = Reading + Factor  
Margin=Emission Level-Limit
4. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

2.4G WiFi (802.11b/g/n) mode have been tested, and the worst result(802.11g) was report as below

Test Mode: 802.11g Low Channel 2412MHz								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2310.00	27.03	27.27	6.62	60.92	74	-13.08	V	Peak
2390.00	25.81	27.53	6.75	60.09	74	-13.91	V	
2310.00	28.26	27.27	6.62	62.15	74	-11.85	H	
2390.00	26.30	27.53	6.75	60.58	74	-13.42	H	
2310.00	12.89	27.27	6.62	46.78	54	-7.22	V	Average
2390.00	12.66	27.53	6.75	46.94	54	-7.06	V	
2310.00	12.87	27.27	6.62	46.76	54	-7.24	H	
2390.00	12.90	27.53	6.75	47.18	54	-6.82	H	

Test Mode: 802.11g High Channel 2462MHz								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2483.50	26.26	27.84	6.83	60.93	74	-13.07	V	Peak
2500.00	26.72	27.9	6.84	61.46	74	-12.54	V	
2483.50	27.08	27.84	6.83	61.75	74	-12.25	H	
2500.00	27.14	27.9	6.84	61.88	74	-12.12	H	
2483.50	12.64	27.84	6.83	47.31	54	-6.69	V	Average
2500.00	12.55	27.9	6.84	47.29	54	-6.71	V	
2483.50	12.70	27.84	6.83	47.37	54	-6.63	H	
2500.00	12.56	27.9	6.84	47.30	54	-6.70	H	



Report No.: PTC19042801301E-FC01

**Test Frequency: From 18GHz to 25GHz**

The measurements were more than 20dB below the limit and not reported.



## 7 Conducted Spurious Emission

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### 7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold


### 7.2 Test Result



802.11 b  
Low Channel

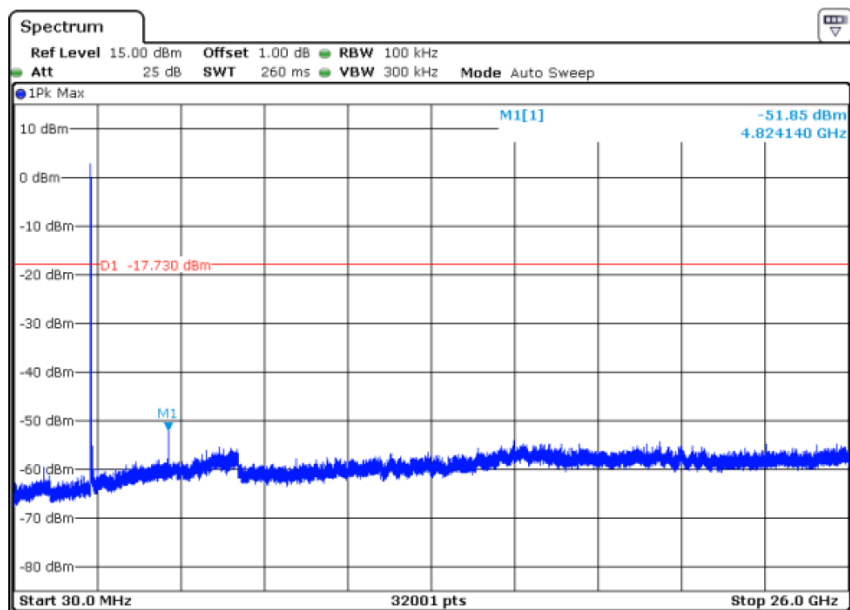


Middle Channel

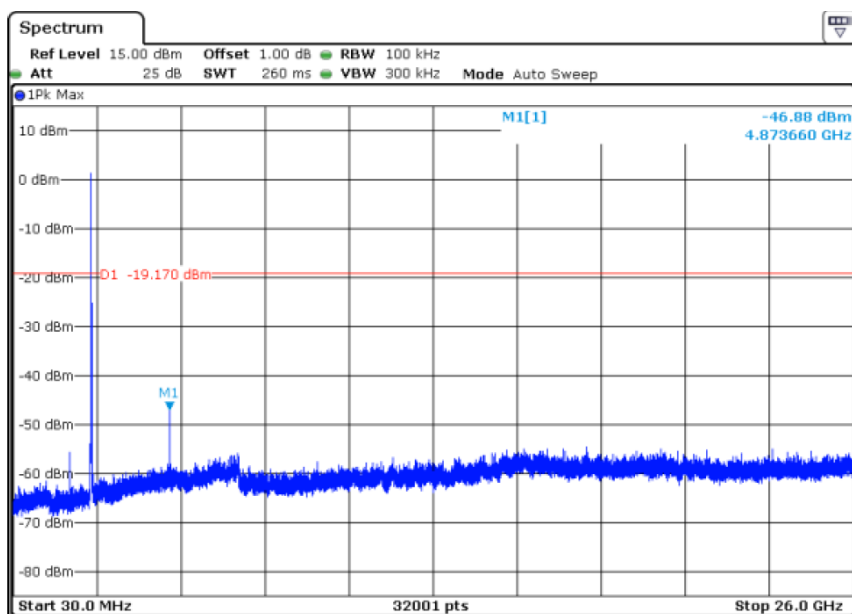




### High Channel

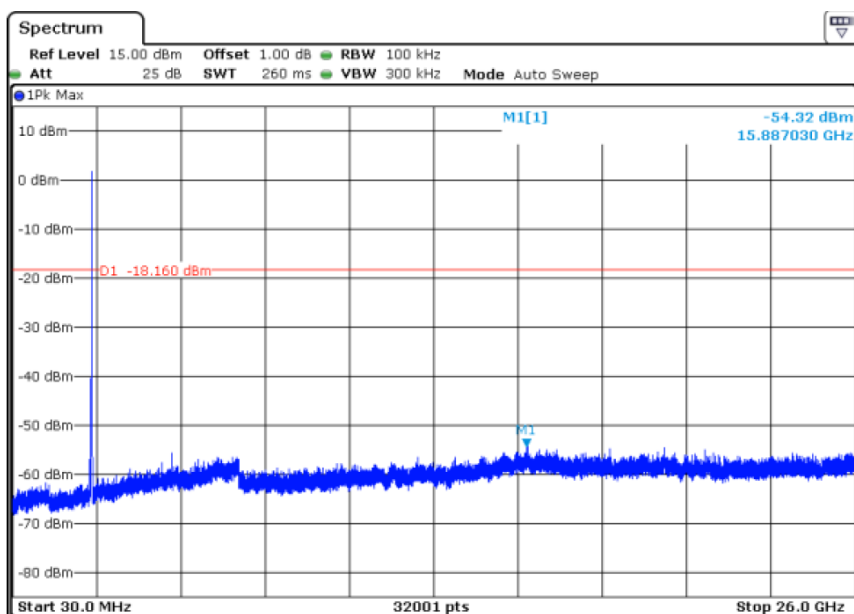


802.11g

### Low Channel

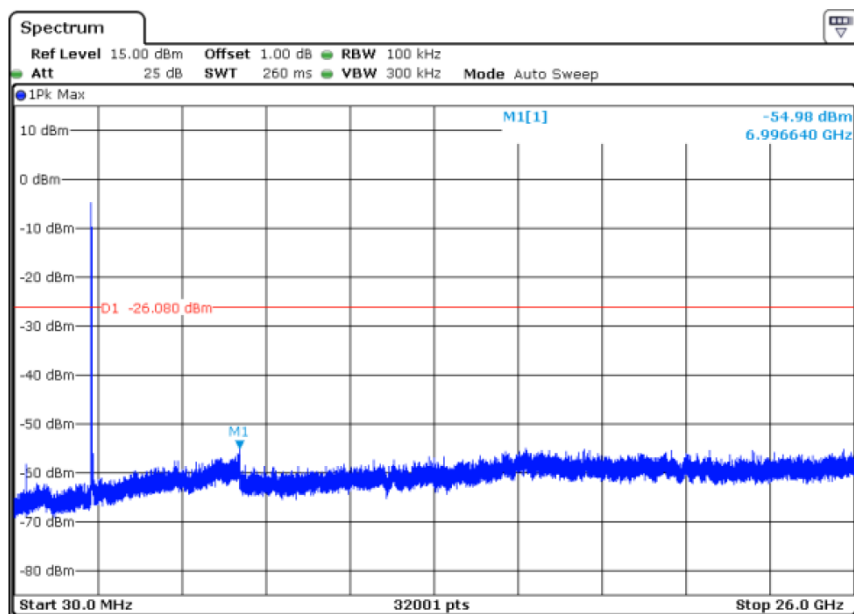




### Middle Channel

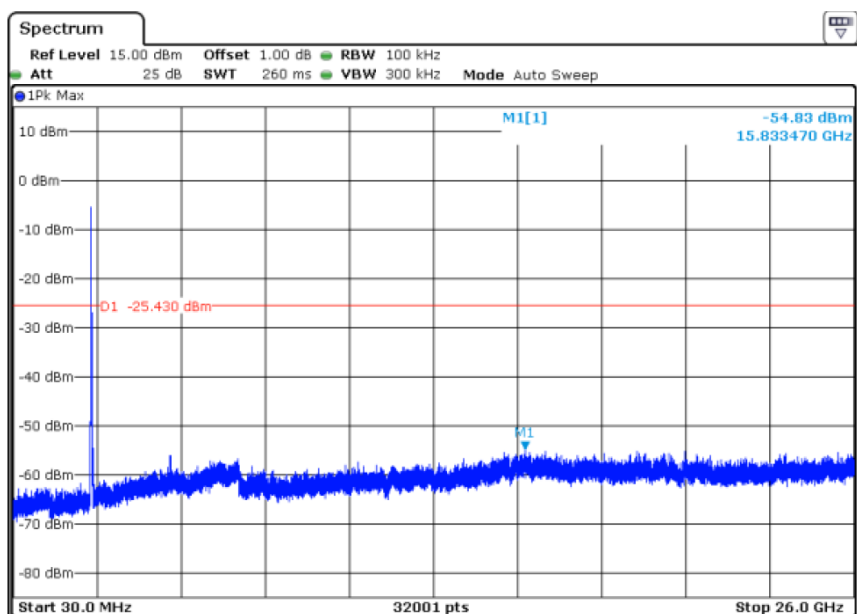

### High Channel

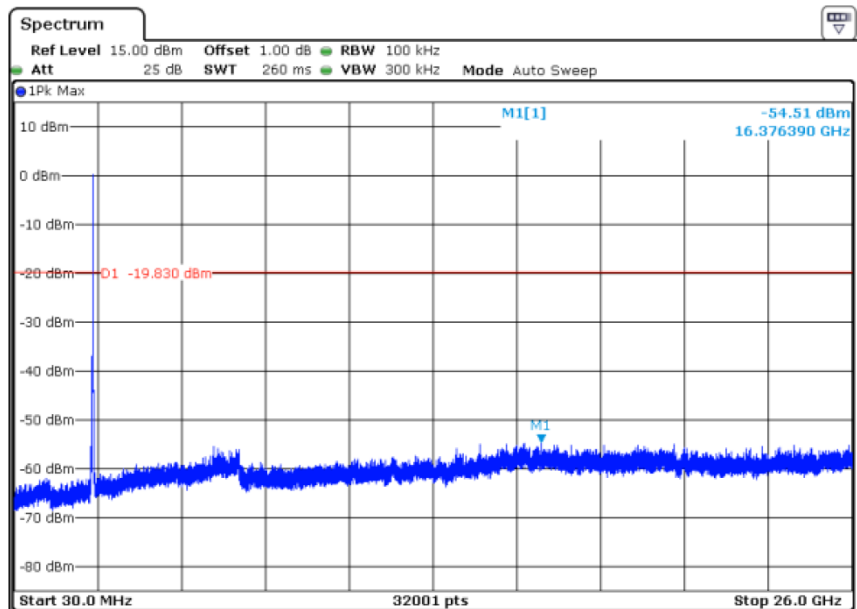







## 802.11n-HT20

### Low Channel

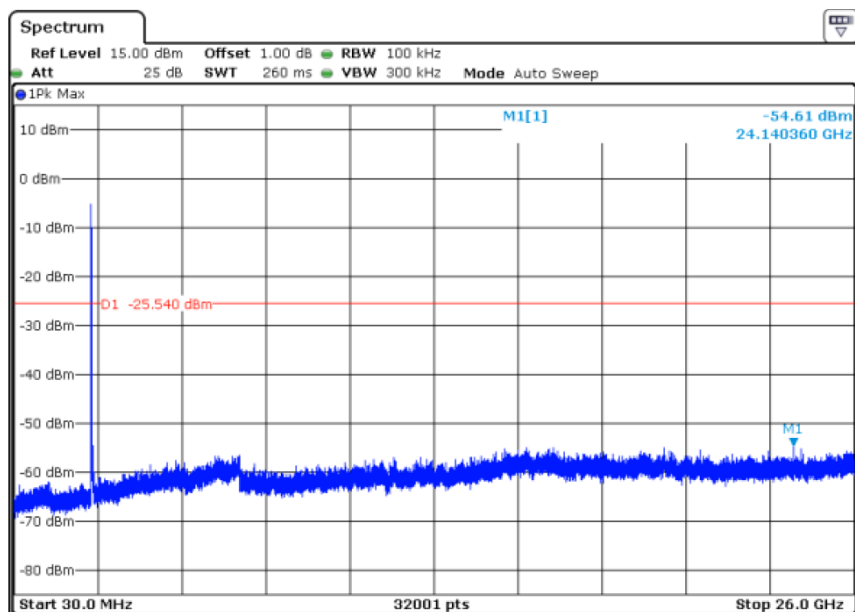


### Middle Channel

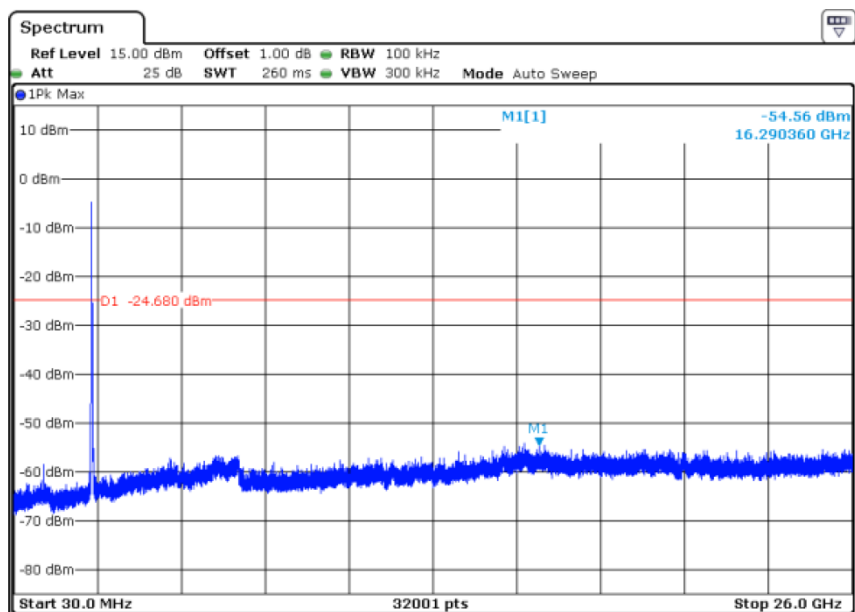



### High Channel

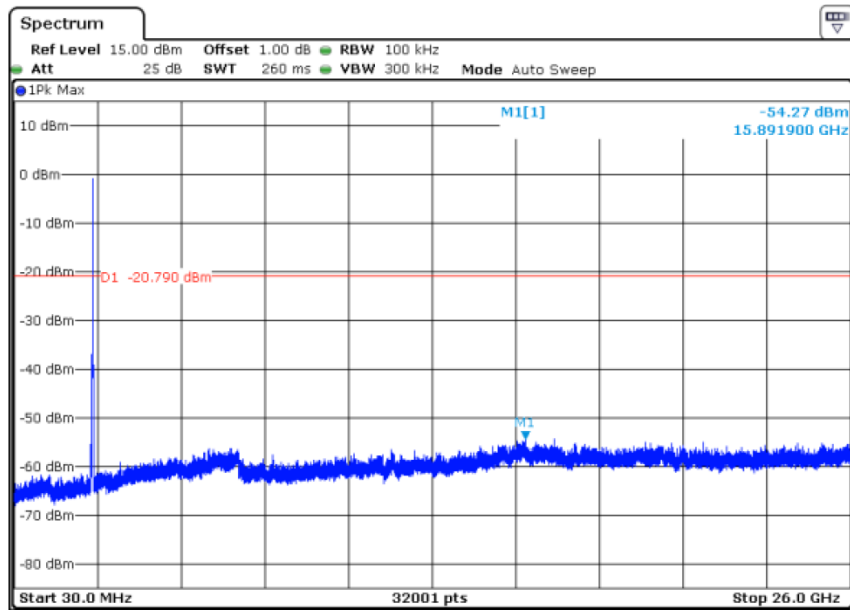



## 8 Band Edge Measurement

Test Requirement	: Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). RSS-247[5.4]
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



### 8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold





## 8.2 Test Result

### 802.11b

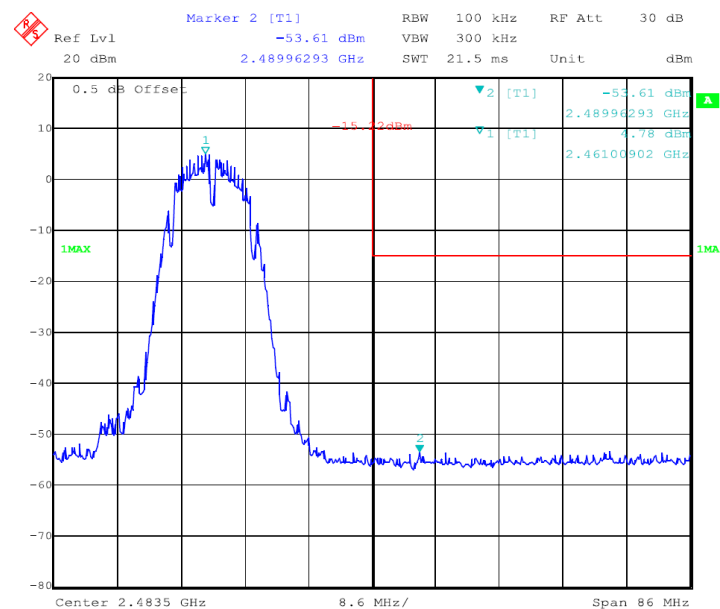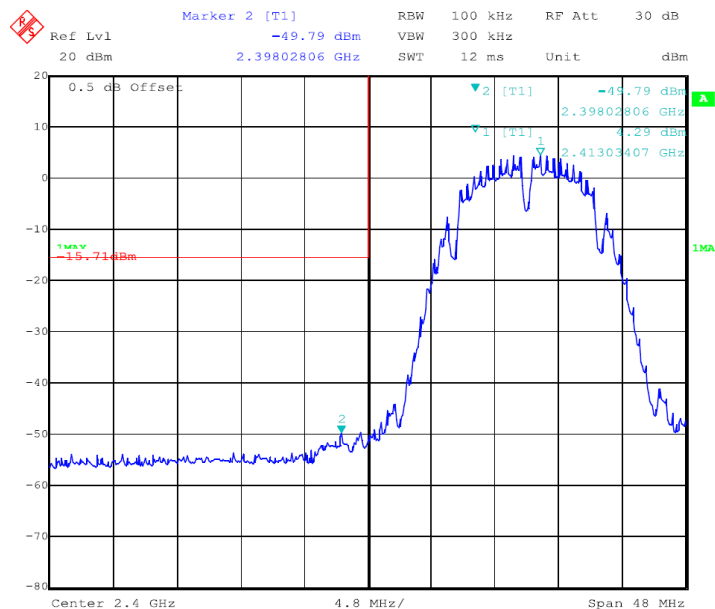





802.11g

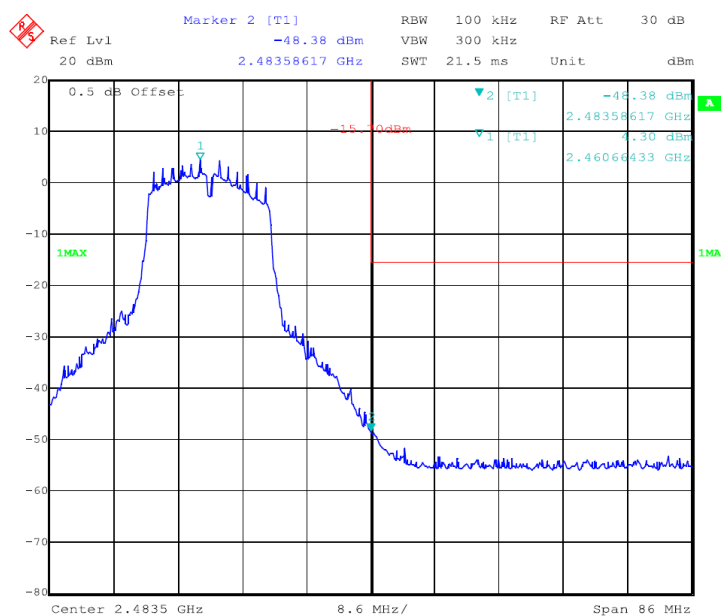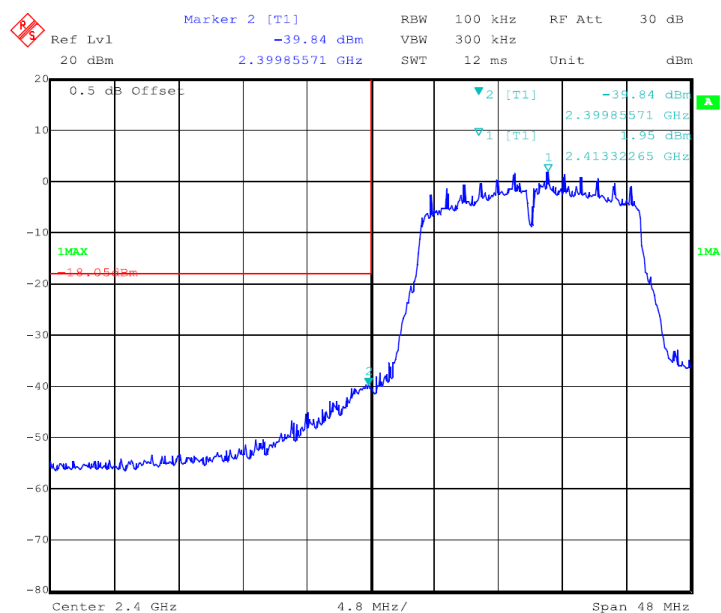



### 802.11n-HT20

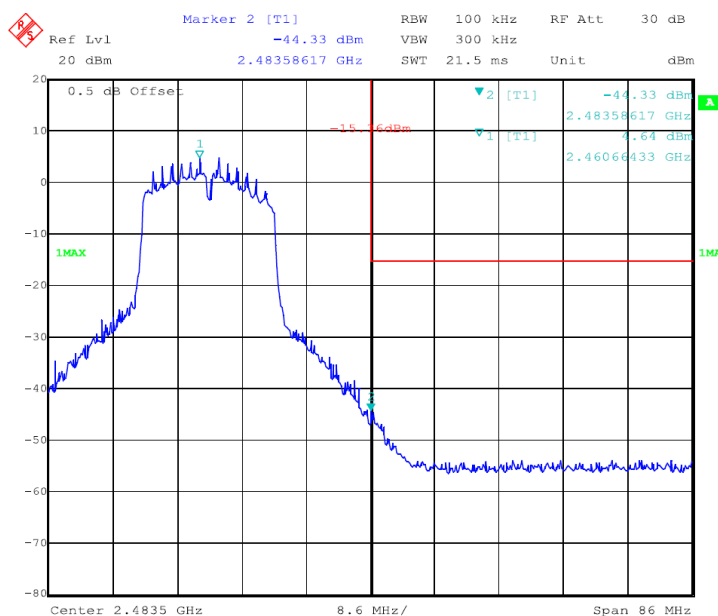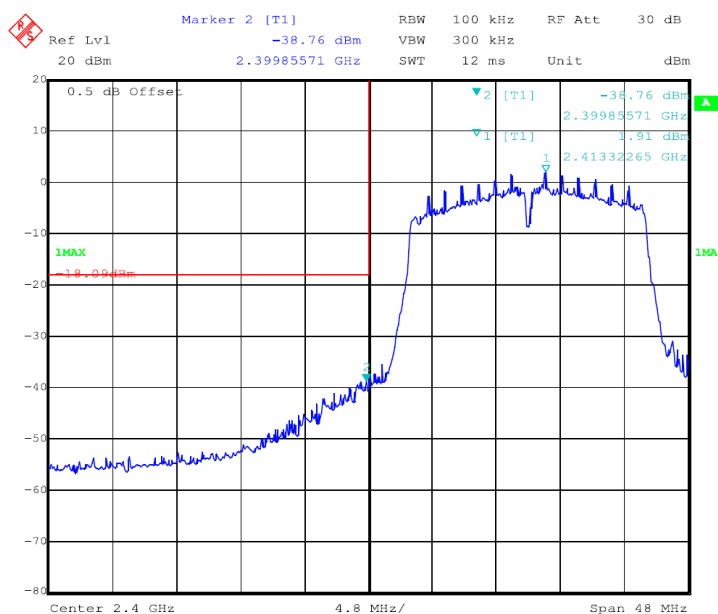



## 9 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### 9.2 Test Result


Modulation	Bandwidth(MHz)			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	10.24	10.20	10.16	≥500kHz
802.11g	16.16	15.68	16.16	≥500kHz
802.11n-HT20	16.48	17.00	17.04	≥500kHz




### 802.11b Low Channel

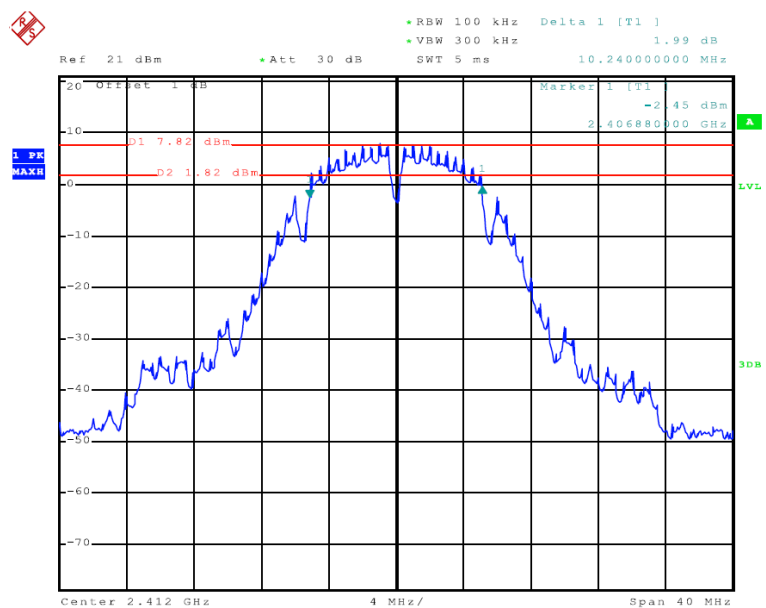

### 802.11b Middle Channel

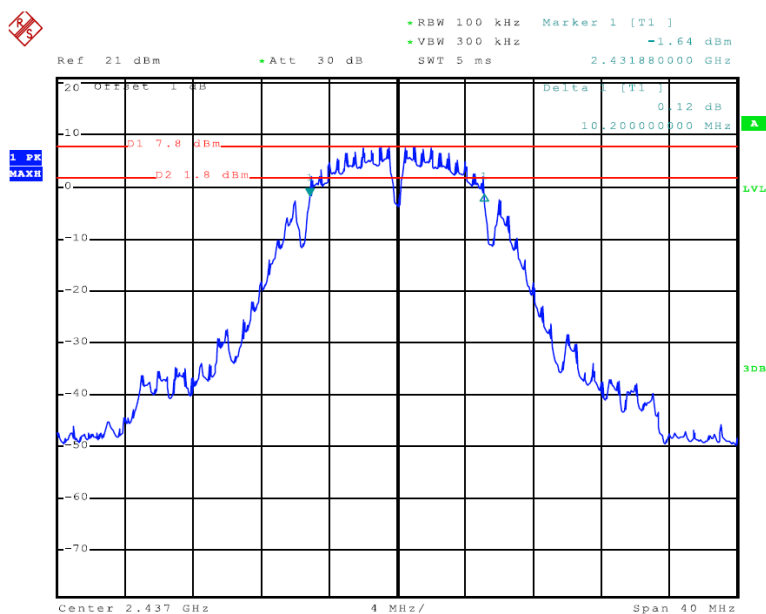





Ref 21 dBm Att 30 dB SWT 5 ms 10.16000000 MHz

Marker 1 [T1] 1.47 dBm 2.456960000 GHz

1.98 dBm

1

Center 2.462 GHz 4 MHz/ Span 40 MHz

Ref 21 dBm Att 30 dB SWT 5 ms Delta 1 [T1] 16.16000000 MHz

Marker 1 [T1] -4 29 dBm 2.403840000 GHz


01 1.87 dBm 02 -4.13 dBm

1.93 MAX


Center 2.412 GHz 4 MHz/ Span 40 MHz



### 802.11g Middle Channel

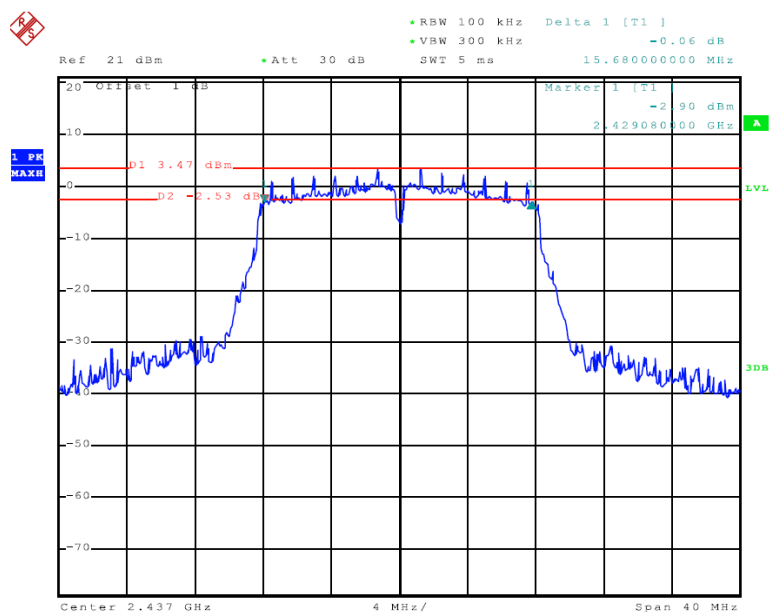


### 802.11g High Channel

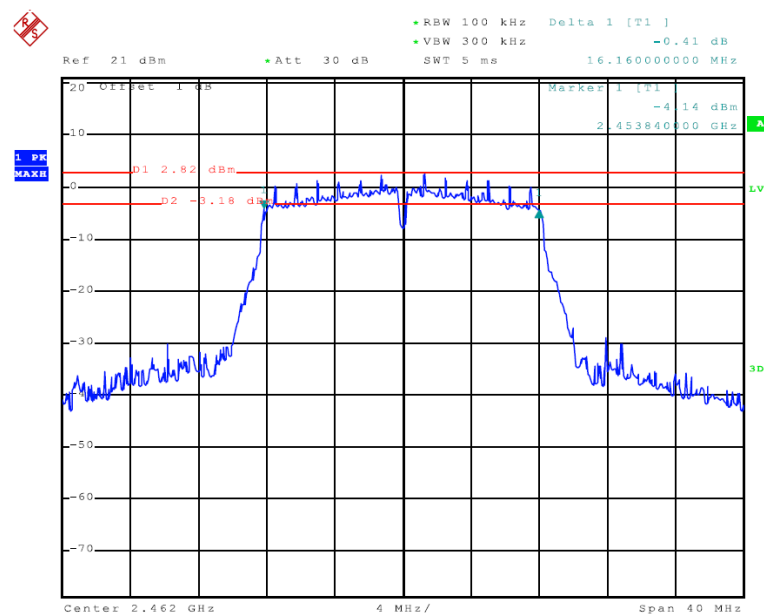




### 802.11n-HT20 Low Channel

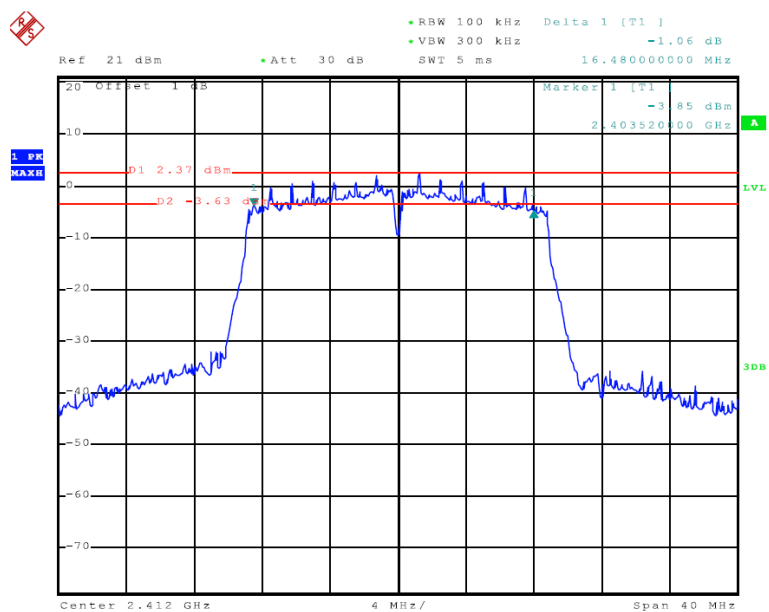

### 802.11n-HT20 Middle Channel

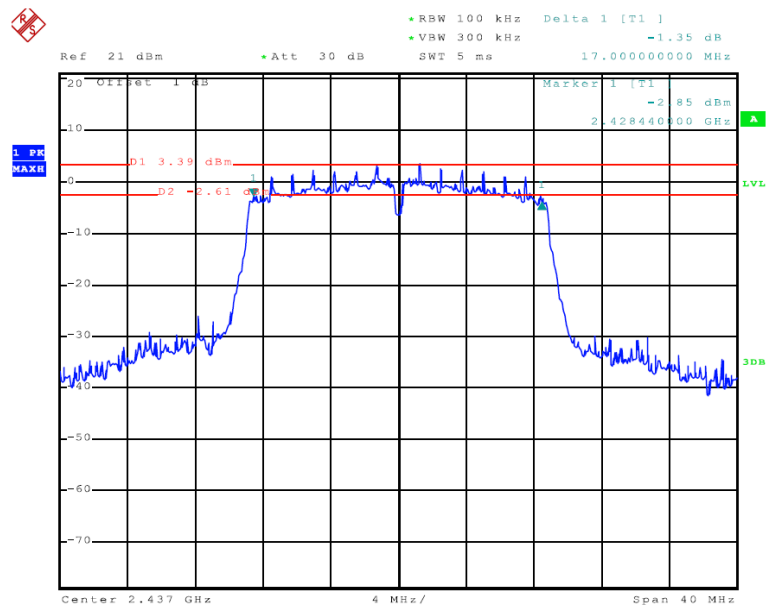





## 10 Maximum Peak Output Power

Test Requirement	:	FCC CFR47 Part 15 Section 15.247 RSS-247[5.4.(1)]
Test Method	:	RSS-Gen ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

### 10.1 Test Procedure

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05 section 8.3.1.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 10.2 Test Result

Modulation	Maximum Peak Output Power (dBm)			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	13.91	13.89	13.86	1W(30dBm)
802.11g	12.35	13.41	12.54	1W(30dBm)
802.11n-HT20	11.25	11.05	10.89	1W(30dBm)



## 11 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247 RSS-247[5.2.(1)]
Test Method	: RSS-Gen ANSI C63.10:2013
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 11.1 Test Procedure


1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below:  
Center frequency=DTS channel center frequency  
Span = 1.5 times the DTS bandwidth  
RBW = 3KHz, VBW = 10KHz  
Sweep time = auto couple  
Detector = peak  
Trace mode =max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW(no less than 3KHz) and repeat.

### 11.2 Test Result

Modulation	Power Spectral density ( dBm/3kHz )			Limit
	Low Channel	Middle Channel	High Channel	
802.11b	-10.03	-9.90	-9.90	8dBm/3kHz
802.11g	-12.66	-10.53	-10.20	8dBm/3kHz
802.11n-HT20	-12.87	-10.97	-10.62	8dBm/3kHz




### 802.11b Low Channel

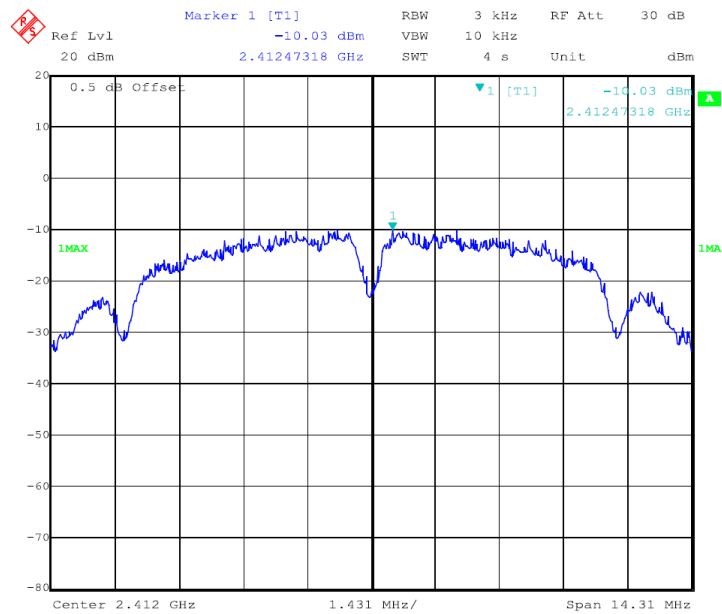


### 802.11b Middle Channel



Report No.: PTC19042801301E-FC01

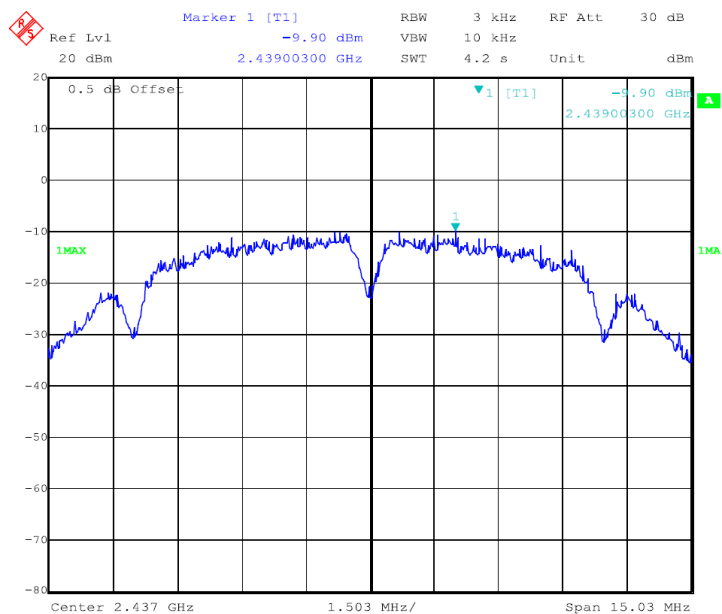


### 802.11b High Channel

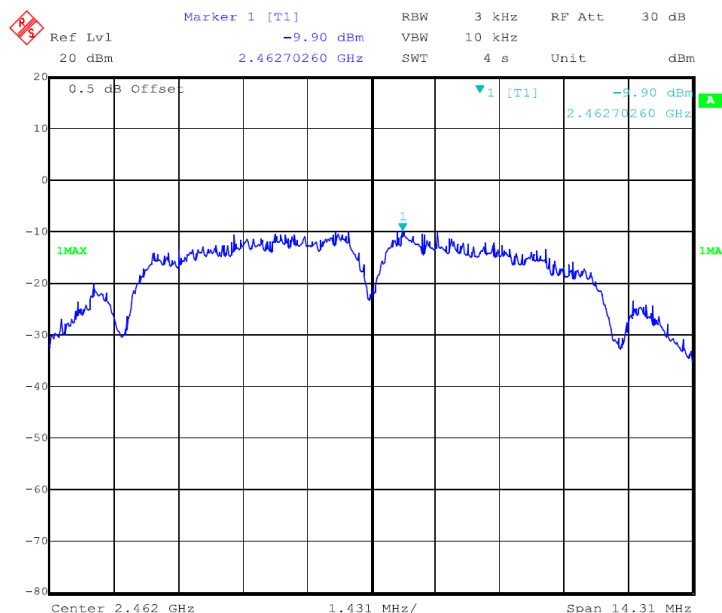






### 802.11g Low Channel

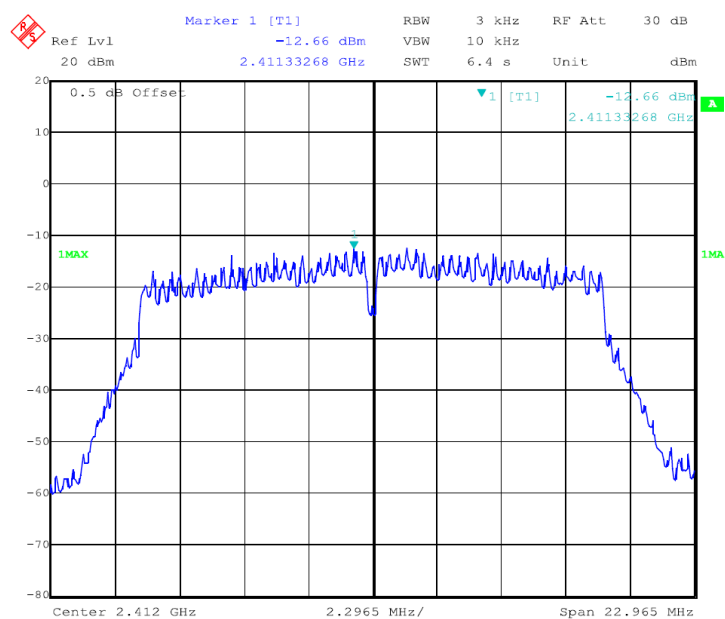


### 802.11g Middle Channel

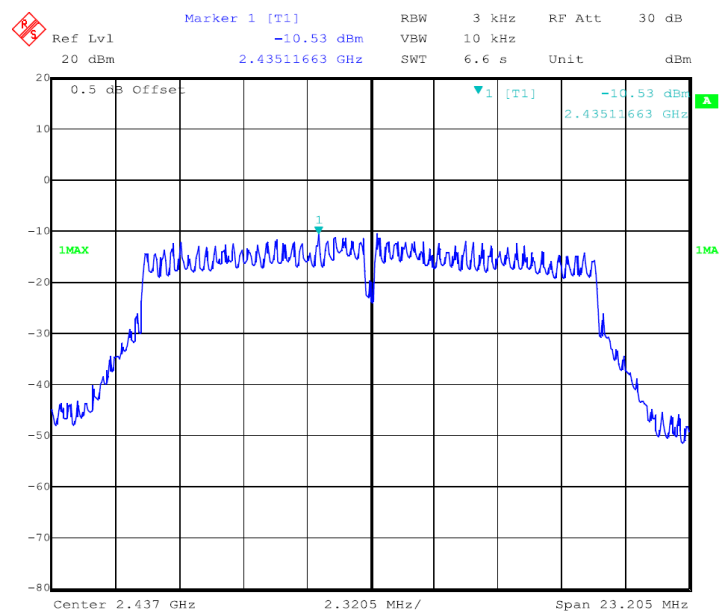




### 802.11g High Channel

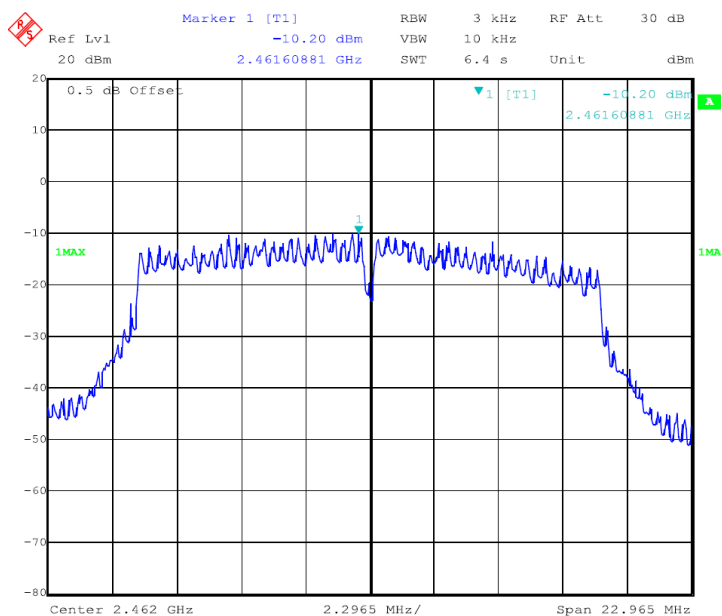




### 802.11n-HT20 Low Channel

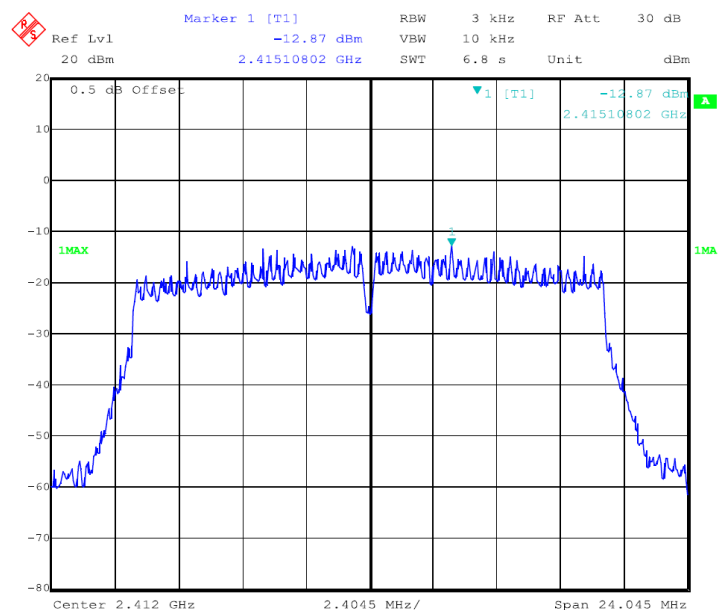


### 802.11n-HT20 Middle Channel

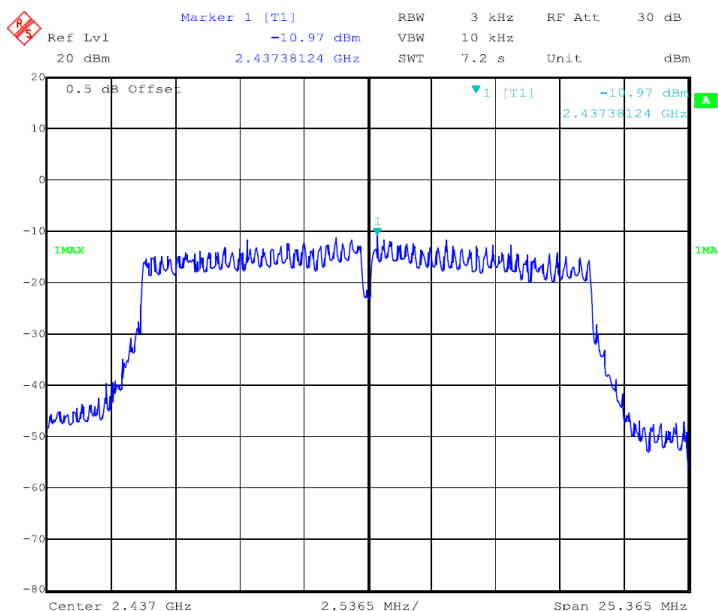



### 802.11n-HT20 High Channel

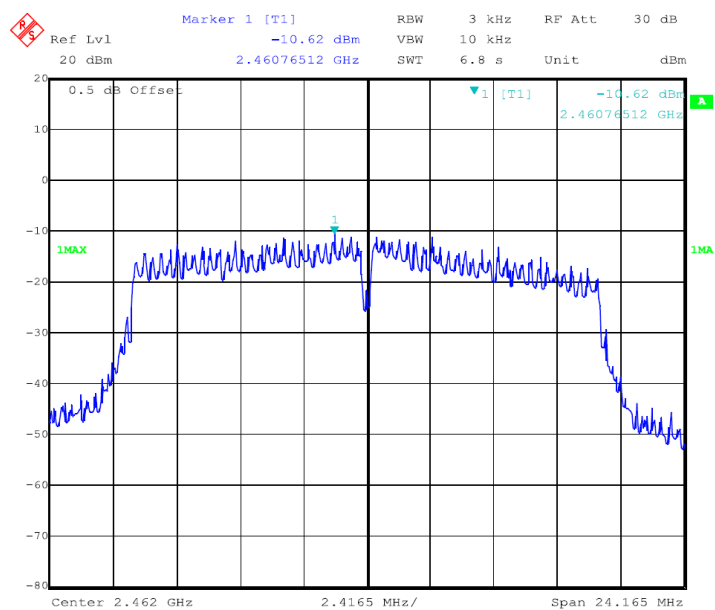



## **12 Antenna Application**

### **12.1 Antenna Requirement**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **12.2 Result**

The EUT'S antenna, permanent attached antenna, is internal PCB antenna. The antenna's gain is 2.5 dBi and meets the requirement.

## 13 Test Setup

### Conducted Emissions





### Radiated Spurious Emissions From Below 1GHz





Test frequency from Above 1GHz







## 14 EUT Photos

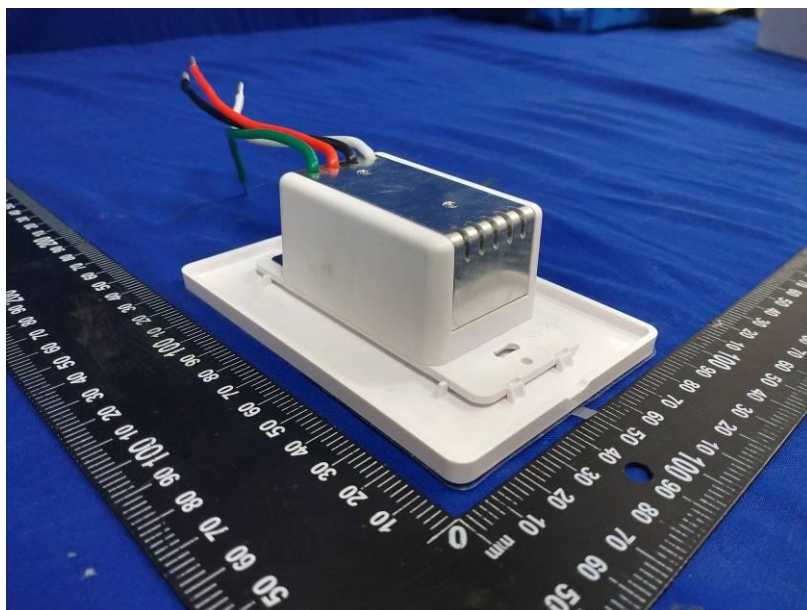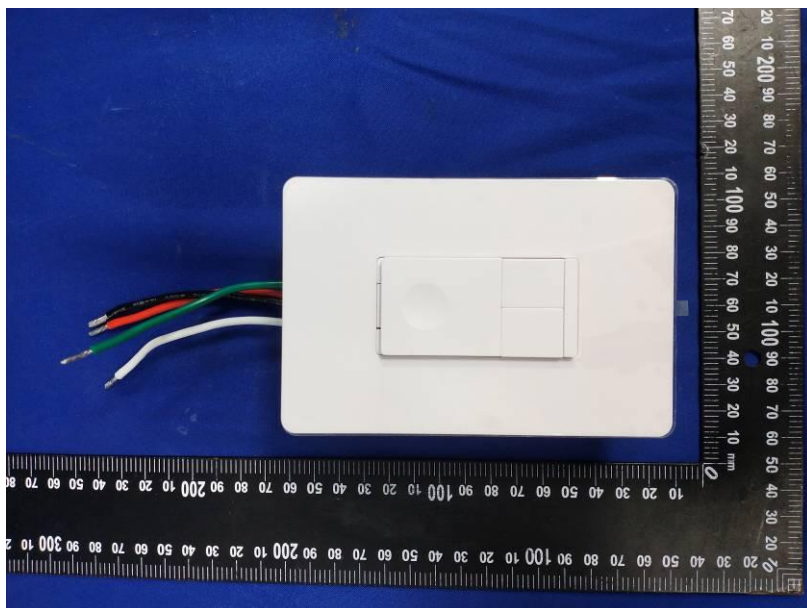



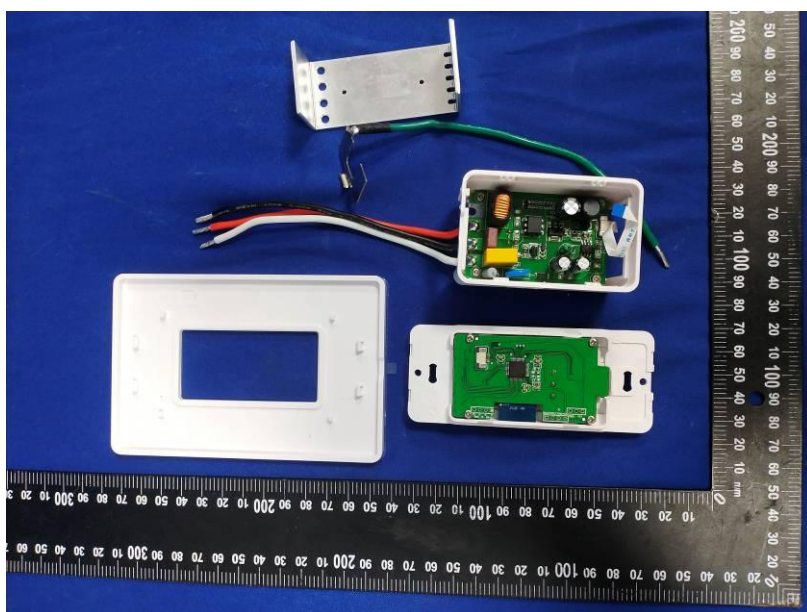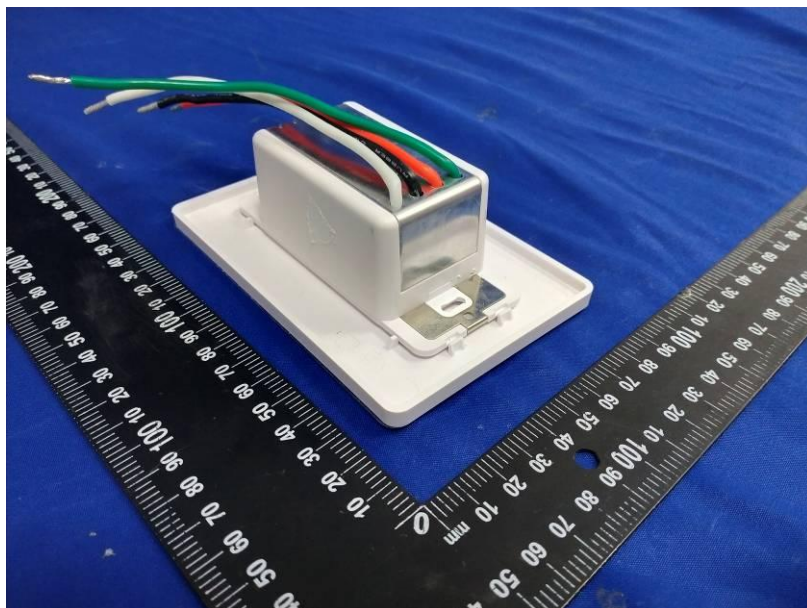

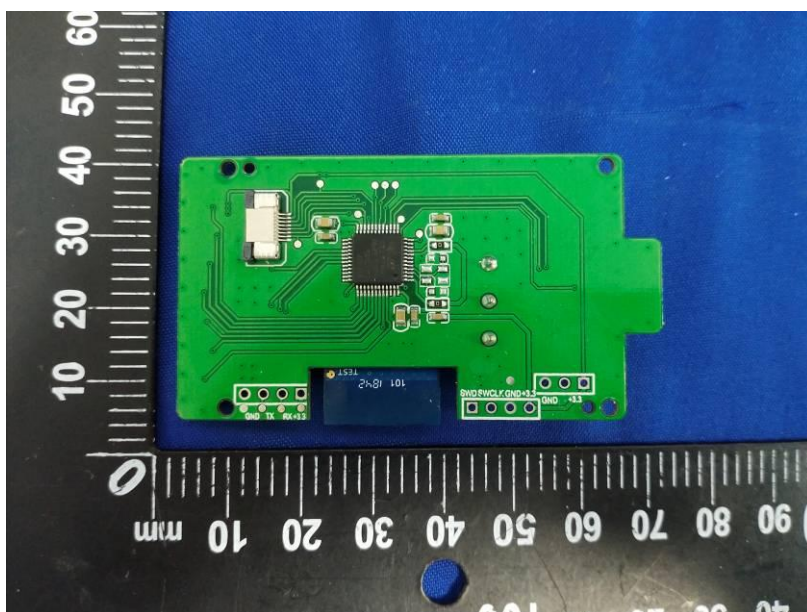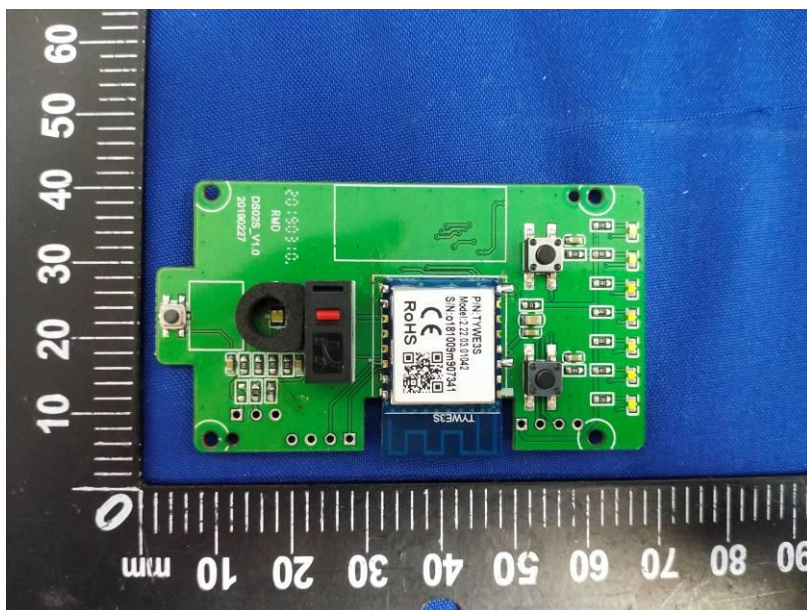

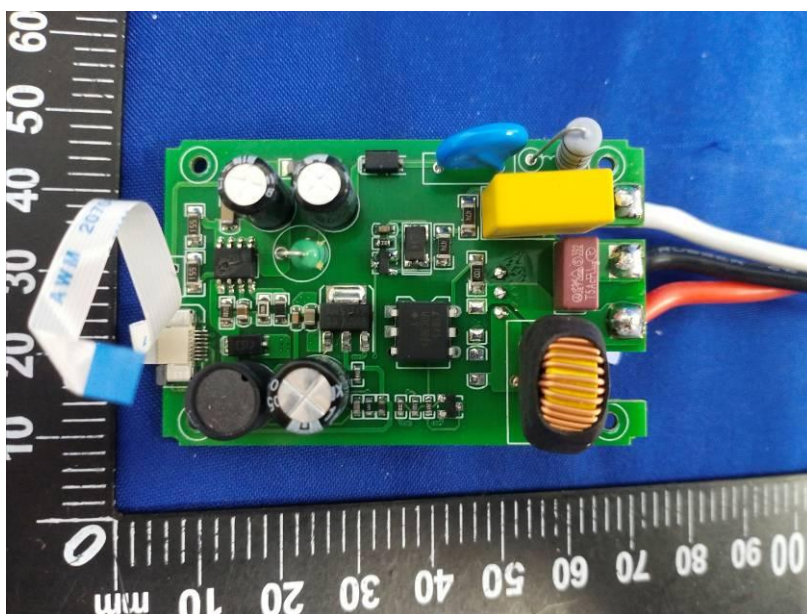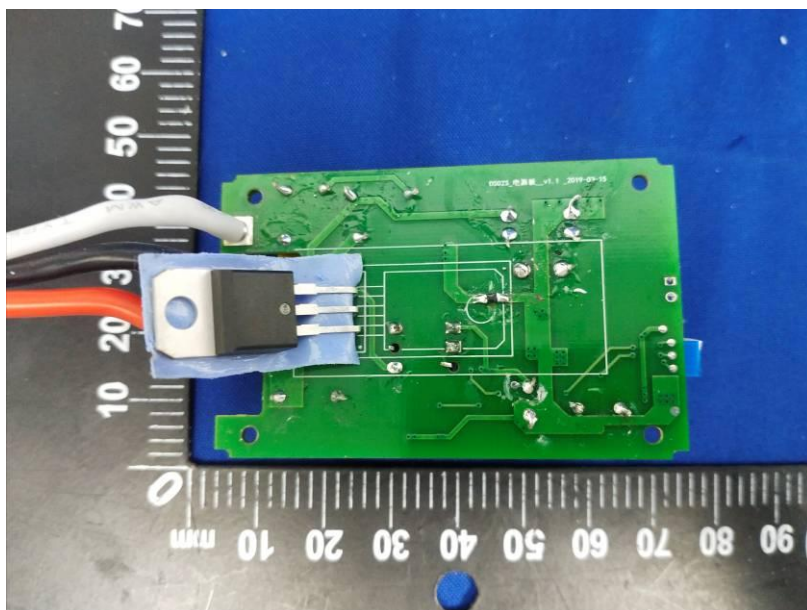

**\*\*\*\*\*THE END REPORT\*\*\*\*\***