

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:	海 芯
CUSTOMER:	
客 戶 料 號:	
CUST P/N:	
音 澤 料 號:	
BESOFTP/N:	
產 品 型 號:	帶槽硬磁手表线圈14. 9-0. 08*24-11T-6. 8UH-L13MM+磁铁+BJ
DESC:	
日 期:	2024/07/09
DATE:	
版 本:	A.0
Version:	

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
何立成	马莉	但可清	

东莞市音泽电子有限公司

工廠地址：东莞市茶山镇兴韩路

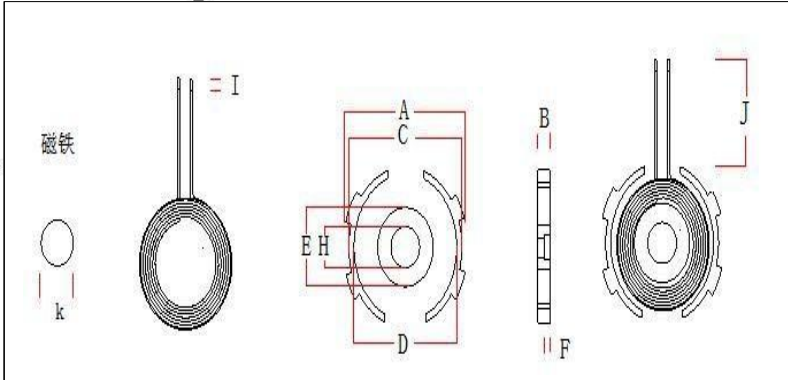
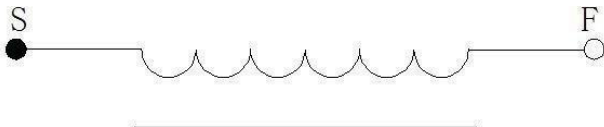
（创富中心城）2栋901号

TEL： 18617251159

Version Change History

[illegible]

SPECIFICATION

產品型號: DESC		Hard magnetic watch coil with slot 14.9-0.08*24-11T-6.8UH-L13MM+ magnet +BJ	客戶 CUST:		海芯	
			版本Rev:		A.0	
			客戶料号 CUST P/N:			
一、尺寸 DIMENSION:(mm)					A	25±0.5
					B	2.7±0.5
					C	23.7±0.25
					D	20.5±1
					E	14.5±0.3
					H	8±0.3
					I	2±1
					J	13±2
					K	7.5*2.0
二、原理图SCHEMATIC DIAGRAM:					1. Coil attached magnetic disc, magnetic disc size 25mm, thickness 2.7mm with notch 2. The back of the magnetic disc is affixed with hand-torn circular diameter 17mm (ref) ordinary double-sided tape	
						
天线增益Antenna gain:						
Operation frequency:		300kHz-350kHz				
Antenna Type:		Loop coil Antenna				
Antenna gain:		0dBi				
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	
1	IND.	S-F	3.7uH ±20% Individual coil	100KHz/1V	LCZ METER 1062B	
2	IND.	S-F	6.8uH ±10% Magnetized sheet	100KHz/1V	LCZ METER 1062B	
3	Q 值	S-Q	≤4	100KHz/1V	LCZ METER 1062B	
4	DCR	S-R	≤105mΩ			

SPECIFICATION

序号 number	材 料 名 称 Material name	品 名 描 述 Description	制 造 商 Manufacturer
1	Hot air wire 0.08*24 strands	Hot air wire 0.08*24 strands	
2	Lead-free tin strip	Lead-free tin strip	
3	magnetic sheet	Φ24.5*12.7mm Manganese zinc hard disk with slot	
4	glue	460 glue	
5	magnet	7.5*2mm	
6	Non-porous double-sided tape	Round diameter 17mm(ref) adhesive backing	
擬制/日期 PREPARED BY/DATE		審核/日期 CHECKED BY/DATE	
何立成 2024/07/09			