



User Manual

Wireless Diagnostics Module,
Vehicle Communication Interface
V302

Shenzhen Xtooltech Intelligent CO., LTD.

Trademarks



is trademark of Shenzhen Xtooltech Intelligent CO., LTD. Copyright, registered in China, the United States, and other countries. All other marks are trademarks or registered trademarks of their respective holders.

Disclaimer of Warranties and Limitation of Liabilities

All information, specifications and illustrations in this manual are based on the latest information available at the time of printing.

Xtool reserves the right to make changes at any time without notice. While information of this manual has been carefully checked for accuracy, no guarantee is given for the completeness and correctness of the contents, including but not limited to the product specifications, functions, and illustrations.

Xtool will not be liable for any direct, special, incidental, or indirect damages, or for any economic consequential damages (including the loss of profits) as a result of using this product.

※ Before operating or maintaining this unit, please read this manual carefully, paying extra attention to the safety warnings and precautions.

Support & Service

Official Website: www.xtooltech.com

Tel: +86 755 21670995 or
 +86 755 86267858 (China)


E-mail: supporting@xtooltech.com

Catalogue

1 General Introduction	4
1.1 Outlook & Ports	4
1.2 Specifications	4
2 Getting Started	5
2.1 Vehicle Connection	5

1 General Introduction

1.1 Outlook & Ports

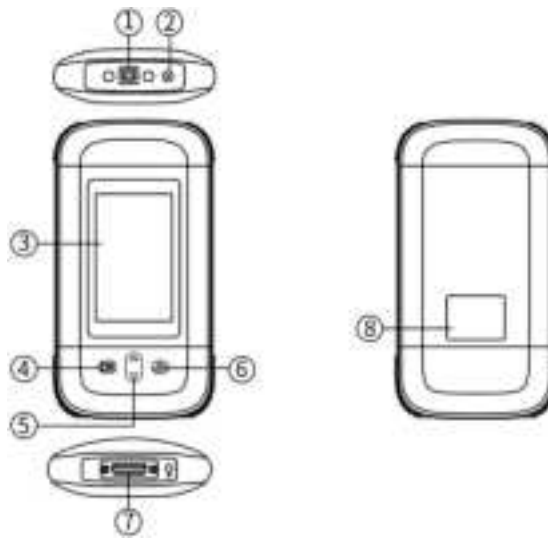

① USB Type B Port

② DC Port

③ Screen

④ OK

⑤ Up/Down Button

⑥ Return Button

⑦ DB15 Port

⑧ Nameplate

1.2 Specifications

Display: 3.97-inch screen

Operating temperature: -10~50°C

Dimensions (W x H x D): 205.2 × 111.2 × 36.8 (mm)

Caution:

1. Do not use non-standard power adapters. Otherwise at your own risk.

2 Getting Started

2.1 Vehicle Connection


2.1.1 Wireless Connection

- Turn on the tablet.



1

- Connect the DB15 connector of main cable to VCI box.
- Connect the OBDII-16 connector to DB15 connector of main cable, then plug the connector into the vehicle's DLC port.

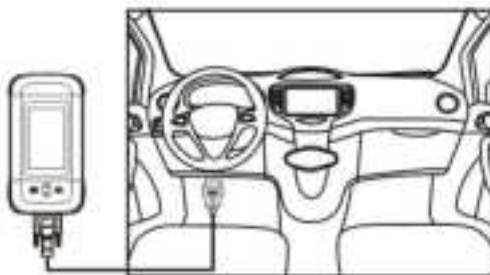


2



- When the VCI box gets powered on, the tablet will automatically search for it and make a WiFi connection.


3

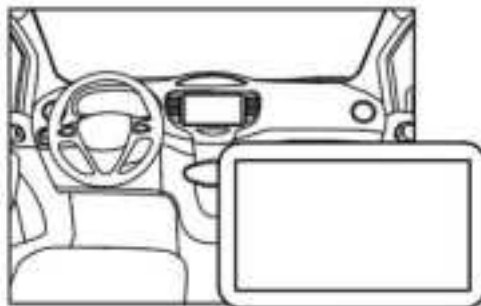

4

- Your tablet is now ready.

2.1.2 Wired Connection

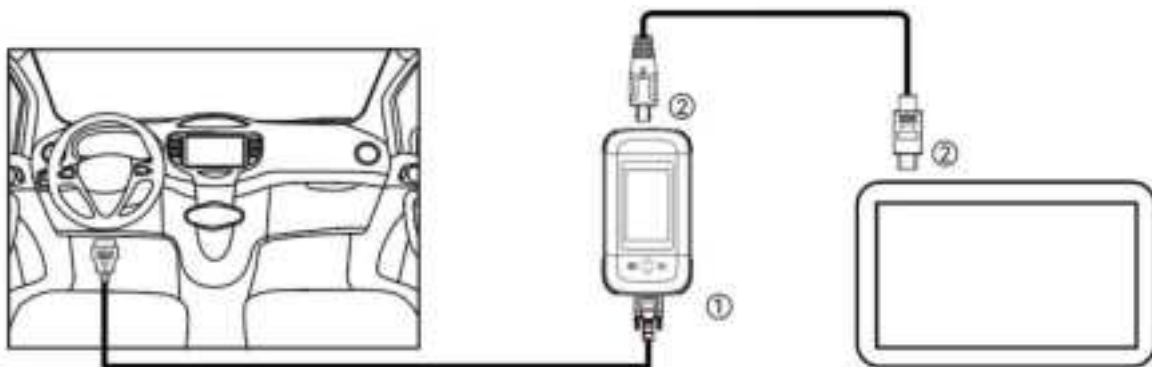

- 1. Connect DB15 connector to VCI Box; connect OBDII-16 connector to vehicle's DLC port.
- 2. Connect USB connector to VCI Box; connect Type-C connector to the tablet.

Precautions for Diagnosis

1. The voltage range on the car: +9~+36V DC;
2. When testing some special functions, the operator must operate according to the prompts and meet the test conditions. For some models [special functions], the conditions that need to be met are: engine water temperature 80 °C~105 °C, turn off headlights and air conditioners, keep the accelerator pedal in the released position, etc.;
3. The electronic control systems of different models are very complicated. If you encounter situations where it is impossible to test or a large amount of test data is abnormal, you can search for the ECU of the vehicle and select the menu for the model on the ECU nameplate;
4. If the vehicle type or electronic control system to be tested is not found in the diagnostic function, please upgrade the vehicle diagnostic software to the latest version using the Updates menu or consult the XTOOL technical service department;
5. Only wiring harnesses provided by XTOOL and designed for the device are permitted to be used with this device to avoid damage to the vehicle or the device;
6. When running a Diagnostics function, it is forbidden to shut down the device directly. You should cancel the task before returning to the main interface and then shutting down the device.

Compliance Information

FCC Compliance

FCC ID: 2AW3IV300

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference
- 2) This device must accept any interference received, including interference that may cause undesired operation.

Warning

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment can generate, use and radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

ISED Statement

IC: 29441-V300

Model: V302

PMN: Wireless Diagnostics Module, Vehicle Communication Interface

HVIN: V300

English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

CAN ICES (B) / NMB (B).

French: Cet appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux RSS exemptés de licence d'Innovation, Sciences et Développement économique Canada.

L'exploitation est soumise aux deux conditions suivantes :

(1) Cet appareil ne doit pas provoquer d'interférences.

(2) Cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

This device meets the exemption from the routine evaluation limits in section 6.6 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 6.6 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l' exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement respecte les limites d'exposition au rayonnement IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20cm entre le radiateur et votre corps.