

FCC PART 15.247

TEST REPORT

For

Hytera Communications Corporation Limited

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, 518057 China

FCC ID: YAMHP6XXVHFS


Report Type: Original Report	Product Name: Digital Portable Radio
Report Number: DG2210701-26543E-00A	
Report Date: 2021-07-27	
Reviewed By:	Gavin Xu RF Engineer 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
TECHNICAL SPECIFICATION.....	4
OBJECTIVE	4
TEST METHODOLOGY.....	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS.....	6
SUPPORT CABLE LIST AND DETAILS.....	7
BLOCK DIAGRAM OF TEST SETUP	7
TEST EQUIPMENT LIST	8
ENVIRONMENTAL CONDITIONS	8
SUMMARY OF TEST RESULTS	9
1 - RF EXPOSURE.....	10
APPLICABLE STANDARD.....	10
2 - ANTENNA REQUIREMENT	11
APPLICABLE STANDARD.....	11
ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION	11
3 - AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD.....	12
TEST SYSTEM SETUP	12
EMI TEST RECEIVER SETUP	12
TEST PROCEDURE.....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	13
TEST DATA.....	13
4 - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD.....	15
TEST SYSTEM SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	16
TEST PROCEDURE.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	16
TEST DATA.....	17
5 - CHANNEL SEPARATION TEST	22
APPLICABLE STANDARD.....	22
TEST PROCEDURE.....	22
TEST DATA.....	22
6 - 20 dB BANDWIDTH TESTING.....	28
APPLICABLE STANDARD.....	28
TEST PROCEDURE.....	28
TEST DATA.....	28
7 - QUANTITY OF HOPPING CHANNEL TEST.....	34
APPLICABLE STANDARD.....	34
TEST PROCEDURE.....	34
TEST DATA.....	34
8 - TIME OF OCCUPANCY (DWELL TIME)	36

APPLICABLE STANDARD..... 36

TEST PROCEDURE..... 36

TEST DATA..... 36

9 - PEAK OUTPUT POWER MEASUREMENT..... 42

APPLICABLE STANDARD..... 42

TEST PROCEDURE..... 42

TEST DATA..... 42

10 - BAND EDGES TESTING..... 43

APPLICABLE STANDARD..... 43

TEST PROCEDURE..... 43

TEST DATA..... 43

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name:		Digital Portable Radio
Test Model:		HP682 VHF
Multiple Model:		HP685 VHF, HP686 VHF, HP688 VHF, HP602 VHF, HP605 VHF, HP606 VHF, HP608 VHF, HDP682 VHF, HDP685 VHF, HDP686 VHF, HDP688 VHF, HDP602 VHF, HDP605 VHF, HDP606 VHF, HDP608 VHF
Rated Input Voltage:		DC 7.7V from Battery, DC 12V charging from Charger Base
Serial Number:		HP682 VHF: DG2210701-26543E-RF-S1 HP602 VHF: DG2210701-26543E-RF-S2
Adapter Information	Model:	HKA01212010-XQ
	Input:	AC 100-240V 50/60Hz 0.5A
	Output:	DC 12.0V 1.0A
EUT Received Date:		2021.7.2
EUT Received Status:		Good

Technical Specification

Operation Frequency Range (MHz):	2402-2480
Max. RF Output Power (Conducted)(dBm):	3.56
Antenna Gain (dBi)[▲]:	0
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK

Objective

This report is prepared on behalf of **Hytera Communications Corporation Limited** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 DTS Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode, which was provided by manufacturer.

EUT Exercise Software

The software: "Blue test2.5.8.exe" was used during test, which was provided by manufacturer.
The maximum power level was configured by the software as below table:

Mode	Packet type	Channel	Frequency (MHz)	Power Level Setting
GFSK	DH1	Low	2402	150
		Middle	2441	150
		High	2480	150
	DH3	Low	2402	100
		Middle	2441	100
		High	2480	100
	DH5	Low	2402	83
		Middle	2441	83
		High	2480	83
$\pi/4$ -DQPSK	2DH1	Low	2402	255
		Middle	2441	255
		High	2480	255
	2DH3	Low	2402	255
		Middle	2441	255
		High	2480	255
	2DH5	Low	2402	255
		Middle	2441	255
		High	2480	255
8DPSK	3DH1	Low	2402	255
		Middle	2441	255
		High	2480	255
	3DH3	Low	2402	255
		Middle	2441	255
		High	2480	255
	3DH5	Low	2402	255
		Middle	2441	255
		High	2480	255

Equipment Modifications

No modification was made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
Adapter Cable	No	No	1.8	Adapter	EUT

Block Diagram of Test Setup

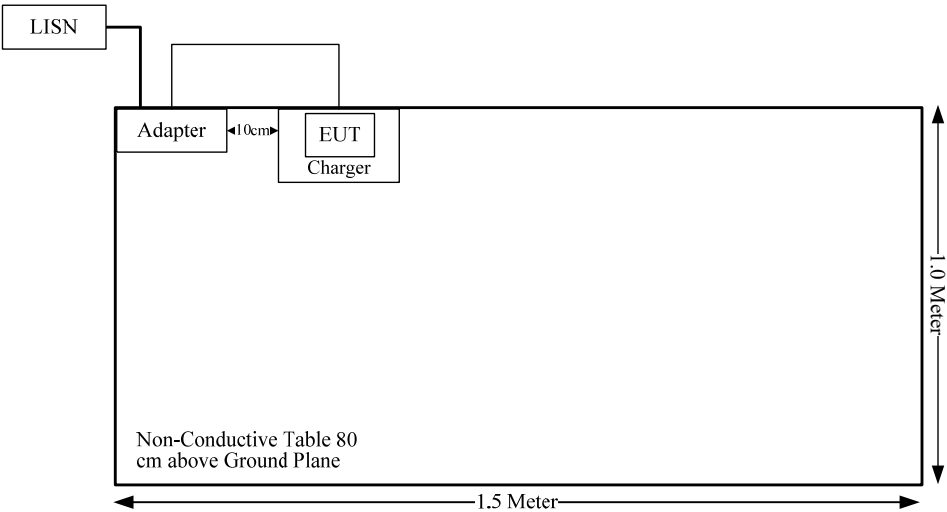

Test Equipment List

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted emission					
R&S	LISN	ENV 216	101614	2020-09-12	2021-09-12
R&S	EMI Test Receiver	ESCI	101121	2021-07-06	2022-07-05
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2020-09-05	2021-09-05
R&S	Test Software	EMC32	Version 9.10.00	N/A	N/A
Radiation Below 1GHz Test					
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2020-09-24	2021-09-24
Sonoma	Amplifier	310N	185914	2020-10-13	2021-10-13
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Radiation Above 1GHz Test					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2020-12-05	2023-12-04
Agilent	Spectrum Analyzer	E4440A	SG43360054	2021-07-06	2022-07-05
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2021-06-27	2022-06-26
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2021-06-27	2022-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2021-06-16	2022-06-15
RF Conducted					
R&S	EMI Test Receiver	ESR3	102724	2021-06-22	2022-06-21
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	2020-09-06	2021-09-06
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2020-09-12	2021-09-12

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Environmental Conditions

Test Items	Conducted Emissions	Radiated Emissions (Below 1GHz)	Radiated Emissions (Above 1GHz)	RF Conducted
Temperature:	27.1 °C	26.2 °C	29.1 °C	24.2~25.6 °C
Relative Humidity:	59%	59%	27 %	51~56 %
ATM Pressure:	100.5kPa	100.2kPa	100.3kPa	100.1~100.3 kPa
Tester:	Walker Chen	Burt Hu	Jeremy Liang	Wayne Wei
Test Date:	2021-07-14	2021.07.22	2021.07.15	2021-07-05~2021-07-06

SUMMARY OF TEST RESULTS

S/N	FCC Rules	Description of Test	Result
1	§15.247 (i) §1.1310 §2.1093	RF Exposure	Compliance
2	§15.203	Antenna requirement	Compliance
3	§15.207(a)	AC line conducted emissions	Compliance
4	§15.205 §15.209 §15.247(d)	Spurious emissions	Compliance
5	§15.247(a)(1)	Channel separation	Compliance
6	§15.247(a)(1)	20 dB bandwidth	Compliance
7	§15.247(a)(1)(iii)	Quantity of hopping channel test	Compliance
8	§15.247(a)(1)(iii)	Time of occupancy (dwell time)	Compliance
9	§15.247(b)(1)	Peak output power measurement	Compliance
10	§15.247(d)	Band edges	Compliance

1 - RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max conducted power including tune-up tolerance is 4 dBm (2.51 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 2.51/5 \cdot (\sqrt{2.480}) = 0.8 < 3.0$

So the stand-alone SAR evaluation is not necessary.

2 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Information And Connector Construction

The EUT has one internal antenna arrangement for BT, fulfill the requirement of this section. Please refer to below information and the EUT photos:

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
FPC	50	0dBi/2.4~2.5GHz


Result: Compliance.

3 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

Test System Setup

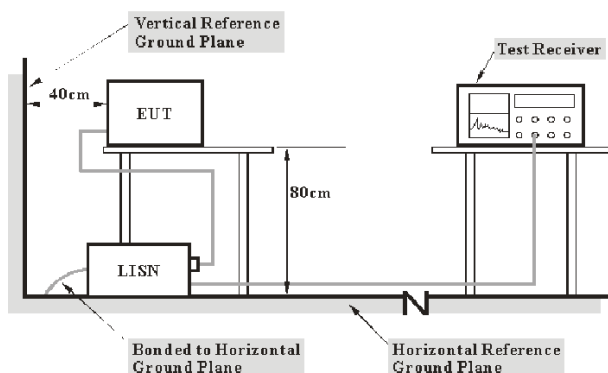

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisen with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

Corrected Amplitude & Margin Calculation

The basic equation is as follows: $V_C = V_R + A_C + VDF$; $C_f = A_C + VDF$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows: $\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$


Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots.


Model: HP682 VHF (worst case)

AC120V, 60 Hz, Line:

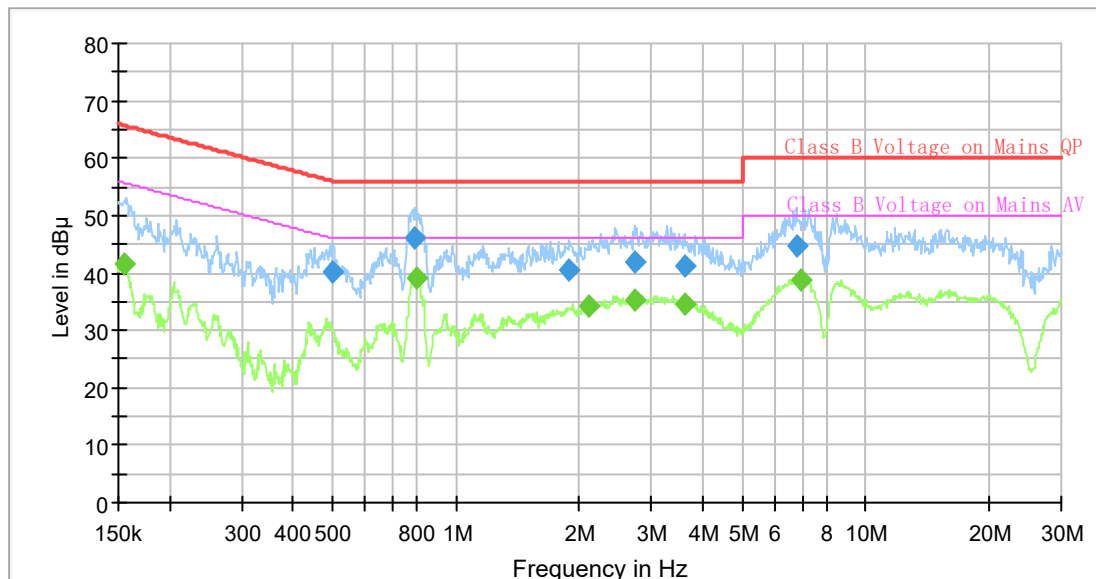

Final Result

Frequency (MHz)	QuasiPeak (dB μV)	Average (dB μV)	Limit (dB μV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.154557	---	41.74	55.75	14.01	9.000	L1	9.6
0.501508	40.06	---	56.00	15.94	9.000	L1	9.6
0.793516	46.13	---	56.00	9.87	9.000	L1	9.7
0.797484	---	39.06	46.00	6.94	9.000	L1	9.7
1.889951	40.64	---	56.00	15.36	9.000	L1	9.7
2.098640	---	34.15	46.00	11.85	9.000	L1	9.7
2.733627	42.04	---	56.00	13.96	9.000	L1	9.7
2.747295	---	35.41	46.00	10.59	9.000	L1	9.7
3.614420	41.29	---	56.00	14.71	9.000	L1	9.7
3.614420	---	34.50	46.00	11.50	9.000	L1	9.7
6.775829	44.74	---	60.00	15.26	9.000	L1	9.8
6.981662	---	38.70	50.00	11.30	9.000	L1	9.8

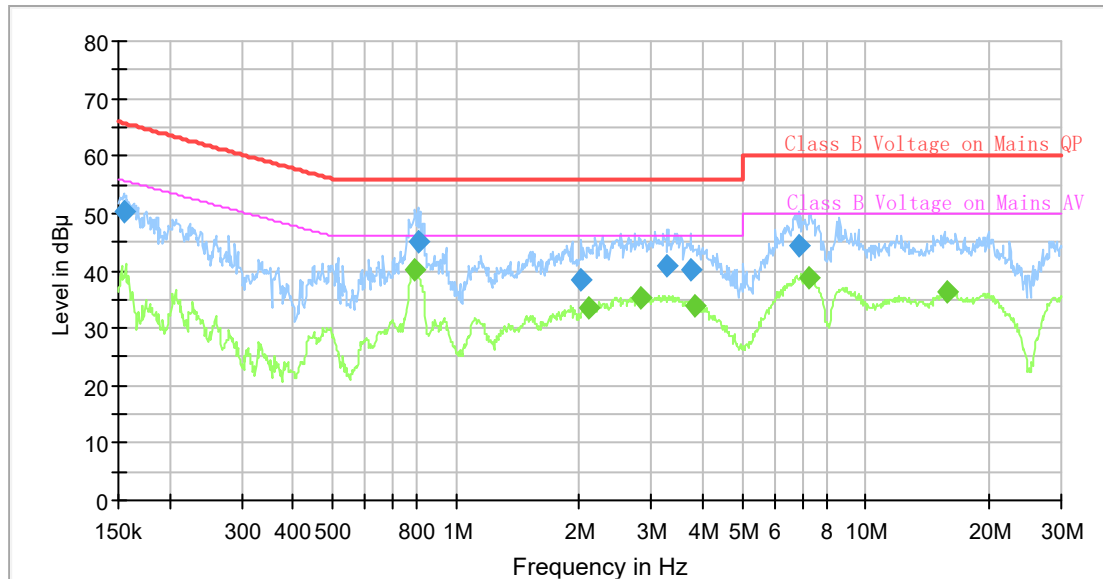AC120V, 60 Hz, Neutral:**Final Result**

Frequency (MHz)	QuasiPeak (dB µ V)	Average (dB µ V)	Limit (dB µ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.154557	50.18	---	65.75	15.57	9.000	N	9.6
0.793516	---	40.32	46.00	5.68	9.000	N	9.6
0.809506	45.14	---	56.00	10.86	9.000	N	9.6
2.026635	38.59	---	56.00	17.41	9.000	N	9.6
2.098640	---	33.63	46.00	12.37	9.000	N	9.6
2.830751	---	35.13	46.00	10.87	9.000	N	9.6
3.287634	40.97	---	56.00	15.03	9.000	N	9.6
3.742839	40.24	---	56.00	15.76	9.000	N	9.6
3.837350	---	33.95	46.00	12.05	9.000	N	9.6
6.877976	44.50	---	60.00	15.50	9.000	N	9.6
7.229716	---	38.66	50.00	11.34	9.000	N	9.6
15.740803	---	36.16	50.00	13.84	9.000	N	9.9


4 - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Test System Setup

Below 1GHz:

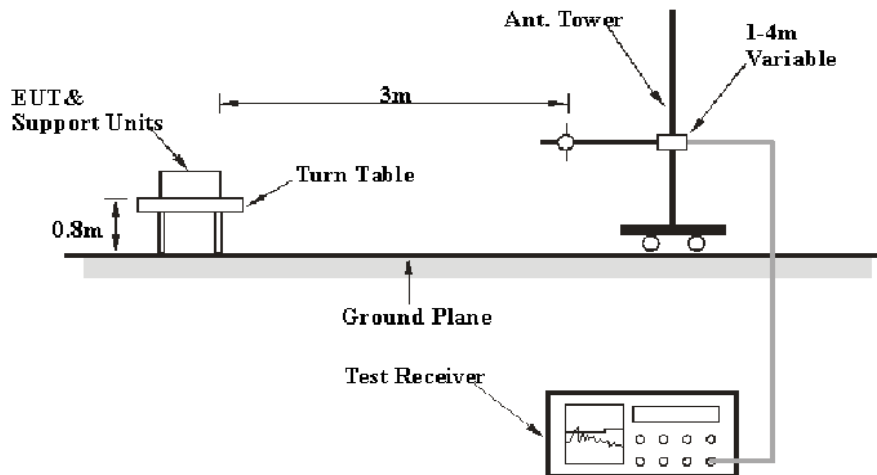

Above 1GHz:

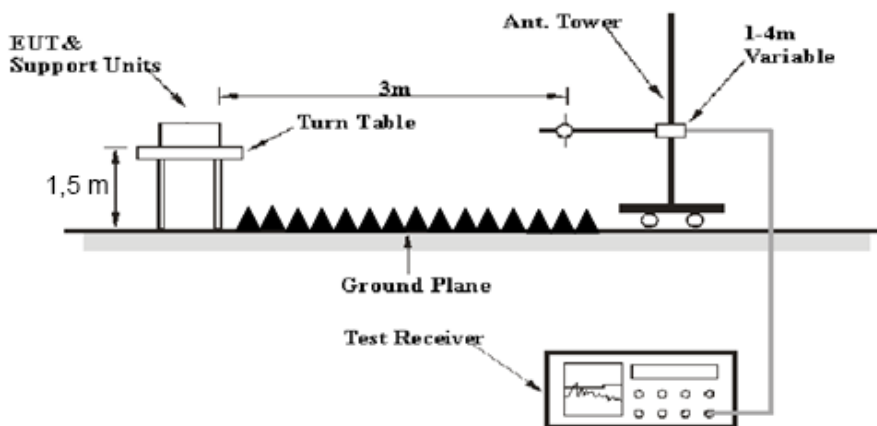

The radiated emission Below 1GHz tests were performed in the 3 meters chamber, above 1GHz tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

According to ANSI C63.10-2013, during the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.


Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:


$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

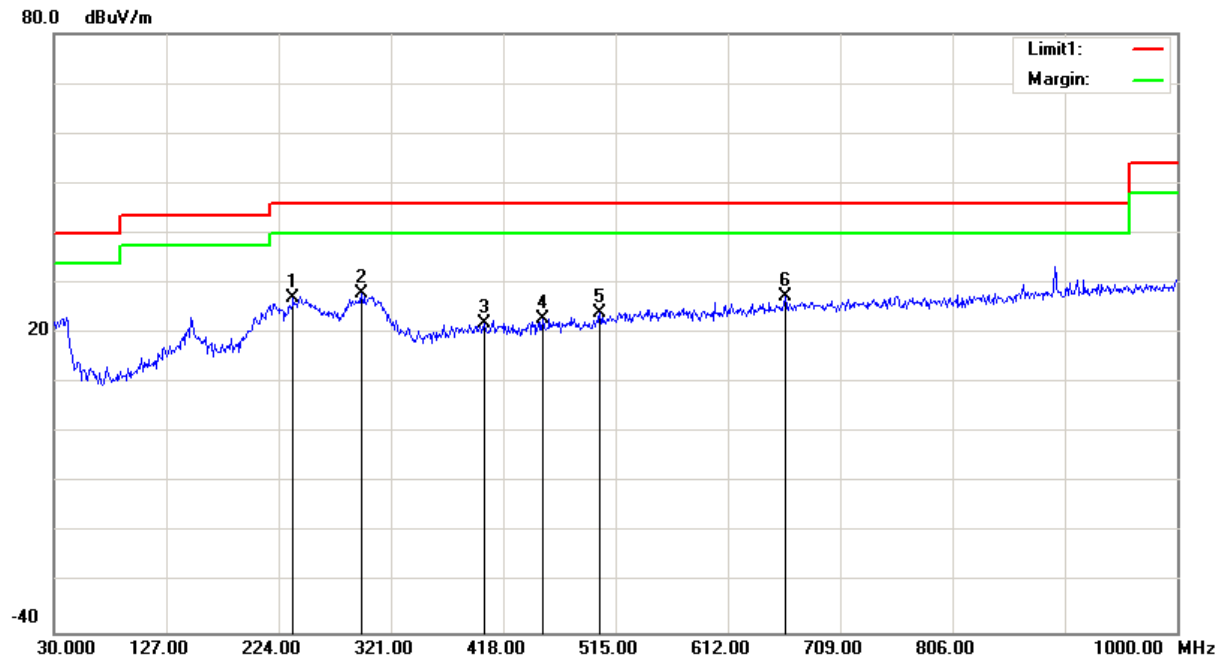Test Data*Test Mode: Transmitting***Test Result:** Compliance*Please Refer to the following data.***1) 30MHz-1GHz** (Model: HP682 VHF, BDR High channel was the worst)**Horizontal:**

Frequency (MHz)	Receiver Reading (dBμV)	Remark	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
236.6100	37.04	peak	-10.11	26.93	46.00	19.07
295.7800	35.52	peak	-7.70	27.82	46.00	18.18
401.5100	27.18	peak	-5.17	22.01	46.00	23.99
451.9500	27.06	peak	-4.24	22.82	46.00	23.18
501.4200	27.39	peak	-3.39	24.00	46.00	22.00
661.4700	27.66	peak	-0.21	27.45	46.00	18.55

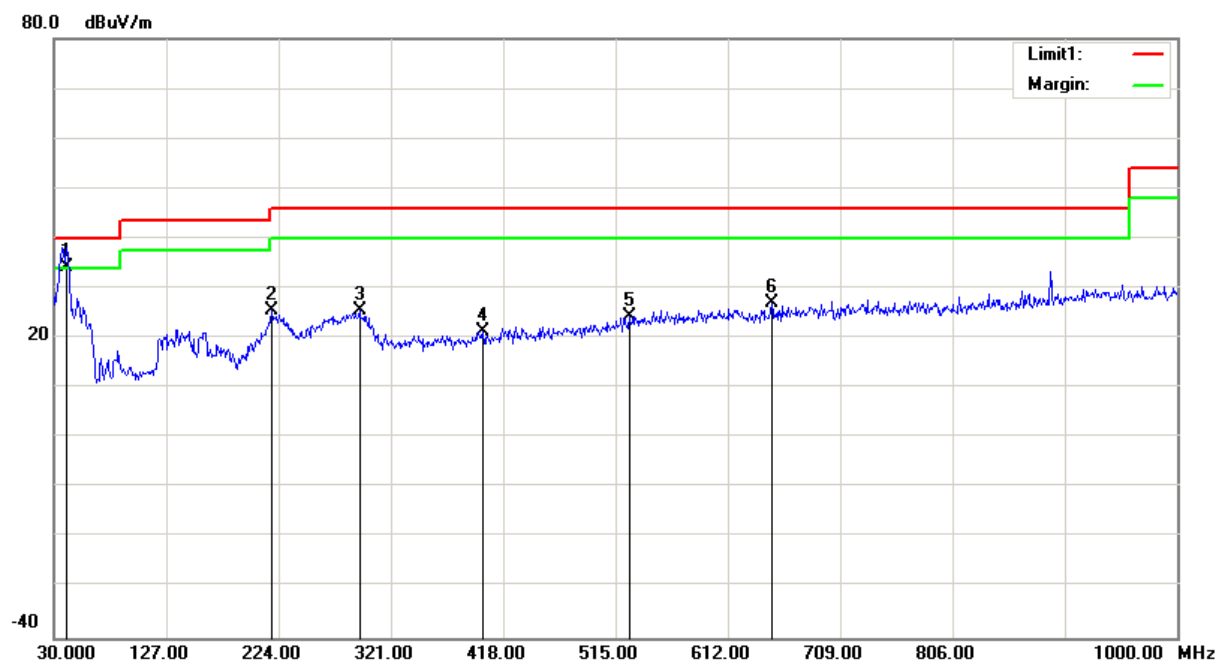Vertical:

Frequency (MHz)	Receiver Reading (dBμV)	Remark	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
40.6700	43.87	QP	-9.67	34.20	40.00	5.80
218.1800	36.64	peak	-11.09	25.55	46.00	20.45
293.8400	33.19	peak	-7.62	25.57	46.00	20.43
400.5400	26.48	peak	-5.23	21.25	46.00	24.75
526.6400	26.86	peak	-2.48	24.38	46.00	21.62
649.8300	27.55	peak	-0.45	27.10	46.00	18.90




2)1GHz-25GHz:*BDR Mode (Model HP682 VHF was the worst case):*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	58.89	PK	H	28.10	1.80	0.00	88.79	N/A	N/A
2402.00	48.59	AV	H	28.10	1.80	0.00	78.49	N/A	N/A
2402.00	61.60	PK	V	28.10	1.80	0.00	91.50	N/A	N/A
2402.00	51.26	AV	V	28.10	1.80	0.00	81.16	N/A	N/A
2390.00	24.81	PK	V	28.08	1.80	0.00	54.69	74.00	19.31
2390.00	12.79	AV	V	28.08	1.80	0.00	42.67	54.00	11.33
4804.00	35.19	PK	V	32.91	3.17	25.60	45.67	74.00	28.33
4804.00	23.46	AV	V	32.91	3.17	25.60	33.94	54.00	20.06
7206.00	39.64	PK	V	35.74	4.82	25.60	54.60	74.00	19.40
7206.00	26.35	AV	V	35.74	4.82	25.60	41.31	54.00	12.69
2585.00	45.26	PK	V	28.61	1.88	26.20	49.55	74.00	24.45
2585.00	43.21	AV	V	28.61	1.88	26.20	47.50	54.00	6.50
Middle Channel: 2441 MHz									
2441.00	63.98	PK	H	28.18	1.82	0.00	93.98	N/A	N/A
2441.00	52.13	AV	H	28.18	1.82	0.00	82.13	N/A	N/A
2441.00	65.07	PK	V	28.18	1.82	0.00	95.07	N/A	N/A
2441.00	64.90	AV	V	28.18	1.82	0.00	94.90	N/A	N/A
4882.00	36.35	PK	V	33.06	3.27	25.66	47.02	74.00	26.98
4882.00	24.65	AV	V	33.06	3.27	25.66	35.32	54.00	18.68
7323.00	38.26	PK	V	36.04	4.62	25.73	53.19	74.00	20.81
7323.00	26.73	AV	V	36.04	4.62	25.73	41.66	54.00	12.34
2585.00	45.63	PK	V	28.61	1.88	26.20	49.92	74.00	24.08
2585.00	43.16	AV	V	28.61	1.88	26.20	47.45	54.00	6.55
High Channel: 2480 MHz									
2480.00	64.35	PK	H	28.26	1.84	0.00	94.45	N/A	N/A
2480.00	53.77	AV	H	28.26	1.84	0.00	83.87	N/A	N/A
2480.00	65.73	PK	V	28.26	1.84	0.00	95.83	N/A	N/A
2480.00	55.21	AV	V	28.26	1.84	0.00	85.31	N/A	N/A
2483.50	26.43	PK	V	28.27	1.84	0.00	56.54	74.00	17.46
2483.50	13.87	AV	V	28.27	1.84	0.00	43.98	54.00	10.02
4960.00	36.38	PK	V	33.22	3.23	25.63	47.20	74.00	26.80
4960.00	24.26	AV	V	33.22	3.23	25.63	35.08	54.00	18.92
7440.00	39.34	PK	V	36.34	4.41	25.85	54.24	74.00	19.76
7440.00	26.86	AV	V	36.34	4.41	25.85	41.76	54.00	12.24
2585.00	46.31	PK	V	28.61	1.88	26.20	50.60	74.00	23.40
2585.00	44.08	AV	V	28.61	1.88	26.20	48.37	54.00	5.63

3) Worst plots (GFSK High channel was the worst)




Horizontal

Fundamental
Test with Band
Rejection Filter

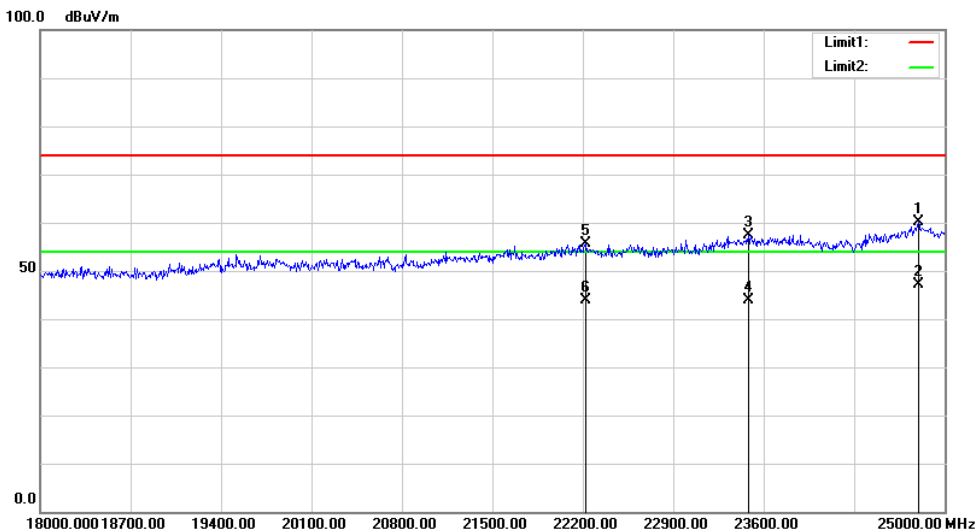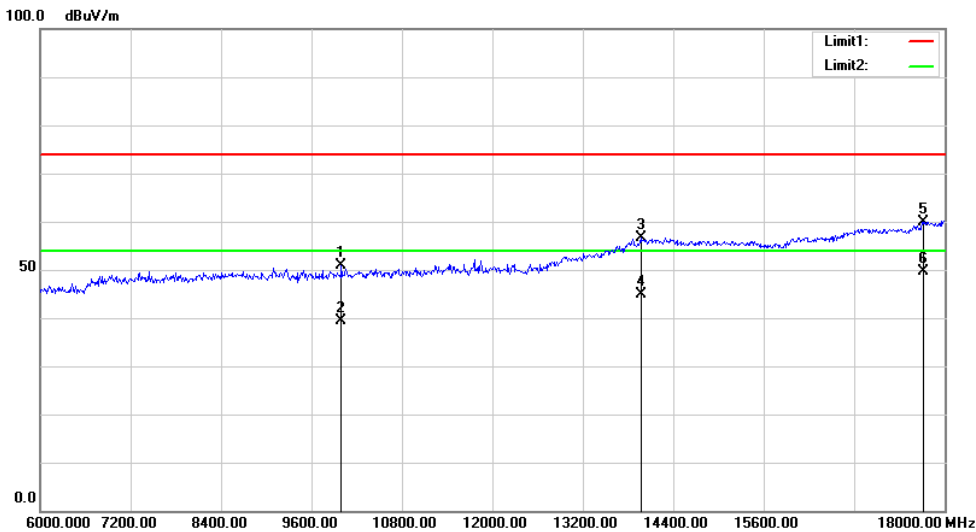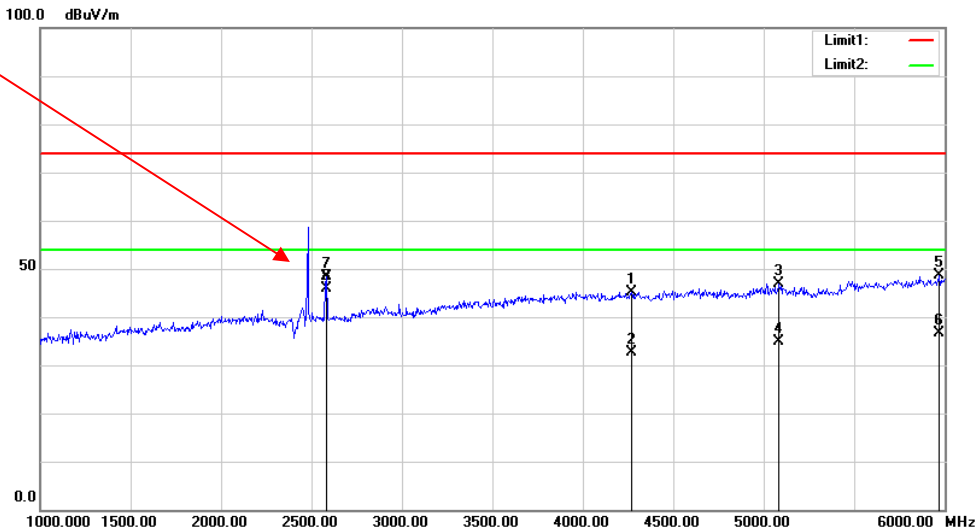

Vertical

Fundamental
Test with Band
Rejection Filter

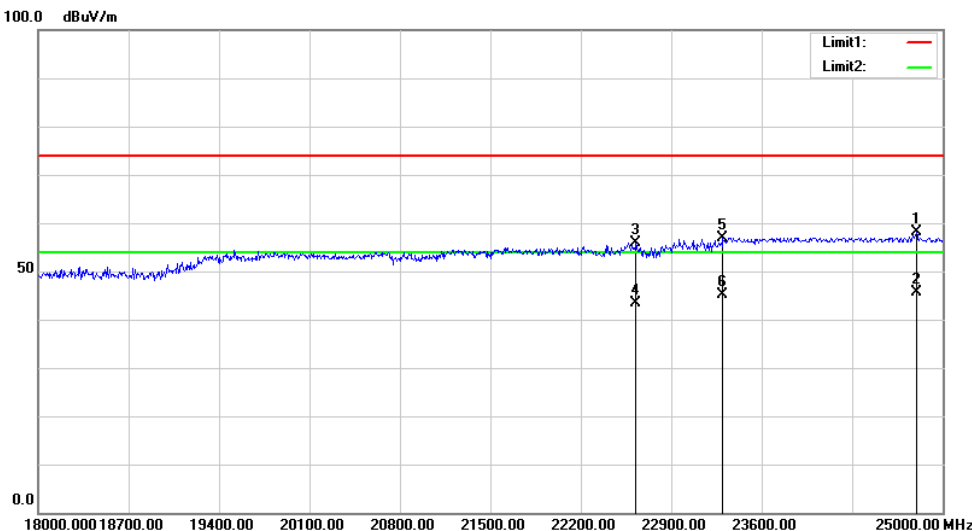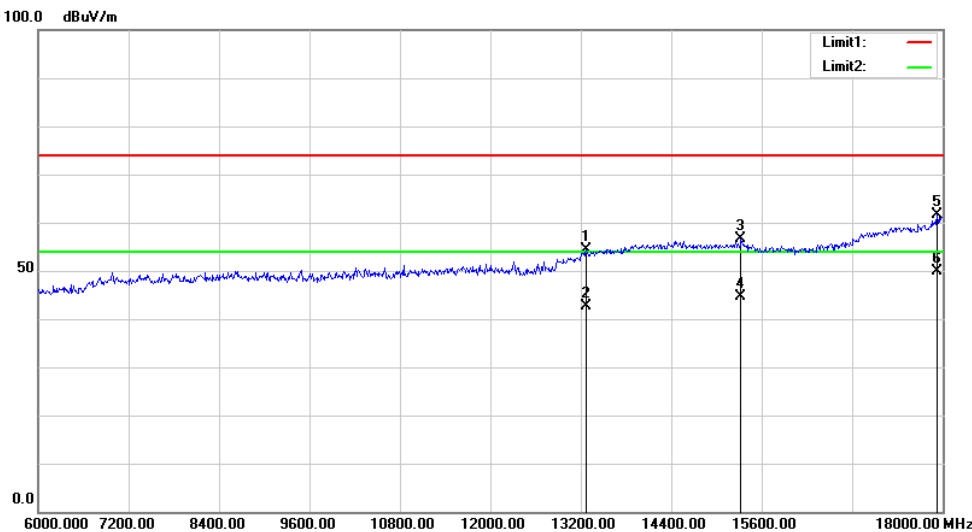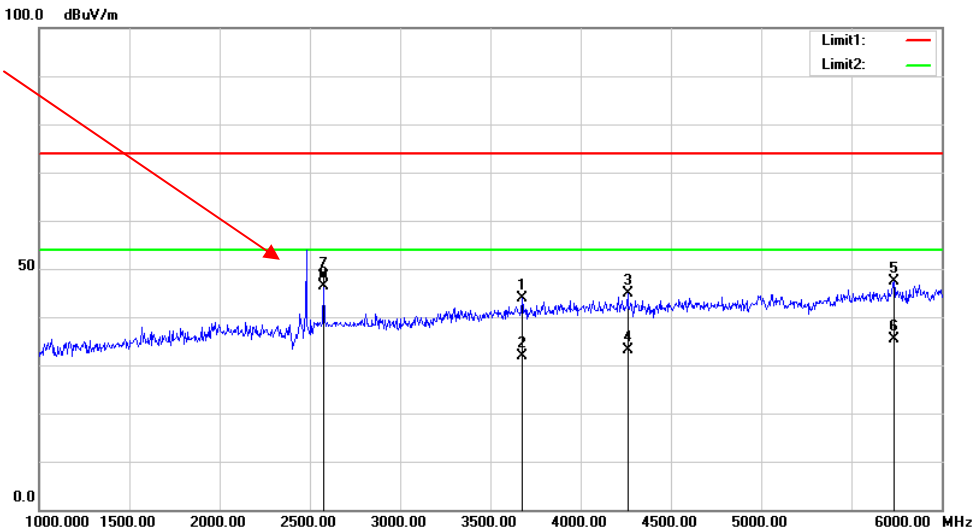

5 - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots.

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402-2403	1.000	0.61
	Middle	2441-2442	1.000	0.59
	High	2480-2479	1.000	0.59
EDR ($\pi/4$ -DQPSK)	Low	2402-2403	1.000	0.82
	Middle	2441-2442	1.000	0.81
	High	2480-2479	1.000	0.81
EDR (8DPSK)	Low	2402-2403	1.000	0.81
	Middle	2441-2442	1.000	0.81
	High	2480-2479	1.000	0.81

Note: Limit = $(2/3) \times 20\text{dB bandwidth}$

BDR Mode (GFSK):

Low Channel



Date: 5.JUL.2021 18:10:15

Middle Channel



Date: 5.JUL.2021 18:11:13


High Channel



Date: 5.JUL.2021 18:12:27


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

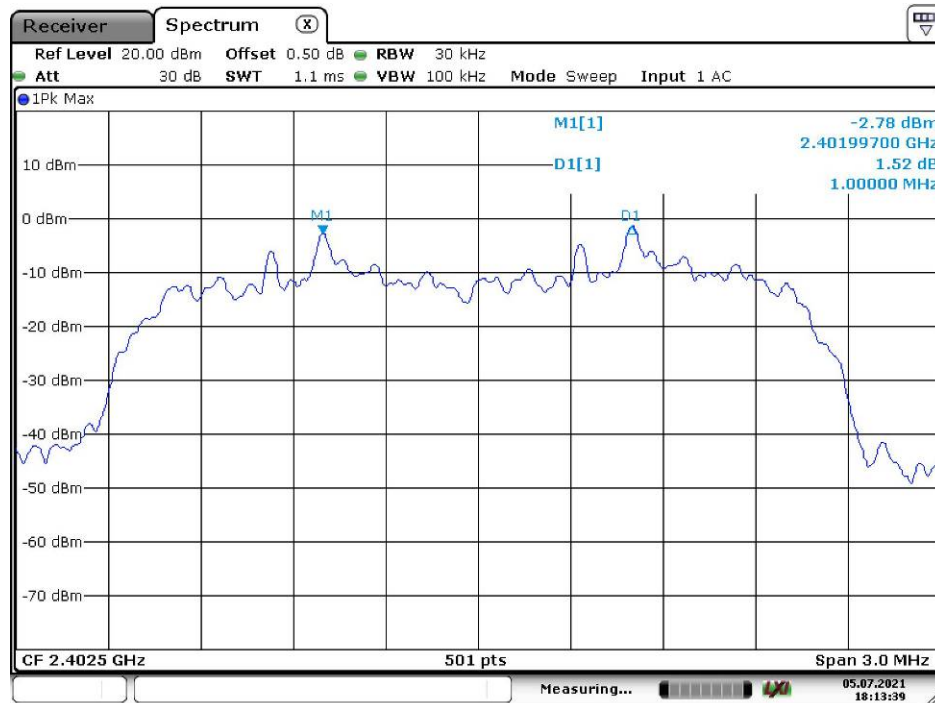


Date: 5.JUL.2021 18:13:40

Middle Channel

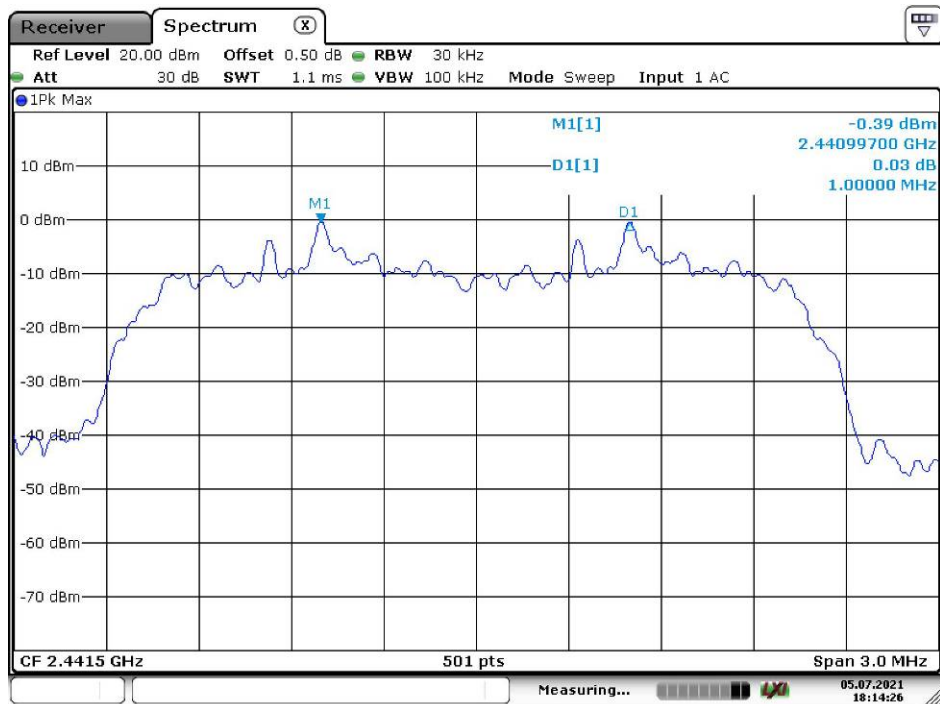

Date: 5.JUL.2021 18:14:27


High Channel

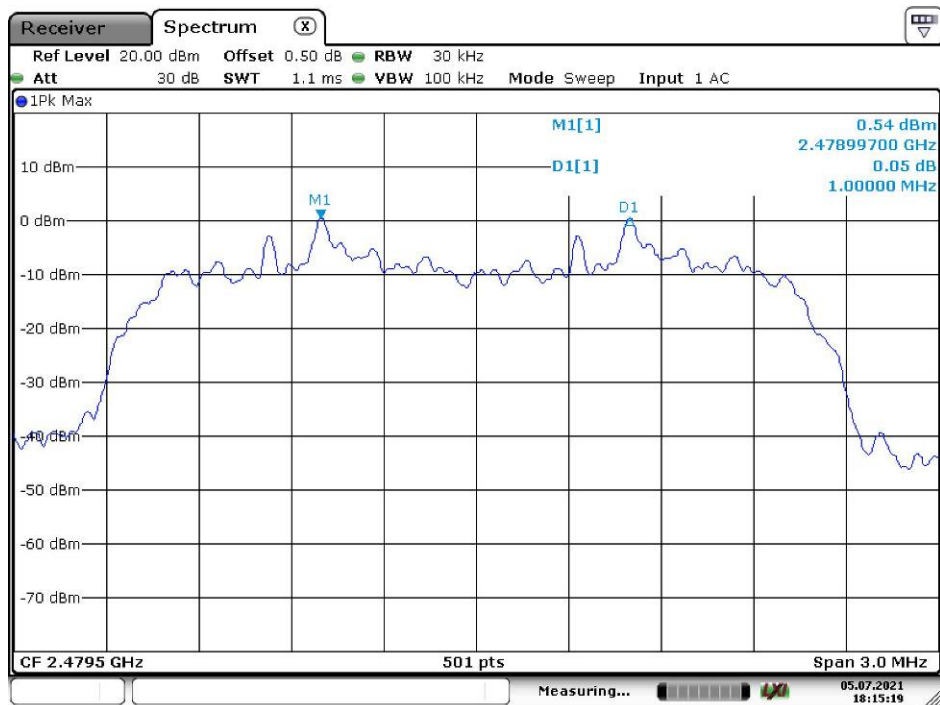

Date: 5.JUL.2021 18:15:20


EDR Mode (8DPSK):

Low Channel

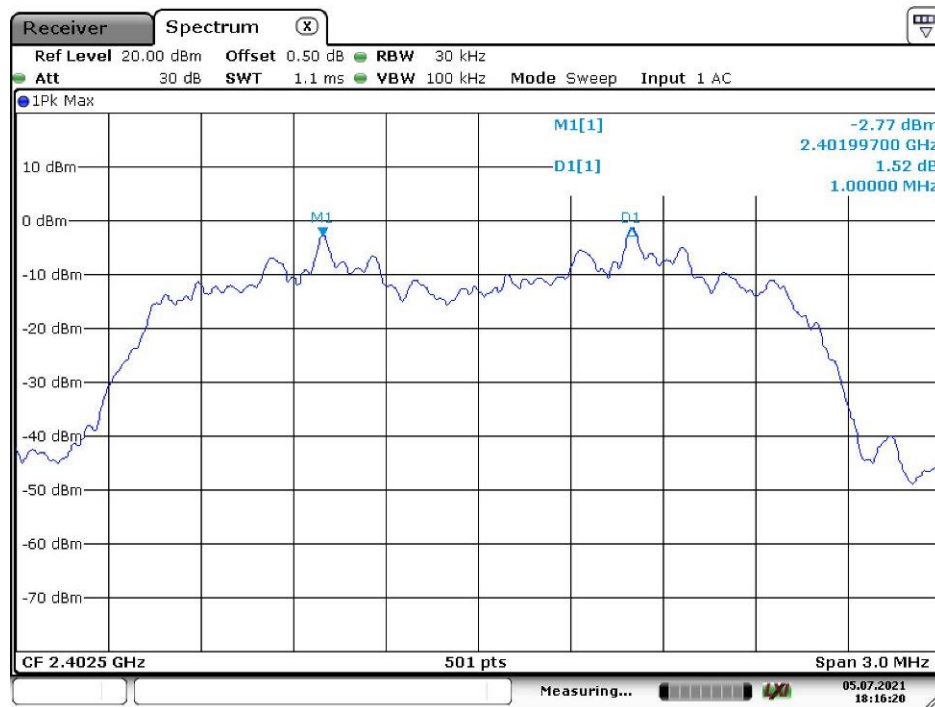


Date: 5.JUL.2021 18:16:21

Middle Channel

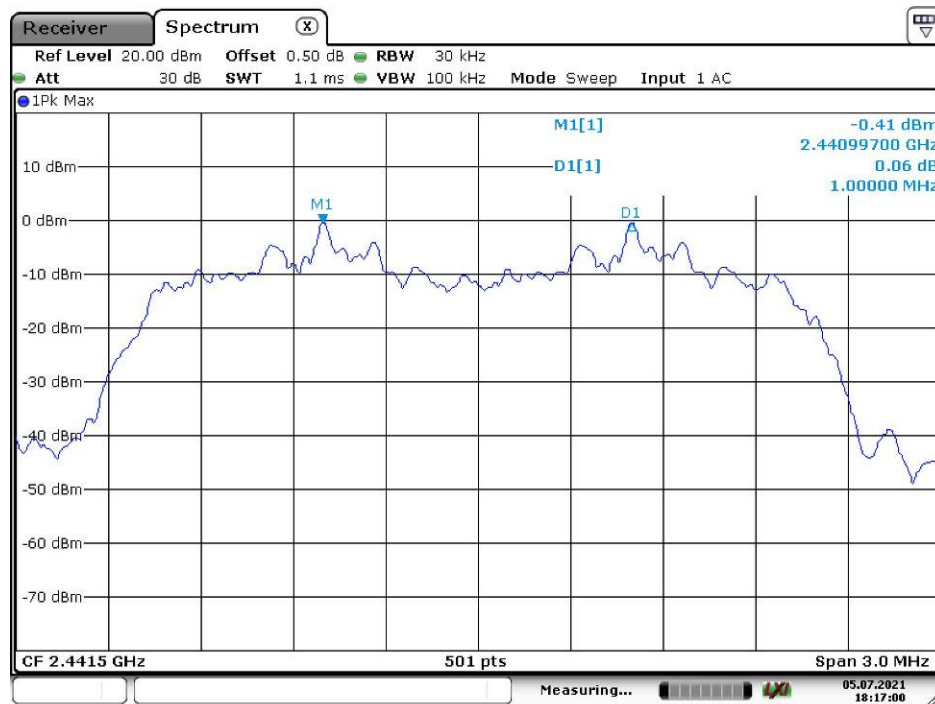

Date: 5.JUL.2021 18:17:00

High Channel

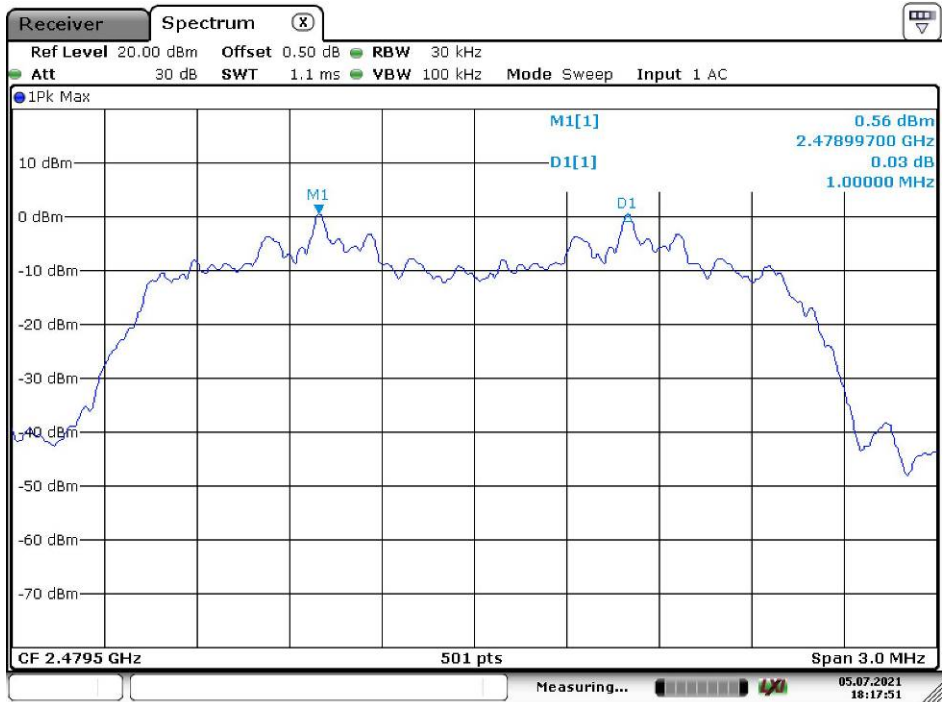

Date: 5.JUL.2021 18:17:52

6 – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data


Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots.

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.920
	Middle	2441	0.884
	High	2480	0.884
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.224
	Middle	2441	1.220
	High	2480	1.220
EDR Mode (8DPSK)	Low	2402	1.212
	Middle	2441	1.212
	High	2480	1.212


BDR Mode (GFSK):

Low Channel

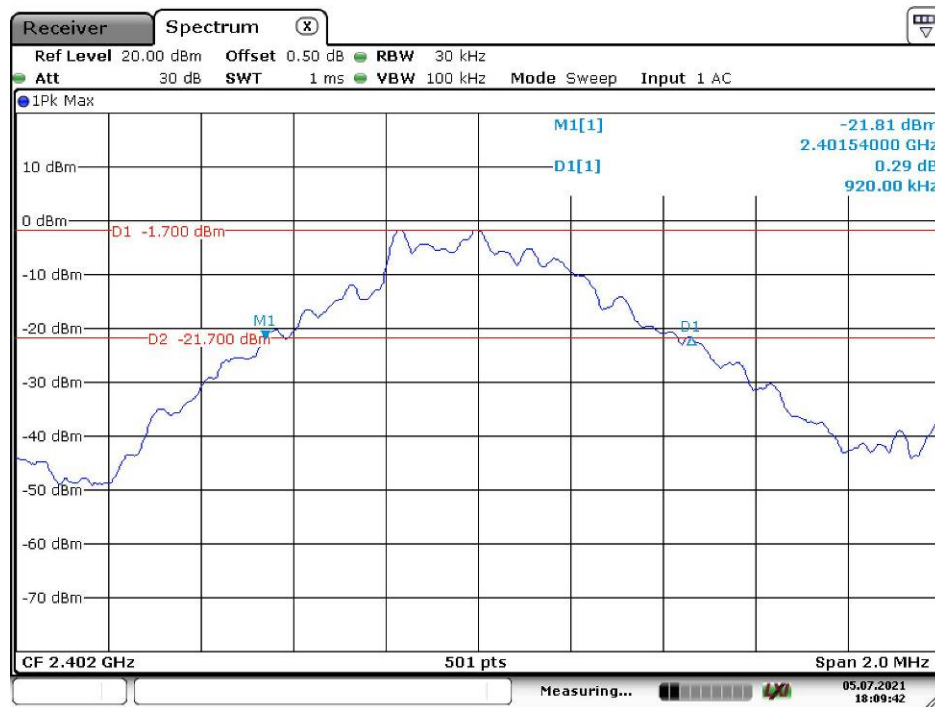


Date: 5.JUL.2021 18:09:42

Middle Channel

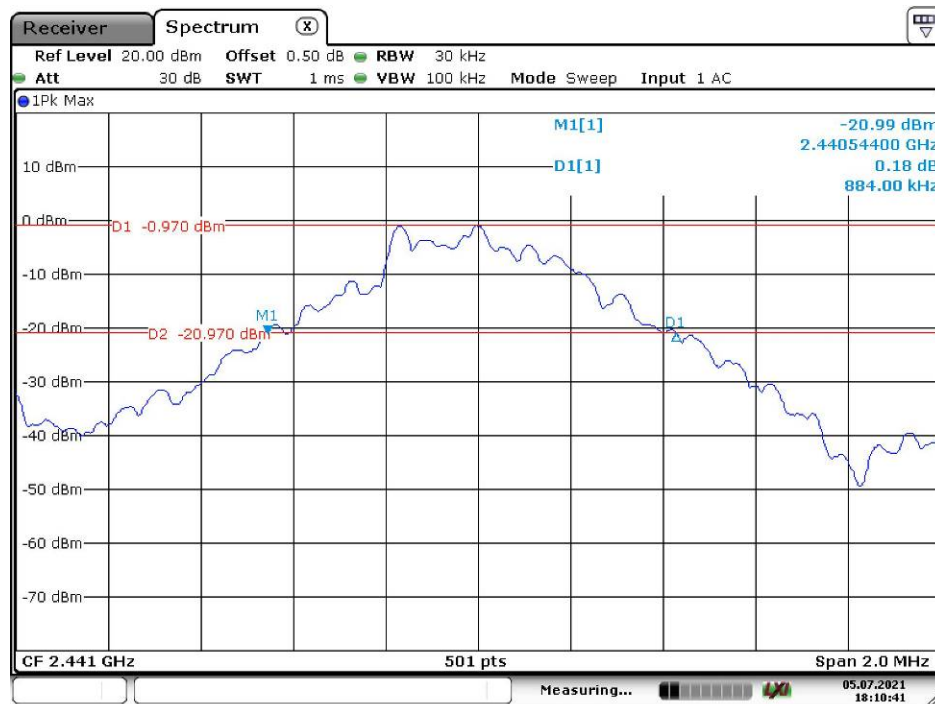

Date: 5.JUL.2021 18:10:42


High Channel

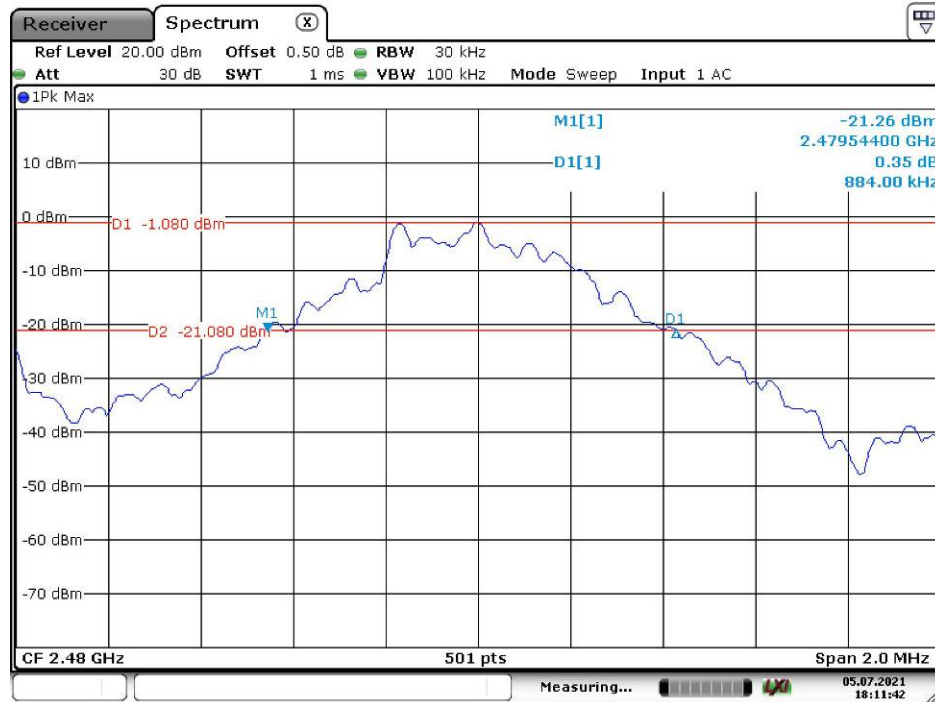

Date: 5.JUL.2021 18:11:43


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

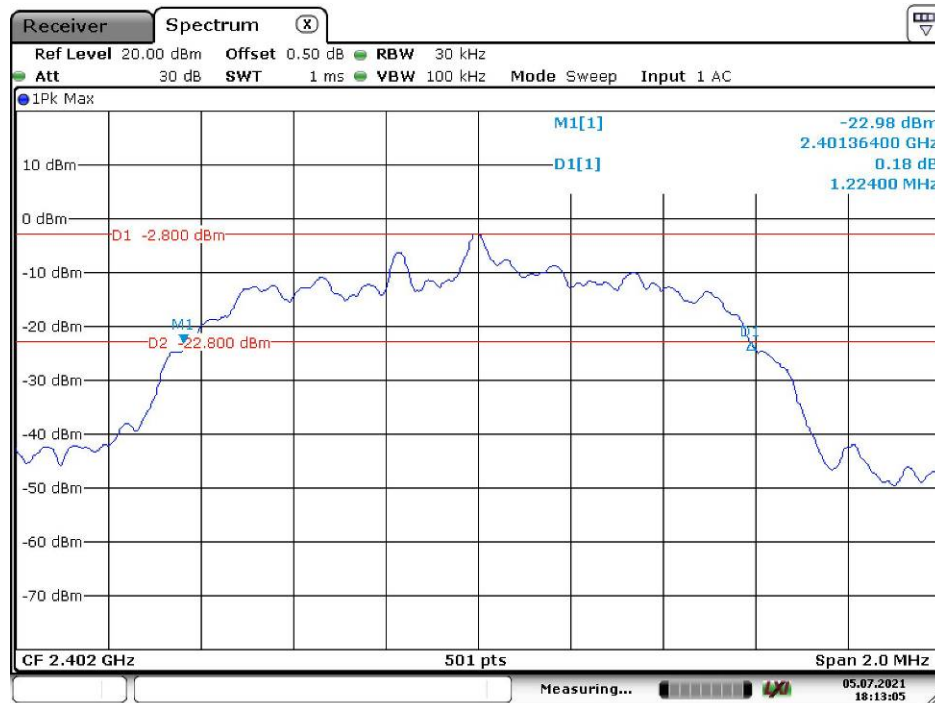


Date: 5.JUL.2021 18:13:05

Middle Channel

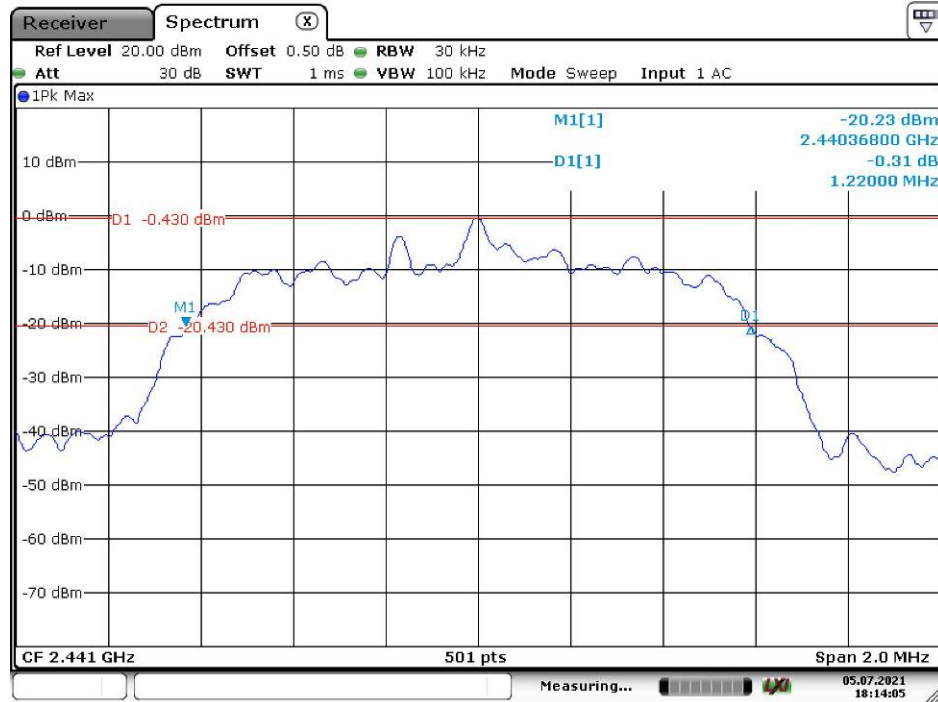

Date: 5.JUL.2021 18:14:05


High Channel

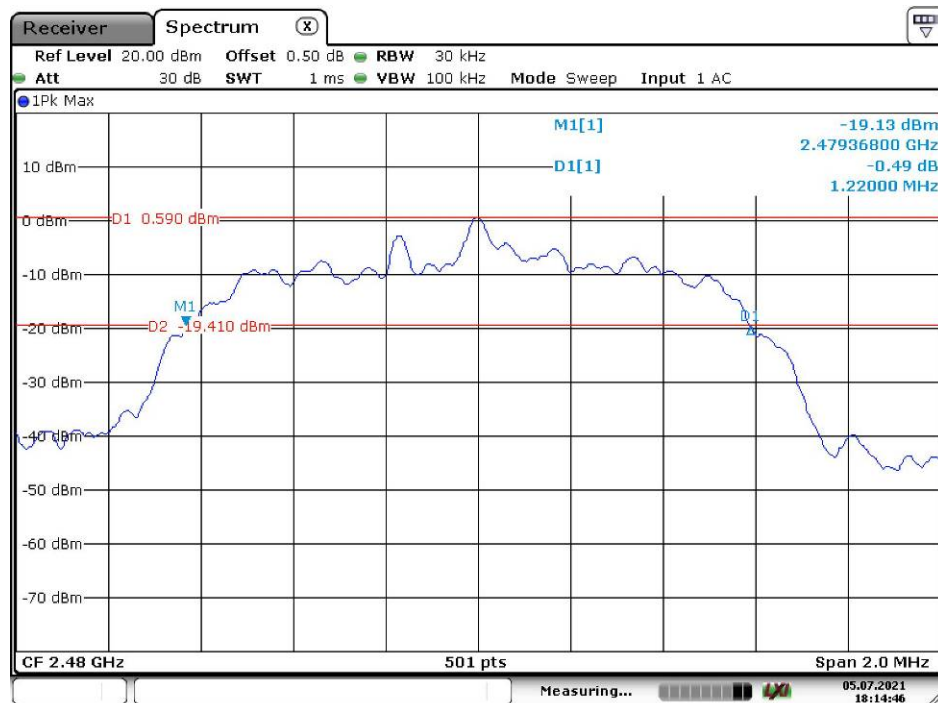

Date: 5.JUL.2021 18:14:47


EDR Mode (8DPSK):

Low Channel

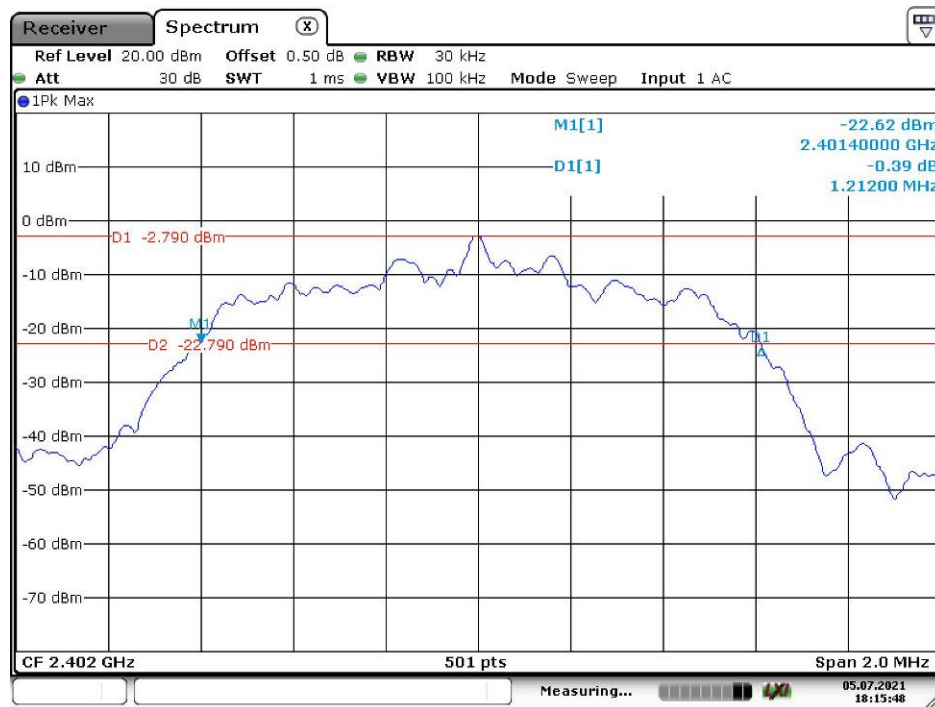


Date: 5.JUL.2021 18:15:49

Middle Channel

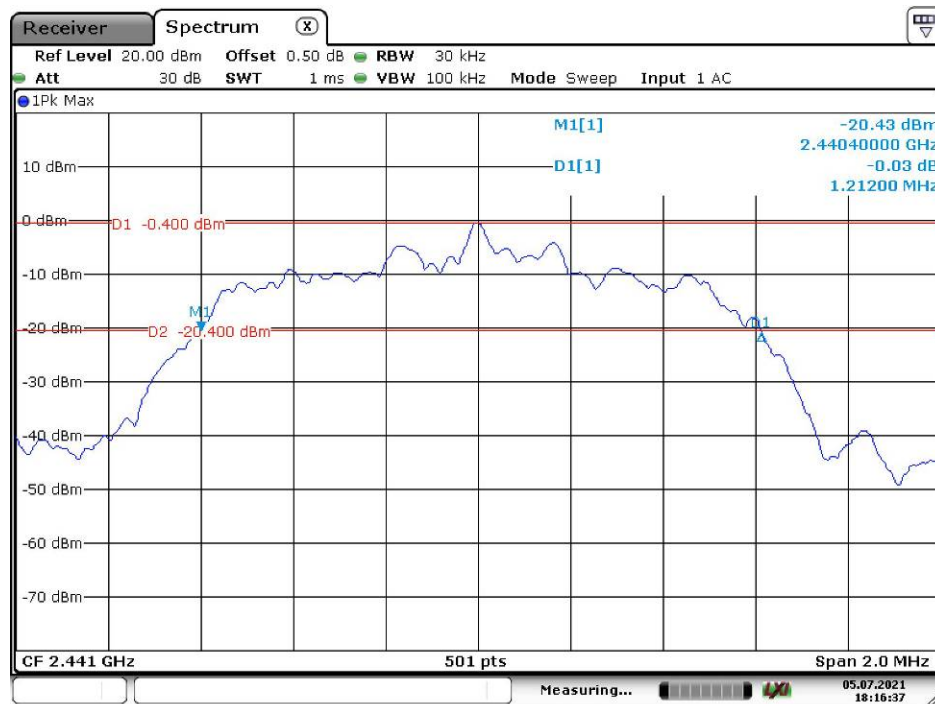

Date: 5.JUL.2021 18:16:38

High Channel

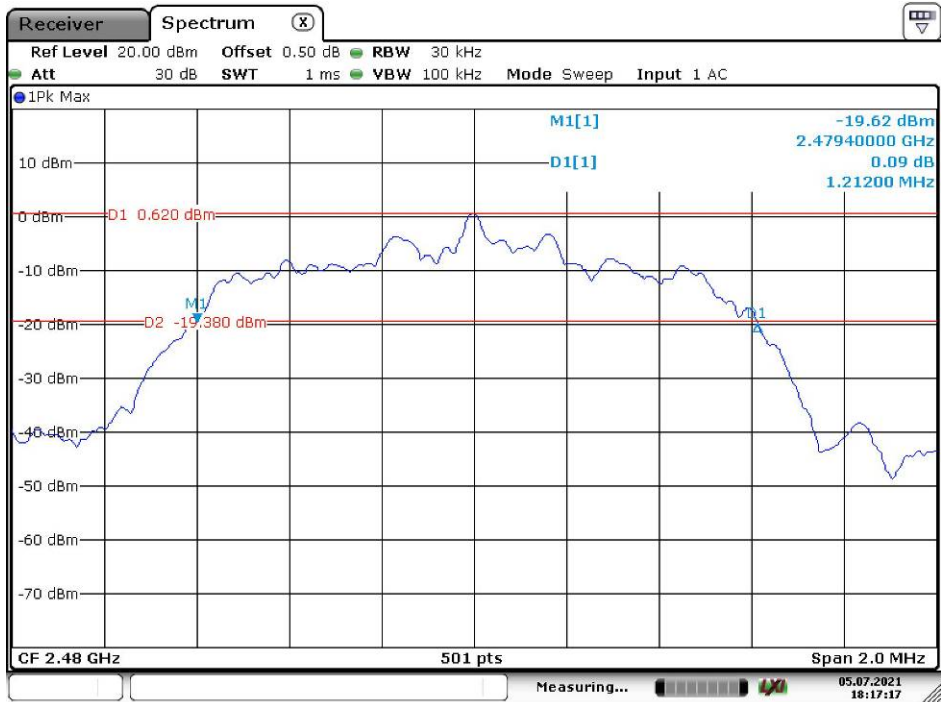

Date: 5.JUL.2021 18:17:18

7 - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.


Test Data

Test Mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots.

Test mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15

BDR Mode (GFSK)

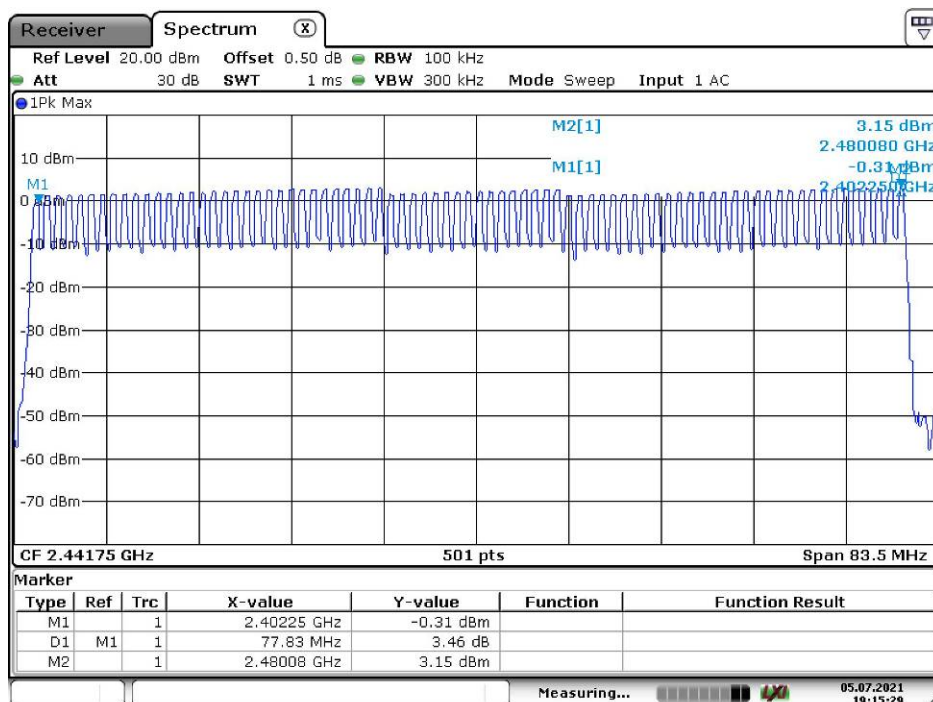


Date: 5.JUL.2021 19:15:30

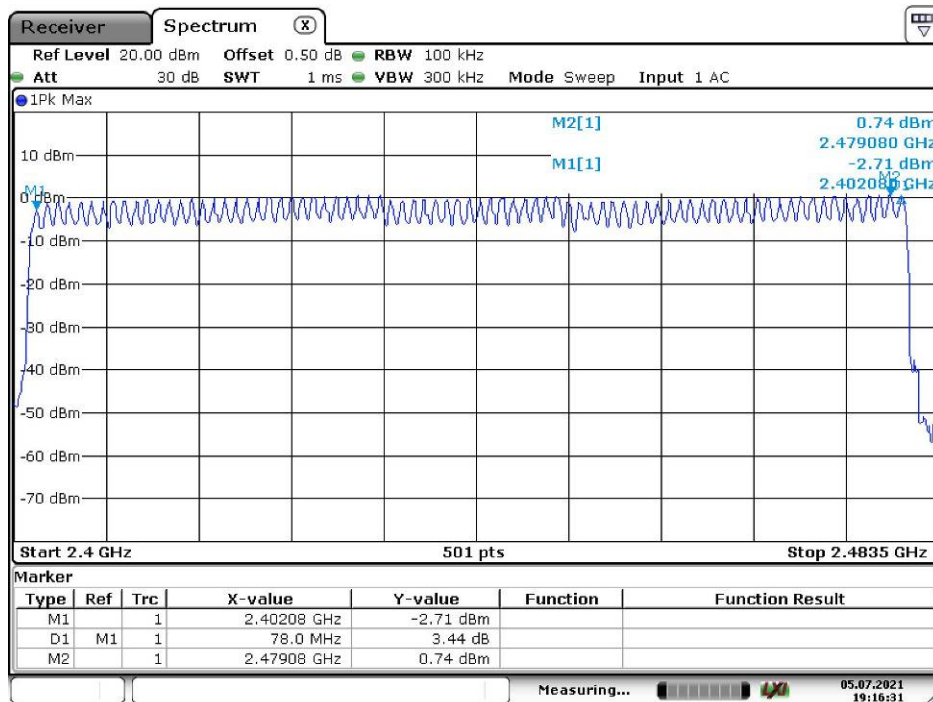EDR Mode ($\pi/4$ -DQPSK)

Date: 5.JUL.2021 19:16:31

EDR Mode (8DPSK)

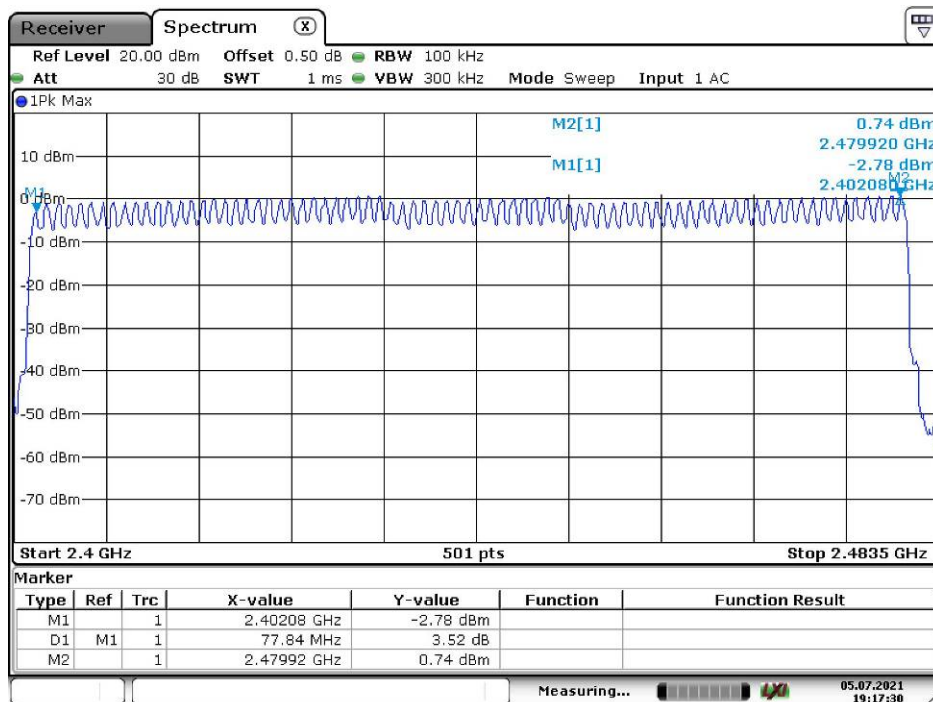

Date: 5.JUL.2021 19:17:31

8 - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Data


Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots.

Mode	Packet type	Channel	Frequency (MHz)	Puse width (ms)	Result (s)	Limit (s)
GFSK	DH1	Middle	2441	0.439	0.140	0.4
	DH3	Middle	2441	1.693	0.271	
	DH5	Middle	2441	2.949	0.315	
$\pi/4$ -DQPSK	2DH1	Middle	2441	0.449	0.144	
	2DH3	Middle	2441	1.715	0.274	
	2DH5	Middle	2441	2.971	0.317	
8DPSK	3DH1	Middle	2441	0.448	0.143	
	3DH3	Middle	2441	1.714	0.274	
	3DH5	Middle	2441	2.97	0.317	
Note: DH1:Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s DH3:Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s DH5:Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s						


BDR Mode (GFSK):

DH1: Middle Channel

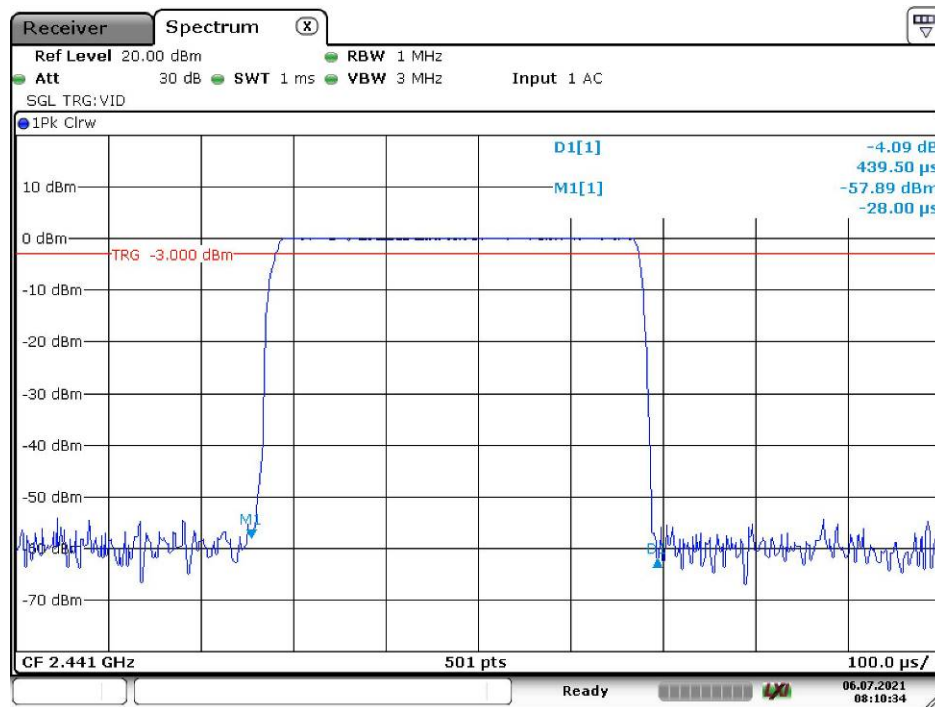


Date: 6.JUL.2021 08:10:35

DH3: Middle Channel

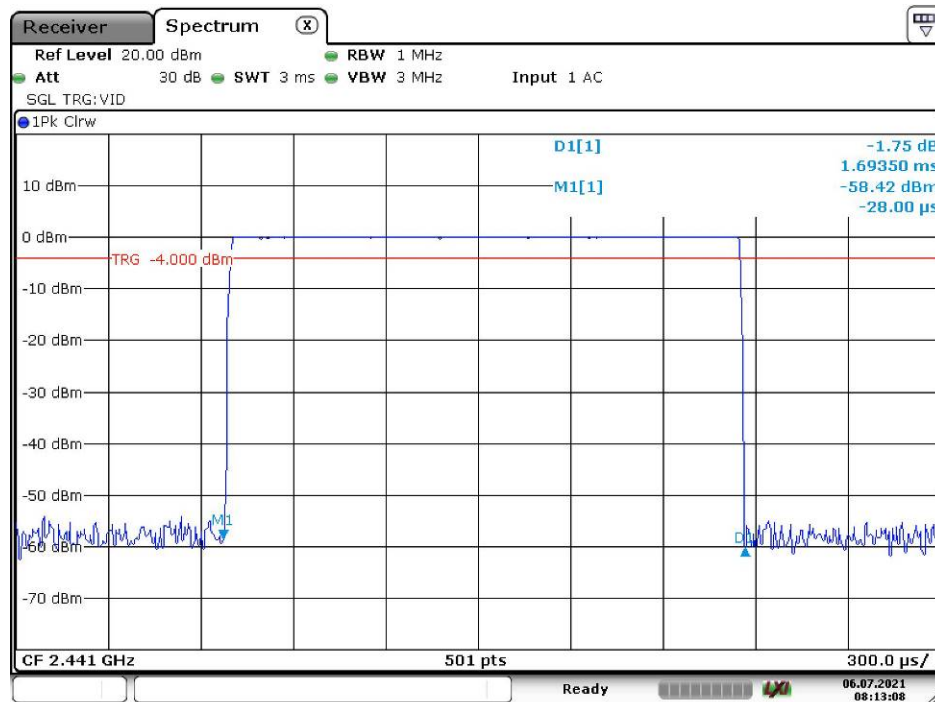

Date: 6.JUL.2021 08:13:08


DH5: Middle Channel

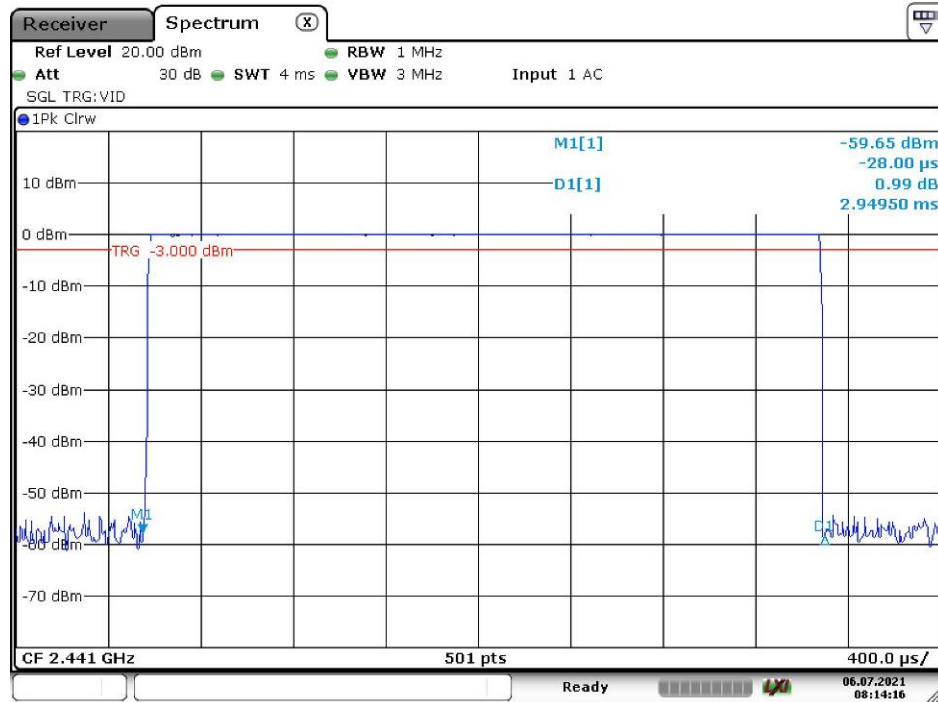

Date: 6.JUL.2021 08:14:16


EDR Mode ($\pi/4$ -DQPSK):

2DH1: Middle Channel

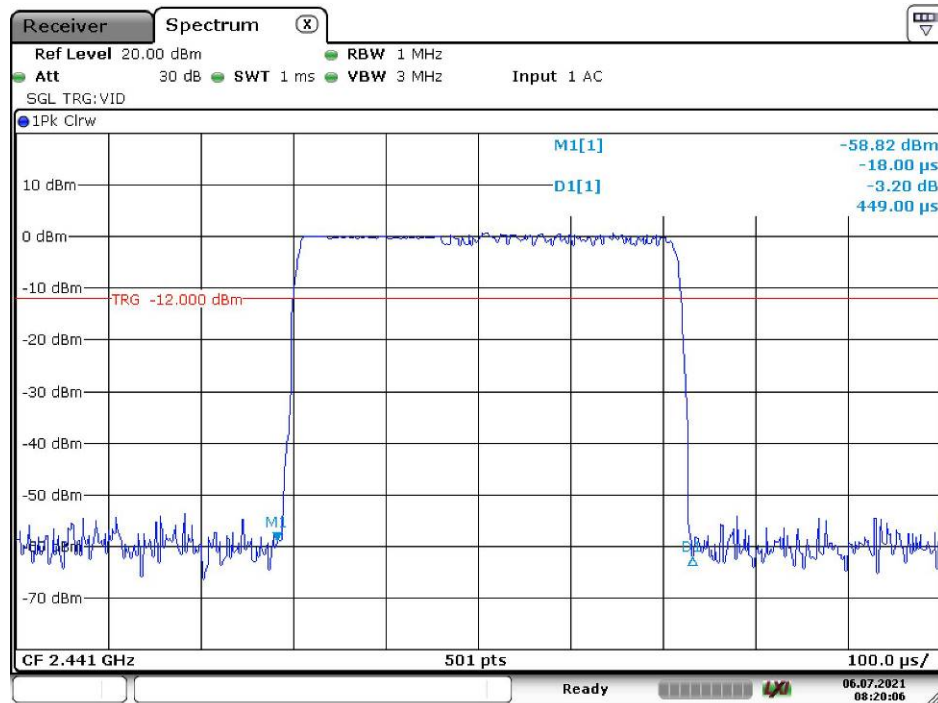


Date: 6.JUL.2021 08:20:07

2DH3: Middle Channel

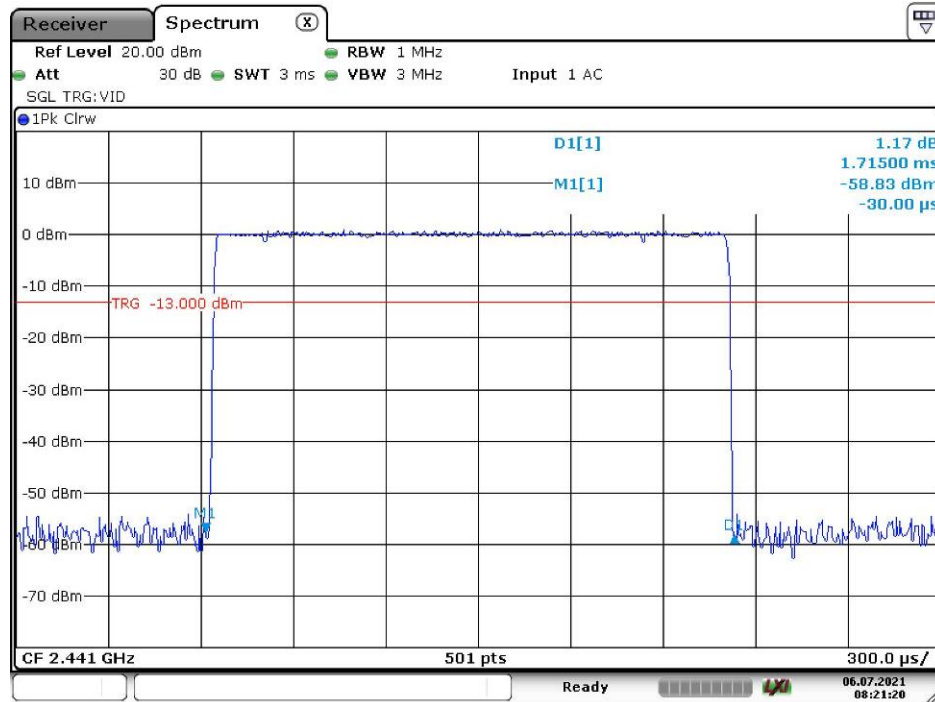

Date: 6.JUL.2021 08:21:20


2DH5: Middle Channel

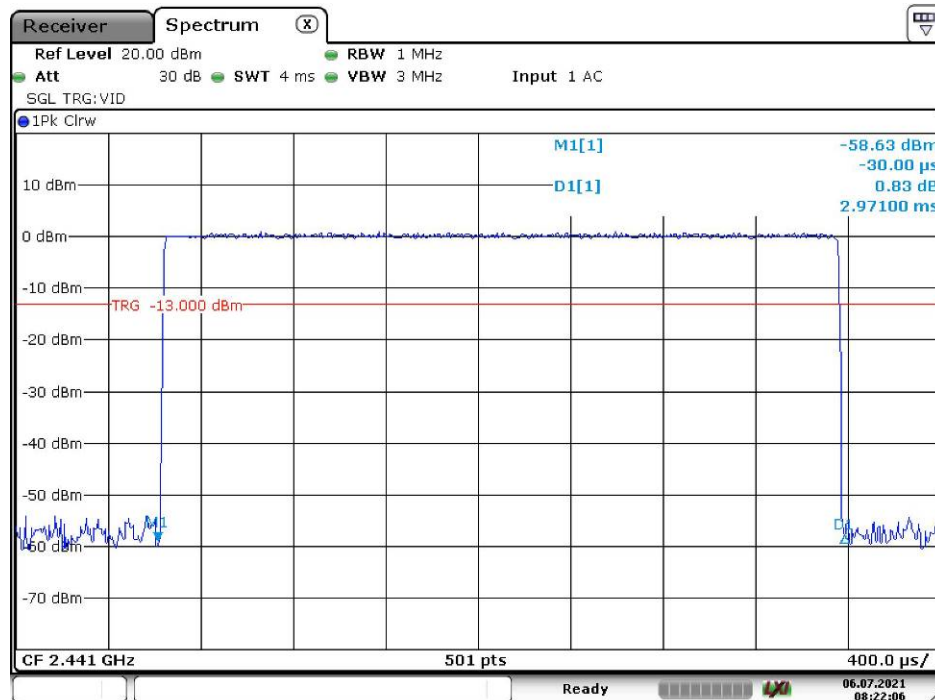

Date: 6.JUL.2021 08:22:07


EDR Mode (8DPSK):

3DH1: Middle Channel

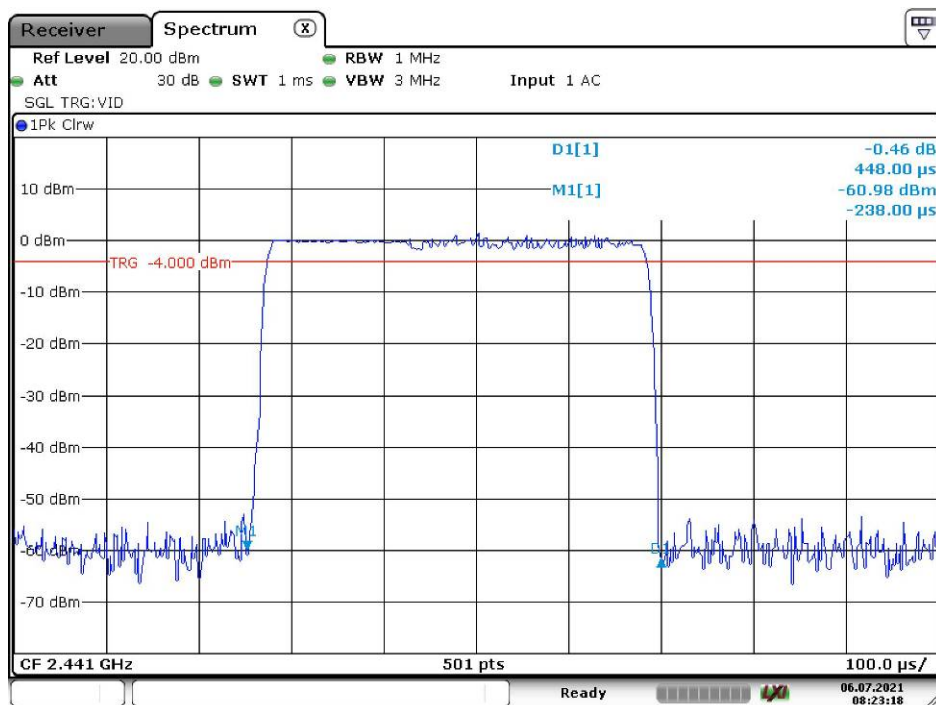


Date: 6.JUL.2021 08:23:19

3DH3: Middle Channel

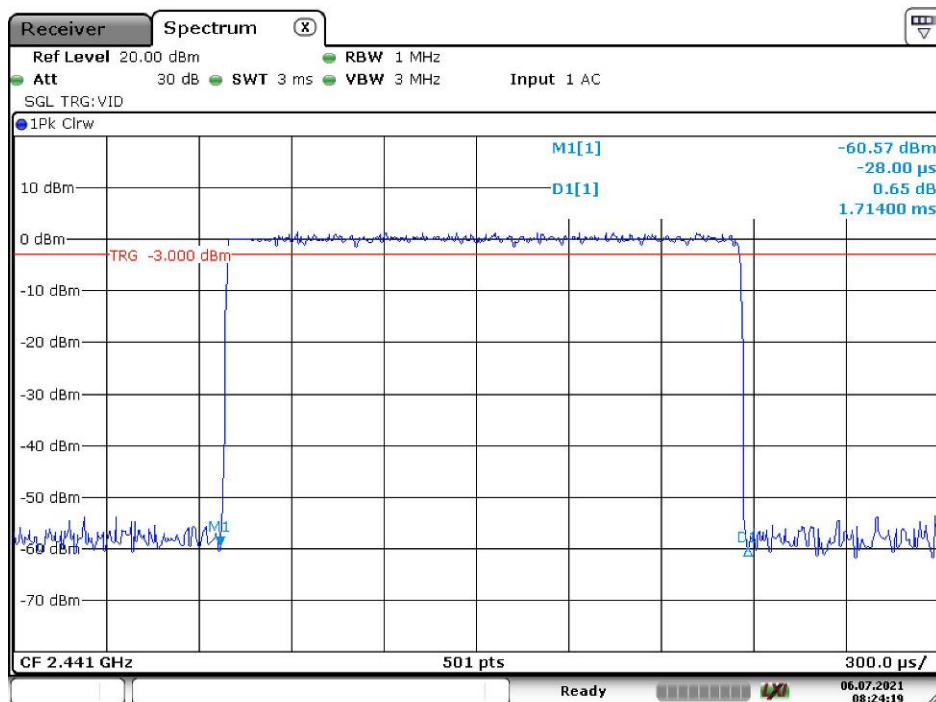

Date: 6.JUL.2021 08:24:20

3DH5: Middle Channel

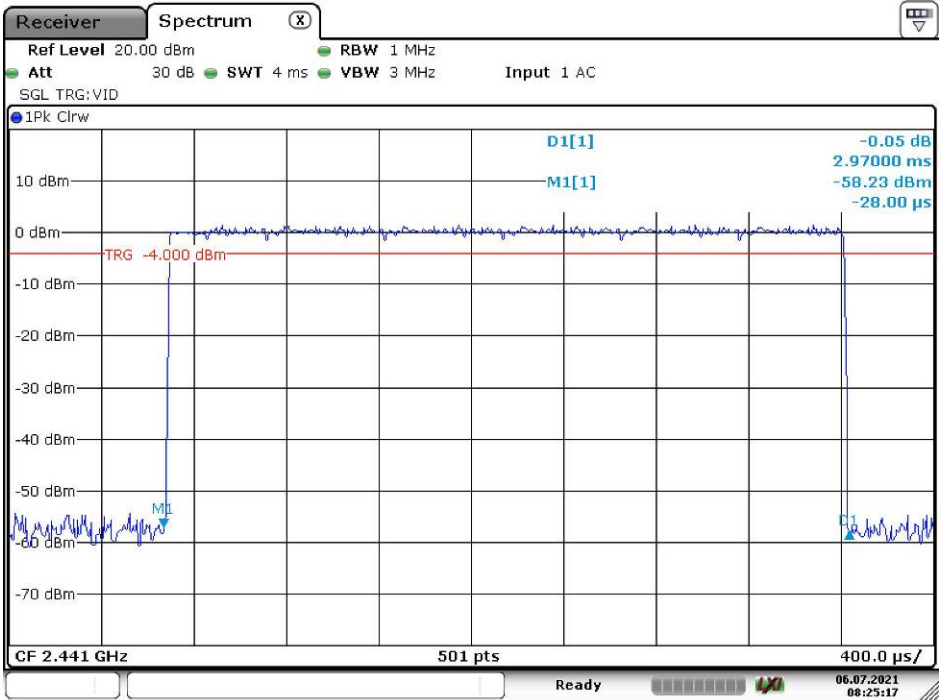

Date: 6.JUL.2021 08:25:18

9 - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots.

Mode	Test Frequency (MHz)	Peak Conducted Output Power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	1.45	21
	2441	1.96	21
	2480	3.56	21
EDR Mode ($\pi/4$ -DQPSK)	2402	-0.78	21
	2441	0.51	21
	2480	1.74	21
EDR Mode (8DPSK)	2402	-1.19	21
	2441	0.51	21
	2480	1.64	21

Note: The data above was tested in conducted mode.

10 - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


Test Data

Test Mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots.

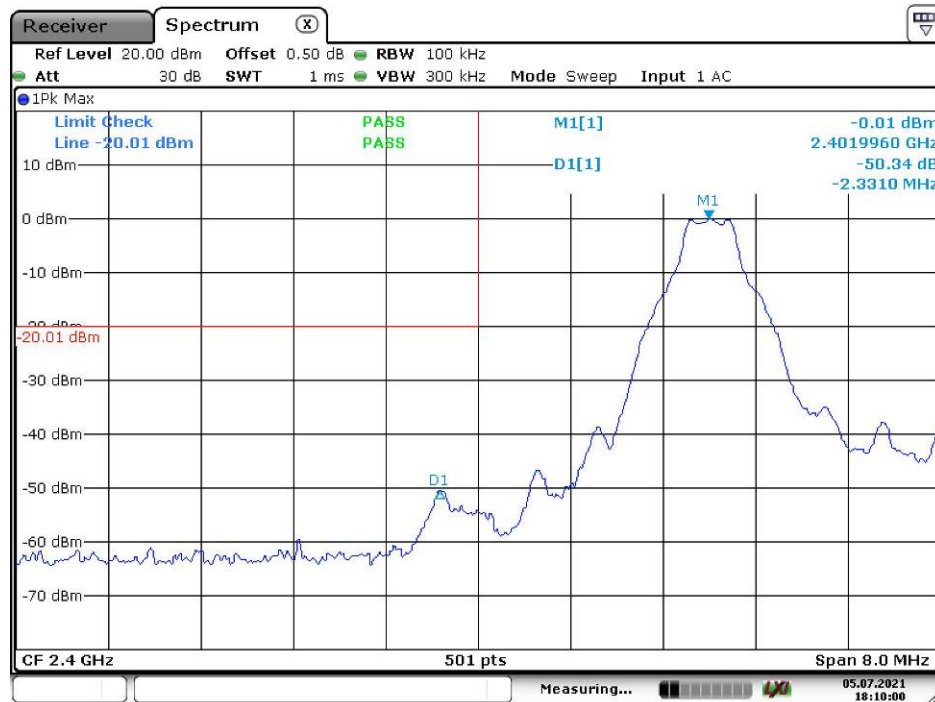Single mode:*BDR Mode (GFSK):***Band Edge, Left Side**


Date: 5.JUL.2021 18:10:00

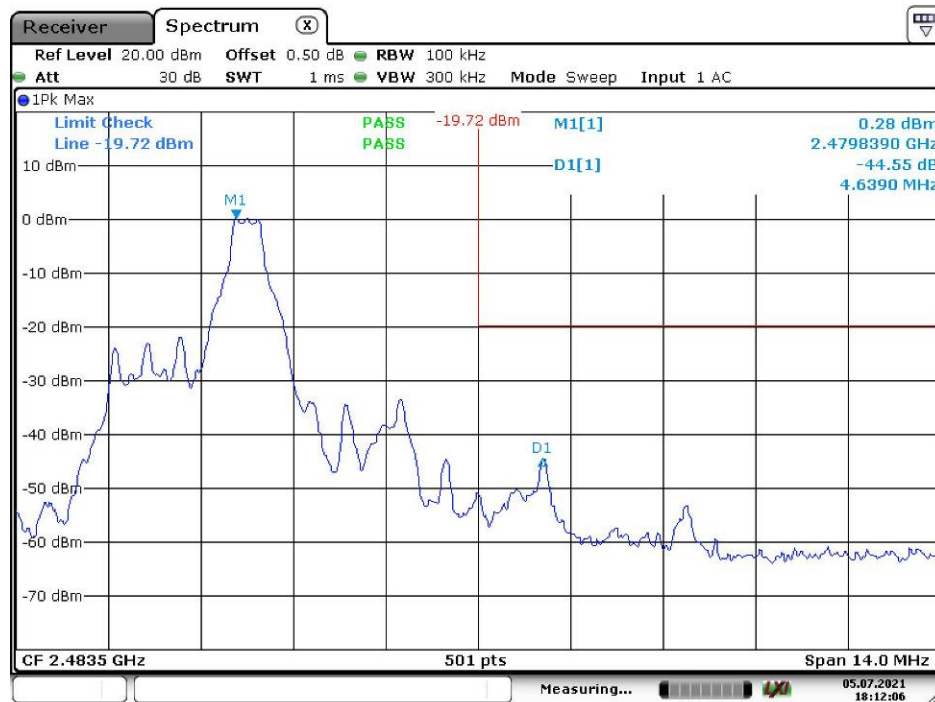Band Edge, Right Side


Date: 5.JUL.2021 18:12:07

EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

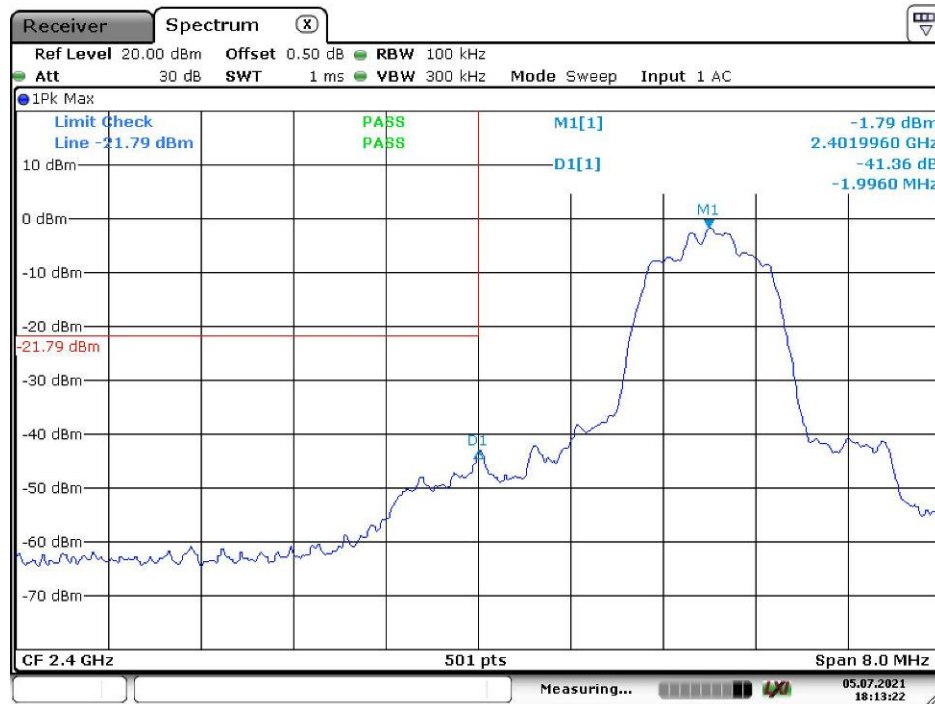


Band Edge, Right Side

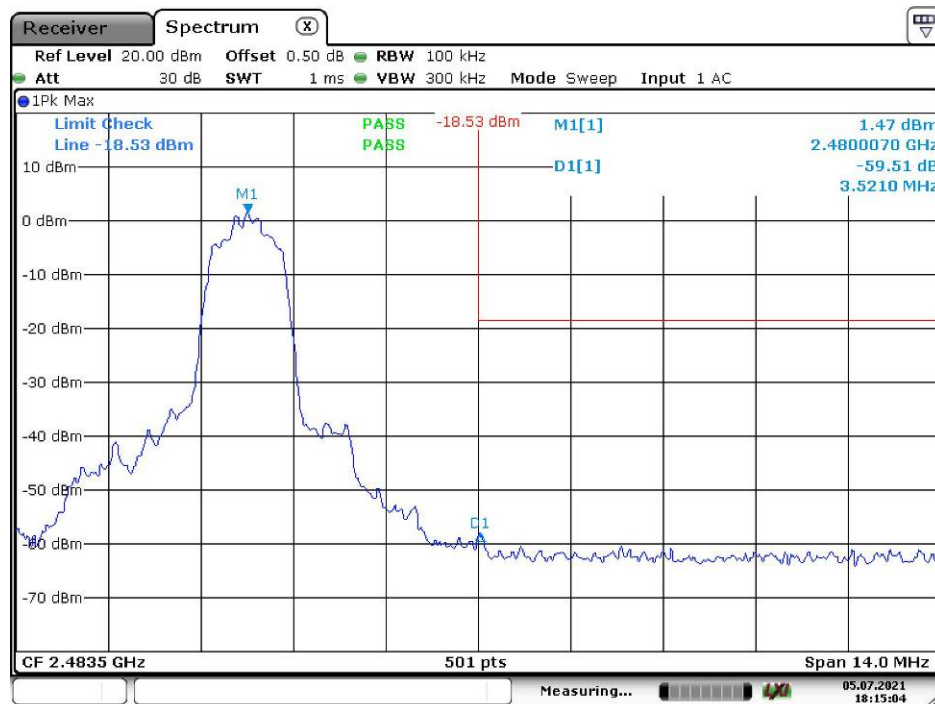


EDR Mode (8DPSK):

Band Edge, Left Side

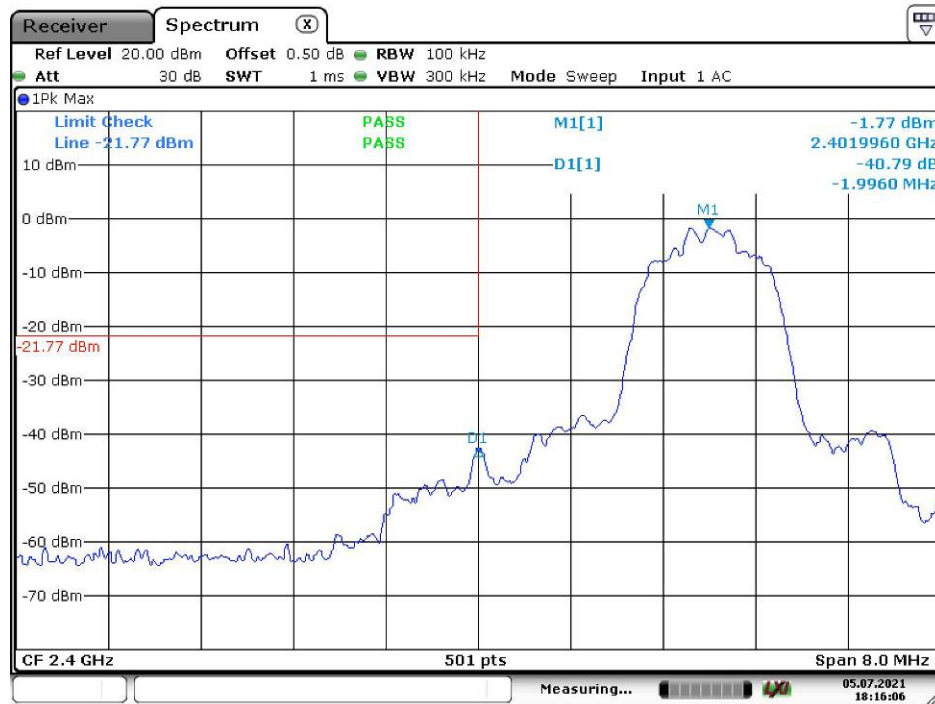

Date: 5.JUL.2021 18:16:07

Band Edge, Right Side

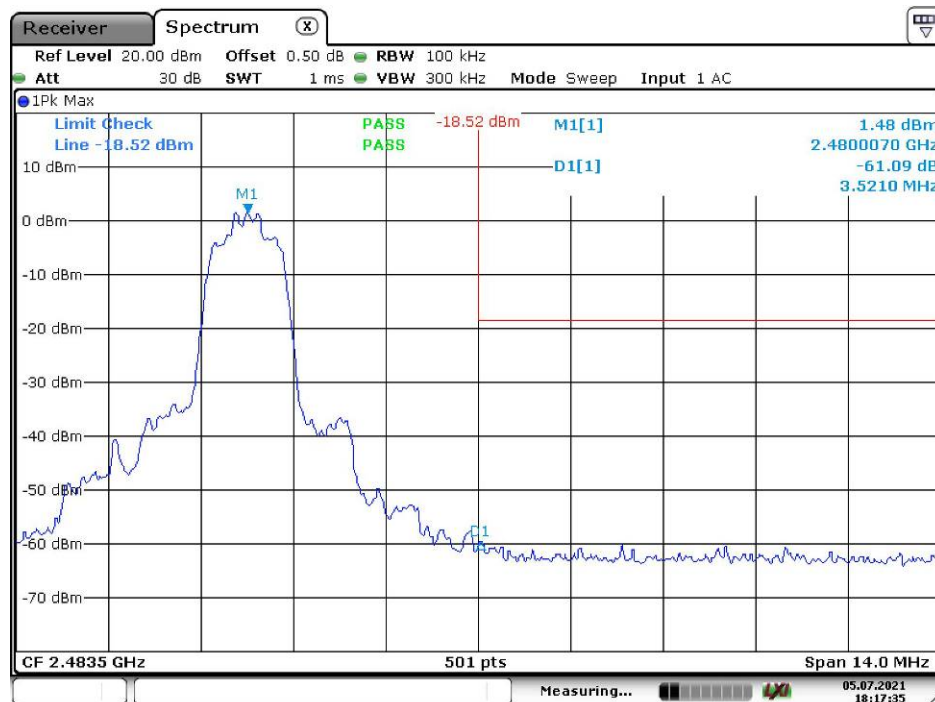

Date: 5.JUL.2021 18:17:36

Hopping Mode,


BDR Mode (GFSK):

Band Edge, Left Side



Date: 5.JUL.2021 19:05:23


Band Edge, Right Side

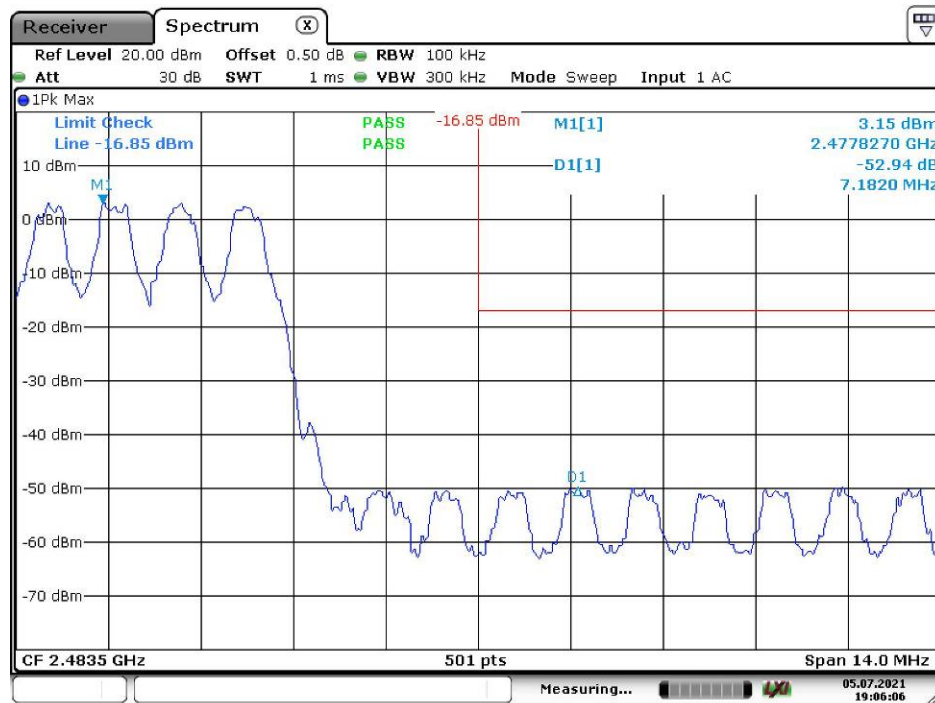

Date: 5.JUL.2021 19:06:07


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

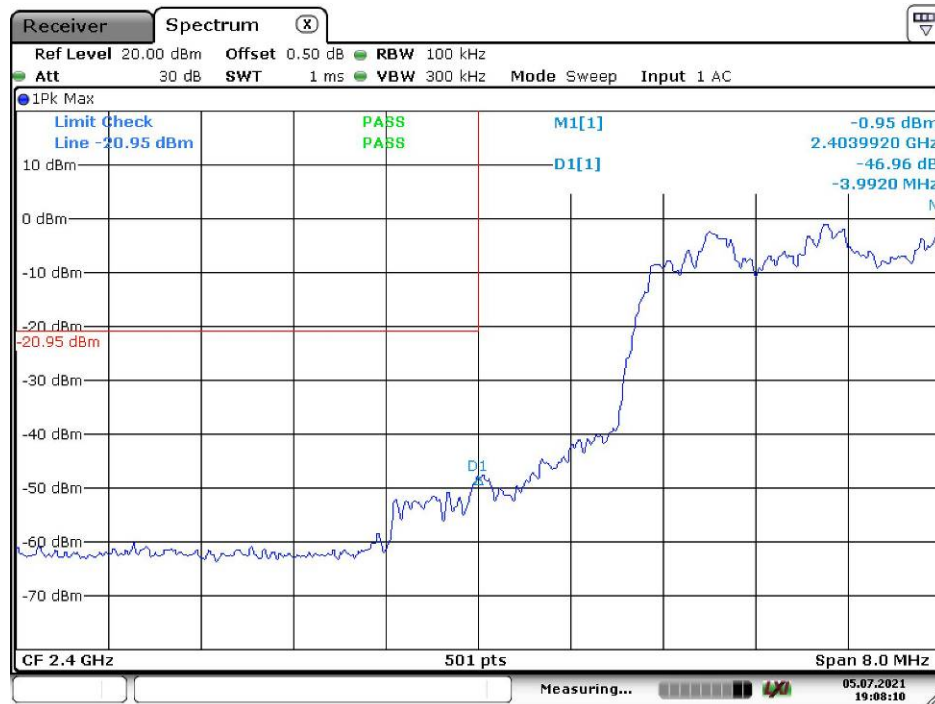

Date: 5.JUL.2021 19:08:11


Band Edge, Right Side

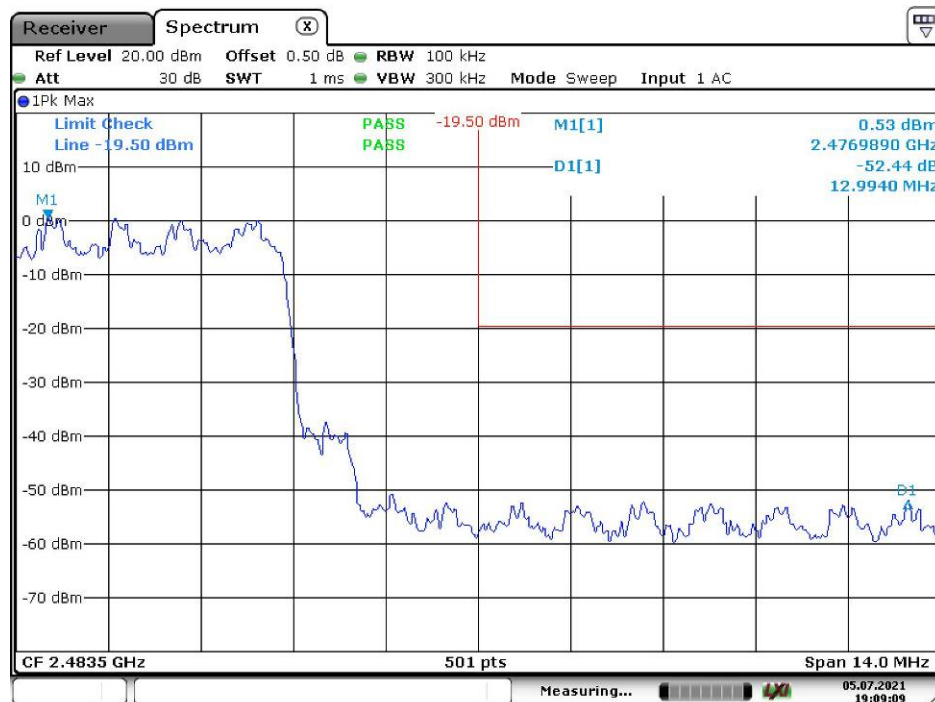

Date: 5.JUL.2021 19:09:10


EDR Mode (8DPSK):

Band Edge, Left Side

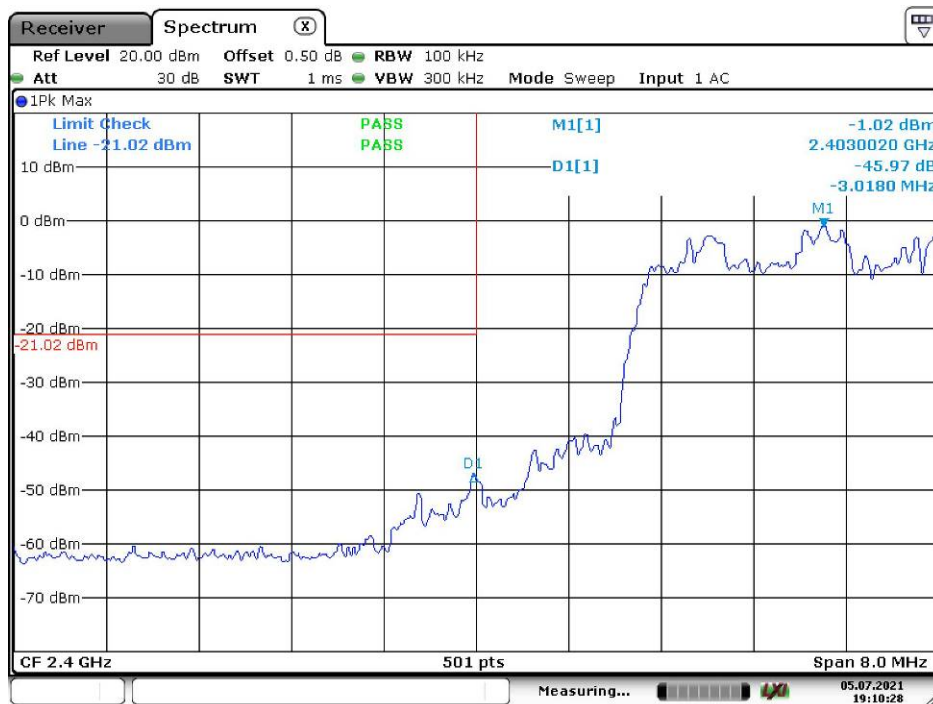

Date: 5.JUL.2021 19:10:28

Band Edge, Right Side

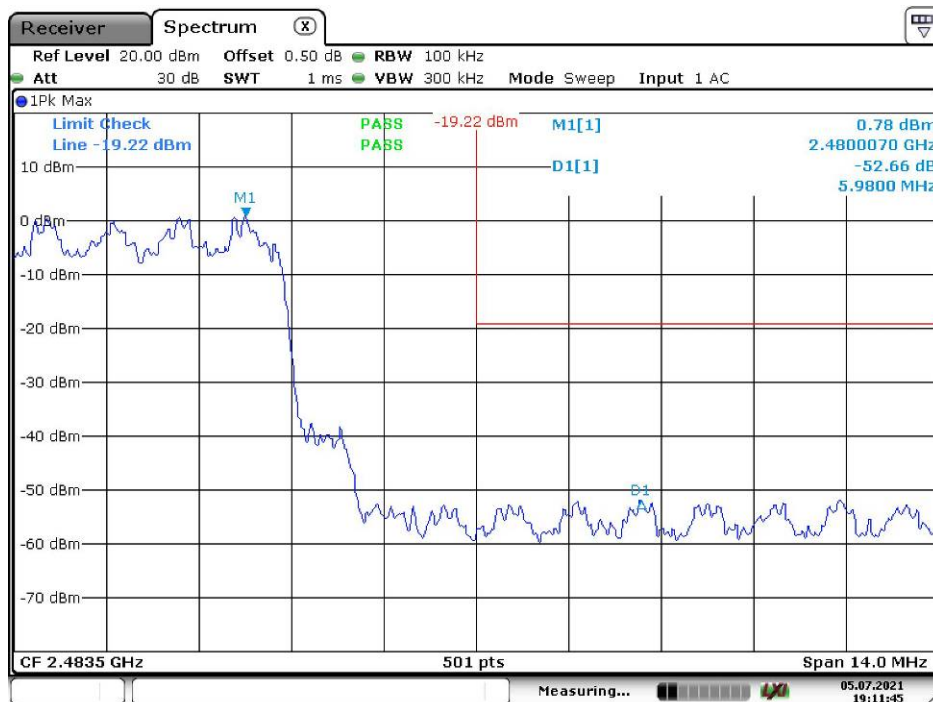

Date: 5.JUL.2021 19:11:46

***** END OF REPORT *****