

FCC PART 15.225


TEST REPORT

For

Vanstone Electronic (Beijing) Co., Ltd.

3F No.2 Building, Aisino corporation park 18A, Xingshikou Road, Haidian District,
Beijing, China 100195

FCC ID: OWLVM30

Report Type: Original Report	Product Type: mPOS
Report Number: SZXX1210422-13210E-00C	
Report Date: 2021-05-26	
Reviewed By: RF Engineer	Jacob Kong 
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC§15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTED CONSTRUCTION	9
FCC §15.207 – AC LINE CONDUCTED EMISSION	10
APPLICABLE STANDARD	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	11
CORRECTED FACTOR & MARGIN CALCULATION	11
TEST DATA	11
FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST DATA	15
FCC§15.225(E) - FREQUENCY STABILITY.....	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST DATA	19
FCC§15.215(C) - 20DB EMISSION BANDWIDTH	20
REQUIREMENT	20
TEST PROCEDURE	20
TEST DATA	20

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	mPOS
Tested Model	VM30
Frequency Range	13.56 MHz
Modulation Technique	ASK
Voltage Range	DC 3.7V From Battery
Date of Test	2021-05-05 to 2021-05-22
Sample serial number	SZXX1210422-13210E-RF-S_3K1 (Assigned by BACL, Shenzhen)
Received date	2021-04-22
Sample/EUT Status	Good condition

Objective

This Type approval report is in accordance with Part 2- Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules, section 15.203, 15.205, 15.207, 15.209 and 15.225.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
AC Power Lines Conducted Emissions		±1.95dB
Radiated Emissions	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) ,6F,7F,the 3rd Phase of Wan Li Industrial Building D,Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

No Exercise Software was used.

Equipment Modifications

No modification on the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
ZTE	Adapter	STC-A51A	N/A
Unknown	Visa card	Unknown	Unknown

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

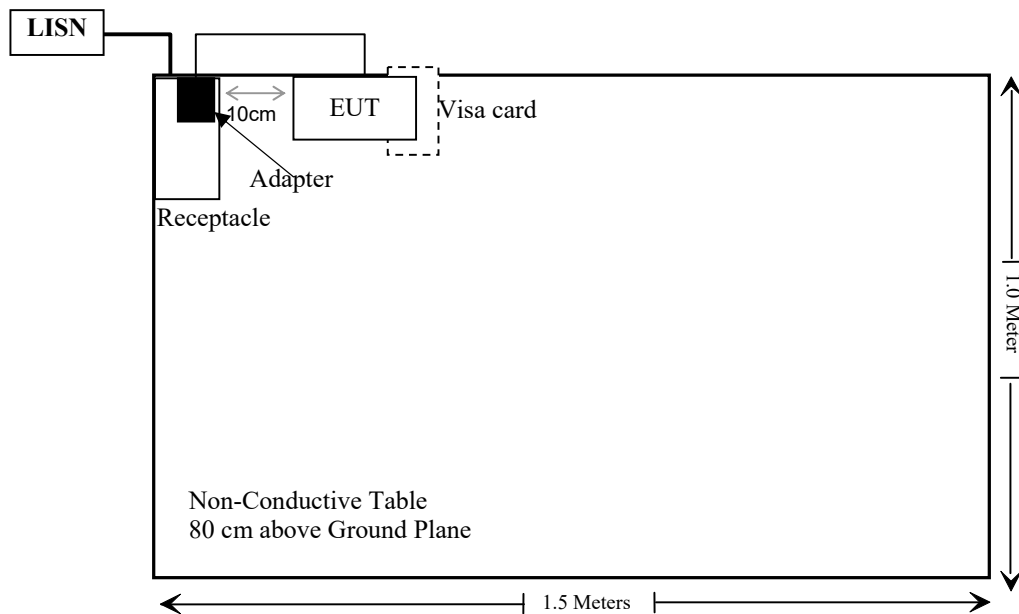

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207	AC Line Conducted Emission	Compliance
§15.225 §15.209 §15.205	Radiated Emission Test	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	20dB Emission Bandwidth	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/08/04	2021/08/03
Rohde & Schwarz	LISN	ENV216	101613	2020/08/04	2021/08/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2020/11/29	2021/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2020/11/29	2021/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2020/12/22	2023/12/21
ETS	Passive Loop Antenna	6512	29604	2018/07/14	2021/07/13
Unknown	Cable 2	RF Cable 2	F-03-EM197	2020/11/29	2021/11/28
Unknown	Cable	Chamber Cable 4	EC-007	2020/11/29	2021/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
CHIGO	Temperature & Humidity Meter	HTC-1S	T-03-EM451	2021/04/07	2022/04/06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connected Construction

The EUT has one internal antenna arrangement for NFC which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 – AC LINE CONDUCTED EMISSION

Applicable Standard

FCC§15.207

EUT Setup

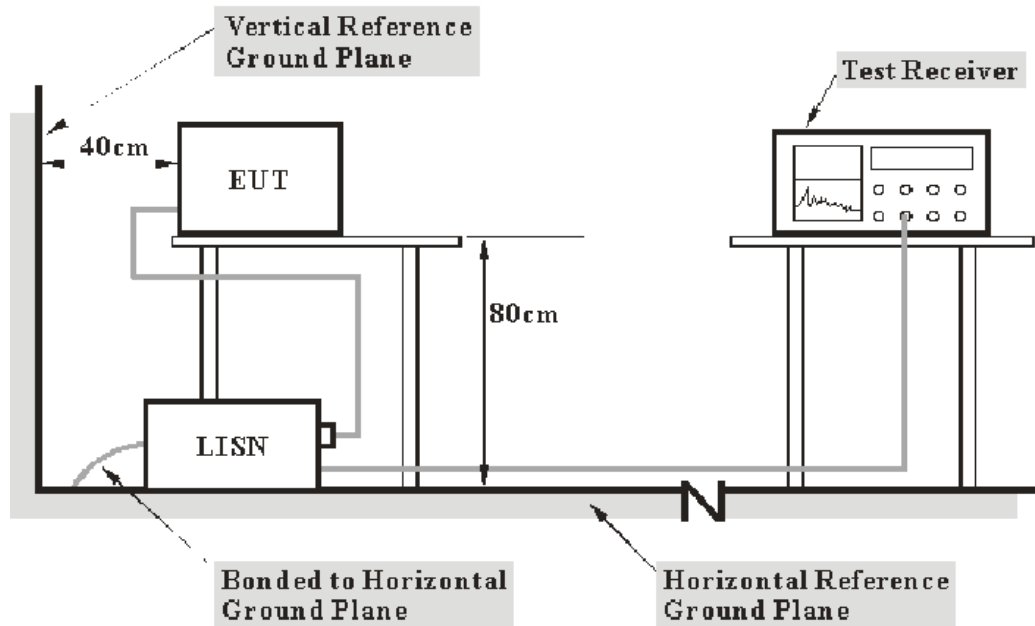

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter of Host was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2021-05-05.


Test mode: Transmitting

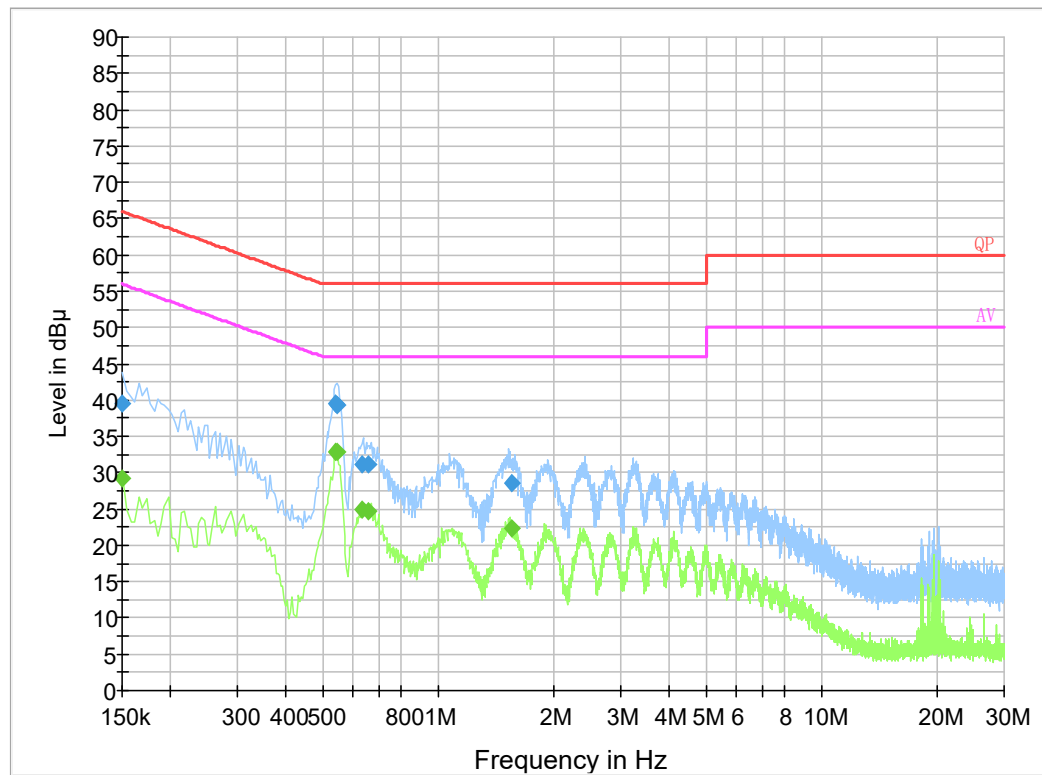AC 120 V/60 Hz, Line:**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	39.5	9.000	L1	19.8	26.5	66.0
0.542010	39.4	9.000	L1	19.8	16.6	56.0
0.545810	39.4	9.000	L1	19.8	16.6	56.0
0.636430	31.2	9.000	L1	19.8	24.8	56.0
0.659950	31.1	9.000	L1	19.8	24.9	56.0
1.554990	28.6	9.000	L1	19.8	27.4	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	29.1	9.000	L1	19.8	26.9	56.0
0.542010	32.8	9.000	L1	19.8	13.2	46.0
0.545810	32.9	9.000	L1	19.8	13.1	46.0
0.636430	24.9	9.000	L1	19.8	21.1	46.0
0.659950	24.8	9.000	L1	19.8	21.2	46.0
1.554990	22.4	9.000	L1	19.8	23.6	46.0

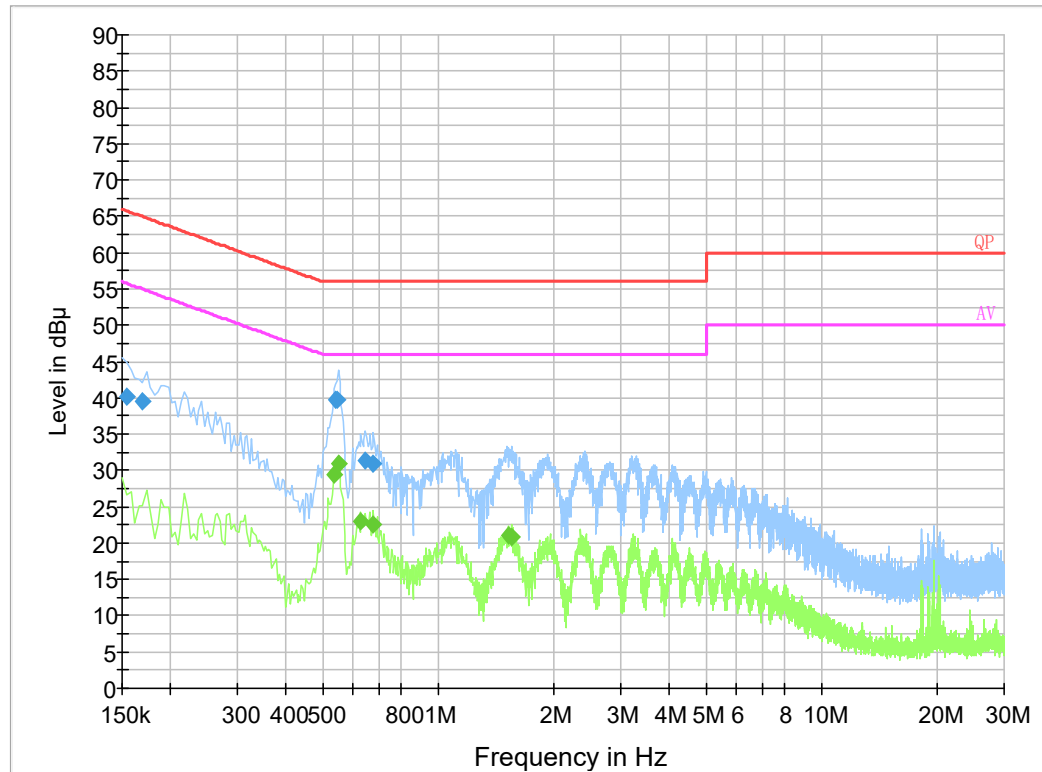AC 120V/ 60 Hz, Neutral:**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154000	40.2	9.000	N	19.8	25.6	65.8
0.169500	39.6	9.000	N	19.8	25.4	65.0
0.541990	39.7	9.000	N	19.8	16.3	56.0
0.545750	39.8	9.000	N	19.8	16.2	56.0
0.648310	31.5	9.000	N	19.8	24.5	56.0
0.675830	30.8	9.000	N	19.8	25.2	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.534000	29.5	9.000	N	19.8	16.5	46.0
0.550000	30.9	9.000	N	19.8	15.1	46.0
0.630000	23.0	9.000	N	19.8	23.0	46.0
0.678000	22.5	9.000	N	19.8	23.5	46.0
1.522000	21.1	9.000	N	19.8	24.9	46.0
1.554000	20.8	9.000	N	19.8	25.2	46.0


FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST

Applicable Standard

As per FCC Part 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

EUT Setup

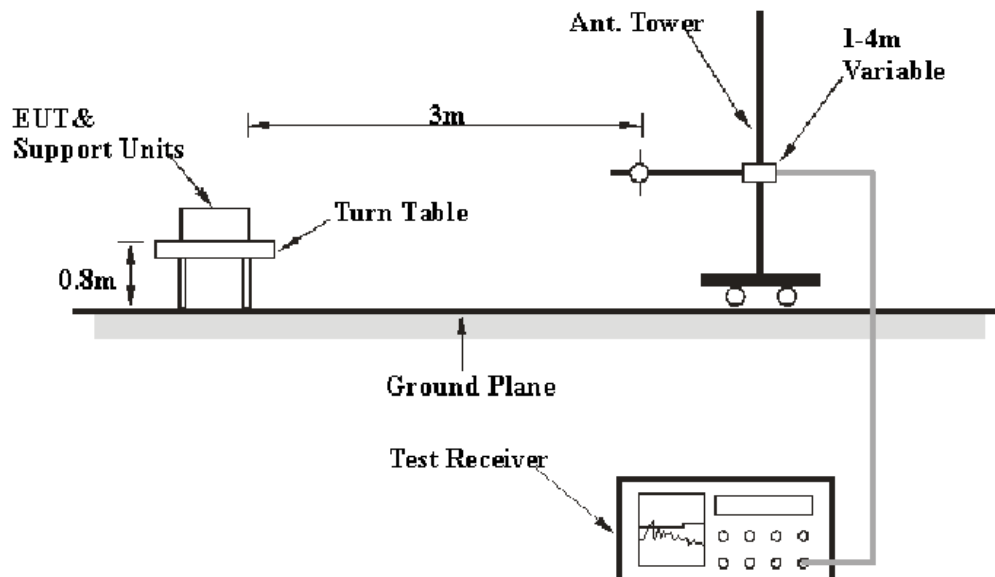

Note: Antenna is set up at 1m during test for below 30MHz.

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part Subpart C limits.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	300 Hz	1 kHz	/	QP
150 kHz – 30 MHz	10 kHz	30 kHz	/	QP
30 MHz – 1000 MHz	100 kHz	300 kHz	/	QP

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Corrected Factor} &= \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} \\ \text{Corrected Amplitude} &= \text{Meter Reading} + \text{Corrected Factor}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	52%
ATM Pressure:	101.0 kPa


The testing was performed by Zero Yan from 2021-05-07 to 2021-05-22.

Test mode: Transmitting


1) Spurious Emissions (9 kHz~30 MHz):

Freq. (MHz)	Corrected Amplitude (dBμV/m) @3m	Table Angle Degree	Antenna Height (m)	Detector	Correction Factor			FCC part 15.225	
					Ant. Factor (dB)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Limit (dBμV/m) @3m	Result
0.0091	74.45	0	1	PK	88.6	0.2	30.2	128.42	Pass
0.172	59.58	0	1	PK	62.3	0.3	30.2	102.89	Pass


9 kHz~150 kHz

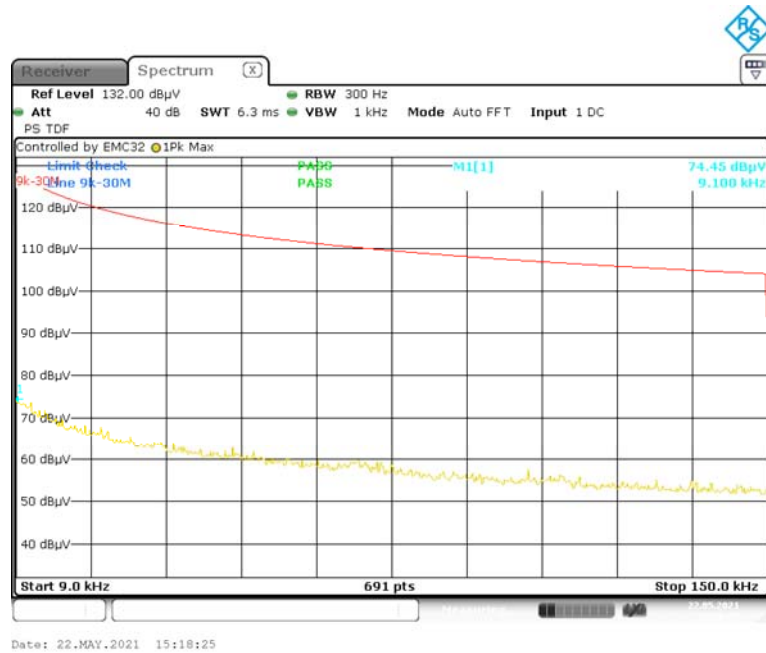

150 kHz~30 MHz

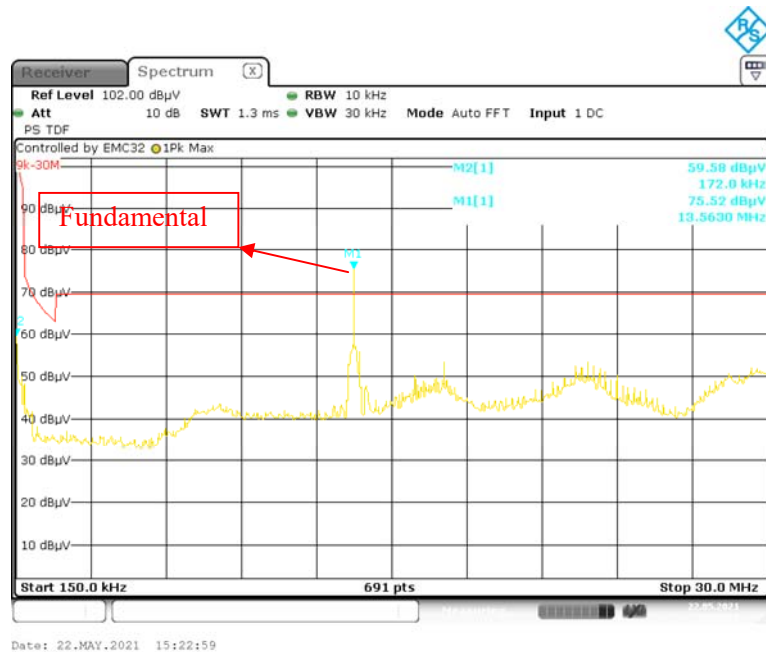

2) Spurious Emissions (30 MHz~1GHz):

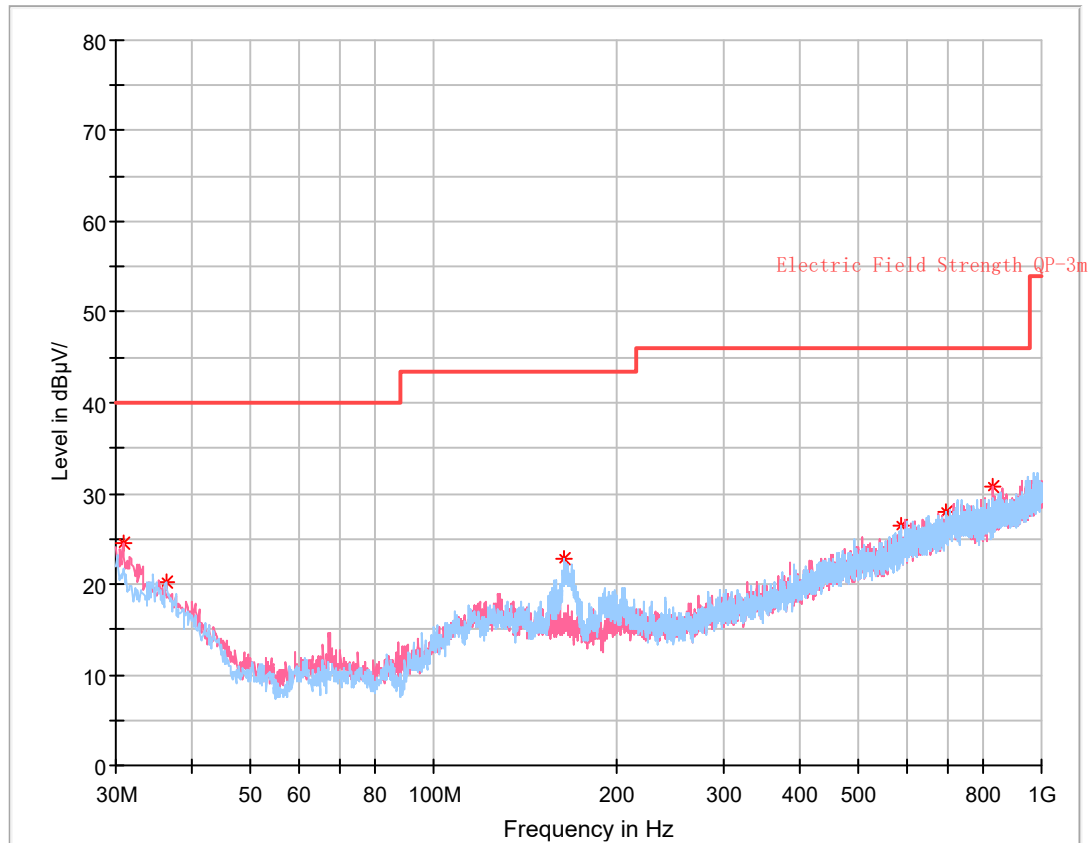**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.848750	24.45	40.00	15.55	300.0	V	174.0	-4.2
36.305000	20.13	40.00	19.87	300.0	H	233.0	-8.1
164.102500	22.81	43.50	20.69	300.0	H	89.0	-12.0
585.931250	26.45	46.00	19.55	400.0	H	26.0	-3.5
698.451250	28.05	46.00	17.95	200.0	H	201.0	-1.5
830.856250	30.76	46.00	15.24	100.0	V	0.0	-0.1


Note:

- 1) Correction Factor = Antenna factor (Rx) + Cable Loss – Amplifier factor
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

3) Emission Mask & Fundamental:

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Table Angle Degree	Antenna Height (m)	Detector	Correction Factor			FCC Part 15.225	
					Ant. Factor (dB)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Limit (dBμV/m) @3m	Result
13.56	75.76	0	1	QP	32.3	0.2	30.2	124	Pass

Emission Mask

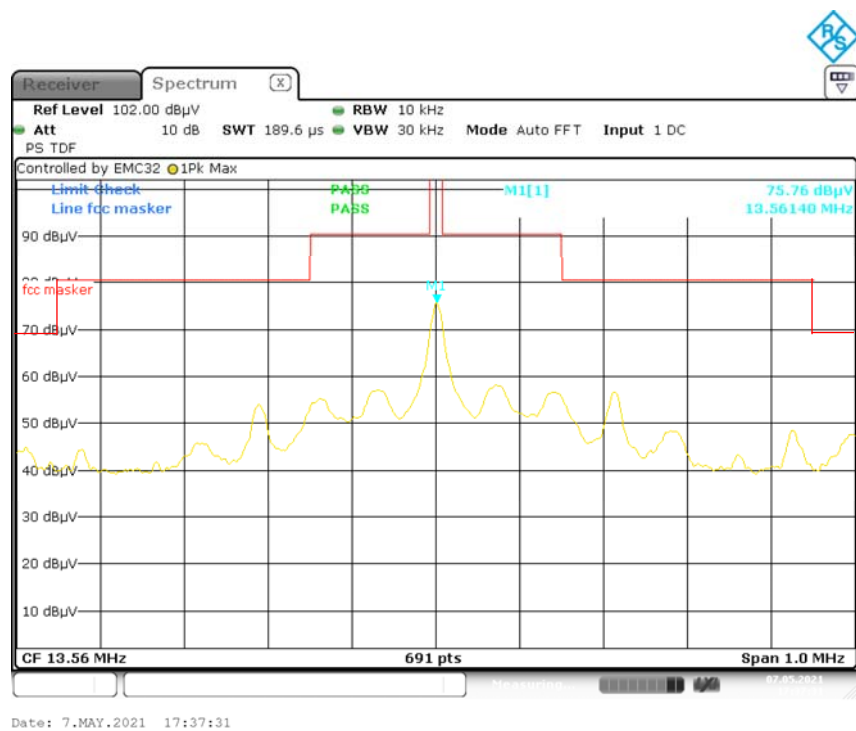

FCC§15.225(e) - FREQUENCY STABILITY

Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and inductive antenna was connected to a Spectrum Analyzer. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Zero Yan from 2021-05-07 to 2021-05-22.

Test Mode: Transmitting

Test Result: Pass

Voltage Supply (V _{AC})	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (%)	Limit (%)
3.7	-20	13.560755	0.00557	± 0.01
	-10	13.560848	0.00626	± 0.01
	0	13.560953	0.00703	± 0.01
	10	13.560948	0.00699	± 0.01
	20	13.561036	0.00764	± 0.01
	30	13.561105	0.00815	± 0.01
	40	13.561085	0.00800	± 0.01
	50	13.561131	0.00834	± 0.01
3.6	20	13.561180	0.00870	± 0.01
4.2	20	13.561215	0.00896	± 0.01

FCC§15.215(c) - 20dB EMISSION BANDWIDTH**Requirement**

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Procedure

Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by Zero Yan on 2021-05-07.

Test Mode: Transmitting

Test Result: Pass

Test Frequency (MHz)	20dB Bandwidth (kHz)
13.56	1.829

20 dB Emission Bandwidth

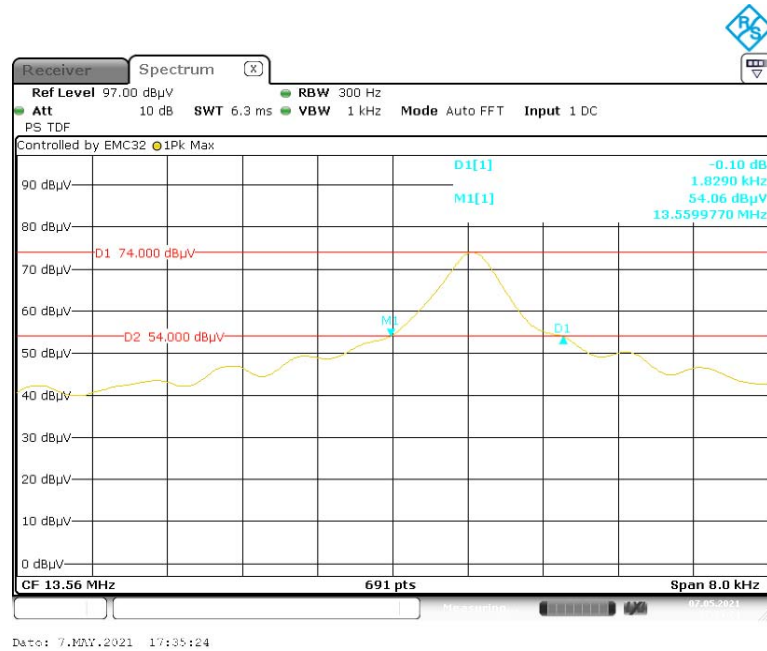

***** END OF REPORT *****