

EMC TEST REPORT

FCC 47 CFR Part 15B
Industry Canada RSS-Gen

Electromagnetic compatibility - Unintentional radiators

Report Reference No. : G0M-1406-3914-EF0115B-V02

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A

Applicant's name : Leica Geosystems AG

Address : Heinrich Wild Strasse
9435 Heerbrugg
SWITZERLAND

Test specification:

Standard..... : 47 CFR Part 15 Subpart B
RSS-Gen, Issue 4, 2014-11
ANSI C63.4:2009

Equipment under test (EUT):

Product description	Long Range Bluetooth remote control	
Model No.	CTR20	
Additional Models	None	
Hardware version	V5.0	
Firmware / Software version	V4.7	
IDs	FCC-ID: RFD-CTR20	IC: 3177A-CTR20
Test result	Passed	

Test Report No.: G0M-1406-3914-EF0115B-V02

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Possible test case verdicts:

- not applicable to test object : N/A
- test object does meet the requirement : P (Pass)
- test object does not meet the requirement : F (Fail)

Testing:

Date of receipt of test item : 2015-02-23

Date (s) of performance of tests : 2015-03-02 – 2015-03-03

Compiled by : Marcus Klein

Tested by (+ signature) : Marcus Klein / Marco Belz

Approved by (+ signature) : Jens Marquardt

Date of issue : 2015-04-29

Total number of pages : 28


General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
V01	2015-03-27	Initial Release	
V02	2015-04-29	Canada standard corrected.	M. Klein

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	8
1.3	Photos – Test setup	9
1.4	Supporting Equipment Used During Testing	10
1.5	Input / Output Ports	10
1.6	Operating Modes and Configurations	11
1.7	Test Equipment Used During Testing	12
1.8	Sample emission level calculation	13
2	RESULT SUMMARY	14
3	TEST CONDITIONS AND RESULTS	15
3.1	Test Conditions and Results – Radiated emissions	15
3.2	Test Conditions and Results – AC power line conducted emissions	25

1 Equipment (Test item) Description

Description	Long Range Bluetooth remote control	
Model	CTR20	
Additional Models	None	
Serial number	None	
Hardware version	V5.0	
Software / Firmware version	V4.7	
FCC-ID	RFD-CTR20	
IC-ID	3177A-CTR20	
Power supply	4.75 VDC	
Radio module	Type	BT Module
	Model	cB-OBS433x-A1
	Manufacturer	ConnectBlue
	HW Version	V2
	SW Version	4.7
	FCC-ID	PVH0939
	IC	5325A-0939
Manufacturer	Leica Geosystems AG Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND	
Highest emission frequency	Fmax = 2.48 GHz	
Device classification	Class B	
Equipment type	Tabletop	
Number of tested samples	1	

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Handheld	Leica Geosystems AG	CS20	
AE	VIVA PinPoint R30	Leica Geosystems AG	T15	
AE	Power Supply	XP Power	AEL40US15	

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments
1	AC Mains	AC	>3m	No	AC Power Port of CS20

***Note:** Use the following abbreviations:

AC : AC power port

DC : DC power port

N/E : Non electrical

I/O : Signal input or output port

TP : Telecommunication port

1.6 Operating Modes and Configurations

Mode #	Description
1	Bluetooth link to measurement unit T15

Configuration #	EUT Configuration
1	Equipped inside of CS20 with external antenna

1.7 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

Radiated emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU26	EF00887	2015-01	2016-01

Conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
AMN	R&S	ESH3-Z5	EF00036	2014-12	2016-12
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 RSS-Gen 6.13	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 RSS-Gen 8.8	AC power line conducted emissions	ANSI C63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / IC RSS-Gen					Verdict: PASS		
Laboratory Parameters:		Required prior to the test			During the test		
Ambient Temperature		15 to 35 °C			23°C		
Relative Humidity		30 to 60 %			32%		
Test according referenced standards		Reference Method					
		ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class		Equipment class					
		Class B					
Test frequency range determined from highest emission frequency		Highest emission frequency					
		Fmax = 2.48 GHz					
Fully configured sample scanned over the following frequency range		Frequency range					
		30 MHz to 15 GHz					
Operating mode configuration		1					
Limits and results Class B							
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result	
30 – 88	40	PASS	-		-	-	
88 – 216	43.5	PASS	-		-	-	
216 – 960	46	PASS	-		-	-	
960 – 1000	54	PASS	-		-	-	
> 1000	-	-	54	PASS	74	PASS	
Comments:							

Test Procedure:

The test site is in accordance with ANSI C63-4:2009 requirements and is listed by FCC.

The measurement procedure is as follows:


- 1) The EUT was placed on a 0.8 m non conductive table at a 3 m distance from the receive antenna (ANSI C63.4: 2009 item 6.2)
- 2) The antenna output was connected to the measurement receiver
- 3) A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- 4) Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3914

Manufacturer: Leica Geosystems AG
 EUT Name: CTR20
 Model: 1875059
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 23°C, Unom: internal Battery
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3m
 Mode: Bluetooth Link with camera
 Test Date: 2015-03-02
 Note:

Index 2

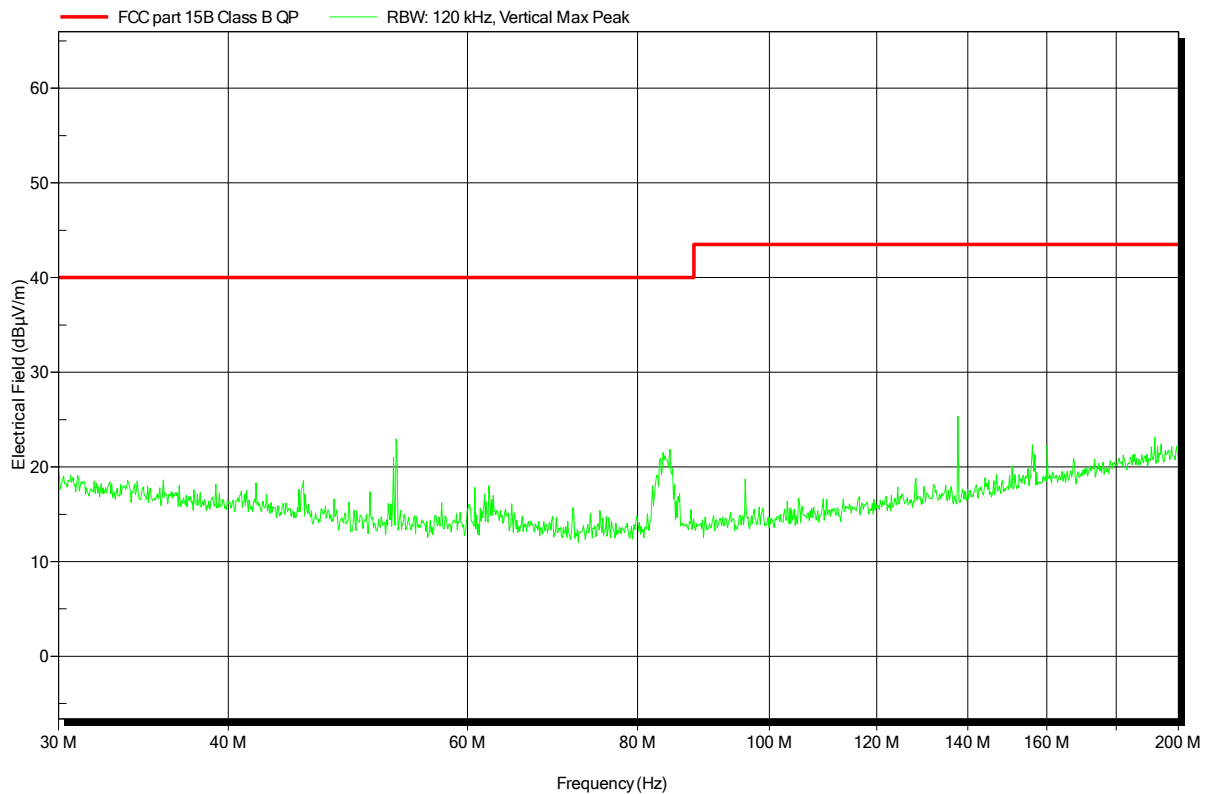

Test Report No.: G0M-1406-3914-EF0115B-V02


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3914

Manufacturer: Leica Geosystems AG
 EUT Name: CTR20
 Model: 1875059
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 23°C, Unom: internal Battery
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3m
 Mode: Bluetooth Link with camera
 Test Date: 2015-03-02
 Note:

Index 3

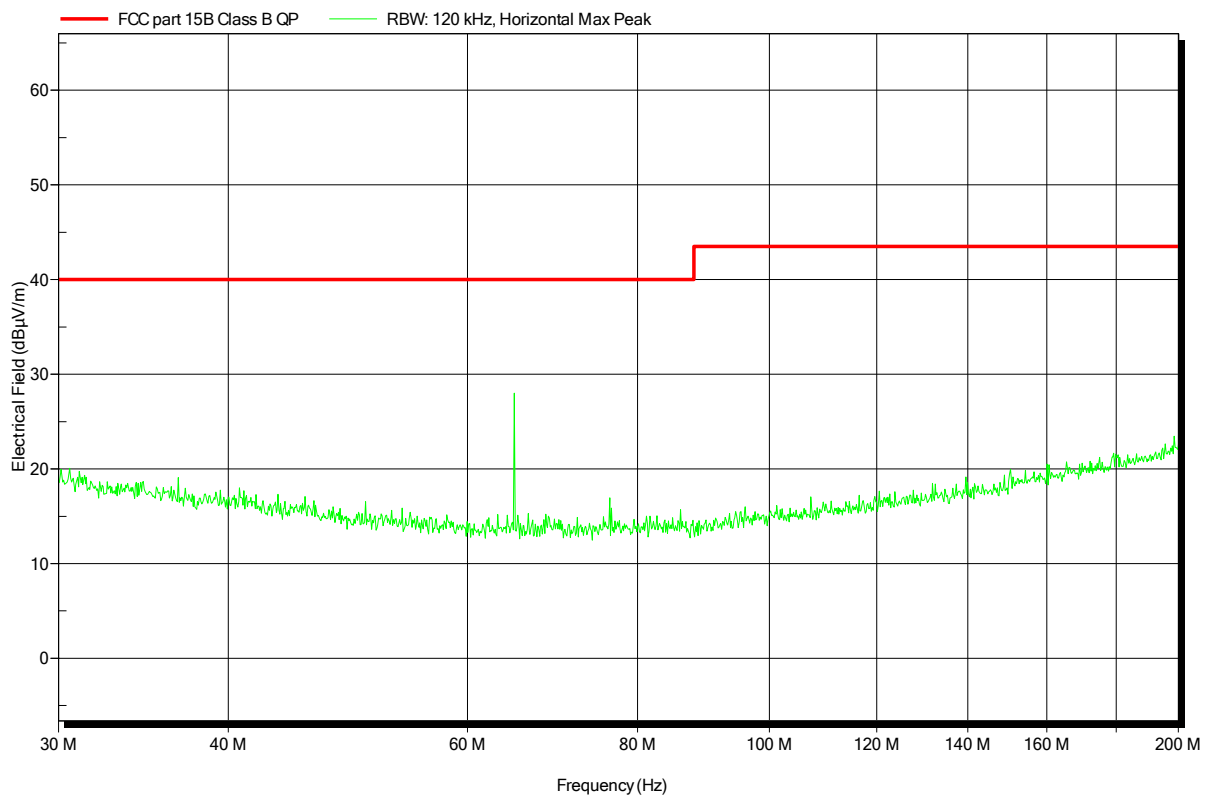

Test Report No.: G0M-1406-3914-EF0115B-V02


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3914

Manufacturer: Leica Geosystems AG
 EUT Name: CTR20
 Model: 1875059
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 23°C, Unom: internal Battery
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m
 Mode: Bluetooth Link with camera
 Test Date: 2015-03-02
 Note:

Index 4

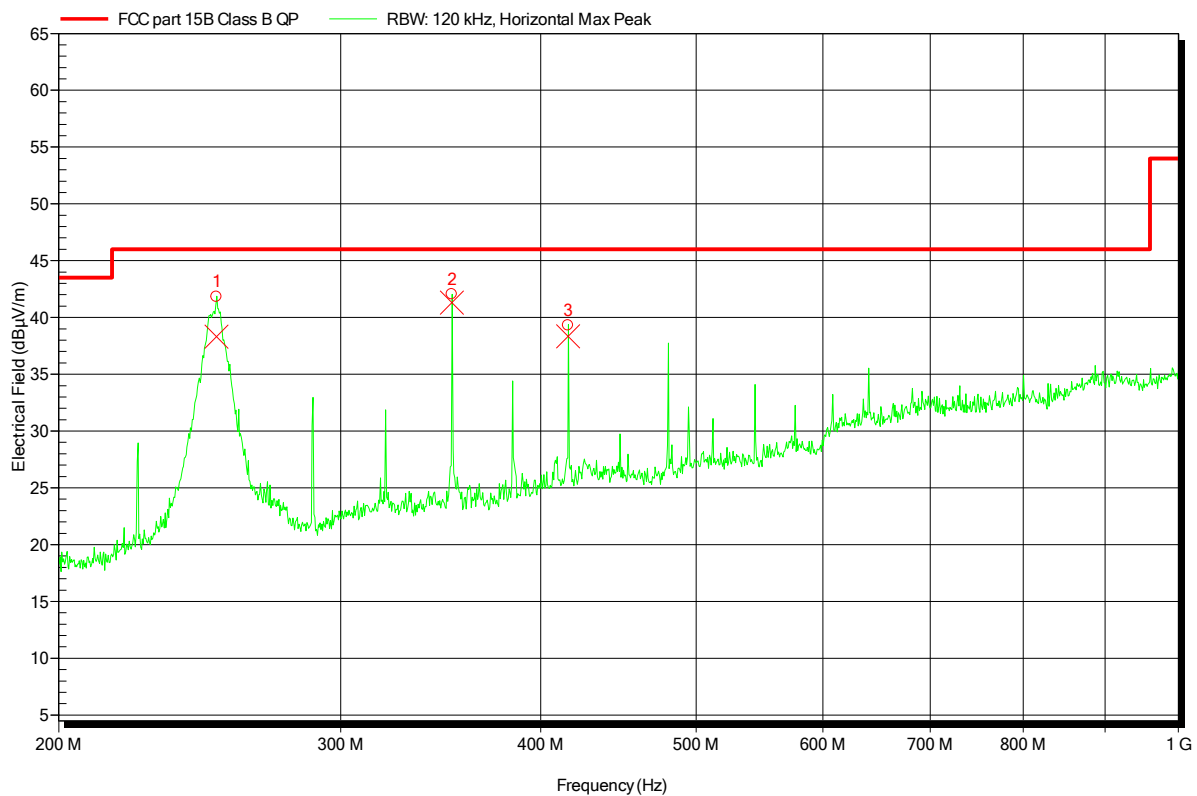

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
251 MHz	38.31 dBμV/m	46 dBμV/m	-7.69 dB	Pass
351.995 MHz	41.3 dBμV/m	46 dBμV/m	-4.7 dB	Pass
415.995 MHz	38.33 dBμV/m	46 dBμV/m	-7.67 dB	Pass

Test Report No.: G0M-1406-3914-EF0115B-V02


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3914

Manufacturer: Leica Geosystems AG
 EUT Name: CTR20
 Model: 1875059
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 23°C, Unom: internal Battery
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m
 Mode: Bluetooth Link with camera
 Test Date: 2015-03-02
 Note:

Index 5

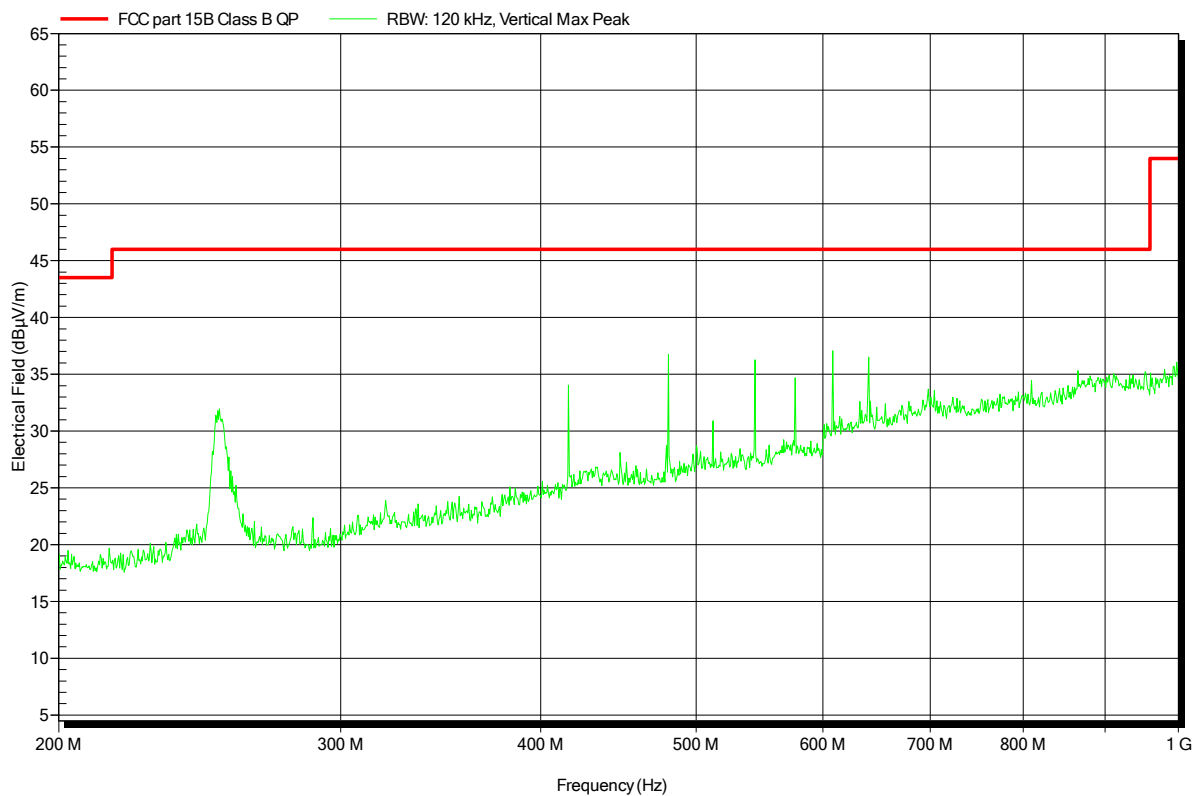


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3914

Manufacturer: Leica Geosystems AG
 EUT Name: CTR20
 Model: 1875059
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 23°C, Unom: internal Battery
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3m
 Mode: Bluetooth Link with camera
 Test Date: 2015-03-03
 Note:

Index 7

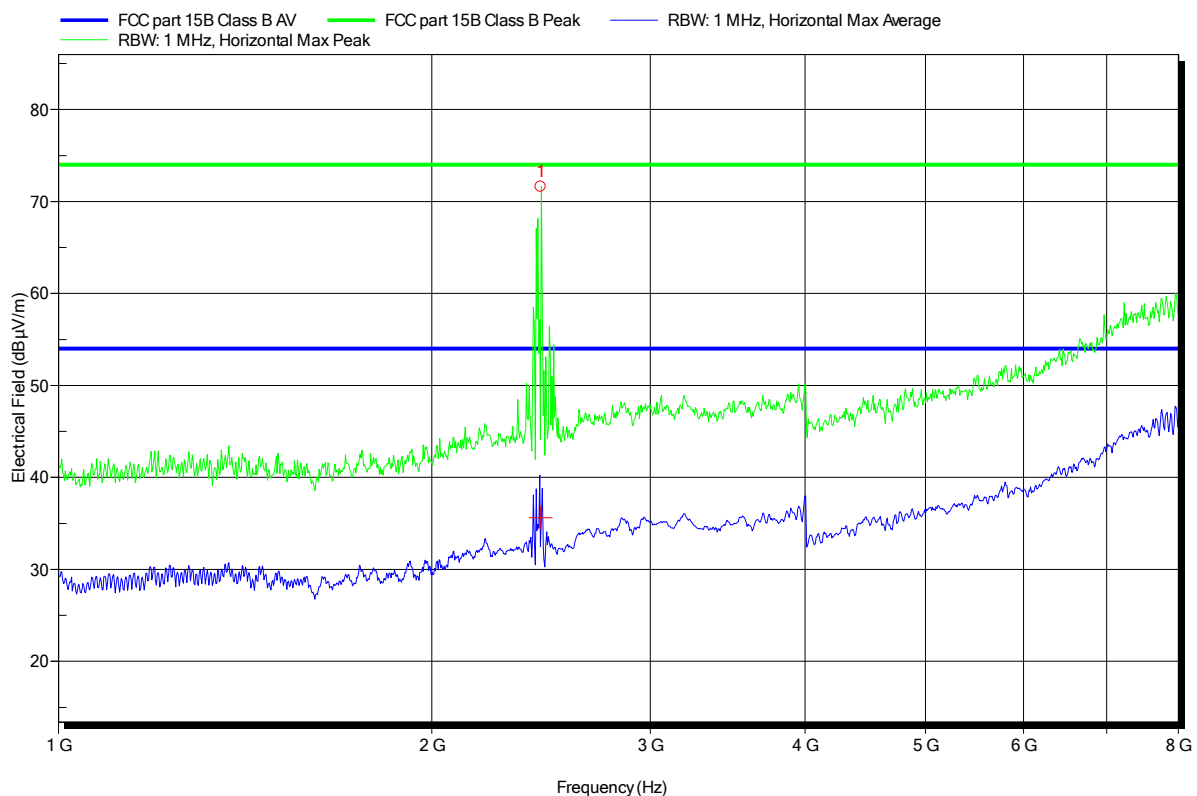


Frequency
 1- TX 2.449 GHz Bluetooth

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3914

Manufacturer: Leica Geosystems AG
 EUT Name: CTR20
 Model: 1875059
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 23°C, Unom: internal Battery
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3m
 Mode: Bluetooth Link with camera
 Test Date: 2015-03-03
 Note:

Index 8

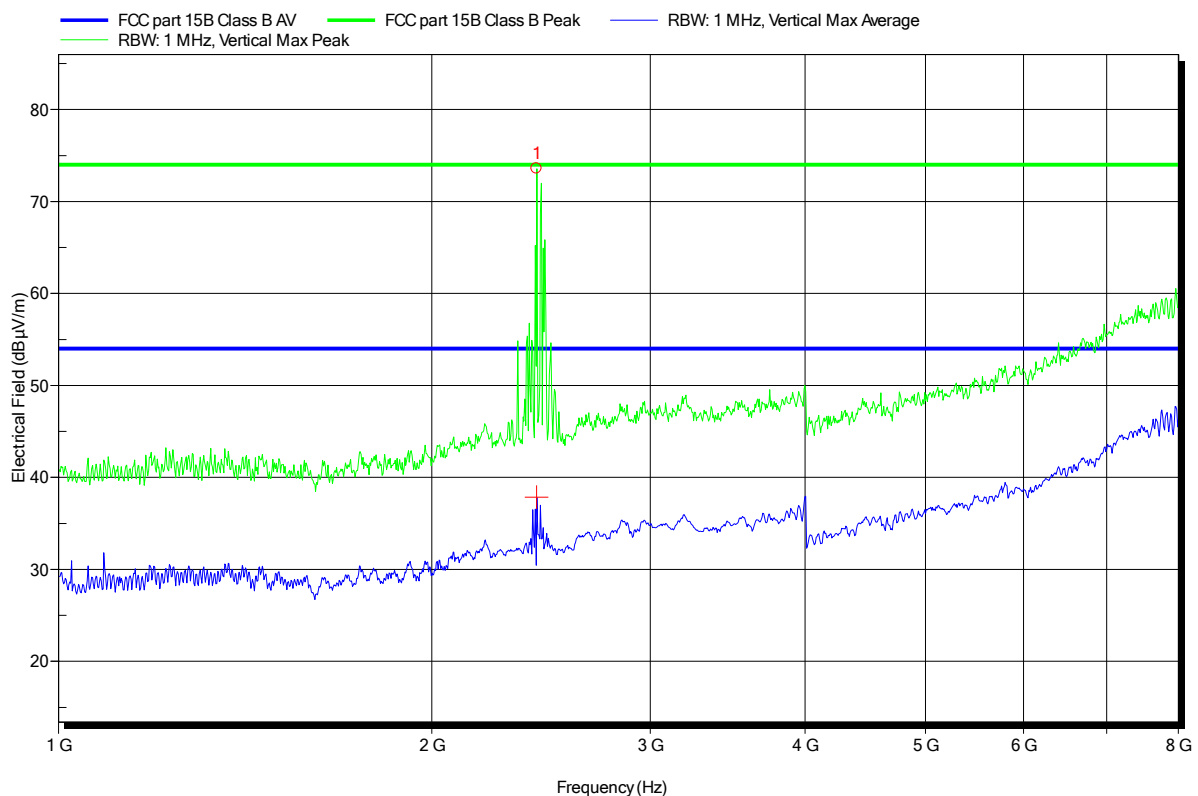


Frequency
 1- TX 2.449 GHz Bluetooth

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3914

Manufacturer: Leica Geosystems AG
 EUT Name: CTR20
 Model: 1875059
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 23°C, Unom: internal Battery
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3m
 Mode: Bluetooth Link with camera
 Test Date: 2015-03-03
 Note:

Index 9

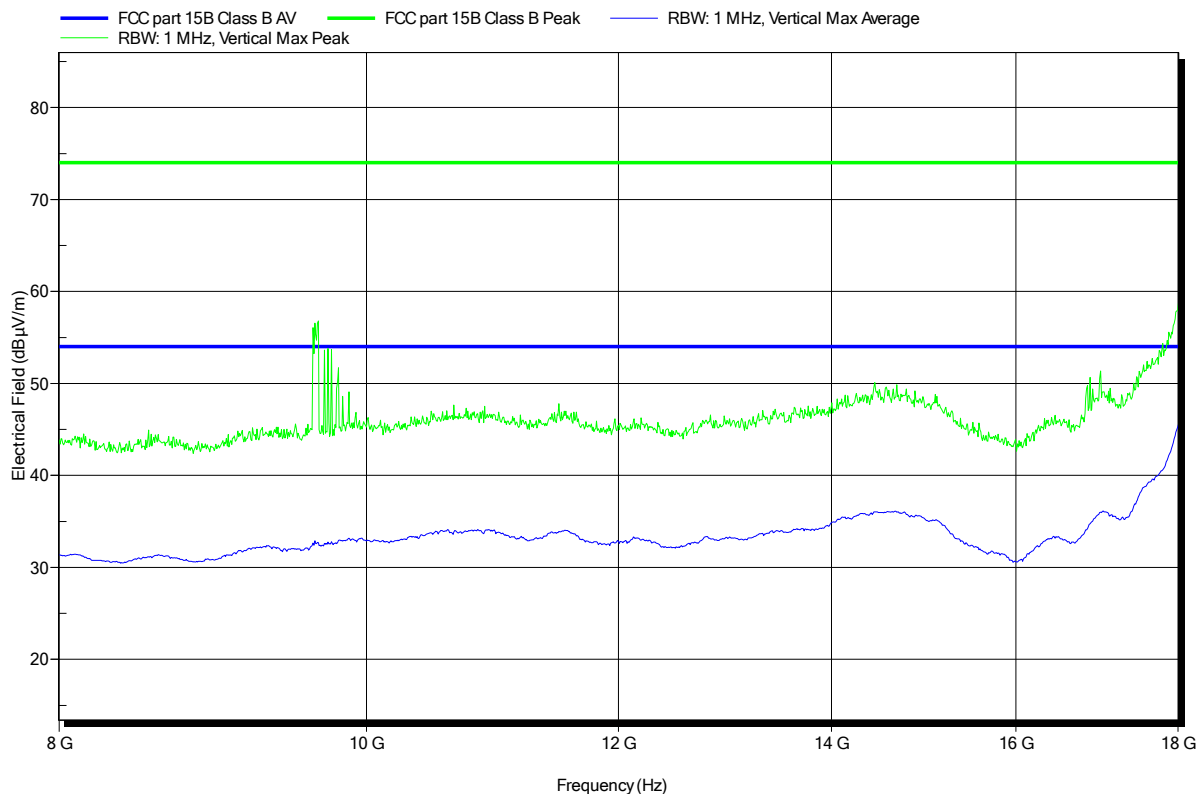


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1406-3914

Manufacturer: Leica Geosystems AG
 EUT Name: CTR20
 Model: 1875059
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 23°C, Unom: internal Battery
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3m
 Mode: Bluetooth Link with camera
 Test Date: 2015-03-03
 Note:

Index 10

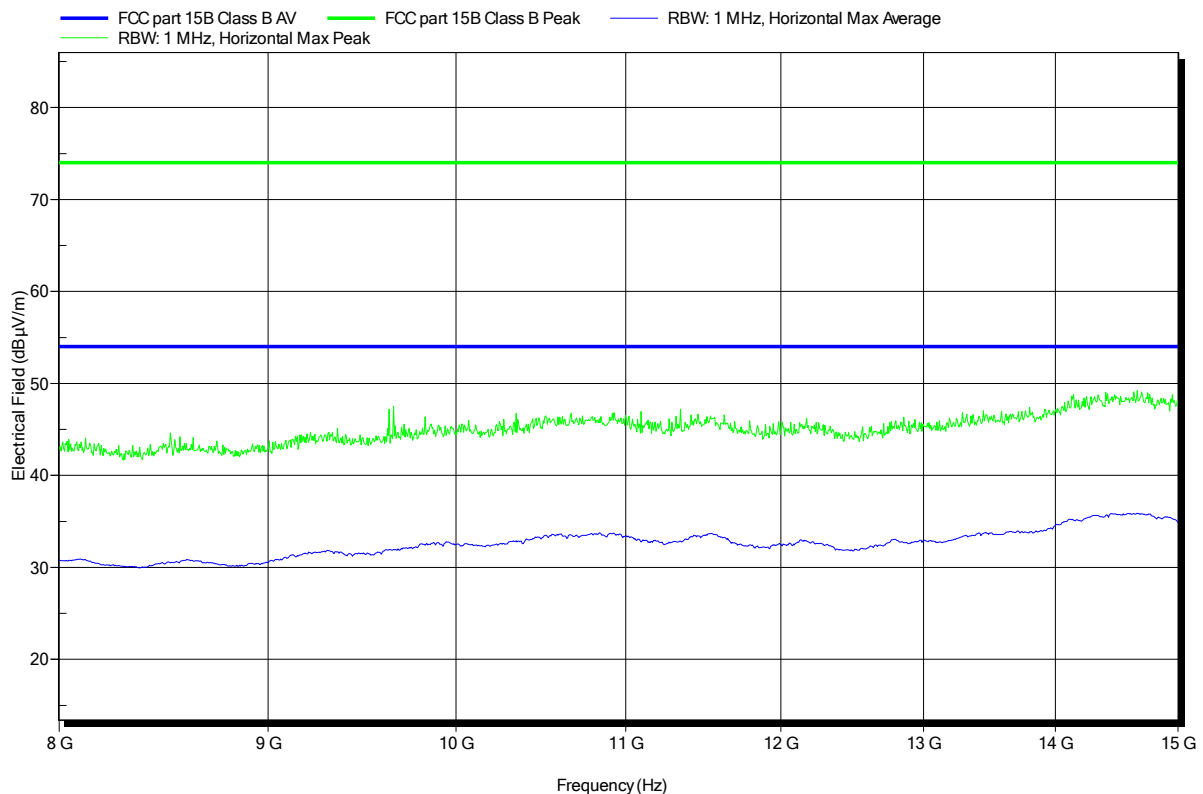

3.2 Test Conditions and Results – AC power line conducted emissions

Conducted emissions acc. FCC 47 CFR 15.107 / IC RSS-Gen			Verdict: PASS	
Laboratory Parameters:	Required prior to the test		During the test	
Ambient Temperature	15 to 35 °C		23°C	
Relative Humidity	30 to 60 %		32%	
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Sample is tested with respect to the requirements of the equipment class	Equipment class			
	Class B			
Points of Application	Application Interface			
AC Mains	LISN			
Operating mode and configuration	1			
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

Test Procedure:


- 1) The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2009 item 7.3.1)
- 2) The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- 3) The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- 4) The LISN measurement port was connected to a measurement receiver
- 5) I/O cables were bundled not longer than 0.4 m
- 6) Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1406-3914

Manufacturer:	Leica Geosystems AG
EUT Name:	CTR20
Model:	1875059
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: internal Battery charged from CS20
LISN:	ESH2-Z5 N
Mode:	Bluetooth Link with camera
Test Date:	2015-03-03
Note:	charging

Index 11

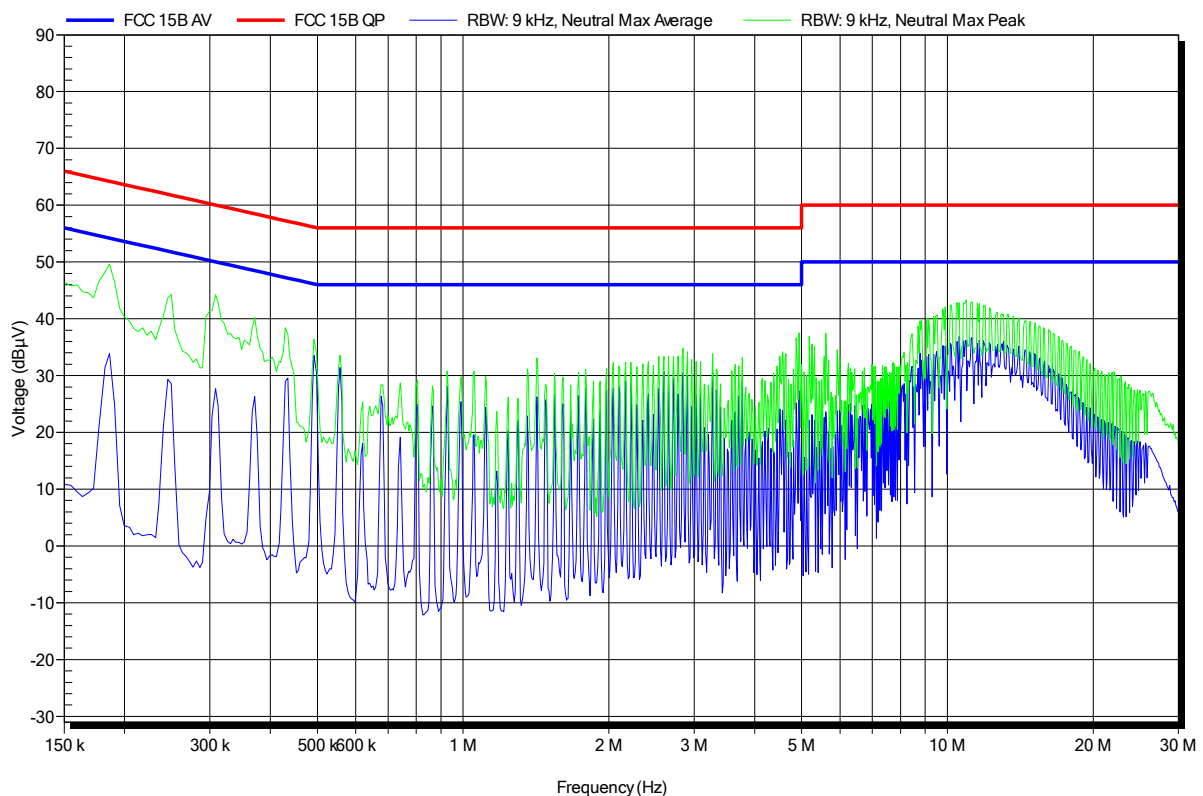

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1406-3914

Manufacturer:	Leica Geosystems AG
EUT Name:	CTR20
Model:	1875059
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 23°C, Unom: internal Battery charged from CS20
LISN:	ESH2-Z5 L
Mode:	Bluetooth Link with camera
Test Date:	2015-03-03
Note:	charging

Index 12

