


FCC RADIO TEST REPORT

Applicant's company	CIPHERLAB CO.,LTD
Applicant Address	12F, 333, Dunhua S.Rd., Sec.2, Taipei, Taiwan
FCC ID	Q3N-8300W
Manufacturer's company	CIPHERLAB CO.,LTD
Manufacturer Address	12F, 333, Dunhua S.Rd., Sec.2, Taipei, Taiwan

Product Name	WLAN module
Brand Name	CIPHERLAB
Model Name	KCJ-1
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2412 ~ 2462MHz
Receive Date	Sep. 14, 2006
Test Date	Sep. 22, 2006
Submission Type	Original Equipment Limited module Approval

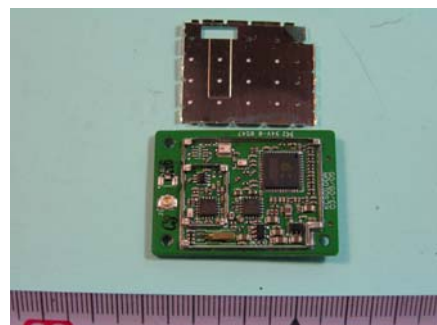

Statement

Test result included is only for the 802.11b part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

NVLAP[®]

Lab Code: 200079-0

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	3
3.4. Table for Carrier Frequencies	3
3.5. Table for Test Modes	4
3.6. Table for Testing Locations.....	4
3.7. Table for Supporting Units	5
3.8. Table for Parameters of Test Software Setting	5
3.9. Test Configurations	5
4. TEST RESULT	8
4.1. AC Power Line Conducted Emissions Measurement.....	8
4.2. Maximum Peak Output Power Measurement	14
4.3. Power Spectral Density Measurement	16
4.4. 6dB Spectrum Bandwidth Measurement	20
4.5. Radiated Emissions Measurement	24
4.6. Band Edge Emissions Measurement	44
4.7. Antenna Requirements	48
5. LIST OF MEASURING EQUIPMENTS	49
6. TEST LOCATION.....	50
7. NVLAP CERTIFICATE OF ACCREDITATION	51
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A2
APPENDIX B. TEST PHOTOS.....	B1 ~ B10
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~C3

History of This Test Report

Original Issue Date: Sep. 27, 2006

Report No.: FR691318AF

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

1. CERTIFICATE OF COMPLIANCE

Product Name : WLAN module
Brand Name : CIPHERLAB
Model Name : KCJ-1
Applicant : CIPHERLAB CO.,LTD
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Sep. 14, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.




Prepared By:

Tina Jao / Specialist



Tested By: By:

Carl Lee / Engineer



Reviewed By:

Roger Sheng / Manager

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	11.01 dB
4.2	15.247(b)(3)	Maximum Peak Conducted Output Power	Complies	15.41 dB
4.3	15.247(e)	Power Spectral Density	Complies	10.75 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	1.02 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.49 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	$\pm 2.26\text{dB}$	Confidence levels of 95%
Maximum Peak Conducted Output Power	$\pm 0.776\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 0.506\text{dB}$	Confidence levels of 95%
6dB Spectrum Bandwidth	$\pm 1.64 \times 10^{-6}$	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	$\pm 0.754\text{dB}$	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	$\pm 1.89\text{dB}$	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	$\pm 1.89\text{dB}$	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	$\pm 1.86\text{dB}$	Confidence levels of 95%
Temperature	$\pm 0.7^{\circ}\text{C}$	Confidence levels of 95%
Humidity	$\pm 3.2\%$	Confidence levels of 95%
DC / AC Power Source	$\pm 0.04\%$	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

EUT is a WLAN module with 802.11b radio functions. This module is equipped within CIPHERLAB 8300 series terminal for FCC Limited Module Approval, LMA. Only the radio detail of WLAN is shown in the table below. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	5V DC from adapter ; 3.7V DC from battery
Modulation	DSSS for IEEE 802.11b
Data Modulation	DSSS (BPSK / QPSK / CCK)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ;
Frequency Range	2412 ~ 2462MHz
Channel Number	11
Channel Band Width (99%)	11b: 15.60 MHz
Conducted Output Power	11b: 14.59 dBm

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	GLOBAL PMC	GPSA-0500255	INPUT: 100-240V AC OUTPUT: 5V DC
Li-ion Battery	-	-	3.7V DC
Others			
Cradle / RS-232 cable / Power cord			

3.3. Table for Filed Antenna

Ant.	Model Name	Brand Name	Antenna Type	Connector	Gain (dBi)
1	ACX	AT9520 Series	Chip Antenna	IPX	3.0

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report. This EUT is equipped within CIPHERLAB 8300 terminal for FCC Limited Module Approval, LMA. The Bluetooth or RF ID function of 8300 series is switched on during test to evaluate the possible collocation issue. The data rate and channel of EUT are listed in table below. Two different key pad with different cases are also evaluated during test

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	WLAN+BT+Scanner Mode WLAN+RFID+Scanner Mode	11 Mbps	-	1
Maximum Peak Conducted Output Power Power Spectral Density 6dB Spectrum Bandwidth	11b/CCK	11 Mbps	1/6/11	NA
Radiated Emissions 9kHz~1GHz	Laser (24keys keypad) WLAN+BT+Charging Mode CCD (39keys keypad) WLAN+RFID+Charging Mode	11 Mbps	-	1
Radiated Emissions 1GHz~10 th Harmonic	Laser (24keys keypad) WLAN+BT+Mode	11 Mbps	1/6/11	1
	CCD (39keys keypad) WLAN+ RFID+Mode	11 Mbps	1/6/11	1
Band Edge Emissions	Laser (24keys keypad) WLAN+BT+Mode	11 Mbps	1/11	1
	CCD (39keys keypad) WLAN+ RFID+Mode	11 Mbps	1/11	1

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	PPT	DoC
Notebook	DELL	PP01L	DoC
Mouse	Microsoft	1004	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11b/g


Test Software Version	Default		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	Default	Default	Default

3.9. Test Configurations

3.9.1. Radiation Emissions Test Configuration


Below 1GHz

Laser (24keys keypad) WLAN+BT+Charging Mode / CCD (39keys keypad) WLAN+RFID+Charging Mode

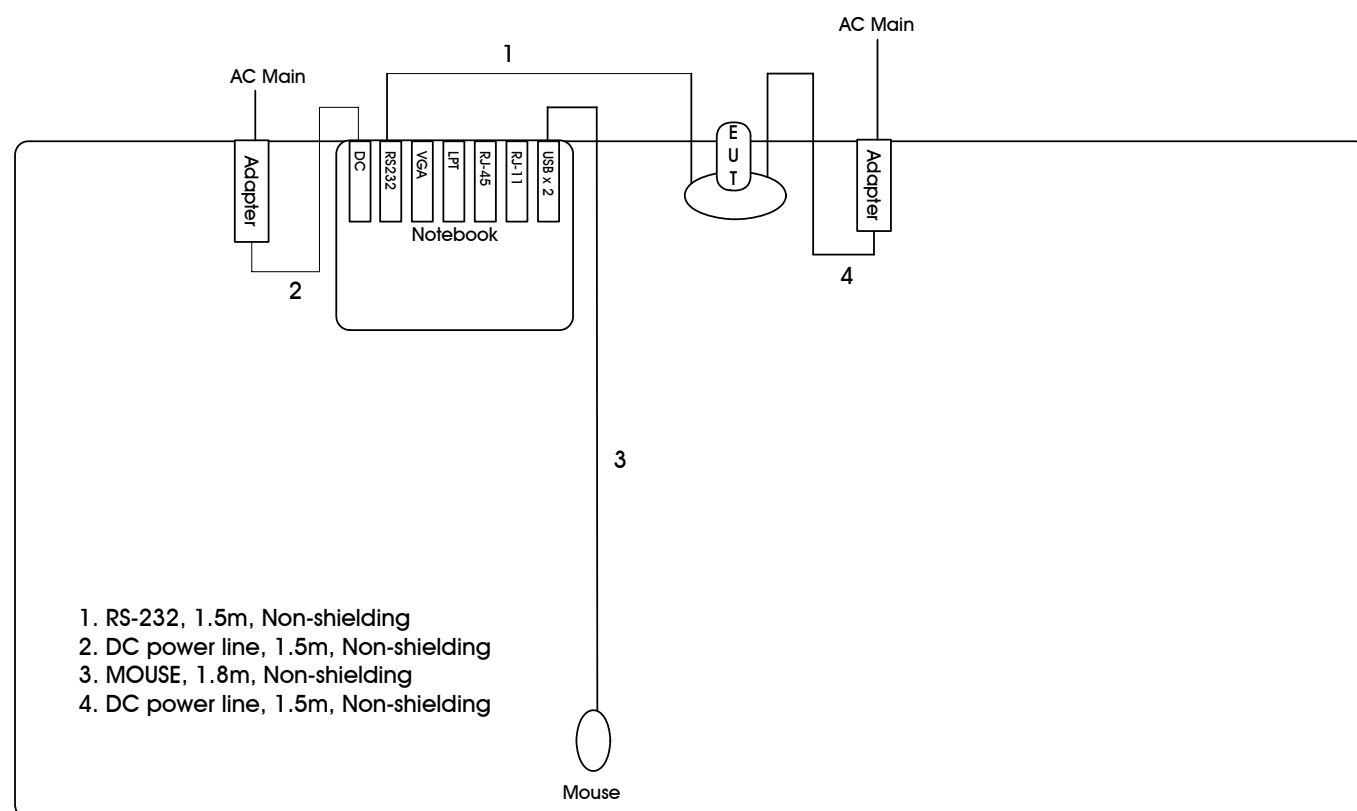


Above 1GHz

Laser (24keys keypad) WLAN+BT+Mode / CCD (39keys keypad) WLAN+ RFID+Mode

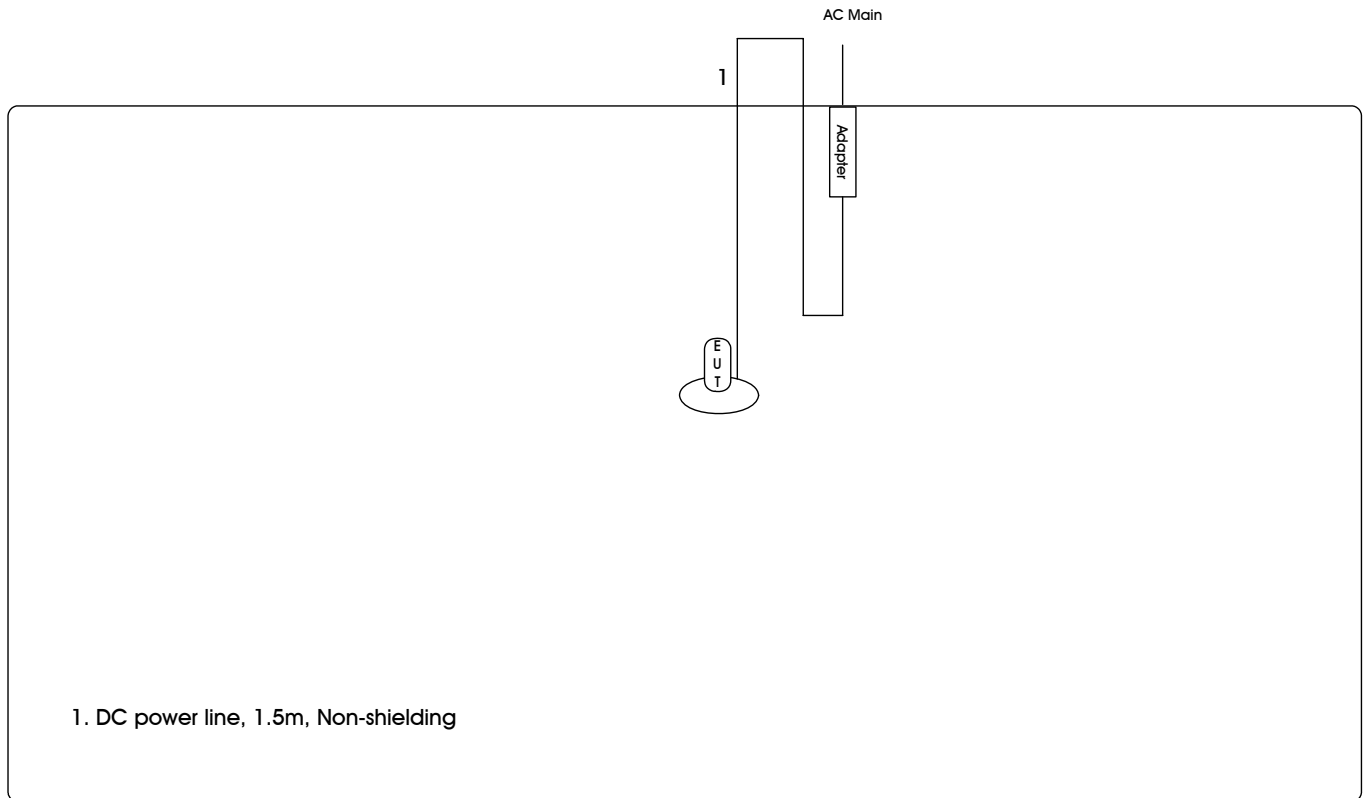

3.9.2. AC Power Line Conduction Emissions Test Configuration

WLAN+BT+Scanner Mode / WLAN+RFID+Scanner Mode

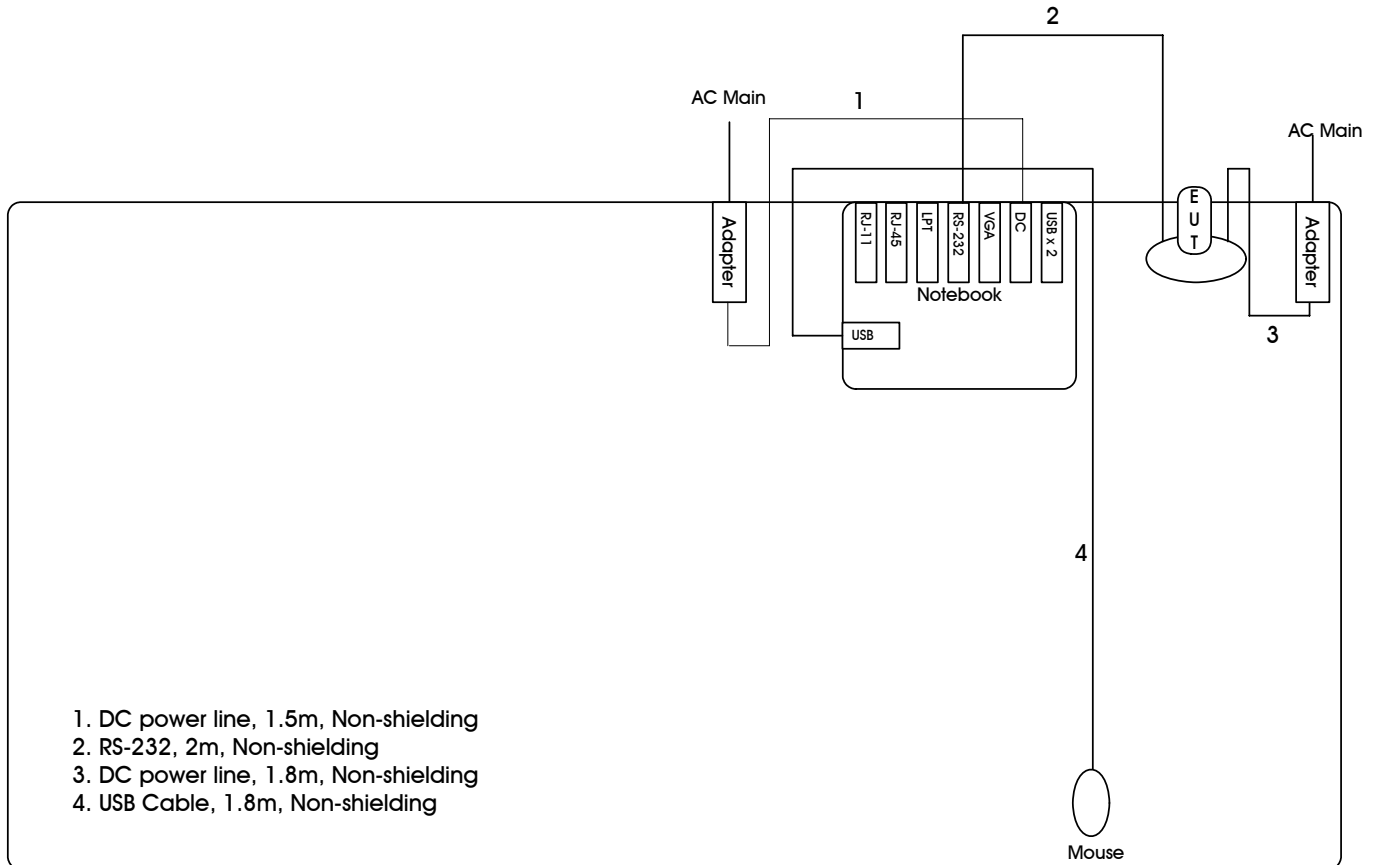

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

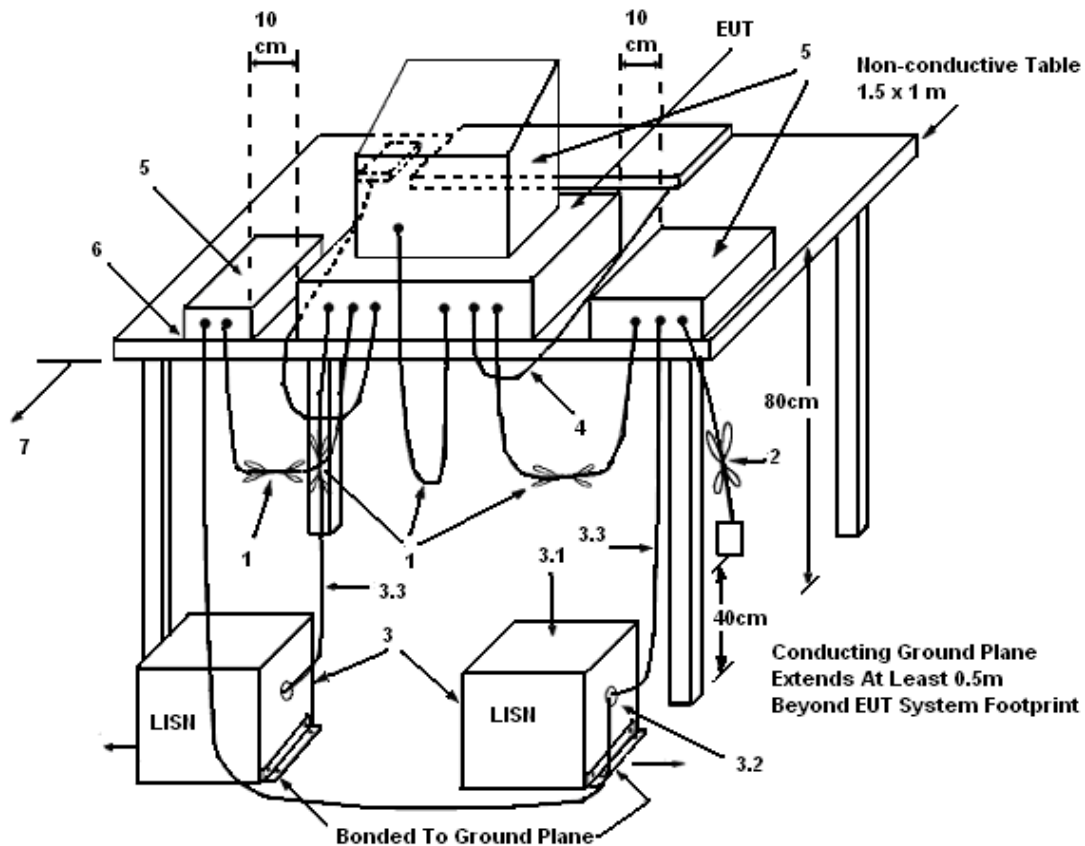

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	27°C	Humidity	45%
Test Engineer	Ted Chiu	Phase	Line
Configuration	WLAN+BT+Scanner Mode		

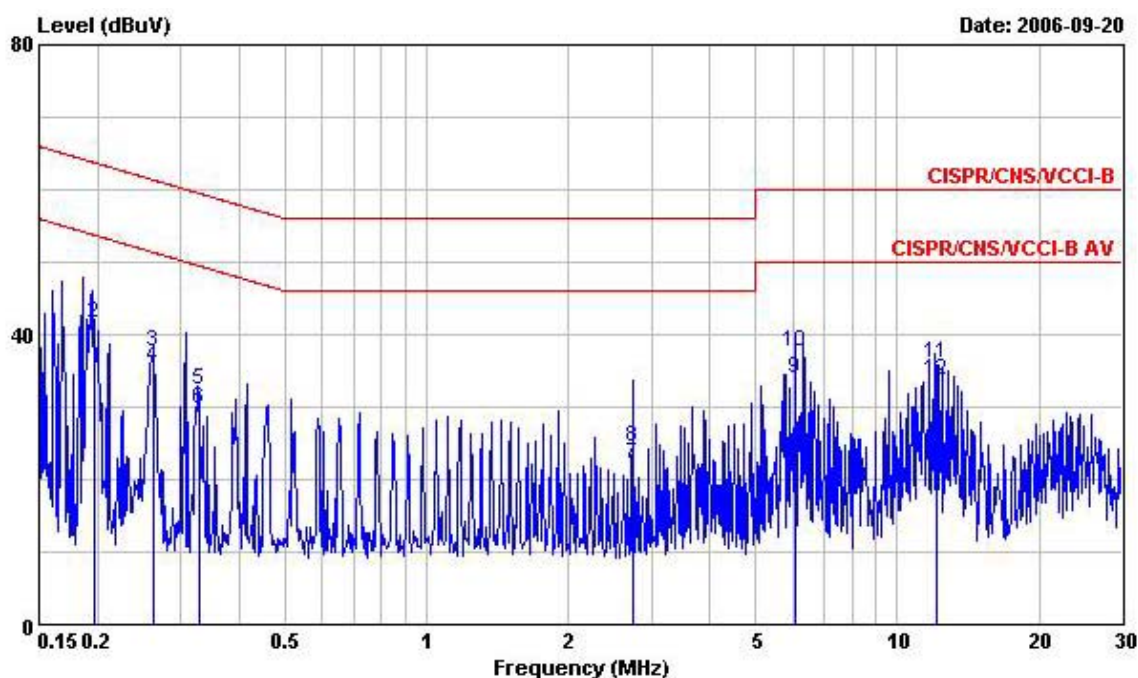

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1967850	38.21	-15.54	53.75	38.07	0.10	0.04	Average
2	0.1967850	41.47	-22.28	63.75	41.33	0.10	0.04	QP
3	0.2616370	37.76	-23.62	61.38	37.59	0.10	0.07	QP
4	0.2616370	35.62	-15.76	51.38	35.45	0.10	0.07	Average
5	0.3273410	32.46	-27.06	59.52	32.27	0.10	0.09	QP
6	0.3273410	29.66	-19.86	49.52	29.47	0.10	0.09	Average
7	2.740	21.99	-24.01	46.00	21.60	0.10	0.29	Average
8	2.740	24.43	-31.57	56.00	24.04	0.10	0.29	QP
9	6.070	33.96	-16.04	50.00	33.32	0.15	0.49	Average
10	6.070	37.72	-22.28	60.00	37.08	0.15	0.49	QP
11	12.080	36.15	-23.85	60.00	35.17	0.38	0.60	QP
12	12.080	33.63	-16.37	50.00	32.65	0.38	0.60	Average

Temperature	27°C	Humidity	45%
Test Engineer	Ted Chiu	Phase	Neutral
Configuration	WLAN+BT+Scanner Mode		

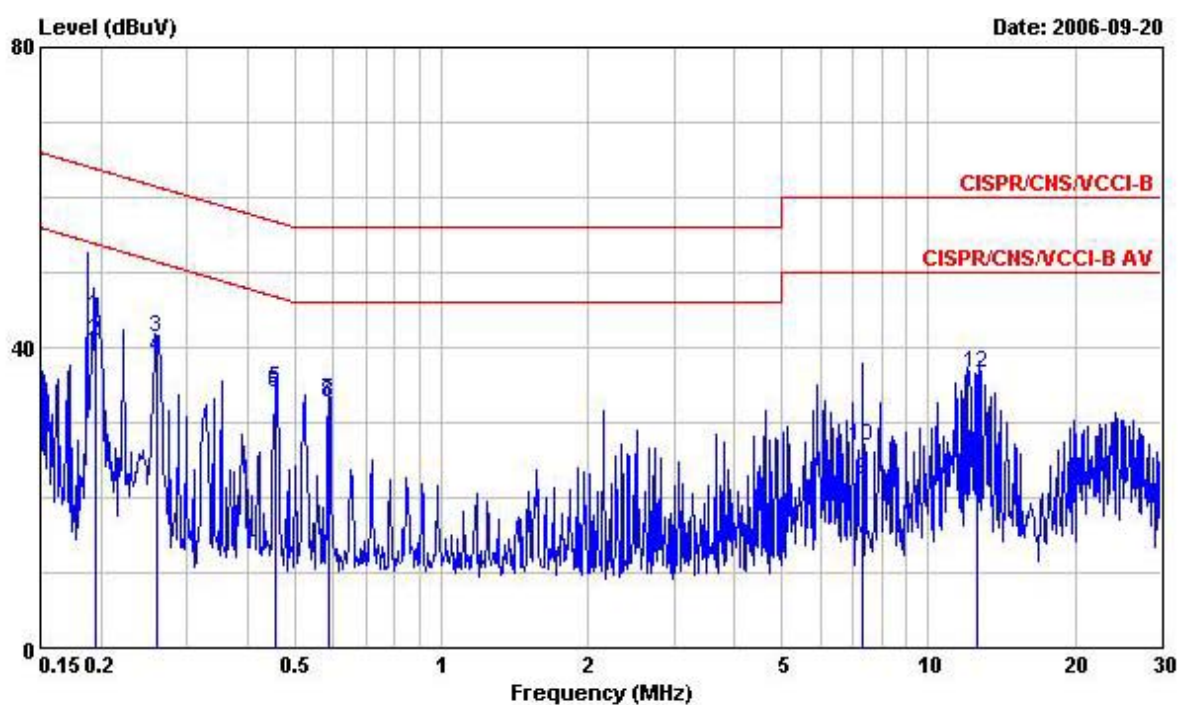


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1956350	44.26	-19.53	63.79	44.12	0.10	0.04	QP
2	0.1956350	40.72	-13.07	53.79	40.58	0.10	0.04	Average
3	0.2601590	41.38	-20.05	61.43	41.21	0.10	0.07	QP
4	0.2601590	38.76	-12.67	51.43	38.59	0.10	0.07	Average
5	0.4563600	34.45	-22.31	56.76	34.16	0.10	0.19	QP
6	0.4563600	33.97	-12.79	46.76	33.68	0.10	0.19	Average
7	0.5885140	32.80	-23.20	56.00	32.34	0.10	0.36	QP
8	0.5885140	32.63	-13.37	46.00	32.17	0.10	0.36	Average
9	7.318	22.37	-27.63	50.00	21.57	0.27	0.53	Average
10	7.318	26.85	-33.15	60.00	26.05	0.27	0.53	QP
11	12.608	34.07	-15.93	50.00	33.17	0.30	0.60	Average
12	12.608	36.47	-23.53	60.00	35.57	0.30	0.60	QP

Note:


Level = Read Level + LISN Factor + Cable Loss.

Temperature	27°C	Humidity	45%
Test Engineer	Ted Chiu	Phase	Line
Configuration	WLAN+RFID+Scanner Mode		

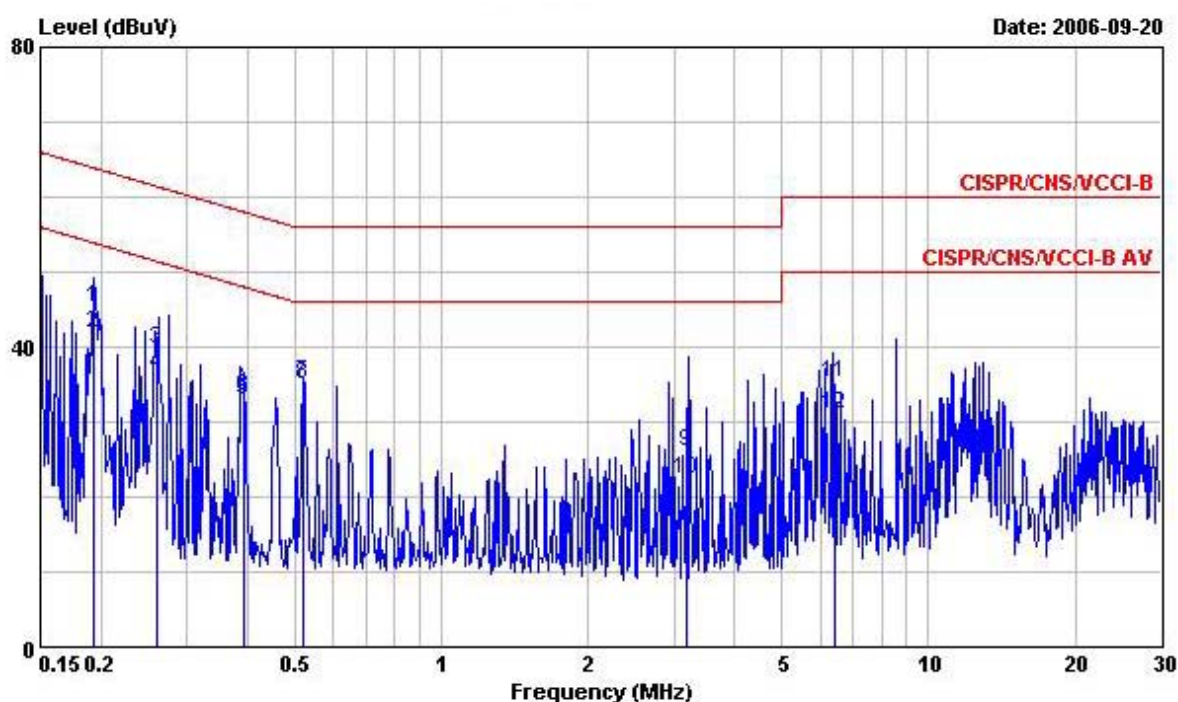

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1934380	45.30	-18.59	63.89	45.16	0.10	0.04	QP
2	0.1934380	41.83	-12.06	53.89	41.69	0.10	0.04	Average
3	0.2605110	39.66	-21.76	61.42	39.49	0.10	0.07	QP
4	0.2605110	36.20	-15.22	51.42	36.03	0.10	0.07	Average
5	0.3910560	33.00	-25.04	58.04	32.79	0.10	0.11	QP
6	0.3910560	33.35	-14.69	48.04	33.14	0.10	0.11	Average
7	0.5220620	35.31	-20.69	56.00	34.93	0.10	0.28	QP
8	0.5220620	34.99	-11.01	46.00	34.61	0.10	0.28	Average
9	3.195	25.96	-30.04	56.00	25.53	0.10	0.33	QP
10	3.195	22.42	-23.58	46.00	21.99	0.10	0.33	Average
11	6.390	35.14	-24.86	60.00	34.49	0.15	0.50	QP
12	6.390	30.94	-19.06	50.00	30.29	0.15	0.50	Average

Temperature	27°C	Humidity	45%
Test Engineer	Ted Chiu	Phase	Neutral
Configuration	WLAN+RFID+Scanner Mode		

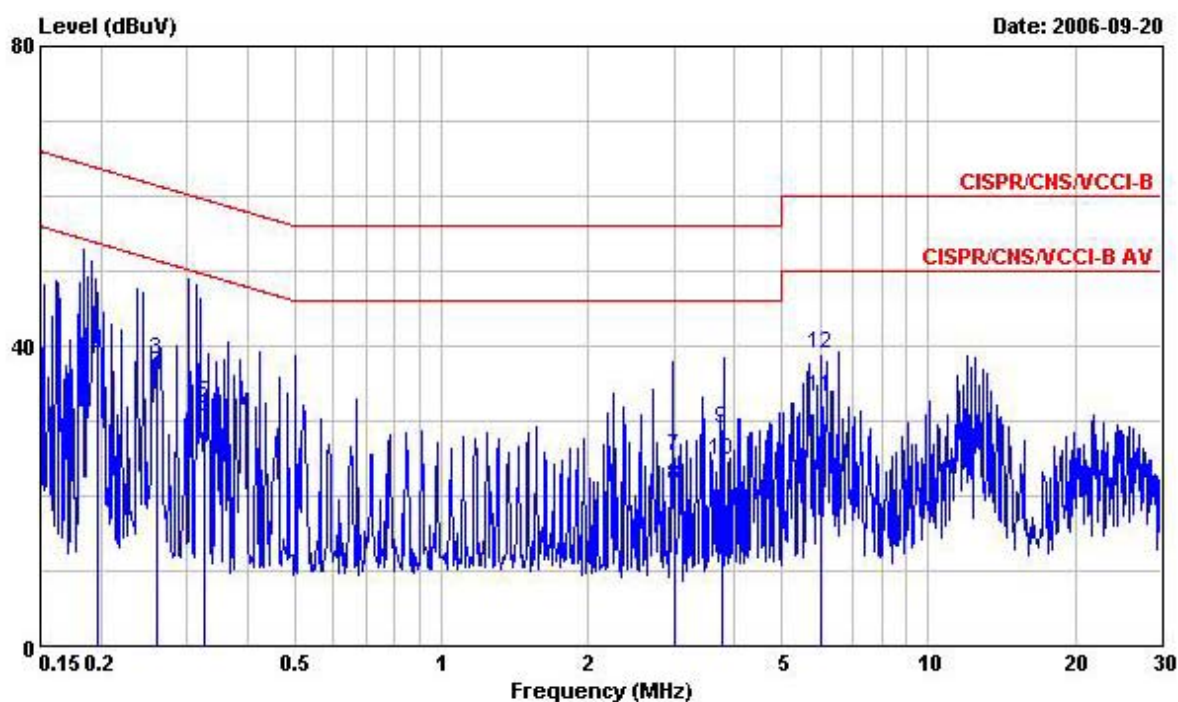

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1969900	42.31	-21.43	63.74	42.17	0.10	0.04	QP
2	0.1969900	39.04	-14.70	53.74	38.90	0.10	0.04	Average
3	0.2606250	38.08	-23.33	61.41	37.91	0.10	0.07	QP
4	0.2606250	35.70	-15.71	51.41	35.53	0.10	0.07	Average
5	0.3260250	32.40	-27.15	59.55	32.21	0.10	0.09	QP
6	0.3260250	30.58	-18.97	49.55	30.39	0.10	0.09	Average
7	3.003	25.18	-30.82	56.00	24.70	0.16	0.32	QP
8	3.003	21.44	-24.56	46.00	20.96	0.16	0.32	Average
9	3.785	28.89	-27.11	56.00	28.32	0.19	0.38	QP
10	3.785	24.84	-21.16	46.00	24.27	0.19	0.38	Average
11	6.002	33.21	-16.79	50.00	32.48	0.24	0.49	Average
12	6.002	39.05	-20.95	60.00	38.32	0.24	0.49	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Peak Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

4.2.4. Test Setup Layout

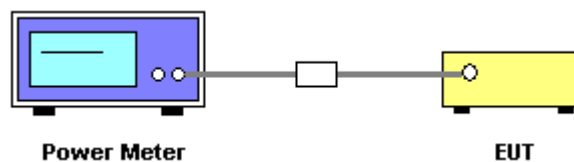

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Peak Output Power

Temperature	25°C	Humidity	58%
Test Engineer	Sam Lee	Configurations	802.11b

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	14.37	30.00	Complies
6	2437 MHz	14.59	30.00	Complies
11	2462 MHz	14.50	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

4.3.4. Test Setup Layout

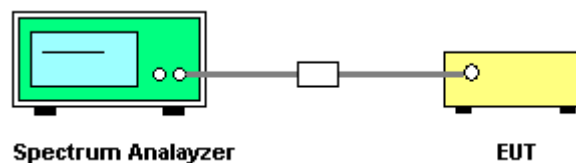

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	58%
Test Engineer	Sam Lee	Configurations	802.11b


Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-2.75	8.00	Complies
6	2437 MHz	-3.02	8.00	Complies
11	2462 MHz	-3.73	8.00	Complies


Power Density Plot on Configuration IEEE 802.11b / 2412 MHz

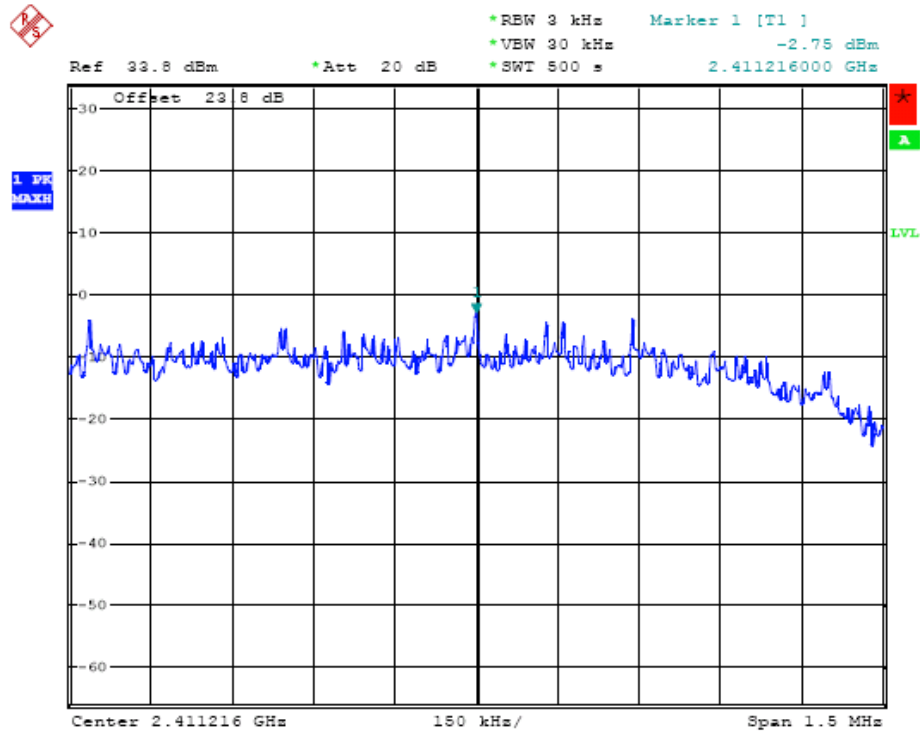

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz

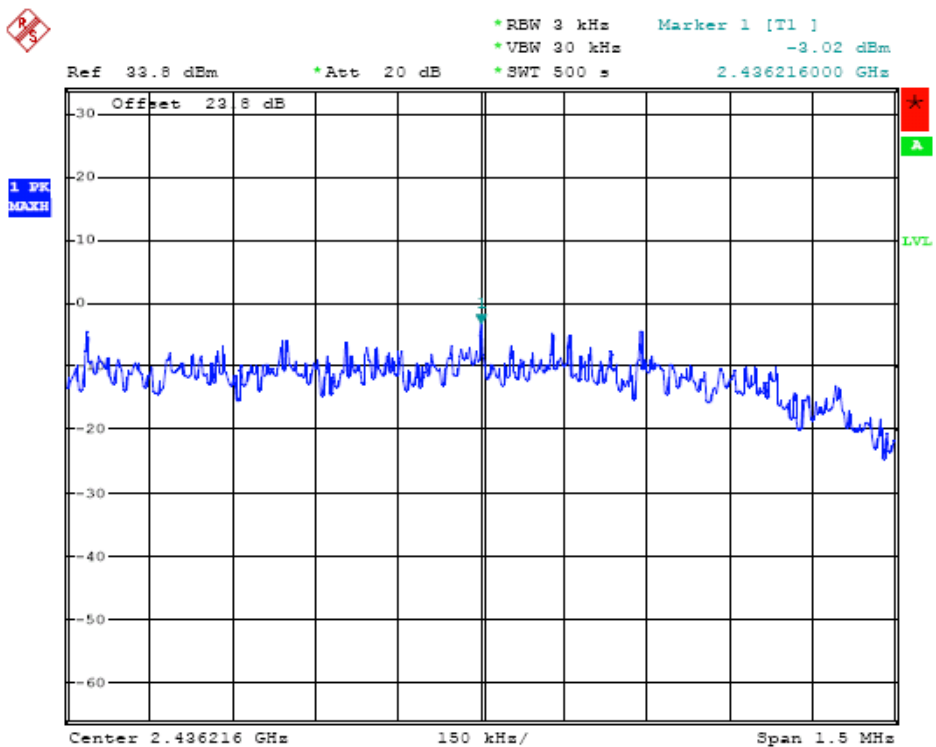

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

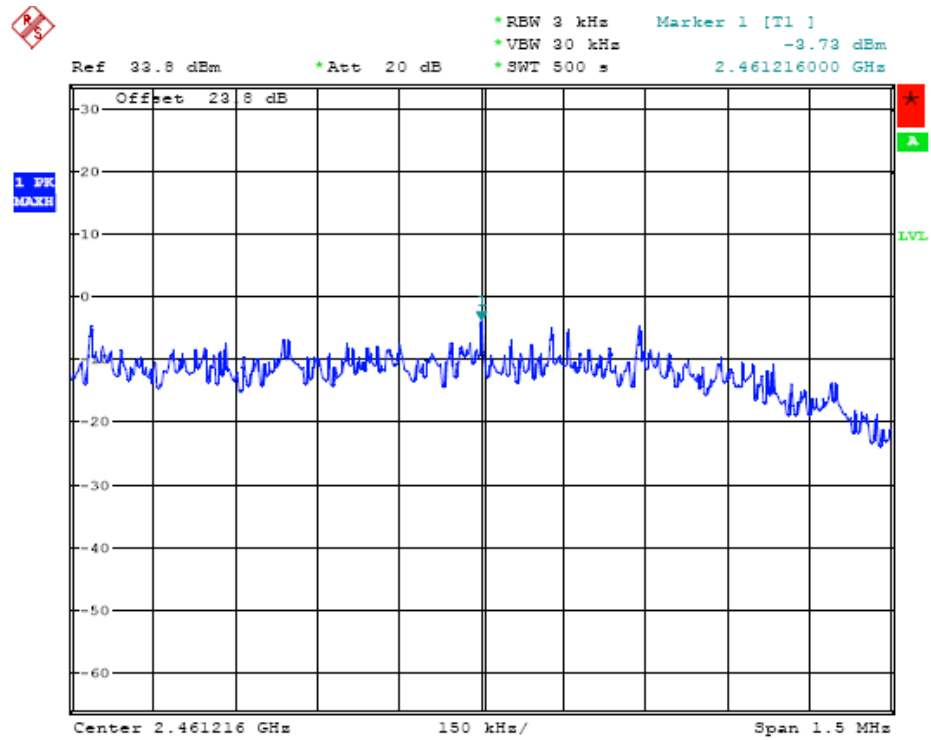

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

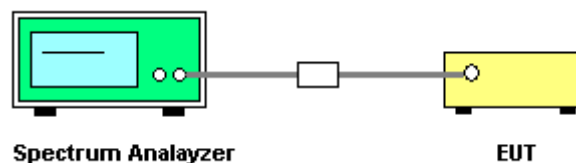

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	58%
Test Engineer	Sam Lee	Configurations	802.11b


Configuration IEEE 802.11b

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	10.12	15.60	500	Complies
6	2437 MHz	10.04	15.56	500	Complies
11	2462 MHz	10.04	15.60	500	Complies


6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

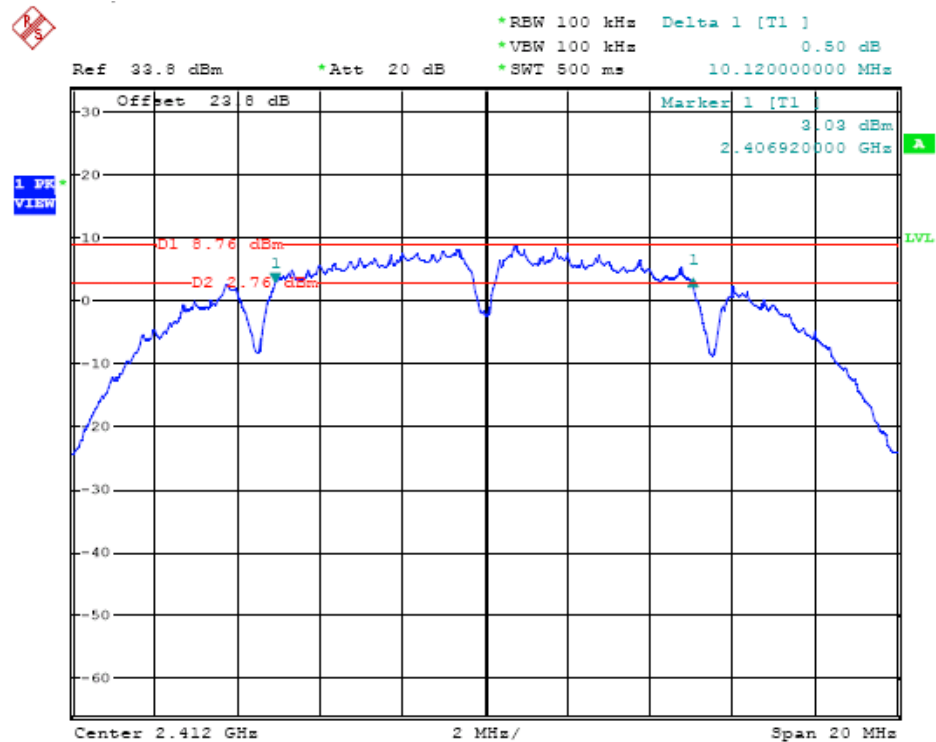

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

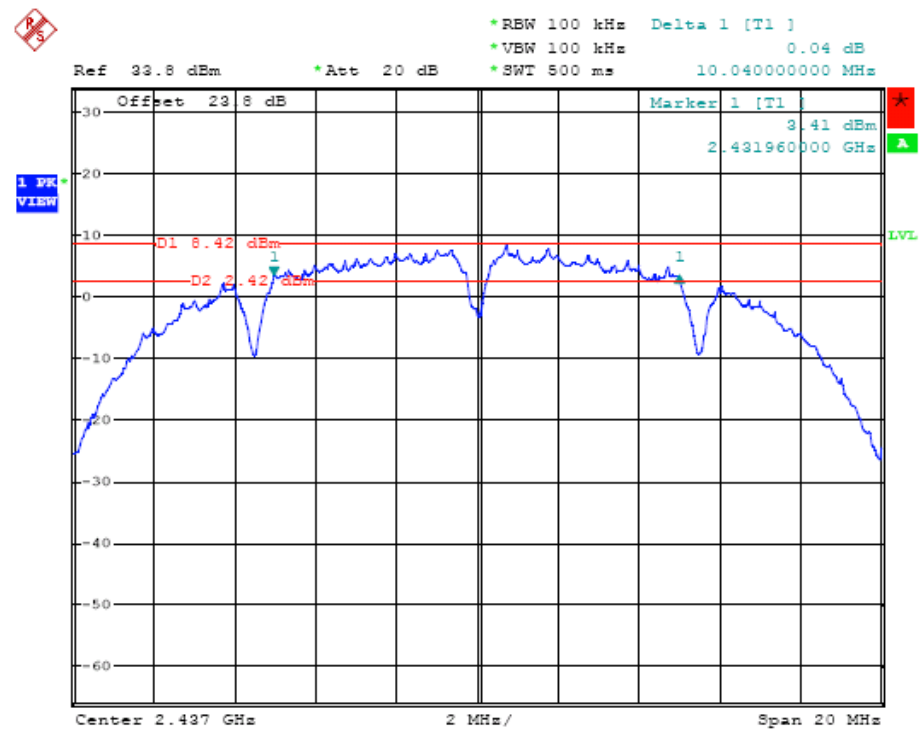

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

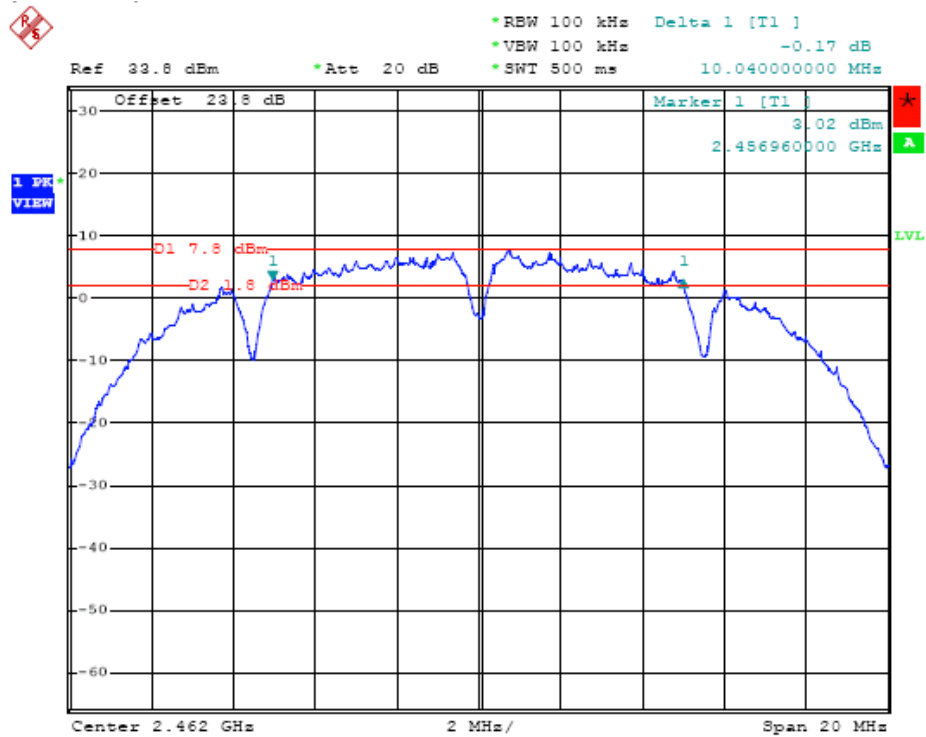

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

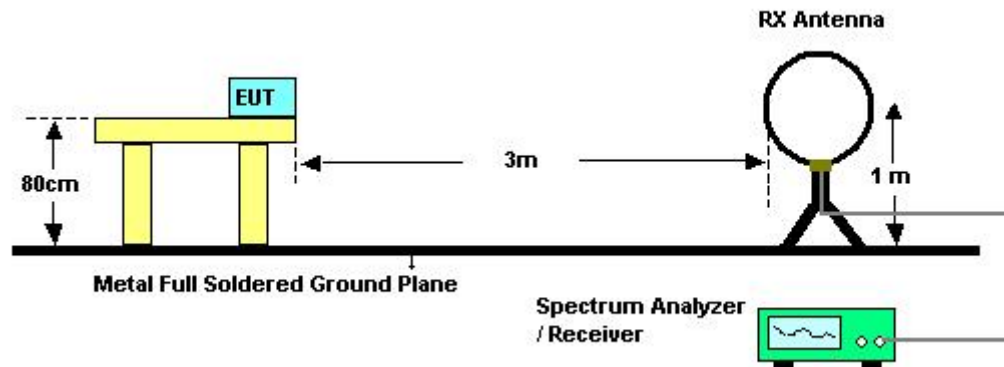

For radiated emissions above 30MHz

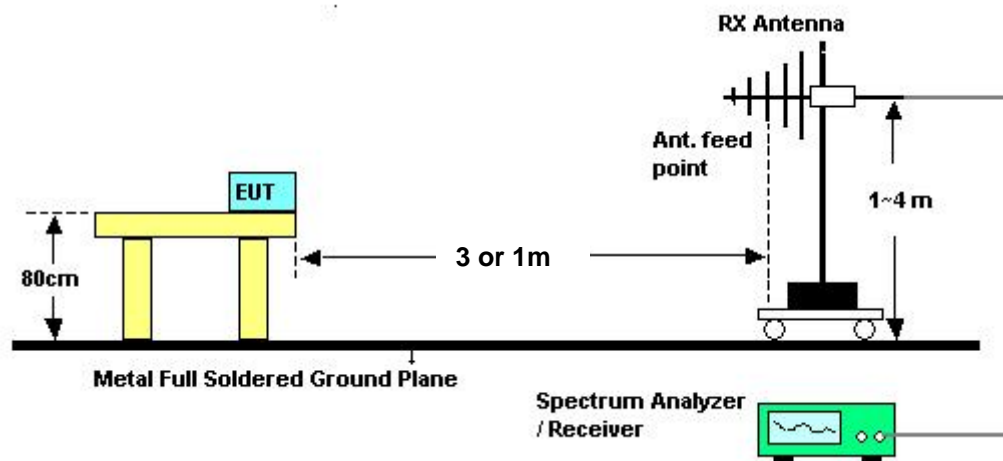

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	27°C	Humidity	51%
Test Engineer	Vic Hsiao		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	27°C	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	Laser (24keys keypad) WLAN+BT+Charging Mode

Horizontal

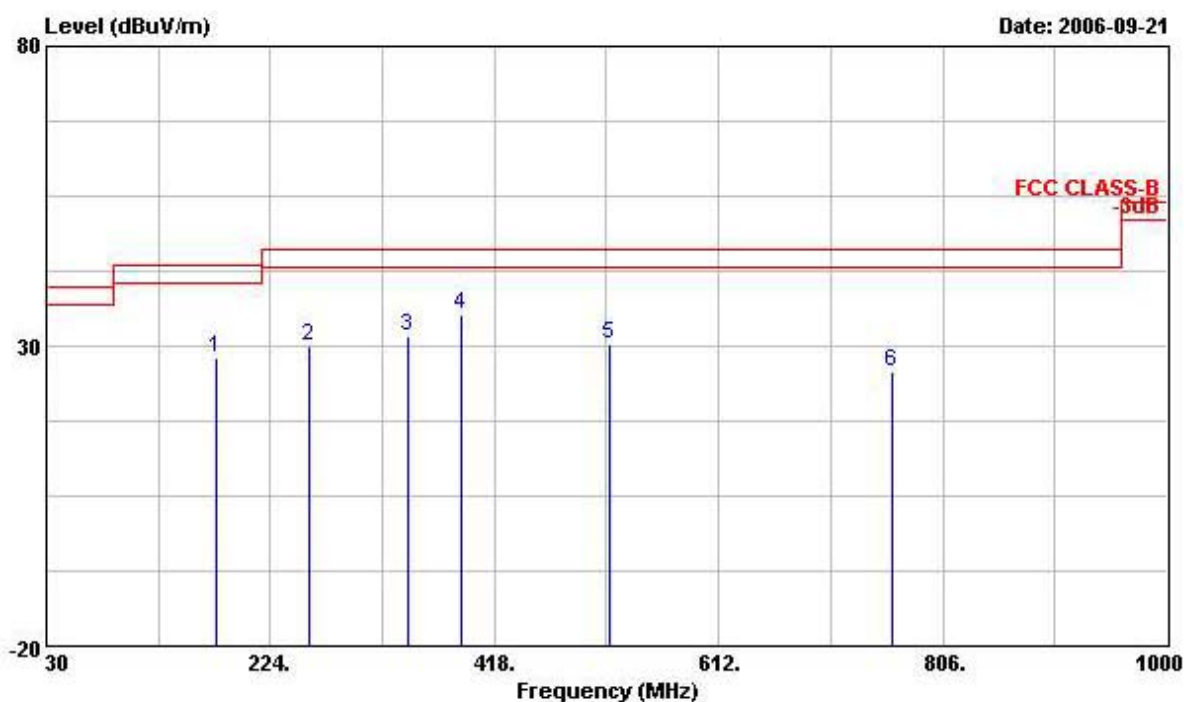

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB
1	176.470	28.07	-15.43	43.50	44.55	9.31	2.22	28.01 Peak
2	257.950	30.14	-15.86	46.00	42.71	13.48	2.33	28.38 Peak
3	343.310	31.57	-14.43	46.00	42.26	14.82	3.32	28.83 Peak
4	388.900	35.24	-10.76	46.00	44.89	16.08	3.35	29.08 Peak
5	517.910	30.22	-15.78	46.00	37.45	18.55	3.91	29.69 Peak
6	762.350	25.82	-20.18	46.00	29.93	20.73	4.92	29.76 Peak


Vertical

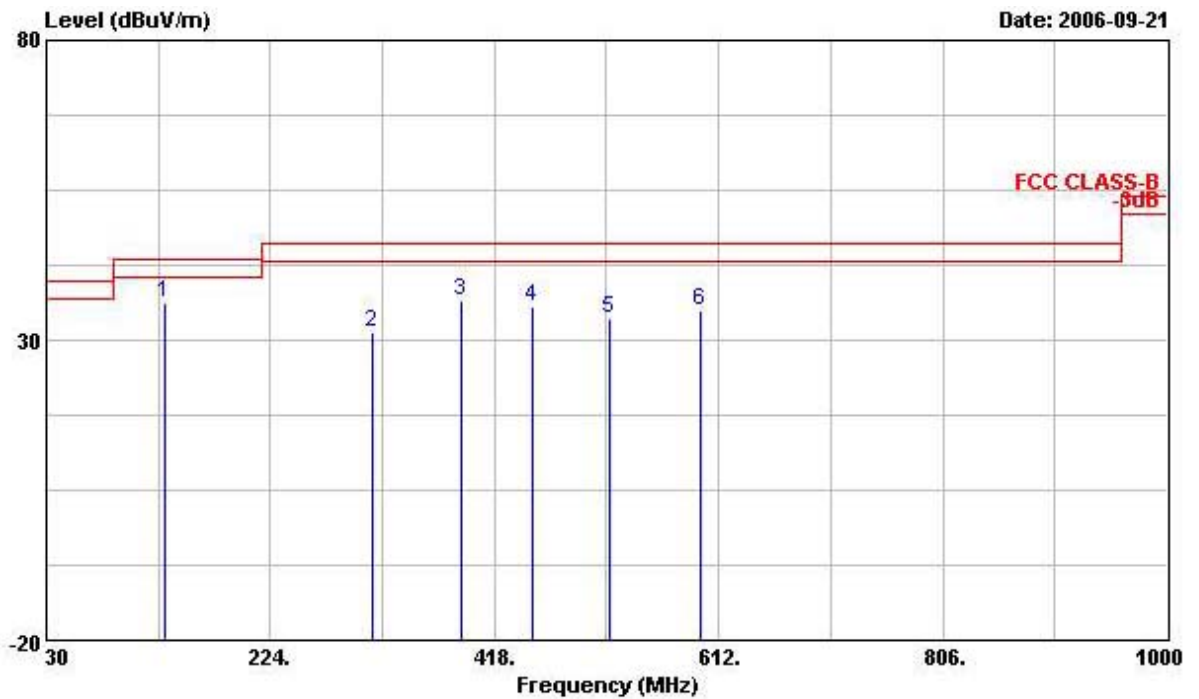

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	132.820	36.27	-7.23	43.50	50.44	12.10	1.80	28.07	Peak
2	312.270	31.34	-14.66	46.00	42.94	14.06	2.99	28.65	Peak
3 @	388.900	36.66	-9.34	46.00	46.31	16.08	3.35	29.08	Peak
4 @	450.980	35.63	-10.37	46.00	44.12	17.13	3.66	29.28	Peak
5	516.940	33.78	-12.22	46.00	41.04	18.52	3.91	29.69	Peak
6	595.510	34.88	-11.12	46.00	40.87	19.30	4.39	29.68	Peak


Temperature	27°C	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	CCD (39keys keypad) WLAN+RFID+Charging Mode

Horizontal

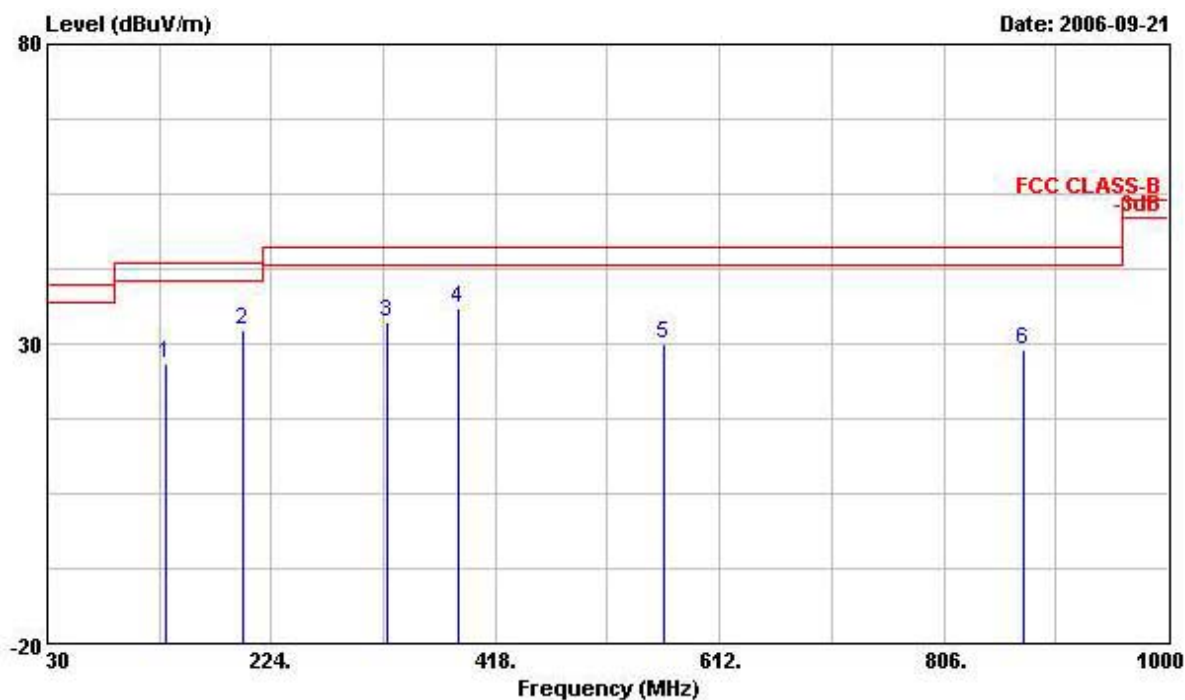

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBUV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBUV/m	dBuV	dB/m	dB	dB
1	132.820	26.75	-16.75	43.50	40.92	12.10	1.80	28.07 Peak
2	198.780	32.24	-11.26	43.50	48.49	9.61	2.30	28.16 Peak
3	323.910	33.54	-12.46	46.00	44.68	14.43	3.13	28.70 Peak
4 @	385.990	36.04	-9.96	46.00	45.77	15.98	3.35	29.06 Peak
5	563.500	29.93	-16.07	46.00	36.08	19.30	4.23	29.69 Peak
6	874.870	29.05	-16.95	46.00	32.46	20.94	5.46	29.81 Peak

Vertical

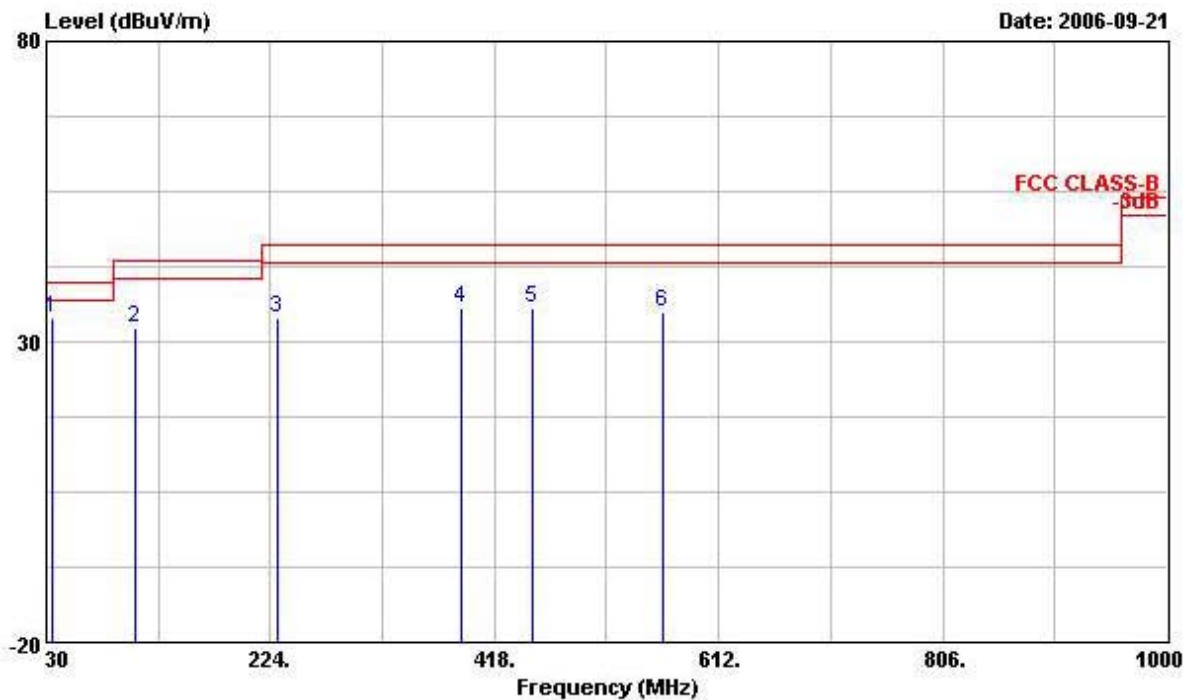

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	35.820	33.97	-6.03	40.00	46.33	14.94	0.50	27.80	Peak
2	106.630	32.39	-11.11	43.50	46.81	12.04	1.44	27.90	Peak
3	230.790	33.91	-12.09	46.00	49.33	10.48	2.47	28.36	Peak
4	388.900	35.74	-10.26	46.00	45.39	16.08	3.35	29.08	Peak
5	450.980	35.53	-10.47	46.00	44.02	17.13	3.66	29.28	Peak
6	563.500	34.99	-11.01	46.00	41.14	19.30	4.23	29.69	Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)


Temperature	27°C	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	Laser (24keys keypad) WLAN+BT+Mode 802.11b CH 01& BT CH 10

Horizontal

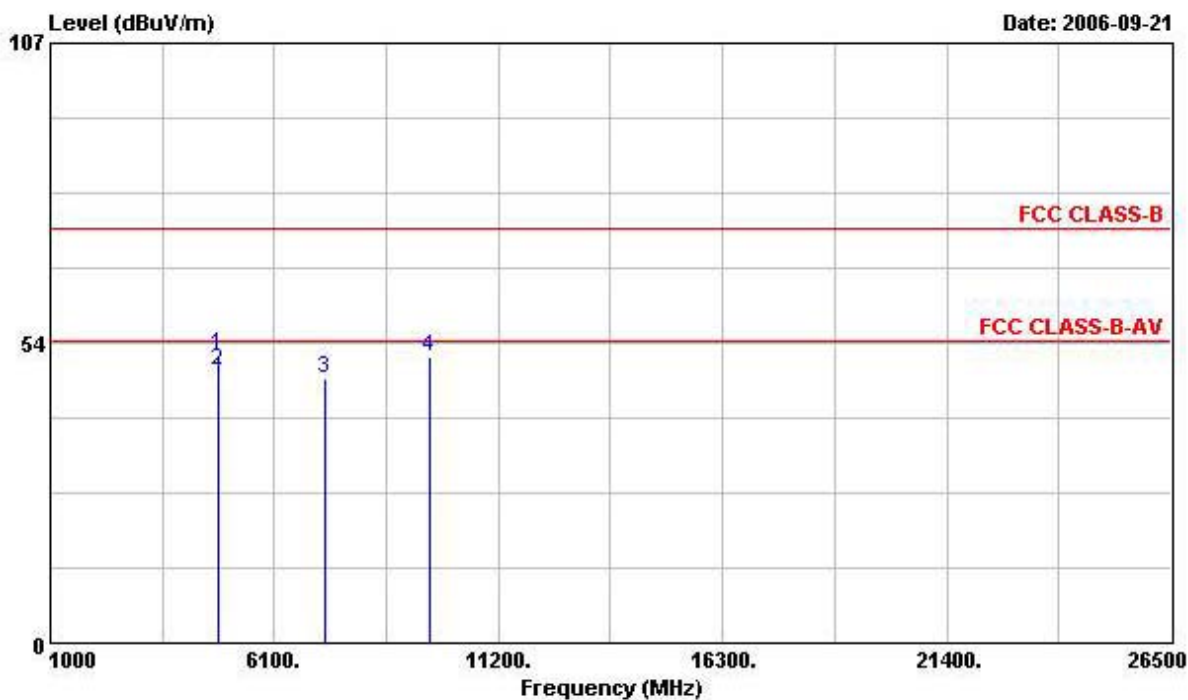

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4824.000	51.56	-22.44	74.00	47.65	33.09	3.15	32.32	PEAK
2 @	4824.000	48.55	-5.45	54.00	44.63	33.09	3.15	32.32	Average
3	7236.000	47.05	-26.95	74.00	39.49	35.98	4.15	32.57	PEAK
4	9648.000	50.95	-23.05	74.00	40.75	38.58	4.42	32.80	PEAK


Vertical

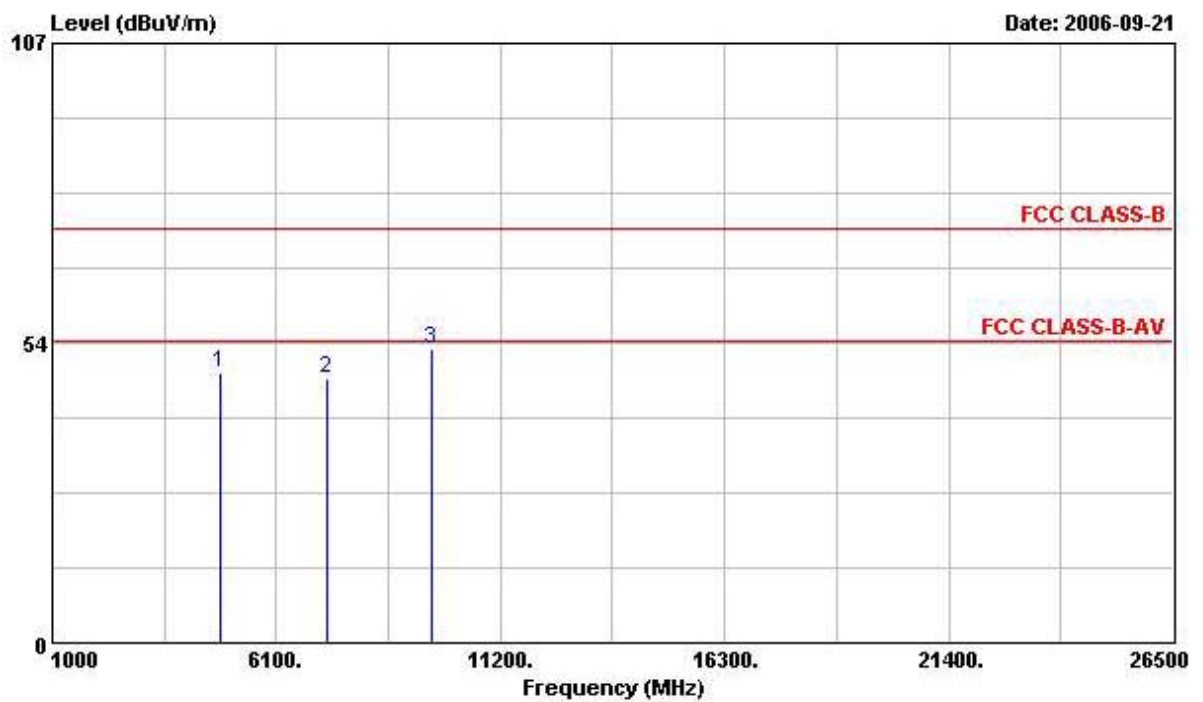

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4824.000	48.34	-25.66	74.00	44.42	33.09	3.15	32.32	Peak
2	7236.000	47.29	-26.71	74.00	39.73	35.98	4.15	32.57	PEAK
3	9648.000	52.40	-21.60	74.00	42.20	38.58	4.42	32.80	PEAK


Temperature	27°C	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	Laser (24keys keypad) WLAN+BT+Mode 802.11b CH 06& BT CH 35

Horizontal

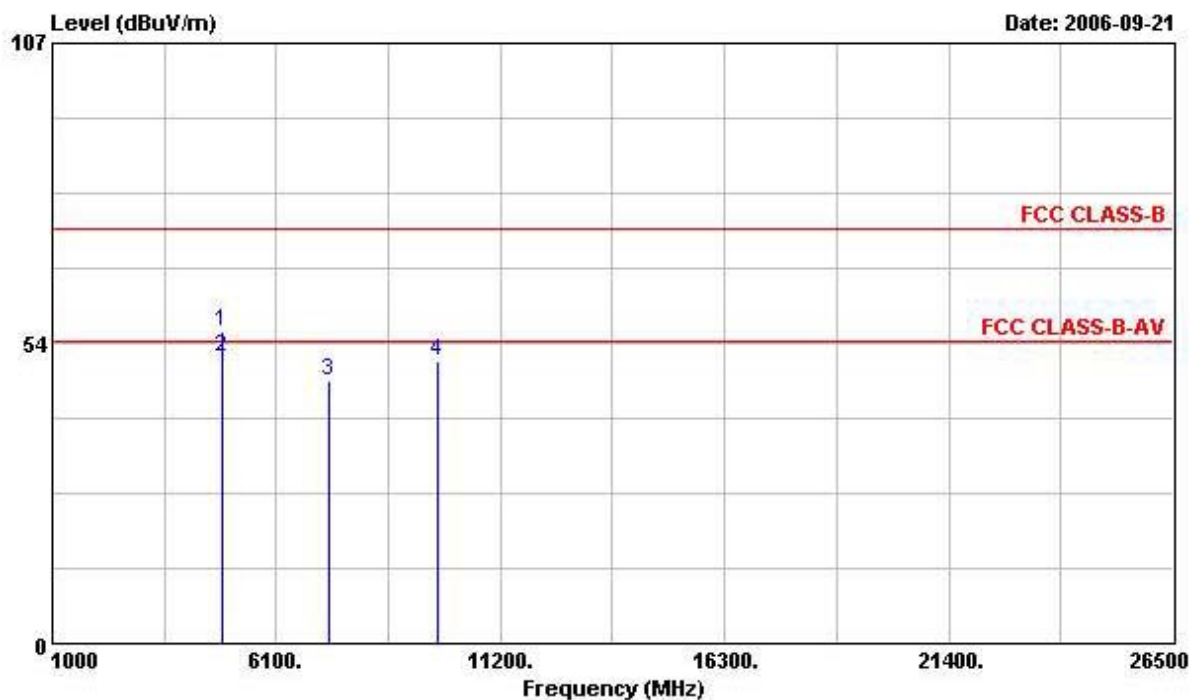

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBUV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBUV/m	dBuV	dB/m	dB	dB
1	4876.000	55.79	-18.21	74.00	51.74	33.18	3.16	32.30 PEAK
2 @	4876.000	51.03	-2.97	54.00	46.98	33.18	3.16	32.30 Average
3	7311.000	46.84	-27.16	74.00	39.10	36.14	4.18	32.59 PEAK
4	9748.000	50.17	-23.83	74.00	39.75	38.77	4.44	32.80 PEAK


Vertical

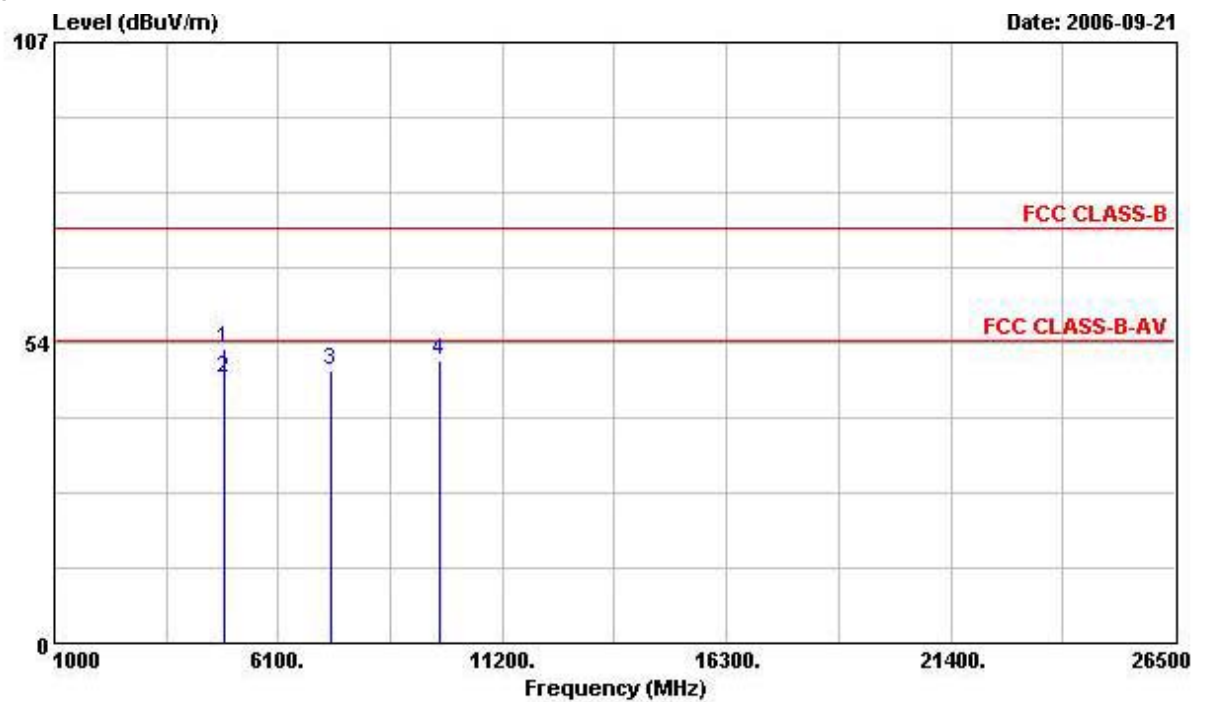

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4876.000	52.58	-21.42	74.00	48.53	33.18	3.16	32.30	PEAK
2 @	4876.000	47.17	-6.83	54.00	43.12	33.18	3.16	32.30	Average
3	7311.000	48.50	-25.50	74.00	40.76	36.14	4.18	32.59	PEAK
4	9748.000	50.17	-23.83	74.00	39.76	38.77	4.44	32.80	PEAK


Temperature	27°C	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	Laser (24keys keypad) WLAN+BT+Mode 802.11b CH 11 & BT CH 60

Horizontal

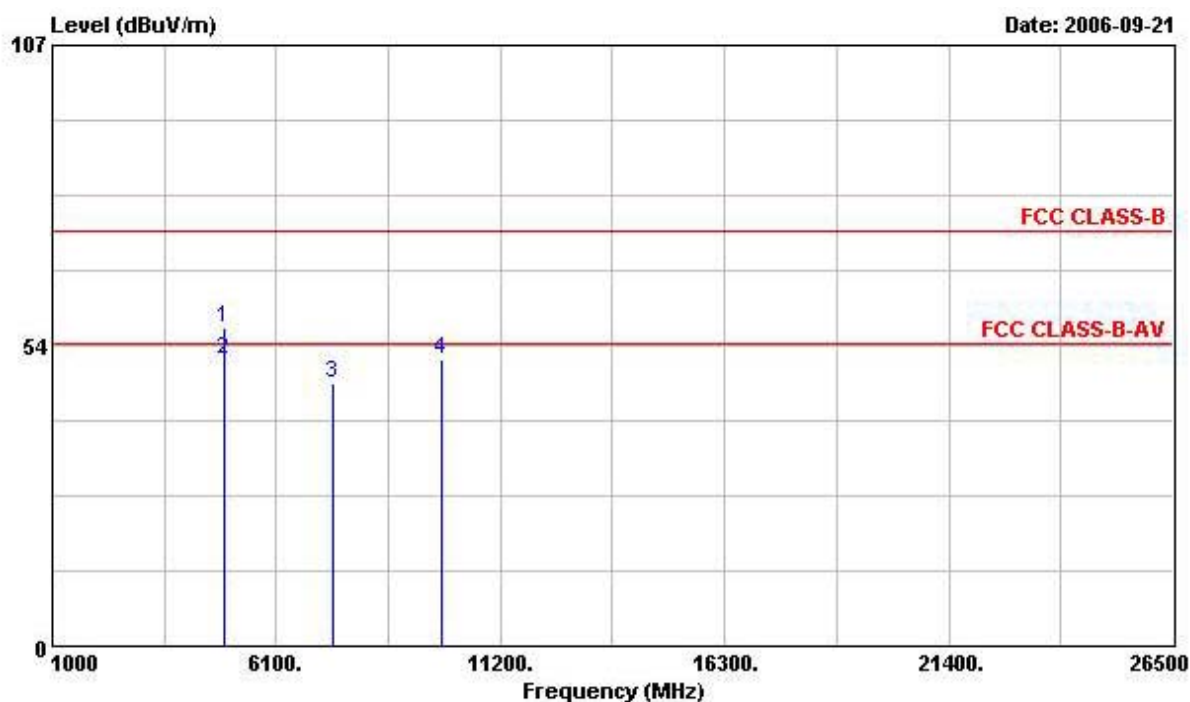

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	4924.000	56.73	-17.27	74.00	52.54	33.28	3.19	32.28
2 @	4924.000	51.13	-2.87	54.00	46.94	33.28	3.19	32.28
3	7386.000	46.84	-27.16	74.00	38.91	36.35	4.21	32.63
4	9848.000	51.04	-22.96	74.00	40.43	38.92	4.48	32.79

Vertical

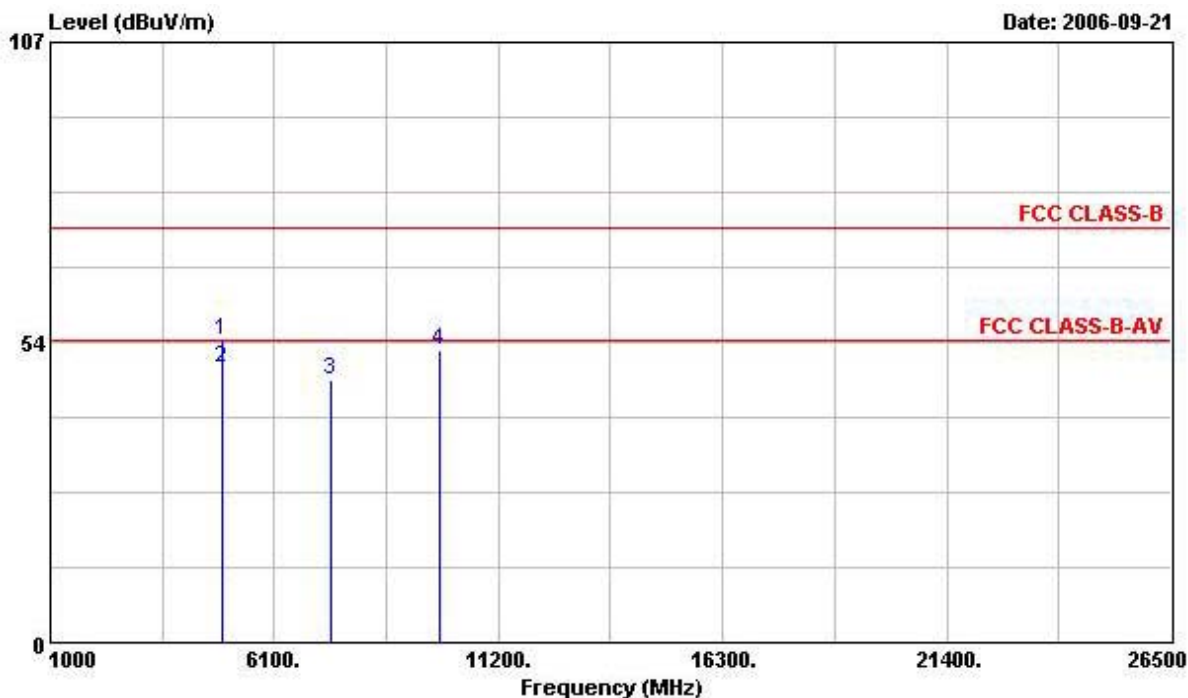

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	4924.000	53.79	-20.21	74.00	49.60	33.28	3.19	32.28 PEAK
2 @	4924.000	48.81	-5.19	54.00	44.62	33.28	3.19	32.28 Average
3	7386.000	46.67	-27.33	74.00	38.74	36.35	4.21	32.63 PEAK
4	9848.000	52.12	-21.88	74.00	41.51	38.92	4.48	32.79 PEAK

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	27°C	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	CCD (39keys keypad) WLAN+ RFID+Mode / 802.11b CH01

Horizontal

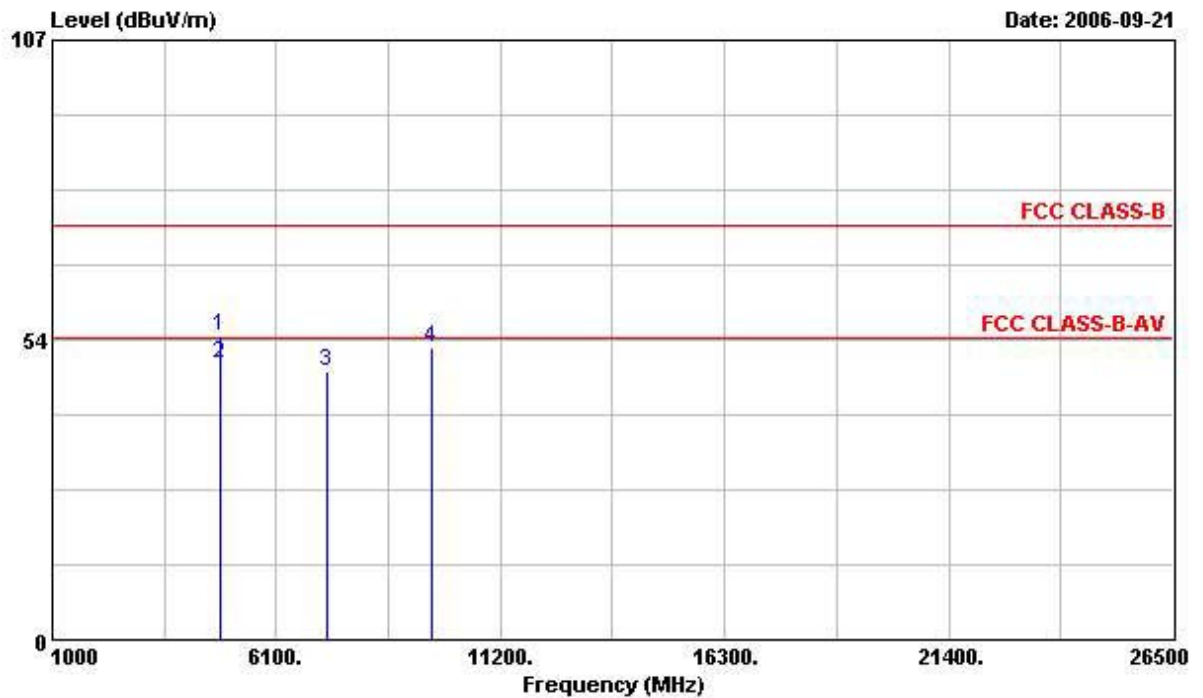

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4824.000	54.13	-19.87	74.00	50.21	33.09	3.15	32.32	PEAK
2 @	4824.000	49.38	-4.62	54.00	45.46	33.09	3.15	32.32	Average
3	7236.000	47.96	-26.04	74.00	40.40	35.98	4.15	32.57	PEAK
4	9648.000	52.04	-21.96	74.00	41.85	38.58	4.42	32.80	PEAK


Vertical

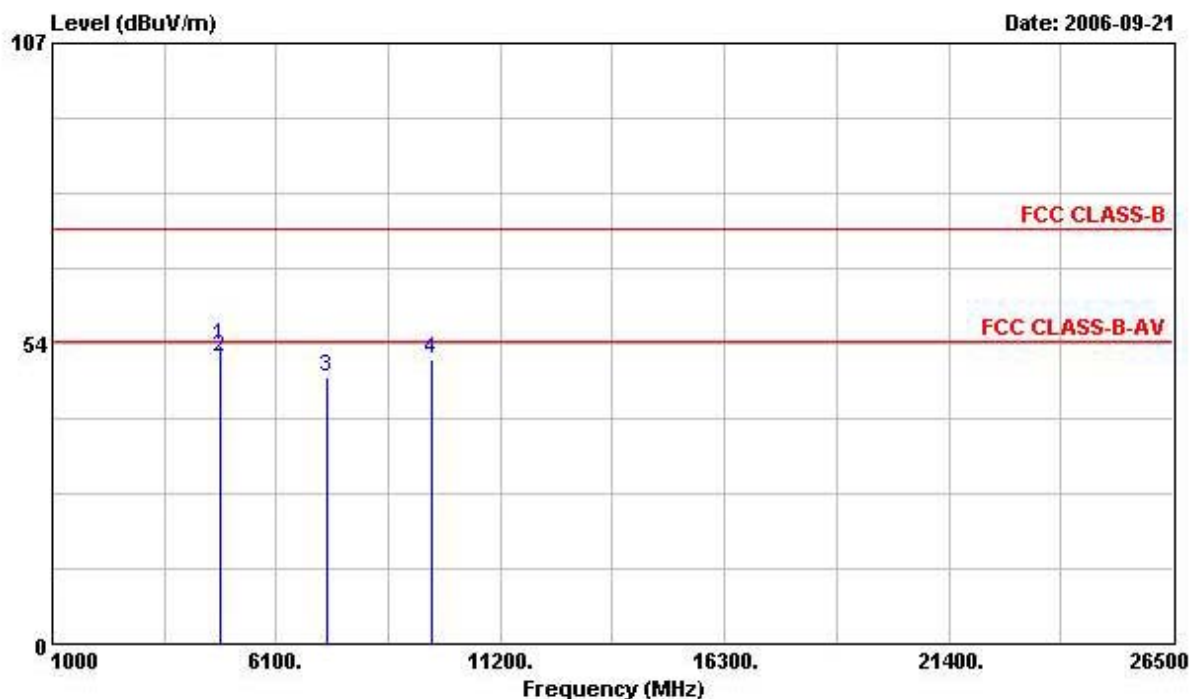

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	4824.000	53.29	-20.71	74.00	49.38	33.09	3.15	32.32 PEAK
2	4824.000	51.00	-3.00	54.00	47.08	33.09	3.15	32.32 Average
3	7236.000	47.68	-26.32	74.00	40.11	35.98	4.15	32.57 PEAK
4	9648.000	50.76	-23.24	74.00	40.56	38.58	4.42	32.80 PEAK


Temperature	27°C	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	CCD (39keys keypad) WLAN+ RFID+Mode/ 802.11b CH06

Horizontal

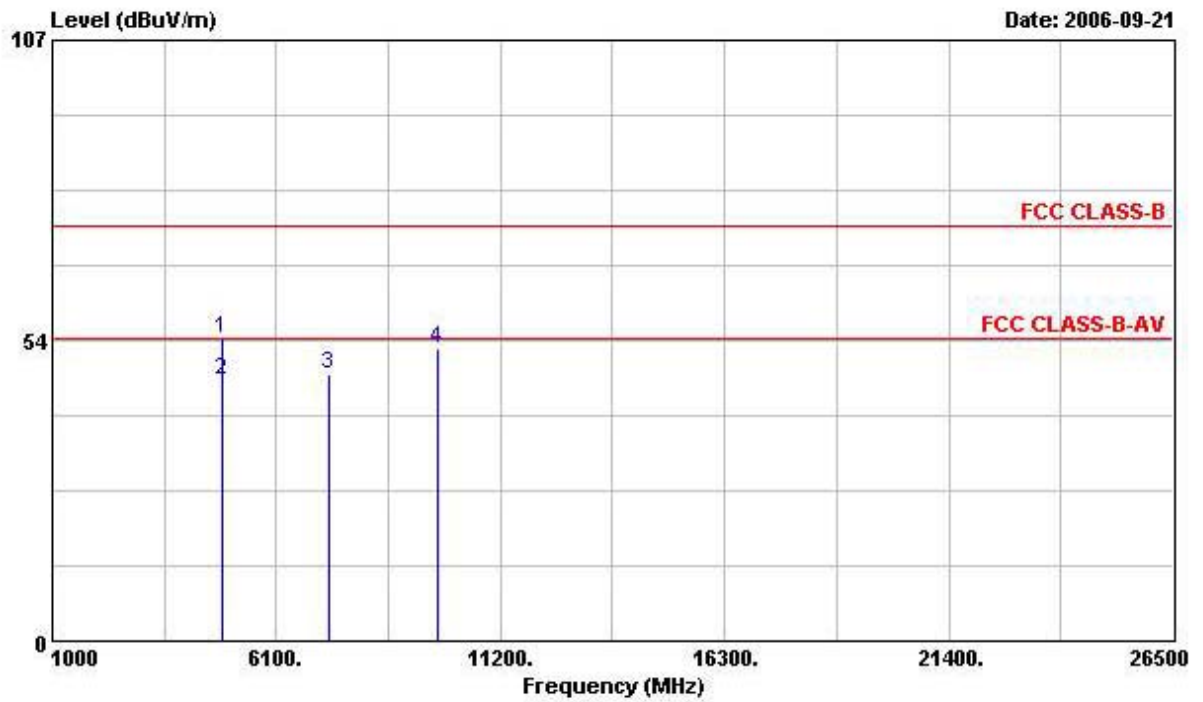

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4876.000	53.91	-20.09	74.00	49.86	33.18	3.16	32.30	PEAK
2 @	4876.000	46.35	-7.65	54.00	42.30	33.18	3.16	32.30	Average
3	7311.000	47.61	-26.39	74.00	39.88	36.14	4.18	32.59	PEAK
4	9748.000	52.11	-21.89	74.00	41.70	38.77	4.44	32.80	PEAK


Vertical

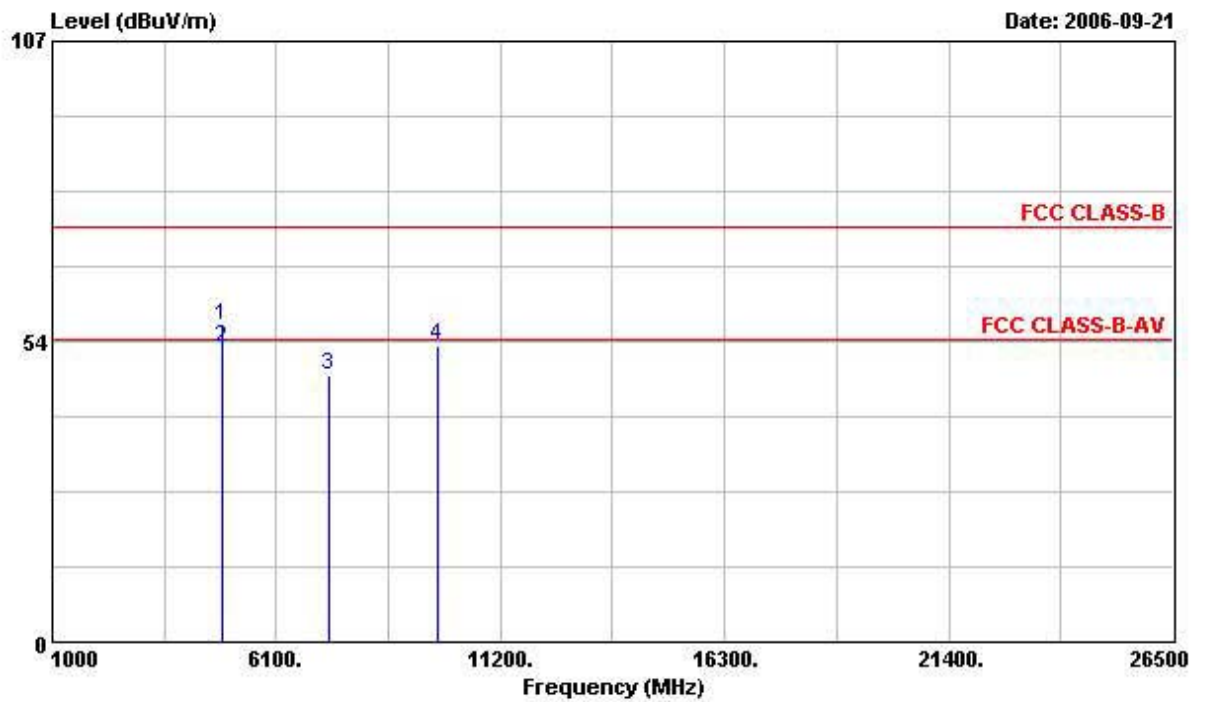

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4876.000	56.20	-17.80	74.00	52.16	33.18	3.16	32.30	PEAK
2 @	4876.000	52.45	-1.55	54.00	48.40	33.18	3.16	32.30	Average
3	7311.000	47.66	-26.34	74.00	39.92	36.14	4.18	32.59	PEAK
4	9748.000	52.66	-21.34	74.00	42.24	38.77	4.44	32.80	PEAK


Temperature	27°C	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	CCD (39keys keypad) WLAN+ RFID+Mode / 802.11b CH11

Horizontal

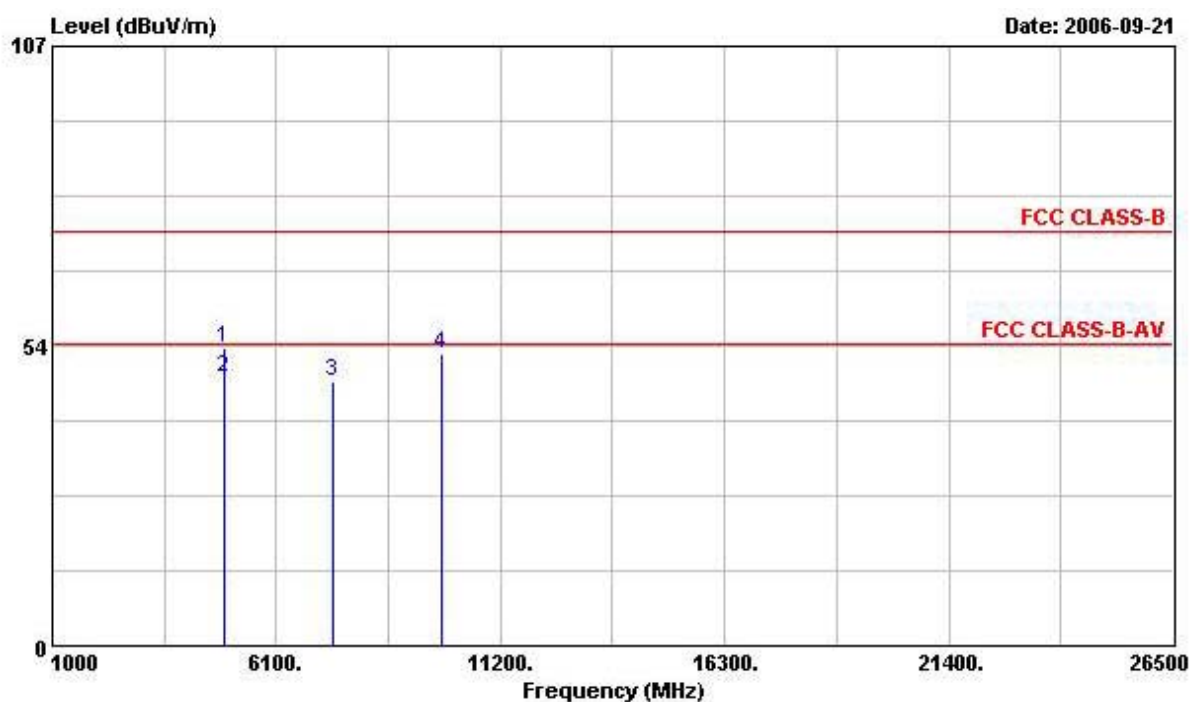

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	
1	4924.000	53.27	-20.73	74.00	49.08	33.28	3.19	32.28 PEAK
2	4924.000	47.71	-6.29	54.00	43.52	33.28	3.19	32.28 Average
3	7386.000	47.32	-26.68	74.00	39.39	36.35	4.21	32.63 PEAK
4	9848.000	52.25	-21.75	74.00	41.64	38.92	4.48	32.79 PEAK

Vertical

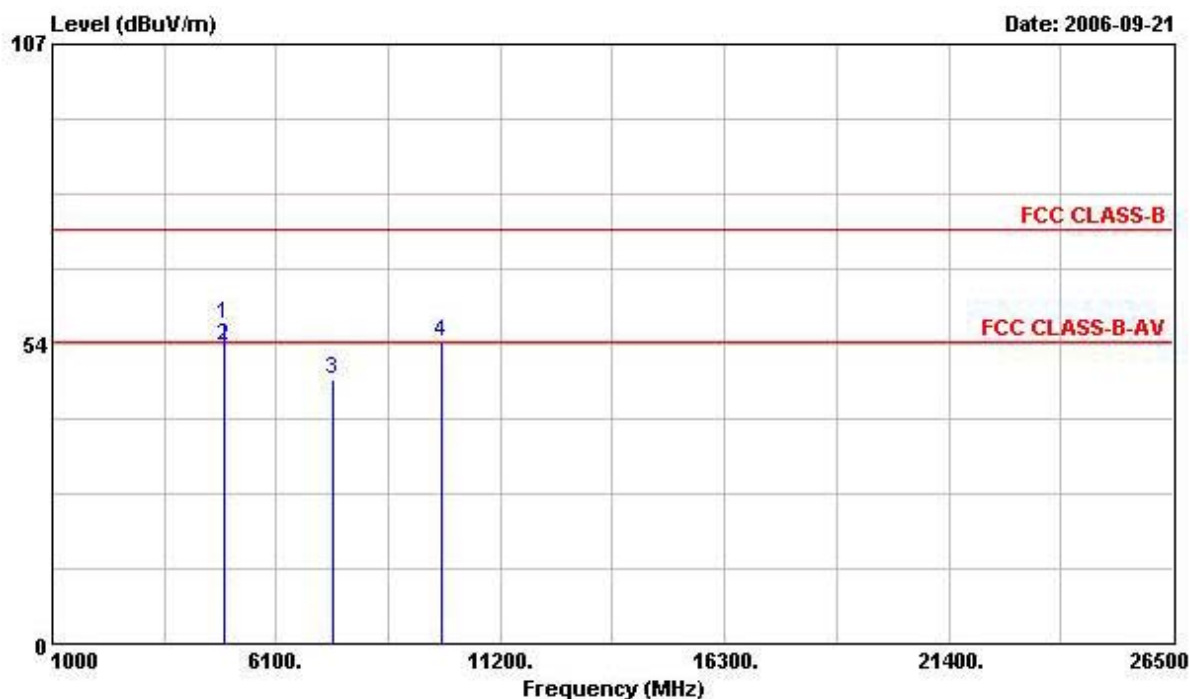

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	4924.000	57.14	-16.86	74.00	52.95	33.28	3.19	32.28	PEAK
2	4924.000	52.98	-1.02	54.00	48.79	33.28	3.19	32.28	Average
3	7386.000	47.25	-26.75	74.00	39.32	36.35	4.21	32.63	PEAK
4	9848.000	53.99	-20.01	74.00	43.38	38.92	4.48	32.79	PEAK

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100 KHz /100 KHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	27°C	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	Laser (24keys keypad) WLAN+BT+Mode 802.11b CH 01& BT CH 10; 802.11b CH 11& BT CH 78

WLAN CH 01& BT CH 10

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2374.980	57.60	-16.40	74.00	27.49	28.26	1.85	0.00	Peak
2 @	2413.740	105.00				28.33	1.88	0.00	Peak
1 @	2374.980	48.15	-5.85	54.00	18.04	28.26	1.85	0.00	Average
2 @	2413.740	100.15				28.33	1.88	0.00	Average

WLAN CH 11& BT CH 78

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	2463.900	104.26				28.43	1.94	0.00	Peak
2	2483.500	62.29	-11.71	74.00	31.89	28.47	1.94	0.00	Peak
1 @	2463.900	99.01				28.43	1.94	0.00	Average
2 @	2483.500	52.51	-1.49	54.00	22.11	28.47	1.94	0.00	Average

Temperature	27°C	Humidity	51%
Test Engineer	Vic Hsiao	Configurations	CCD (39keys keypad) WLAN+ RFID+ Mode 80.211b CH 01& CH11

80.211b CH 01

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	2374.220	58.52	-15.48	74.00	28.41	28.26	1.85	0.00 Peak
2 @	2410.130	104.72				28.33	1.88	0.00 Peak
1 @	2374.220	48.47	-5.53	54.00	18.36	28.26	1.85	0.00 Average
2 @	2410.130	100.03				28.33	1.88	0.00 Average

80.211b CH 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1 @	2460.290	102.03				28.43	1.91	0.00 Peak
2	2483.500	56.06	-17.94	74.00	25.66	28.47	1.94	0.00 Peak
1 @	2460.290	97.22				28.43	1.91	0.00 Average
2 @	2483.500	44.84	-9.16	54.00	14.44	28.47	1.94	0.00 Average

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Receiving maximum band edge emissions are Vertical Polarization /Horizontal Polarization.

For Emission not in Restricted Band

Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz

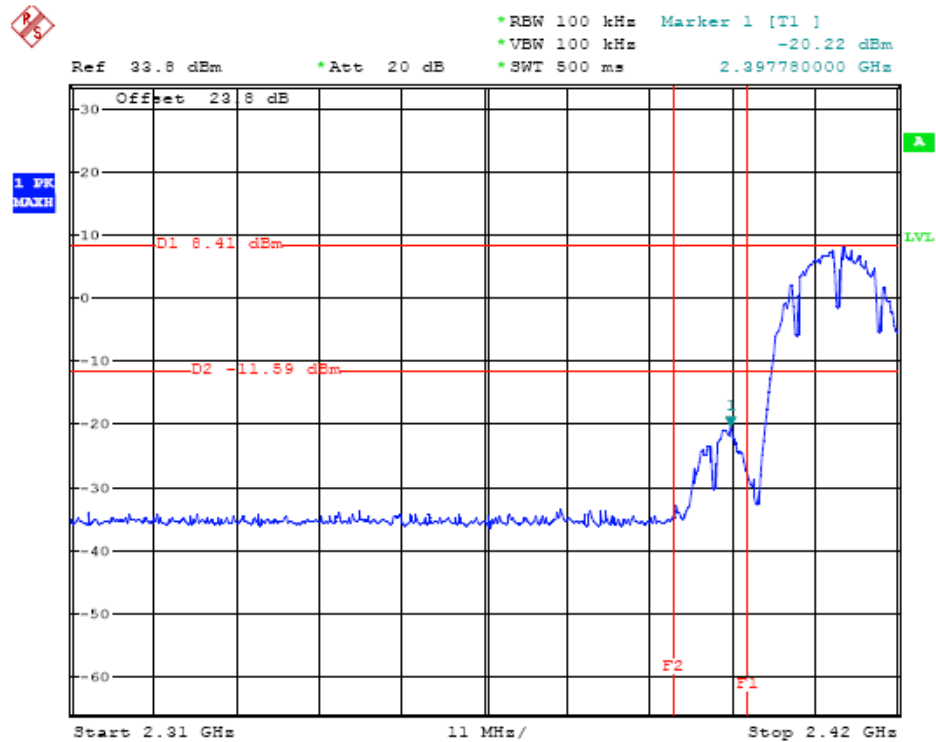

High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz

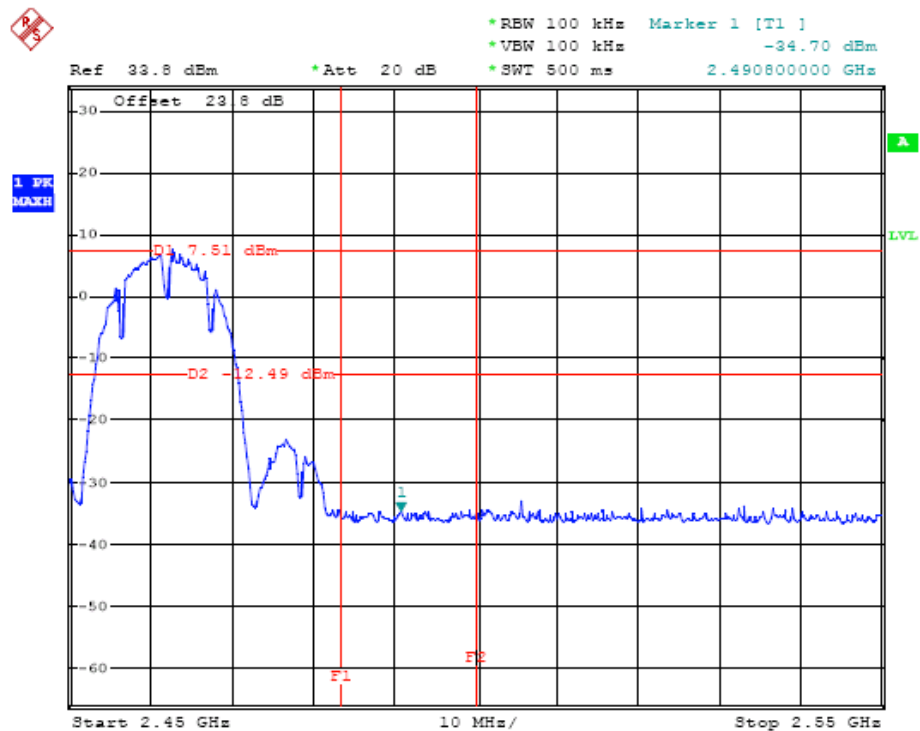

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, all antenna connectors comply with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz - 2.75GHz	Feb. 22, 2006	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz - 30MHz	Dec. 19, 2005	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9708-1839	9kHz - 30MHz	Mar. 18, 2006	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz - 30MHz	Apr. 20, 2006	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 15, 2006	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	18667	9 kHz - 2 GHz	Jan. 18, 2006	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 29, 2006	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 30, 2005	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz - 1 GHz	Jul. 24, 2006	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6903	1GHz ~ 18GHz	Mar. 15, 2006	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec.02, 2005	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec.02, 2005	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 - 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Nov. 26, 2005	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100764	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 10, 2006	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Dec. 28, 2005	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2005	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 30, 2005	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 30, 2005	Conducted (TH01-HY)
Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Jun. 20, 2006	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 30, 2005	Conducted (TH01-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 16, 2006	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year. NCR: Non-Calibration required.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 24, 2006*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. NVLAP CERTIFICATE OF ACCREDITATION

United States Department of Commerce National Institute of Standards and Technology	
	
Certificate of Accreditation to ISO/IEC 17025:1999	
NVLAP LAB CODE: 200079-0	
Sporton International, Inc. Hwa Ya EMC Laboratory Tao Yuan Hsien 333 TAIWAN	
<i>is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999. Accreditation is granted for specific services, listed on the Scope of Accreditation, for:</i>	
ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS	
2006-01-01 through 2006-12-31 <i>Effective dates</i>	  <i>For the National Institute of Standards and Technology</i>

NVLAP-01C (REV. 2005-05-19)