

RF TEST REPORT



Report No.: FCC IC_SL19040501-SEV-802_Zigbee
Supersede Report No.:None

Applicant	:	Xirgo Technologies, LLC
Product Name	:	XT6264
Model No.	:	XT6264
Test Standard	:	47 CFR 15.247 RSS 247 Issue 2, February 2017
Test Method	:	ANSI C63.10: 2013 RSS Gen Issue 5, April 2018 558074 D01 15.247 Meas Guidance v05r01
FCC ID	:	GKM-XT6264
IC ID	:	10281A-XT6264
Dates of test	:	06/13/2019-06/20/2019
Issue Date	:	06/20/2019
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification [X] Equipment did not comply with the specification []		

This Test Report is Issued Under the Authority of:

Gary Chou	Chen Ge
Test Engineer	Engineer Reviewer

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRR, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY	4
2	EXECUTIVE SUMMARY	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION	5
5	MODIFICATION	5
6	EUT INFORMATION	6
6.1	EUT Description	6
6.2	Radio Description	6
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....	7
7.1	Supporting Equipment	7
7.2	Cabling Description	7
7.3	Test Software Description	7
8	TEST SUMMARY	8
9	MEASUREMENT UNCERTAINTY	9
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
10.1	Antenna Requirement.....	10
10.2	Conducted Emissions.....	11
10.3	6dB & 99% Bandwidth.....	14
10.4	Output Power	18
10.5	Band Edge	22
10.6	Peak Spectral Density	24
10.7	Radiated Spurious Emissions below 1GHz	28
10.8	Radiated Spurious Emissions between 1GHz – 25GHz	30
ANNEX A. TEST INSTRUMENT		33
ANNEX B. SIEMIC ACCREDITATION		34

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC IC_SL19040501-SEV-802_Zigbee	None	Original	06/20/2019

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Xirgo Technologies, LLC
Product: XT6264
Model: XT6264

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	:	Xirgo Technologies, LLC
Applicant Address	:	188 Camino Ruiz, Camarillo CA 93012
Manufacturer Name	:	Xirgo Technologies, LLC
Manufacturer Address	:	188 Camino Ruiz, Camarillo CA 93012

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	540430
IC Test Site No.	4842D
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	XT6264
Model No.	XT6264
Trade Name	Xirgo
Serial No.	MD191700019
Input Power	24 Vac, 60Hz
Date of EUT received	06/08/2019
Equipment Class/ Category	DTS
Port/Connectors	N/A

6.2 Radio Description

Spec for Zigbee:

Radio Type	Zigbee
Operating Frequency	2405MHz-2480MHz
Modulation	DSSS
Channel Spacing	5 MHz
Antenna Type	CHIP
Antenna Gain	1.5 dBi
Antenna Connector Type	N/A

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	PP01L Latitude E5440	F1WPF12	Dell	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
USB-RS232	LAPTOP	USB	EUT	RS232	1	Unshielded	-

7.3 Test Software Description

Test Item	Software	Description
RF Testing	PUTTY	Set the EUT to transmit continuously in diferent test modes and channels

8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Antenna Requirement	FCC	15.203	FCC	ANSI C63.10 - 2013	<input checked="" type="checkbox"/> Pass
	IC	-	IC	558074 D01 15.247 Meas. Guidance v05	<input type="checkbox"/> N/A
AC Conducted Emissions	FCC	15.207(a)	FCC	ANSI C63.10:2013	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen 8.8	IC	RSS Gen Issue 5: 2018	<input type="checkbox"/> N/A

DTS Band Requirement

Test Item	Test standard		Test Method/Procedure		Pass / Fail
99% Occupied Bandwidth	-	-	-	-	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen 6.6	IC	RSS Gen Issue 5: 2018	<input type="checkbox"/> N/A
6dB Bandwidth	FCC	15.247(a)(2)	FCC	ANSI C63.10:2013	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.2.1)	IC	558074 D01 15.247 Meas Guidance v05r01	<input type="checkbox"/> N/A
Band Edge and Radiated Spurious Emissions	FCC	15.247(d)	FCC	ANSI C63.10:2013	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.5)	IC	558074 D01 15.247 Meas Guidance v05r01	<input type="checkbox"/> N/A
Output Power	FCC	15.247(b)	FCC	ANSI C63.10:2013	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.4.4)	IC	558074 D01 15.247 Meas Guidance v05r01	<input type="checkbox"/> N/A
Receiver Spurious Emissions	IC	RSS Gen (4.8)	IC	RSS Gen Issue 5: 2018	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Antenna Gain > 6 dBi	FCC	15.247(e)	FCC	-	<input type="checkbox"/> Pass
	IC	-	IC	-	<input checked="" type="checkbox"/> N/A
Power Spectral Density	FCC	15.247(e)	FCC	ANSI C63.10:2013	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.2.2)	IC	558074 D01 15.247 Meas Guidance v05r01	<input type="checkbox"/> N/A
RF Exposure requirement	FCC	15.247(i)	FCC	-	<input type="checkbox"/> Pass
	IC	RSS Gen(5.5)	IC	RSS Gen Issue 5: 2018	<input checked="" type="checkbox"/> N/A
Remark	<ol style="list-style-type: none"> All measurement uncertainties do not take into consideration for all presented test results. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. 				

9 Measurement Uncertainty

Emissions			
Test Item	Frequency Range	Description	Uncertainty
AC Conducted Emissions	150KHz – 30MHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±3.5dB
RF conducted measurement	150KHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±0.95dB
Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	±6dB
Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	±6dB

10 Measurements, Examination and Derived Results


10.1 Antenna Requirement

Spec	Requirement	Applicable
§15.203	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <ul style="list-style-type: none"> a) Antenna must be permanently attached to the device. b) The antenna must use a unique type of connector to attach to the device. c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device. 	<input checked="" type="checkbox"/>
Remark	Antenna is permanently attached.	
Result	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL	

10.2 Conducted Emissions

Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

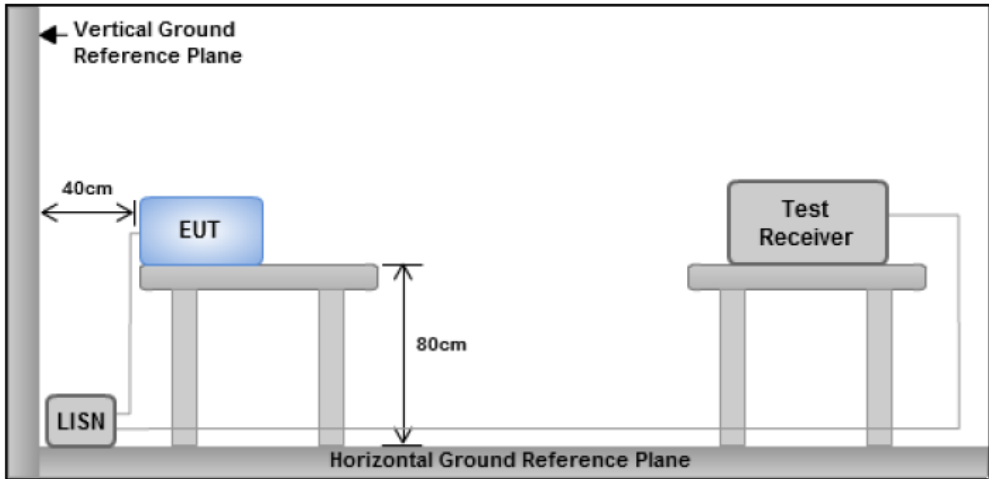
Spec	Item	Requirement	Applicable
FCC 15.207 RSS-GEN Section 8.8	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	<input checked="" type="checkbox"/>
Test Setup	 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</p>		
Procedure	<ul style="list-style-type: none"> - The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. - The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment was powered separately from another main supply. 		
Remark	N/A		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Conducted Emission Test Results


Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	21	Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
	Humidity (%):	42		
	Atmospheric(mbar):	1021		
Mains Power:	24Vac, 60Hz			
Tested by:	Gary Chou			
Test Date:	06/13/2019			
Remarks	Line			

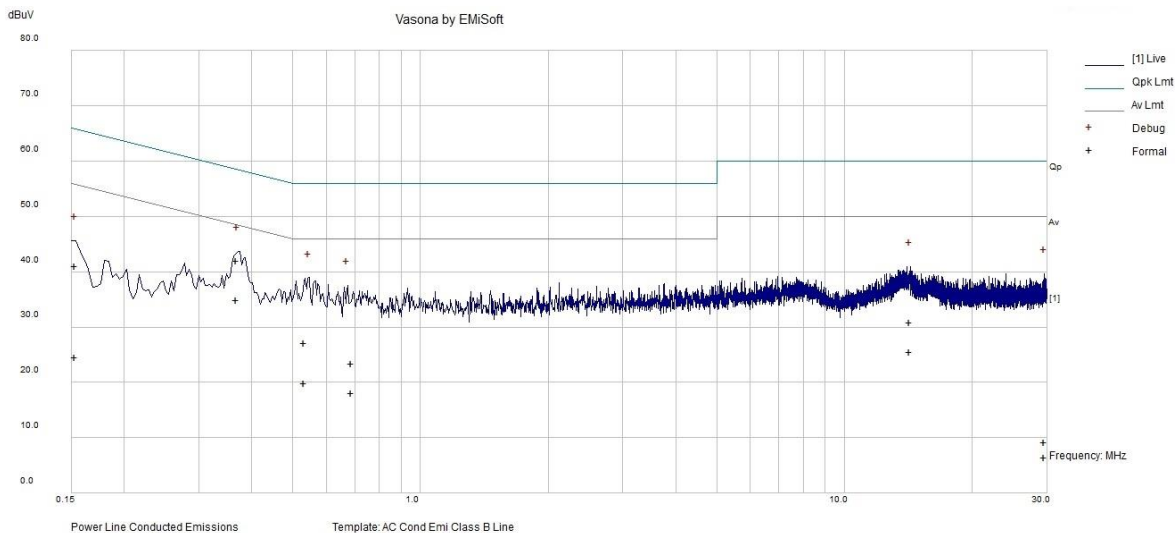

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
0.37	34.65	7.29	0.04	41.98	Quasi Peak	Line	58.53	-16.55	Pass
0.53	19.79	7.38	0.04	27.21	Quasi Peak	Line	56	-28.79	Pass
0.69	15.92	7.51	0.04	23.47	Quasi Peak	Line	56	-32.53	Pass
14.30	21.66	8.86	0.34	30.86	Quasi Peak	Line	60	-29.14	Pass
0.15	33.93	7.12	0.05	41.1	Quasi Peak	Line	65.83	-24.74	Pass
29.65	-0.45	9.05	0.61	9.21	Quasi Peak	Line	60	-50.79	Pass
0.37	27.53	7.29	0.04	34.86	Average	Line	48.53	-13.67	Pass
0.53	12.51	7.38	0.04	19.93	Average	Line	46	-26.07	Pass
0.69	10.61	7.51	0.04	18.15	Average	Line	46	-27.85	Pass
14.30	16.4	8.86	0.34	25.6	Average	Line	50	-24.4	Pass
0.15	17.39	7.12	0.05	24.56	Average	Line	55.83	-31.28	Pass
29.65	-3.28	9.05	0.61	6.38	Average	Line	50	-43.62	Pass

Conducted Emission Test Results


Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	21	Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
	Humidity (%):	42		
	Atmospheric(mbar):	1021		
Mains Power:	24Vac, 60Hz			
Tested by:	Gary Chou			
Test Date:	06/13/2019			
Remarks	Neutral			

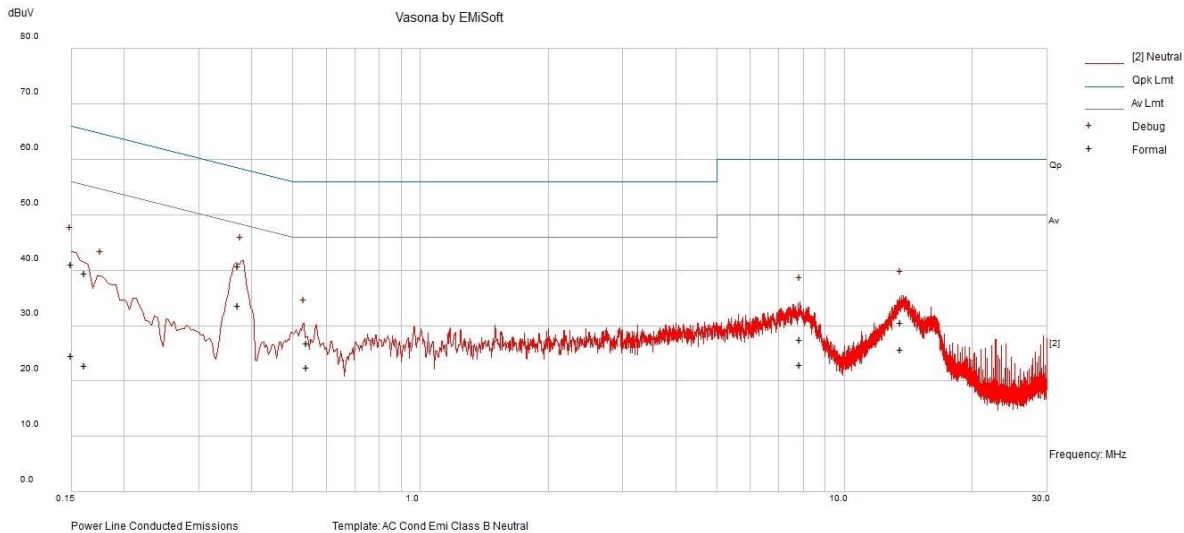

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
0.37	33.46	7.29	0.03	40.78	Quasi Peak	Neutral	58.47	-17.69	Pass
0.15	33.9	7.11	0.04	41.05	Quasi Peak	Neutral	65.98	-24.93	Pass
13.62	21.44	8.83	0.33	30.6	Quasi Peak	Neutral	60	-29.4	Pass
0.54	19.37	7.39	0.03	26.79	Quasi Peak	Neutral	56	-29.21	Pass
0.16	32.32	7.13	0.04	39.49	Quasi Peak	Neutral	65.35	-25.87	Pass
7.88	19.1	8.27	0.17	27.55	Quasi Peak	Neutral	60	-32.45	Pass
0.37	26.39	7.29	0.03	33.71	Average	Neutral	48.47	-14.76	Pass
0.15	17.34	7.11	0.04	24.49	Average	Neutral	55.98	-31.48	Pass
13.62	16.51	8.83	0.33	25.67	Average	Neutral	50	-24.33	Pass
0.54	15.13	7.39	0.03	22.54	Average	Neutral	46	-23.46	Pass
0.16	15.68	7.13	0.04	22.85	Average	Neutral	55.35	-32.5	Pass
7.88	14.48	8.27	0.17	22.92	Average	Neutral	50	-27.08	Pass

10.3 6dB & 99% Bandwidth

Requirement(s):

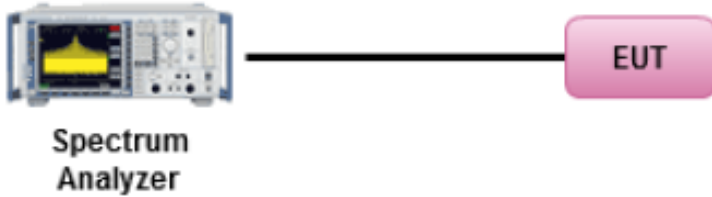Spec	Requirement	Applicable									
§ 15.247 RSS247 (5.2.1)	6dB BW≥500KHz;	<input checked="" type="checkbox"/>									
RSS Gen 4.6.1	The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth	<input checked="" type="checkbox"/>									
Test Setup											
Test Procedure	<p>558074 D01 DTS Meas Guidance v05r01, 8.2 DTS bandwidth ANSI C63.10, 11.8</p> <p><u>6dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> - Set RBW = 100 kHz. - Set the video bandwidth (VBW) ≥ 3 x RBW. - Detector = Peak. - Trace mode = max hold. - Sweep = auto couple. - Allow the trace to stabilize. - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. 										
Test Date	06/15/2019	<table border="1"> <tr> <td>Environmental condition</td> <td>Temperature</td> <td>23°C</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>42%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1021mbar</td> </tr> </table>	Environmental condition	Temperature	23°C		Relative Humidity	42%		Atmospheric Pressure	1021mbar
Environmental condition	Temperature	23°C									
	Relative Humidity	42%									
	Atmospheric Pressure	1021mbar									
Remark	N/A										
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail										

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes ☐ N/A


Test was done by Gary Chou at RF test site.

Zigbee:

Channel	Channel Frequency (MHz)	OBW	
		99% (MHz)	6dB(MHz)
Low	2405	2.4035	1.586
Mid	2440	2.3951	1.586
High	2480	2.4071	1.577


6dB & 99% Bandwidth Test Plots

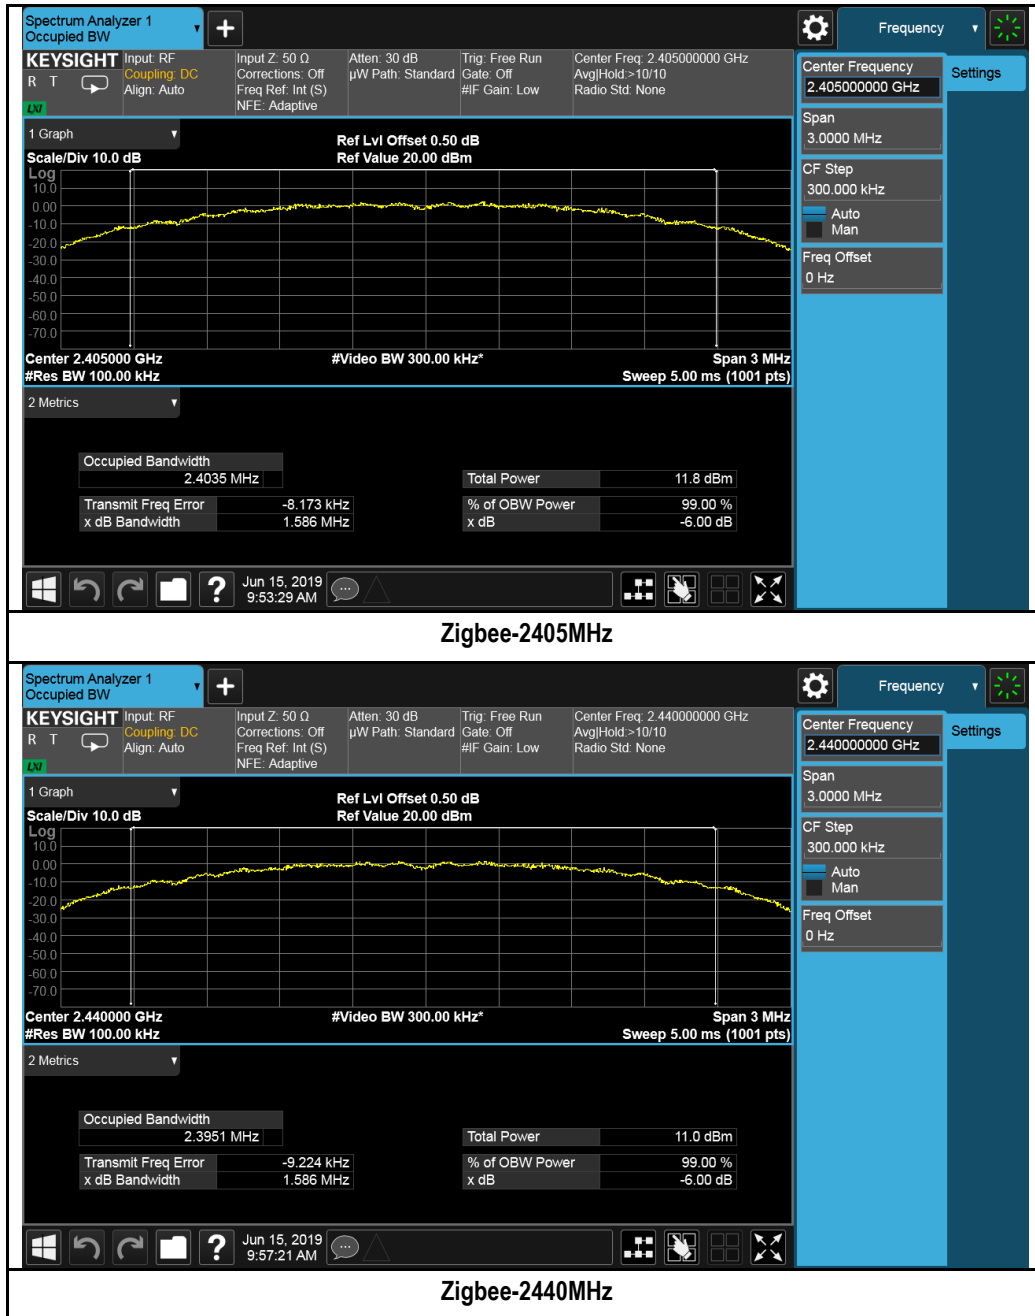

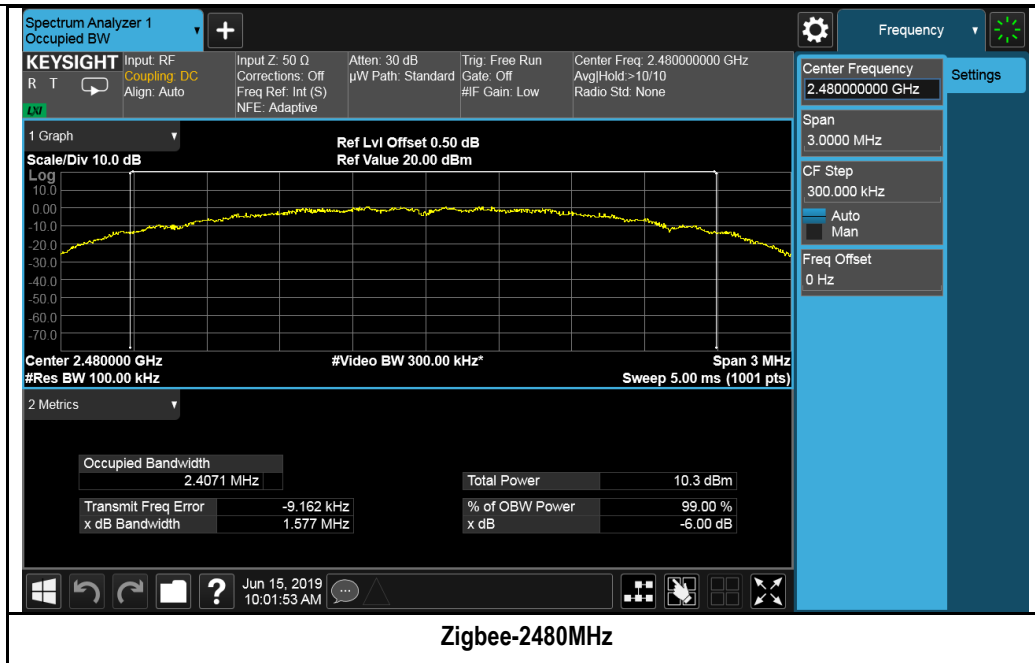

10.4 Output Power

Requirement(s):

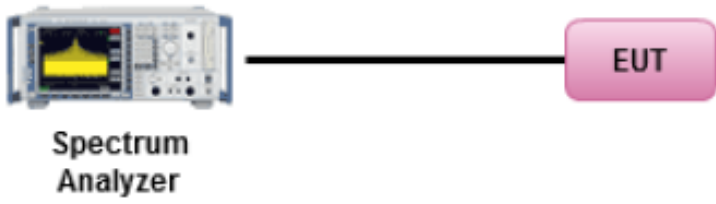Spec	Item	Requirement	Applicable
§ 15.247 RSS247 (5.4.4)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤ 1 Watt	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS Meas Guidance v05r01, 8.3.2.2 ANSI C63.10, 11.9.1.1</p> <p><u>Measurement using a Spectrum Analyzer (SA)</u> This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.</p> <p>(a) Set the RBW \geq DTS bandwidth. (b) Set VBW $\geq 3 \times$ RBW. (c) Set span $\geq 3 \times$ RBW (d) Sweep time = auto couple. (e) Detector = peak. (f) Trace mode = max hold. (g) Allow trace to fully stabilize (h) Use peak marker function to determine the peak amplitude level.</p>		
Test Date	06/15/2019	Environmental condition	Temperature 23°C Relative Humidity 44% Atmospheric Pressure 1021mbar
Remark	NONE		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A


Test was done by Gary Chou at RF test site.

Output Power measurement results for Zigbee:

Type	Freq (MHz)	Test mode	CH	Conducted Power (dBm)	Limit (dBm)	Result
Output power	2405	Zigbee	Low	6.46	≤30	Pass
	2440	Zigbee	Mid	5.68	≤30	Pass
	2480	Zigbee	High	5.08	≤30	Pass


Test Plots:

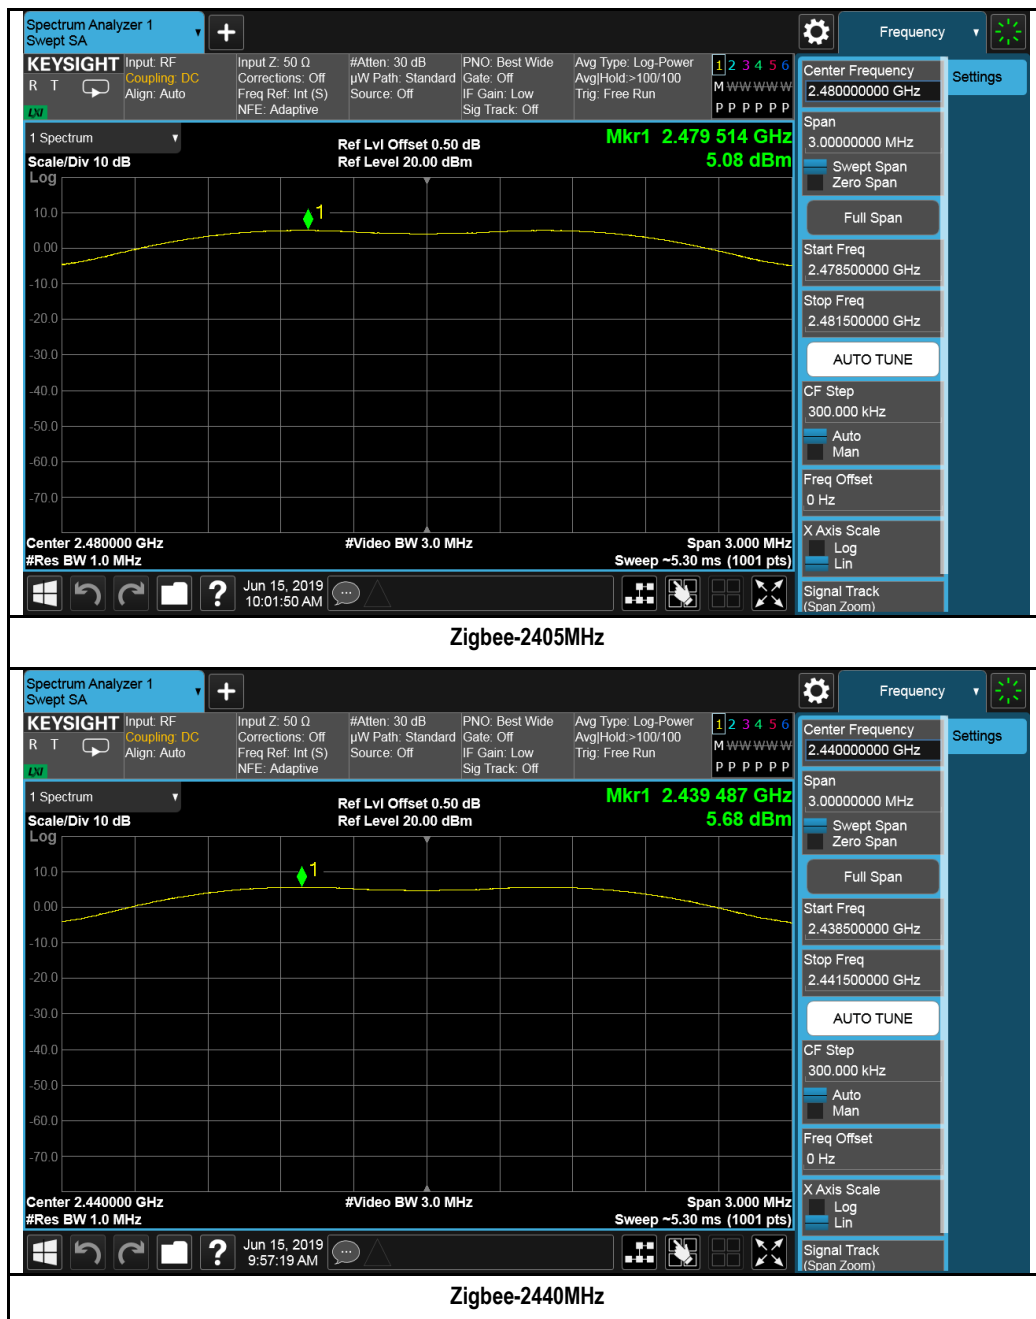

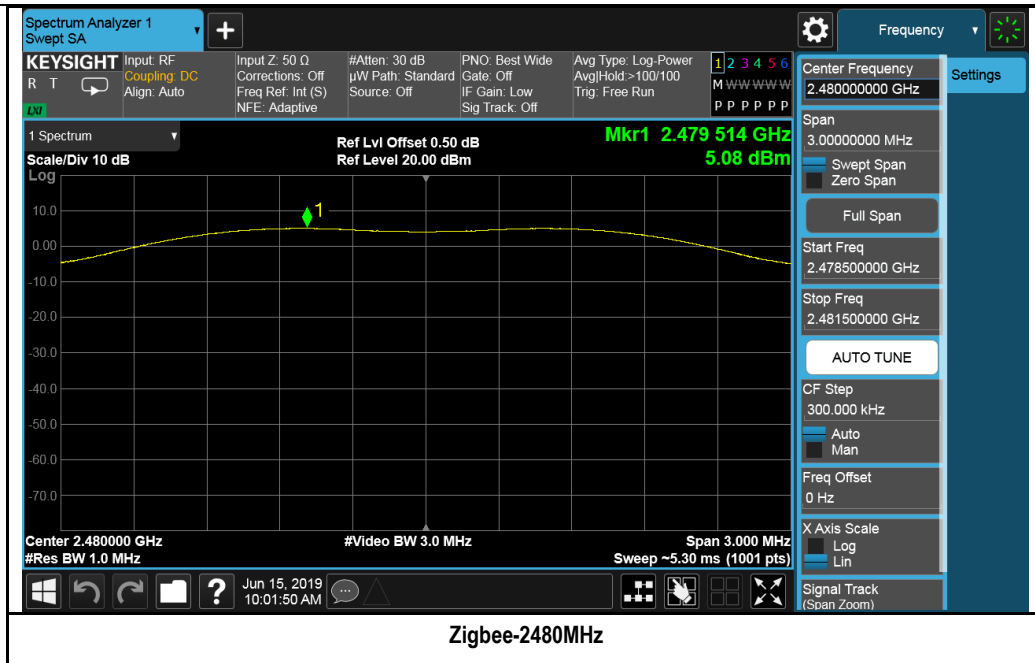

10.5 Band Edge

Requirement(s):

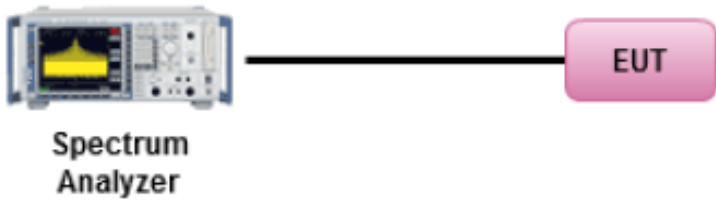
Spec	Item	Requirement	Applicable
§ 15.247 RSS247(5.5)	d)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209 (a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS Meas Guidance v05r01 ANSI C63.10</p> <p><u>Band Edge measurement procedure</u></p> <ol style="list-style-type: none"> 1. Set the EUT to maximum power setting and enable the EUT transmit continuously. 2. Band edge emissions must be at least 30 dB down from the highest emission level within the authorized band as a measured. The attenuation shall be 30 dB instead of 20 dB when Peak conducted output power procedure is used. 3. Change modulation and channel bandwidth then repeat step 1 to 2. 4. Measured and record the results in the test report. 		
Test Date	06/15/2019	Environmental condition	Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☐ Yes ☒ N/A

Test Plot ☒ Yes (See below) ☐ N/A


Test was done by Gary Chou at RF test site.

Test Plots:

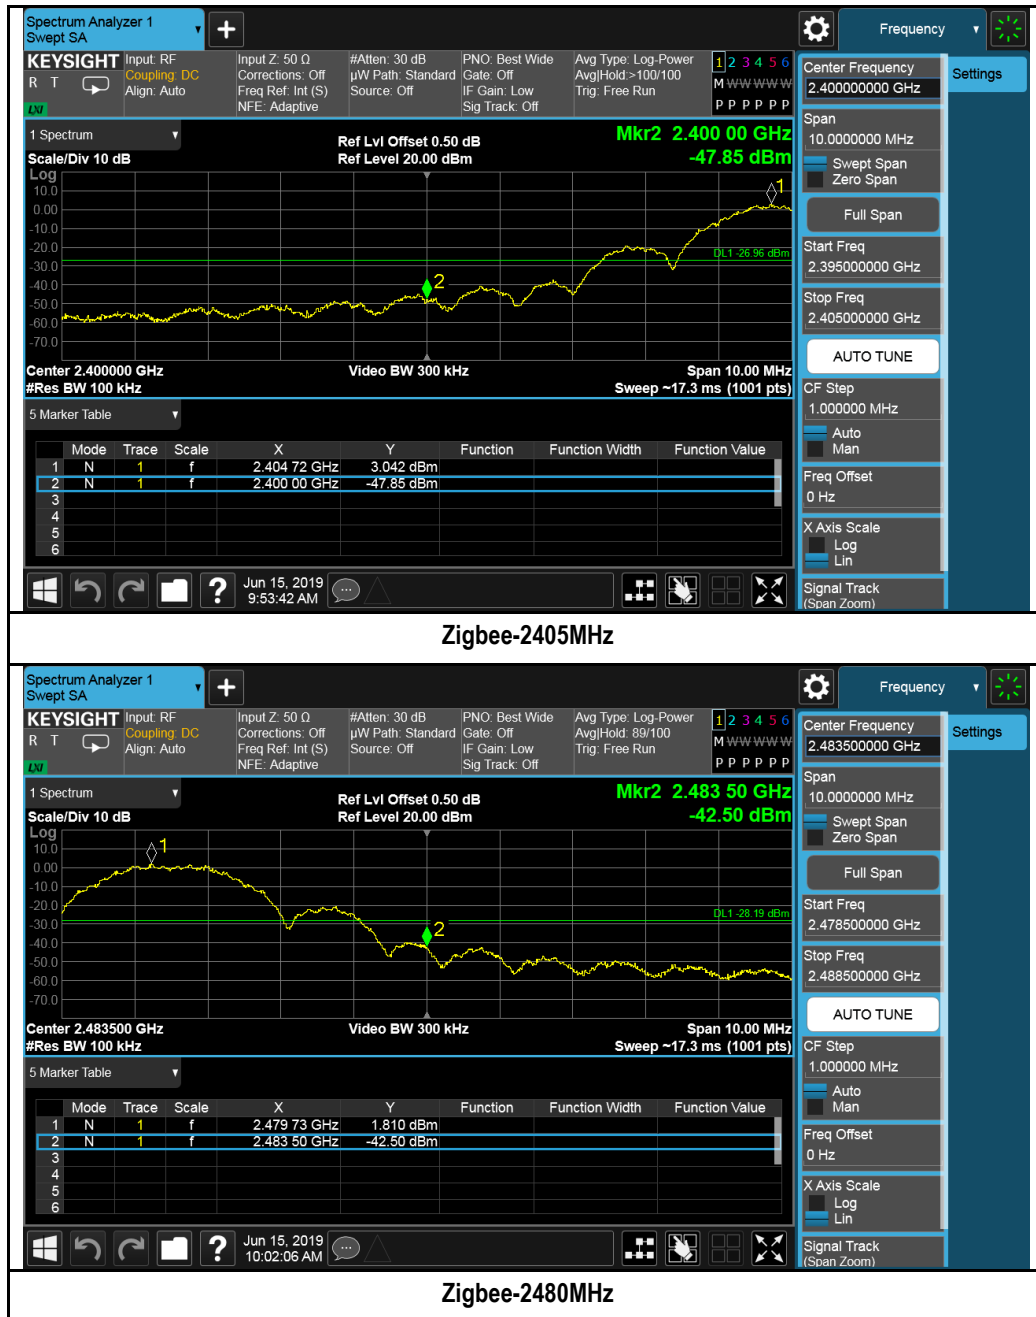

10.6 Peak Spectral Density

Requirement(s):

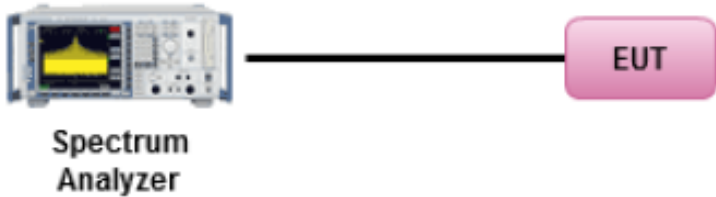Spec	Item	Requirement	Applicable
§ 15.247(e)	e)	DSSS: $\leq 8\text{dBm}/3\text{KHz}$	<input checked="" type="checkbox"/>
RSS247 (5.2.2)	f)	DSSS in hybrid sys with FH turned off: $\leq 8\text{dBm}/3\text{KHz}$	<input type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS Meas Guidance v04, 10.2 Method PKPSD (peak PSD)</p> <p><u>Peak spectral density measurement procedure</u></p> <ul style="list-style-type: none"> - Set analyzer center frequency to DTS channel center frequency. - Set the span to 1.5 times the DTS bandwidth. - Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. - Set the VBW $\geq 3 \times \text{RBW}$. - Detector = Peak - Sweep time = auto couple. - Trace mode = Max Hold - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum amplitude level within the RBW. - If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. 		
Test Date	06/15/2019	Environmental condition	Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar
Remark	N/A		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A


Test was done by Gary Chou at RF test site.

PSD measurement results for Zigbee:

Type	Freq (MHz)	Test mode	CH	Conducted PSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
PSD	2405	Zigbee	Low	-8.4	8	Pass
	2440	Zigbee	Mid	-9.77	8	Pass
	2480	Zigbee	High	-9.94	8	Pass


Test Plots

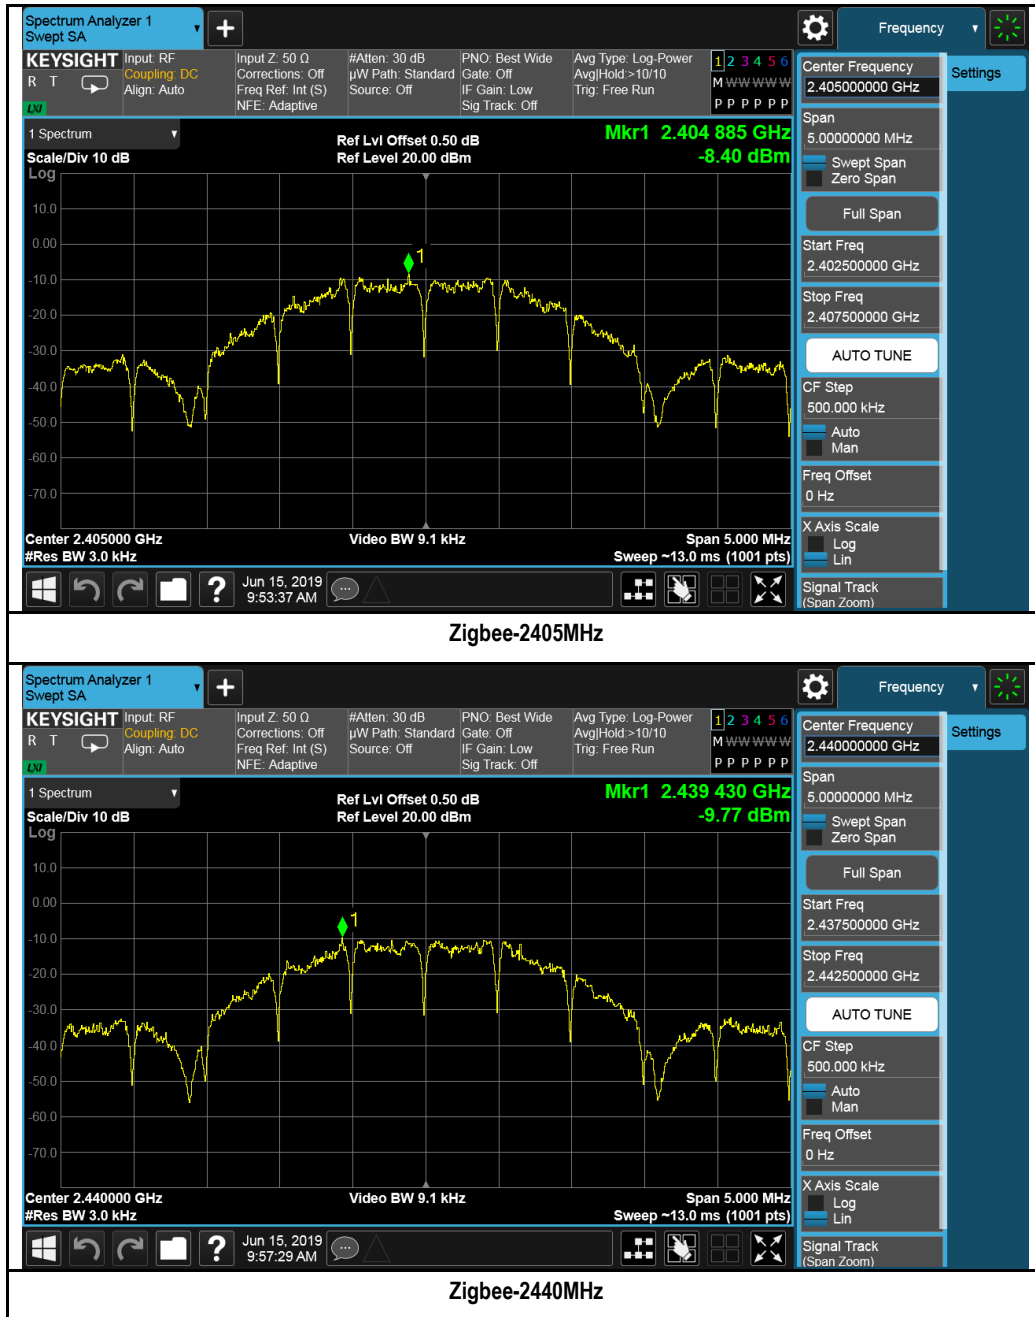

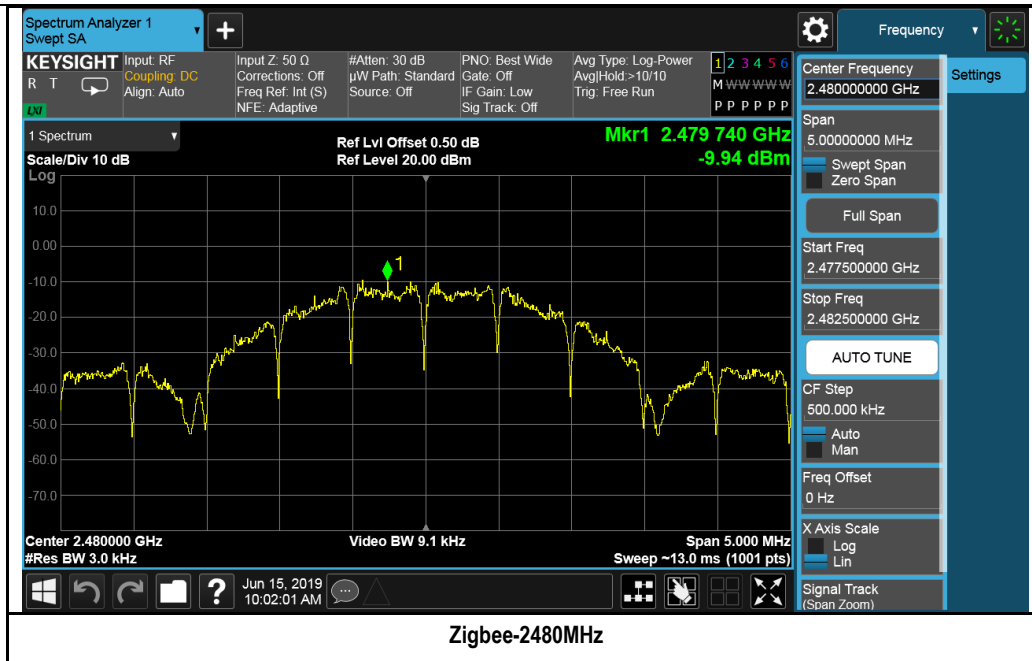

10.7 Radiated Spurious Emissions below 1GHz

Requirement(s):

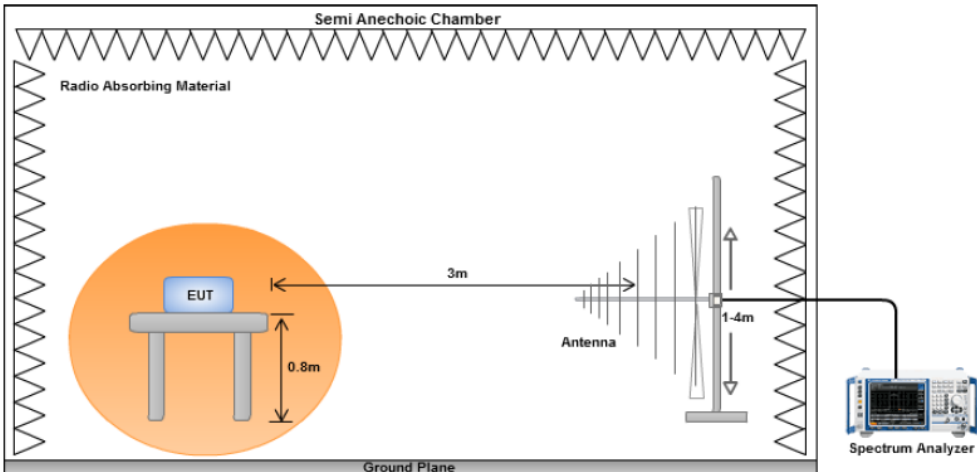Spec	Item	Requirement	Applicable										
47CFR§15.247(d) RSS247 (5.5)	a)	<div>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</div> <table><tr><th>Frequency range (MHz)</th><th>Field Strength (uV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<div>☒</div>
Frequency range (MHz)	Field Strength (uV/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												
Test Setup	<div></div>												
Procedure	<div><div>1.</div><div>The EUT was switched on and allowed to warm up to its normal operating condition.</div><div>2.</div><div>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:</div><div>a.</div><div>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</div><div>b.</div><div>The EUT was then rotated to the direction that gave the maximum emission.</div><div>c.</div><div>Finally, the antenna height was adjusted to the height that gave the maximum emission.</div><div>3.</div><div>A Quasi-peak measurement was then made for that frequency point.</div><div>4.</div><div>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</div></div>												
Remark	<div>The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case. The EUT was evaluated in each of three orthogonal axis positions, the orientation is the worst case, please refer to setup photos.</div>												
Result	<div><div>☒ Pass</div><div>☐ Fail</div></div>												


Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Gary Chou at 10m chamber.

Radiated Emission Test Results (Below 1GHz)

Test specification	below 1GHz			
Environmental Conditions:	Temp (°C):	26	Result	Pass
	Humidity (%)	47		
	Atmospheric (mbar):	1020		
Mains Power:	24Vac, 60Hz			
Tested by:	Gary Chou			
Test Date:	06/13/2019			
Remarks:	TX Mode, 2440MHz			

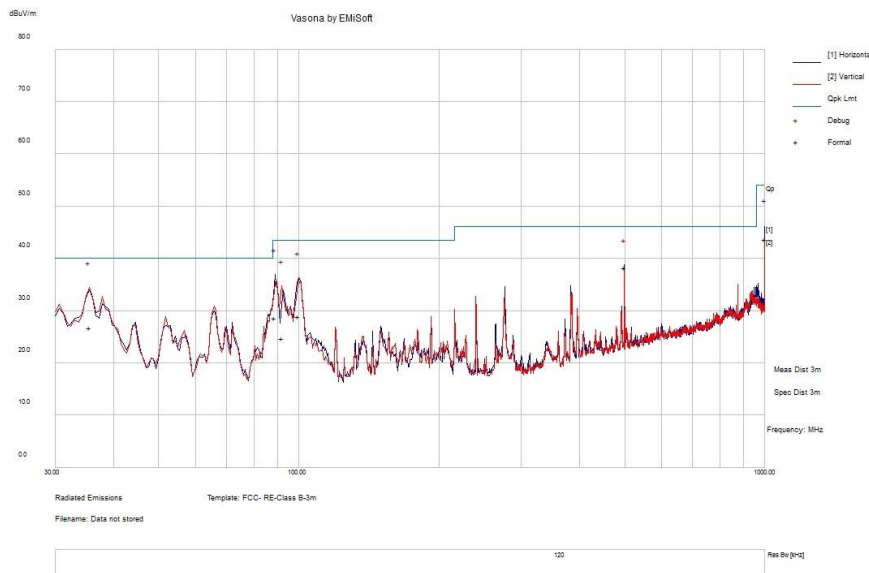


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
35.59	33.44	11.21	-17.87	26.79	Quasi Max	V	325	225	40	-13.21	Pass
88.86	44.7	11.78	-27.85	28.62	Quasi Max	H	247	127	43.5	-14.88	Pass
91.87	40.36	11.81	-27.34	24.83	Quasi Max	V	254	280	43.5	-18.67	Pass
99.54	42.64	11.88	-25.57	28.94	Quasi Max	H	146	248	43.5	-14.56	Pass
500.01	42.73	14.17	-18.55	38.35	Quasi Max	H	167	112	46	-7.65	Pass
1000.00	40.31	16.28	-12.92	43.67	Quasi Max	H	106	143	54	-10.33	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.8 Radiated Spurious Emissions between 1GHz – 25GHz

Requirement(s):

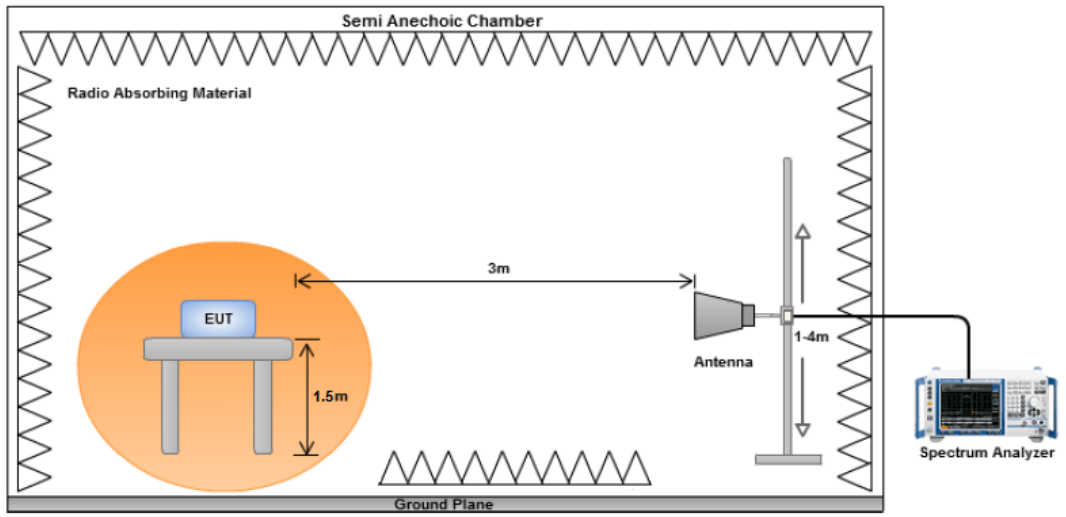Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS247(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
Test Setup			
Procedure	1.	The EUT was switched on and allowed to warm up to its normal operating condition.	
	2.	The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission.	
	3.	An average measurement was then made for that frequency point.	
	4.	Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.	
Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case. There isn't outstanding emission found at the edge of restricted frequency. The EUT was evaluated in each of three orthogonal axis positions, the orientation is the worst case, please refer to setup photos.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Test was done by Gary Chou at 10m chamber.

Restricted Band Measurement Plots:



Zigbee-2405MHz



Zigbee-2480MHz

Radiated Emission Test Results (Above 1GHz)

Above 1GHz-25GHz- Zigbee - 2405MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
3814.88	50.12	3.64	-12.94	40.82	Peak Max	V	268	298	74	-33.18	Pass
4810.78	48.74	4.11	-10.91	41.94	Peak Max	V	230	41	74	-32.06	Pass
7701.70	42.52	5.2	-7.28	40.44	Peak Max	H	166	161	74	-33.56	Pass
3814.88	40.45	3.64	-12.94	31.15	Average Max	H	268	298	54	-22.85	Pass
4810.78	39.45	4.11	-10.91	32.65	Average Max	V	230	41	54	-21.35	Pass
7701.70	32.6	5.2	-7.28	30.52	Average Max	H	166	161	54	-23.48	Pass

Above 1GHz-25GHz- Zigbee - 2440MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
3007.58	49.71	3.28	-14.17	38.82	Peak Max	H	268	295	74	-35.18	Pass
4879.48	48.26	4.17	-11.03	41.4	Peak Max	V	228	43	74	-32.6	Pass
7967.91	42.4	5.4	-7.06	40.74	Peak Max	H	169	159	74	-33.26	Pass
3007.58	40.17	3.28	-14.17	29.28	Average Max	H	268	295	54	-24.72	Pass
4879.48	38.28	4.17	-11.03	31.42	Average Max	H	228	43	54	-22.58	Pass
7967.91	32.97	5.4	-7.06	31.31	Average Max	V	169	159	54	-22.69	Pass
















Above 1GHz-25GHz- Zigbee - 2480MHz








Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
3423.26	49.54	3.55	-13.73	39.36	Peak Max	V	271	303	74	-34.64	Pass
4960.72	48.25	4.25	-11.16	41.34	Peak Max	V	226	48	74	-32.66	Pass
7021.67	42	5.09	-7.8	39.29	Peak Max	V	161	159	74	-34.71	Pass
3423.26	40.42	3.55	-13.73	30.24	Average Max	H	271	303	54	-23.76	Pass
4960.72	39.12	4.25	-11.16	32.21	Average Max	V	226	48	54	-21.79	Pass
7021.67	32.06	5.09	-7.8	29.35	Average Max	H	161	159	54	-24.65	Pass

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Radiated Emissions						
50GHz Spectrum Analyzer	N9030B (PXA)	MY57140374	7/22/2018	1 Year	7/22/2019	<input checked="" type="checkbox"/>
Hybrid Antenna (30MHz - 6GHz)	JB6	A111717	3/9/2019	1 Year	3/9/2020	<input checked="" type="checkbox"/>
Pre-Amplifier (1GHz - 26.5GHz)	8449B	3008A00715	5/16/2019	1 Year	5/16/2020	<input checked="" type="checkbox"/>
Horn Antenna	3115	10SL0059	01/26/2017	2 Year	01/26/2020	<input checked="" type="checkbox"/>
RF Pre-Amplifier (9kHz - 6.5GHz)	LPA-6-30	11170601	7/23/2018	1 Year	7/23/2019	<input checked="" type="checkbox"/>
RF Conducted Emission Measurement						
EMI Test Receiver	ESIB 40	100179	08/27/2018	1 Year	08/28/2019	<input type="checkbox"/>
Transient Limiter (9 kHz - 100 MHz)	EM-7600-5	106	12/30/2018	1 Year	12/31/2019	<input type="checkbox"/>
LISN	3816/2NM	214372	01/09/2019	1 Year	01/10/2020	<input type="checkbox"/>
RF Conducted Measurement						
Agilent Spectrum Analyzer	N9010A	10SL0219	1/18/2018	1 Year	1/08/2020	<input checked="" type="checkbox"/>

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)		Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p>Radio: A1. Terminal equipment for purpose of calling</p> <p>Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p>EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p> <p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>
Australia CAB Recognition		<p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p> <p>Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p> <p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2