



**SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch**

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological
Development District, Guangzhou, China 510663
Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: ee.guangzhou@sgs.com

Report No.: GZEM160700494302
Page: 1 of 30
FCC ID: PIYDNM64-16B5R

TEST REPORT

The following sample(s) was/were submitted and identified on behalf of the client as:

Application No.:	GZEM1607004943CR
Applicant:	Mattel Asia Pacific Sourcing Limited
Manufacturer:	Same as the applicant
Factory:	JETTA (CHINA) INDUSTRIES CO., LTD
FCC ID:	PIYDNM64-16B5R
Product Description:	HW RC SKY SHOCK
Model No.:	DNM64P
SKU:	DNM64, DNM65, FCP39, FCP40♣
♣	Please refer to section 3 of this report for further details.
Trade Mark:	MATTEL
Standards:	CFR 47 PART 15 Subpart C: 2014 section 15.249
Date of Receipt:	2016-07-18
Date of Test:	2016-07-26
Date of Issue:	2016-09-19
Test Result :	Pass*

* In the configuration tested, the EUT complied with the standards specified above.



Jerry Chan
Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.



The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2016-09-19		Original Report

Authorized for issue by:			
Tested By	 (Vico Cui) / Project Engineer	2016-07-26 Date	
Prepared By	 (June Chen) / Clerk	2016-09-19 Date	
Checked By	 (Little Xiang) / Reviewer	2016-09-19 Date	



3 Test Summary

Test	Test Requirement	Test method	Result
Field Strength of Fundamental	FCC PART 15 C section 15.249 (a)	ANSI C63.10: Clause 6.6	PASS
Field Strength of Unwanted Emissions	FCC PART 15 C section 15.249 (a) section 15.249 (d)	ANSI C63.10: Clause 6.4, 6.5 and 6.6	PASS
Band Edges	FCC PART 15 C section 15.249 (d)	ANSI C63.10: Clause 6.10	PASS
Occupied Bandwidth	FCC PART 15 C section 15.215(c)	ANSI C63.10: Clause 6.9.	PASS
Remark: EUT: In this whole report EUT means Equipment Under Test. Tx: In this whole report Tx (or tx) means Transmitter. Rx: In this whole report Rx (or rx) means Receiver. RF: In this whole report RF means Radio Frequency. ANSI C63.10: the detail version is ANSI C63.10:2013 in the whole report.			
♣ SKU.: DNM64, DNM65, FCP39, FCP40 According to the declaration from the applicant, SKU means different color of the same sample. The electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference being the color and package.			



4 Contents

1	Cover Page	1
2	Version	2
3	Test Summary	3
4	Contents	4
5	General Information	5
5.1	Client Information	5
5.2	General Description of E.U.T.	5
5.3	Details of E.U.T.	5
5.4	Description of Support Units	5
5.5	Other Information Requested by the Customer	5
5.6	Deviation from Standards	5
5.7	Test Location	6
6	Equipment List	8
7	Test Results	9
7.1	E.U.T. Operation	9
7.2	Antenna Requirement	11
7.3	Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge	12
7.4	Occupied Bandwidth	29
8	Photographs	Error! Bookmark not defined.
8.1	Radiated Emission Test Setup	Error! Bookmark not defined.
9	EUT Constructional Details	Error! Bookmark not defined.



5 General Information

5.1 Client Information

Applicant:	Mattel Asia Pacific Sourcing Limited
Address of Applicant:	13/F South Tower, World Finance Centre, Harbour City, Tsimshatsui, Kowloon, Hong Kong
Manufacturer:	Same as the applicant
Address of Manufacturer:	Same as the applicant
Factory:	JETTA (CHINA) INDUSTRIES CO. LTD.
Address of Factory:	333 Cai Xin Lu, Lan He Zhen, Nan Sha Qu, Guangzhou Shi, Guangdong Province, China

5.2 General Description of E.U.T.

Product Description:	HW RC SKY SHOCK
Model No.:	DNM64P

5.3 Details of E.U.T.

Operating Frequency	2420 MHz to 2465 MHz
Type of Modulation:	GFSK
Number of Channels	46
Antenna Type	Integrated antenna
Antenna gain:	0 dBi
Function:	Toy plane with radio function and with 2.4 GHz as carrier.
Power Supply:	DC 3.7V chargeable battery 450mAh for the plane
Power cord:	N/A

5.4 Description of Support Units

The EUT has been test as an independent unit.

5.5 Other Information Requested by the Customer

None.

5.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.



5.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co. Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IEC 61010-1:2006-10 and Rules of procedure IEC 61010-2:2006-10, and the relevant IEC CB-Scheme Operational documents.



6 Equipment List

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2014-12-05	2016-12-04
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2016-02-01	2017-01-31
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	100236	2016-02-01	2017-01-31
EMC0528	RI High frequency Cable	SGS	20 m	N/A	2016-04-19	2018-04-18
EMC2025	Trilog Broadband Antenna 30-1000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9160	9160-3372	2014-07-14	2017-07-13
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2013-08-31	2016-08-30
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2014-05-04	2017-05-03
EMC2026	Horn Antenna 1-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	9120D-841	2013-08-31	2016-08-30
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2016-01-25	2017-01-24
EMC2065	Amplifier	HP	8447F	N/A	2016-07-04	2017-07-03
EMC2086	PRE AMPLIFIER MH648A	ANRITSU CORP	MH648A	N/A	2015-12-19	2016-12-18
EMC2063	Pre-amplifier 1GHz-26GHz	Compliance Direction Systems Lnc.	PAP-1G26-48	6279.628	2016-01-06	2017-01-05
EMC0523	Active Loop Antenna	EMCO	6502	42963	2016-02-27	2018-02-26
EMC2041	Broad-Band Horn Antenna (14)15-26.5(40)GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9170	9170-375	2014-05-26	2017-05-25
EMC2079	High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	009	2016-01-25	2017-01-24
EMC2069	2.4GHz Filter	Micro-Tronics	BRM 50702	149	2016-01-25	2017-01-24
EMC0530	10m Semi-Anechoic Chamber	ETS	N/A	N/A	2016-04-30	2018-04-29

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0006	DMM	Fluke	73	70681569	2015-09-17	2016-09-16
EMC0007	DMM	Fluke	73	70671122	2015-09-17	2016-09-16

7 Test Results

7.1 E.U.T. Operation

Test Voltage: DC 3.7V chargeable battery

Temperature: 20.0 -25.0 °C

Humidity: 38-50 % RH

Atmospheric Pressure: 1000 -1010 mbar

Test frequencies and frequency range: According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified



EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2420	19	2439	38	2458
1	2421	20	2440	39	2459
2	2422	21	2441	40	2460
3	2423	22	2442	41	2461
4	2424	23	2443	42	2462
5	2425	24	2444	43	2463
6	2426	25	2445	44	2464
7	2427	26	2446	45	2465
8	2428	27	2447	/	/
9	2429	28	2448	/	/
10	2430	29	2449	/	/
11	2431	30	2450	/	/
12	2432	31	2451	/	/
13	2433	32	2452	/	/
14	2434	33	2453	/	/
15	2435	34	2454	/	/
16	2436	35	2455	/	/
17	2437	36	2456	/	/
18	2438	37	2457	/	/

Test frequencies are the lowest channel: 0 channel(2420 MHz), middle channel: 23 channel(2443 MHz) and highest channel: 45 channel(2465MHz)

7.2 Antenna Requirement


Standard requirement

15.203 requirement:

For intentional device. According to 15.203, an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT Antenna

The antenna is an integrated antenna on the main PCB and no consideration of replacement. The best case gain of the antenna is 0 dBi.

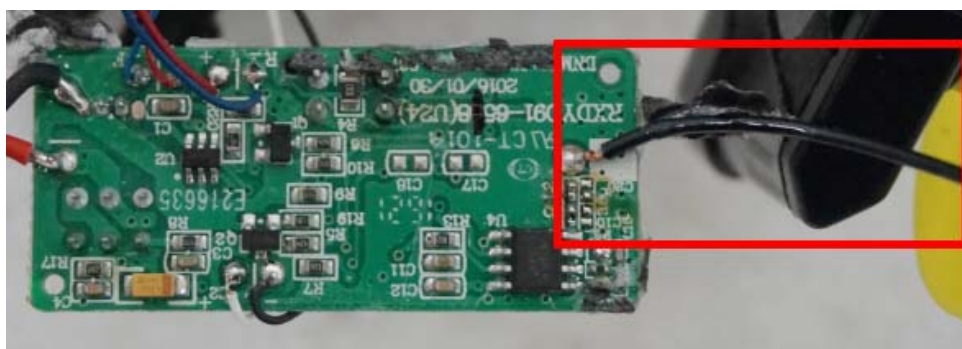

Test result: The unit does meet the FCC requirements.



7.3 Field Strength of Fundamental& Field Strength of Unwanted Emissions& Band Edge

Test Requirement: FCC Part15 C section 15.249

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB μ V/m @ 3m)	Field Strength of Harmonics (dB μ V/m @ 3m)
902 to 928	94.0	54.0
2400 to 2483.5	94.0	54.0
5725 to 5875	94.0	54.0
24000 to 24250	108.0	68.0

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Limits: The fundamental frequency rang is in the frequency band of the EUT is 2420MHz ~ 2465MHz.

The limit for Average field strength dB μ V/m for the fundamental frequency = 94.0 dB μ V/m.

The limit for Peak field strength dB μ V/m for the fundamental frequency = 114.0 dB μ V/m.

No fundamental is allowed in the restricted bands.

The limit for average field strength dB μ V/m for the harmonics = 54.0 dB μ V/m.

The limit for peak field strength dB μ V/m for the harmonics = 74.0 dB μ V/m.

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or 54.0 dB μ V/m in 15.209. Here the limit for the other emission is 54.0 dB μ V/m.

Test Method: ANSI C63.10: Clause 6.4, 6.5 and 6.6 for Field Strength of Fundamental& Field Strength of Unwanted Emissions
ANSI C63.10: Clause 6.10 for Band Edge

Status Pre-test the EUT in continuous transmitting mode with setup as stand-alone in X, Y, Z threes axes, found the worst case is X axes and report the data.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Frequency range 9 kHz – 25 GHz for transmitting mode.
Test instrumentation resolution bandwidth
9 kHz (9 kHz - 30 MHz), 120 kHz (30 MHz - 1000 MHz), 1 MHz (1000 MHz – 25 GHz)

Test Procedure:

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT, During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 25 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2010 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scan between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

4) According to ANSI C63.10.clause 7.5.The average correction factor is computed by analyzing the on time in 100ms over one complete pulse train. Analysis of the remote transmitter on time in one complete pulse train, therefore the average value of fundamental and harmonic frequency emission is: Average = Peak value + 20log (Duty cycle), where the duty factor is calculated from following formula:


$$20\log (\text{Duty cycle}) = 20\log(T_{pulse}/31.983) = -18.95\text{dB}$$

$$\text{Here } T_{pulse} = (1.202 \times 3) = 3.606(\text{ms})$$


The middle channel 2443MHz and highest channel 2465MHz have the same duty cycle as lowest channel 2420MHz, so the test data were not recorded in the test report.

For lowest channel 2420MHz more details please refer to below plots.

Step1

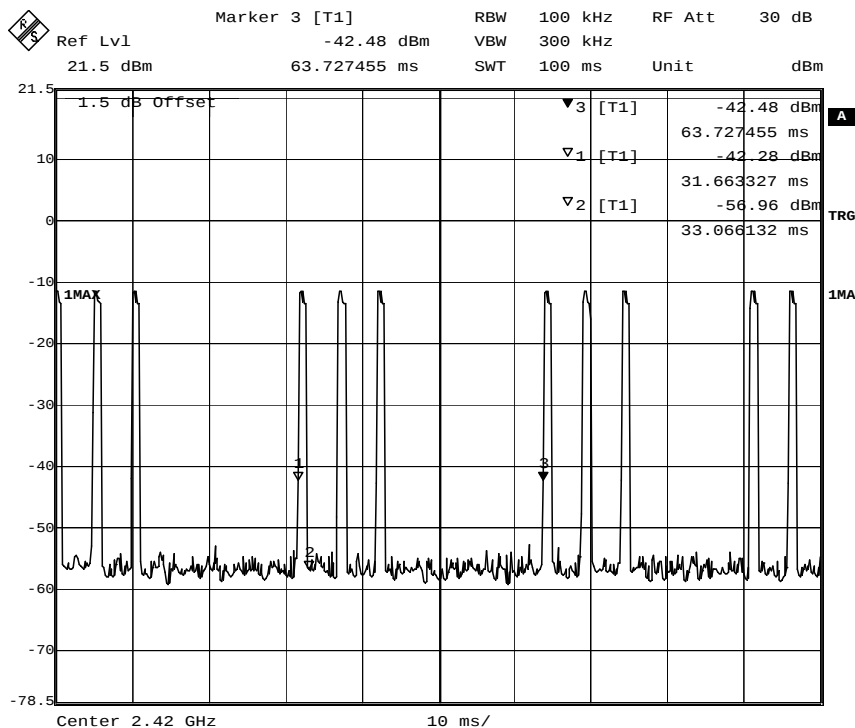


Step2

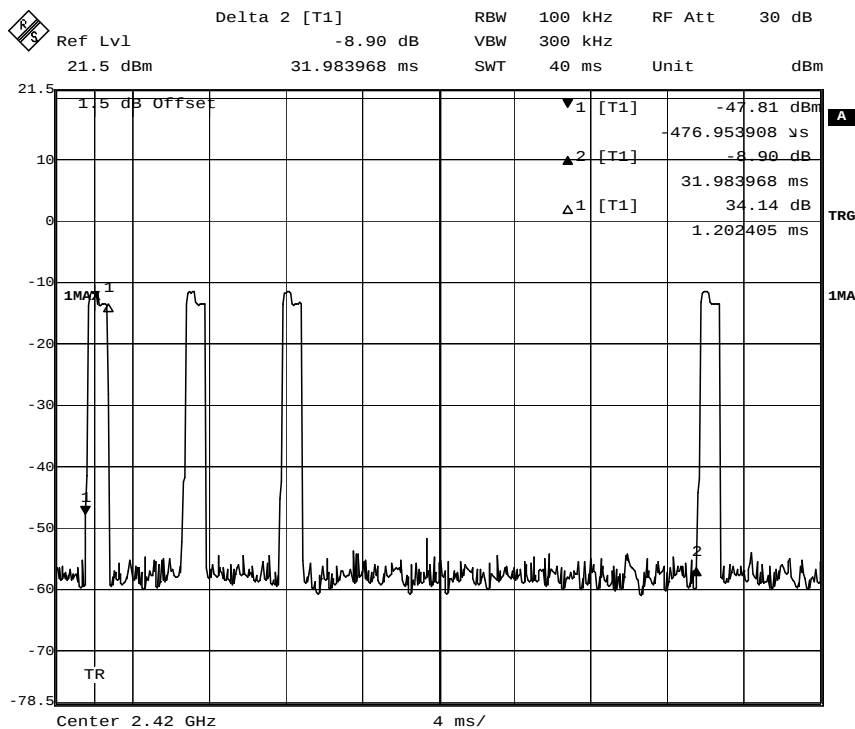


Test Configuration:


- 1) 9 kHz to 30 MHz emissions:

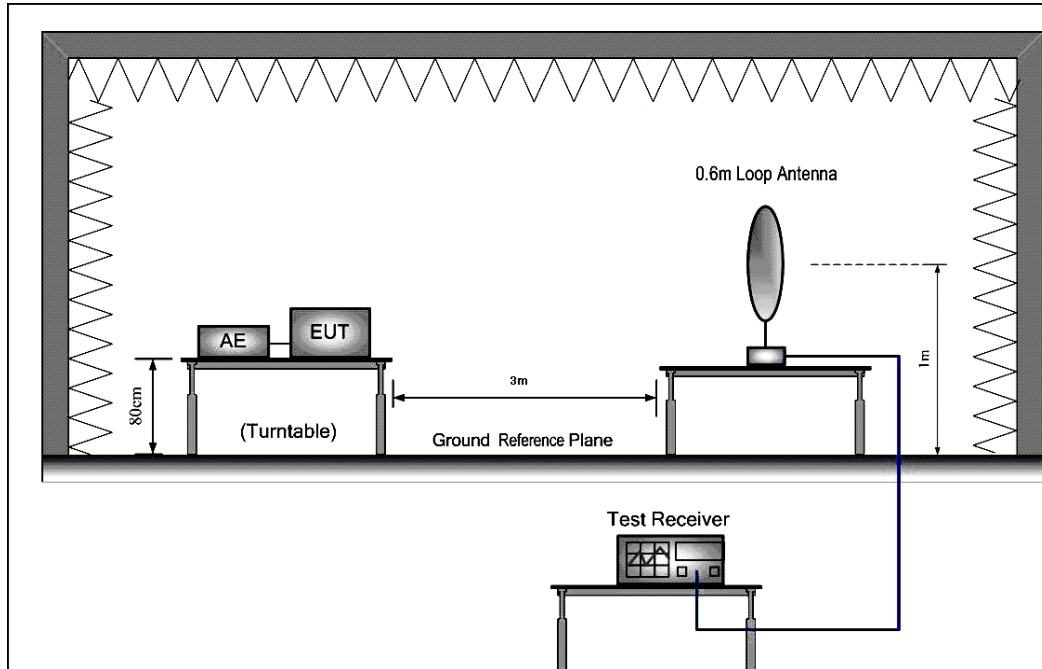

2) 30 MHz to 1 GHz emissions:

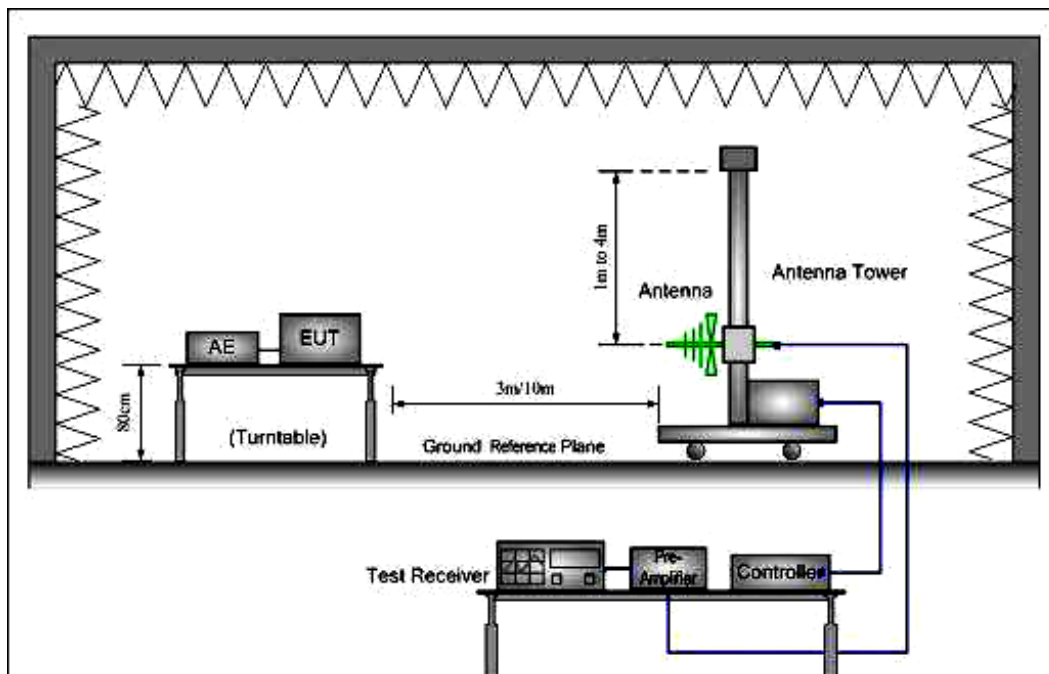

3) 1 GHz to 25 GHz emissions:

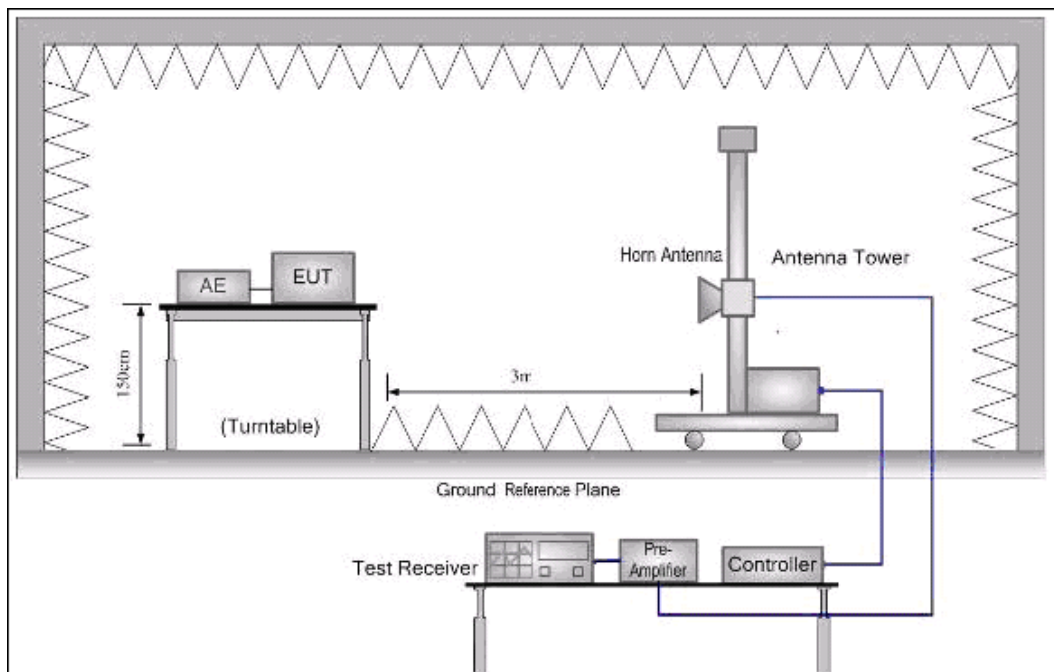

The field strength is calculated by adding the Antenna Factor, Cable Loss & Pre-amplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Preamplifier Factor}$$



Test at low Channel in transmitting status

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Vertical:

Peak scan

Level (dB μ V/m)

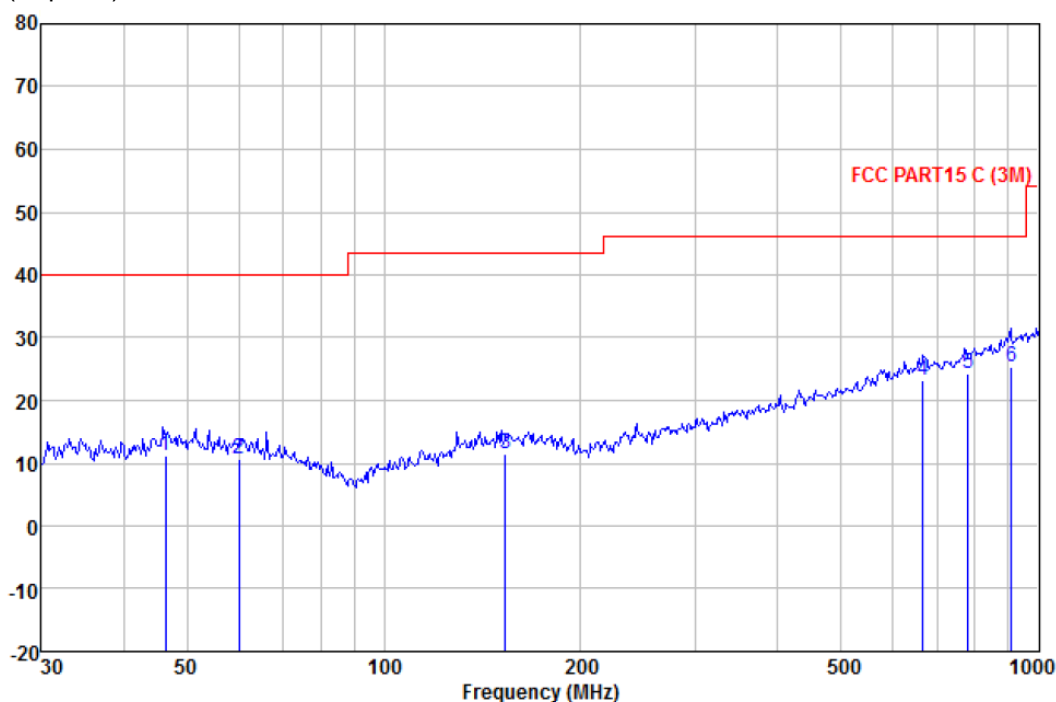

Quasi-peak measurement


Freq	ReadAntenna	Cable	Limit	Over		
Level	Factor	Loss	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
46.340	22.78	14.29	1.23	11.30	40.00	-28.70 QP
60.069	22.20	14.10	1.40	10.70	40.00	-29.30 QP
153.200	22.37	13.52	2.32	11.42	43.50	-32.08 QP
665.804	25.14	21.05	5.04	23.21	46.00	-22.79 QP
779.607	24.46	22.26	5.53	24.29	46.00	-21.71 QP
909.667	23.55	23.48	5.93	25.26	46.00	-20.74 QP



Horizontal:

Peak scan

Level (dB μ V/m)

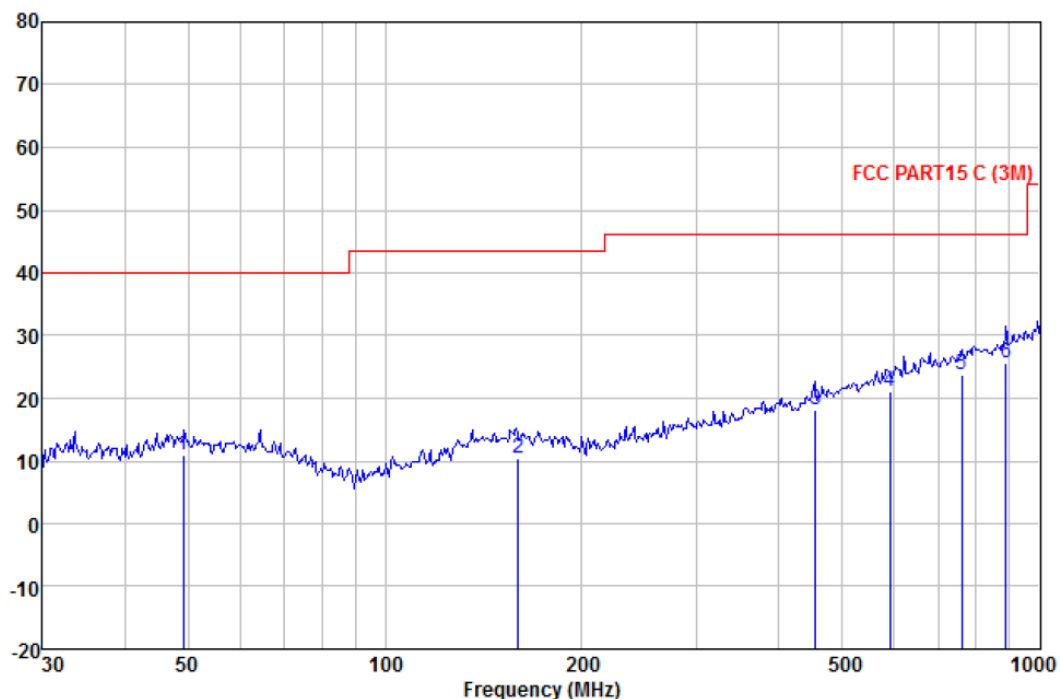

Quasi-peak measurement

Freq	ReadAntenna	Cable	Limit	Over	Remark	
Level	Factor	Loss	Level	Line		
MHz	dB μ V	dB/m	dB	dB μ V/m	dB μ V/m	dB
49.187	22.18	14.46	1.29	10.93	40.00	-29.07 QP
159.784	21.13	13.70	2.37	10.43	43.50	-33.07 QP
454.310	24.14	17.45	4.18	18.20	46.00	-27.80 QP
590.974	24.03	20.20	4.78	21.01	46.00	-24.99 QP
760.704	24.13	22.06	5.43	23.62	46.00	-22.38 QP
887.610	24.15	23.32	5.90	25.60	46.00	-20.40 QP



1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement

Peak Measurement:								
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Over limit	Antenna polarization
2420.78	27.57	6.95	35.20	77.98	78.66	114.00	-35.34	V
4840.28	31.55	9.99	36.43	59.71	54.60	74.00	-19.40	V
7261.08	36.48	12.84	37.06	62.99	50.73	74.00	-23.27	V
9679.98	38.24	14.47	36.02	67.59	50.90	74.00	-23.10	V
2420.82	27.57	6.95	35.20	86.65	87.33	114.00	-26.67	H
4839.95	31.55	9.99	36.43	67.27	62.16	74.00	-11.84	H
7261.33	36.48	12.84	37.06	66.12	53.86	74.00	-20.14	H
9679.79	38.24	14.47	36.02	68.66	51.97	74.00	-22.03	H
Average value based on the PDCF duty cycle								
Frequency (MHz)	PDCF				Emission Level (dB μ V/m)	Limit (dB μ V/m)	Over limit	Antenna polarization
2420.78	-18.95				59.71	94.00	-34.29	V
4840.28	-18.95				35.65	54.00	-18.35	V
7261.08	-18.95				31.78	54.00	-22.22	V
9679.98	-18.95				31.95	54.00	-22.05	V
2420.82	-18.95				68.38	94.00	-25.62	H
4839.95	-18.95				43.21	54.00	-10.79	H
7261.33	-18.95				34.91	54.00	-19.09	H
9679.79	-18.95				33.02	54.00	-20.98	H



Band Edge:

Peak Measurement:								
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamplifier factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over limit	Antenna polarization
2400.00	27.58	6.90	35.20	47.53	46.81	74.00	-27.19	V
2483.50	27.55	7.07	35.27	47.53	46.88	74.00	-27.12	V
2400.00	27.58	6.90	35.20	48.84	48.12	74.00	-25.88	H
2483.50	27.55	7.07	35.27	47.54	46.89	74.00	-27.11	H
Average Measurement:								
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamplifier factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over limit	Antenna polarization
2400.00	27.58	6.90	35.20	29.29	28.57	54.00	-25.43	V
2483.50	27.55	7.07	35.27	29.99	29.34	54.00	-24.66	V
2400.00	27.58	6.90	35.20	28.49	30.77	54.00	-23.23	H
2483.50	27.55	7.07	35.27	29.67	29.02	54.00	-24.98	H

Test at middle Channel in transmitting status

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)

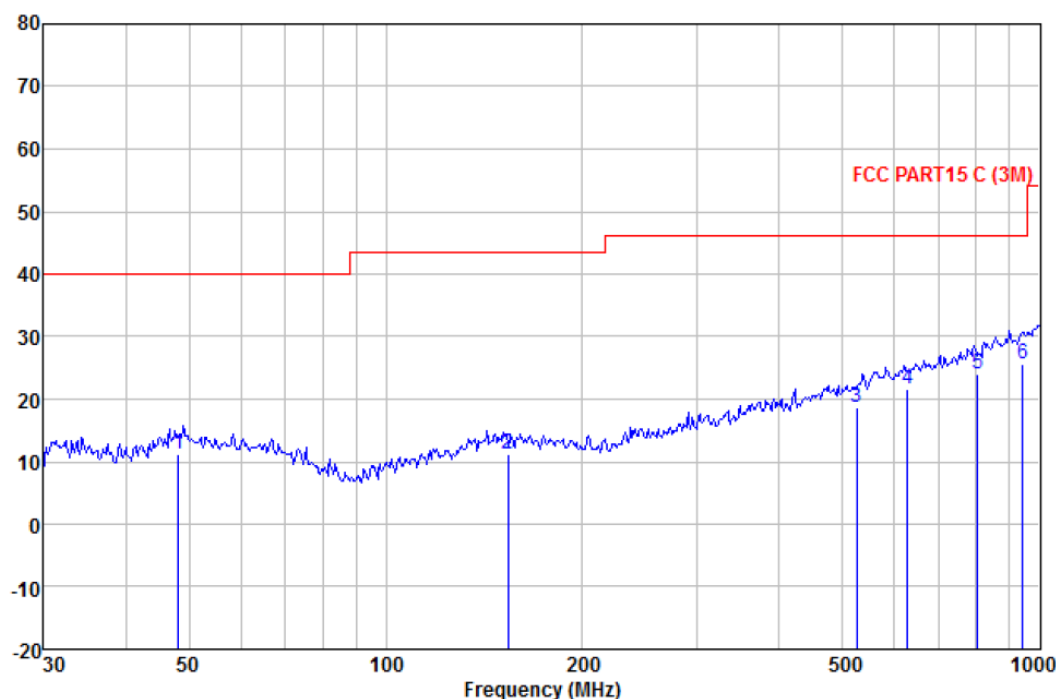

Quasi-peak measurement


Freq	ReadAntenna	Cable	Limit	Over	Remark	
MHz	Level	Factor	Loss	Level	Line	Limit
MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
48.163	22.51	14.42	1.26	11.19	40.00	-28.81 QP
153.739	22.10	13.54	2.32	11.17	43.50	-32.33 QP
524.554	23.52	18.52	4.52	18.63	46.00	-27.37 QP
627.274	24.28	20.52	4.90	21.61	46.00	-24.39 QP
804.603	23.90	22.44	5.60	24.04	46.00	-21.96 QP
942.131	23.39	23.88	6.05	25.66	46.00	-20.34 QP



Horizontal:

Peak scan

Level (dB μ V/m)

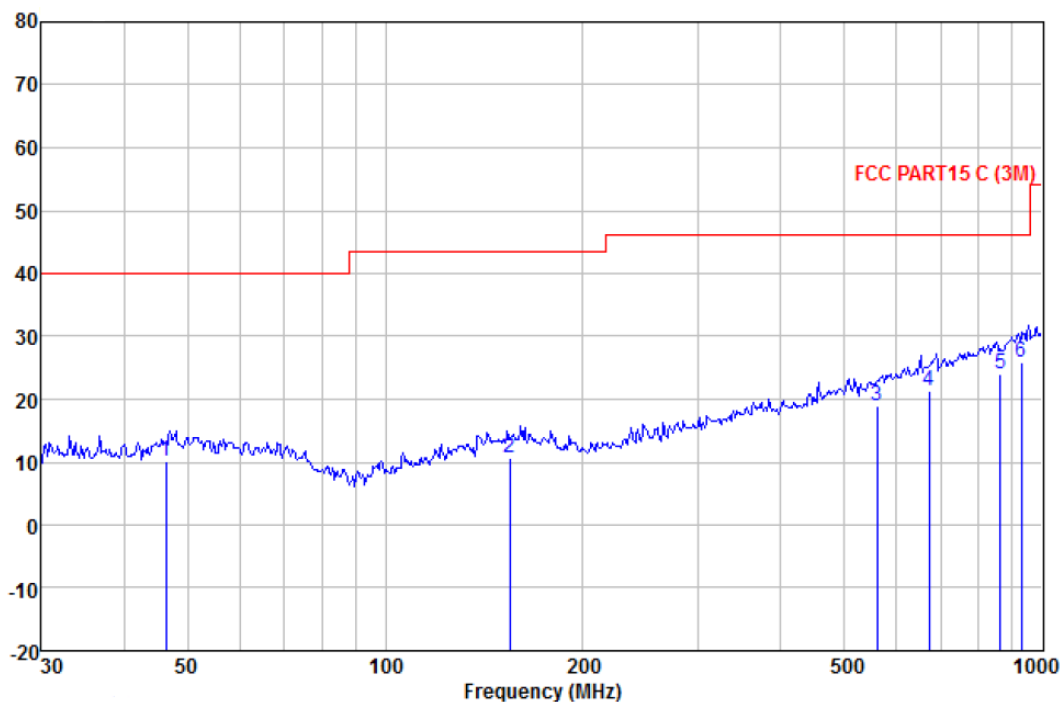

Quasi-peak measurement

Freq	Read	Antenna	Cable	Limit	Over	
Level	Factor	Loss	Level	Line	Limit	Remark
MHz	dB μ V	dB/m	dB	dB μ V/m	dB μ V/m	dB
46.340	21.67	14.29	1.23	10.19	40.00	-29.81 QP
154.821	21.56	13.58	2.32	10.67	43.50	-32.83 QP
560.693	22.57	19.66	4.63	18.86	46.00	-27.14 QP
672.845	23.16	21.12	5.07	21.34	46.00	-24.66 QP
863.056	22.76	23.10	5.84	23.87	46.00	-22.13 QP
929.008	23.88	23.69	6.00	25.87	46.00	-20.13 QP



1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement

Peak Measurement:								
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Over limit	Antenna polarization
2443.28	27.57	6.99	35.20	80.06	80.70	114.00	-33.30	V
4886.01	31.58	10.02	36.45	52.86	47.71	74.00	-26.29	V
7330.00	36.51	12.93	37.07	64.11	51.74	74.00	-22.26	V
9773.27	38.51	14.44	35.86	71.24	54.15	74.00	-19.85	V
2443.21	27.57	6.99	35.20	84.86	85.50	114.00	-28.50	H
4886.00	31.58	10.02	36.45	68.41	63.26	74.00	-10.74	H
7329.06	36.51	12.93	37.07	63.94	51.57	74.00	-22.43	H
9773.01	38.51	14.44	35.86	69.49	52.40	74.00	-21.60	H
Average value based on the PDCF duty cycle								
Frequency (MHz)	PDCF				Emission Level (dB μ V/m)	Limit (dB μ V/m)	Over limit	Antenna polarization
2443.28	-18.95				61.75	94.00	-32.25	V
4886.01	-18.95				28.76	54.00	-25.24	V
7330.00	-18.95				32.79	54.00	-21.21	V
9773.27	-18.95				35.20	54.00	-18.80	V
2443.21	-18.95				66.55	94.00	-27.45	H
4886.00	-18.95				44.31	54.00	-9.69	H
7329.06	-18.95				32.62	54.00	-21.38	H
9773.01	-18.95				33.45	54.00	-20.55	H



Band Edge:

Peak Measurement:								
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamplifier factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Over limit	Antenna polarization
2400.00	27.58	6.90	35.20	50.13	49.41	74.00	-24.59	V
2483.50	27.55	7.07	35.27	49.05	48.40	74.00	-25.60	V
2400.00	27.58	6.90	35.20	48.26	47.54	74.00	-26.46	H
2483.50	27.55	7.07	35.27	48.37	47.72	74.00	-26.28	H
Average Measurement:								
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamplifier factor (dB)	Reading Level (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Over limit	Antenna polarization
2400.00	27.58	6.90	35.20	33.28	32.56	54.00	-21.44	V
2483.50	27.55	7.07	35.27	30.33	29.68	54.00	-24.32	V
2400.00	27.58	6.90	35.20	28.61	27.89	54.00	-26.11	H
2483.50	27.55	7.07	35.27	28.43	29.78	54.00	-24.22	H

Test at high Channel in transmitting status

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)

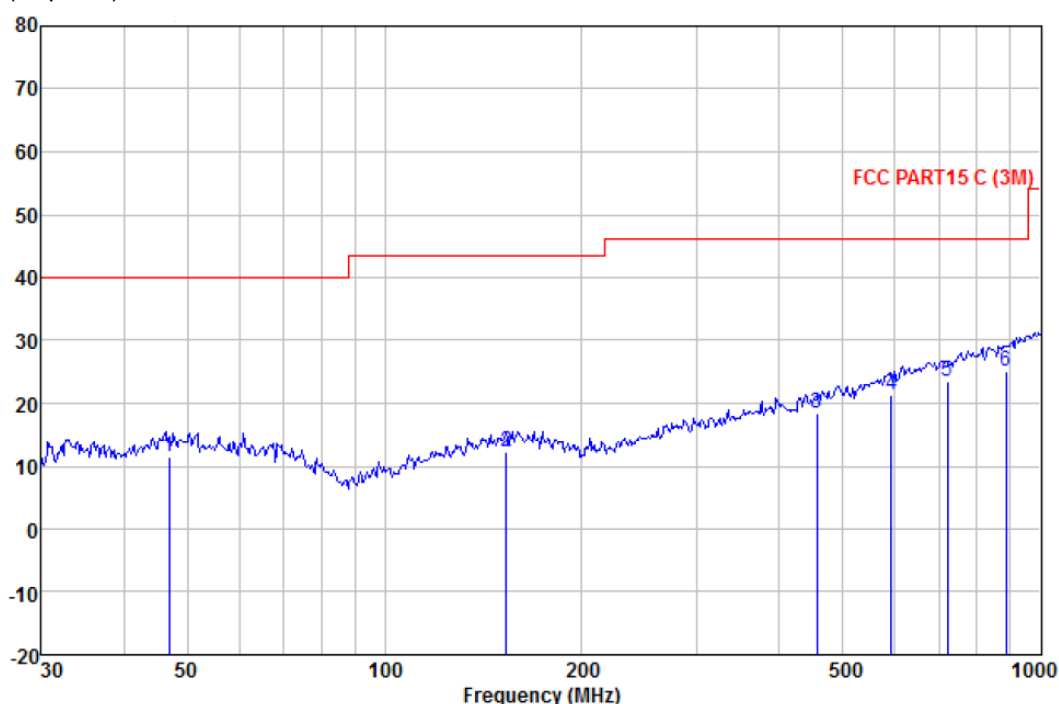

Quasi-peak measurement


Freq	ReadAntenna	Cable	Limit	Over	Remark	
MHz	Level	Factor	Loss	Level	Line	Limit
	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
46.995	22.78	14.34	1.24	11.36	40.00	-28.64 QP
153.200	23.31	13.52	2.32	12.36	43.50	-31.14 QP
455.906	24.25	17.49	4.18	18.35	46.00	-27.65 QP
593.050	24.24	20.23	4.78	21.25	46.00	-24.75 QP
721.726	24.66	21.49	5.25	23.40	46.00	-22.60 QP
884.503	23.66	23.30	5.90	25.08	46.00	-20.92 QP



Horizontal:

Peak scan

Level (dB μ V/m)

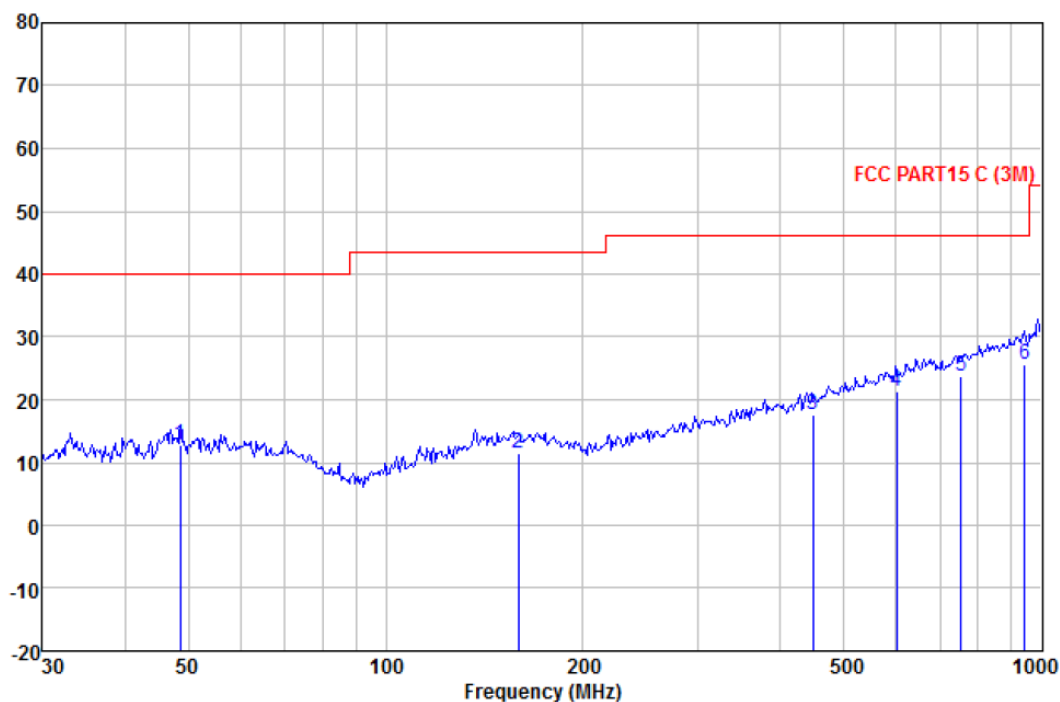

Quasi-peak measurement

Freq	ReadAntenna	Cable	Limit	Over	Remark	
Level	Factor	Loss	Level	Line		
MHz	dB μ V	dB/m	dB	dB μ V/m	dB μ V/m	dB
48.672	24.21	14.44	1.28	12.93	40.00	-27.07 QP
159.225	22.09	13.69	2.37	11.37	43.50	-32.13 QP
447.982	23.76	17.26	4.15	17.65	46.00	-28.35 QP
601.427	24.34	20.31	4.80	21.44	46.00	-24.56 QP
752.743	24.27	21.94	5.43	23.64	46.00	-22.36 QP
942.131	23.32	23.88	6.05	25.59	46.00	-20.41 QP



1~25 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.

Peak & Average Measurement

Peak Measurement:								
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over limit	Antenna polarization
2465.13	27.56	7.02	35.22	81.73	82.37	114.00	-31.63	V
4929.97	31.65	10.06	36.47	55.5	50.26	74.00	-23.74	V
7395.09	36.54	13.00	37.08	63.93	51.47	74.00	-22.53	V
9860.34	38.65	14.42	35.74	70.35	53.02	74.00	-20.98	V
2466.98	27.56	7.02	35.22	83.79	84.43	114.00	-29.57	H
4930.80	31.65	10.06	36.47	65.78	60.54	74.00	-13.46	H
7395.12	36.54	13.00	37.08	66.4	53.94	74.00	-20.06	H
9861.13	38.65	14.42	35.74	69.71	52.38	74.00	-21.62	H
Average value based on the PDCF duty cycle								
Frequency (MHz)	PDCF				Emission Level (dBμV/m)	Limit (dBμV/m)	Over limit	Antenna polarization
2465.13	-18.95				63.42	54.00	-30.58	V
4929.97	-18.95				31.31	54.00	-22.69	V
7395.09	-18.95				32.52	54.00	-21.48	V
9860.34	-18.95				34.07	54.00	-19.93	V
2466.98	-18.95				65.48	54.00	-28.52	H
4930.80	-18.95				41.59	54.00	-12.41	H
7395.12	-18.95				34.99	54.00	-19.01	H
9861.13	-18.95				33.43	54.00	-20.57	H



Band Edge:

Peak Measurement:								
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over limit	Antenna polarization
2400.00	27.58	6.90	35.20	47.63	46.91	74.00	-27.09	V
2483.50	27.55	7.07	35.27	49.77	49.12	74.00	-24.88	V
2400.00	27.58	6.90	35.20	47.01	46.29	74.00	-27.71	H
2483.50	27.55	7.07	35.27	47.82	47.17	74.00	-26.83	H
Average Measurement:								
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over limit	Antenna polarization
2400.00	27.58	6.90	35.20	28.08	27.36	54.00	-26.64	V
2483.50	27.55	7.07	35.27	29.42	30.77	54.00	-23.23	V
2400.00	27.58	6.90	35.20	29.43	28.71	54.00	-25.29	H
2483.50	27.55	7.07	35.27	29.43	28.78	54.00	-25.22	H

Remark:

1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss – Preamplifier Factor.

2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

4). For Radiated Emissions fall in the restricted bands (2400MHz is worse case than 2390MHz and report it as above), which set out in Section 15.205 Restricted bands.

Also there is not any other emission which falls in restricted bands can be detected and reported.

5). The emission above 10GHz is greater than 20dB below the limit, so the test data were not recorded in the test report.

Test result: The unit does meet the FCC requirements.

7.4 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.215(c)


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Method: ANSI C63.10: Clause 6.9.


Operation within the band 2.400 to 2.4835 GHz

Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken.


1. Test in the lowest frequency 2.420 GHz

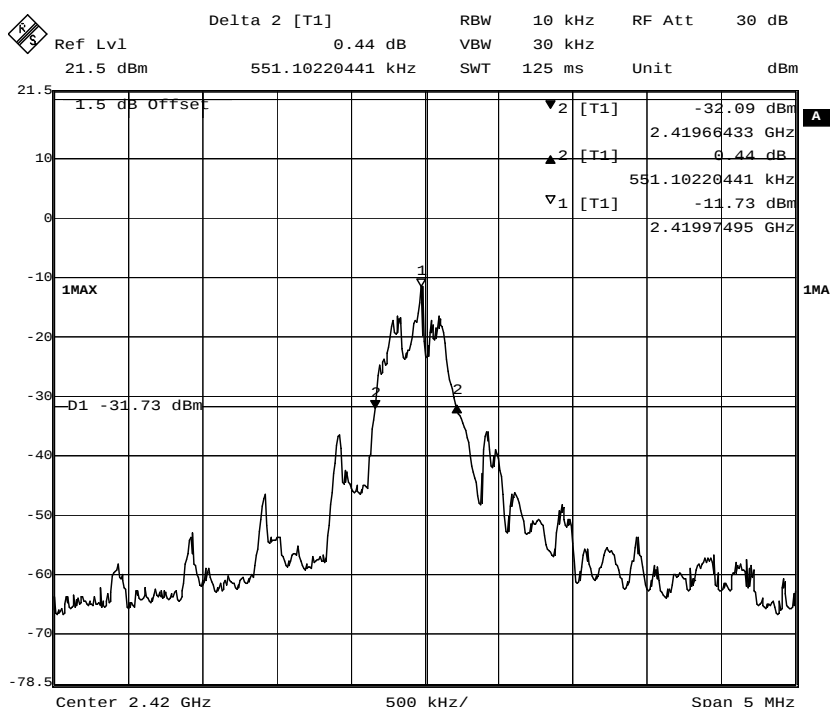

2. Test in the middle frequency 2.443 GHz

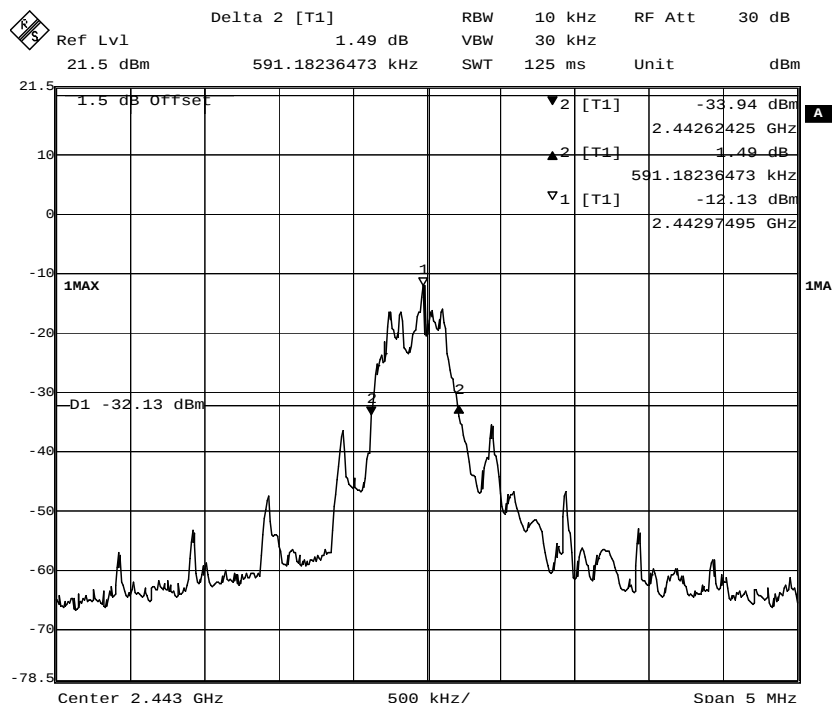

3. Test in the highest frequency 2.465 GHz

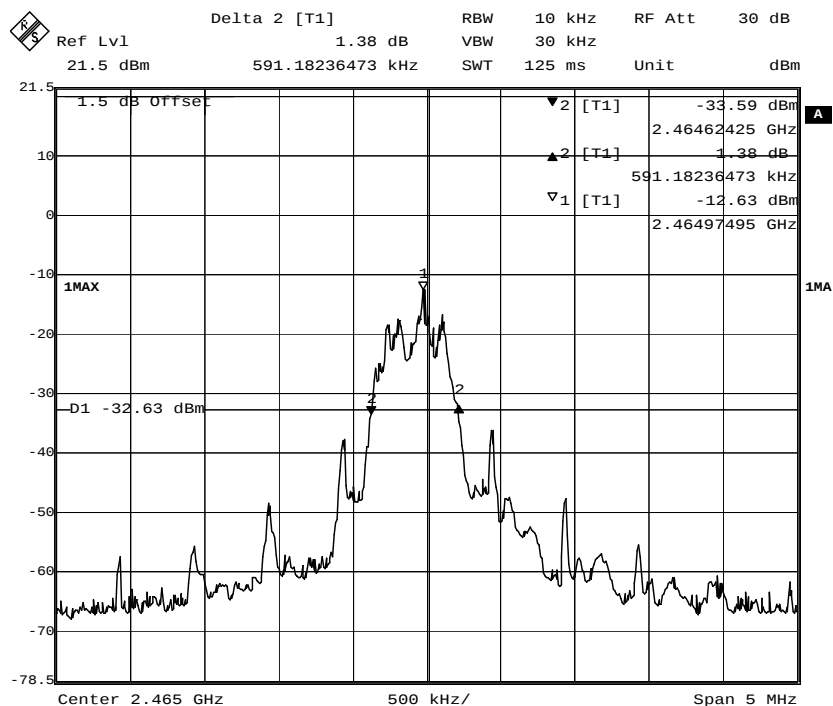

The results: The unit does meet the FCC requirements.

--End of the report--