




REV	DATE	REV	DIMENSION	DESIGN	APPROVE
LTR					

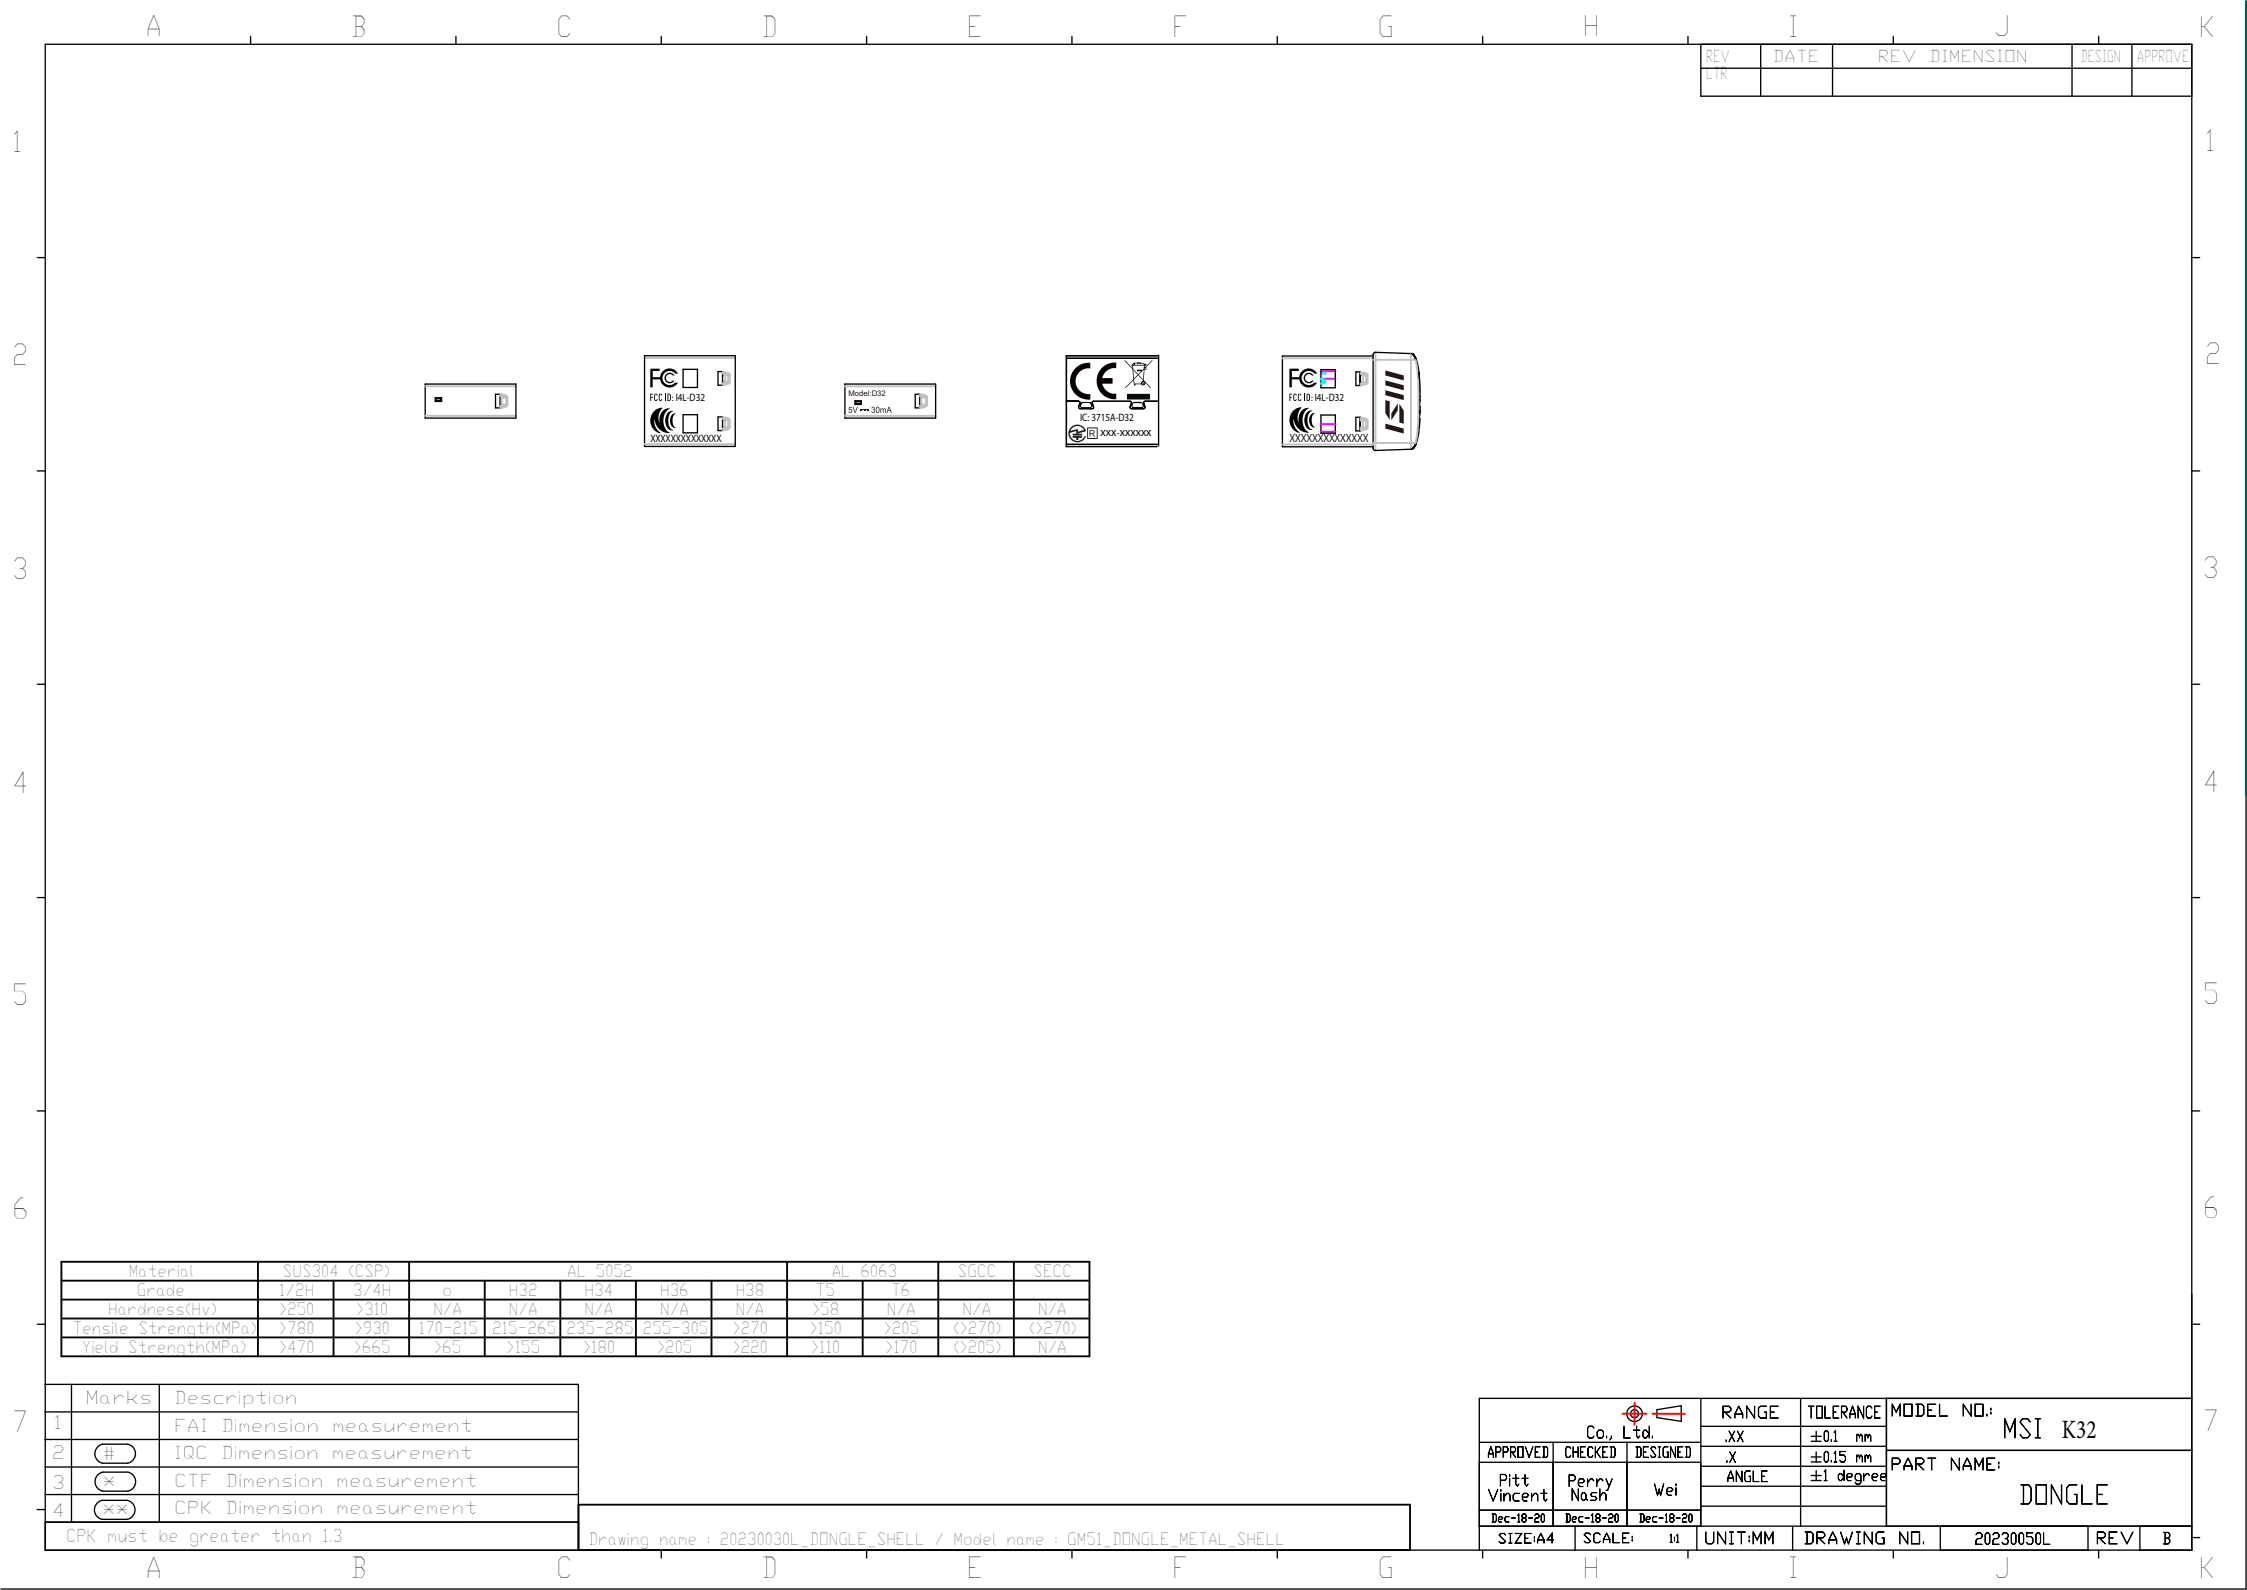

Material	SUS304 (CSP)	AL 5052						AL 6063		SGCC	SECC
Grade	1/2H	3/4H	o	H32	H34	H36	H38	T5	T6		
Hardness(Hv)	>250	>310	N/A	N/A	N/A	N/A	N/A	>58	N/A	N/A	N/A
Tensile Strength(MPa)	>780	>930	170-215	215-265	235-285	255-305	>270	>150	>205	(≥270)	(≥270)
Yield Strength(MPa)	>470	>665	>65	>155	>180	>205	>220	>110	>170	(≥205)	N/A

	Marks	Description
1		FAI Dimension measurement
2	#	IQC Dimension measurement
3	*	CTF Dimension measurement
4	xx	CPK Dimension measurement

CPK must be greater than 1.3

Drawing name : 20230030L_DONGLE_SHELL / Model name : GM51_DONGLE_METAL_SHELL

Co., Ltd.			RANGE	TOLERANCE	MODEL NO.:
APPROVED	CHECKED	DESIGNED	.XX	±0.1 mm	MSI K32
Pitt Vincent	Perry Nash	Wei	.X	±0.15 mm	PART NAME:
Dec-18-20	Dec-18-20	Dec-18-20	ANGLE	±1 degree	DONGLE
SIZE:A4	SCALE:	1:1	UNIT:MM	DRAWING NO.	20230050L
				REV	B