

# FCC Test Report

## Report No.: AGC14499241101FR02

FCC ID	:	2APPZ-W610H
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless Phone
BRAND NAME	:	LINXVIL
MODEL NAME	:	W610H
APPLICANT	:	Fanvil Technology Co., LTD.
DATE OF ISSUE	:	Dec. 11, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
<b>REPORT VERSION</b>	:	V1.0







## **Report Revise Record**

Report Version	Revise Time	Issued Date Valid Version		Notes	
V1.0	/	Dec. 11, 2024	Valid	Initial Release	



## **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	8
3.1 Address of the Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	14
6. Duty Cycle Measurement	15
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	21
8.3 Measurement Setup (Block Diagram of Configuration)	21
8.4 Measurement Results	
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge and Out-of-Band Emissions	
10.1 Dravisions Applicable	24



#### Report No.: AGC 14499241101FR02 Page 4 of 74

10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Results	35
11. Radiated Spurious Emission	
11.1 Measurement Limit	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	50
12. AC Power Line Conducted Emission Test	68
12.1 Measurement Limit	
12.1 Measurement Limit 12.2 Measurement Setup (Block Diagram of Configuration)	
	68
12.2 Measurement Setup (Block Diagram of Configuration)	68 69
12.2 Measurement Setup (Block Diagram of Configuration) 12.3 Preliminary Procedure of Line Conducted Emission Test	
12.2 Measurement Setup (Block Diagram of Configuration) 12.3 Preliminary Procedure of Line Conducted Emission Test 12.4 Final Procedure of Line Conducted Emission Test	



## **1. General Information**

Applicant	Fanvil Technology Co., LTD.
Address	10/F Block A, Dualshine Global Science Innovation, Honglang North 2nd Road, Bao'an District, Shenzhen, 518101, China
Manufacturer	Fanvil Technology Co., LTD.
Address	10/F Block A, Dualshine Global Science Innovation, Honglang North 2nd Road, Bao'an District, Shenzhen, 518101, China
Factory	N/A
Address	N/A
Product Designation	Wireless Phone
Brand Name	LINKVIL
Test Model	W610H
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Nov. 05, 2024
Date of Test	Nov. 05, 2024~Dec. 11, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Bibo zhang Prepared By Bibo Zhang Dec. 11, 2024 (Project Engineer) Calvin Lin **Reviewed By** Calvin Liu Dec. 11, 2024 (Reviewer) Approved By Angela Li Dec. 11, 2024 (Authorized Officer)



## 2. Product Information

#### 2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.0
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	Bluetooth LE (1Mbps): 3.719dBm Bluetooth LE (2Mbps): 4.234dBm
Hardware Version	V1.0
Software Version	1.0.3
Antenna Designation	FPC Antenna
Antenna Gain	3.7dBi
Power Supply	DC 3.8V, 1900mAh by battery or DC 5V from adapter

#### 2.2 Test Frequency List

Frequency Band	Channel Number	Test Frequency			
	0	2402 MHz			
	1	2404 MHz			
2400~2483.5MHz	:	:			
	19	2440MHz			
	:	:			
	38	2478 MHz			
	39	2480 MHz			
Note: f = 2402 + 2*k MHz, k = 0,, 39 f is the operating frequency (MHz); k is the operating channel.					



#### 2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2APPZ-W610H**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

#### 2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

#### 2.5 Special Accessories

Not available for this EUT intended for grant.

#### 2.6 Equipment Modifications

Not available for this EUT intended for grant.

#### 2.7 Antenna Requirement

Standard Requirement

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

#### EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 3.7dBi.



#### 3. Test Environment

#### 3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



#### **3.3 Environmental Conditions**

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC3.8V

#### **3.4 Measurement Uncertainty**

The reported uncertainty of measurement y  $\pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF Power, Conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF Power Density, Conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of Spurious Emissions, Conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	U <sub>c</sub> = ±2 %
Uncertainty of Dwell Time	U <sub>c</sub> = ±2 %



#### 3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\square$	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
$\boxtimes$	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
$\boxtimes$	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
$\boxtimes$	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
$\boxtimes$	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
$\boxtimes$	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\square$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
$\square$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
$\square$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
$\square$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
$\square$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
$\square$	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
$\square$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
$\boxtimes$	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08	
$\boxtimes$	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	



• Te	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A			
$\boxtimes$	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
$\boxtimes$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



## **4.System Test Configuration**

#### **4.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.


#### 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

#### 4.3 Configuration of Tested System

Radiated Emission Configure:

Conducted Emission Configure:



#### 4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement: Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box	N/A	USB-TTL	N/A	N/A
2	Earphone	СХТ	N/A	N/A	1.2m unshielded

☑ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Adapter 1#	Dongguan City Gangqi Electronic Co. LTD.	GQ12-050200- AU	Input: 100-240 50/60Hz, 0.4A Output: DC 5V2A	1.0m unshielded
2	Adapter 2#	CHENZHOU FRECOM ELECTRONICS CO., LTD	F12L20-050200 SPAU	Input: 100-240 50/60Hz, 0.3A DC 5V==2A	1.0m unshielded
3	Charger	Fanvil Technology Co. Ltd.	W610H	Input:5V-2A	-
4	Battery	YJ POWER GROUP LIMITED	YJ563170	DC 3.8V 1900mAh	-



#### 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.209	Radiated Emission& Band Edge	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



## 5. Description of Test Modes

	Summary Table of Test Cases
Test Item	Data Rate / Modulation
	Bluetooth–LE(1Mbps/2Mbps)/GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps(Battery powered or AC/DC adapter)
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered or AC/DC adapter)
Radiated & Conducted	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered or AC/DC adapter)
Test Cases	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps(Battery powered or AC/DC adapter)
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps(Battery powered or AC/DC adapter)
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps(Battery powered or AC/DC adapter)
AC Conducted Emission	Mode 1: Bluetooth Link + Battery + AC Adapter
4. For Conducted Test r	nethod, a temporary antenna connector is provided by the manufacture. Software Setting Diagram Serial-COM4-SecureCRT 




## 6. Duty Cycle Measurement

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	394.8	63	2.01	2.53
BLE_2Mbps	208.9	33	4.81	4.79

Remark:

- 1. Duty Cycle factor = 10 \* log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value
- The test plots as follows:

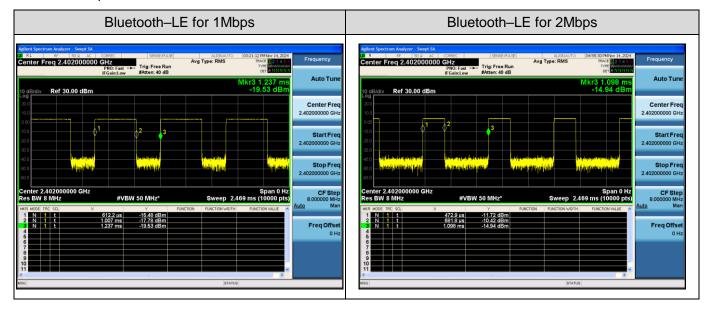



## 7. RF Output Power Measurement

#### 7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

#### 7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW≥DTS bandwidth
- 3. Set the VBW≥[3 × RBW].
- 4. Span≥[3 × RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:

- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


#### 7.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

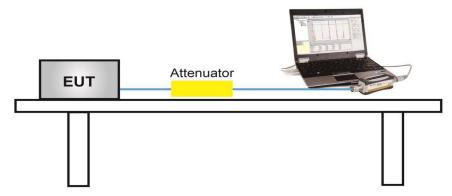




#### For peak power test setup

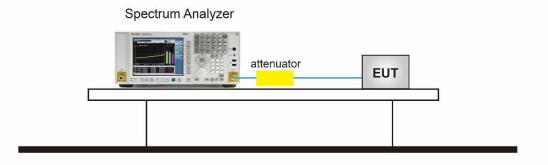

#### 7.4 Measurement Result


Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	3.719	≪30	Pass		
GFSK_1Mbps	2440	3.425	≪30	Pass		
	2480	3.399	≪30	Pass		
	2402	4.234	≪30	Pass		
GFSK_2Mbps	2440	3.967	≪30	Pass		
	2480	4.014	≤30	Pass		



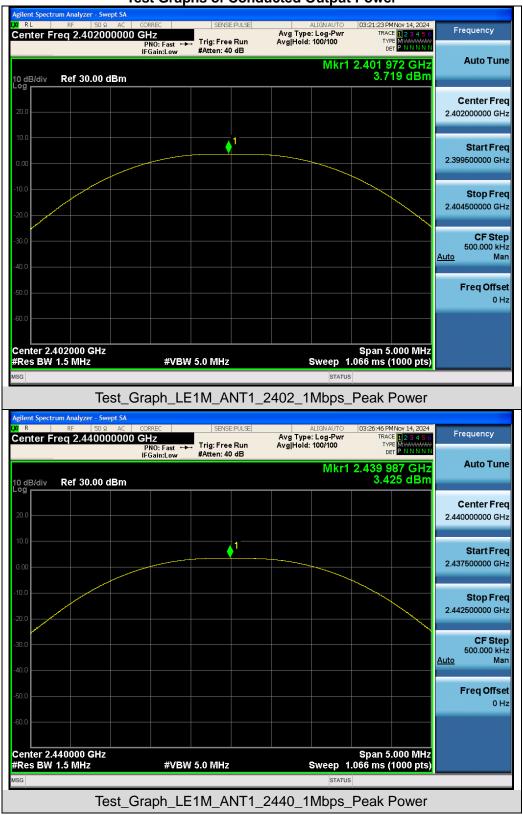


#### **Test Graphs of Conducted Output Power**



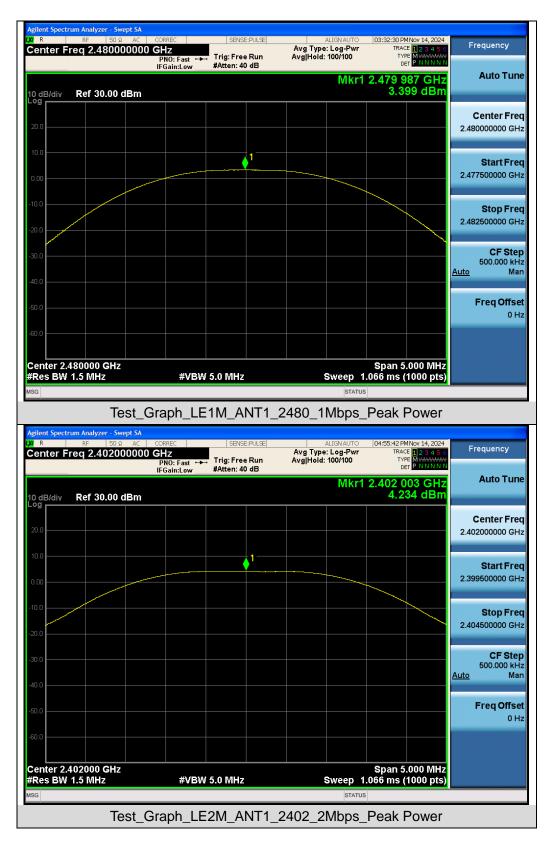



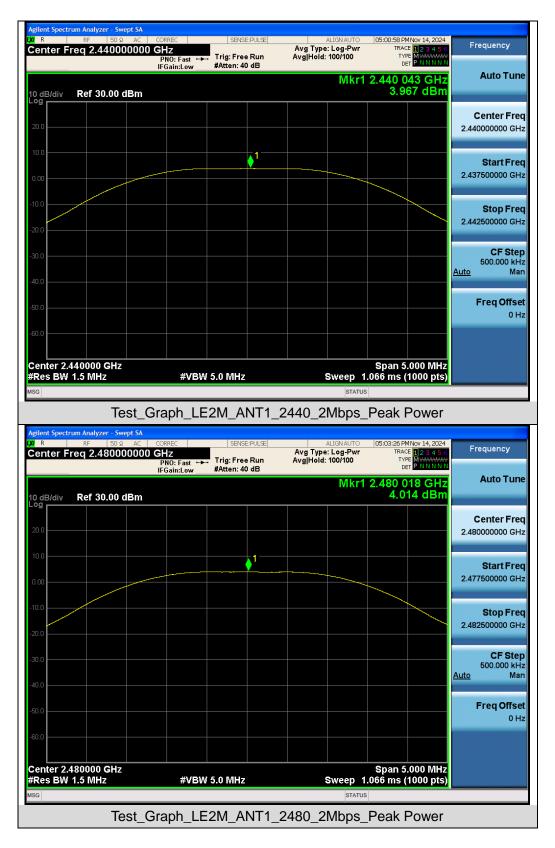



### 8. 6dB Bandwidth Measurement

#### 8.1 Provisions Applicable


The minimum 6dB bandwidth shall be 500 kHz.

#### 8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 \* RBW.
- 5. Measure and record the results in the test report.

#### 8.3 Measurement Setup (Block Diagram of Configuration)

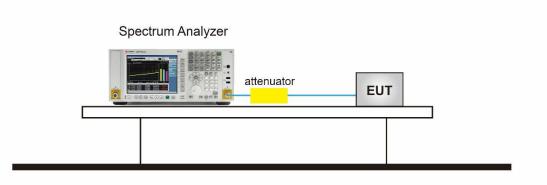





#### **8.4 Measurement Results**

Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail		
GFSK_1Mbps	2402	1.031	0.662	≥0.5	Pass		
	2440	1.039	0.657	≥0.5	Pass		
	2480	1.042	0.653	≥0.5	Pass		
	2402	2.060	1.135	≥0.5	Pass		
GFSK_2Mbps	2440	2.075	1.141	≥0.5	Pass		
	2480	2.075	0.959	≥0.5	Pass		


#### **Test Graphs of Occupied Bandwidth**

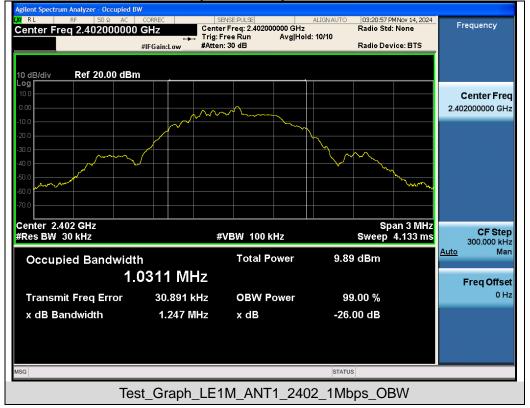



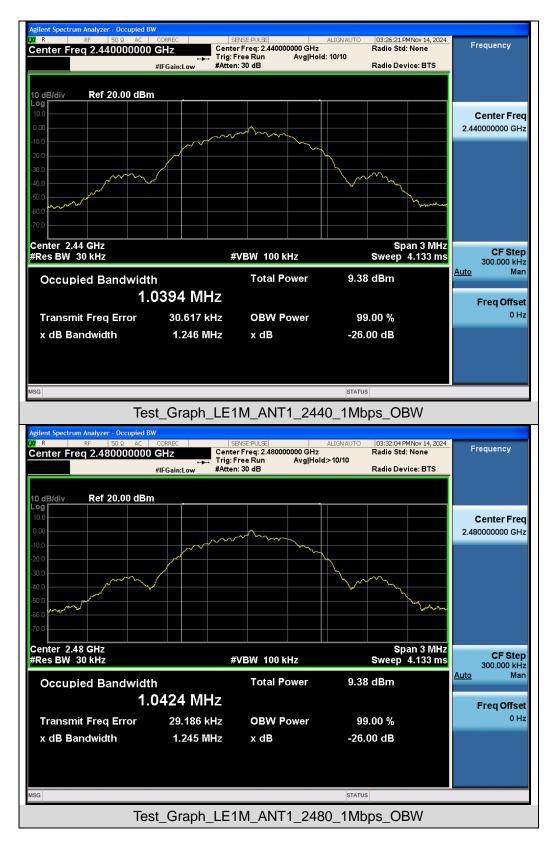



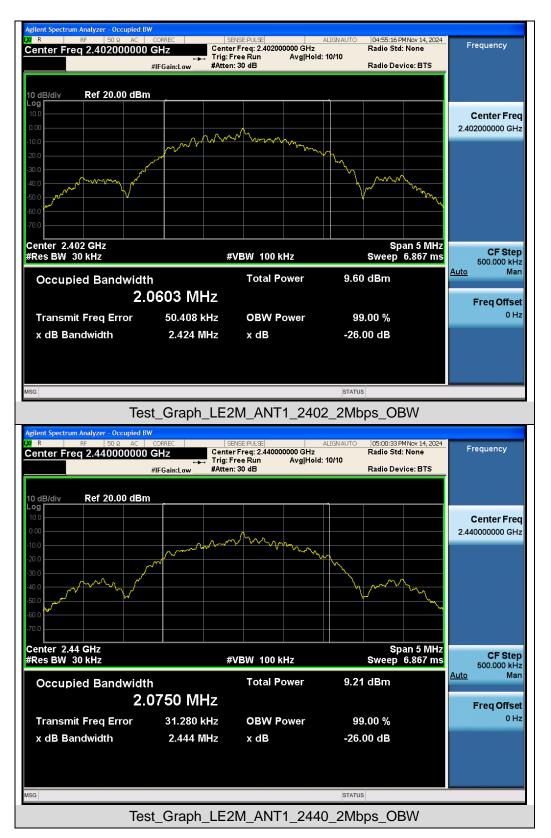







Test\_Graph\_LE2M\_ANT1\_2480\_2Mbps\_OBW




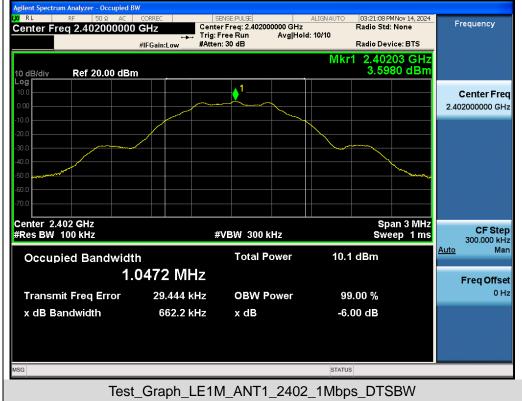




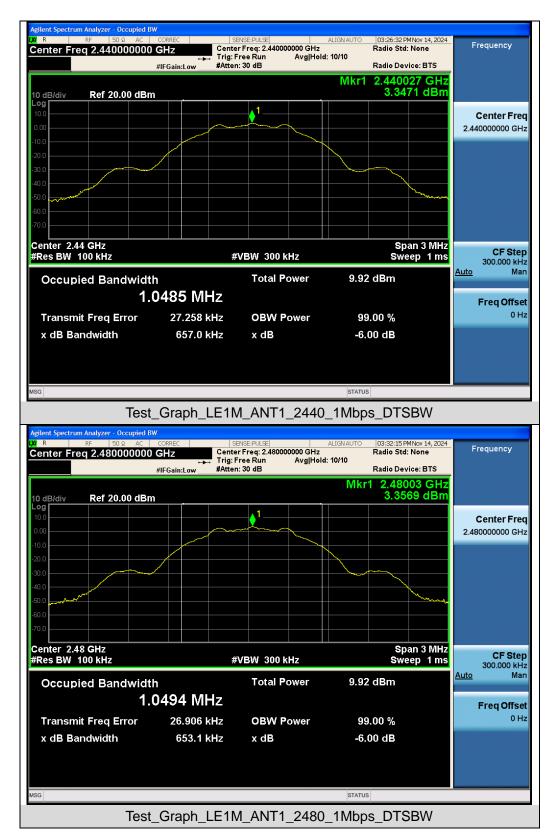



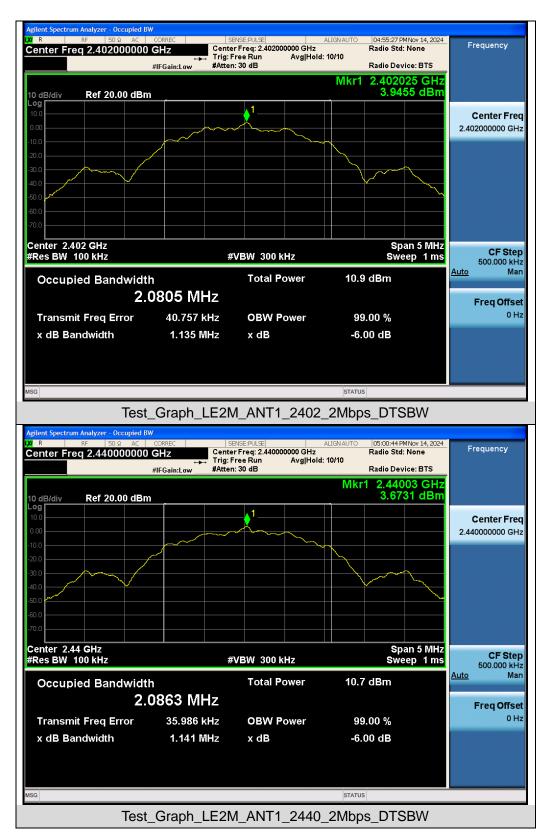



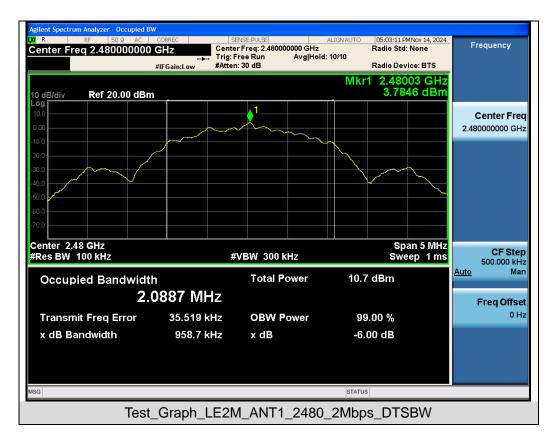



## 9. Power Spectral Density Measurement

#### 9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 9.3 Measurement Setup (Block Diagram of Configuration)

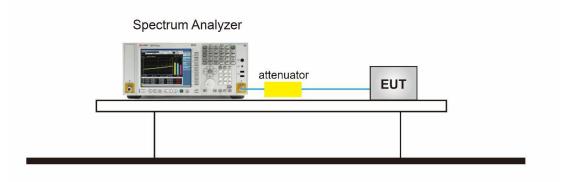





#### 9.4 Measurement Results

Test Data of Conducted Output Power Spectral Density						
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
	2402	-11.923	≪8	Pass		
GFSK_1Mbps	2440	-12.782	≪8	Pass		
	2480	-12.156	≪8	Pass		
	2402	-12.249	≪8	Pass		
GFSK_2Mbps	2440	-13.832	≪8	Pass		
	2480	-13.772	≪8	Pass		


#### Test Graphs of Conducted Output Power Spectral Density

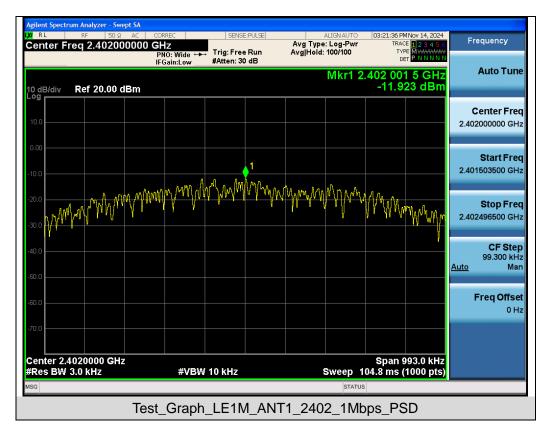




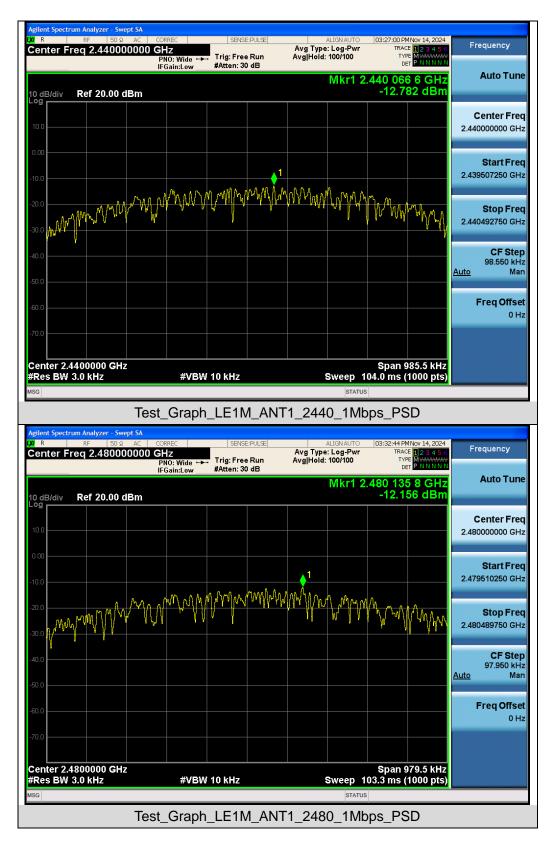



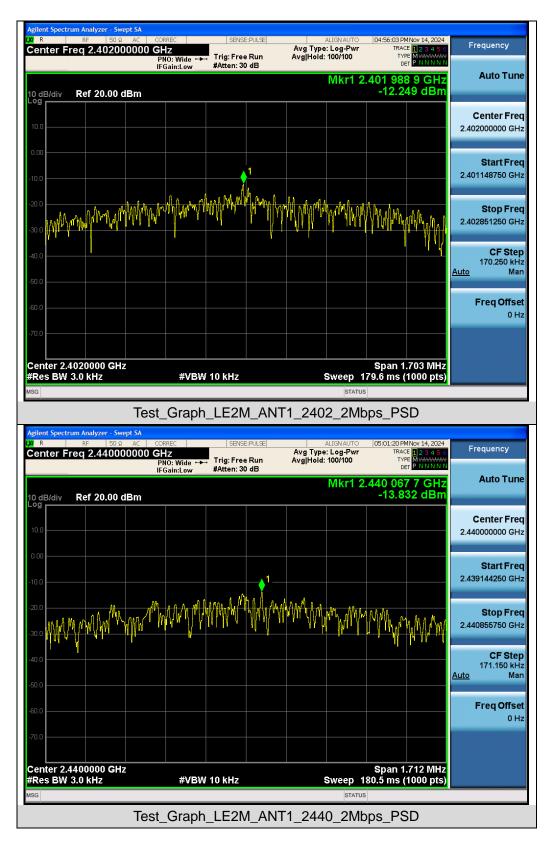



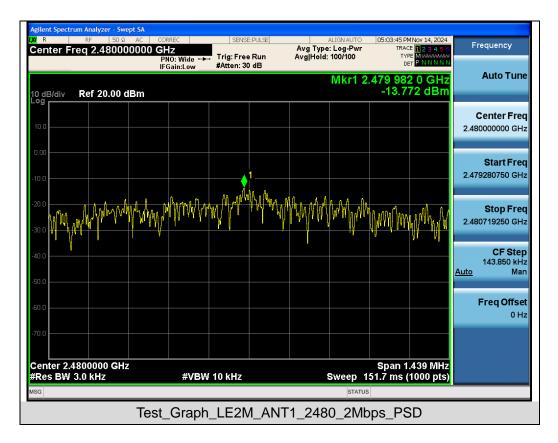



## 10. Conducted Band Edge and Out-of-Band Emissions


#### **10.1 Provisions Applicable**

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

#### **10.2 Measurement Procedure**

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to  $\geq$  1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW  $\geq$  3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

#### 10.3 Measurement Setup (Block Diagram of Configuration)

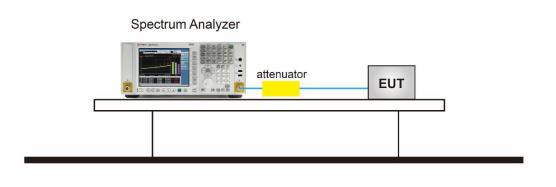




#### **10.4 Measurement Results**




#### Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



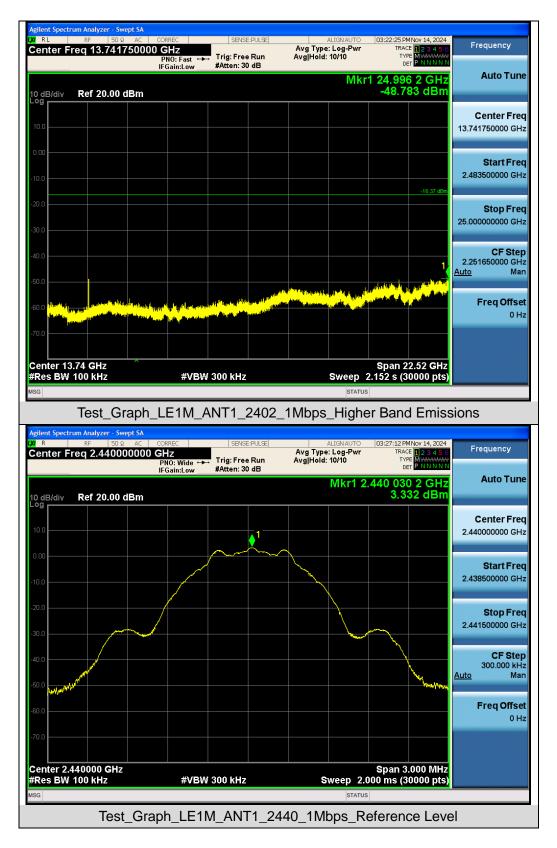



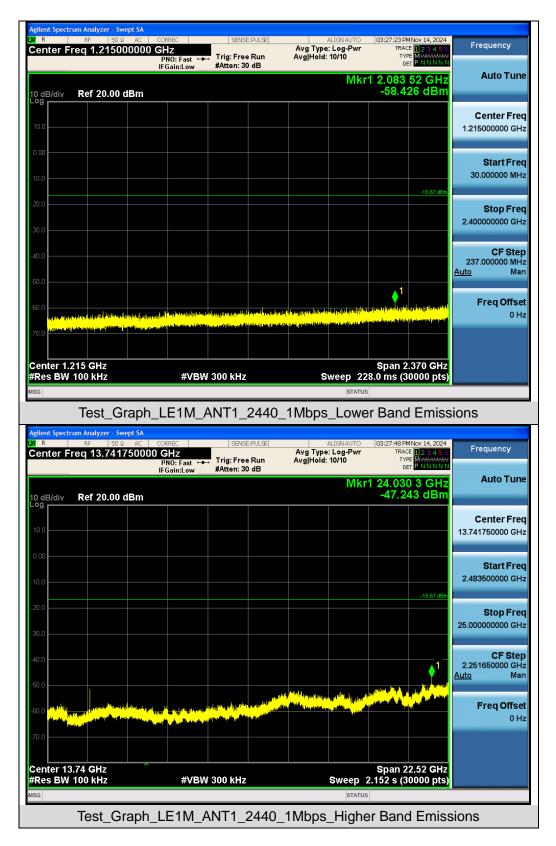












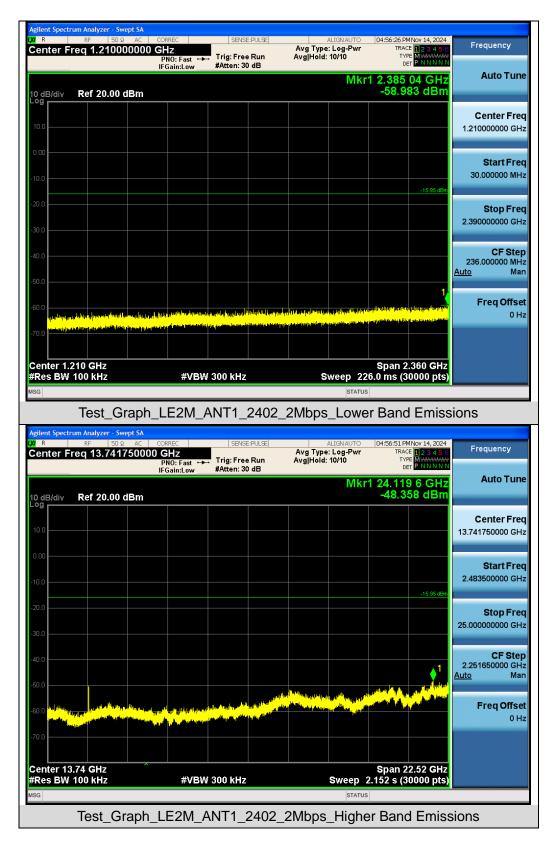













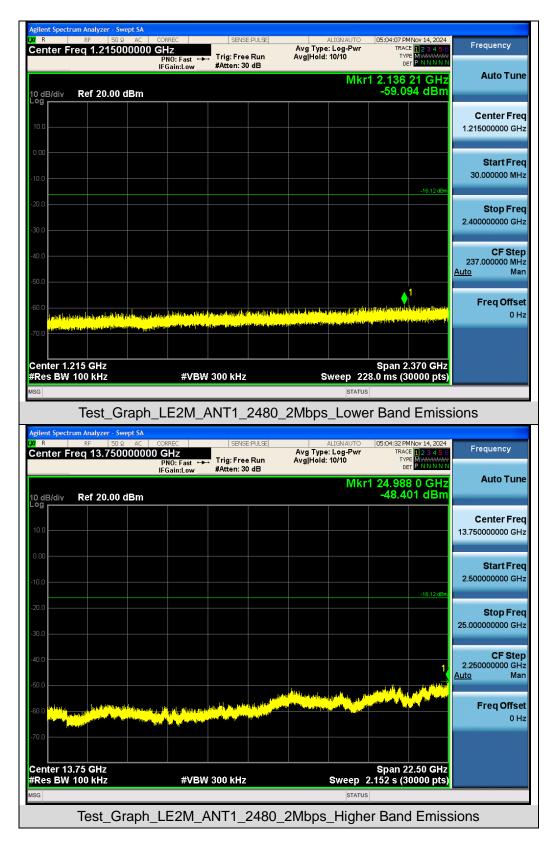



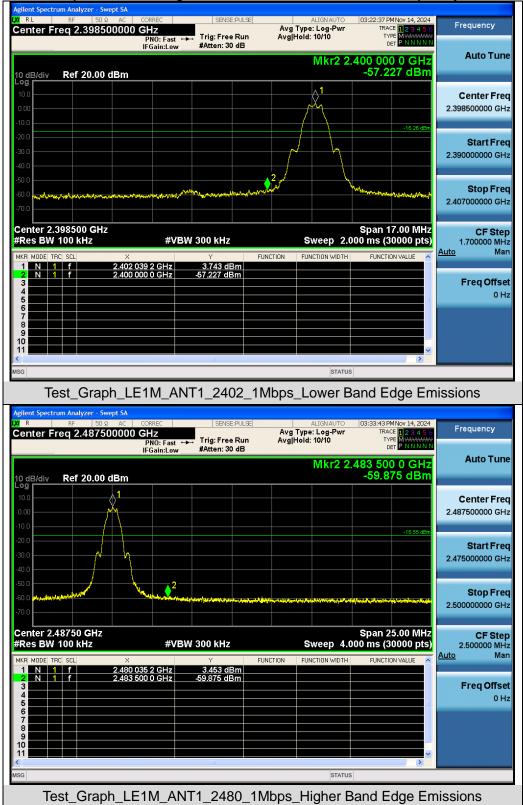

#### Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands







# **11. Radiated Spurious Emission**

### **11.1 Measurement Limit**

#### FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### **11.2 Measurement Procedure**

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



- 8. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 9. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 10. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 11. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



#### • Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

#### • Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

#### <u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW  $\geq$  [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10\*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




### 11.3 Measurement Setup (Block Diagram of Configuration)

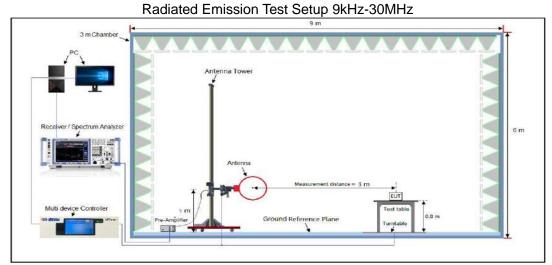

Radiated Emission Test Setup 30MHz-1000MHz

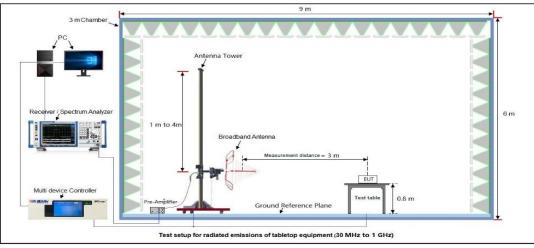

Radiated Emission Test Setup Above 1000MHz

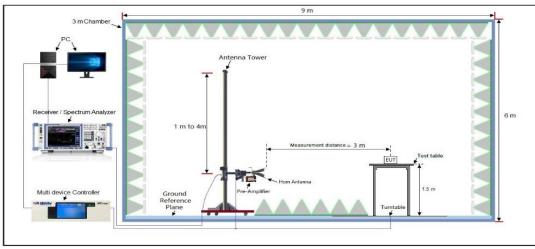




#### **11.4 Measurement Result**

#### Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Radia	ted Emiss	ion Test Res	ults at 30MH	z-1GHz		
EUT N	lame	Wire	eless Phone			Model Na	ame	W610H	
Tempe	erature	22.9	ୖ୰			Relative	Humidity	58.4%	
Press	ure	960	hPa			Test Volt	age	DC 3.8V b	y battery
Test N	lode	Mod	le 1			Antenna	Polarity	Horizontal	
	32	dBu∀/m	human market and a	2 2 2 2 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	33	5 Myder of All Market		Limit: Margin:	00
Final I	Data List	_Pea	ık						
NO.	Freq. [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	62.650	)7	22.75	12.58	40.00	17.25	100	110	Horizontal
2	95.093	80	29.61	15.44	43.50	13.89	100	180	Horizontal
3	126.32	85	27.52	16.02	43.50	15.98	100	70	Horizontal
4	160.34	56	28.39	12.30	43.50	15.11	100	260	Horizontal
5	337.21	55	29.35	17.02	46.00	16.65	100	170	Horizontal
6	446.41	41	34.06	24.88	46.00	11.94	100	190	Horizontal






			Radia	ted Emiss	ion Test Resu	ults at 30MHz	z-1GHz		
EUT N	lame	Wirele	ss Phone			Model Na	me	W610H	
Tempe	erature	<b>22.9℃</b>	l			Relative I	Humidity	58.4%	
Press	ure	960hP	a			Test Volta	age	DC 3.8V b	y battery
Test M	lode	Mode	1			Antenna	Polarity	Vertical	
	72.0	dBuV/m						Limit: —	
	-8	ger Mall Margaret						Margin:	
Final [	30.00 Data List		50 60 70	80	(MHz)	300	400 500 600	0 700 1000.00	00
NO.	Freq [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	57.392	22	30.09	17.07	40.00	9.91	100	80	Vertical
2	94.428	33	32.04	14.95	43.50	11.46	100	220	Vertical
3	123.69	84	36.14	17.79	43.50	7.36	100	100	Vertical
4	162.61	06	39.40	18.24	43.50	4.1	100	210	Vertical
5	443.29	43	32.87	25.95	46.00	13.13	100	170	Vertical
6	716.68	20	35.29	28.68	46.00	10.71	100	130	Vertical



			Radia	ted Emiss	ion Test Res	ults at 30MHz	z-1GHz		
EUT N	lame	Wire	eless Phone			Model Na	me	W610H	
Tempe	erature	22.9	)°C			Relative H	lumidity	58.4%	
Press	ure	960	hPa			Test Volta	ige	DC 3.8V b	y battery
Test N	lode	Moc	le 4			Antenna	Polarity	Horizontal	
	32	1B uV / m		Market Market	and the second s	Lunder de serie de la constante de la constante de la constant	4 5	Limit: — Margin: —	
	30.000	) 4	0 50 60 70	80	(MHz)	300	400 500 60	0 700 1000.00	00
Final I	Data List <sub>-</sub>	_Pea	k						
NO.	Freq. [MHz]		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	50.408	9	19.95	13.17	40.00	20.05	100	100	Horizontal
2	117.360	)3	23.31	16.37	43.50	20.19	100	70	Horizontal
3	189.074	13	22.17	13.24	43.50	21.33	100	60	Horizontal
4	401.838	85	31.74	20.44	46.00	14.26	100	230	Horizontal
5	447.982	22	31.26	24.82	46.00	14.74	100	180	Horizontal
6	719.199	95	31.16	24.77	46.00	14.84	100	190	Horizontal





			Radia	ted Emiss	ion Test Res	ults at 30MHz	-1GHz		
EUT N	lame	Wirele	ess Phone			Model Na	me	W610H	
Tempe	erature	<b>22.9</b> ℃	1			Relative H	lumidity	58.4%	
Press	ure	960hP	a			Test Volta	ge	DC 3.8V b	y battery
Test M	lode	Mode	4			Antenna I	Polarity	Vertical	
	72.0	dBu¥/m							
	-8	WH M MM	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	80	3 4 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	300		Limit: Margin: § \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	10
Final [	Data List		30 00 70	00	(M112)	500	400 500 00	0 700 1000.00	
NO.	Freq. [MHz]		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	51.300	)5	30.39	17.01	40.00	9.61	100	220	Vertical
2	94.428	34	31.30	14.95	43.50	12.2	100	50	Vertical
3	122.834	40	34.91	17.77	43.50	8.59	100	190	Vertical
4	160.34	56	38.25	18.21	43.50	5.25	100	180	Vertical
5	441.742	26	32.67	26.02	46.00	13.33	100	60	Vertical
6	663.472	29	35.64	27.53	46.00	10.36	100	200	Vertical

## **RESULT: Pass**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 1/4 are the worst case and recorded in the report.



#### **Radiated Emissions Test Results for Above 1GHz**

EUT Name	Wireless	Phone	I	Model Name	W610H	
Temperature	<b>25</b> ℃		F	Relative Humidity	55.4%	
Pressure	960hPa		1	Test Voltage	DC 3.8V	by battery
Test Mode	Mode 1			Antenna Polarity	Horizonta	I
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804.000	50.33	0.08	50.41	74.00	-23.59	peak
4804.000	40.01	0.08	40.09	54.00	-13.91	AVG
7206.000	49.87	2.21	52.08	74.00	-21.92	peak
7206.000	40.22	2.21	42.43	54.00	-11.57	AVG
Remark:						
Factor = Anten	na Factor + Cat	ole Loss – Pre	-amplifier.			
	Wireless		1	Model Name	W610H	
EUT Name				Model Name Relative Humidity	W610H 55.4%	
EUT Name Temperature Pressure	Wireless		-		55.4%	by battery
EUT Name Temperature Pressure	Wireless 25℃		F	Relative Humidity	55.4%	by battery
EUT Name Temperature Pressure	Wireless 25℃ 960hPa Mode 1		۲ ۲ ۱	Relative Humidity Test Voltage	55.4% DC 3.8V	by battery
EUT Name Temperature	Wireless 25℃ 960hPa		F	Relative Humidity Test Voltage	55.4% DC 3.8V	by battery Value Type
EUT Name Temperature Pressure Test Mode	Wireless 25℃ 960hPa Mode 1 Meter	Phone	Emission	Relative Humidity Test Voltage Antenna Polarity	55.4% DC 3.8V Vertical	
EUT Name Temperature Pressure Test Mode Frequency	Wireless 25℃ 960hPa Mode 1 Meter Reading	Phone	Emission Level	Relative Humidity Test Voltage Antenna Polarity Limits	55.4% DC 3.8V Vertical Margin	
EUT Name Temperature Pressure Test Mode Frequency (MHz)	Wireless 25℃ 960hPa Mode 1 Meter Reading (dBµV)	Phone Factor (dB)	Emission Level (dBµV/m)	Relative Humidity Test Voltage Antenna Polarity Limits (dBµV/m)	55.4% DC 3.8V Vertical Margin (dB)	Value Type
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000	Wireless 25℃ 960hPa Mode 1 Meter Reading (dBµV) 49.71	Phone Factor (dB) 0.08	Emission Level (dBµV/m) 49.79	Relative Humidity Test Voltage Antenna Polarity Limits (dBµV/m) 74.00	55.4% DC 3.8V Vertical Margin (dB) -24.21	Value Type
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000	Wireless 25℃ 960hPa Mode 1 Meter Reading (dBµV) 49.71 39.89	Phone Factor (dB) 0.08 0.08	Emission Level (dBµV/m) 49.79 39.97	Limits       (dBµV/m)         74.00       54.00	55.4% DC 3.8V Vertical Margin (dB) -24.21 -14.03	Value Type peak AVG

### **RESULT: Pass**



EUT Name	Wireless	Phone		Model Name		W610H	
Temperature	<b>25</b> ℃			Relative Humidi	ty	55.4%	
Pressure	960hPa			Test Voltage		DC 3.8V	by battery
Test Mode	Mode 2			Antenna Polarit	у	Horizonta	al
Frequency	Meter Reading	Factor	Emission Level	Limits		Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)		(dB)	
4880.000	50.13	0.14	50.27	74.00		-23.73	peak
4880.000	40.14	0.14	40.28	54.00		-13.72	AVG
7320.000	48.96	2.36	51.32	74.00		-22.68	peak
7320.000	38.63	2.36	40.99	54.00		-13.01	AVG
Remark:							
Factor = Anten	na Facto + C	able Loss – P	re-amplifier.				
EUT Name	Wireless	s Phone		Model Name		W610H	
EUT Name Temperature	Wireless 25°C	s Phone		Model Name Relative Humidi	ty	W610H 55.4%	
		s Phone			ty	55.4%	by battery
Temperature	<b>25</b> ℃	S Phone		Relative Humidi		55.4%	by battery
Temperature Pressure Test Mode Frequency	25℃ 960hPa Mode 2 Meter Reading	Factor	mission Level	Relative Humidi Test Voltage Antenna Polarit Limits	y	55.4% DC 3.8V Vertical Margin	by battery Value Type
Temperature Pressure Test Mode	25℃ 960hPa Mode 2 Meter Reading (dBµV)	Factor (dB)	mission Level (dBµV/m)	Relative Humidi Test Voltage Antenna Polarit Limits (dBµV/m)	y	55.4% DC 3.8V Vertical Margin (dB)	Value Type
Temperature Pressure Test Mode Frequency	25℃ 960hPa Mode 2 Meter Reading	Factor	mission Level	Relative Humidi Test Voltage Antenna Polarit Limits	y	55.4% DC 3.8V Vertical Margin	
Temperature Pressure Test Mode Frequency (MHz)	25℃ 960hPa Mode 2 Meter Reading (dBµV)	Factor (dB)	mission Level (dBµV/m)	Relative Humidi Test Voltage Antenna Polarit Limits (dBµV/m)	y	55.4% DC 3.8V Vertical Margin (dB)	Value Type
Temperature Pressure Test Mode Frequency (MHz) 4880.000	25℃ 960hPa Mode 2 Meter Reading (dBµV) 49.36	Factor (dB) 0.14	mission Level (dBµV/m) 49.50	Relative Humidi Test Voltage Antenna Polarit Limits (dBµV/m) 74.00	y	55.4% DC 3.8V Vertical Margin (dB) -24.50	Value Type
Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000	25°C 960hPa Mode 2 Meter Reading (dBµV) 49.36 40.37	Factor (dB) 0.14 0.14	mission Level (dBµV/m) 49.50 40.51	Relative Humidi Test Voltage Antenna Polarit Limits (dBµV/m) 74.00 54.00	y	55.4% DC 3.8V Vertical Margin (dB) -24.50 -13.49	Value Type peak AVG

### **Radiated Emissions Test Results for Above 1GHz**

### **RESULT: Pass**



EUT Name	Wirel	ess Phone		Mo	odel Name	W610H	
Temperature	<b>25</b> ℃			Re	elative Humidity	55.4%	
Pressure	960h	Pa		Те	st Voltage	DC 3.8V b	y battery
Test Mode	Mode	3		An	ntenna Polarity	Horizontal	
Frequency	Meter Reading	Factor	Emissi Leve		Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/	m)	(dBµV/m)	(dB)	51
4960.000	50.11	0.22	50.33	3	74.00	-23.67	peak
4960.000	40.36	0.22	40.58	3	54.00	-13.42	AVG
7440.000	48.37	2.64	51.01		74.00	-22.99	peak
7440.000	40.19	2.64	42.83	3	54.00	-11.17	AVG
Remark: Factor = Anten	na Factor +	Cable Loss –	Pre-amplifier.				
		Cable Loss – I	Pre-amplifier.		odel Name	W610H	
Factor = Anten			Pre-amplifier.	Mo	odel Name elative Humidity		
Factor = Anten EUT Name	Wirel	ess Phone	Pre-amplifier.	Mo Re			y battery
Factor = Anten EUT Name Temperature	Wirel 25℃	ess Phone Pa	Pre-amplifier.	Mo Re Te	elative Humidity	55.4%	y battery
Factor = Anten EUT Name Temperature Pressure	Wirel 25℃ 960h	Pa 3	Pre-amplifier.	Ma Re Te An	elative Humidity st Voltage	55.4% DC 3.8V b	y battery Value Type
Factor = Anten EUT Name Temperature Pressure Test Mode	Wirel 25°C 960h Mode	ess Phone Pa 3 Factor	Emissie	Ma Re Te An	elative Humidity st Voltage ntenna Polarity	55.4% DC 3.8V b Vertical	
Factor = Anten EUT Name Femperature Pressure Fest Mode Frequency	Wirel 25°C 960h Mode Meter Readin	ess Phone Pa 3 Factor	Emissie	Ma Re Te An on m)	elative Humidity st Voltage ntenna Polarity Limits	55.4% DC 3.8V b Vertical Margin	
Factor = Anten EUT Name Femperature Pressure Test Mode Frequency (MHz)	Wirel 25℃ 960h Mode Readin (dBµV)	ess Phone Pa 3 Factor (dB)	Emissie Leve (dBµV/	Ma Re Te An On I m)	elative Humidity st Voltage ntenna Polarity Limits (dBµV/m)	55.4% DC 3.8V b Vertical Margin (dB)	Value Type
Factor = Anten EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4960.000	Wirel 25°C 960h Mode Meter Reading (dBµV) 49.74	ess Phone Pa 3 Factor (dB) 0.22	Emissie Leve (dBµV/ 49.96	Ma Re Te An On I m)	elative Humidity est Voltage ntenna Polarity Limits (dBµV/m) 74.00	55.4% DC 3.8V b Vertical Margin (dB) -24.04	Value Type
Factor = Anten EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4960.000 4960.000	Wirel           25 °C           960h           Mode           Meter           Reading           (dBµV)           49.74           39.33	ess Phone Pa 3 Factor (dB) 0.22 0.22	Emissie Leve (dBµV/ 49.96 39.55	Mc Re Te An On m)	Limits (dBµV/m) 74.00	55.4% DC 3.8V b Vertical Margin (dB) -24.04 -14.45	Value Type peak AVG

## **RESULT: Pass**



EUT Name	Wireless	Phone	r	Model Name	W610H	
Temperature	<b>25</b> ℃		F	Relative Humidity	55.4%	
Pressure	960hPa		٦	Test Voltage	DC 3.8V	by battery
Test Mode	Mode 4		1	Antenna Polarity	Horizonta	al
Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804.000	50.12	0.08	50.2	74.00	-23.80	peak
4804.000	41.35	0.08	41.43	54.00	-12.57	AVG
7206.000	49.37	2.21	51.58	74.00	-22.42	peak
7206.000	40.93	2.21	43.14	54.00	-10.86	AVG
Remark:	na Factor + Ca	hla I oss - Pro				
	na Factor + Ca	ble Loss – Pre	e-amplifier.			
Remark:	na Factor + Ca Wireless			Model Name	W610H	
Remark: Factor = Ant n				Model Name Relative Humidity		
Remark: Factor = Ant n EUT Name	Wireless		r F		55.4%	by battery
Remark: Factor = Ant n EUT Name Temperature	Wireless 25℃		F	Relative Humidity	55.4%	by battery
Remark: Factor = Ant n EUT Name Temperature Pressure	Wireless 25℃ 960hPa		F	Relative Humidity Test Voltage	55.4% DC 3.8V	
Remark: Factor = Ant n EUT Name Temperature Pressure Test Mode	Wireless 25℃ 960hPa Mode 4 Meter	Phone	F Emission	Relative Humidity Test Voltage Antenna Polarity	55.4% DC 3.8V Vertical	
Remark: Factor = Ant n EUT Name Temperature Pressure Test Mode Frequency	Wireless 25℃ 960hPa Mode 4 Meter Readin	Phone	Emission Level	Relative Humidity Test Voltage Antenna Polarity Limits	55.4% DC 3.8V Vertical Margin	by battery Value Type
Remark: Factor = Ant n EUT Name Temperature Pressure Test Mode Frequency (MHz)	Wireless 25℃ 960hPa Mode 4 Meter Readin (dBµV)	Phone Factor (dB)	Emission Level (dBµV/m)	Relative Humidity Test Voltage Antenna Polarity Limits (dBµV/m)	55.4% DC 3.8V Vertical Margin (dB)	Value Type
Remark: Factor = Ant n EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000	Wireless 25℃ 960hPa Mode 4 Meter Readin (dBµV) 49.98	Phone Factor (dB) 0.08	Emission Level (dBµV/m) 50.06	Relative Humidity Test Voltage Antenna Polarity Limits (dBµV/m) 74.00	55.4% DC 3.8V Vertical Margin (dB) -23.94	Value Type
Remark:Factor = AntFactor = AntnEUT NameTemperaturePressureTest ModeFrequency(MHz)4804.0004804.000	Wireless 25℃ 960hPa Mode 4 Meter Readin (dBµV) 49.98 40.36	Phone Factor (dB) 0.08 0.08	Emission Level (dBµV/m) 50.06 40.44	Relative Humidity Test Voltage Antenna Polarity Limits (dBµV/m) 74.00 54.00	55.4% DC 3.8V Vertical Margin (dB) -23.94 -13.56	Value Type peak AVG

## **RESULT: Pass**



EUT Name	Wireless	s Phone		Model Name		W610H	
Temperature	<b>25</b> ℃			Relative Humidity	у	55.4%	
Pressure	960hPa			Test Voltage		DC 3.8V I	by battery
Test Mode	Mode 5			Antenna Polarity		Horizonta	I
Frequency	Meter Reading	Factor	Emission Level	Limits Margin V		Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
4880.000	49.31	0.14	49.45	74.00		-24.55	pea
4880.000	41.36	0.14	41.50	54.00		-12.50	AVG
7320.000	48.37	2.36	50.73	74.00		-23.27	peak
7320.000	38.25	2.36	40.61	54.00		-13.39	AVG
Remark:							
Factor = Antenr	ha Factor + Ca	able Loss – Pre	e-amplifier.				
EUT Name	Wireless	3 Phone	1	Model Name		W610H	
Temperature	<b>25</b> ℃			Relative Humidity	у	55.4%	
Duesee					DC 3.8V by battery		
Pressure	960hPa			Test Voltage		DC 3.8V I	by battery
Test Mode	960hPa Mode 5			Test Voltage Antenna Polarity		Vertical	by battery
	Mode 5						by battery
		Factor					vy battery
Test Mode	Mode 5 Meter	Factor (dB)	Emission	Antenna Polarity		Vertical	
Test Mode Frequency	Mode 5 Meter Reading		Emission Level	Antenna Polarity Limits	٦	Vertical Vargin	
Test Mode Frequency (MHz)	Mode 5 Meter Reading (dBµV)	(dB)	Emission Level (dBµV/m)	Antenna Polarity Limits (dBµV/m)	1	Vertical Margin dB)	Value Type
Test Mode Frequency (MHz) 4880.000	Mode 5 Meter Reading (dBµV) 50.31	(dB) 0.14	Emission Level (dBµV/m) 50.45	Antenna Polarity Limits (dBµV/m) 74.00	<u>г</u>	Vertical Margin dB) -23.55	Value Type
Test Mode           Frequency           (MHz)           4880.000           4880.000	Mode 5 Meter Reading (dBµV) 50.31 42.39	(dB) 0.14 0.14	Emission Level (dBµV/m) 50.45 42.53	Antenna Polarity Limits (dBµV/m) 74.00 54.00	<u>ר</u>	Vertical Margin dB) -23.55 -11.47	Value Type peak AVG

### **Radiated Emissions Test Results for Above 1GHz**

### **RESULT: Pass**



EUT Name		Wireless	Phone		Мо	del Name	W610H		
Temperature	<b>25</b> ℃				Relative Humidity		55.4%	55.4%	
Pressure		960hPa			Test Voltage		DC 3.8V b	DC 3.8V by battery	
Test Mode		Mode 6			An	tenna Polarity	Horizontal		
Frequency		Factor		Emissio Level	n	Limits	Margin	Value Type	
MHz)	(	dBµV)	(dB)	(dBµV/m	n)	(dBµV/m)	(dB)		
4960.000		48.96	0.22	49.18		74.00	-24.82	peak	
4960.000		41.32	0.22	41.54		54.00	-12.46	AVG	
7440.000		49.33	2.64	51.97		74.00	-22.03	peak	
7440.000		41.32	2.64	43.96		54.00	-10.04	AVG	
Remark:									
Factor = Ante	nna F	-actor + Ca	adie Loss – Pi	e-ampliner	•				
EUT Name	nna F	-actor + Ca Wireless		e-ampilier		odel Name	W610H		
					Мо	odel Name lative Humidity			
EUT Name		Wireless			Mo Re			y battery	
EUT Name Temperature		Wireless 25°C			Mo Re Tes	lative Humidity	55.4%	y battery	
EUT Name Temperature Pressure		Wireless 25°C 960hPa Mode 6			Mc Re Tes An	lative Humidity st Voltage	55.4% DC 3.8V b	y battery	
EUT Name Temperature Pressure		Wireless 25°C 960hPa		Emissio	Mc Re Tes An	lative Humidity st Voltage	55.4% DC 3.8V b		
EUT Name Temperature Pressure Test Mode	R	Wireless 25°C 960hPa Mode 6 Meter	Phone	Emissio	Mo Re Tes An	lative Humidity st Voltage tenna Polarity	55.4% DC 3.8V b Vertical	y battery Value Type	
EUT Name Temperature Pressure Test Mode Frequency	R	Wireless 25℃ 960hPa Mode 6 Meter e ding	Phone Factor	Emissio	Mo Re Tes An	lative Humidity st Voltage tenna Polarity Limits	55.4% DC 3.8V b Vertical Margin		
EUT Name Temperature Pressure Test Mode Frequency (MHz)	R	Wireless 25℃ 960hPa Mode 6 Meter e ding dBµV)	Phone Factor (dB)	Emissio Level (dBµV/n	Mo Re Tes An	Iative Humidity st Voltage tenna Polarity Limits (dBµV/m)	55.4% DC 3.8V b Vertical Margin (dB)	Value Type	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	R (	Wireless 25℃ 960hPa Mode 6 Meter e ding dBµV) 50.31	Phone Factor (dB) 0.22	Emissio Level (dBµV/n 50.53	Mo Re Tes An	Iative Humidity st Voltage tenna Polarity Limits (dBµV/m) 74.00	55.4% DC 3.8V b Vertical Margin (dB) -23.47	Value Type	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	R (	Wireless 25℃ 960hPa Mode 6 Meter e ding dBµV) 50.31 40.39	Phone Factor (dB) 0.22 0.22	Emissio Level (dBµV/m 50.53 40.61	Mo Re Tes An	Iative Humidity st Voltage tenna Polarity Limits (dBµV/m) 74.00 54.00	55.4% DC 3.8V b Vertical Margin (dB) -23.47 -13.39	Value Type peak AVG	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000	R (	Wireless 25℃ 960hPa Mode 6 Meter e ding dBµV) 50.31 40.39 48.74	Phone Factor (dB) 0.22 0.22 2.64	Emissio Level (dBµV/n 50.53 40.61 51.38	Mo Re Tes An	Iative Humidity st Voltage tenna Polarity Limits (dBµV/m) 74.00 54.00 74.00	55.4% DC 3.8V b Vertical Margin (dB) -23.47 -13.39 -22.62	Value Type Peak AVG peak	


#### **RESULT: Pass**

Note:


- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



EUT Name	Wireless Phone	Model Name	W610H
Temperature	<b>25</b> ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	Mode 1	Antenna Polarity	Horizontal

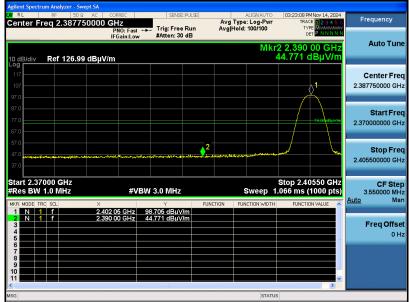


Test Graph for Average Measurement

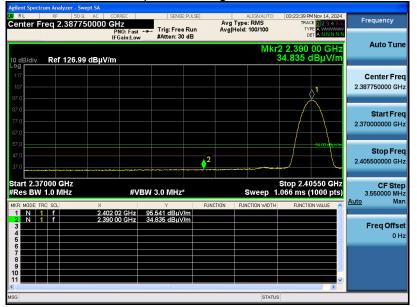


## **RESULT: Pass**



EUT Name	Wireless Phone	Model Name	W610H
Temperature	<b>25</b> ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	Mode 1	Antenna Polarity	Vertical

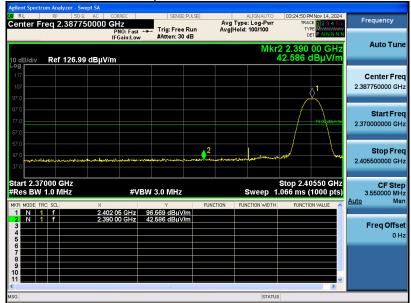

Test Graph for Average Measurement

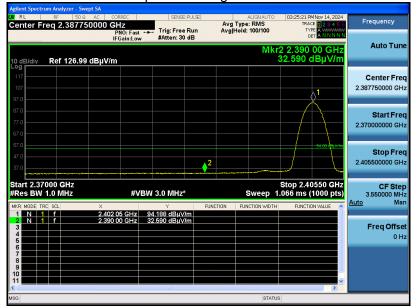


## **RESULT: Pass**




Band Edge Emission Test Results for Restricted Bands	Band Edg	e Emission	Test Results f	for Restricted Bands
--	----------	------------	----------------	----------------------

EUT Name	Wireless Phone	Model Name	W610H
Temperature	<b>25</b> ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	Mode 3	Antenna Polarity	Horizontal

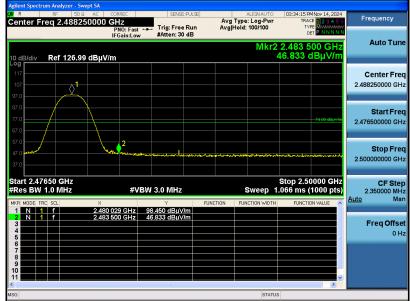


Test Graph for Average Measurement

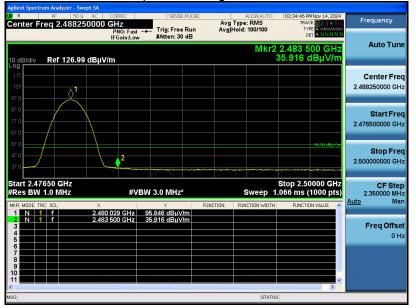

## **RESULT: Pass**



EUT Name	Wireless Phone	Model Name	W610H
Temperature	<b>25</b> ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	Mode 3	Antenna Polarity	Vertical

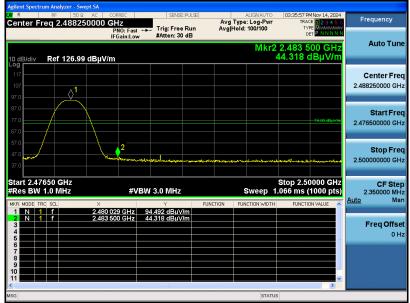

Test Graph for Average Measurement




## **RESULT: Pass**




Band Edge Emission Test Results for Re	estricted Bands
--	-----------------

EUT Name	Wireless Phone	Model Name	W610H
Temperature	<b>25</b> ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	Mode 4	Antenna Polarity	Horizontal

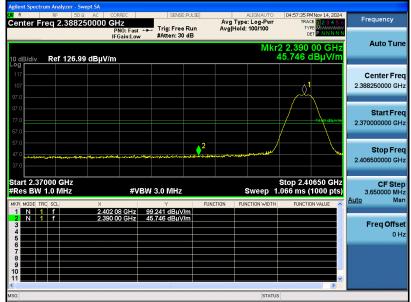

Test Graph for Average Measurement

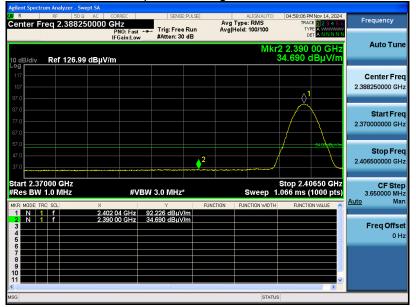


## **RESULT: Pass**




Band Edge Emission Test Results for Restricte	d Bands
---	---------

EUT Name	Wireless Phone	Model Name	W610H
Temperature	<b>25</b> ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	Mode 4	Antenna Polarity	Vertical

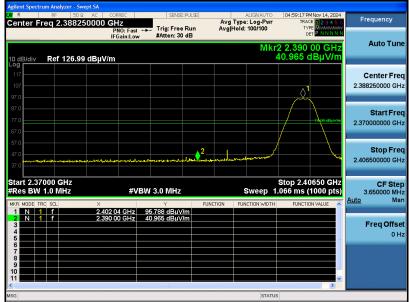

Test Graph for Average Measurement

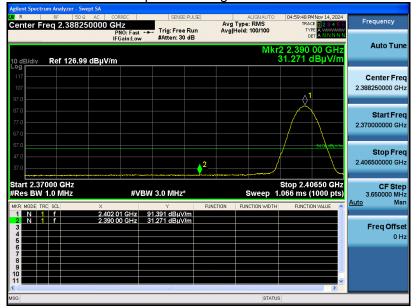


## **RESULT: Pass**




Band Edge Emission Test Results for Restricted Bands
--

EUT Name	Wireless Phone	Model Name	W610H
Temperature	<b>25</b> ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	Mode 6	Antenna Polarity	Horizontal

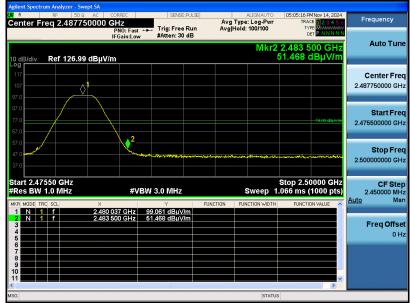


Test Graph for Average Measurement

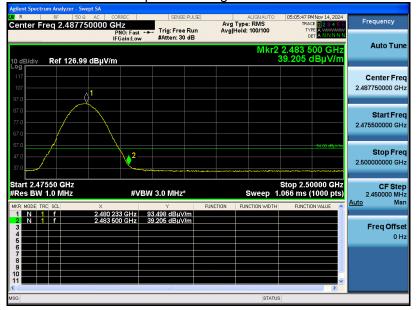


## **RESULT: Pass**



EUT Name	Wireless Phone	Model Name	W610H
Temperature	<b>25</b> ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.8V by battery
Test Mode	Mode 6	Antenna Polarity	Vertical

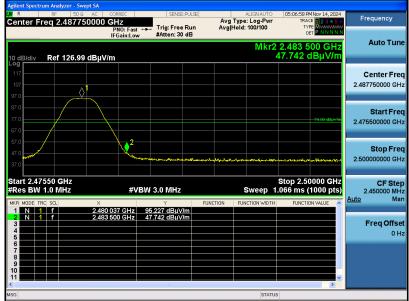

Test Graph for Average Measurement

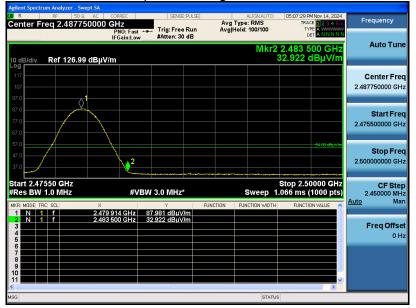

#### **RESULT: Pass**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



# 12. AC Power Line Conducted Emission Test


### 12.1 Measurement Limit

<b>Francisco</b>	Maximum RF Line Voltage		
Frequency	Q.P. (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

### 12.2 Measurement Setup (Block Diagram of Configuration)

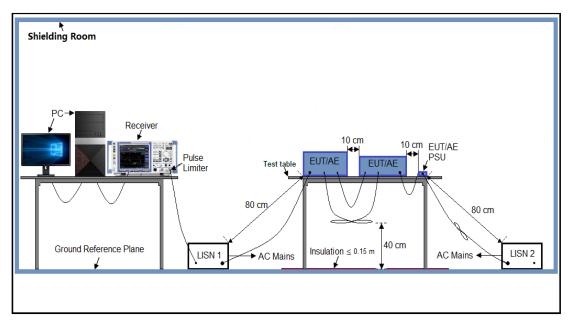



### 12.3 Preliminary Procedure of Line Conducted Emission Test


- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


### **12.4 Final Procedure of Line Conducted Emission Test**

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

### **12.5 Measurement Results**





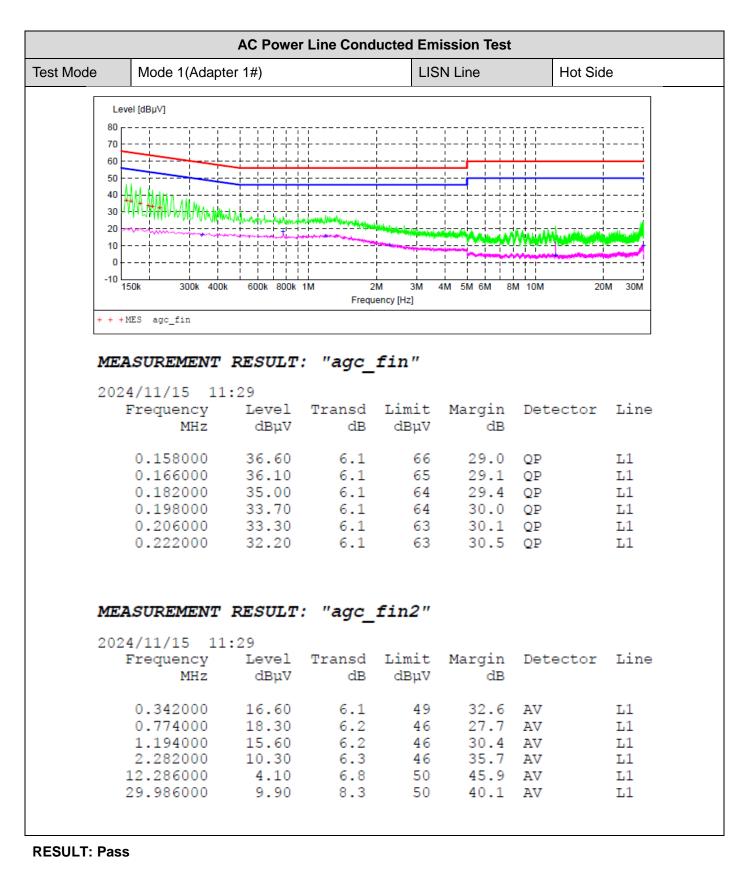


 Attestation of Global Compliance(Shenzhen)Co., Ltd


 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/







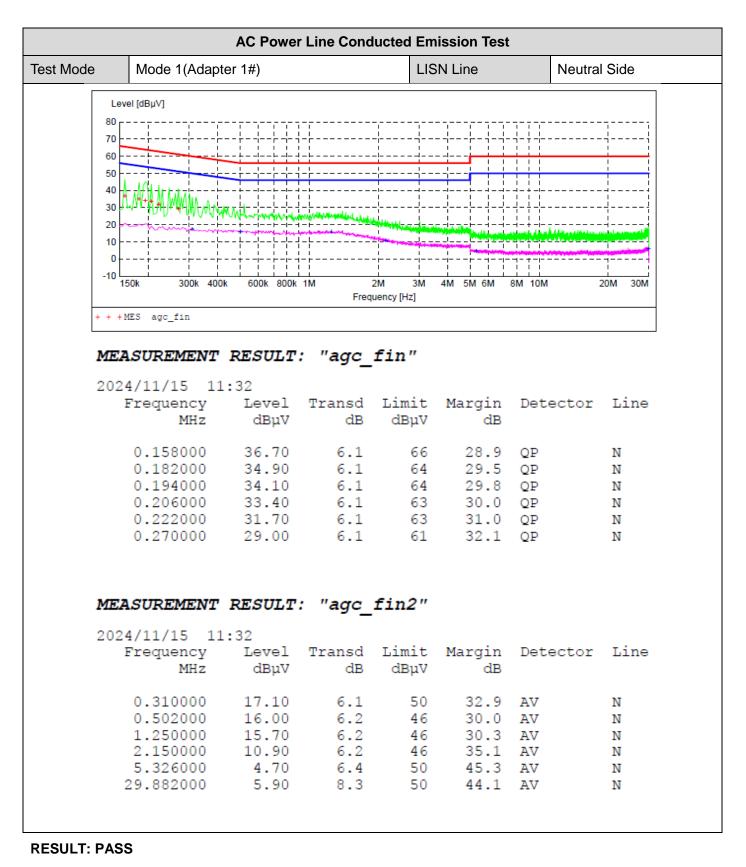


Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



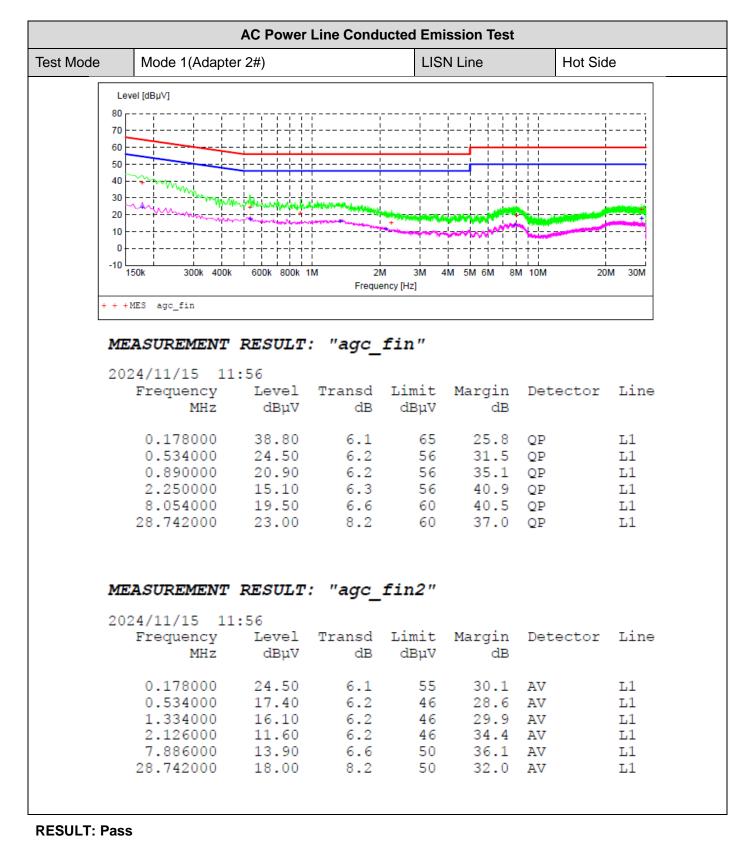





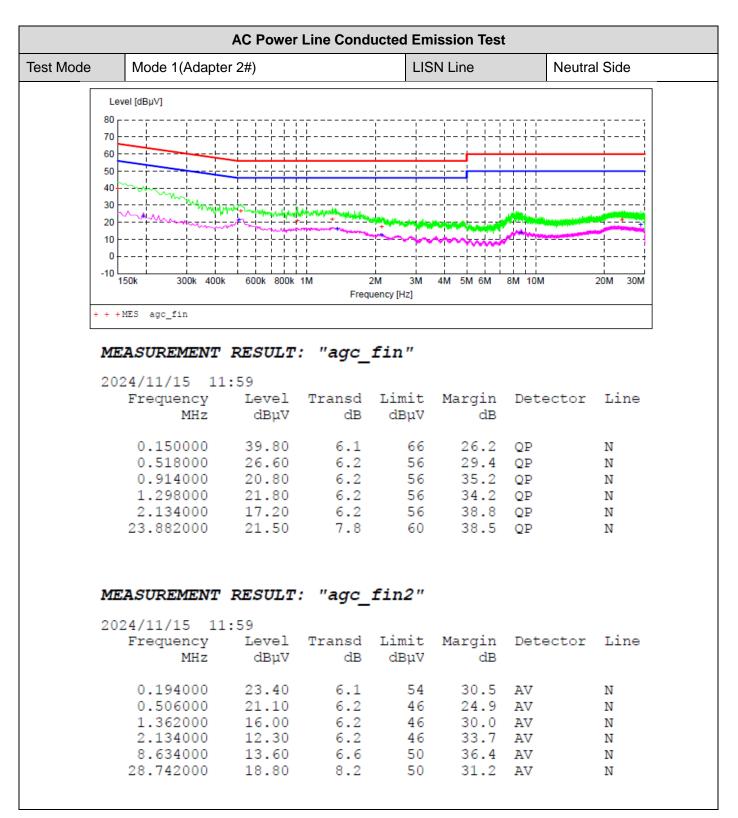

#### **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Report No.: AGC 14499241101FR02 Page 74 of 74

# Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC14499241101AP02

# Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC14499241101AP03

-----End of Report-----



## Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.