



A D T

FCC TEST REPORT

(PART 27)

REPORT NO.: RF131023C25-7

MODEL NO.: 0P6B120

FCC ID: NM80P6B120

RECEIVED: Oct. 23, 2013

TESTED: Nov. 20, 2013 ~ Dec. 06, 2013

ISSUED: Jan. 08, 2014

APPLICANT: HTC Corporation

ADDRESS: No. 23, Xinghua Rd., Taoyuan 330, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by TAF
or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

TABLE OF CONTENTS

RELEASE CONTROL RECORD.....	3
1 CERTIFICATION	4
2 SUMMARY OF TEST RESULTS.....	5
2.1 MEASUREMENT UNCERTAINTY	6
2.2 TEST SITE AND INSTRUMENTS	7
3 GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 CONFIGURATION OF SYSTEM UNDER TEST	10
3.3 DESCRIPTION OF SUPPORT UNITS	10
3.4 DESCRIPTION OF TEST MODES	11
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
4 TEST TYPES AND RESULTS.....	14
4.1 OUTPUT POWER MEASUREMENT	14
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	14
4.1.2 TEST PROCEDURES	14
4.1.3 TEST SETUP	15
4.1.4 TEST RESULTS	16
4.2 FREQUENCY STABILITY MEASUREMENT	26
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	26
4.2.2 TEST PROCEDURE	26
4.2.3 TEST SETUP	26
4.2.4 TEST RESULTS	27
4.3 OCCUPIED BANDWIDTH MEASUREMENT	28
4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	28
4.3.2 TEST SETUP	28
4.3.3 TEST PROCEDURES	28
4.3.4 TEST RESULTS	29
4.4 PEAK TO AVERAGE RATIO.....	32
4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	32
4.4.2 TEST SETUP	32
4.4.3 TEST PROCEDURES	32
4.4.4 TEST RESULTS	33
4.5 BAND EDGE MEASUREMENT	36
4.5.1 LIMITS OF BAND EDGE MEASUREMENT	36
4.5.2 TEST SETUP	36
4.5.3 TEST PROCEDURES	37
4.5.4 TEST RESULTS	38
4.6 CONDUCTED SPURIOUS EMISSIONS	44
4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	44
4.6.2 TEST PROCEDURE	44
4.6.3 TEST SETUP	44
4.6.4 TEST RESULTS	45
4.7 RADIATED EMISSION MEASUREMENT	47
4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT	47
4.7.2 TEST PROCEDURES	47
4.7.3 DEVIATION FROM TEST STANDARD	47
4.7.4 TEST SETUP	48
4.7.5 TEST RESULTS	49
5 INFORMATION ON THE TESTING LABORATORIES	61
6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	62



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF131023C25-7	Original release	Jan. 08, 2014

1 CERTIFICATION

PRODUCT: Smartphone

MODEL NO.: 0P6B120

BRAND: HTC

APPLICANT: HTC Corporation

TESTED: Nov. 20, 2013 ~ Dec. 06, 2013

TEST SAMPLE: Production Unit

TEST STANDARDS: FCC Part 27, Subpart C, L

FCC Part 2

ANSI C63.4-2003

The above equipment (model: 0P6B120) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Ivonne Wu , **DATE:** Jan. 08, 2014

Ivonne Wu / Supervisor

APPROVED BY : Sam Chen , **DATE:** Jan. 08, 2014

Sam Chen / Senior Project Engineer

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

LTE Band 17			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(C)(10)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 27.53(g)	Occupied Bandwidth	PASS	Meet the requirement of limit.
27.50(d)(5)	Peak to average ratio	PASS	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -31.98dB at 195.78MHz.

LTE Band 4			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(d)(4)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	PASS	Meet the requirement of limit.
27.50(d)(5)	Peak to average ratio	PASS	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -11.33dB at 5197.50MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2.2 TEST SITE AND INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100744	Apr. 15, 2013	Apr. 14, 2014
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 17, 2012	Dec. 16, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Mar. 25, 2013	Mar. 24, 2014
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Jan. 07, 2013	Jan. 06, 2014
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 25, 2012	Dec. 24, 2013
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier EMCI	EMC 012645	980115	Dec. 28, 2012	Dec. 27, 2013
Preamplifier EMCI	EMC 184045	980116	Dec. 28, 2012	Dec. 27, 2013
Preamplifier EMCI	EMC 330H	980112	Dec. 28, 2012	Dec. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 18, 2013	Oct. 17, 2014
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 18, 2013	Oct. 17, 2014
RF signal cable Worken	RG-213	NA	Dec. 29, 2012	Dec. 28, 2013
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	Jul. 18, 2013	Jul. 17, 2014
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA
Communications Tester-Wireless	E5515C	MY52102544	Sep. 05, 2012	Sep. 04, 2014
Radio Communication Analyzer	MT8820C	6201300640	Aug. 01, 2013	Jul. 31, 2014

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 10.

3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

4. The FCC Site Registration No. is 690701.

5. The IC Site Registration No. is IC 7450F-10.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT


PRODUCT	Smartphone	
MODEL NO.	0P6B120	
POWER SUPPLY	5Vdc (adapter or host equipment) 3.8Vdc (battery)	
MODULATION TECHNOLOGY	LTE Band 17	QPSK, 16QAM
	LTE Band 4	QPSK, 16QAM
FREQUENCY RANGE	LTE Band 17 Channel Bandwidth: 5MHz	706.5MHz ~ 713.5MHz
	LTE Band 17 Channel Bandwidth: 10MHz	709MHz ~ 711MHz
	LTE Band 4 Channel Bandwidth: 1.4MHz	1710.7MHz ~1754.3MHz
	LTE Band 4 Channel Bandwidth: 3MHz	1711.5MHz ~1753.5MHz
	LTE Band 4 Channel Bandwidth: 5MHz	1712.5MHz ~1752.5MHz
	LTE Band 4 Channel Bandwidth: 10MHz	1715.0MHz ~1750.0MHz
EMISSION DESIGNATOR	LTE Band 17 Channel Bandwidth: 5MHz	4M50G7D
	LTE Band 17 Channel Bandwidth: 10MHz	8M92W7D
	LTE Band 4 Channel Bandwidth: 1.4MHz	1M08W7D
	LTE Band 4 Channel Bandwidth: 3MHz	2M68G7D
	LTE Band 4 Channel Bandwidth: 5MHz	4M49W7D
	LTE Band 4 Channel Bandwidth: 10MHz	8M93W7D

MAX. ERP POWER	LTE Band 17 Channel Bandwidth: 5MHz	30.48mW
	LTE Band 17 Channel Bandwidth: 10MHz	30.06mW
MAX. EIRP POWER	LTE Band 4 Channel Bandwidth: 1.4MHz	246.60mW
	LTE Band 4 Channel Bandwidth: 3MHz	259.42mW
	LTE Band 4 Channel Bandwidth: 5MHz	257.04mW
	LTE Band 4 Channel Bandwidth: 10MHz	248.31mW
CATEGORY	3	
ANTENNA TYPE	Fixed Internal Antenna	
DATA CABLE	Refer to Note as below	
I/O PORTS	Refer to users' manual	
ACCESSORY DEVICES	Refer to Note as below	

NOTE:

- The EUT's accessories list refers to Ext. Pho.
- There're 2 configurations for the EUT listed as below.
Main Sample (A): Battery 1 + LCD Panel 1
2nd Sample (B): Battery 2 + LCD Panel 2
✧ Only the worst test data was presented in the report.
- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 CONFIGURATION OF SYSTEM UNDER TEST

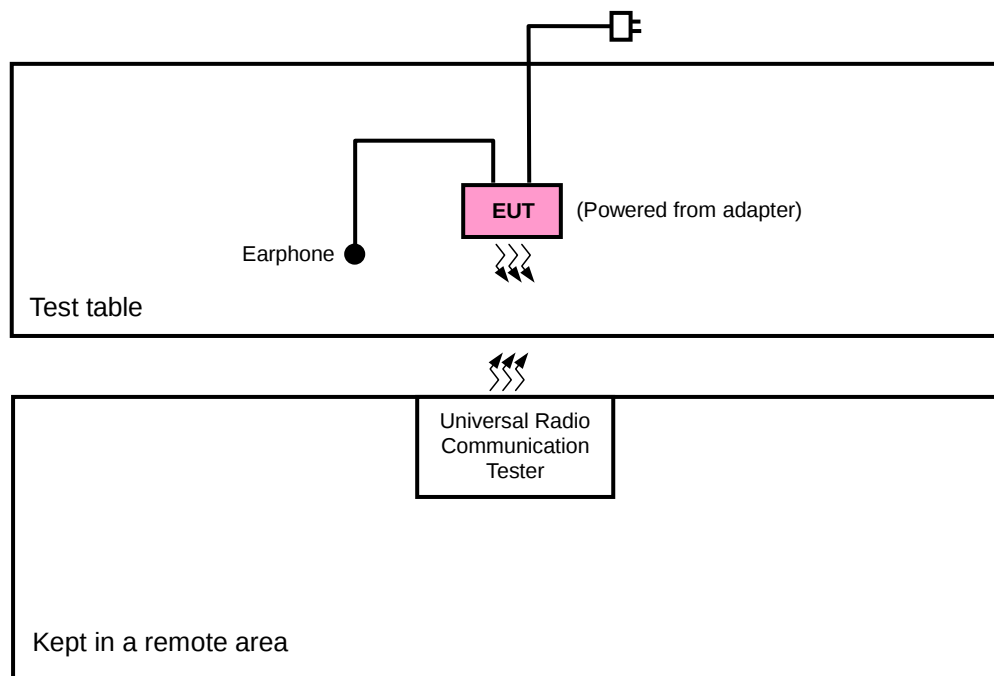

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.4 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Z-axis for LTE Band 17 and Y-axis for LTE Band 4 for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	Main sample
B	2 nd sample

LTE Band 17

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK	1 RB / 49 RB Offset
					16QAM	1 RB / 24 RB Offset
A	FREQUENCY STABILITY	23755 to 23825	23790	5MHz	QPSK	1 RB / 12 RB Offset
		23780 to 23800	23790	10MHz	QPSK	1 RB / 24 RB Offset
A	OCCUPIED BANDWIDTH	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK, 16QAM	1 RB / 24 RB Offset
A	BAND EDGE	23755 to 23825	23755	5MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
		23755 to 23825	23825	5MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
		23780 to 23800	23780	10MHz	QPSK	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
A	CONDUCTED EMISSION	23755 to 23825	23790	5MHz	QPSK	1 RB / 12 RB Offset
		23780 to 23800	23790	10MHz	QPSK	1 RB / 24 RB Offset
A	RADIATED EMISSION	23780 to 23800	23790	5MHz	QPSK	1 RB / 12 RB Offset
				10MHz	QPSK	1 RB / 24 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE Band 4

EUT CONFIGUR E MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	1 RB / 24 RB Offset
B	EIRP	20000 to 20350	20175	10MHz	QPSK, 16QAM	1 RB / 24 RB Offset
A	FREQUENCY STABILITY	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 2 RB Offset
		19965 to 20385	20175	3MHz	QPSK	1 RB / 7 RB Offset
		19975 to 20375	20175	5MHz	QPSK	1 RB / 12 RB Offset
		20000 to 20350	20175	10MHz	QPSK	1 RB / 24 RB Offset
A	OCCUPIED BANDWIDTH	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	1 RB / 24 RB Offset
A	BAND EDGE	19957 to 20393	19957	1.4MHz	QPSK	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
			20393	1.4MHz	QPSK	1 RB / 5 RB Offset
						6 RB / 0 RB Offset
		19965 to 20385	19965	3MHz	QPSK	1 RB / 0 RB Offset
						15 RB / 0 RB Offset
			20385	3MHz	QPSK	1 RB / 14 RB Offset
						15 RB / 0 RB Offset
		19975 to 20375	19975	5MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
			20375	5MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
A	CONDCUETED EMISSION	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 2 RB Offset
		19965 to 20385	20175	3MHz	QPSK	1 RB / 7 RB Offset
		19975 to 20375	20175	5MHz	QPSK	1 RB / 12 RB Offset
		20000 to 20350	20175	10MHz	QPSK	1 RB / 24 RB Offset
A	RADIATED EMISSION	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 2 RB Offset
		19965 to 20385	20175	3MHz	QPSK	1 RB / 7 RB Offset
		19975 to 20375	20175	5MHz	QPSK	1 RB / 12 RB Offset
		20000 to 20350	20175	10MHz	QPSK	1 RB / 24 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

**A D T****TEST CONDITION:**

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP/EIRP	26deg. C, 58%RH	3.8Vdc	Howard Kao
FREQUENCY STABILITY	26deg. C, 58%RH	3.8Vdc	Howard Kao
OCCUPIED BANDWIDTH	26deg. C, 58%RH	3.8Vdc	Howard Kao
PEAK TO AVERAGE RATIO	26deg. C, 58%RH	3.8Vdc	Howard Kao
BAND EDGE	26deg. C, 58%RH	3.8Vdc	Howard Kao
CONDCUDED EMISSION	26deg. C, 58%RH	3.8Vdc	Howard Kao
RADIATED EMISSION	25deg. C, 65%RH	120Vac, 60Hz	Johnson Liao

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2**FCC 47 CFR Part 27****ANSI C63.4-2003****ANSI/TIA/EIA-603-C 2004**

NOTE: All test items have been performed and recorded as per the above standards.

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 704-716 MHz band are limited to 3 watts ERP

4.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

- The EUT was placed on a turntable with 1.727 meter height in a fully anechoic chamber.
- The EUT was set at 4.858 meters from the receiving antenna, which was mounted on the antenna tower.
- The EUT was rotated along 2 axis: Theta-axis: 180 degree and Phi-axis: 360 degree, Step Size: 15 degree.
- The height of the receiving antenna is fixed.
- Taking the record of received power.
- A dipole antenna was used in place of the EUT for pathloss calibration with a network analyzer.
- The gain of the dipole antenna and the insertion loss of the connected RF cable were applied into the pathloss calibration.
- The maximum ERP/EIRP was calculated with received power and pathloss.
- $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm) : Input power to substitution antenna.

G_s (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$

$E_s = R_s + AF$

AF (dB/m) : Receiver antenna factor

R_t : The highest received signal in spectrum analyzer for EUT.


R_s : The highest received signal in spectrum analyzer for substitution antenna.

CONDUCTED POWER MEASUREMENT:


- The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TEST SETUP

EIRP / ERP MEASUREMENT:

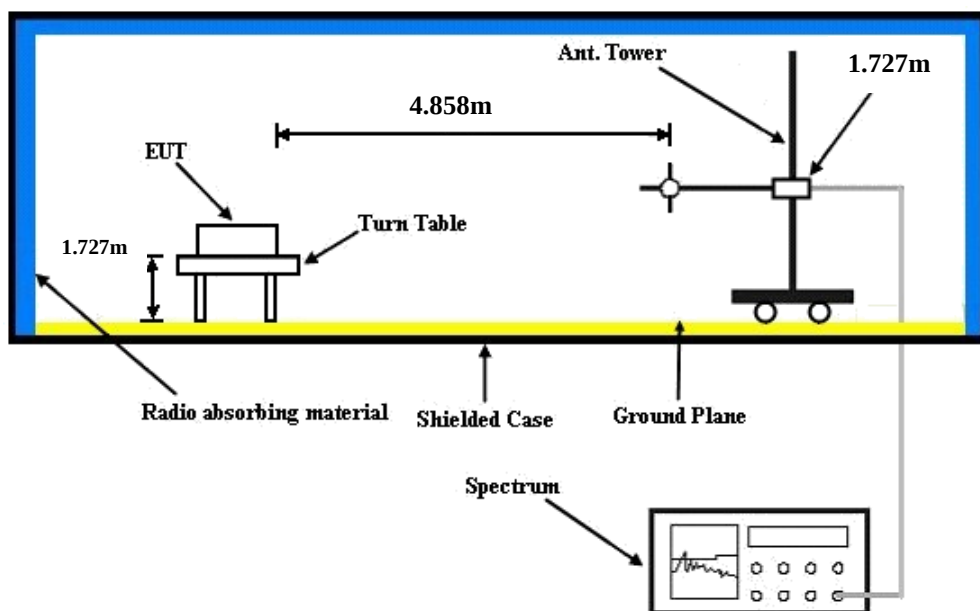

CONDUCTED POWER MEASUREMENT:



4.1.4 TEST RESULTS

AVERAGE CONDUCTED OUTPUT POWER (dBm)

Band / BW	Modulation	RB Size	RB Offset	Low CH 23755	Mid CH 23790	High CH 23825	3PGG MPR (dB)
				Frequency 706.5 MHz	Frequency 710.0 MHz	Frequency 713.5 MHz	
17 / 5M	QPSK	1	0	22.22	22.21	22.34	0
		1	12	22.36	22.35	22.41	0
		1	24	22.36	22.34	22.37	0
		12	0	21.30	21.29	21.33	1
		12	6	21.35	21.33	21.36	1
		12	13	21.39	21.35	21.44	1
		25	0	21.39	21.37	21.40	1
	16QAM	1	0	21.20	21.19	21.32	1
		1	12	21.34	21.33	21.39	1
		1	24	21.34	21.32	21.35	1
		12	0	20.28	20.27	20.31	2
		12	6	20.33	20.31	20.34	2
		12	13	20.37	20.33	20.42	2
		25	0	20.37	20.35	20.38	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 23780	Mid CH 23790	High CH 23800	3PGG MPR (dB)
				Frequency 709.0 MHz	Frequency 710.0 MHz	Frequency 711.0 MHz	
17 / 10M	QPSK	1	0	22.25	22.24	22.37	0
		1	24	22.39	22.38	22.44	0
		1	49	22.39	22.37	22.40	0
		25	0	21.33	21.32	21.36	1
		25	12	21.38	21.36	21.39	1
		25	25	21.42	21.38	21.47	1
		50	0	21.42	21.40	21.43	1
	16QAM	1	0	21.24	21.23	21.36	1
		1	24	21.38	21.37	21.43	1
		1	49	21.38	21.36	21.39	1
		25	0	20.32	20.31	20.35	2
		25	12	20.37	20.35	20.38	2
		25	25	20.41	20.37	20.46	2
		50	0	20.41	20.39	20.42	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 19957	Mid CH 20175	High CH 20393	3PGG MPR (dB)
				Frequency 1710.7 MHz	Frequency 1732.5 MHz	Frequency 1754.3 MHz	
4 / 1.4M	QPSK	1	0	21.81	21.90	21.91	0
		1	2	21.86	21.90	21.93	0
		1	5	21.73	21.74	21.79	0
		3	0	21.62	21.63	21.68	0
		3	1	21.51	21.52	21.57	0
		3	3	21.40	21.41	21.46	0
		6	0	20.82	20.93	20.99	1
	16QAM	1	0	20.80	20.89	20.90	1
		1	2	20.85	20.89	20.92	1
		1	5	20.72	20.73	20.78	1
		3	0	20.61	20.62	20.67	1
		3	1	20.50	20.51	20.56	1
		3	3	20.39	20.40	20.45	1
		6	0	19.66	19.77	19.83	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 19965	Mid CH 20175	High CH 20385	3PGG MPR (dB)
				Frequency 1711.5 MHz	Frequency 1732.5 MHz	Frequency 1753.5 MHz	
4 / 3M	QPSK	1	0	21.84	21.93	21.94	0
		1	7	21.89	21.93	21.96	0
		1	14	21.76	21.77	21.82	0
		8	0	20.94	20.98	21.00	1
		8	3	20.94	20.95	21.03	1
		8	7	20.91	20.92	20.95	1
		15	0	20.90	21.01	21.07	1
	16QAM	1	0	20.84	20.93	20.94	1
		1	7	20.89	20.93	20.96	1
		1	14	20.76	20.77	20.82	1
		8	0	19.94	19.98	20.00	2
		8	3	19.99	20.00	20.08	2
		8	7	19.96	19.97	20.00	2
		15	0	19.90	20.01	20.07	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 19975	Mid CH 20175	High CH 20375	3PGG MPR (dB)
				Frequency 1712.5 MHz	Frequency 1732.5 MHz	Frequency 1752.5 MHz	
4 / 5M	QPSK	1	0	21.88	21.97	21.98	0
		1	12	21.93	21.97	22.00	0
		1	24	21.80	21.81	21.86	0
		12	0	20.98	21.02	21.04	1
		12	6	20.98	20.99	21.07	1
		12	13	20.95	20.96	20.99	1
		25	0	20.89	21.00	21.06	1
	16QAM	1	0	20.87	20.96	20.97	1
		1	12	20.92	20.96	20.99	1
		1	24	20.79	20.80	20.85	1
		12	0	19.97	20.01	20.03	2
		12	6	20.02	20.03	20.11	2
		12	13	19.99	20.00	20.03	2
		25	0	19.78	19.89	19.95	2

Band / BW	Modulation	RB Size	RB Offset	Low CH 20000	Mid CH 20175	High CH 20350	3PGG MPR (dB)
				Frequency 1715.0 MHz	Frequency 1732.5 MHz	Frequency 1750.0 MHz	
4 / 10M	QPSK	1	0	21.94	22.03	22.04	0
		1	24	21.99	22.03	22.06	0
		1	49	21.86	21.87	21.92	0
		25	0	20.89	20.93	20.95	1
		25	12	20.94	20.95	21.03	1
		25	25	20.91	20.92	20.95	1
		50	0	20.70	20.81	20.87	1
	16QAM	1	0	20.88	20.97	20.98	1
		1	24	20.93	20.97	21.00	1
		1	49	20.80	20.81	20.86	1
		25	0	19.98	20.02	20.04	2
		25	12	20.01	20.02	20.10	2
		25	25	20.00	20.01	20.04	2
		50	0	19.92	20.03	20.09	2

AVERAGE ERP (dBm)

TEST MODE A

LTE BAND 17

CHANNEL BANDWIDTH: 5MHz QPSK

LTE Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (mW)
706.5	-39.22	-51.88	0.00	1.96	14.62	28.97
710	-40.15	-52.99	0.00	2.00	14.84	30.48
713.5	-41.65	-54.28	0.00	1.98	14.61	28.91
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (mW)
706.5	-47.99	-52.13	0.00	1.96	6.10	4.07
710	-48.96	-53.17	0.00	2.00	6.21	4.18
713.5	-49.86	-54.13	0.00	1.98	6.25	4.22

CHANNEL BANDWIDTH: 5MHz 16QAM

LTE Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (mW)
706.5	-39.44	-51.88	0.00	1.96	14.40	27.54
710	-40.34	-52.99	0.00	2.00	14.65	29.17
713.5	-41.84	-54.28	0.00	1.98	14.42	27.67
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (mW)
706.5	-48.37	-52.13	0.00	1.96	5.72	3.73
710	-49.42	-53.17	0.00	2.00	5.75	3.76
713.5	-50.18	-54.13	0.00	1.98	5.93	3.92

CHANNEL BANDWIDTH: 10MHz QPSK

LTE Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (mW)
709.0	-39.19	-51.88	0.00	1.96	14.65	29.17
710.0	-40.48	-52.99	0.00	2.00	14.51	28.25
711.0	-42.01	-54.28	0.00	1.98	14.25	26.61
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (mW)
709.0	-47.84	-52.13	0.00	1.96	6.25	4.22
710.0	-48.95	-53.17	0.00	2.00	6.22	4.19
711.0	-50.08	-54.13	0.00	1.98	6.03	4.01

CHANNEL BANDWIDTH: 10MHz 16QAM

LTE Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (mW)
709.0	-39.25	-51.88	0.00	1.96	14.59	28.77
710.0	-40.21	-52.99	0.00	2.00	14.78	30.06
711.0	-41.79	-54.28	0.00	1.98	14.47	27.99
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (mW)
709.0	-48.30	-52.13	0.00	1.96	5.79	3.79
710.0	-49.23	-53.17	0.00	2.00	5.94	3.93
711.0	-50.21	-54.13	0.00	1.98	5.90	3.89

AVERAGE EIRP (dBm)

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz QPSK

LTE Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1710.7	-30.56	-51.88	0.00	1.96	23.28	212.81
1732.5	-31.10	-52.99	0.00	2.00	23.89	244.91
1754.3	-32.34	-54.28	0.00	1.98	23.92	246.60
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1710.7	-36.12	-52.13	0.00	1.96	17.97	62.66
1732.5	-36.84	-53.17	0.00	2.00	18.33	68.08
1754.3	-37.30	-54.13	0.00	1.98	18.81	76.03

CHANNEL BANDWIDTH: 1.4MHz 16QAM

LTE Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1710.7	-30.53	-51.88	0.00	1.96	23.31	214.29
1732.5	-31.23	-52.99	0.00	2.00	23.76	237.68
1754.3	-32.41	-54.28	0.00	1.98	23.85	242.66
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1710.7	-36.22	-52.13	0.00	1.96	17.87	61.24
1732.5	-36.97	-53.17	0.00	2.00	18.20	66.07
1754.3	-37.41	-54.13	0.00	1.98	18.70	74.13

CHANNEL BANDWIDTH: 3MHz QPSK

LTE Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1711.5	-30.35	-51.88	0.00	1.96	23.49	223.36
1732.5	-30.85	-52.99	0.00	2.00	24.14	259.42
1753.5	-32.30	-54.28	0.00	1.98	23.96	248.89
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1711.5	-36.23	-52.13	0.00	1.96	17.86	61.09
1732.5	-36.64	-53.17	0.00	2.00	18.53	71.29
1753.5	-37.34	-54.13	0.00	1.98	18.77	75.34

CHANNEL BANDWIDTH: 3MHz 16QAM

LTE Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1711.5	-30.70	-51.88	0.00	1.96	23.14	206.06
1732.5	-31.07	-52.99	0.00	2.00	23.92	246.60
1753.5	-32.40	-54.28	0.00	1.98	23.86	243.22
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1711.5	-36.48	-52.13	0.00	1.96	17.61	57.68
1732.5	-36.91	-53.17	0.00	2.00	18.26	66.99
1753.5	-37.48	-54.13	0.00	1.98	18.63	72.95

CHANNEL BANDWIDTH: 5MHz QPSK

LTE Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1712.5	-30.32	-51.88	0.00	1.96	23.52	224.91
1732.5	-30.89	-52.99	0.00	2.00	24.10	257.04
1752.5	-32.41	-54.28	0.00	1.98	23.85	242.66
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1712.5	-36.18	-52.13	0.00	1.96	17.91	61.80
1732.5	-36.60	-53.17	0.00	2.00	18.57	71.94
1752.5	-37.50	-54.13	0.00	1.98	18.61	72.61

CHANNEL BANDWIDTH: 5MHz 16QAM

LTE Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1712.5	-30.56	-51.88	0.00	1.96	23.28	212.81
1732.5	-31.14	-52.99	0.00	2.00	23.85	242.66
1752.5	-32.54	-54.28	0.00	1.98	23.72	235.50
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1712.5	-36.43	-52.13	0.00	1.96	17.66	58.34
1732.5	-36.81	-53.17	0.00	2.00	18.36	68.55
1752.5	-37.53	-54.13	0.00	1.98	18.58	72.11

CHANNEL BANDWIDTH: 10MHz QPSK

LTE Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1715.0	-30.30	-51.88	0.00	1.96	23.54	225.94
1732.5	-31.04	-52.99	0.00	2.00	23.95	248.31
1750.0	-33.03	-54.28	0.00	1.98	23.23	210.38
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1715.0	-36.15	-52.13	0.00	1.96	17.94	62.23
1732.5	-36.73	-53.17	0.00	2.00	18.44	69.82
1750.0	-38.08	-54.13	0.00	1.98	18.03	63.53

CHANNEL BANDWIDTH: 10MHz 16QAM

LTE Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1715.0	-30.48	-51.88	0.00	1.96	23.36	216.77
1732.5	-31.18	-52.99	0.00	2.00	23.81	240.44
1750.0	-32.40	-54.28	0.00	1.98	23.86	243.22
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1715.0	-36.30	-52.13	0.00	1.96	17.79	60.12
1732.5	-37.02	-53.17	0.00	2.00	18.15	65.31
1750.0	-37.41	-54.13	0.00	1.98	18.70	74.13

TEST MODE B

CHANNEL BANDWIDTH: 10MHz QPSK

LTE Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1732.5	-24.15	-48.12	0.00	-1.08	22.89	194.54
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1732.5	-30.26	-48.28	0.00	-0.93	17.09	51.17

CHANNEL BANDWIDTH: 10MHz 16QAM

LTE Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1732.5	-24.99	-47.97	0.00	-1.08	21.90	154.88
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	EIRP (dBm)	EIRP (mW)
1732.5	-31.21	-48.01	0.00	-0.93	15.87	38.64

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

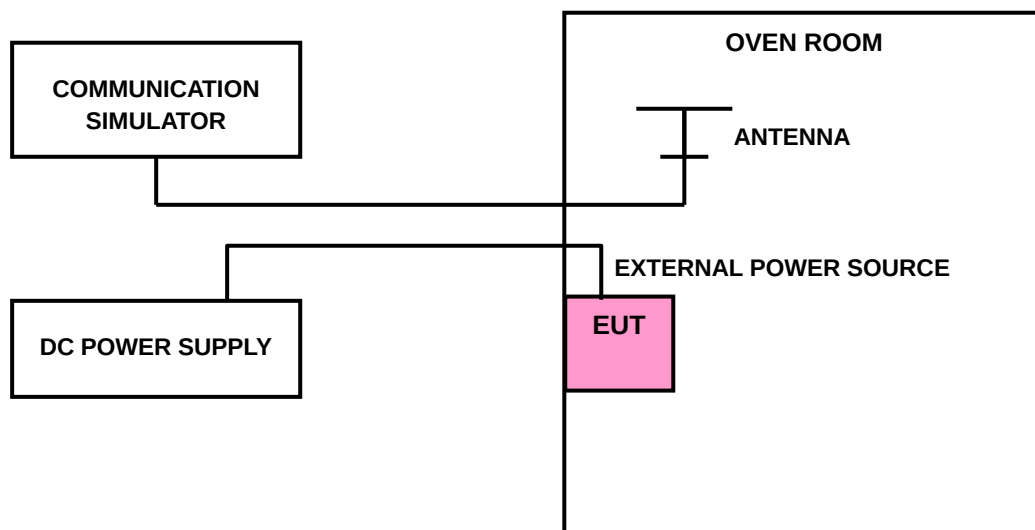

4.2.4 TEST RESULTS

FREQUENCY ERROR vs. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)						LIMIT (ppm)
	LTE BAND 17		LTE BAND 4				
	5MHz	10MHz	1.4MHz	3MHz	5MHz	10MHz	
3.8	0.007	0.003	-0.002	-0.004	-0.001	-0.001	2.5
3.6	0.003	-0.002	-0.002	-0.004	-0.001	-0.004	2.5
4.35	0.003	0.004	-0.003	-0.003	-0.002	-0.003	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.6Vdc to 4.35Vdc.

FREQUENCY ERROR vs. TEMPERATURE


TEMP. (°C)	FREQUENCY ERROR (ppm)						LIMIT (ppm)
	LTE BAND 17		LTE BAND 4				
	5MHz	10MHz	1.4MHz	3MHz	5MHz	10MHz	
-30	0.009	-0.005	-0.003	-0.002	0.002	0.002	2.5
-20	0.004	0.006	-0.004	-0.004	0.001	-0.003	2.5
-10	0.001	-0.002	-0.001	0.003	-0.004	-0.001	2.5
0	0.003	0.003	-0.005	-0.002	-0.003	-0.002	2.5
10	0.001	-0.004	-0.003	0.001	-0.001	-0.001	2.5
20	0.006	-0.001	-0.005	-0.002	-0.002	-0.003	2.5
30	-0.002	0.003	-0.004	0.003	-0.002	-0.003	2.5
40	0.002	0.002	-0.005	-0.002	-0.005	-0.003	2.5
50	0.005	0.004	-0.003	-0.005	-0.001	-0.004	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.3.2 TEST SETUP

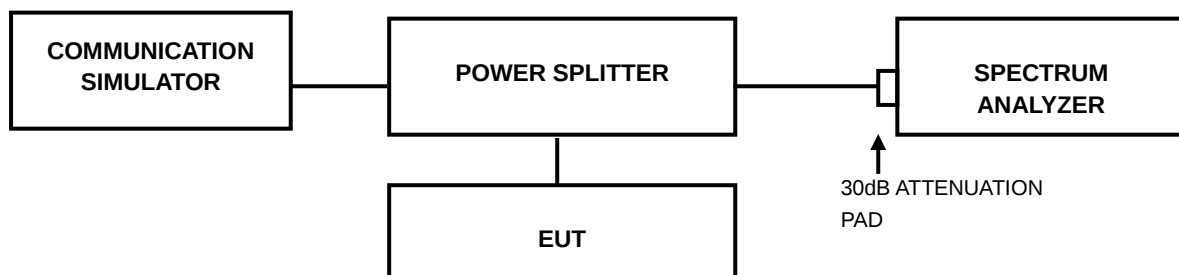


4.3.3 TEST PROCEDURES

- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.4 TEST RESULTS


LTE BAND 17							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
23755	706.5	4.4935	4.4916	23780	709.0	8.9207	8.9248
23790	710.0	4.4953	4.4894	23790	710.0	8.9209	8.9124
23825	713.5	4.4969	4.4912	23800	711.0	8.9170	8.9154

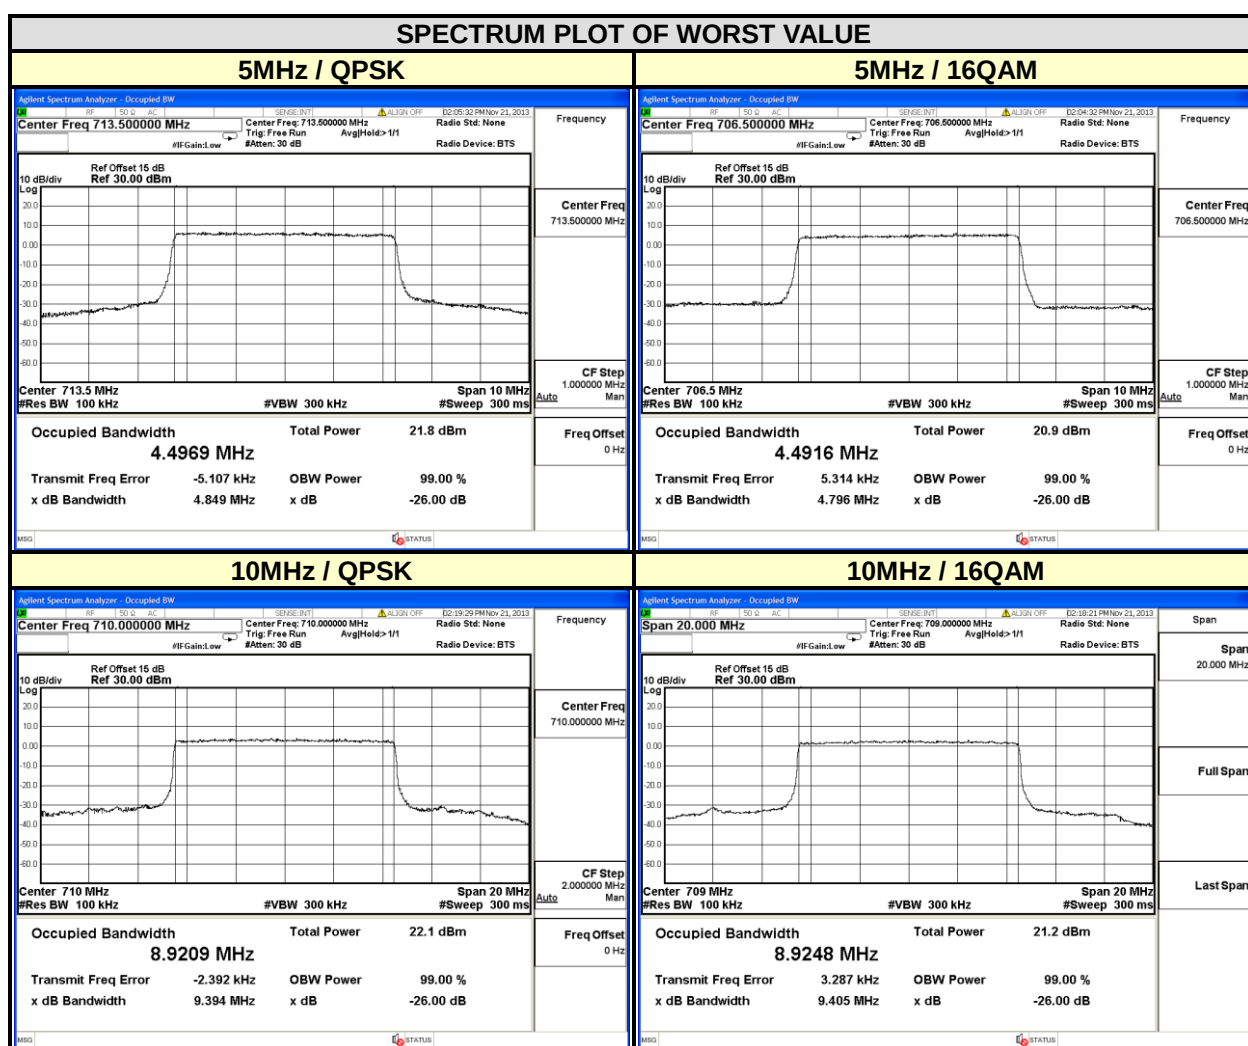



A D T


LTE BAND 4							
CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	1.0783	1.0765	19965	1711.5	2.6777	2.6799
20175	1732.5	1.0800	1.0765	20175	1732.5	2.6810	2.6794
20393	1754.3	1.0787	1.0839	20385	1753.5	2.6818	2.6813

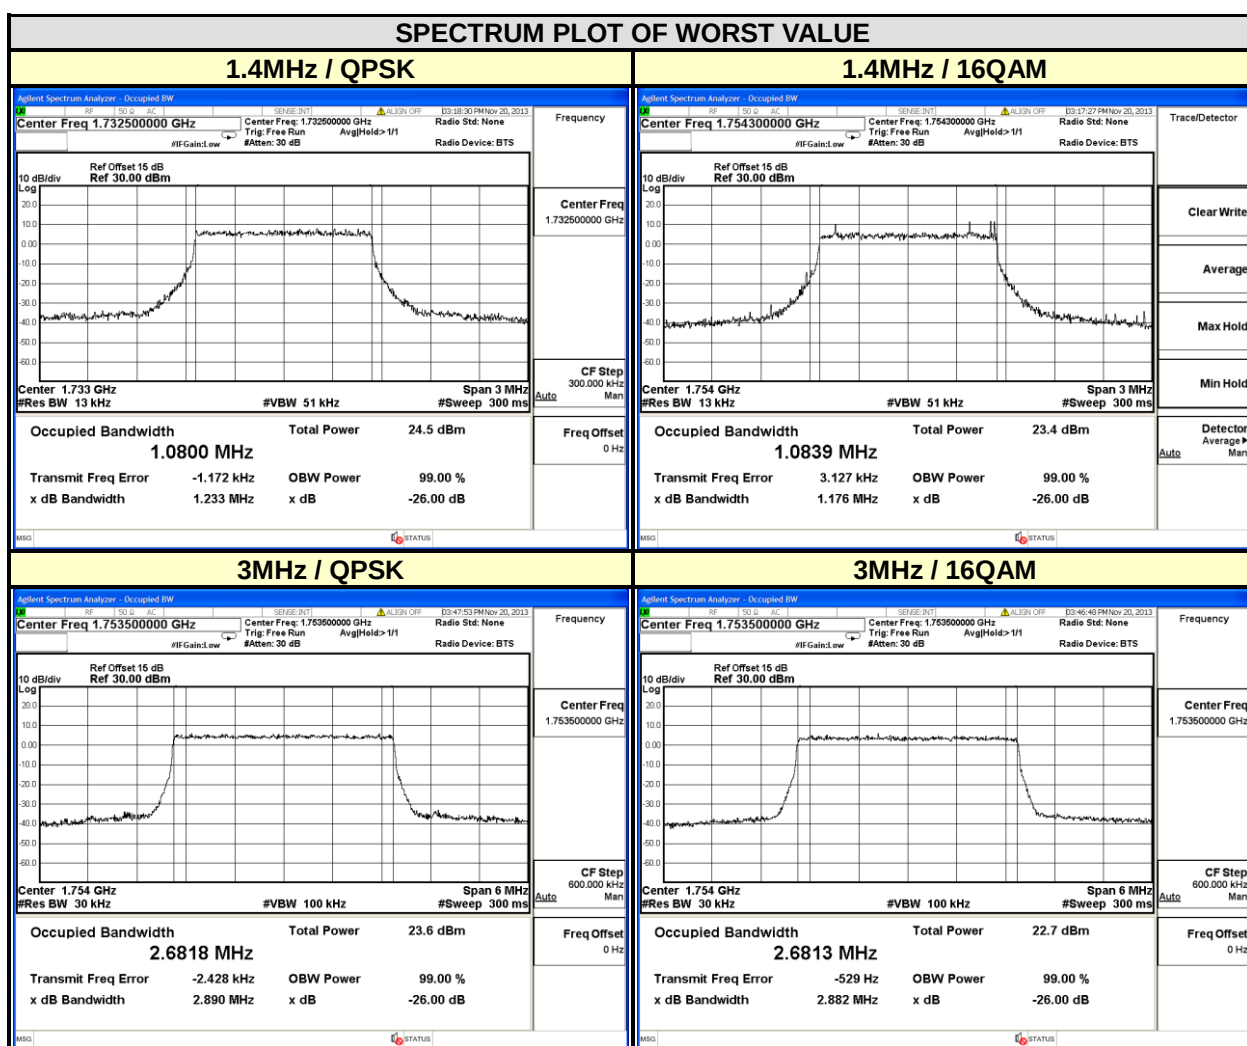



A D T

LTE BAND 4							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.4878	4.4882	20000	1715.0	8.9211	8.9221
20175	1732.5	4.4916	4.4917	20175	1732.5	8.9235	8.9262
20375	1752.5	4.4905	4.4880	20350	1750.0	8.9184	8.9194

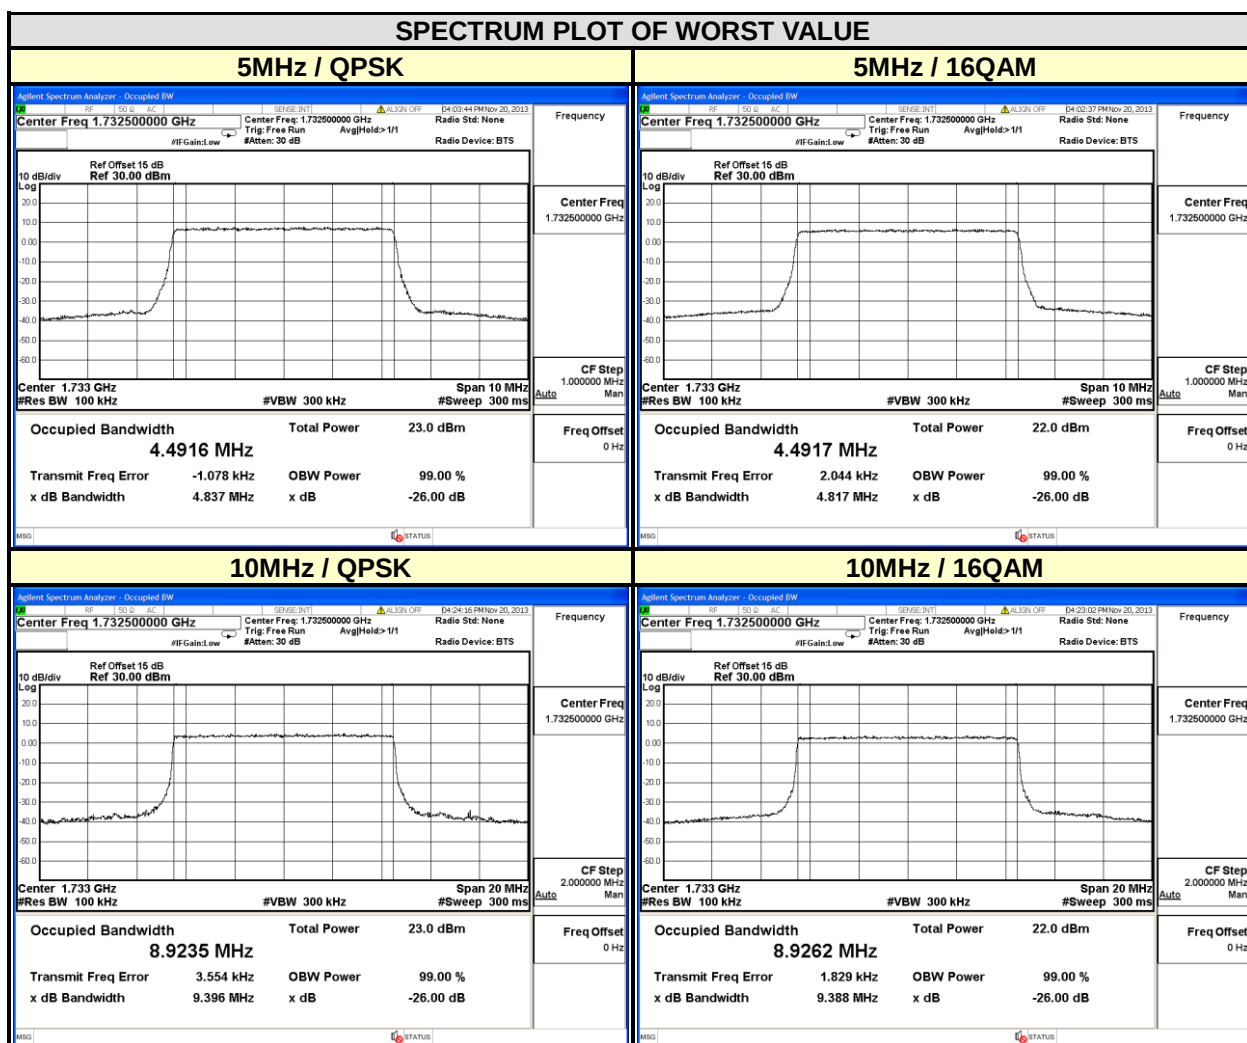


4.4 PEAK TO AVERAGE RATIO

4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.4.2 TEST SETUP

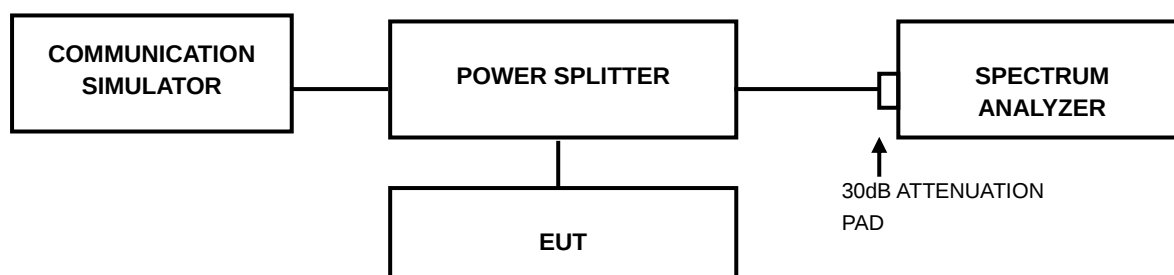


4.4.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.4.4 TEST RESULTS


LTE BAND 17							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
23755	706.5	4.64	4.48	23780	709.0	4.76	4.72
23790	710.0	3.86	4.89	23790	710.0	4.72	4.41
23825	713.5	4.05	5.36	23800	711.0	3.67	4.89

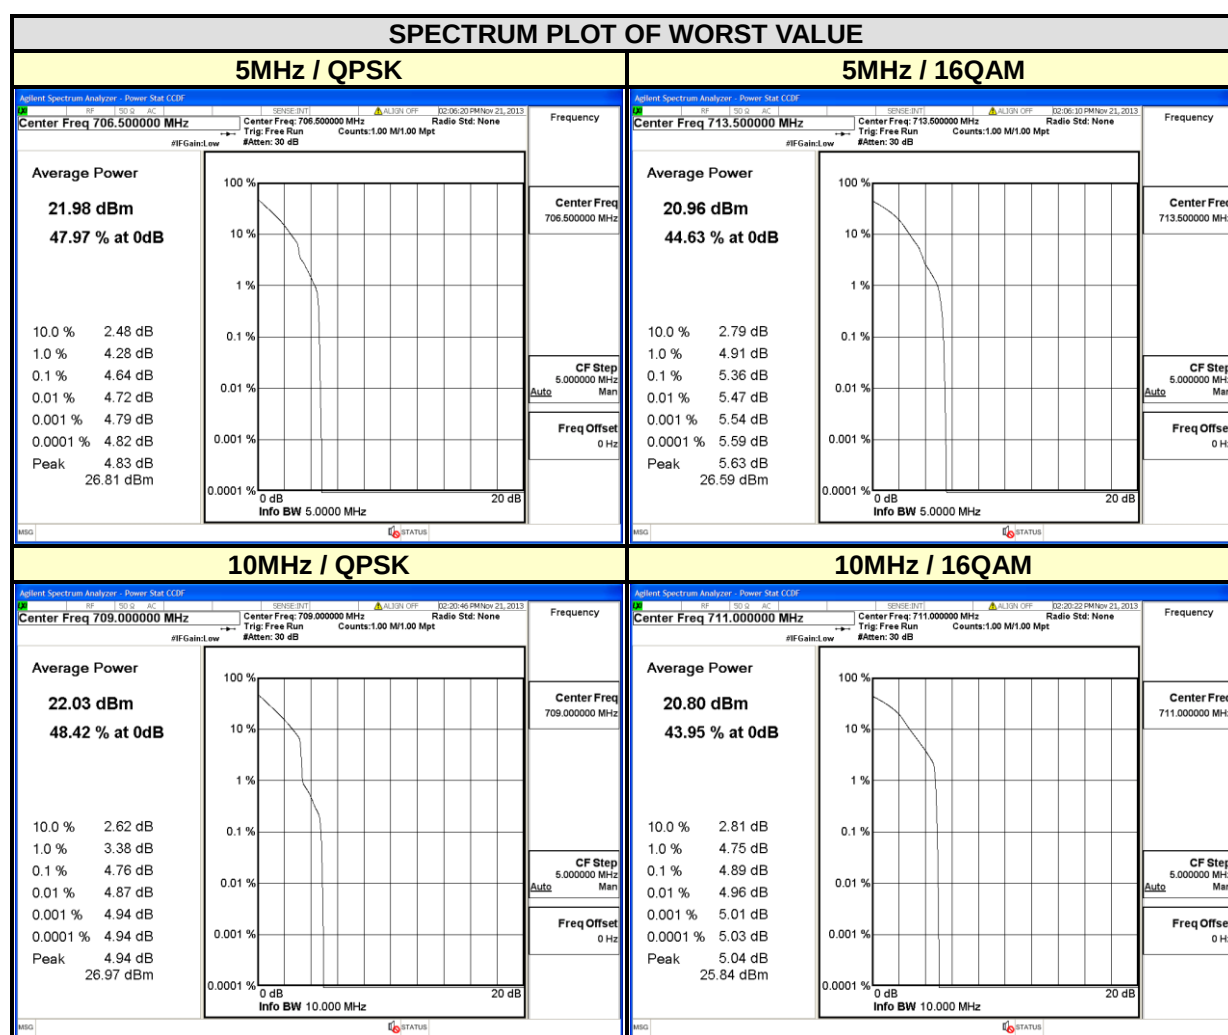



A D T

LTE BAND 4							
CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	3.69	4.55	19965	1711.5	3.57	4.75
20175	1732.5	3.72	4.97	20175	1732.5	3.57	5.21
20393	1754.3	3.58	4.63	20385	1753.5	3.58	4.80

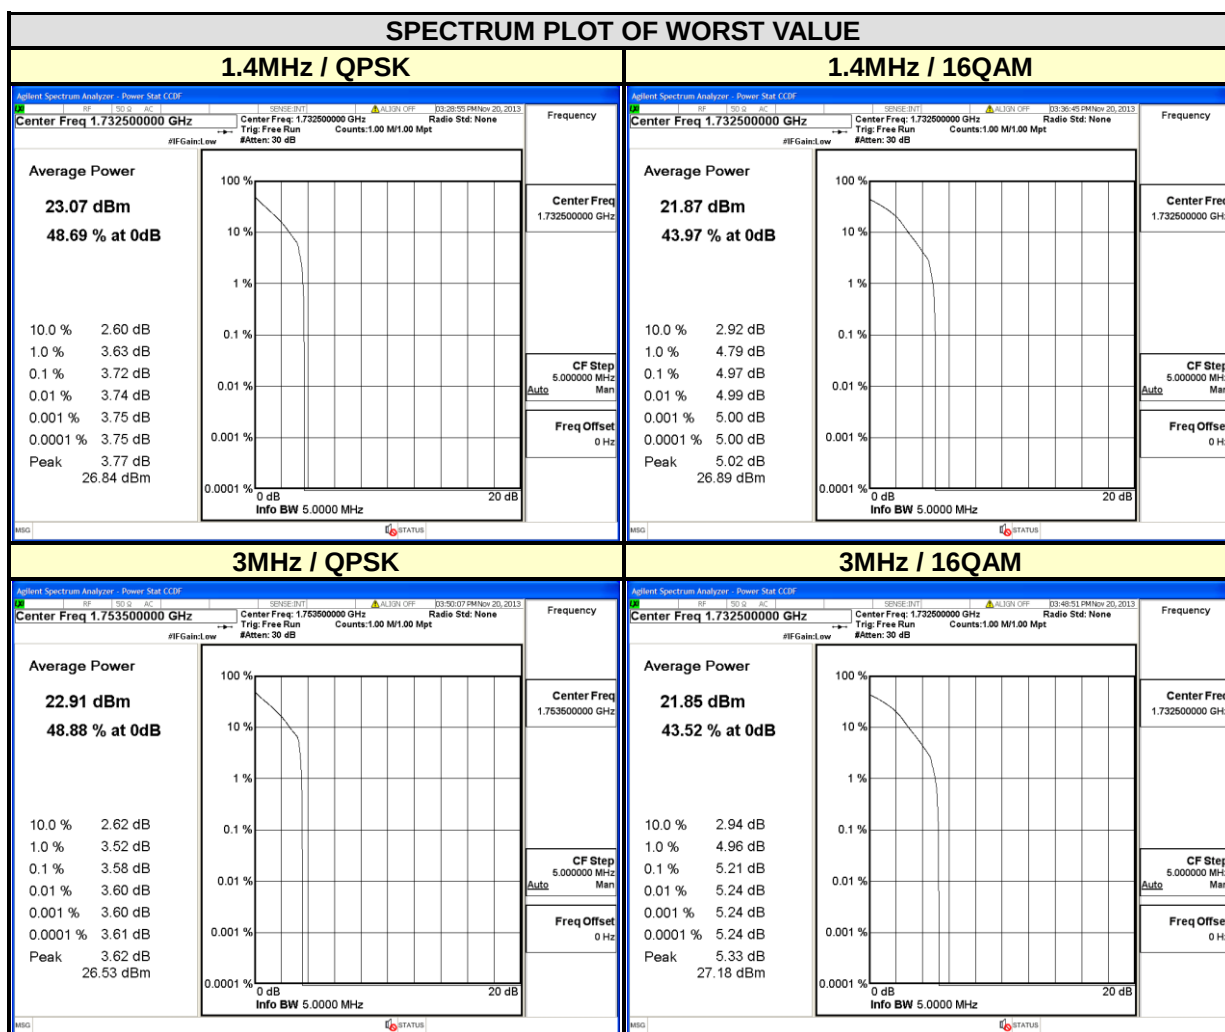



LTE BAND 4							
CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	3.58	4.80	20000	1715.0	3.89	4.86
20175	1732.5	3.56	4.92	20175	1732.5	4.09	5.37
20375	1752.5	3.56	5.14	20350	1750.0	4.16	5.16

SPECTRUM PLOT OF WORST VALUE

5MHz / QPSK

Agilent Spectrum Analyzer - Power Stat CCDF

Center Freq 1.712500000 GHz
 Trig: Free Run
 Counts: 1.00 M/1.00 Mpt
 Radio Std: None
 #Att: 30 dB

Average Power
22.90 dBm
48.67 % at 0dB

10.0 % 2.63 dB
 1.0 % 3.50 dB
 0.1 % 3.58 dB
 0.01 % 3.60 dB
 0.001 % 3.62 dB
 0.0001 % 3.63 dB
 Peak 3.63 dB
 26.53 dBm

Center Freq 1.712500000 GHz

CF Step 5.000000 MHz Man

Freq Offset 0 Hz

Info BW 5.0000 MHz

5MHz / 16QAM

Agilent Spectrum Analyzer - Power Stat CCDF

Center Freq 1.752500000 GHz
 Trig: Free Run
 Counts: 1.00 M/1.00 Mpt
 Radio Std: None
 #Att: 30 dB

Average Power
21.83 dBm
43.77 % at 0dB

10.0 % 2.96 dB
 1.0 % 4.88 dB
 0.1 % 5.14 dB
 0.01 % 5.17 dB
 0.001 % 5.20 dB
 0.0001 % 5.21 dB
 Peak 5.32 dB
 27.15 dBm

Center Freq 1.752500000 GHz

CF Step 5.000000 MHz Man

Freq Offset 0 Hz

Info BW 5.0000 MHz

10MHz / QPSK

Agilent Spectrum Analyzer - Power Stat CCDF

Center Freq 1.750000000 GHz
 Trig: Free Run
 Counts: 1.00 M/1.00 Mpt
 Radio Std: None
 #Att: 30 dB

Average Power
23.08 dBm
47.00 % at 0dB

10.0 % 2.60 dB
 1.0 % 3.99 dB
 0.1 % 4.16 dB
 0.01 % 4.18 dB
 0.001 % 4.20 dB
 0.0001 % 4.21 dB
 Peak 4.26 dB
 27.34 dBm

Center Freq 1.750000000 GHz

CF Step 5.000000 MHz Man

Freq Offset 0 Hz

Info BW 10.000 MHz

10MHz / 16QAM

Agilent Spectrum Analyzer - Power Stat CCDF

Center Freq 1.732500000 GHz
 Trig: Free Run
 Counts: 1.00 M/1.00 Mpt
 Radio Std: None
 #Att: 30 dB

Average Power
21.84 dBm
43.51 % at 0dB

10.0 % 2.94 dB
 1.0 % 5.00 dB
 0.1 % 5.37 dB
 0.01 % 5.42 dB
 0.001 % 5.45 dB
 0.0001 % 5.45 dB
 Peak 5.78 dB
 27.62 dBm

Center Freq 1.732500000 GHz

CF Step 5.000000 MHz Man

Freq Offset 0 Hz

Info BW 10.000 MHz

4.5 BAND EDGE MEASUREMENT


4.5.1 LIMITS OF BAND EDGE MEASUREMENT

For operations in the 704-716 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For operations in the 1710 – 1755 MHz MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

4.5.2 TEST SETUP

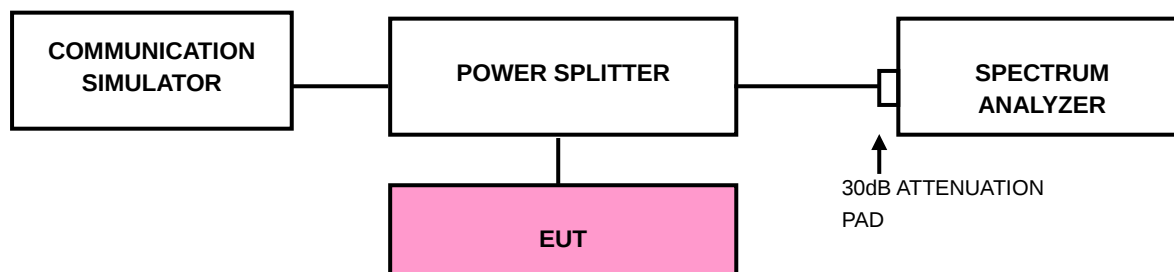


4.5.3 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (LTE Band 17 / LTE Band 17 Channel Bandwidth 5MHz and 10MHz).
- d. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 13kHz and VB of the spectrum is 51kHz (LTE Band 4 Bandwidth 1.4MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz (LTE Band 4 Bandwidth 3MHz).
- f. Record the max trace plot into the test report.

4.5.4 TEST RESULTS


LTE BAND 17

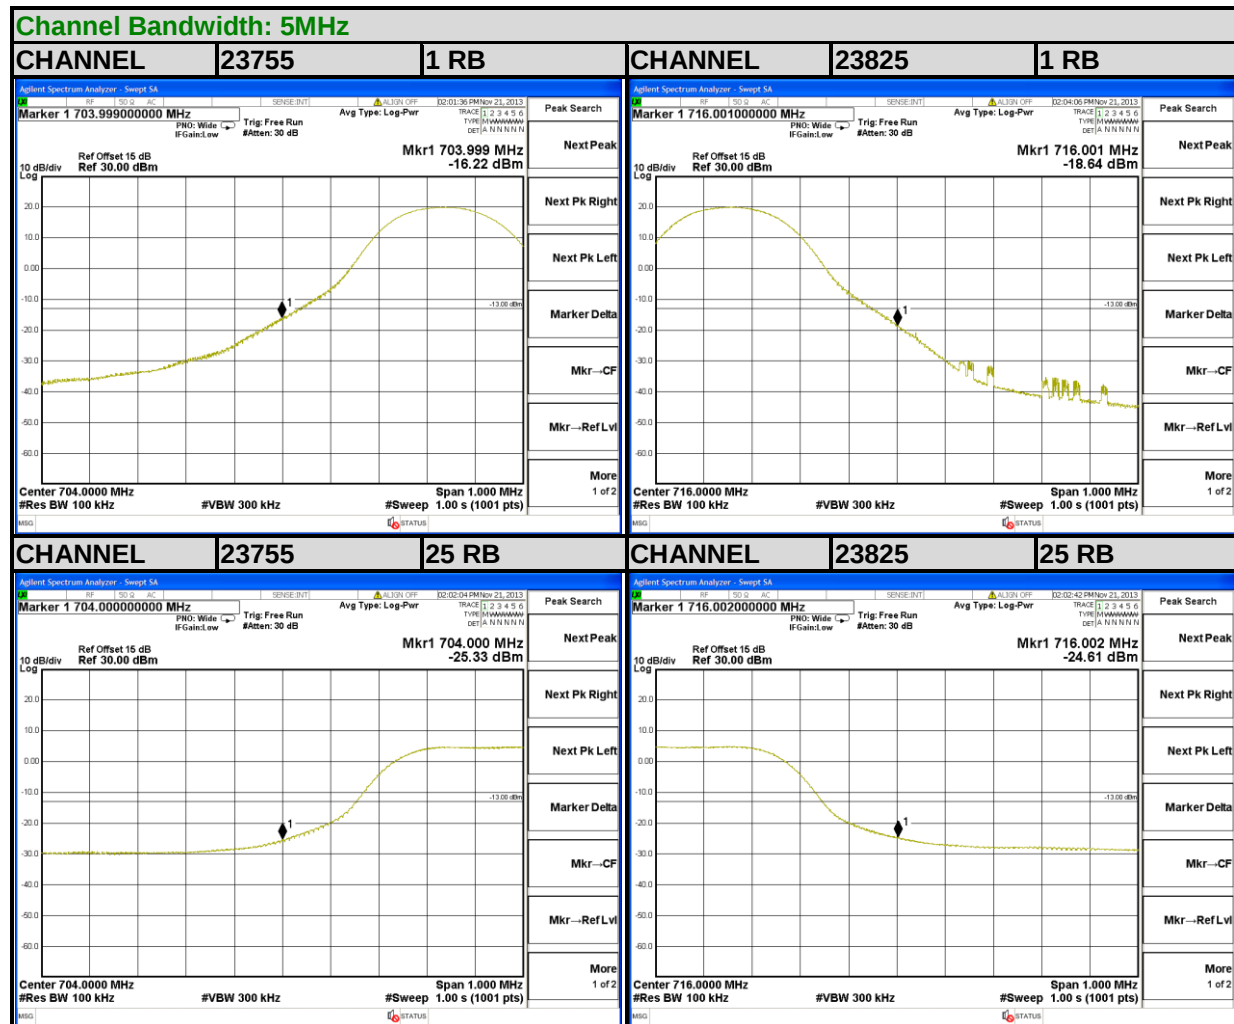




A D T

Channel Bandwidth: 10MHz

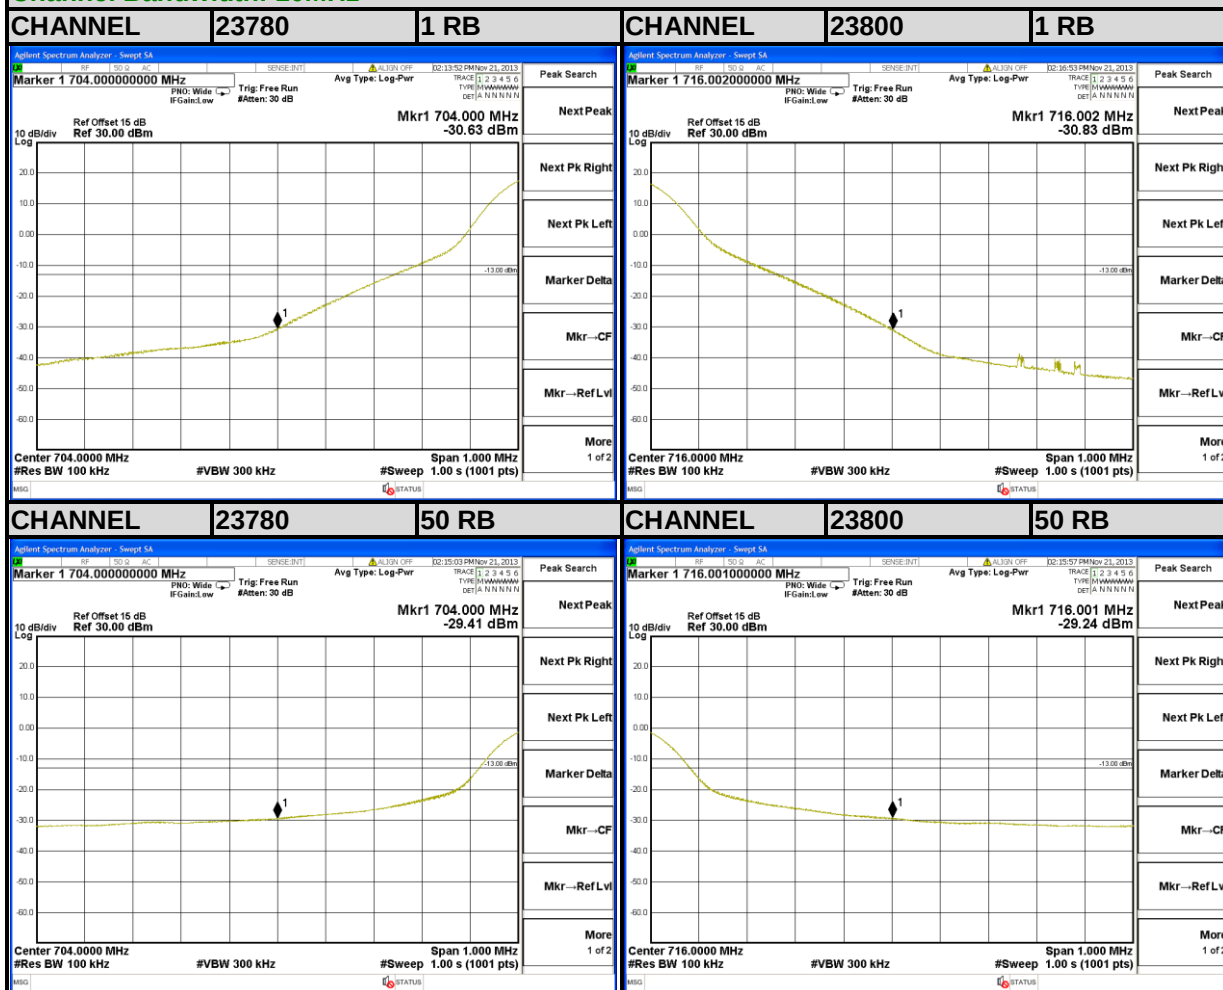


LTE BAND 4

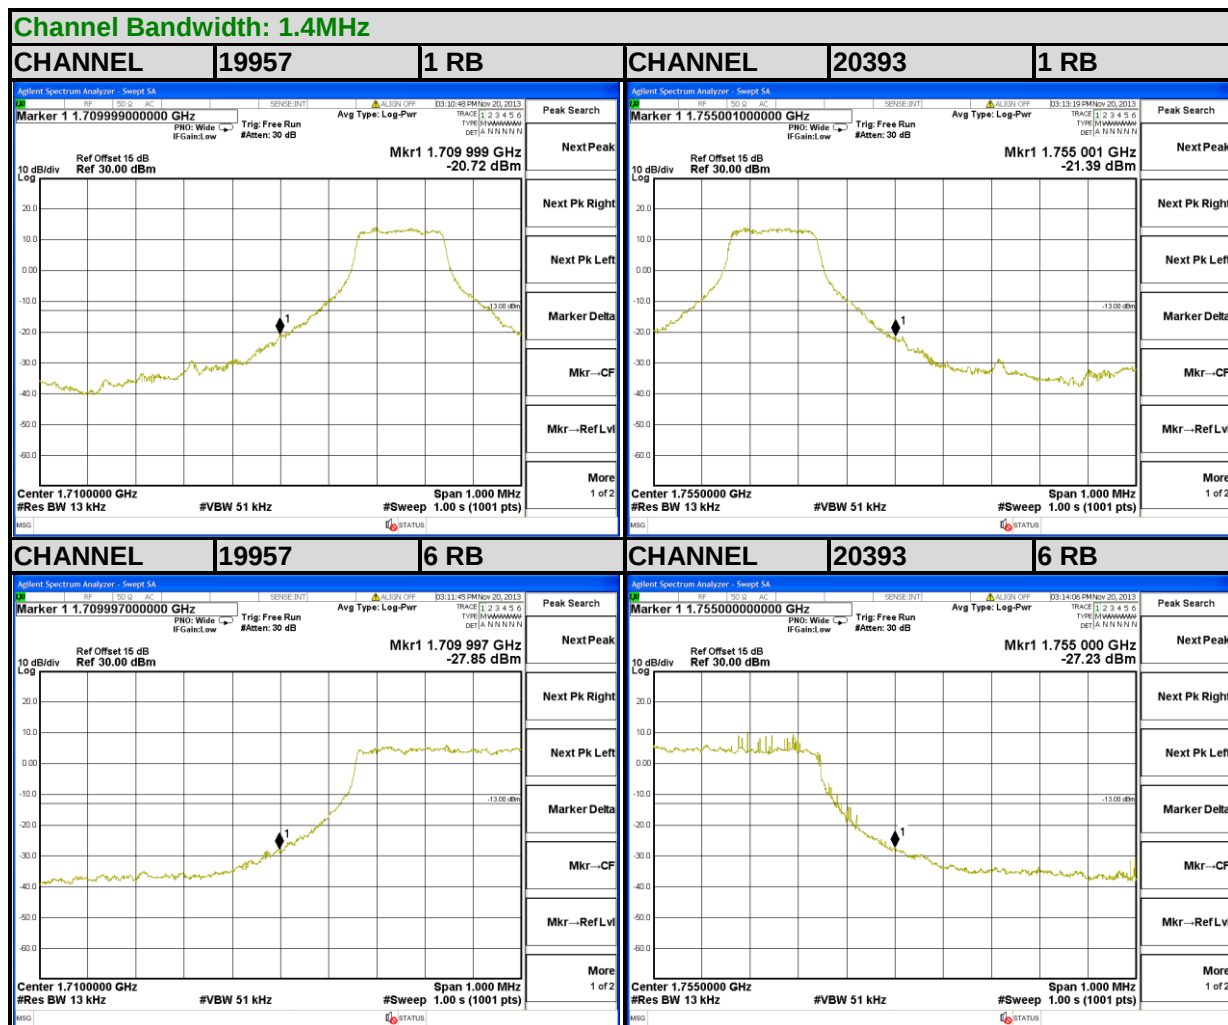




A D T

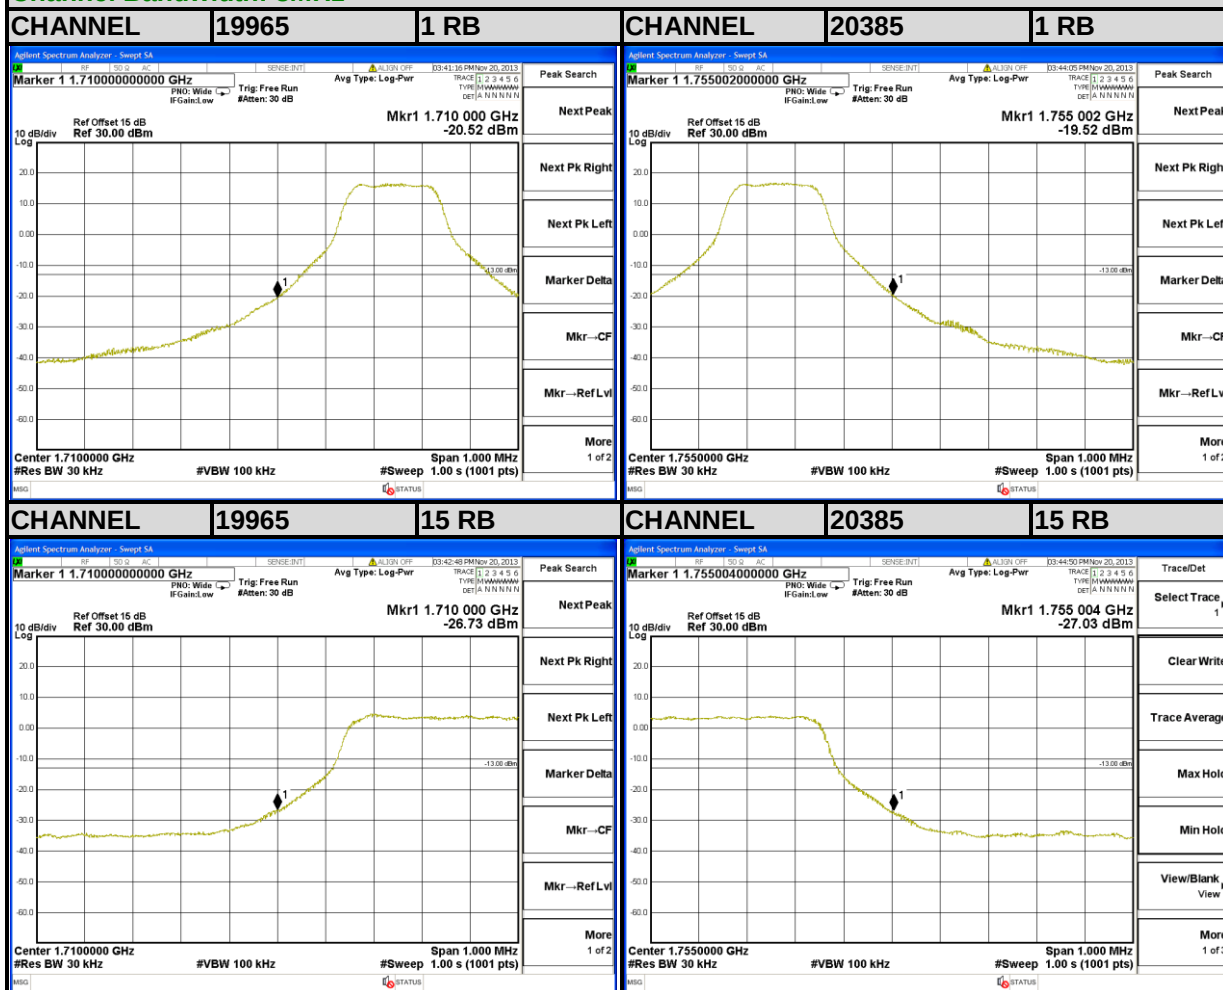Channel Bandwidth: 3MHz



A D T


Channel Bandwidth: 5MHz

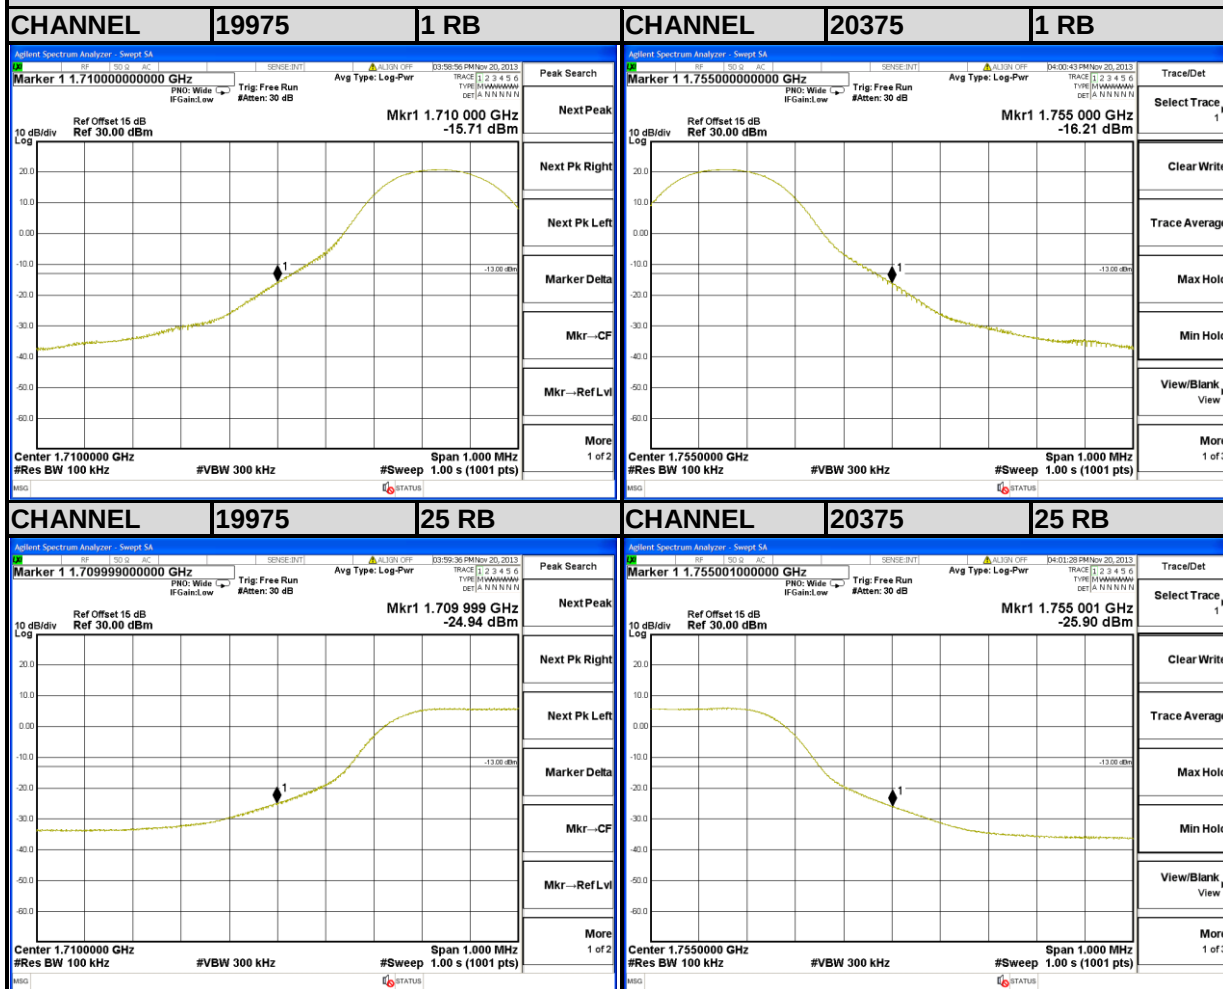



A D T

Channel Bandwidth: 10MHz

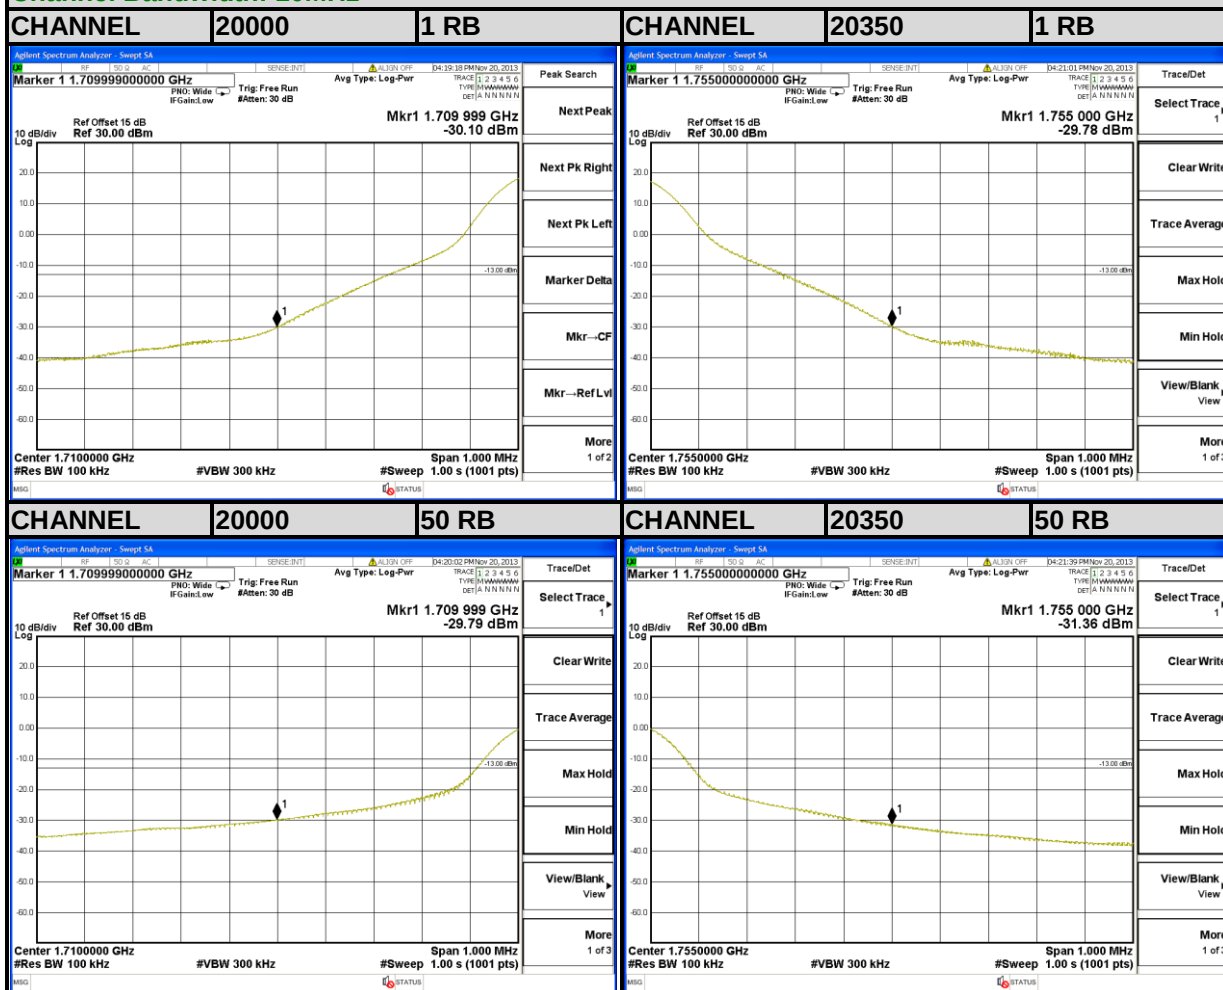

4.6 CONDUCTED SPURIOUS EMISSIONS


4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

4.6.2 TEST PROCEDURE

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 8GHz for LTE Band 17 and from 30MHz to 18GHz for LTE Band 4. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz are used for conducted emission measurement.

4.6.3 TEST SETUP

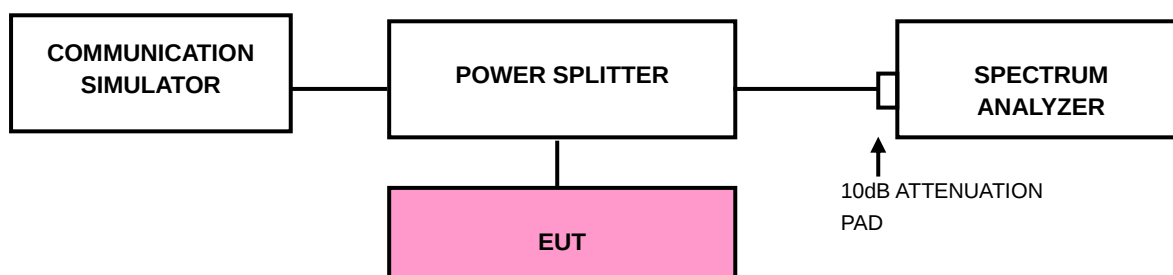





A D T

4.6.4 TEST RESULTS

LTE BAND 17

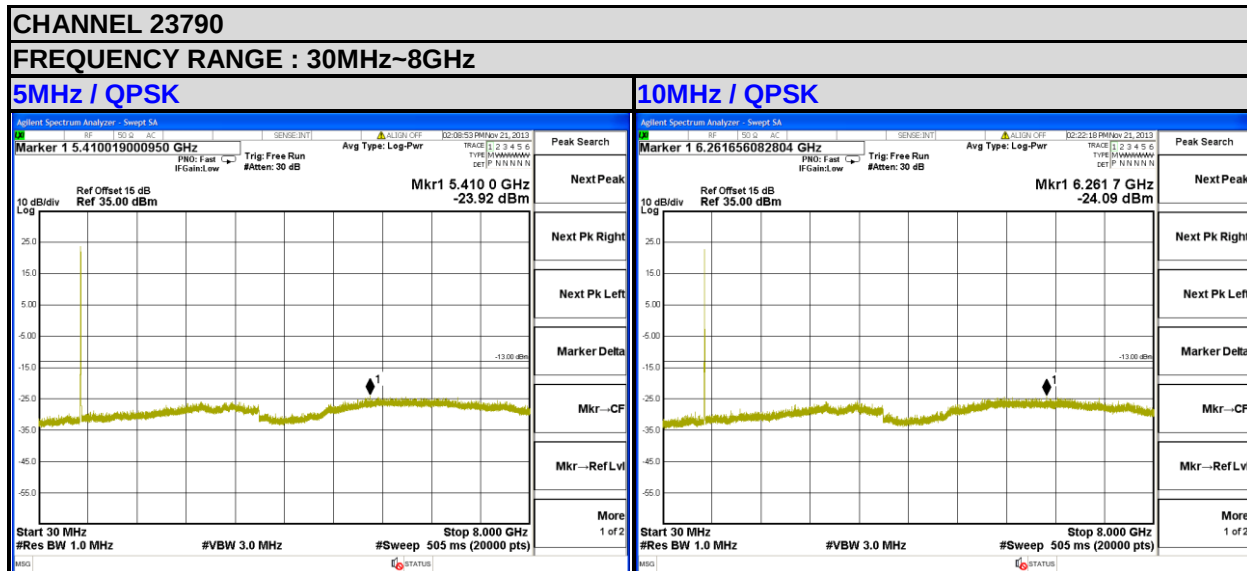

LTE BAND 4

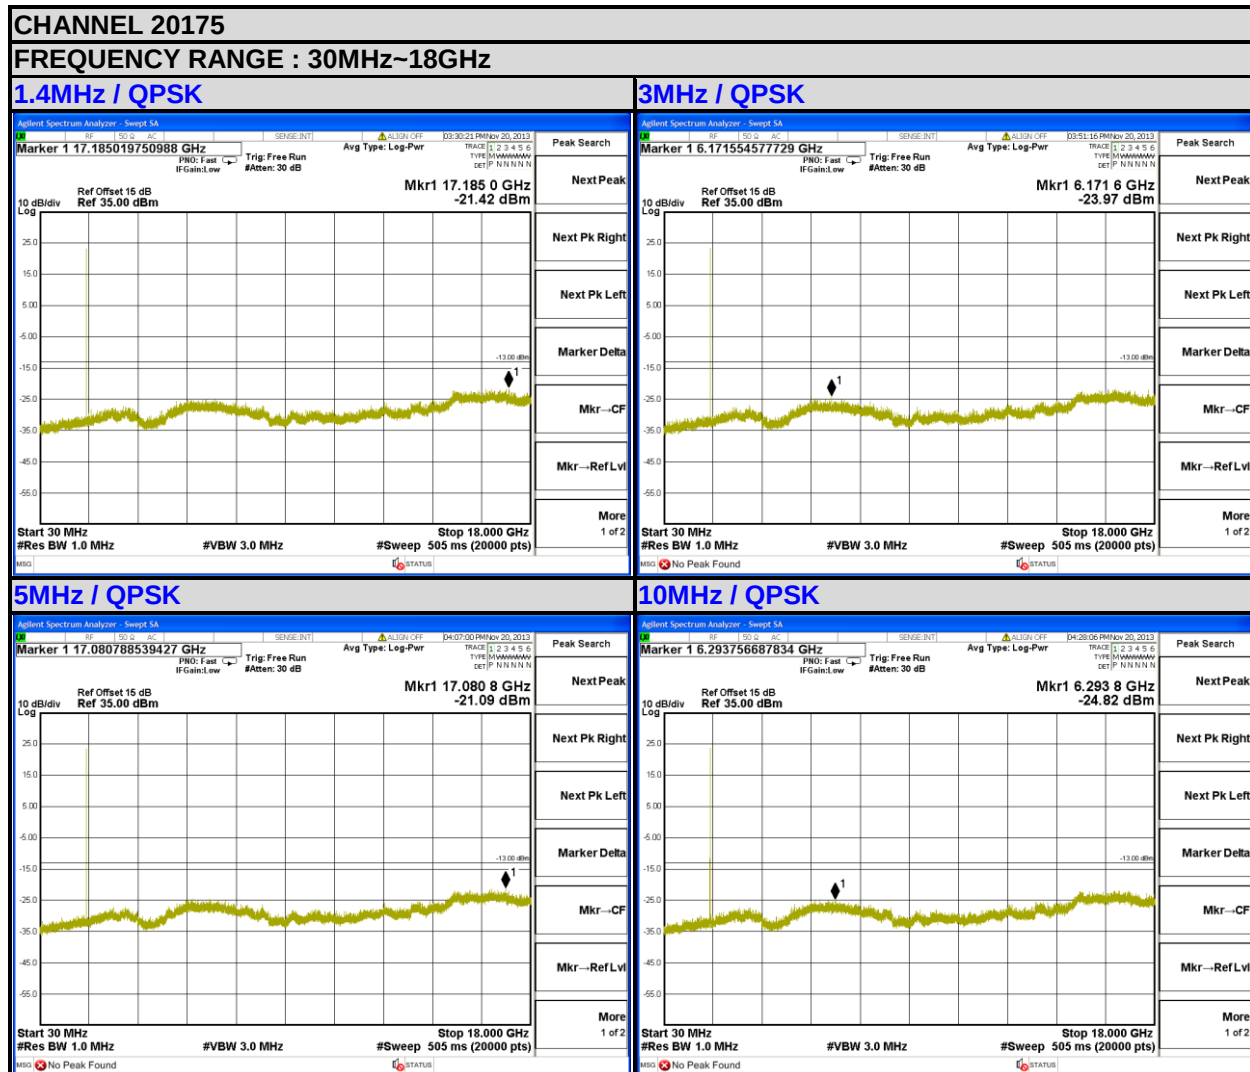

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

4.7.2 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}.$

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.7.3 DEVIATION FROM TEST STANDARD

No deviation

4.7.4 TEST SETUP

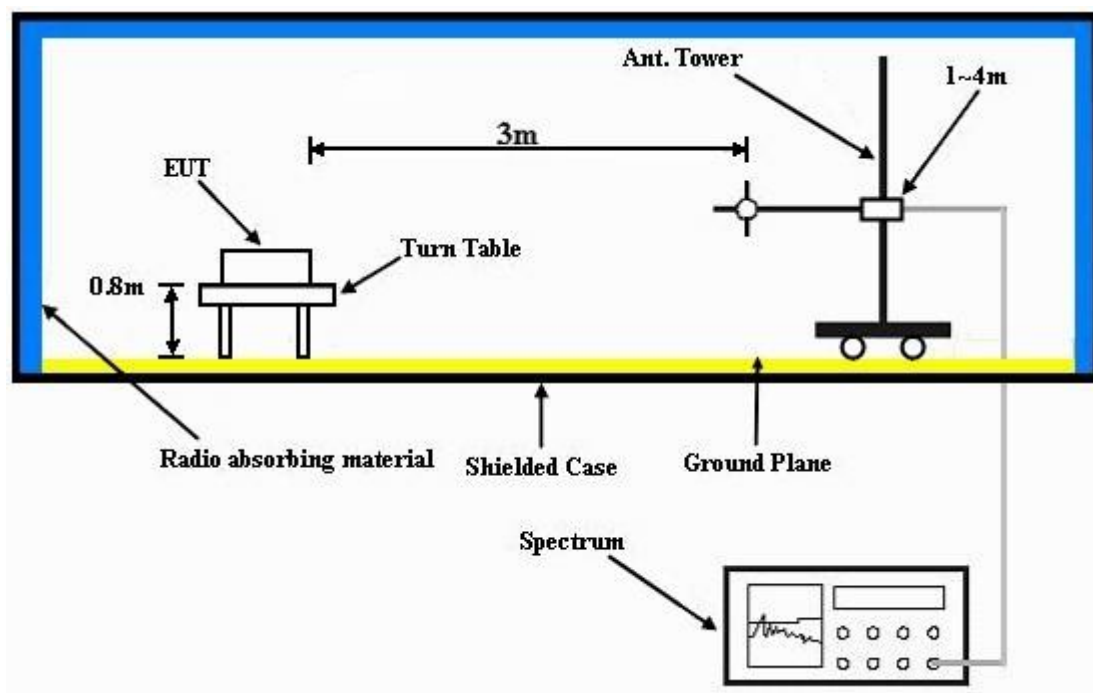

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 TEST RESULTS

LTE BAND 17


CHANNEL BANDWIDTH: 5MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

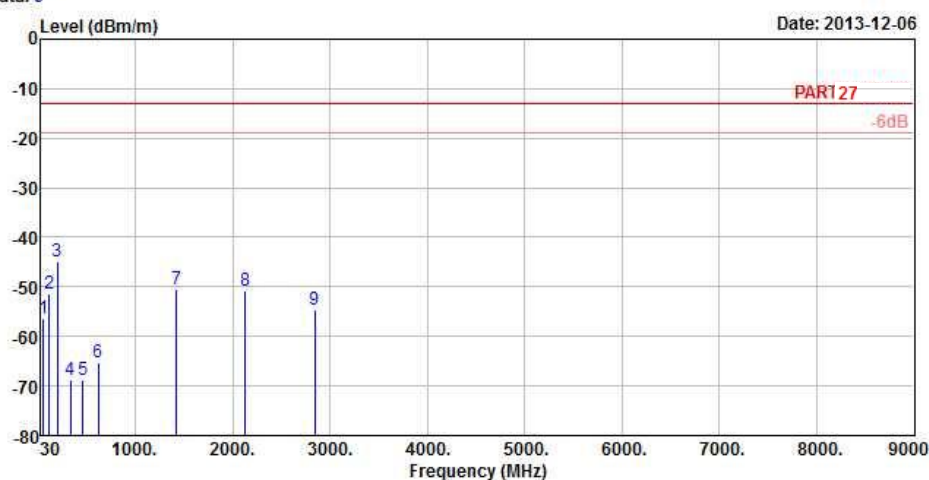

Site : 966 Chamber 5
Condition : PART27 3m HORIZONTAL
Brand/Model: 0P6B120
Remark : LTE Band 17_5M QPSK(1,12) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	58.08	-56.26	-50.46	-13.00	-43.26	-5.80 Peak
2	117.75	-51.50	-40.72	-13.00	-38.50	-10.78 Peak
3 pp	195.78	-44.98	-37.49	-13.00	-31.98	-7.49 Peak
4	335.00	-68.80	-62.68	-13.00	-55.80	-6.12 Peak
5	462.40	-68.89	-64.84	-13.00	-55.89	-4.05 Peak
6	617.80	-65.20	-65.16	-13.00	-52.20	-0.04 Peak
7	1420.00	-50.42	-36.83	-13.00	-37.42	-13.59 Peak
8	2130.00	-50.66	-38.94	-13.00	-37.66	-11.72 Peak
9	2840.00	-54.63	-44.89	-13.00	-41.63	-9.74 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

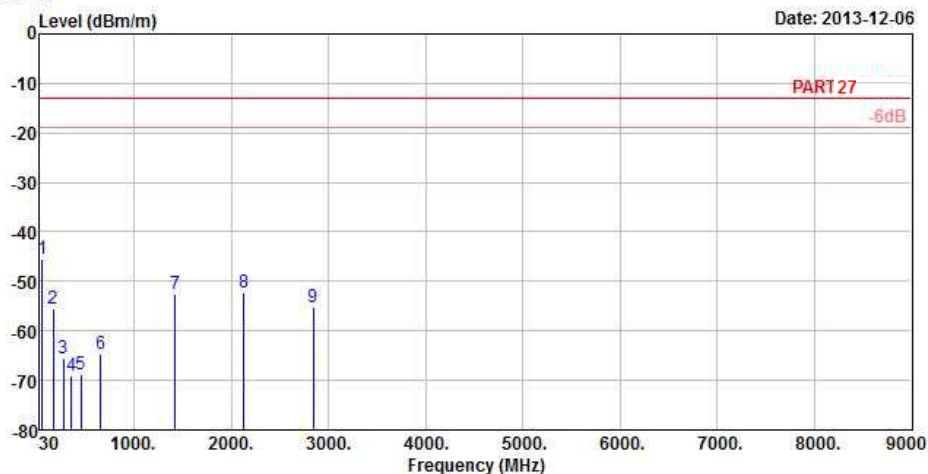

Site : 966 Chamber 5
Condition : PART27 3m VERTICAL
Brand/Model: 0P6B120
Remark : LTE Band 17_5M QPSK(1,12) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m
1 pp	58.35	-45.47	-39.67	-13.00	-32.47	-5.80 Peak
2	168.24	-55.47	-48.79	-13.00	-42.47	-6.68 Peak
3	274.35	-65.68	-59.66	-13.00	-52.68	-6.02 Peak
4	353.20	-69.10	-63.12	-13.00	-56.10	-5.98 Peak
5	455.40	-68.85	-64.63	-13.00	-55.85	-4.22 Peak
6	656.30	-64.58	-65.24	-13.00	-51.58	0.66 Peak
7	1420.00	-52.44	-38.85	-13.00	-39.44	-13.59 Peak
8	2130.00	-52.15	-40.43	-13.00	-39.15	-11.72 Peak
9	2840.00	-55.33	-45.59	-13.00	-42.33	-9.74 Peak



A D T


CHANNEL BANDWIDTH: 10MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

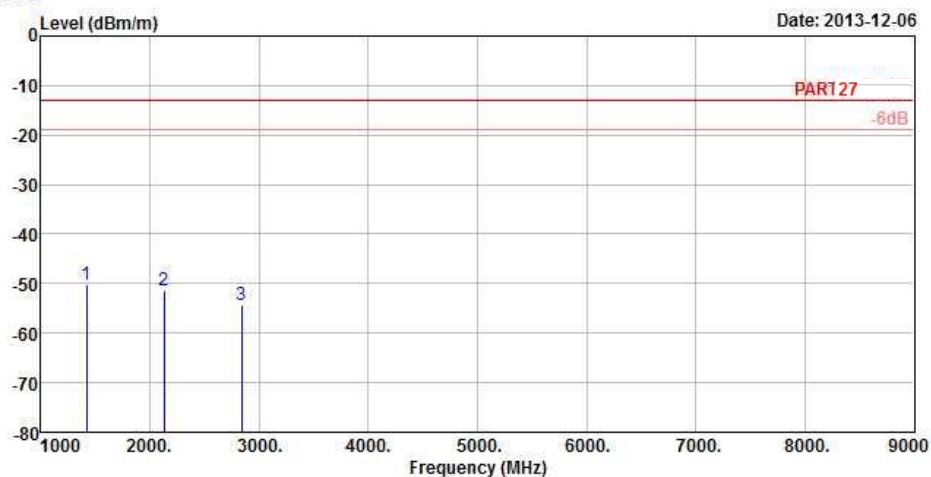

Site : 966 Chamber 5
Condition : PART27 3m HORIZONTAL
Brand/Model: 0P6B120
Remark : LTE Band 17_10M QPSK(1,24) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m
1 pp	1420.00	-50.06	-36.47	-13.00	-37.06	-13.59 Peak
2	2130.00	-51.37	-39.65	-13.00	-38.37	-11.72 Peak
3	2840.00	-54.42	-44.68	-13.00	-41.42	-9.74 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

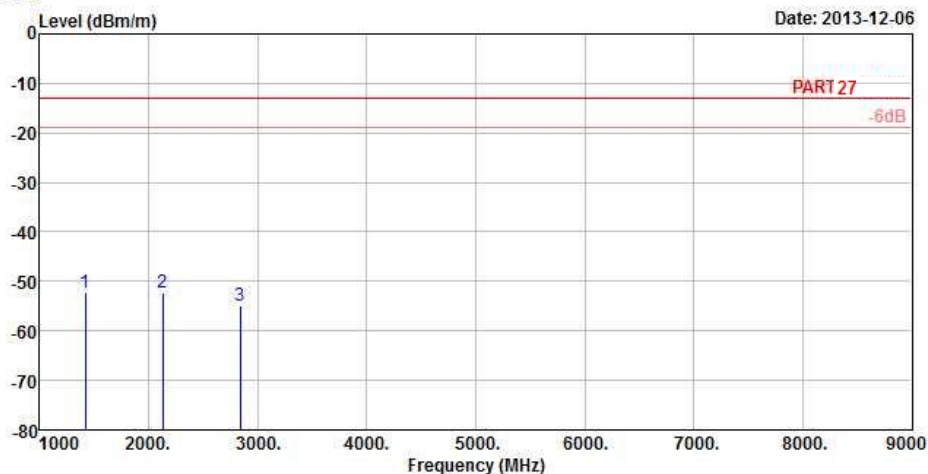

Site : 966 Chamber 5
Condition : PART27 3m VERTICAL
Brand/Model: 0P6B120
Remark : LTE Band 17_10M QPSK(1,24) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : Z

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1 pp	1420.00	-52.23	-38.64	-13.00	-39.23	-13.59 Peak
2	2130.00	-52.28	-40.56	-13.00	-39.28	-11.72 Peak
3	2840.00	-54.90	-45.16	-13.00	-41.90	-9.74 Peak



A D T

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 15

Date: 2013-12-05

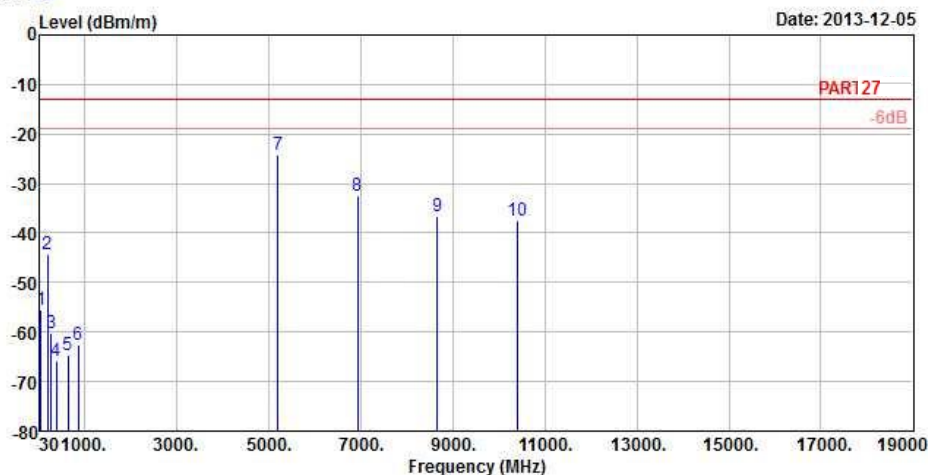

Site : 966 Chamber 5
Condition : PART27 3m HORIZONTAL
Brand/Model: 0P6B120
Remark : LTE Band 4_1.4M QPSK(1,2) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	57.81	-55.54	-49.74	-13.00	-42.54	-5.80 Peak
2	201.72	-44.34	-36.48	-13.00	-31.34	-7.86 Peak
3	268.14	-60.36	-54.42	-13.00	-47.36	-5.94 Peak
4	379.80	-65.73	-59.95	-13.00	-52.73	-5.78 Peak
5	636.00	-64.56	-64.86	-13.00	-51.56	0.30 Peak
6	861.40	-62.53	-65.01	-13.00	-49.53	2.48 Peak
7 pp	5197.50	-24.33	-21.27	-13.00	-11.33	-3.06 Peak
8	6930.00	-32.60	-34.90	-13.00	-19.60	2.30 Peak
9	8662.50	-36.55	-41.50	-13.00	-23.55	4.95 Peak
10	10395.00	-37.41	-44.54	-13.00	-24.41	7.13 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 16

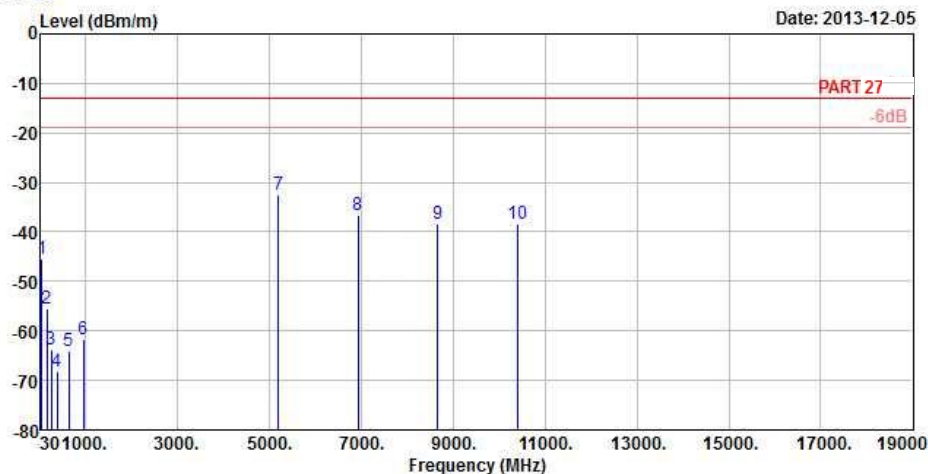

Site : 966 Chamber 5
Condition : PART27 3m VERTICAL
Brand/Model: 0P6B120
Remark : LTE Band 4_1.4M QPSK(1,2) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1	57.81	-45.39	-39.59	-13.00	-32.39	-5.80 Peak
2	164.19	-55.56	-48.98	-13.00	-42.56	-6.58 Peak
3	256.80	-63.88	-58.10	-13.00	-50.88	-5.78 Peak
4	377.70	-68.06	-62.25	-13.00	-55.06	-5.81 Peak
5	642.30	-64.04	-64.44	-13.00	-51.04	0.40 Peak
6	962.20	-61.76	-65.68	-13.00	-48.76	3.92 Peak
7 pp	5197.50	-32.49	-29.43	-13.00	-19.49	-3.06 Peak
8	6930.00	-36.64	-38.94	-13.00	-23.64	2.30 Peak
9	8662.50	-38.47	-43.42	-13.00	-25.47	4.95 Peak
10	10395.00	-38.35	-45.48	-13.00	-25.35	7.13 Peak



A D T


CHANNEL BANDWIDTH: 3MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 11

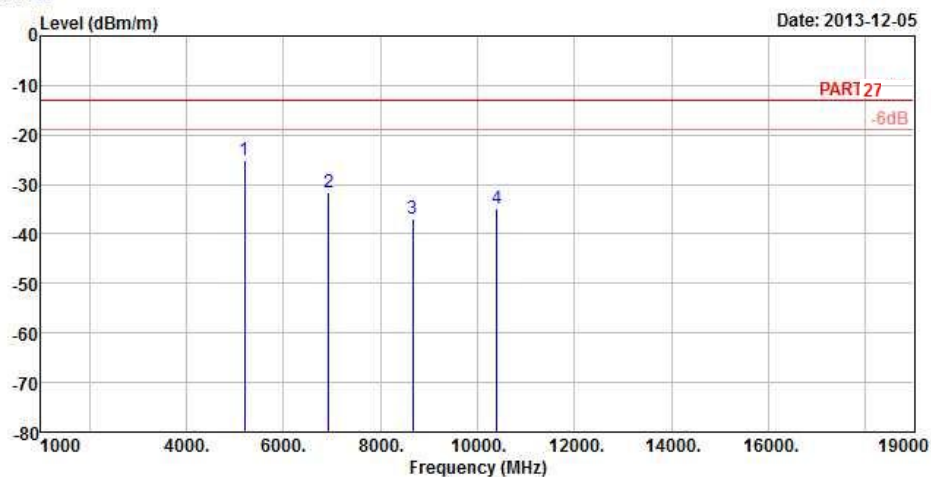

Site : 966 Chamber 5
Condition : PART27 3m HORIZONTAL
Brand/Model: 0P6B120
Remark : LTE Band 4_3M QPSK(1,7) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
	MHz	dBm/m	dBm	dBm/m	dB	dB/m
1 pp	5197.50	-25.01	-21.95	-13.00	-12.01	-3.06 Peak
2	6930.00	-31.68	-33.98	-13.00	-18.68	2.30 Peak
3	8662.50	-36.97	-41.92	-13.00	-23.97	4.95 Peak
4	10395.00	-34.98	-42.11	-13.00	-21.98	7.13 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 12

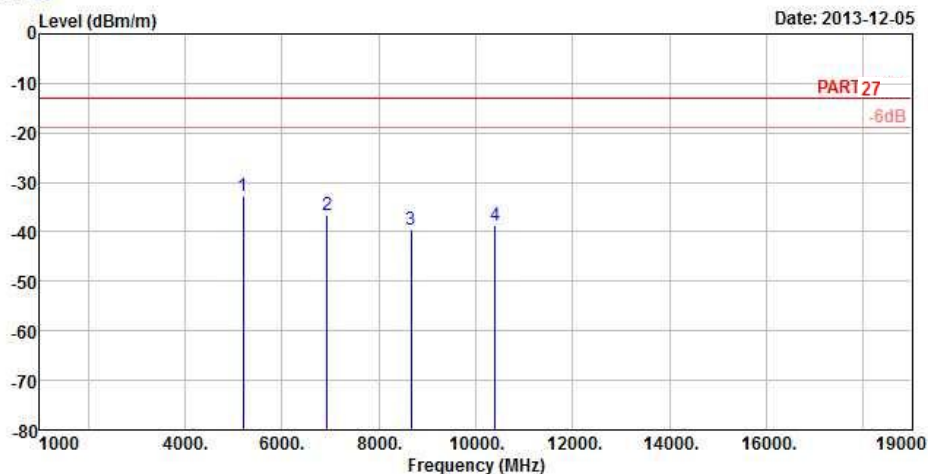

Site : 966 Chamber 5
Condition : PART27 3m VERTICAL
Brand/Model: 0P6B120
Remark : LTE Band 4_3M QPSK(1,7) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1 pp	5197.50	-32.68	-29.62	-13.00	-19.68	-3.06 Peak
2	6930.00	-36.54	-38.84	-13.00	-23.54	2.30 Peak
3	8662.50	-39.64	-44.59	-13.00	-26.64	4.95 Peak
4	10395.00	-38.53	-45.66	-13.00	-25.53	7.13 Peak



A D T

CHANNEL BANDWIDTH: 5MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 11

Date: 2013-12-20

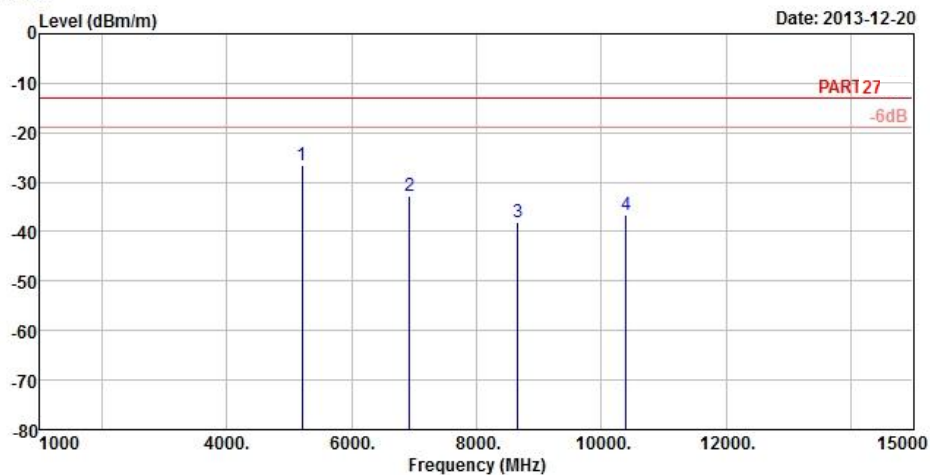

Site : 966 Chamber 5
Condition : PART27 3m HORIZONTAL
Brand/Model: 0P6B120
Remark : LTE Band 4_5M QPSK(1,12) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1 pp	5197.50	-26.54	-23.48	-13.00	-13.54	-3.06 Peak
2	6930.00	-32.91	-35.21	-13.00	-19.91	2.30 Peak
3	8662.50	-38.14	-43.09	-13.00	-25.14	4.95 Peak
4	10395.00	-36.57	-43.70	-13.00	-23.57	7.13 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 12

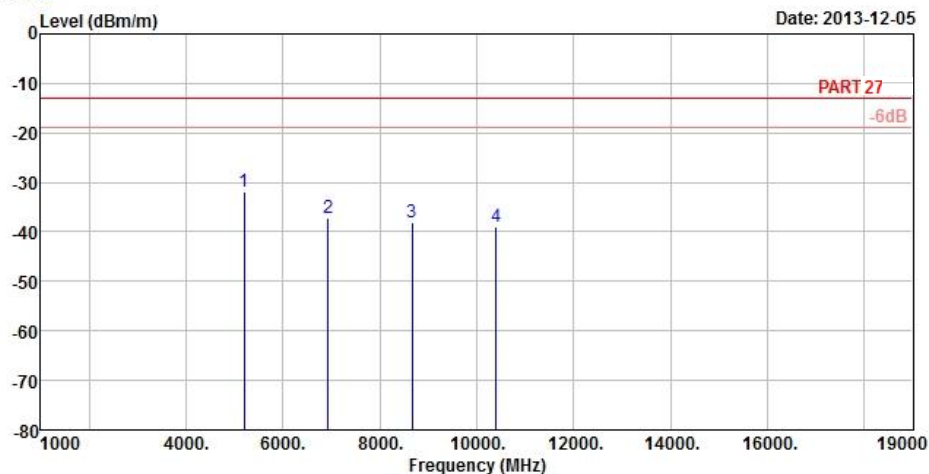

Site : 966 Chamber 5
Condition : PART27 3m VERTICAL
Brand/Model: 0P6B120
Remark : LTE Band 4_5M QPSK(1,12) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1 pp	5197.50	-31.99	-28.93	-13.00	-18.99	-3.06 Peak
2	6930.00	-37.20	-39.50	-13.00	-24.20	2.30 Peak
3	8662.50	-37.95	-42.90	-13.00	-24.95	4.95 Peak
4	10395.00	-38.95	-46.08	-13.00	-25.95	7.13 Peak



A D T


CHANNEL BANDWIDTH: 10MHz / QPSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 11

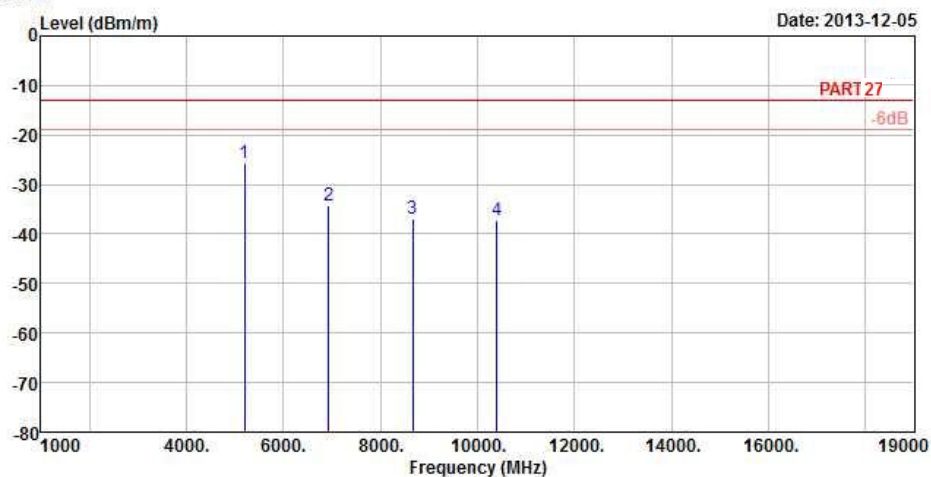

Site : 966 Chamber 5
Condition : PART27 3m HORIZONTAL
Brand/Model: 0P6B120
Remark : LTE Band 4_10M QPSK(1,24) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1 pp	5197.50	-25.54	-22.48	-13.00	-12.54	-3.06 Peak
2	6930.00	-34.31	-36.61	-13.00	-21.31	2.30 Peak
3	8662.50	-36.94	-41.89	-13.00	-23.94	4.95 Peak
4	10395.00	-37.27	-44.40	-13.00	-24.27	7.13 Peak




A D T



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 12

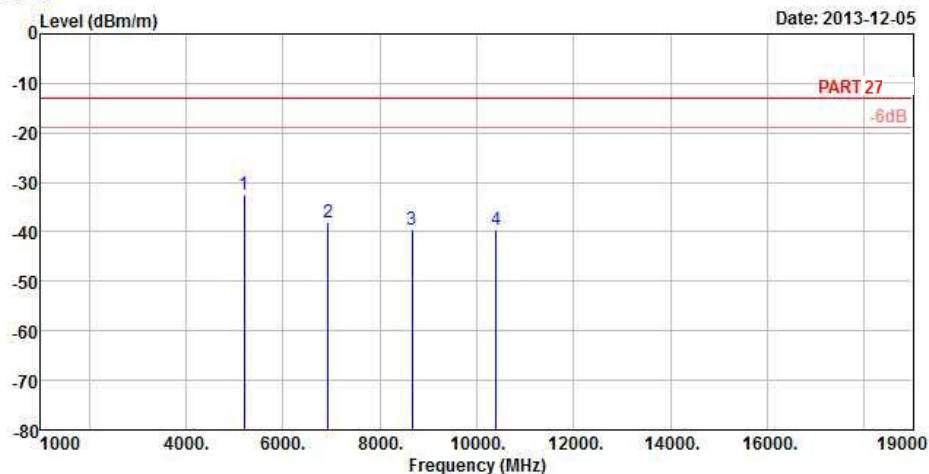

Site : 966 Chamber 5
Condition : PART27 3m VERTICAL
Brand/Model: 0P6B120
Remark : LTE Band 4_10M QPSK(1,24) Link
Tested by : Johnson Liao
Temperature : 25°C
Humidity : 65%
Plane : Y

	Freq	Level	Read	Limit	Over	
	MHz	dBm/m	Level	Line	Limit	Factor Remark
			dBm	dBm/m	dB	dB/m
1 pp	5197.50	-32.39	-29.33	-13.00	-19.39	-3.06 Peak
2	6930.00	-38.10	-40.40	-13.00	-25.10	2.30 Peak
3	8662.50	-39.45	-44.40	-13.00	-26.45	4.95 Peak
4	10395.00	-39.65	-46.78	-13.00	-26.65	7.13 Peak

5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---