



**FCC 47 CFR PART 15 SUBPART C
ISED RSS-210 ISSUE 10**

CERTIFICATION TEST REPORT

For

WisePad 3S/WisePad 3

MODEL NUMBER: WPS32/WPC32

FCC ID: 2AB7X-WPC3V1

IC: 28493-WPC3V1

REPORT NUMBER: 4790274428-3

ISSUE DATE: June 21, 2022

Prepared for

BBPOS Limited

Suite 1902-04, Tower 2, Nina Tower, 8 Yeung Uk Road, Tsuen Wan, NT, Hong Kong

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	6/21/2022	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	Transmitter 99% Emission Bandwidth / 20dB Bandwidth	RSS-Gen 6.7/ Part 15.215 (c)	PASS
2	Transmitter Frequency Stability (Temperature & Voltage Variation)	CFR 47 FCC §15.225(e) ISED RSS-Gen Clause 6.11 ISED RSS-210 Annex B.6	PASS
3	Fundamental Field Strength	CFR 47 FCC §5.225(a)(b)(c)(d) ISED RSS-Gen Clause 6.12 ISED RSS-210 Annex B.6	PASS
4	Radiated Emissions	CFR 47 FCC§15.209(a) CFR 47 FCC§15.225(d) ISED RSS-Gen Clause 6.13 ISED RSS-210 Annex B.6	PASS
5	Band Edge Radiated Emissions	CFR 47 FCC §15.209(a) CFR 47 FCC §15.225(c)(d) ISED RSS-Gen Clause 6.13 ISED RSS-210 Annex B.6	PASS
6	Conducted Emission Test for AC Power Port	CFR 47 FCC §15.207 ISED RSS-Gen Clause 8.8	PASS
7	Antenna Requirement	CFR 47 FCC §15.203 ISED RSS-Gen Clause 6.3	Pass
This test report is only published to and used by the applicant, and it is not for evidence purpose in China.			



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	7
4.2. <i>MEASUREMENT UNCERTAINTY</i>	7
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	8
5.2. <i>MAXIMUM FIELD STRENGTH</i>	8
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	8
5.4. <i>DESCRIPTION OF TEST SETUP</i>	9
5.5. <i>MEASURING INSTRUMENT AND SOFTWARE USED</i>	10
6. ANTENNA PORT TEST RESULTS	11
6.1. <i>99% & 20dB BANDWIDTH</i>	11
6.2. <i>TRANSMITTER FREQUENCY STABILITY</i>	13
7. RADIATED EMISSION TEST RESULTS	16
7.1. <i>FIELD STRENGTH OF INTENTIONAL EMISSIONS</i>	22
7.2. <i>SPURIOUS EMISSIONS BELOW 1GHz AND ABOVE 30 MHz</i>	23
7.3. <i>SPURIOUS EMISSIONS BELOW 30 MHz</i>	25
8. AC POWER LINE CONDUCTED EMISSIONS	28
9. ANTENNA REQUIREMENTS	34



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: BBPOS Limited
Address: Suite 1902-04, Tower 2, Nina Tower, 8 Yeung Uk Road, Tsuen Wan, NT, Hong Kong

Manufacturer Information

Company Name: BBPOS Limited
Address: Suite 1902-04, Tower 2, Nina Tower, 8 Yeung Uk Road, Tsuen Wan, NT, Hong Kong

EUT Information

Product Name: WisePad 3S
Model Name: WPS32
Series Product Name: WisePad 3
Series Model: WPC32
Model Difference: See section 5.1 of this report for detail.
Brand: BBPOS
Sample Received Date: April 10, 2022
Sample Status: Normal
Sample ID: 4822226
Date of Tested: April 14, 2022 to June 21, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-210 Issue 10	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Denny Huang
Project Engineer
Approved By:

Stephen Guo
Laboratory Manager

Checked By:

Shawn Wen
Laboratory Leader



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, ISED RSS-210 Issue 10 and RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p>IC (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note:

1. All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
2. The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
3. For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62dB
Radiation Emission test (include Fundamental emission) (9KHz-30MHz)	2.2dB
Radiation Emission test (include Fundamental emission) (30MHz-1GHz)	4.00dB
Radiation Emission test (1GHz to 26GHz) (include Fundamental emission)	5.78dB (1GHz-18Gz)
	5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Product Name	WisePad 3S	
Model	WPS32	
Series Product Name	WisePad 3	
Series Model	WPC32	
Model Difference	The BT/BLE and NFC all have the same circuit diagram, PCB layout, components and component layout. WisePad 3S is identical to WisePad 3 except for enclosure and function of card slot. The WisePad3S includes the MSR card slot and MSR circuitry. And there is a mechanical difference in that the enclosure has the card slot in the WisePad 3S that the WisePad 3 does not have. About the more detail, please refer to the model declaration letter.	
Product Description	Operation Frequency	13.56MHz
Modulation	ASK	
Power Supply	DC 3.7 V	

Note: Pre-scan had been done for both WisePad 3S and WisePad 3, but only the worst data was recorded (WPS32) in the report.

5.2. MAXIMUM FIELD STRENGTH

Frequency (MHz)	Max Peak field strength (dB μ V/m)
13.56	38.67

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
13.56	line antenna	0

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Mobile Phone	HUAWEI	Mate 30	/
2	Adapter	HUAWEI	HW-100255C00	Input: 100-200 V/50/60 Hz Out: 5 V/2 A
3	NFC Card	/	/	/

I/O PORT

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	Type C	/	1.0	/

ACCESSORY


Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in a engineering mode.

NFC support both ISO /IEC 14443A and ISO /IEC 14443B. All lowest and highest data rates as per the standards are supported - 106 kbps, 212 kbps, 424 kbps and 848 kbps, all the modes had been tested, but only the worst data (ISO 14443A 106 kbps) was recorded in the report.

SETUP DIAGRAM FOR TESTS

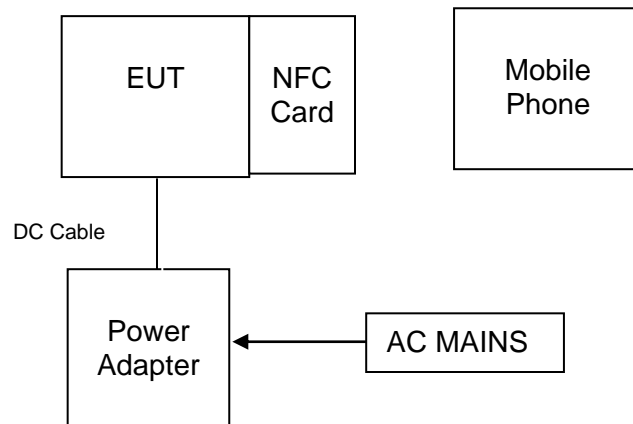

Note: Test was performed with tag and without tag, but only the worst case data (with tag) was recorded in the report.

5.5. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.30, 2021	Oct.29, 2022
Two-Line V-Network	R&S	ENV216	101983	Oct.30, 2021	Oct.29, 2022
Software					
Description		Manufacturer		Name	Version
Test Software for Conducted Emissions		Farad		EZ-EMC	Ver. UL-3A1

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Apr.02,2022	Apr.01,2023
Signal Analyzer	R&S	FSV40	101118	Oct.30, 2021	Oct.29, 2022
Software					
Description		Manufacturer		Name	Version
Tonsend SRD Test System		Tonsend		JS1120-3 RF Test System	2.6.77.0518

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Software					
Description		Manufacturer		Name	Version
Test Software for Radiated Emissions		Farad		EZ-EMC	Ver. UL-3A1

Other Instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal & Spectrum analyzer	R&S	FSW	1312.8000K26-103950-sj	Oct.31, 2021	Oct.30, 2022

6. ANTENNA PORT TEST RESULTS

6.1. 99% & 20dB BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C RSS-247 ISSUE 2		
Section	Test Item	Limit
ANSI C63.10 Section 6.9.2	20dB% Bandwidth	For reporting purposes only.
RSS-Gen Clause 6.7	99% Bandwidth	For reporting purposes only.


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20dB Occupied Bandwidth: 1% to 5% of the 20 dB bandwidth For 99% Occupied Bandwidth: 1% to 5% of the occupied bandwidth
VBW	For 20dB Occupied Bandwidth: approximately 3×RBW For 99% Occupied Bandwidth: approximately 3×RBW
Span	Between 2 times and 5 times the 20dB OBW. Between 1.5 times and 5.0 times the 99% OBW.
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 99%/20dB relative to the maximum level measured in the fundamental emission.

TEST SETUP




**TEST ENVIRONMENT**

Temperature	24.3 °C	Relative Humidity	65 %
Atmosphere Pressure	101kPa	Test Voltage	DC 3.7 V

RESULTS

Frequency (MHz)	99% Occupied Bandwidth (kHz)	20dB Bandwidth (kHz)
13.56	426.93	322.5

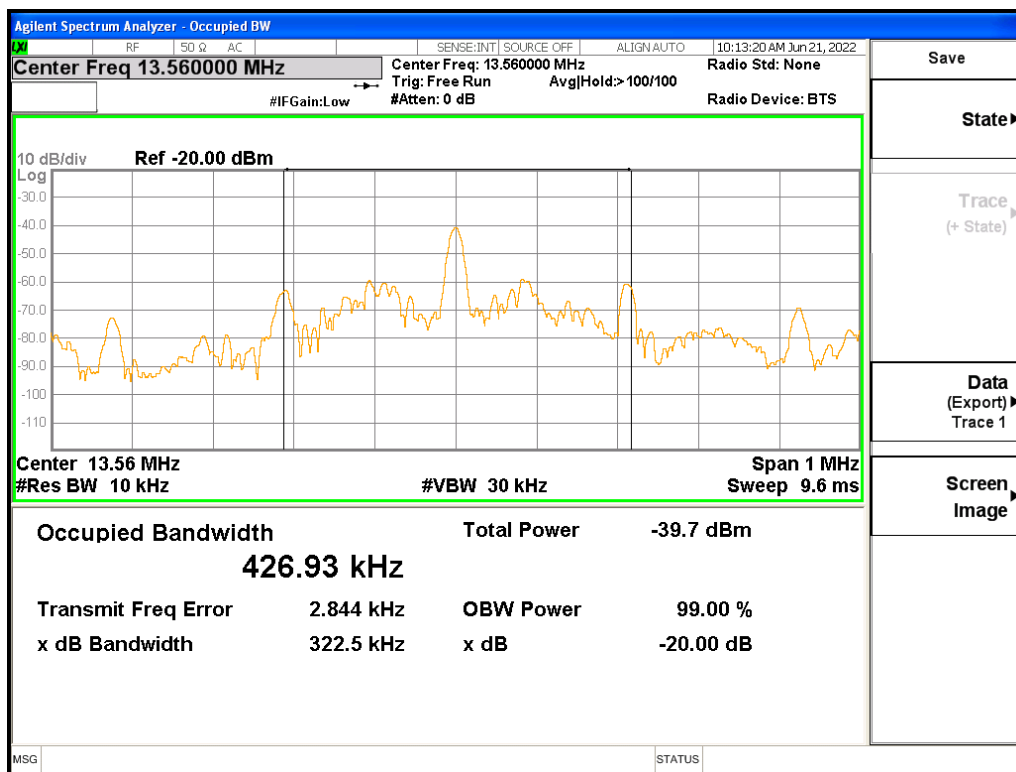

6.2. TRANSMITTER FREQUENCY STABILITY

LIMITS

CFR 47 FCC §15.225(e)

ISED RSS-210 Annex B B.5

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+ 50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.


TEST SETUP AND PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	10 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

TEST SETUP

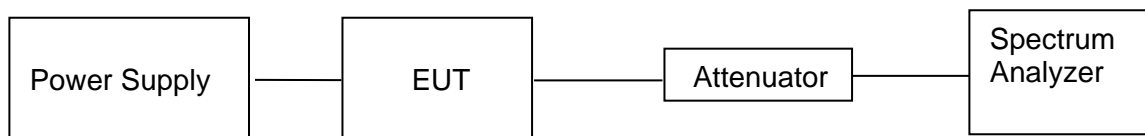

**TEST ENVIRONMENT**

Temperature	23.5°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	/

TEST RESULTS

Maximum frequency error of the EUT with variations in ambient temperature

Temperature (°C)	Frequency Error With Time after Startup							
	0 minutes		2 minutes		5 minutes		10 minutes	
	Measured Frequency (MHz)	Frequency Error (%)	Measured Frequency (MHz)	Frequency Error (%)	Measured Frequency (MHz)	Frequency Error (%)	Measured Frequency (MHz)	Frequency Error (%)
-20	13.5604	0.004	13.5606	0.006	13.5605	0.005	13.5604	0.004
-10	13.5602	0.002	13.5605	0.005	13.5605	0.005	13.5605	0.005
0	13.5604	0.004	13.5605	0.005	13.5605	0.005	13.5604	0.004
10	13.5605	0.005	13.5604	0.004	13.5604	0.004	13.5605	0.005
20	13.5603	0.003	13.5604	0.004	13.5604	0.004	13.5604	0.004
30	13.5602	0.002	13.5604	0.004	13.5604	0.004	13.5604	0.004
40	13.5604	0.004	13.5604	0.004	13.5605	0.005	13.5604	0.004
50	13.5604	0.004	13.5605	0.005	13.5605	0.005	13.5605	0.005
Limit (%)	0.01		0.01		0.01		0.01	
Result	Pass		Pass		Pass		Pass	

Maximum frequency error of the EUT with variations in nominal operating voltage at an ambient normal temperature

Supply Voltage (V)	Nominal Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Margin (%)	Result
3.145	13.56	13.5606	600	0.006	0.01	0.004	Pass
3.700	13.56	13.5604	400	0.004	0.01	0.006	Pass
4.255	13.56	13.5605	500	0.005	0.01	0.004	Pass

Maximum frequency error of the EUT with 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

Supply Voltage by adapter	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
138 Vac, 60Hz	13.5605	13.5603	13.5599	13.5601
120 Vac, 60Hz	13.5608	13.5601	13.5603	13.5608
102 Vac, 60Hz	13.5598	13.5607	13.5609	13.5598
Maximum frequency error	0.0059%	0.0052%	0.0066%	0.0059%
Limit	0.01%			
Result	Pass	Pass	Pass	Pass



7. RADIATED EMISSION TEST RESULTS

LIMITS

Fundamental field strength

FCC Reference:	Part 15.225(a)(b)(c)(d) & 15.209(a)
ISED Canada Reference:	RSS-Gen 6.13 & RSS-210 B.6 & RSS-GEN Clause 8.9
Test Method Used:	ANSI C63.10 Sections 6.3, 6.4 and 6.5

Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measured Distance (Meters)
13.553-13.567	15848	84	30
13.410-13.553/13.567-13.710	334	50.47	30
13.110-13.410/13.710-14.010	106	40.51	30

Note(s):

1. The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

2. The limit is specified at a test distance of 30 meters. However, as specified by FCC Section 15.31 (f)(2) / RSS-Gen Section 6.4, measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).



Radiation Disturbance Test Limit for FCC (Class B) (9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30MHz.

Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c




IC Restricted bands please refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands ^{Note 1}		
MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

TEST SETUP AND PROCEDURE

Below 30 MHz

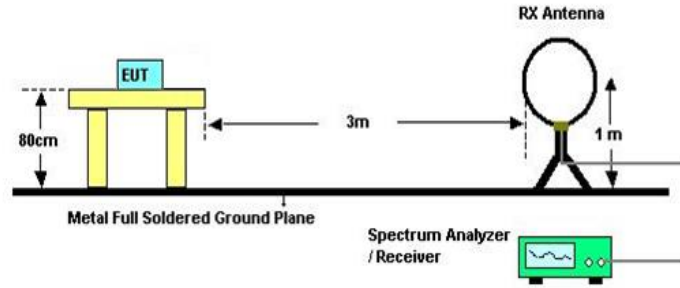


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

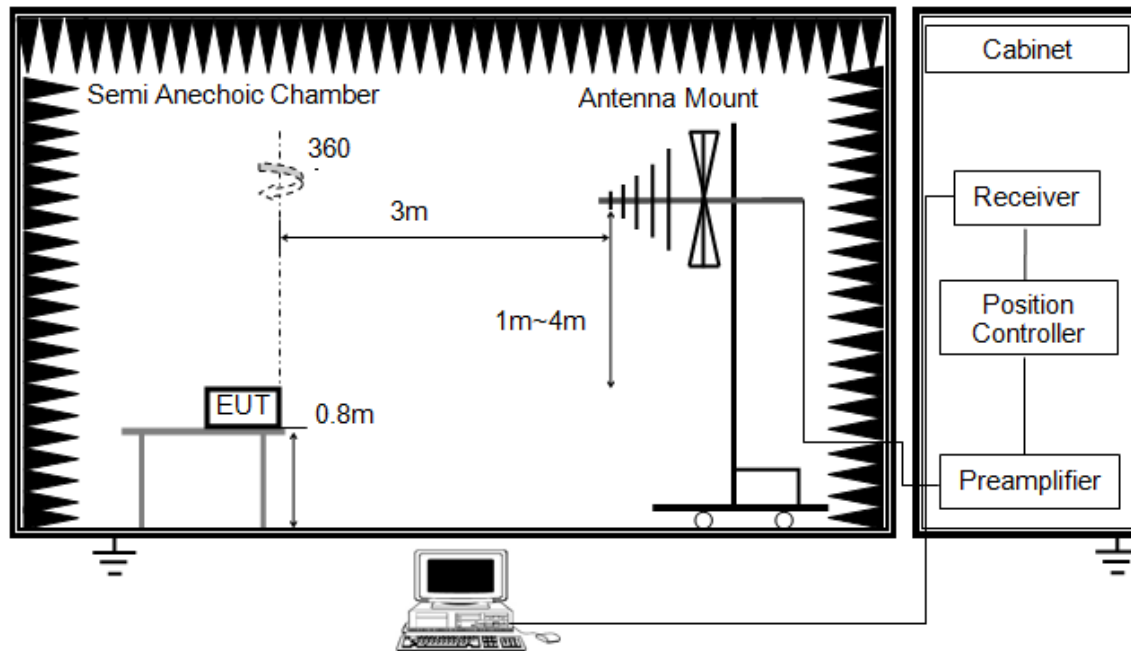


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

X axis, Y axis, Z axis positions:

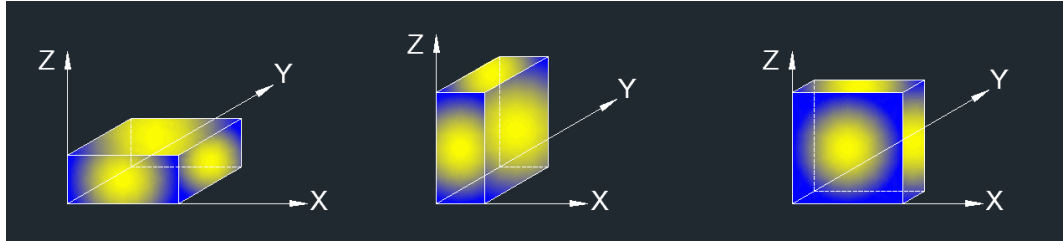

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


TEST ENVIRONMENT

Temperature	20.0°C	Relative Humidity	51%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.7V

RESULTS

7.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS

FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

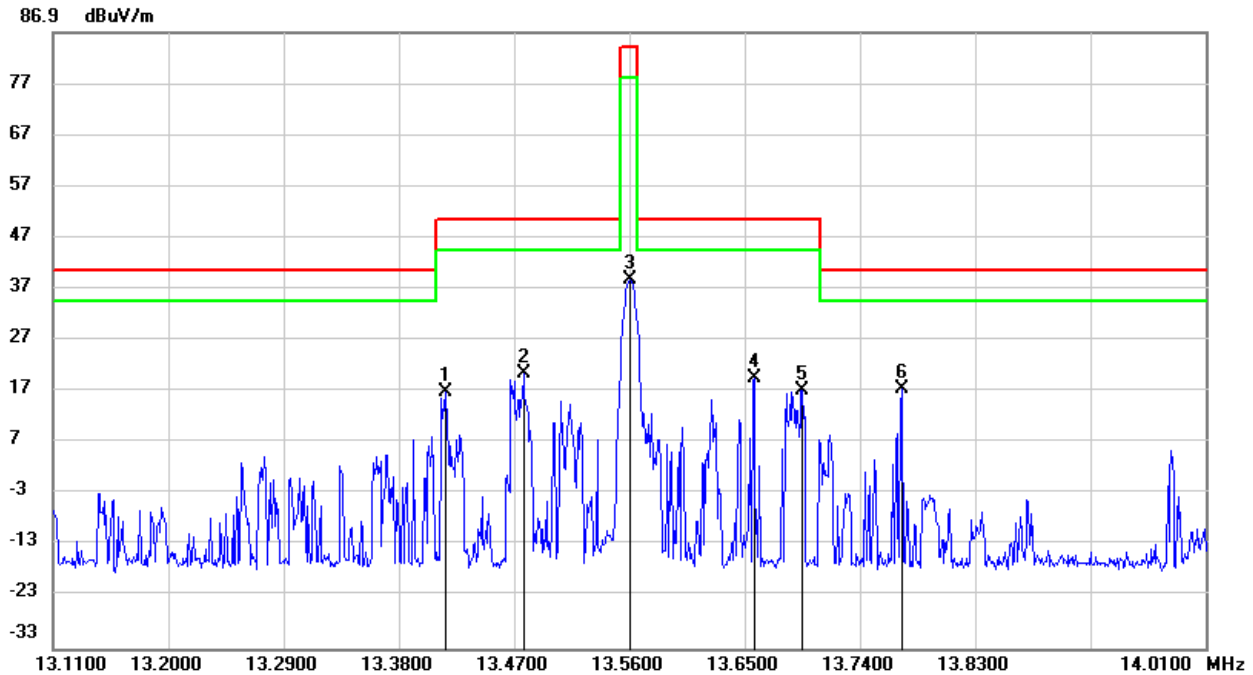

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13.4160	78.24	-61.40	16.84	50.47	-33.63	peak
2	13.4772	81.78	-61.41	20.37	50.47	-30.10	peak
3	13.5600	100.08	-61.41	38.67	84.00	-45.33	peak
4	13.6572	80.98	-61.41	19.57	50.47	-30.90	peak
5	13.6950	78.69	-61.41	17.28	50.47	-33.19	peak
6	13.7724	78.88	-61.43	17.45	40.51	-23.06	peak
7	13.4160	78.24	-61.40	16.84	50.47	-33.63	peak


Note: 1. Result Level = Read Level + Correct Factor.

2. 3m Limit= 30m Limit + 40

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


7.2. SPURIOUS EMISSIONS BELOW 1GHz AND ABOVE 30 MHz

SPURIOUS EMISSIONS (HORIZONTAL)

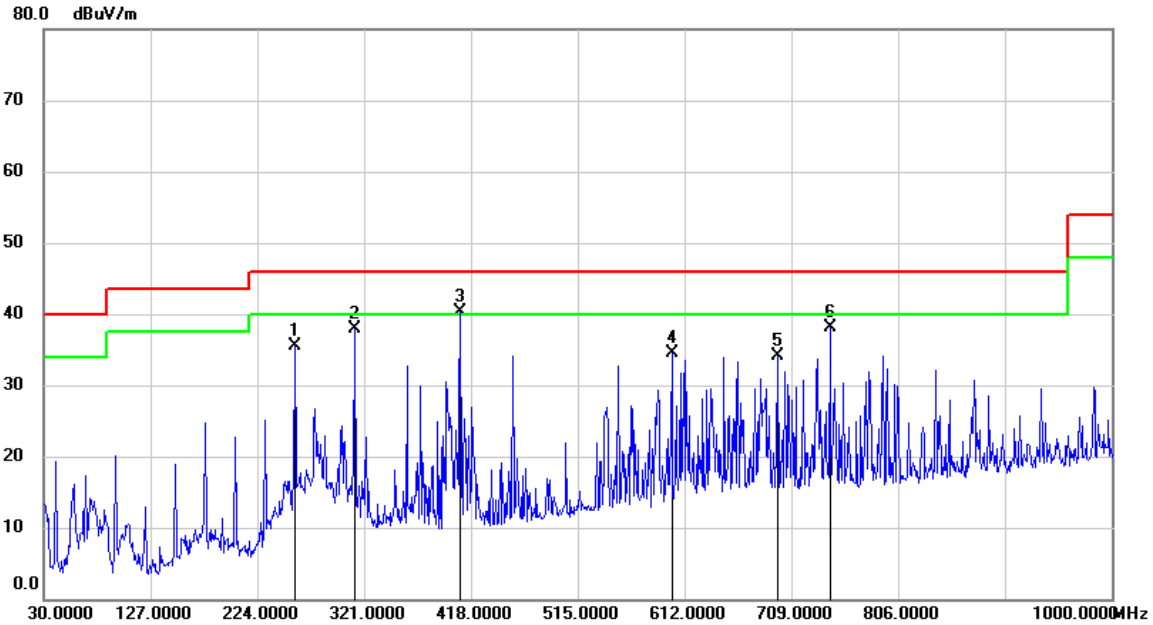

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	257.9500	54.22	-18.62	35.60	46.00	-10.40	QP
2	312.2700	52.84	-15.01	37.83	46.00	-8.17	QP
3	408.3000	53.57	-13.17	40.40	46.00	-5.60	QP
4	600.3600	43.95	-9.54	34.41	46.00	-11.59	QP
5	696.3900	42.39	-8.32	34.07	46.00	-11.93	QP
6	743.9200	46.06	-7.92	38.14	46.00	-7.86	QP

Note: 1. Result Level = Read Level + Correct Factor.

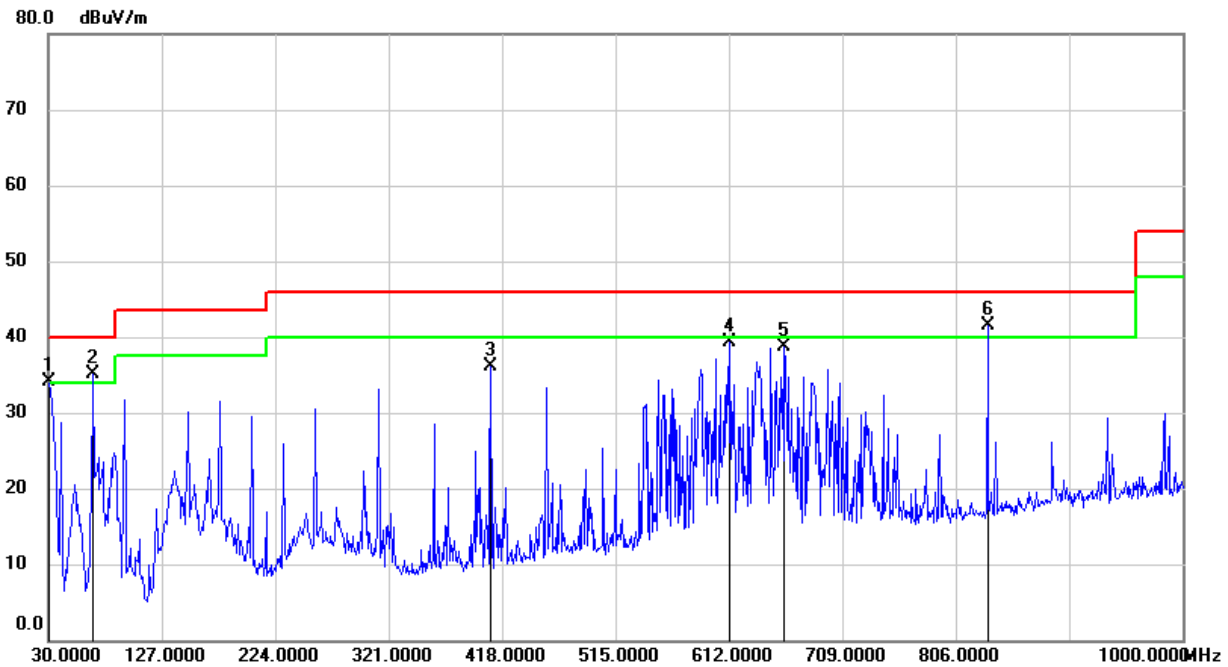**HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	53.07	-18.94	34.13	40.00	-5.87	QP
2	67.8300	55.72	-20.55	35.17	40.00	-4.83	QP
3	408.3000	49.35	-13.17	36.18	46.00	-9.82	QP
4	612.9699	48.70	-9.40	39.30	46.00	-6.70	QP
5	659.5300	47.30	-8.69	38.61	46.00	-7.39	QP
6	833.1599	48.07	-6.61	41.46	46.00	-4.54	QP

Note: 1. Result Level = Read Level + Correct Factor.

7.3. SPURIOUS EMISSIONS BELOW 30 MHz

SPURIOUS EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

0.09 kHz ~ 150 kHz

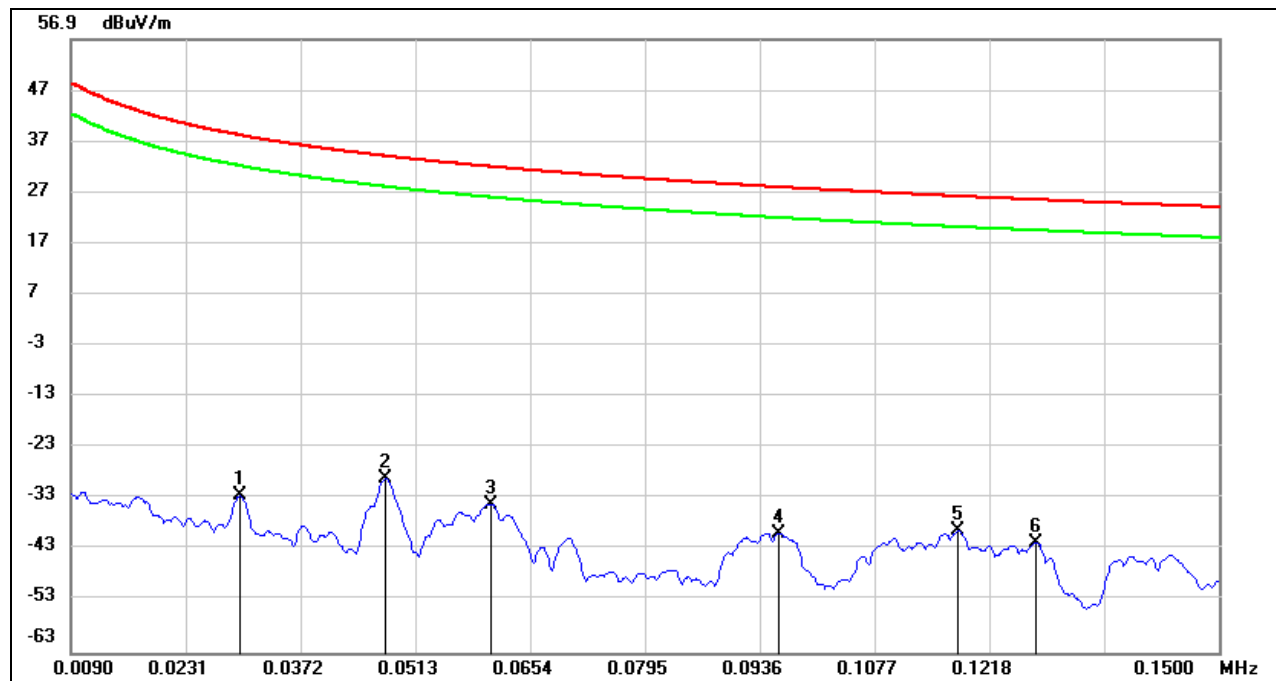


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Result (dBuA/m)	Limit (dBuV/m)	Limit (dBuA/m)	Margin (dB)	Remark
1	0.0297	68.62	-101.11	-32.49	-83.99	38.15	-13.35	-70.64	peak
2	0.0476	72.19	-101.35	-29.16	-80.66	34.05	-17.45	-63.21	peak
3	0.0606	67.16	-101.17	-34.01	-85.51	31.95	-19.55	-65.96	peak
4	0.096	61.49	-101.22	-39.73	-91.23	27.96	-23.54	-67.69	peak
5	0.118	62.2	-101.51	-39.31	-90.81	26.17	-25.33	-65.48	peak
6	0.1276	59.94	-101.62	-41.68	-93.18	25.49	-26.01	-67.17	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

150 kHz ~ 490 kHz

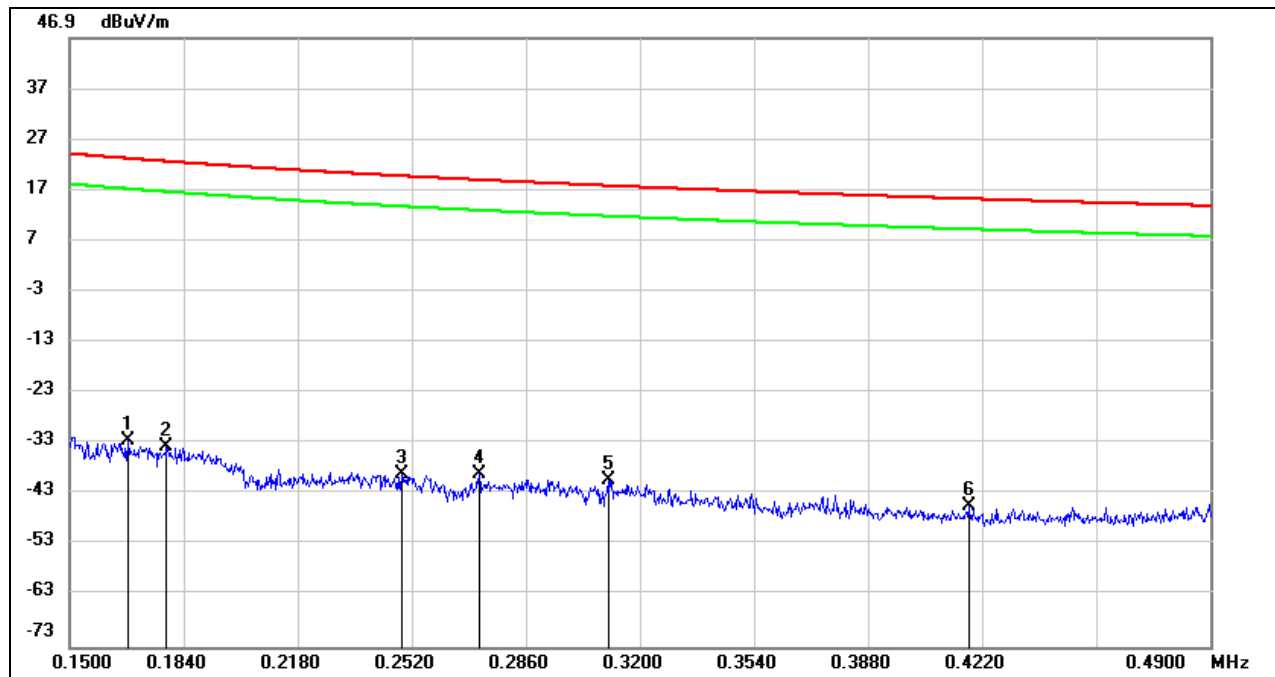


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Result (dBuA/m)	Limit (dBuV/m)	Limit (dBuA/m)	Margin (dB)	Remark
1	0.1672	69.34	-101.87	-32.53	-84.03	23.14	-28.36	-55.67	peak
2	0.1789	68.26	-101.86	-33.6	-85.10	22.55	-28.95	-56.15	peak
3	0.2489	62.6	-101.79	-39.19	-90.69	19.68	-31.82	-58.87	peak
4	0.272	62.63	-101.78	-39.15	-90.65	18.91	-32.59	-58.06	peak
5	0.3105	61.47	-101.78	-40.31	-91.81	17.76	-33.74	-58.07	peak
6	0.4179	56.3	-101.73	-45.43	-96.93	15.18	-36.32	-60.61	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490 kHz ~ 30 MHz

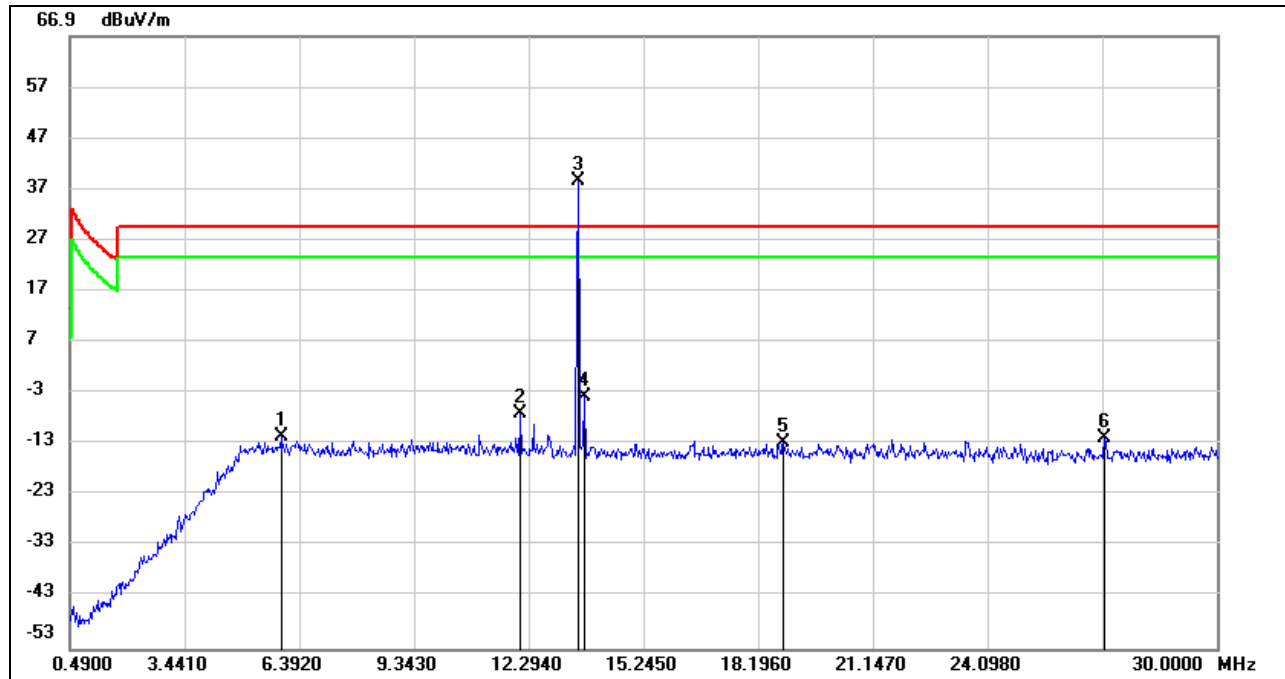

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Result (dBuA/m)	Limit (dBuV/m)	Limit (dBuA/m)	Margin (dB)	Remark
1	5.9198	50.19	-61.79	-11.6	-63.10	29.54	-21.96	-41.14	peak
2	12.0874	54.19	-61.32	-7.13	-58.63	29.54	-21.96	-36.67	peak
3	13.5629	100.09	-61.41	38.68	/	/	/	/	Fundamental
4	13.74	57.82	-61.42	-3.6	-55.10	29.54	-21.96	-33.14	peak
5	18.8452	48.32	-61.18	-12.86	-64.36	29.54	-21.96	-42.40	peak
6	27.108	48.94	-60.84	-11.9	-63.40	29.54	-21.96	-41.44	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

4. About the Fundamental emission test result please refer to section 7.1.



8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS


Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

TEST SETUP AND PROCEDURE

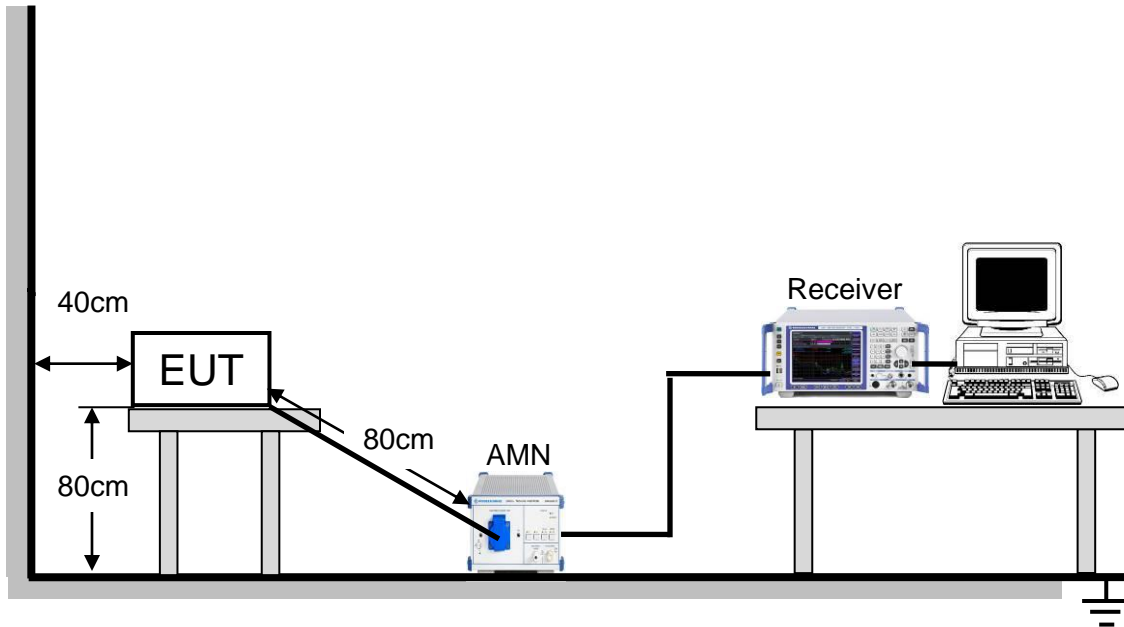

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was placed on the top of a rotating table 0.8 meters above the horizontal ground plane and being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
4. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. LISN at least 80 cm from nearest part of EUT chassis.
6. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.
7. The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	24.0°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V,60Hz

LINE N RESULTS with modified sample (transmitter terminated into a dummy load)

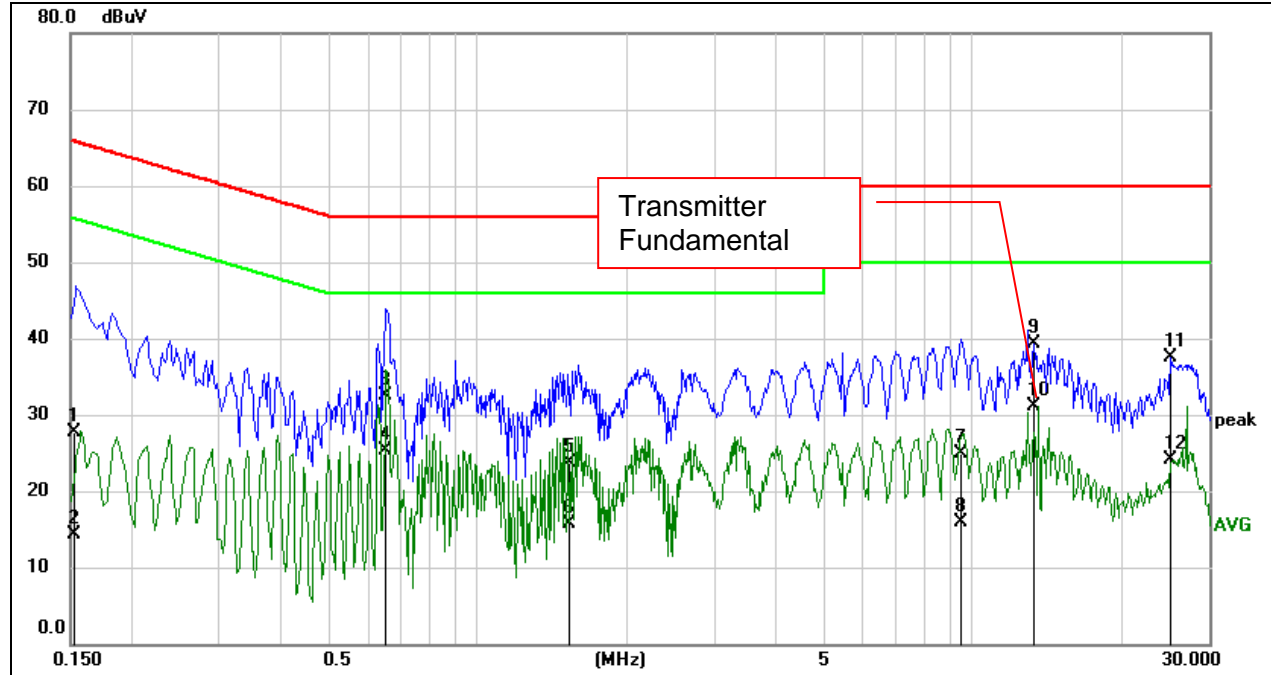


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1521	18.30	9.49	27.79	65.88	-38.09	QP
2	0.1521	4.84	9.49	14.33	55.88	-41.55	AVG
3	0.6535	23.04	9.50	32.54	56.00	-23.46	QP
4	0.6535	15.72	9.50	25.22	46.00	-20.78	AVG
5	1.5307	14.06	9.57	23.63	56.00	-32.37	QP
6	1.5307	6.16	9.57	15.73	46.00	-30.27	AVG
7	9.4877	15.46	9.52	24.98	60.00	-35.02	QP
8	9.4877	6.45	9.52	15.97	50.00	-34.03	AVG
9	13.2979	29.71	9.66	39.37	60.00	-20.63	QP
10	13.2979	21.48	9.66	31.14	50.00	-18.86	AVG
11	25.1060	27.85	9.75	37.60	60.00	-22.40	QP
12	25.1060	14.41	9.75	24.16	50.00	-25.84	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE L RESULTS with modified sample (transmitter terminated into a dummy load)

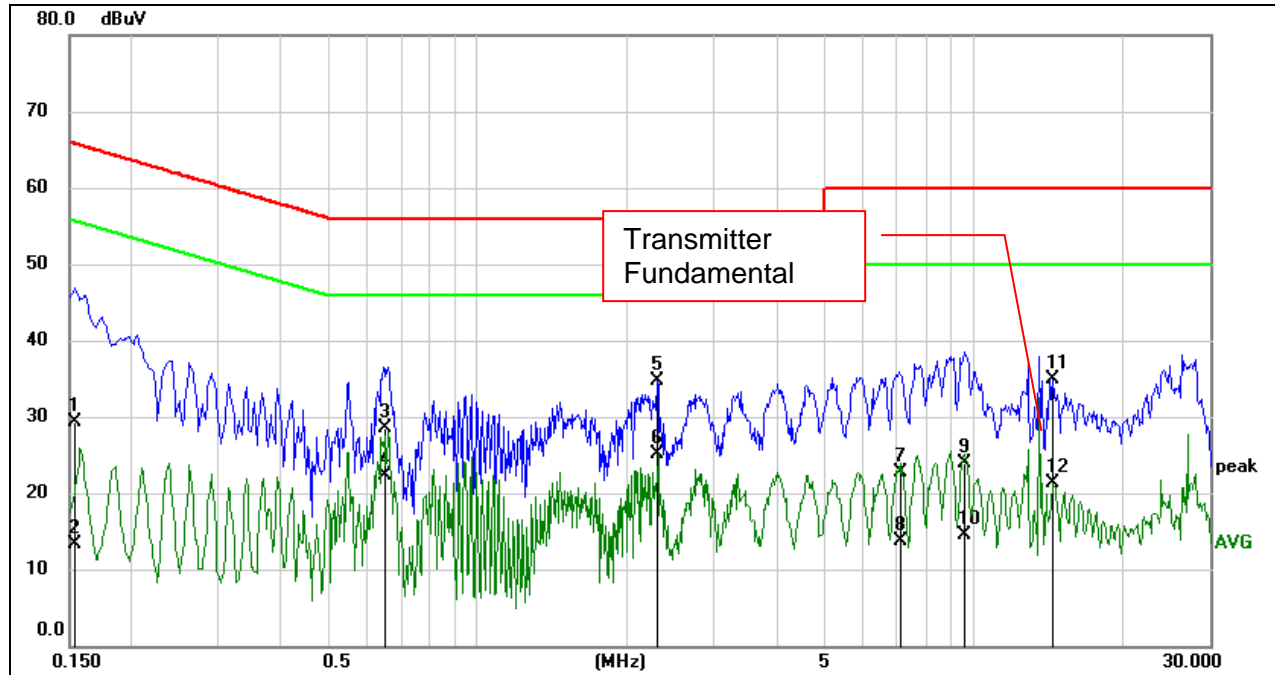


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1530	19.86	9.50	29.36	65.84	-36.48	QP
2	0.1530	3.89	9.50	13.39	55.84	-42.45	AVG
3	0.6530	19.01	9.50	28.51	56.00	-27.49	QP
4	0.6530	12.74	9.50	22.24	46.00	-23.76	AVG
5	2.3060	25.07	9.63	34.70	56.00	-21.30	QP
6	2.3060	15.40	9.63	25.03	46.00	-20.97	AVG
7	7.1588	13.72	9.05	22.77	60.00	-37.23	QP
8	7.1588	4.71	9.05	13.76	50.00	-36.24	AVG
9	9.5701	14.32	9.53	23.85	60.00	-36.15	QP
10	9.5701	4.99	9.53	14.52	50.00	-35.48	AVG
11	14.5059	25.32	9.66	34.98	60.00	-25.02	QP
12	14.5059	11.64	9.66	21.30	50.00	-28.70	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE N RESULTS with unmodified sample (antenna present)

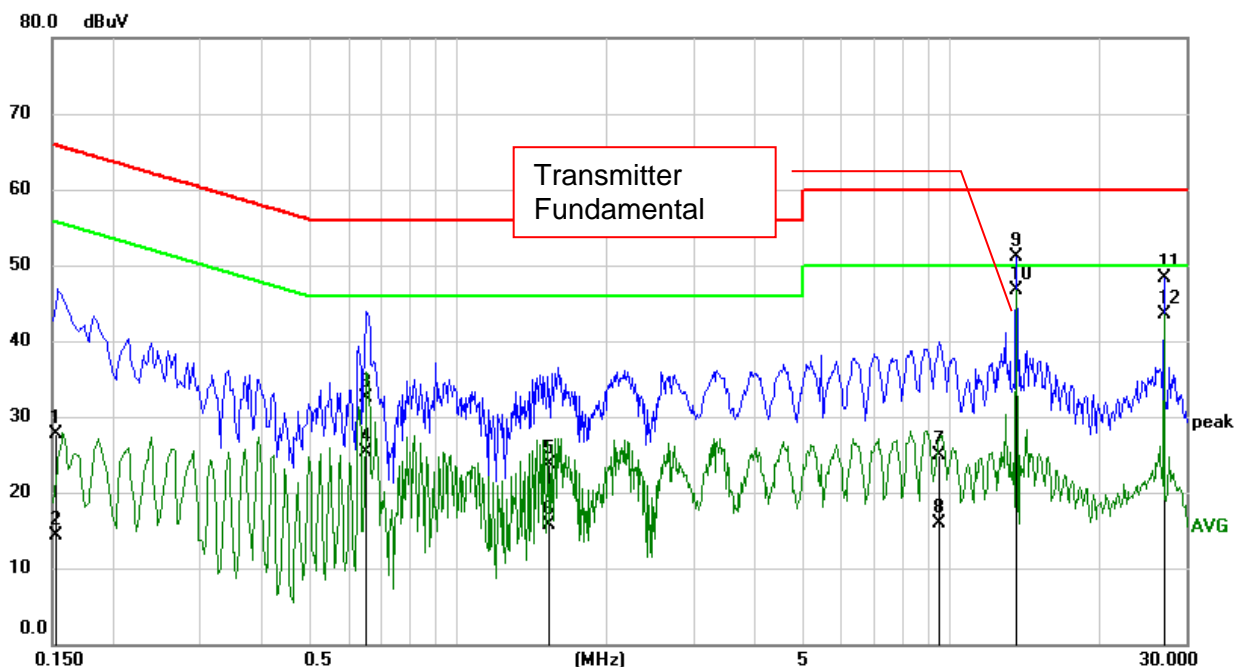


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1521	18.30	9.49	27.79	65.88	-38.09	QP
2	0.1521	4.84	9.49	14.33	55.88	-41.55	AVG
3	0.6535	23.04	9.50	32.54	56.00	-23.46	QP
4	0.6535	15.72	9.50	25.22	46.00	-20.78	AVG
5	1.5307	14.06	9.57	23.63	56.00	-32.37	QP
6	1.5307	6.16	9.57	15.73	46.00	-30.27	AVG
7	9.4877	15.46	9.52	24.98	60.00	-35.02	QP
8	9.4877	6.45	9.52	15.97	50.00	-34.03	AVG
9	13.5618	41.50	9.66	51.16	60.00	-8.84	QP
10	13.5618	36.98	9.66	46.64	50.00	-3.36	AVG
11	27.1219	38.55	9.78	48.33	60.00	-11.67	QP
12	27.1219	33.77	9.78	43.55	50.00	-6.45	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE L RESULTS with unmodified sample (antenna present)

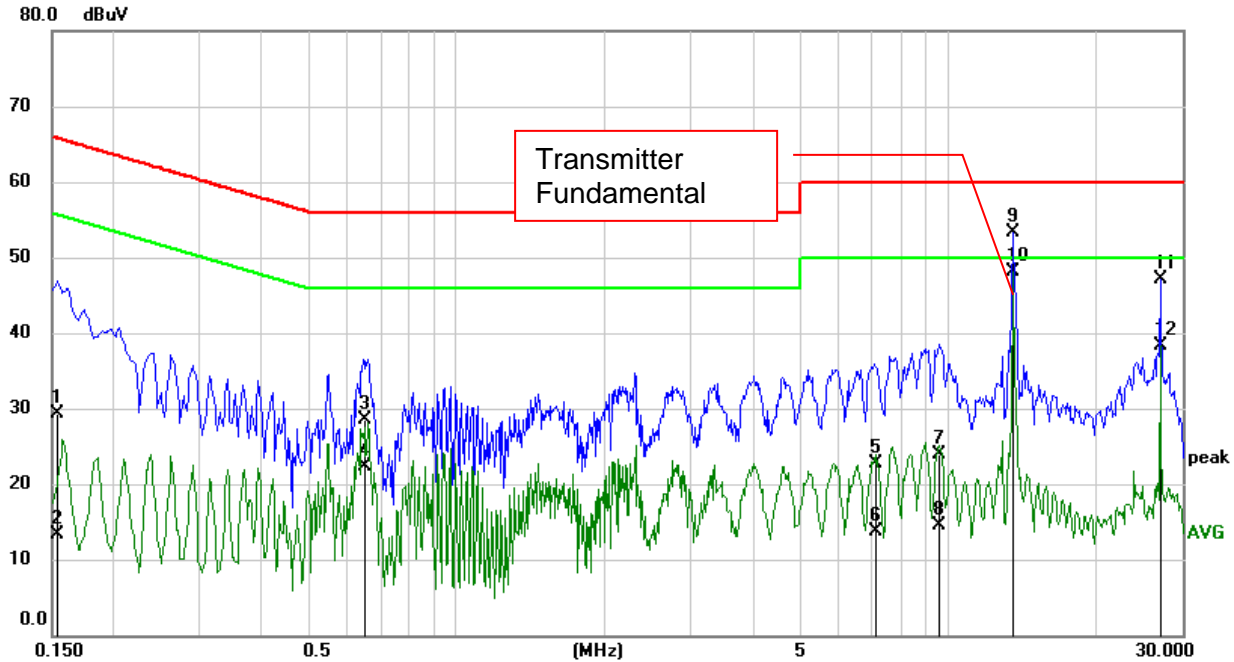

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1530	19.86	9.50	29.36	65.84	-36.48	QP
2	0.1530	3.89	9.50	13.39	55.84	-42.45	AVG
3	0.6530	19.01	9.50	28.51	56.00	-27.49	QP
4	0.6530	12.74	9.50	22.24	46.00	-23.76	AVG
5	7.1588	13.72	9.05	22.77	60.00	-37.23	QP
6	7.1588	4.71	9.05	13.76	50.00	-36.24	AVG
7	9.5701	14.32	9.53	23.85	60.00	-36.15	QP
8	9.5701	4.99	9.53	14.52	50.00	-35.48	AVG
9	13.5618	43.67	9.66	53.33	60.00	-6.67	QP
10	13.5618	38.36	9.66	48.02	50.00	-1.98	AVG
11	27.1219	37.27	9.78	47.05	60.00	-12.95	QP
12	27.1219	28.47	9.78	38.25	50.00	-11.75	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.



9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies

END OF REPORT