

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : Mobile phone

Brand Name : AZUMI

Model Name : VOLTE V2

Family Model : N/A

Report No. : S23030204603001

FCC ID : QRP-FP-014

Prepared for

Azumi S.A

Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza, Piso 16 of. 16-01,
Marbella, Ciudad de Panama, Panama

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R.China.

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name** Azumi S.AAddress..... Avenida Aquilino de la Guardia con Calle 47, PH Ocean Plaza, Piso 16 of.
16-01, Marbella, Ciudad de Panama, Panama**Manufacturer's Name** . AZUMI HK LTDAddress..... FLAT/RM 18 BLK 1 14/F GOLDEN INDUSTRIAL BUILDING 16-26 KWAI TAK
STREET KWAI CHUNG,HK**Product description**

Product name Mobile phone

Brand Name AZUMI

Model and/or type
reference VOLTE V2

Family Model N/A

FCC 47 CFR Part 2(2.1093)

ANSI/IEEE C95.1-1992

Standards IEEE Std 1528-2013

Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.


This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Test Sample Number S230302046001

Date of Test

Date (s) of performance of tests... Mar. 10, 2023 ~ Mar. 23, 2023

Date of Issue May. 09, 2023

Test Result **Pass**Prepared By
(Test Engineer) :

(Jack Li)

Approved By
(Lab Manager) :

(Alex Li)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	May. 09, 2023	Jack Li

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits.....	6
1.2. Statement of Compliance	7
1.3. EUT Description	7
1.4. Test specification(s)	9
1.5. Ambient Condition.....	9
2. SAR Measurement System	10
2.1. SATIMO SAR Measurement Set-up Diagram	10
2.2. Robot	11
2.3. E-Field Probe.....	12
2.3.1. E-Field Probe Calibration	12
2.4. SAM phantoms	13
2.4.1. Technical Data	14
2.5. Device Holder	15
2.6. Test Equipment List	16
3. SAR Measurement Procedures	18
3.1. Power Reference	18
3.2. Area scan & Zoom scan.....	18
3.3. Description of interpolation/extrapolation scheme	20
3.4. Volumetric Scan	20
3.5. Power Drift	20
4. System Verification Procedure	21
4.1. Tissue Verification	21
4.1.1. Tissue Dielectric Parameter Check Results	22
4.2. System Verification Procedure	23
4.2.1. System Verification Results	24
5. SAR Measurement variability and uncertainty	25
5.1. SAR measurement variability.....	25
5.2. SAR measurement uncertainty	25
6. RF Exposure Positions	26
6.1. Ear and handset reference point	26
6.2. Definition of the cheek position	26
6.3. Definition of the tilt position	28
6.4. Body Worn Accessory	28
6.5. Wireless Router Devices	29
7. RF Output Power	30
7.1. GSM Conducted Power	30
7.2. WCDMA Conducted Power	30
7.3. LTE Conducted Power	32

8. Antenna Location.....	40
9. Stand-alone SAR test exclusion.....	40
10. SAR Results	41
10.1. SAR measurement Result.....	41
10.1.1. SAR measurement Result of GSM850.....	41
10.1.2. SAR measurement Result of GSM1900.....	42
10.1.3. SAR measurement Result of WCDMA Band 2.....	43
10.1.4. SAR measurement Result of WCDMA Band 5.....	44
10.1.5. SAR measurement Result of LTE Band 2	44
10.1.6. SAR measurement Result of LTE Band 4	46
10.1.7. SAR measurement Result of LTE Band 7	48
10.2. Simultaneous Transmission Analysis.....	49
11. Appendix A. Photo documentation	50
12. Appendix B. System Check Plots.....	51
13. Appendix C. Plots of High SAR Measurement.....	60
14. Appendix D. Calibration Certificate	89

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE

HEAD AND TRUNK LIMIT

1.6 W/kg

APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for VOLTE V2 are as follows.

RF Exposure Conditions		Equipment Class -Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
1-g Head		0.870	N/A	N/A	N/A
1-g Body (Separation distance of 10mm)		1.030	N/A	N/A	N/A
Max Simultaneous Tx	Head	0.945	N/A	N/A	0.945
	Body	1.067	N/A	N/A	1.067

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information			
Product Name	Mobile phone		
Brand Name	AZUMI		
Model Name	VOLTE V2		
Family Model	N/A		
Model Difference	N/A		
FCC ID	QRP-FP-014		
Device Phase	Identical Prototype		
Exposure Category	General population / Uncontrolled environment		
Antenna Type	PIFA Antenna		
Battery Information	DC 3.7V/1000mAh		
HW Version	AZUMI_VOLTE_V2_HW_V001		
SW Version	AZUMI_VOLTE_V2_CLARO_V001		
Device Operating Configurations			
Supporting Mode(s)	GSM850/1900,WCDMABand2/5,LTEBand2/4/7, Bluetooth		
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), Bluetooth(GFSK, π/4-DQPSK, 8DPSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990

	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 7	2500-2570	2620-2690
	Bluetooth	2402-2480	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control "all 1"(WCDMA Band 2)		
	3, tested with power control "all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 7)		

1.4. Test specification(s)

FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 648474 D04 Handset SAR v01r03

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram



These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter : 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.08 dB
 - Axial isotropy: ± 0.01 dB
 - Hemispherical Isotropy: ± 0.01 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 8mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by Smartphones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm $\pm$ 0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

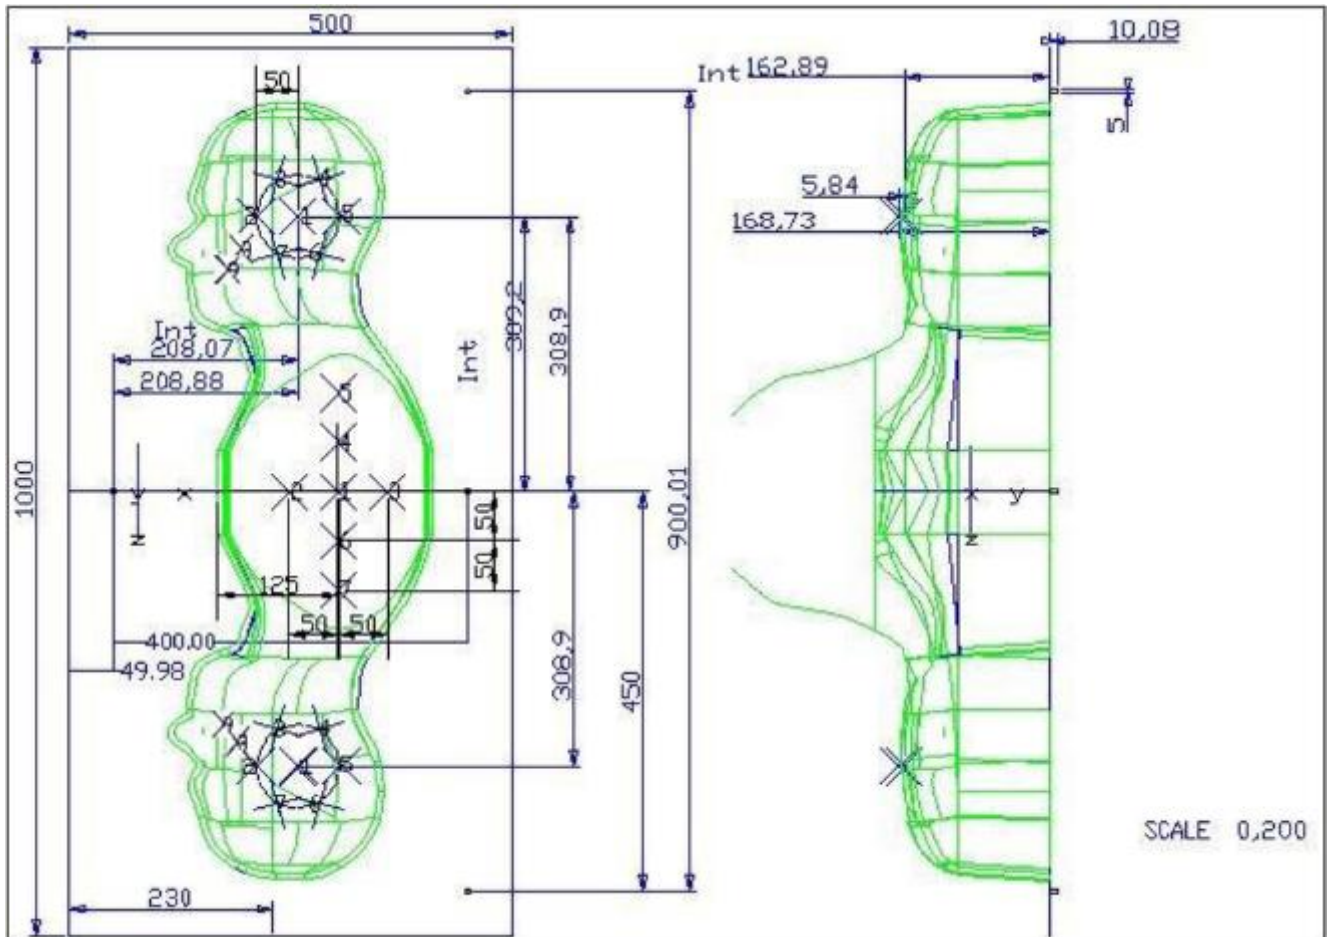


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μ m.

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

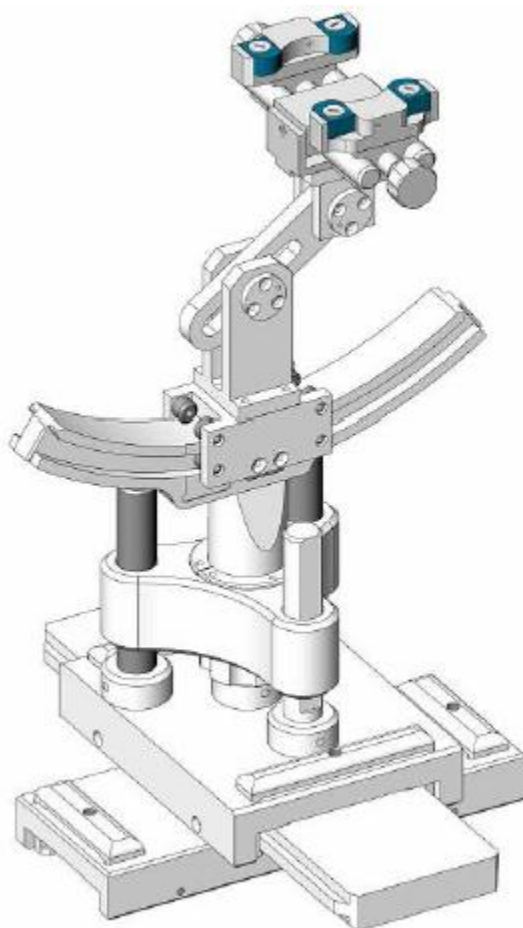

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Jan. 10, 2023	Jan. 09, 2024
☐	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	2300 MHz Dipole	SID2300	SN 03/16 DIP 2G300-358	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Mar. 01, 2021	Feb. 28, 2024
☐	MVG	3500 MHz Dipole	SID3500	SN 09/12 DIP 3G500-360	Oct. 15, 2022	Oct. 14, 2025
☐	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Mar. 01, 2021	Feb. 28, 2024
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
☒	R&S	Universal radio communication tester	CMU200	117858	Jun. 17, 2022	Jun. 16, 2023
☒	R&S	Wideband radio communication tester	CMW500	103917	Jun. 17, 2022	Jun. 16, 2023

☒	HP	Network Analyzer	8753D	3410J01136	Jun. 17, 2022	Jun. 16, 2023
☒	Agilent	MXG Vector Signal Generator	N5182A	MY47070317	Jun. 16, 2022	Jun. 15, 2023
☒	Agilent	Power meter	E4419B	MY45102538	Jun. 17, 2022	Jun. 16, 2023
☒	Agilent	Power sensor	E9301A	MY41495644	Jun. 17, 2022	Jun. 16, 2023
☒	Agilent	Power sensor	E9301A	US39212148	Jun. 17, 2022	Jun. 16, 2023
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 17, 2020	Jul. 16, 2023
☒	N/A	Thermometer	N/A	LES-085	Mar. 27, 2023	Mar. 26, 2026
☒	MVG	SAM Phantom	SSM2	SN 16/15 SAM119	NCR	NCR
☒	MVG	Device Holder	SMPPD	SN 16/15 MSH100	NCR	NCR

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For Wi-Fi/BT power measurement, use engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure Wi-Fi/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT Wi-Fi/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan

above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine these highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists of a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scans to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT installed full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.


4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
	750	835	900	1800	1900	2000	2450	2600	5200	5800
Frequency Band (MHz)										
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

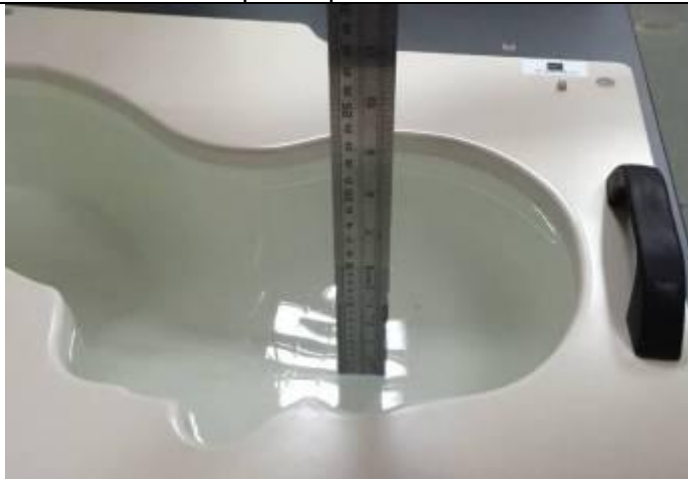Photo of Liquid depth for Head Position	Photo of Liquid depth for Body Position
	

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r (\pm 5\%)$	$\sigma \text{ (S/m)} (\pm 5\%)$	ϵ_r	$\sigma \text{ (S/m)}$		
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	41.29	0.92	21.7 °C	Mar. 14, 2023
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.81	1.37	21.3 °C	Mar. 23, 2023
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.70	1.42	21.4 °C	Mar. 13, 2023
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	38.05	1.98	21.5 °C	Mar. 10, 2023

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

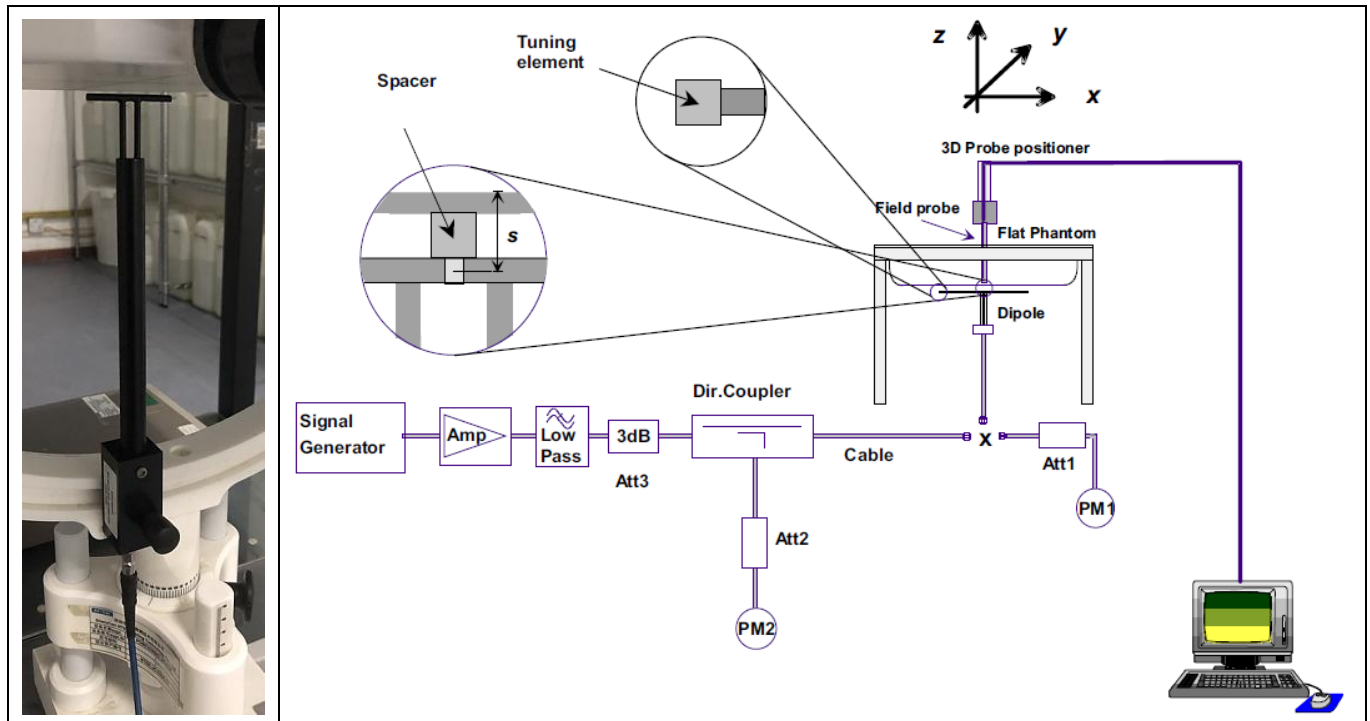

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
835MHz	9.84 (8.86~10.82)	6.22 (5.60~6.84)	10.50 (6.71%)	6.24 (0.32%)	21.7 °C	Mar. 14, 2023
1800MHz	37.96 (34.17~41.75)	19.81 (17.83~21.79)	35.89 (-5.45%)	19.58 (-1.16%)	21.3 °C	Mar. 23, 2023
1900MHz	40.37 (36.34~44.40)	20.48 (18.44~22.52)	40.36 (-0.02%)	22.11 (7.96%)	21.4 °C	Mar. 13, 2023
2600MHz	55.83 (50.25~61.41)	24.19 (21.78~26.60)	58.75 (5.23%)	22.40 (-7.40%)	21.5 °C	Mar. 10, 2023

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.

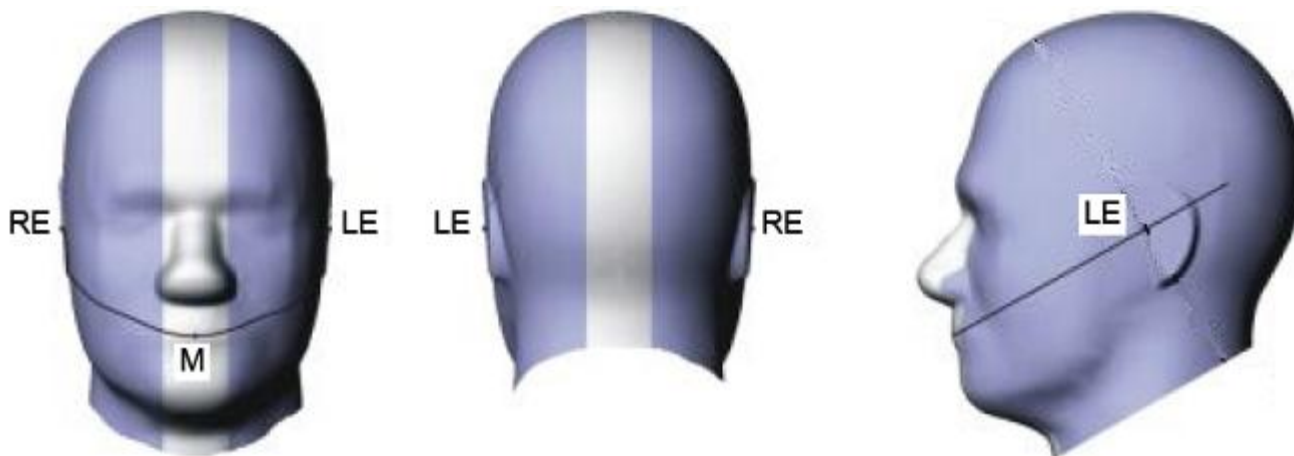


Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

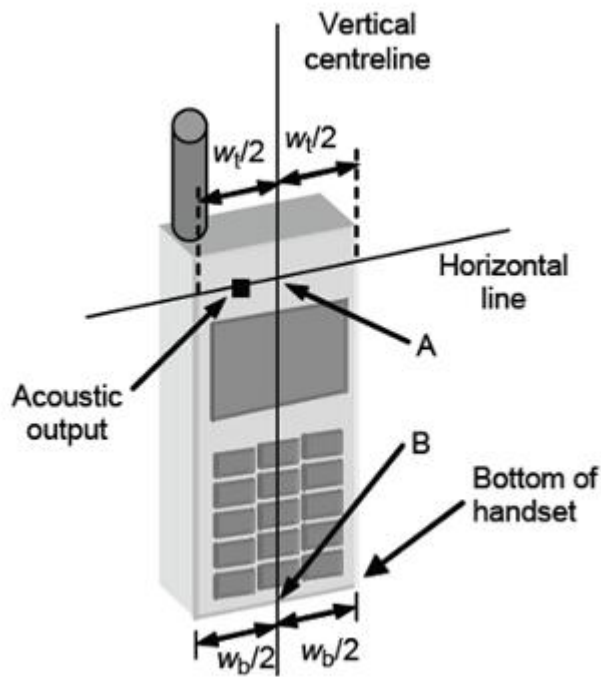


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

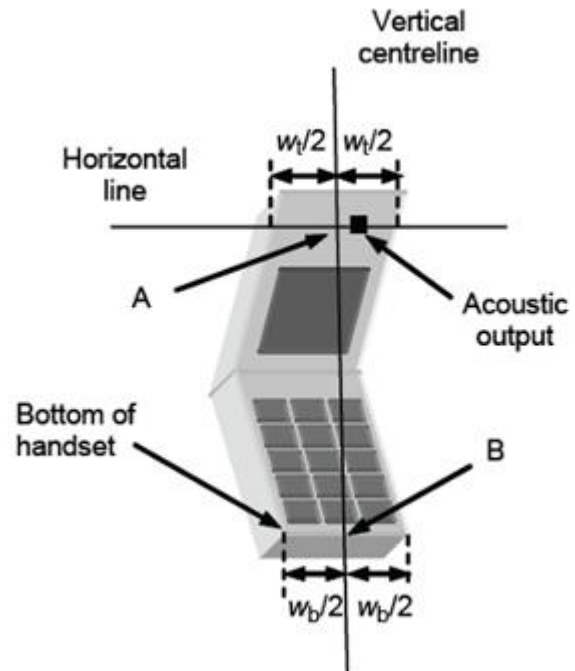


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

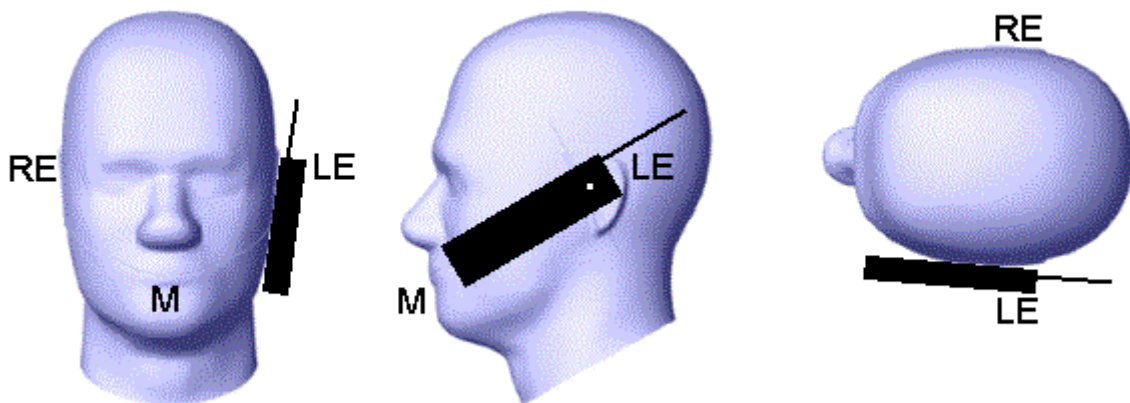


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

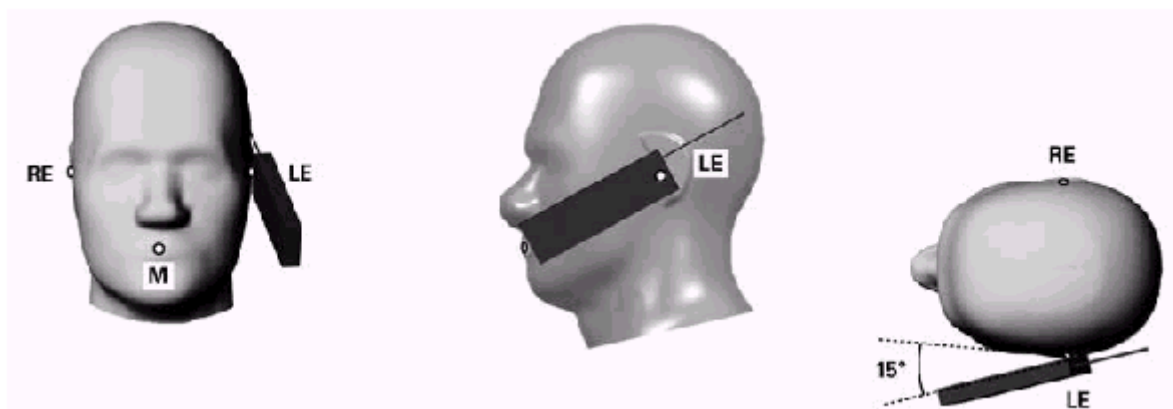


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

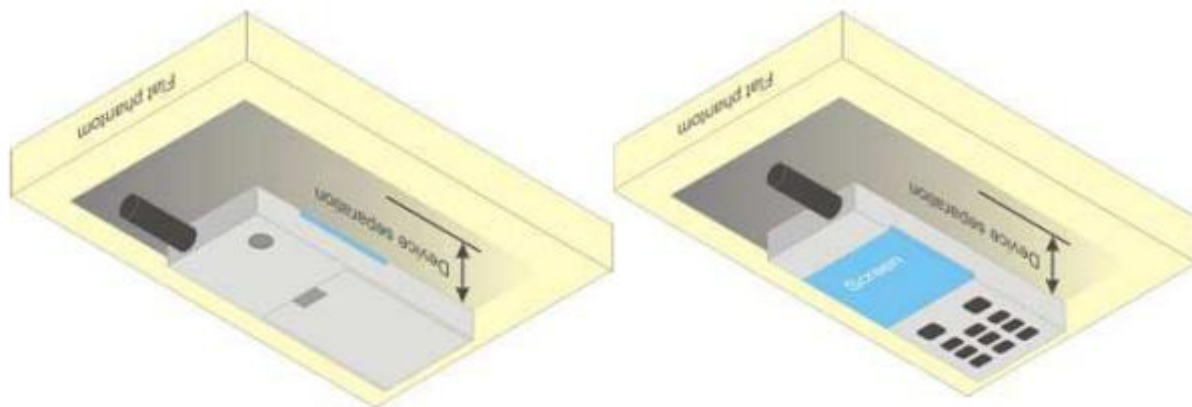


Figure 6.4.1 – Test positions for body-worn devices

6.5. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

7. RF Output Power

7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	32.00	31.84	31.81	31.89	22.97	22.81	22.78	22.86
GPRS(GMSK,1 Tx slot)	31.50	31.16	31.23	31.04	22.47	22.13	22.20	22.01
GPRS(GMSK,2 Tx slot)	29.50	29.07	29.14	28.96	23.48	23.05	23.12	22.94
GPRS(GMSK,3 Tx slot)	27.50	27.11	27.17	27.01	23.24	22.85	22.91	22.75
GPRS(GMSK,4 Tx slot)	25.00	24.76	24.79	24.62	21.99	21.75	21.78	21.61
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880	1909.8	(dBm)	1850.2	1880	1909.8
GSM (GMSK)	29.00	28.31	28.55	28.73	19.97	19.28	19.52	19.70
GPRS(GMSK,1 Tx slot)	30.00	29.98	29.87	29.73	20.97	20.95	20.84	20.70
GPRS(GMSK,2 Tx slot)	28.00	27.61	27.30	27.01	21.98	21.59	21.28	20.99
GPRS(GMSK,3 Tx slot)	26.50	26.02	25.69	25.37	22.24	21.76	21.43	21.11
GPRS(GMSK,4 Tx slot)	24.50	24.05	23.68	23.34	21.49	21.04	20.67	20.33

7.2. WCDMA Conducted Power

WCDMA Band 2	Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC12.2K	21.50	20.62	21.40	21.20
HSDPA Sub 1	21.50	20.79	21.41	21.15
HSDPA Sub 2	21.50	20.70	21.41	21.15
HSDPA Sub 3	21.50	20.66	21.40	21.14
HSDPA Sub 4	21.50	20.63	21.39	21.14
HSUPA Sub 1	21.50	20.55	21.42	21.18
HSUPA Sub 2	21.50	20.53	21.41	21.17
HSUPA Sub 3	21.50	20.52	21.41	21.17
HSUPA Sub 4	21.50	20.52	21.40	21.16
HSUPA Sub 5	21.50	20.51	21.40	21.15
WCDMA Band 5	Burst-Averaged output Power (dBm)			

Tx Channel	Tune-up (dBm)	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC12.2K	22.00	21.61	21.50	21.29
HSDPA Sub 1	22.00	21.80	21.52	21.19
HSDPA Sub 2	21.50	21.44	21.33	21.07
HSDPA Sub 3	21.50	21.06	20.92	20.66
HSDPA Sub 4	21.00	20.92	20.76	20.56
HSUPA Sub 1	22.00	21.67	21.33	21.08
HSUPA Sub 2	22.00	21.73	21.41	21.24
HSUPA Sub 3	21.50	21.40	21.12	20.95
HSUPA Sub 4	22.00	21.55	21.52	21.12
HSUPA Sub 5	21.50	21.48	21.20	20.90

7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	23.00	22.13	22.80	22.43
			1	2	23.00	22.07	22.75	22.35
			1	5	23.00	22.12	22.70	22.32
			3	0	23.00	22.11	22.75	22.33
			3	1	23.00	22.08	22.75	22.30
			3	2	23.00	22.03	22.72	22.25
			6	0	22.00	21.05	21.77	21.36
		16QAM	1	0	22.50	21.33	22.03	21.30
			1	2	22.50	21.29	22.04	21.30
			1	5	22.50	21.22	22.08	21.25
			3	0	22.50	21.31	22.14	21.56
			3	1	22.50	21.29	22.14	21.53
			3	2	22.50	21.24	22.11	21.53
			6	0	21.50	20.32	21.07	20.60
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	23.00	21.98	22.63	21.58
			1	7	23.00	21.86	22.63	22.52
			1	14	23.00	21.67	22.45	22.31
			8	0	22.00	20.90	21.72	21.52
			8	4	22.00	20.89	21.72	21.48
			8	7	22.00	20.76	21.64	21.39
			15	0	22.00	20.85	21.67	21.47
		16QAM	1	0	22.00	21.33	21.95	21.45
			1	7	22.00	21.32	21.96	21.42
			1	14	22.00	21.11	21.78	21.22
			8	0	21.00	19.96	20.76	20.53
			8	4	21.00	19.93	20.77	20.51
			8	7	21.00	19.88	20.69	20.42
			15	0	19.00	18.88	18.71	17.65
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		

			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	23.00	22.14	22.82	22.58
			1	12	23.00	21.81	22.59	22.31
			1	24	23.00	21.76	22.53	22.21
			12	0	22.00	20.83	21.68	21.42
			12	6	22.00	20.77	21.68	21.42
			12	11	22.00	20.66	21.53	21.26
			25	0	22.00	20.70	21.60	21.34
		16QAM	1	0	22.50	21.58	22.20	21.91
			1	12	22.50	21.32	22.10	21.78
			1	24	22.50	21.27	21.93	21.63
			12	0	21.00	19.84	20.72	20.55
			12	6	21.00	19.86	20.74	20.52
			12	11	21.00	19.75	20.53	20.36
			25	0	20.00	19.68	18.55	18.96
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	23.00	21.93	22.69	22.17
			1	24	23.00	21.47	22.44	22.32
			1	49	23.00	21.67	22.09	22.08
			25	0	21.50	20.39	21.42	21.13
			25	12	21.50	20.44	21.45	21.28
			25	24	21.50	20.34	21.16	21.09
			50	0	22.00	20.34	21.92	21.53
		16QAM	1	0	22.00	21.15	21.89	21.00
			1	24	22.00	20.90	21.69	21.26
			1	49	22.00	21.01	21.31	20.96
			25	0	21.00	19.53	20.47	20.18
			25	12	21.00	19.54	20.50	20.33
			25	24	21.00	19.45	20.21	20.15
			50	0	20.00	19.33	19.53	19.44
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band	15MHz	QPSK	1	0	23.00	21.87	22.94	21.85
			1	37	23.00	21.52	22.65	22.48

2				1	74	23.00	22.02	22.02	22.37
				36	0	22.50	20.51	22.39	22.11
				36	18	22.50	20.60	21.58	21.75
				36	37	22.50	20.79	22.32	21.25
				75	0	23.00	21.62	22.84	21.86
			16QAM	1	0	22.50	21.24	22.39	21.04
				1	37	22.50	21.01	22.29	21.68
				1	74	22.50	21.52	21.59	21.58
				36	0	23.00	22.10	22.58	22.19
				36	18	23.00	22.09	22.03	21.69
				36	37	23.00	22.08	22.90	21.47
				75	0	22.00	21.96	21.88	21.74
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900	
LTE Band 2	20MHz	QPSK	1	0	23.00	22.00	22.84	21.80	
			1	49	23.00	21.81	22.84	22.20	
			1	99	23.00	22.46	21.85	22.32	
			50	0	23.00	21.63	21.45	22.09	
			50	24	23.00	21.85	22.14	22.58	
			50	49	23.00	21.10	22.68	21.78	
			100	0	22.50	20.83	22.32	21.70	
		16QAM	1	0	22.50	21.11	22.05	21.08	
			1	49	22.50	21.10	22.14	21.59	
			1	99	22.50	21.78	21.13	21.69	
			50	0	23.00	21.89	22.37	21.36	
			50	24	23.00	22.36	21.69	22.02	
			50	49	23.00	22.07	22.67	21.69	
			100	0	22.00	21.88	21.76	21.55	

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	23.50	22.15	22.60	22.86
			1	2	23.50	23.27	22.55	22.86
			1	5	23.50	23.27	22.49	22.90
			3	0	23.50	23.21	22.54	22.86
			3	1	23.50	23.18	22.53	22.88

				3	2	23.50	23.20	22.48	22.90
				6	0	22.50	22.20	21.51	21.94
				1	0	22.50	22.06	21.75	22.06
				1	2	22.50	22.06	21.72	22.06
				1	5	22.50	22.13	21.70	22.14
				3	0	22.50	22.35	21.73	22.12
				3	1	22.50	22.28	21.72	22.15
				3	2	22.50	22.36	21.68	22.17
				6	0	21.50	21.40	20.71	21.19
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5	
LTE Band 4	3MHz	QPSK	1	0	23.50	23.10	22.43	22.74	
			1	7	23.50	23.20	22.40	22.83	
			1	14	23.50	23.17	22.27	22.85	
			8	0	22.50	22.15	21.43	21.87	
			8	4	22.50	22.22	21.42	21.84	
			8	7	22.50	22.23	21.36	21.88	
			15	0	22.50	22.22	21.39	21.83	
		16QAM	1	0	23.00	22.43	21.65	21.63	
			1	7	23.00	22.56	21.64	21.72	
			1	14	23.00	22.48	21.49	21.72	
			8	0	21.50	21.21	20.41	20.87	
			8	4	21.50	21.25	20.42	20.92	
			8	7	21.50	21.27	20.35	20.96	
			15	0	21.50	21.26	20.37	20.99	
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)			
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5	
LTE Band 4	5MHz	QPSK	1	0	23.50	23.20	22.59	22.59	
			1	12	23.50	23.22	22.36	22.73	
			1	24	23.50	23.34	22.43	22.84	
			12	0	22.50	22.16	21.38	21.67	
			12	6	22.50	22.20	21.37	21.83	
			12	11	22.50	22.25	21.26	21.80	
			25	0	22.50	22.15	21.32	21.78	
		16QAM	1	0	23.00	22.66	21.89	21.93	
			1	12	23.00	22.64	21.71	22.11	

			1	24	23.00	22.80	21.67	22.17
			12	0	21.50	21.17	20.33	20.72
			12	6	21.50	21.24	20.33	20.89
			12	11	21.50	21.28	20.22	20.93
			25	0	21.00	20.54	20.17	20.66
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	23.50	23.12	22.56	22.26
			1	24	23.50	23.16	22.19	22.41
			1	49	23.50	23.14	22.20	22.72
			25	0	22.50	21.95	21.19	21.18
			25	12	22.50	22.07	21.19	21.41
			25	24	22.50	21.97	20.99	21.51
			50	0	22.00	21.94	21.83	21.86
		16QAM	1	0	22.50	22.41	21.73	21.07
			1	24	22.50	22.45	21.37	21.29
			1	49	22.50	22.40	21.31	21.59
			25	0	21.50	21.01	20.18	20.23
			25	12	21.50	21.13	20.18	20.43
			25	24	21.50	21.01	19.98	20.53
			50	0	21.00	20.55	20.45	20.65
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	23.50	23.04	23.17	22.27
			1	37	23.50	23.06	22.70	22.42
			1	74	23.50	22.88	22.56	22.81
			36	0	23.50	22.12	22.81	21.79
			36	18	23.50	22.10	23.08	22.44
			36	37	23.50	21.90	22.79	22.50
			75	0	22.50	21.95	22.48	22.41
		16QAM	1	0	23.50	22.45	23.08	21.80
			1	37	23.50	22.46	22.08	21.98
			1	74	23.50	22.26	21.90	22.31
			36	0	23.50	23.48	22.39	22.00
			36	18	23.50	23.47	22.45	21.58
			36	37	23.50	23.46	23.04	22.41

			75	0	22.50	22.44	22.10	21.59
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	23.50	23.19	23.02	22.49
			1	49	23.50	23.16	22.51	22.42
			1	99	23.50	22.73	22.33	22.84
			50	0	23.50	22.14	22.36	22.41
			50	24	23.50	22.11	22.79	22.28
			50	49	23.50	21.87	23.05	22.47
			100	0	22.50	21.85	22.35	22.40
		16QAM	1	0	22.50	22.25	22.13	21.54
			1	49	22.50	22.35	21.77	21.68
			1	99	22.50	21.91	21.54	22.01
			50	0	23.50	22.35	22.73	21.87
			50	24	23.50	21.88	21.87	22.27
			50	49	23.50	23.06	22.99	21.70
			100	0	22.50	22.36	22.27	22.39

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	22.50	21.97	21.99	21.79
			1	12	22.50	21.91	21.72	21.54
			1	24	22.50	21.99	21.62	21.45
			12	0	21.00	20.87	20.77	20.59
			12	6	21.00	20.98	20.76	20.58
			12	11	21.00	20.95	20.58	20.45
			25	0	21.00	20.94	20.70	20.52
		16QAM	1	0	21.50	21.29	21.32	21.31
			1	12	21.50	21.28	21.06	21.05
			1	24	21.50	21.36	21.03	21.02
			12	0	20.00	19.83	19.90	19.67
			12	6	20.00	19.96	19.85	19.63
			12	11	20.00	19.93	19.72	19.45
			25	0	20.00	19.96	19.71	19.50
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		


			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band 7	10MHz	QPSK	1	0	22.50	21.89	21.99	22.04
			1	24	22.50	21.77	21.58	21.58
			1	49	22.50	21.83	21.36	21.31
			25	0	21.00	20.76	20.65	20.69
			25	12	21.00	20.88	20.56	20.64
			25	24	21.00	20.75	20.31	20.35
			50	0	21.50	20.67	21.37	21.45
		16QAM	1	0	21.50	21.26	21.20	20.92
			1	24	21.50	21.28	20.72	20.51
			1	49	21.50	21.30	20.55	20.22
			25	0	20.00	19.73	19.71	19.75
			25	12	20.00	19.85	19.73	19.62
			25	24	20.00	19.72	19.39	19.35
			50	0	19.00	18.55	17.65	17.88
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band 7	15MHz	QPSK	1	0	22.50	21.88	22.34	22.35
			1	37	22.50	21.78	21.82	22.09
			1	74	22.50	22.30	21.50	21.47
			36	0	22.50	20.86	21.61	22.34
			36	18	22.50	20.95	21.59	21.49
			36	37	22.50	21.01	21.85	22.28
			75	0	23.00	22.89	22.28	22.68
		16QAM	1	0	22.00	21.32	21.51	21.75
			1	37	22.00	21.30	20.96	21.50
			1	74	22.00	21.73	20.70	20.94
			36	0	22.50	22.41	21.55	21.42
			36	18	22.50	22.40	21.54	22.27
			36	37	22.50	22.39	21.78	21.49
			75	0	21.50	21.47	21.31	21.27
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band	20MHz	QPSK	1	0	22.50	20.81	22.40	21.80
			1	49	22.50	21.86	21.75	22.19

7			1	99	22.50	22.43	21.46	21.40
			50	0	22.50	20.83	22.24	21.87
			50	24	22.50	20.88	21.48	22.36
			50	49	22.50	21.22	22.37	21.76
			100	0	22.50	20.74	22.27	22.41
		16QAM	1	0	22.00	21.18	21.64	20.95
			1	49	22.00	21.26	21.06	21.47
			1	99	22.00	21.80	20.70	20.70
			50	0	22.50	21.93	22.36	22.36
			50	24	22.50	22.03	22.33	21.78
			50	49	22.50	21.97	21.61	21.69
			100	0	20.00	19.66	19.54	18.77

BR+EDR	Output Power (dBm)				
	Data Rates	Tune-up (dBm)	Channel		
			0CH	39CH	78CH
	1M	2.5	2.33	2.40	2.10
	2M	2.5	1.25	1.08	2.23
	3M	2.5	0.95	2.20	2.07

NOTE: Power measurement results of Bluetooth.

8. Antenna Location

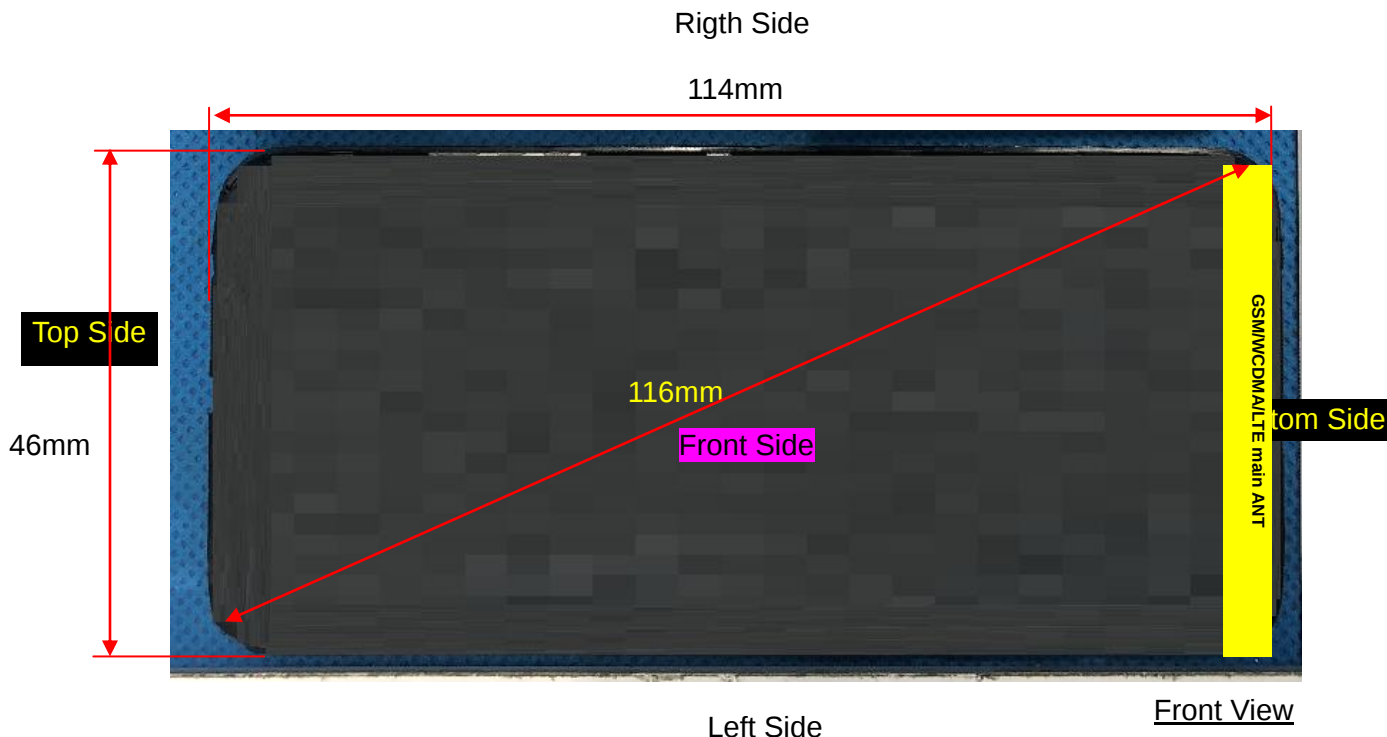

Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main ANT	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main ANT	Yes	Yes	Yes	Yes	NO	Yes

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{(GHz)}}}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{\text{(GHz)}}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P _{max} (dBm)	P _{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	2.50	1.78	5	2.480	0.56	3	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] * [\sqrt{f_{\text{(GHz)}}/x}] \text{ W/kg}$$
 for test separation distances $\leq 50\text{mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is $< 5 \text{ mm}$, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	2.50	1.78	5	2.48	7.5	0.075
Bluetooth	Body	2.50	1.78	10	2.48	7.5	0.037

NOTE: Estimated SAR calculation for Bluetooth

10. SAR Results

10.1. SAR measurement Result

10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	189/836.4	GPRS(GMSK 2TS)	0.167	0.118	1.69	29.14	29.50	0.181	2023/3/14	1#
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.097	0.066	1.41	29.14	29.50	0.105	2023/3/14	
Right Cheek	189/836.4	GPRS(GMSK 2TS)	0.151	0.103	-0.98	29.14	29.50	0.164	2023/3/14	
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.074	0.052	-0.70	29.14	29.50	0.080	2023/3/14	

NOTE: Head SAR test results of GSM850.

Test Position	Test channel	Mode	SAR Value (W/kg)	Power Drift(%)	Conducted Power	Tune-up Power	Scaled SAR	Date	Plot
---------------	--------------	------	------------------	----------------	-----------------	---------------	------------	------	------

of Body with 10mm	/Freq.		1-g	10-g		(dBm)	(dBm)	1-g (W/Kg)		
Front Side	189/836.4	GPRS(GMSK 2TS)	0.180	0.131	1.76	29.14	29.50	0.196	2023/3/14	
Back Side	189/836.4	GPRS(GMSK 2TS)	0.279	0.211	4.55	29.14	29.50	0.303	2023/3/14	2#
Left Side	189/836.4	GPRS(GMSK 2TS)	0.087	0.063	2.23	29.14	29.50	0.095	2023/3/14	
Right Side	189/836.4	GPRS(GMSK 2TS)	0.096	0.073	-0.91	29.14	29.50	0.104	2023/3/14	
Bottom Side	189/836.4	GPRS(GMSK 2TS)	0.145	0.107	2.87	29.14	29.50	0.158	2023/3/14	

NOTE: Body SAR test results of GSM850

10.1.2. SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	661/1880	GPRS(GMSK 3TS)	0.478	0.270	-1.82	25.69	26.50	0.576	2023/3/13	3#
Left Tilt 15 Degree	661/1880	GPRS(GMSK 3TS)	0.250	0.136	-1.72	25.69	26.50	0.301	2023/3/13	
Right Cheek	661/1880	GPRS(GMSK 3TS)	0.444	0.246	-3.76	25.69	26.50	0.535	2023/3/13	
Right Tilt 15 Degree	661/1880	GPRS(GMSK 3TS)	0.210	0.119	2.27	25.69	26.50	0.253	2023/3/13	

NOTE: Head SAR test results of GSM1900

Test Position of Body with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	661/1880	GPRS(GMSK 3TS)	0.438	0.218	-0.96	25.69	26.50	0.528	2023/3/13	
Back Side	661/1880	GPRS(GMSK 3TS)	0.716	0.372	3.01	25.69	26.50	0.863	2023/3/13	4#

Left Side	661/1880	GPRS(GMSK 3TS)	0.228	0.114	1.20	25.69	26.50	0.275	2023/3/13	
Right Side	661/1880	GPRS(GMSK 3TS)	0.219	0.112	1.72	25.69	26.50	0.264	2023/3/13	
Bottom Side	661/1880	GPRS(GMSK 3TS)	0.380	0.195	-3.89	25.69	26.50	0.458	2023/3/13	

NOTE: Body SAR test results of GSM1900

10.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Head	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	9400/1880	RMC12.2K	0.385	0.224	-2.43	21.40	21.50	0.394	2023/3/13	5#
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.210	0.120	-0.51	21.40	21.50	0.215	2023/3/13	
Right Cheek	9400/1880	RMC12.2K	0.330	0.182	0.83	21.40	21.50	0.338	2023/3/13	
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.173	0.099	3.97	21.40	21.50	0.177	2023/3/13	

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	9400/1880	RMC12.2K	0.360	0.193	-1.94	21.40	21.50	0.368	2023/3/13	
Back Side	9400/1880	RMC12.2K	0.554	0.300	-0.87	21.40	21.50	0.567	2023/3/13	6#
Left Side	9400/1880	RMC12.2K	0.180	0.095	2.37	21.40	21.50	0.184	2023/3/13	
Right Side	9400/1880	RMC12.2K	0.174	0.090	-3.81	21.40	21.50	0.178	2023/3/13	
Bottom Side	9400/1880	RMC12.2K	0.295	0.160	0.29	21.40	21.50	0.302	2023/3/13	

NOTE: Body SAR test results of WCDMA Band 2

10.1.4. SAR measurement Result of WCDMA Band 5

Test Position of Head	Test channel /Freq	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Left Cheek	4182/836.4	RMC12.2K	0.775	0.517	-0.71	21.50	22.00	0.870	2023/3/14	7#
Left Tilt 15 Degree	4182/836.4	RMC12.2K	0.420	0.280	-0.66	21.50	22.00	0.471	2023/3/14	
Right Cheek	4182/836.4	RMC12.2K	0.728	0.481	0.16	21.50	22.00	0.817	2023/3/14	
Right Tilt 15 Degree	4182/836.4	RMC12.2K	0.370	0.234	-1.61	21.50	22.00	0.415	2023/3/14	
Left Cheek	4132/826.4	RMC12.2K	0.680	0.435	-2.14	21.50	22.00	0.763	1900/1/0	
Left Cheek	4233/846.6	RMC12.2K	0.703	0.450	3.15	21.50	22.00	0.789	1900/1/0	
Left Cheek Repeated	4182/836.4	RMC12.2K	0.770	0.510	2.55	21.50	22.00	0.864	1900/1/0	

NOTE: Head SAR test results of WCDMA Band 5

Test Position of Body with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
Front Side	4182/836.4	RMC12.2K	0.342	0.227	-2.16	21.50	22.00	0.384	2023/3/14	
Back Side	4182/836.4	RMC12.2K	0.570	0.390	1.00	21.50	22.00	0.640	2023/3/14	8#
Left Side	4182/836.4	RMC12.2K	0.180	0.122	-2.71	21.50	22.00	0.202	2023/3/14	
Right Side	4182/836.4	RMC12.2K	0.171	0.117	-2.11	21.50	22.00	0.192	2023/3/14	
Bottom Side	4182/836.4	RMC12.2K	0.285	0.185	-0.34	21.50	22.00	0.320	2023/3/14	

NOTE: Body SAR test results of WCDMA Band 5

10.1.5. SAR measurement Result of LTE Band 2

Test Position	Test channel	Mode	SAR Value (W/kg)	Power Drift(%)	Conducted Power	Tune-up Power	Scaled SAR	Date	Plot
------------------	-----------------	------	---------------------	-------------------	--------------------	------------------	---------------	------	------

of Head	/Freq.		1-g	10-g		(dBm)	(dBm)	1-g (W/Kg)		
1RB										
Left Cheek	18900/1880	20M QPSK(1,49)	0.821	0.482	-0.57	22.84	23.00	0.852	2023/3/13	9#
Left Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.487	0.280	-2.25	22.84	23.00	0.505	2023/3/13	
Right Cheek	18900/1880	20M QPSK(1,49)	0.747	0.417	-1.47	22.84	23.00	0.775	2023/3/13	
Right Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.402	0.231	2.15	22.84	23.00	0.417	2023/3/13	
Left Cheek	18700/1860	20M QPSK(1,49)	0.500	0.286	-0.75	21.81	23.00	0.658	2023/3/13	
Left Cheek	19100/1900	20M QPSK(1,49)	0.122	0.070	-1.11	22.20	23.00	0.147	2023/3/13	
Left Cheek Repeated	18900/1880	20M QPSK(1,49)	0.820	0.480	1.57	22.84	23.00	0.851	1900/1/0	
50%RB										
Left Cheek	18900/1880	20M QPSK(50,49)	0.487	0.282	0.40	22.68	23.00	0.524	2023/3/13	
Left Tilt 15 Degree	18900/1880	20M QPSK(50,49)	0.258	0.156	-1.38	22.68	23.00	0.278	2023/3/13	
Right Cheek	18900/1880	20M QPSK(50,49)	0.420	0.237	3.57	22.68	23.00	0.452	2023/3/13	
Right Tilt 15 Degree	18900/1880	20M QPSK(50,49)	0.210	0.132	-0.10	22.68	23.00	0.226	2023/3/13	
100%RB										
Left Cheek	18900/1880	20M QPSK(100,0)	0.439	0.276	-4.16	22.32	22.50	0.458	2023/3/13	

NOTE: Head SAR test results of LTE Band 2

Test Position of Body with	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						

NOTE: Body SAR test results of LTE Band 2

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted	Tune-up	Scaled	Date	Plot
			1-g	10-g		Power (dBm)	Power (dBm)	SAR 1-g		

								(W/Kg)		
1RB										
Left Cheek	20175/1732.5	20M QPSK(1,0)	0.043	0.026	-2.97	23.02	23.50	0.048	2023/3/23	11#
Left Tilt 15 Degree	20175/1732.5	20M QPSK(1,0)	0.024	0.015	-1.34	23.02	23.50	0.027	2023/3/23	
Right Cheek	20175/1732.5	20M QPSK(1,0)	0.037	0.022	-3.00	23.02	23.50	0.041	2023/3/23	
Right Tilt 15 Degree	20175/1732.5	20M QPSK(1,0)	0.020	0.018	3.19	23.02	23.50	0.022	2023/3/23	
50%RB										
Left Cheek	20175/1732.5	20M QPSK(50,49)	0.022	0.015	-2.99	23.05	23.50	0.024	2023/3/23	
Left Tilt 15 Degree	20175/1732.5	20M QPSK(50,49)	0.014	0.009	3.36	23.05	23.50	0.016	2023/3/23	
Right Cheek	20175/1732.5	20M QPSK(50,49)	0.021	0.012	0.43	23.05	23.50	0.023	2023/3/23	
Right Tilt 15 Degree	20175/1732.5	20M QPSK(50,49)	0.011	0.011	1.53	23.05	23.50	0.012	2023/3/23	

NOTE: Head SAR test results of LTE Band 4

Test Position of Body with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	20175/1732.5	20M QPSK(1,0)	0.114	0.054	-3.51	23.02	23.50	0.127	2023/3/23	
Back Side	20175/1732.5	20M QPSK(1,0)	0.140	0.068	-3.54	23.02	23.50	0.156	2023/3/23	12#
Left Side	20175/1732.5	20M QPSK(1,0)	0.054	0.026	-1.87	23.02	23.50	0.060	2023/3/23	
Right Side	20175/1732.5	20M QPSK(1,0)	0.057	0.027	3.59	23.02	23.50	0.064	2023/3/23	

Bottom Side	20175/1732.5	20M QPSK(1,0)	0.090	0.043	-0.15	23.02	23.50	0.101	2023/3/23	
50%RB										
Front Side	20175/1732.5	20M QPSK(50,49)	0.065	0.031	-0.20	23.05	23.50	0.072	2023/3/23	
Back Side	20175/1732.5	20M QPSK(50,49)	0.080	0.040	1.04	23.05	23.50	0.089	2023/3/23	
Left Side	20175/1732.5	20M QPSK(50,49)	0.028	0.015	-4.56	23.05	23.50	0.031	2023/3/23	
Right Side	20175/1732.5	20M QPSK(50,49)	0.029	0.016	2.82	23.05	23.50	0.032	2023/3/23	
Bottom Side	20175/1732.5	20M QPSK(50,49)	0.048	0.024	-3.71	23.05	23.50	0.053	2023/3/23	

NOTE: Body SAR test results of LTE Band 4

10.1.7. SAR measurement Result of LTE Band 7

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	21100/2535	20M QPSK(1,99)	0.204	0.094	-1.14	21.46	22.50	0.259	2023/3/10	13#
Left Tilt 15 Degree	21100/2535	20M QPSK(1,99)	0.107	0.047	2.39	21.46	22.50	0.136	2023/3/10	
Right Cheek	21100/2535	20M QPSK(1,99)	0.189	0.084	-3.23	21.46	22.50	0.240	2023/3/10	
Right Tilt 15 Degree	21100/2535	20M QPSK(1,99)	0.100	0.044	2.31	21.46	22.50	0.127	2023/3/10	
50%RB										
Left Cheek	21100/2535	20M QPSK(50,49)	0.109	0.047	0.46	22.37	22.50	0.112	2023/3/10	
Left Tilt 15 Degree	21100/2535	20M QPSK(50,49)	0.059	0.024	4.09	22.37	22.50	0.061	2023/3/10	
Right Cheek	21100/2535	20M QPSK(50,49)	0.107	0.045	1.90	22.37	22.50	0.110	2023/3/10	

Right Tilt 15 Degree	21100/2535	20M QPSK(50,49)	0.056	0.024	-2.01	22.37	22.50	0.058	2023/3/10	
----------------------------	------------	--------------------	-------	-------	-------	-------	-------	-------	-----------	--

NOTE: Head SAR test results of LTE Band 7

Test Position of Body with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	21100/2535	20M QPSK(1,99)	0.216	0.088	0.68	21.46	22.50	0.274	2023/3/10	
Back Side	21100/2535	20M QPSK(1,99)	0.351	0.149	-1.34	21.46	22.50	0.446	2023/3/10	14#
Left Side	21100/2535	20M QPSK(1,99)	0.108	0.044	-3.44	21.46	22.50	0.137	2023/3/10	
Right Side	21100/2535	20M QPSK(1,99)	0.117	0.048	0.78	21.46	22.50	0.149	2023/3/10	
Bottom Side	21100/2535	20M QPSK(1,99)	0.195	0.083	3.87	21.46	22.50	0.248	2023/3/10	
50%RB										
Front Side	21100/2535	20M QPSK(50,49)	0.128	0.051	-4.71	22.37	22.50	0.132	2023/3/10	
Back Side	21100/2535	20M QPSK(50,49)	0.198	0.087	-3.01	22.37	22.50	0.204	2023/3/10	
Left Side	21100/2535	20M QPSK(50,49)	0.062	0.023	-3.22	22.37	22.50	0.064	2023/3/10	
Right Side	21100/2535	20M QPSK(50,49)	0.061	0.028	-4.35	22.37	22.50	0.063	2023/3/10	
Bottom Side	21100/2535	20M QPSK(50,49)	0.107	0.045	-0.63	22.37	22.50	0.110	2023/3/10	

NOTE: Body SAR test results of LTE Band 7

10.2. Simultaneous Transmission Analysis

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- Scalar SAR summation < 1.6W/kg.
- $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is

determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DSS			
Head	Left Cheek	0.870	0.075	0.945	N/A	N/A
	Left Tilt 15 Degree	0.505	0.075	0.580	N/A	N/A
	Right Cheek	0.817	0.075	0.892	N/A	N/A
	Right Tilt 15 Degree	0.417	0.075	0.492	N/A	N/A
Body	Front Side	0.623	0.037	0.660	N/A	N/A
	Back Side	1.030	0.037	1.067	N/A	N/A
	Left Side	0.311	0.037	0.348	N/A	N/A
	Right Side	0.321	0.037	0.358	N/A	N/A
	Top Side	N/A	0.037	0.037	N/A	N/A
	Bottom Side	0.519	0.037	0.556	N/A	N/A

11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 835MHz
MEASUREMENT 2 System Performance Check - 1800MHz
MEASUREMENT 3 System Performance Check - 1900MHz
MEASUREMENT 4 System Performance Check - 2450MHz

MEASUREMENT 1


Date of measurement: 14/3/2023

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW835</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>1.50</u>

B. SAR Measurement Results



Frequency (MHz)	835.000000
Relative permittivity (real part)	41.293576
Relative permittivity (imaginary part)	19.919841
Conductivity (S/m)	0.924059
Variation (%)	1.970000

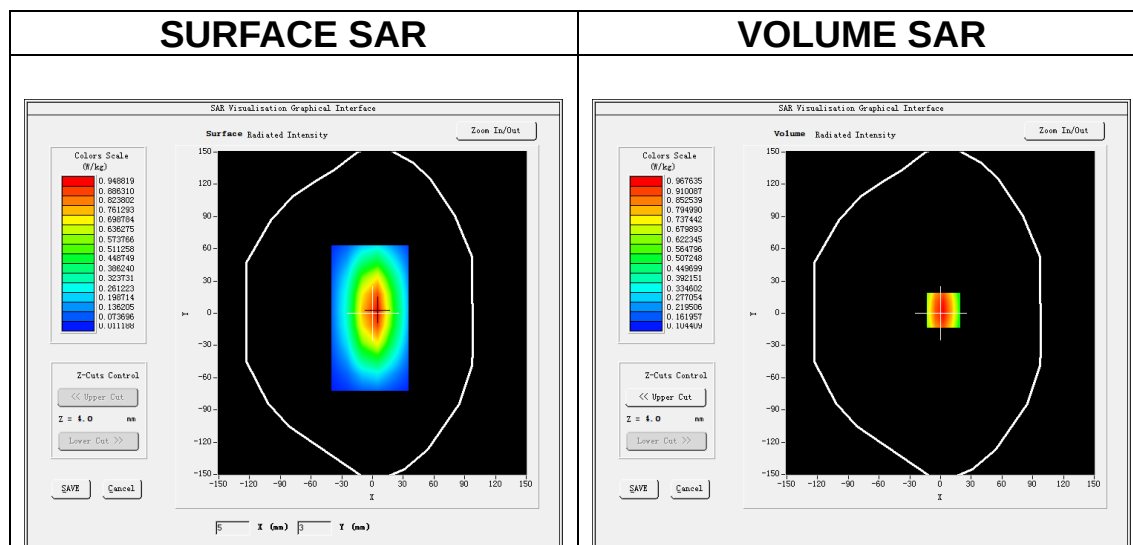

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.624191
SAR 1g (W/Kg)	1.050231

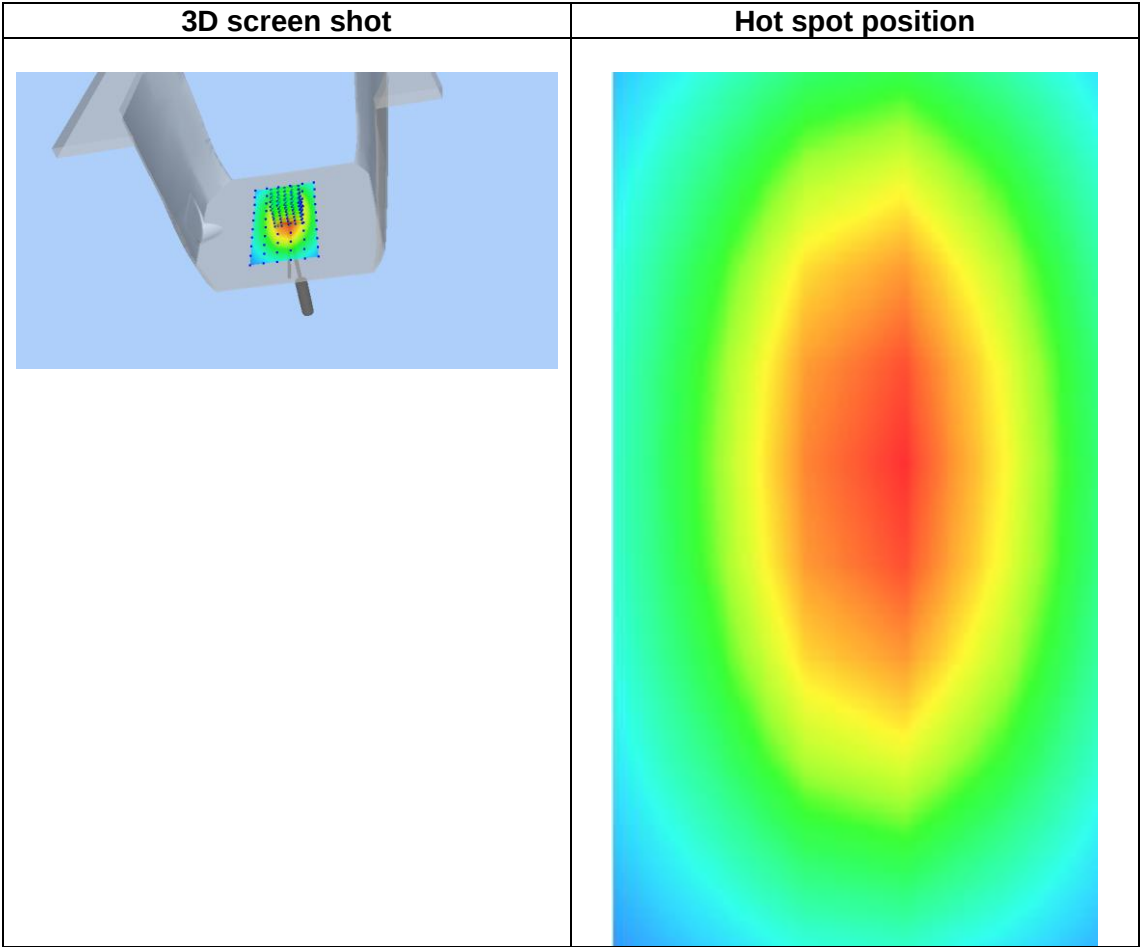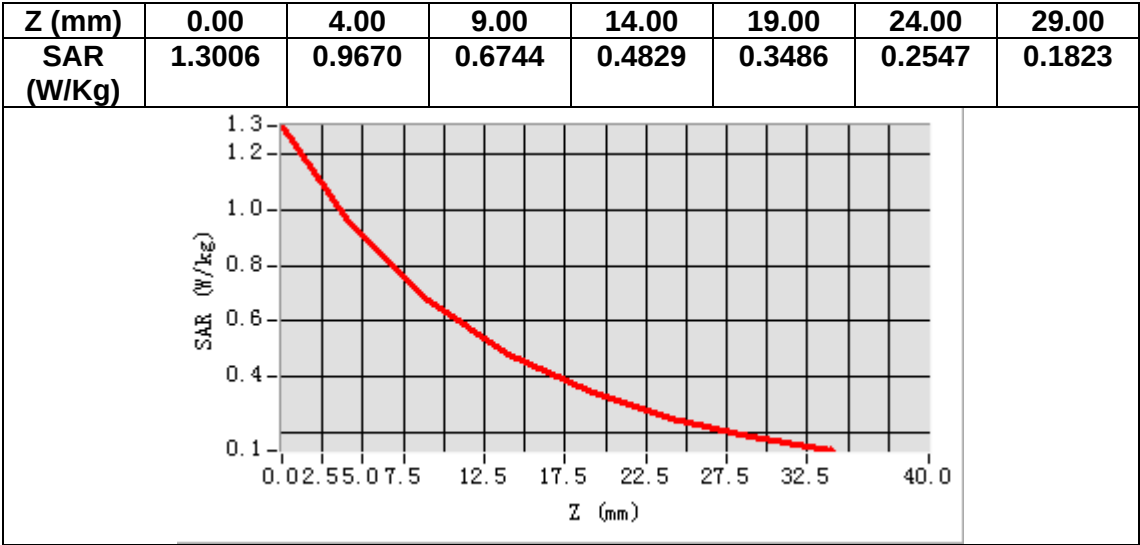

MEASUREMENT 2


Date of measurement: 23/3/2023

A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1800</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>1.73</u>

B. SAR Measurement Results



Frequency (MHz)	1800.000000
Relative permittivity (real part)	38.814605
Relative permittivity (imaginary part)	13.698720
Conductivity (S/m)	1.369872
Variation (%)	-2.520000

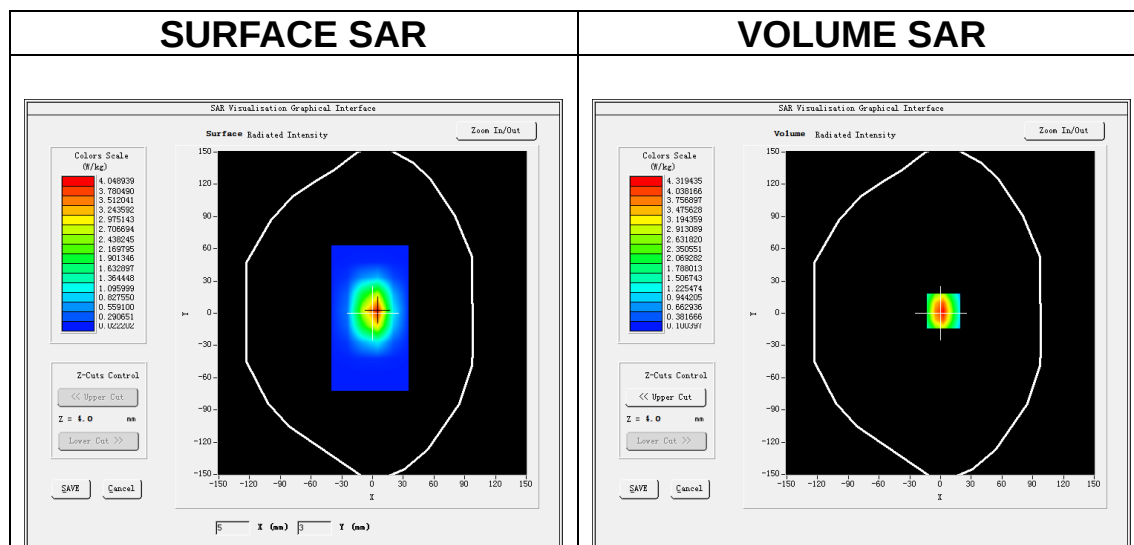

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	1.958296
SAR 1g (W/Kg)	3.589160

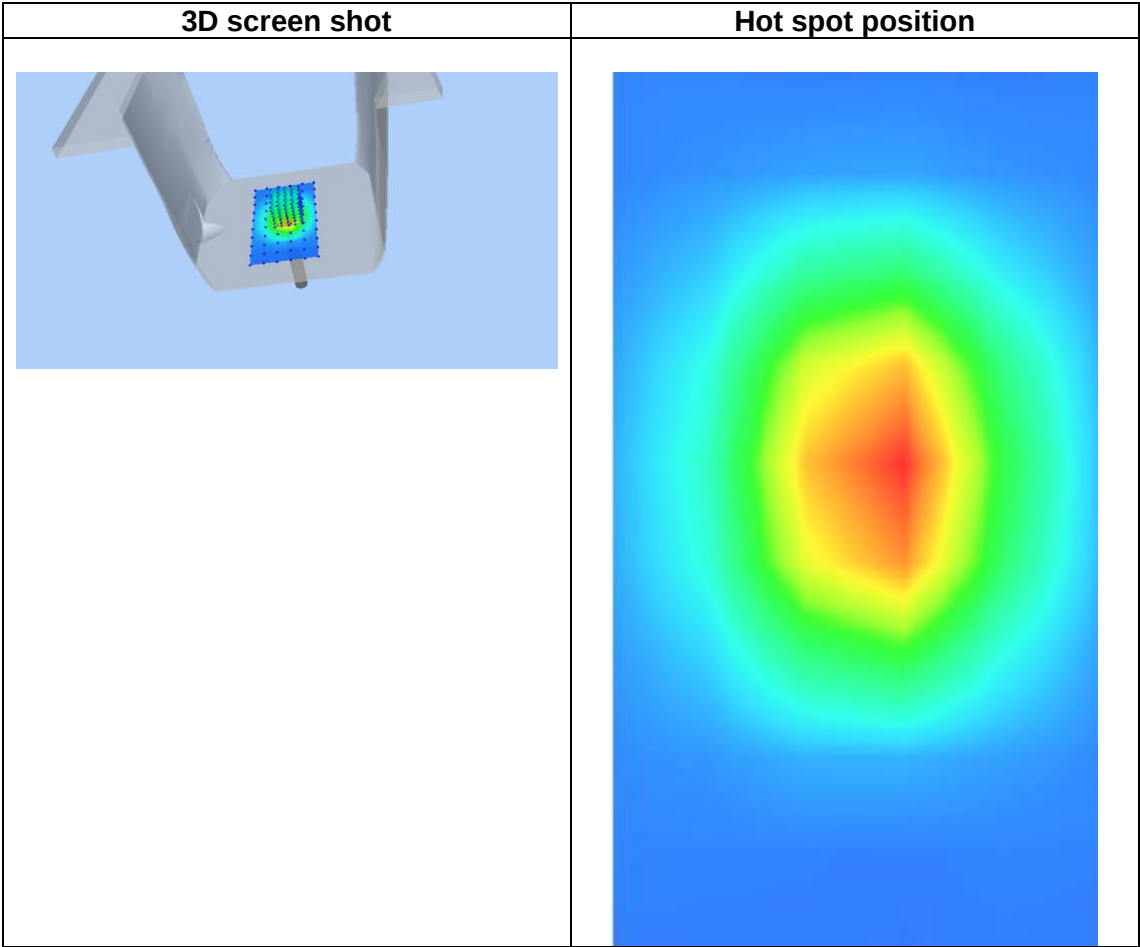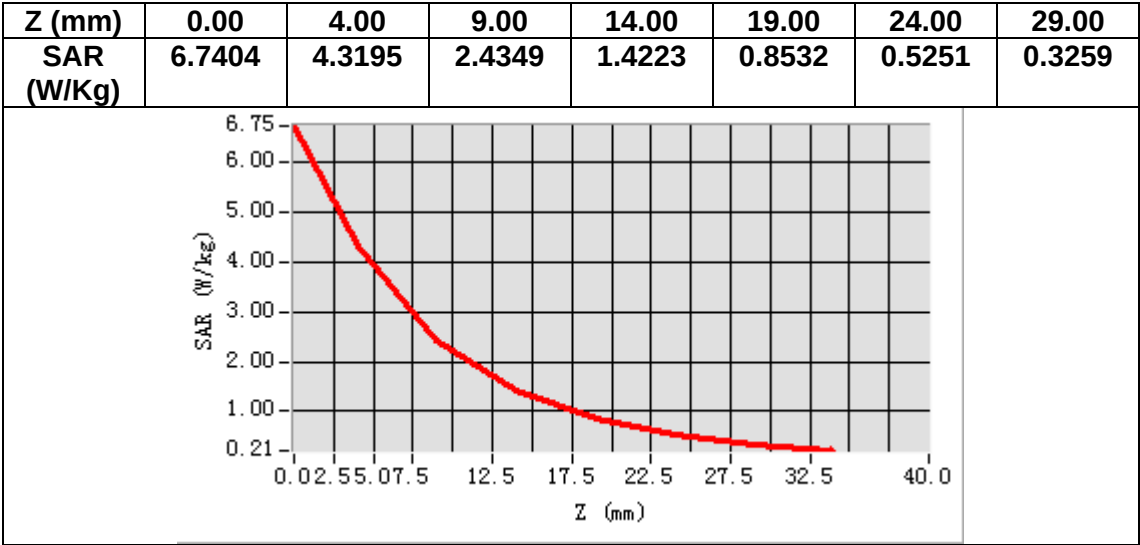

MEASUREMENT 3

Date of measurement: 13/3/2023


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1900</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>1.91</u>

B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.698190
Relative permittivity (imaginary part)	13.429836
Conductivity (S/m)	1.417594
Variation (%)	2.050000



SURFACE SAR

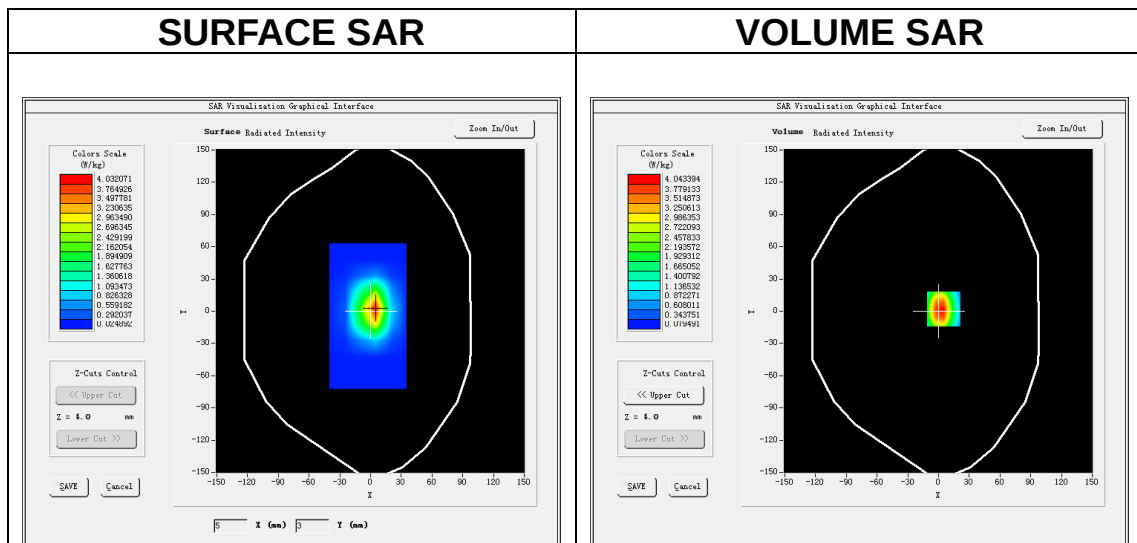

Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg

SAR 10g (W/Kg)	2.211384
SAR 1g (W/Kg)	4.036097

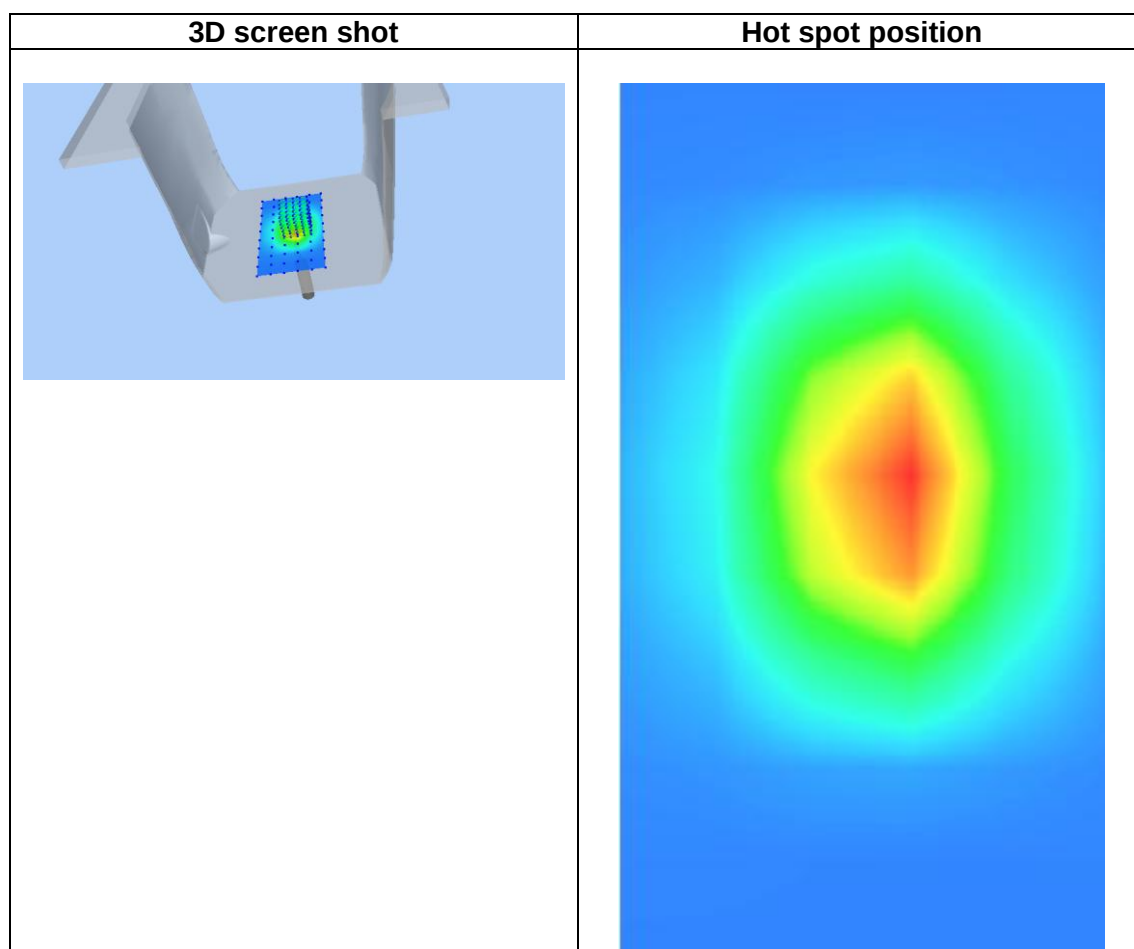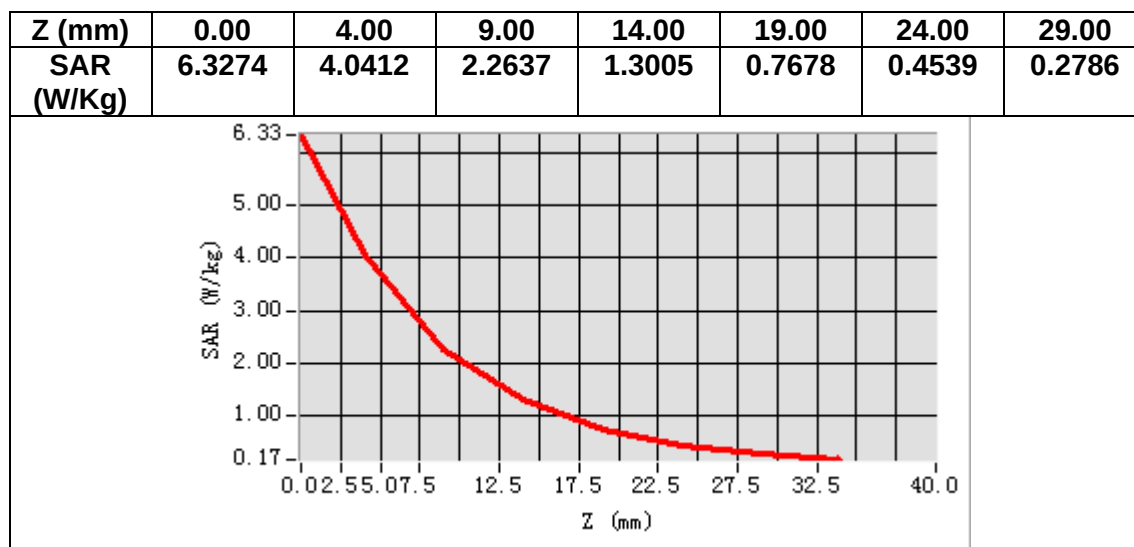

MEASUREMENT 4


Date of measurement: 10/3/2023

A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW2600</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>
ConvF	<u>1.87</u>

B. SAR Measurement Results



Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.046305
Relative permittivity (imaginary part)	13.714823
Conductivity (S/m)	1.981030
Variation (%)	1.570000

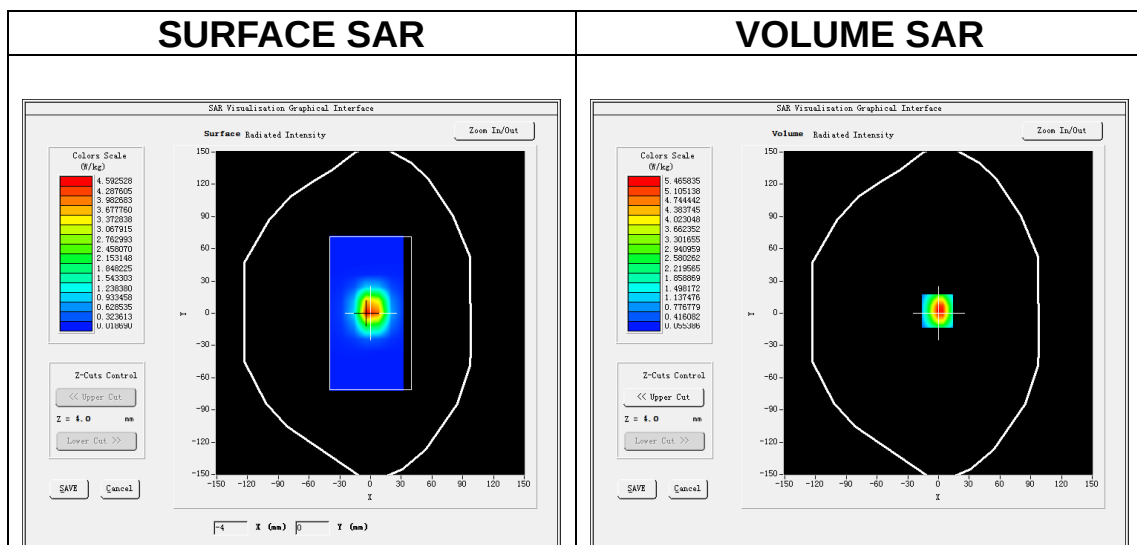

Maximum location: X=-1.00, Y=2.00

SAR Peak: 9.07 W/kg

SAR 10g (W/Kg)	2.240172
SAR 1g (W/Kg)	5.875128

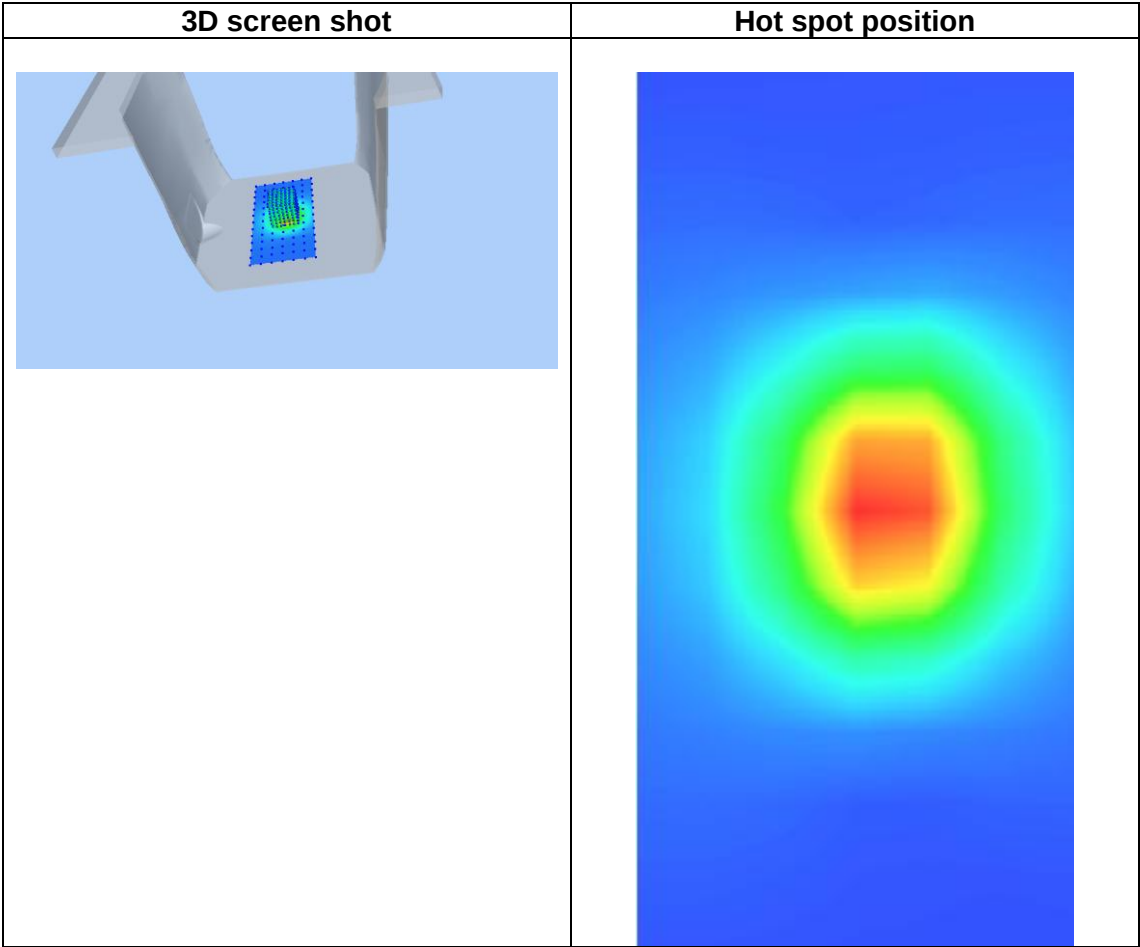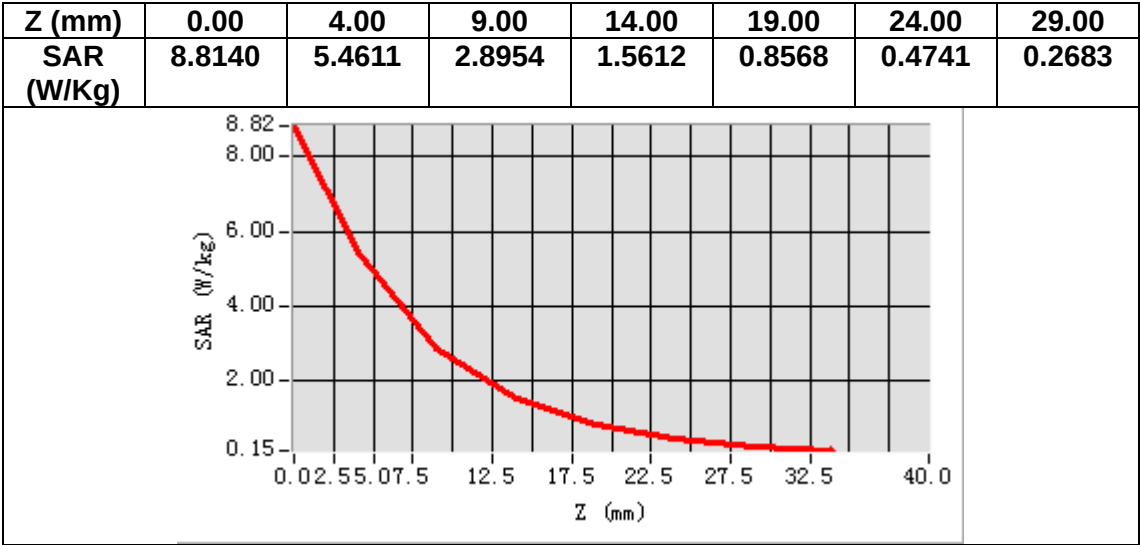

13. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 850 Head
MEASUREMENT 2 GSM 850 Body
MEASUREMENT 3 GSM 1900 Head
MEASUREMENT 4 GSM 1900 Body
MEASUREMENT 5 WCDMA Band 2 Head
MEASUREMENT 6 WCDMA Band 2 Body
MEASUREMENT 7 WCDMA Band 5 Head
MEASUREMENT 8 WCDMA Band 5 Body
MEASUREMENT 9 LTE Band 2 Head
MEASUREMENT 10 LTE Band 2 Body
MEASUREMENT 11 LTE Band 4 Head
MEASUREMENT 12 LTE Band 4 Body
MEASUREMENT 13 LTE Band 7 Head
MEASUREMENT 14 LTE Band 7 Body

MEASUREMENT 1

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	41.209236
Relative permittivity (imaginary part)	19.945681
Conductivity (S/m)	0.926809
Variation (%)	1.690000

SURFACE SAR

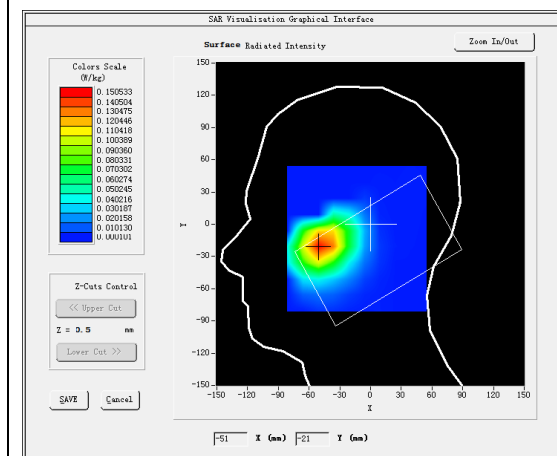



VOLUME SAR

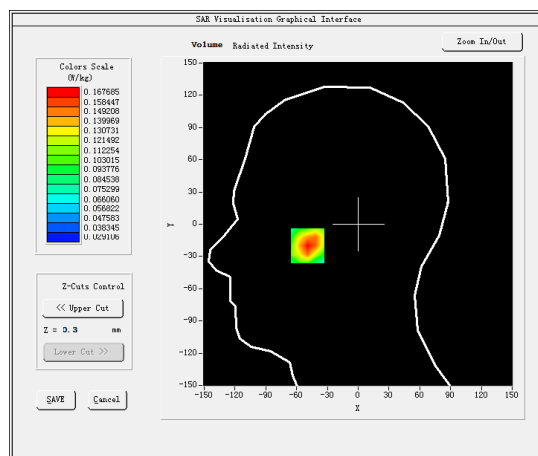

Maximum location: X=-49.00, Y=-20.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.117513
SAR 1g (W/Kg)	0.166774

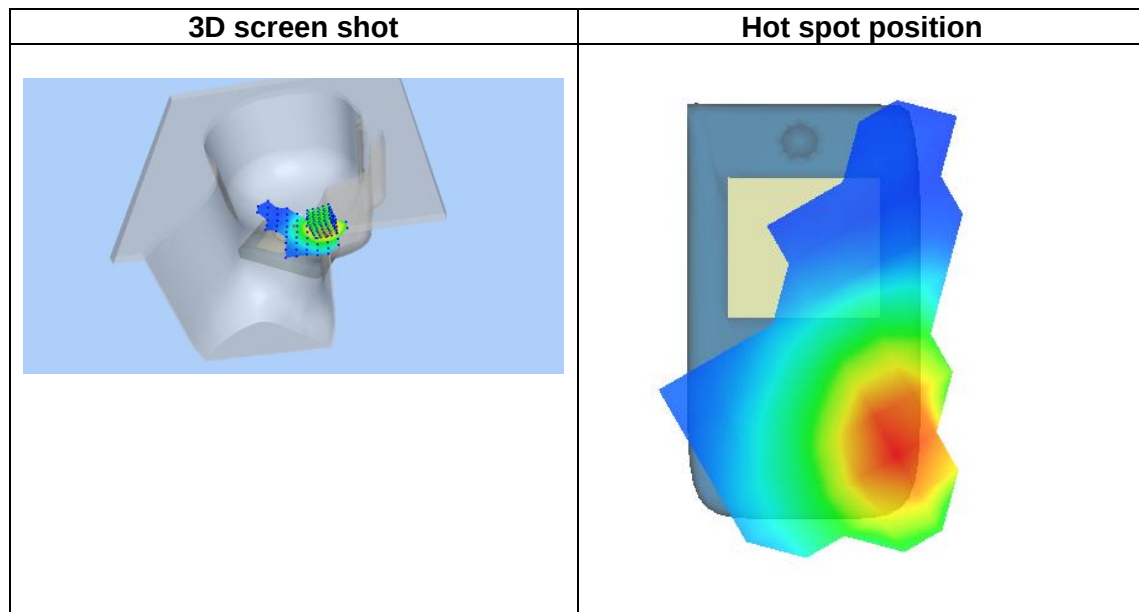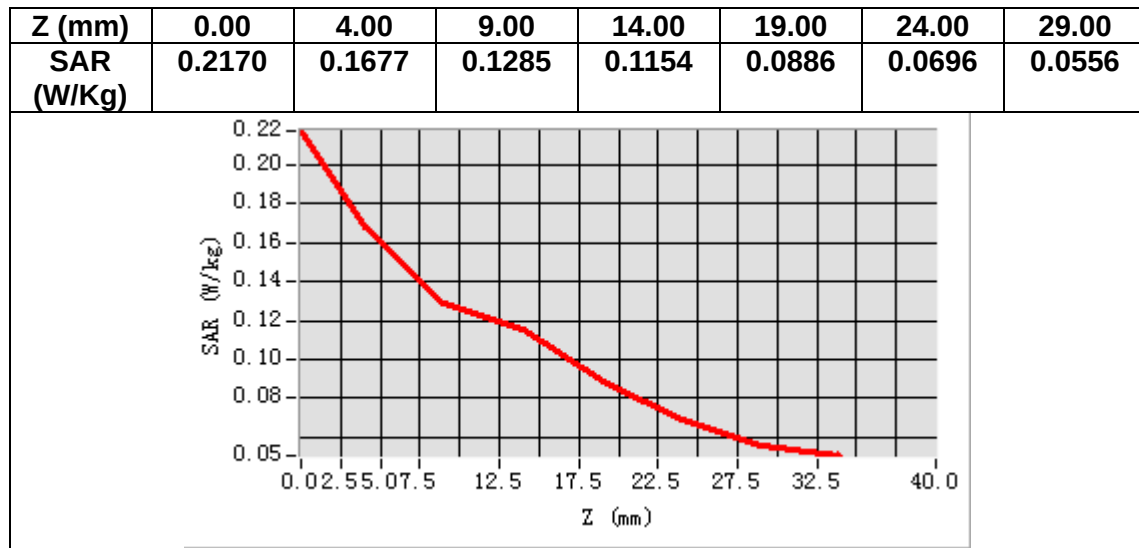

MEASUREMENT 2


Date of measurement: 14/3/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>
<u>ConvF</u>	<u>1.50</u>

B. SAR Measurement Results



Frequency (MHz)	836.400000
Relative permittivity (real part)	41.209236
Relative permittivity (imaginary part)	19.945681
Conductivity (S/m)	0.926809
Variation (%)	4.550000

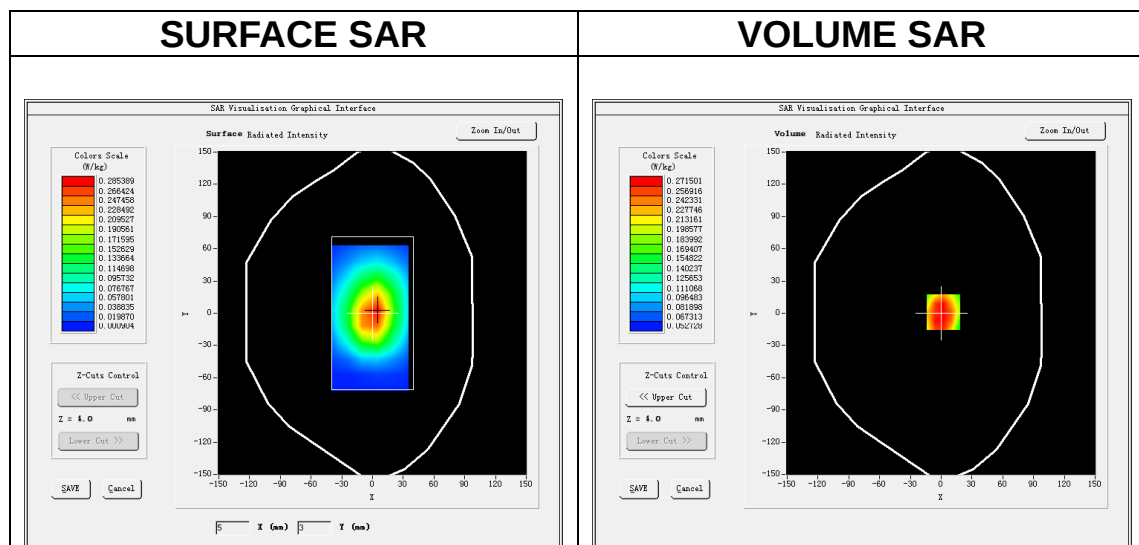

Maximum location: X=2.00, Y=1.00

SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.210704
SAR 1g (W/Kg)	0.278725

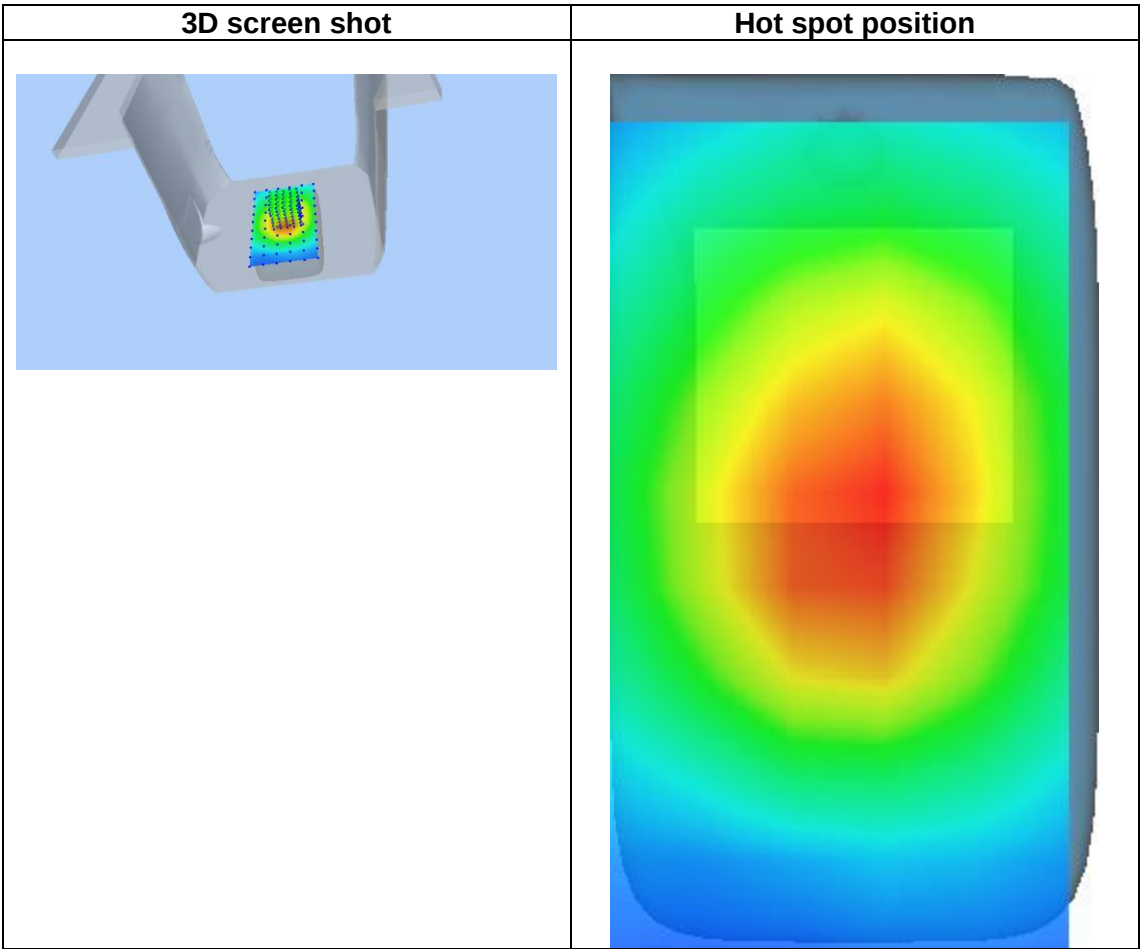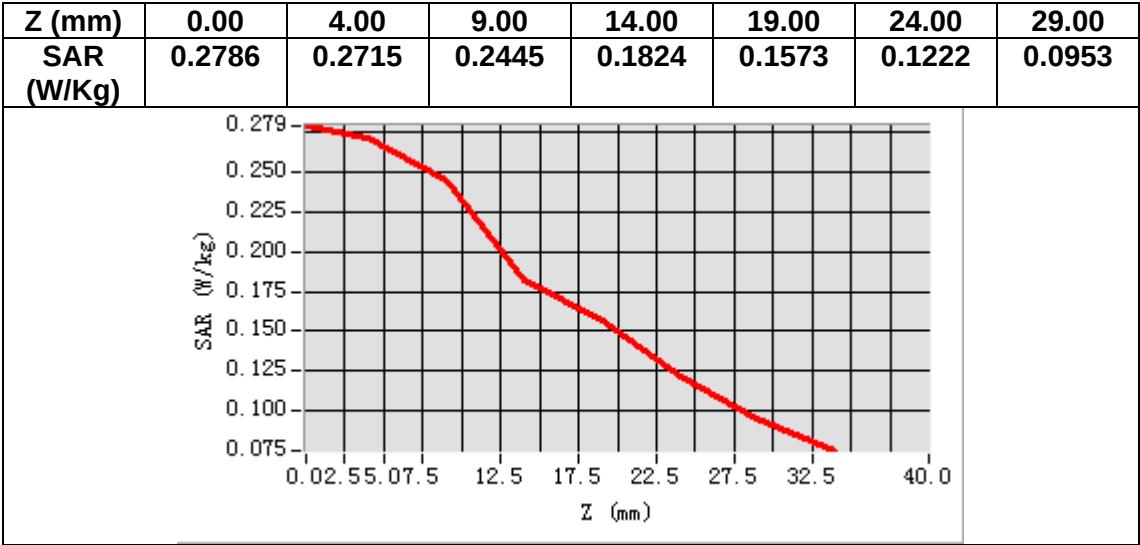

MEASUREMENT 3

Date of measurement: 13/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.7)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.784592
Relative permittivity (imaginary part)	13.447636
Conductivity (S/m)	1.404531
Variation (%)	-1.820000

SURFACE SAR

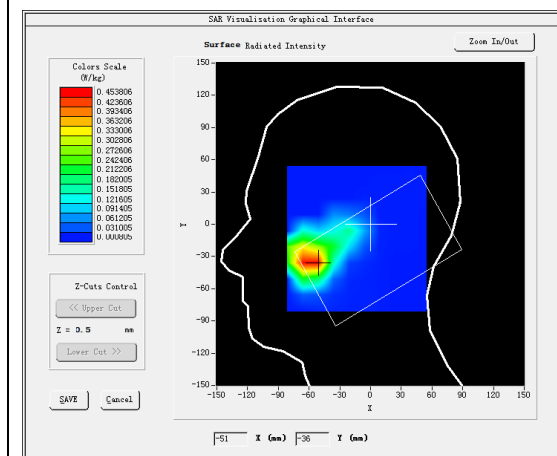



VOLUME SAR

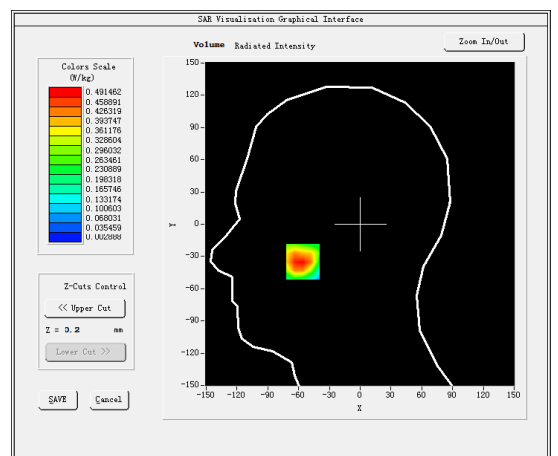

Maximum location: X=-56.00, Y=-35.00

SAR Peak: 0.73 W/kg

SAR 10g (W/Kg)	0.269539
SAR 1g (W/Kg)	0.477792

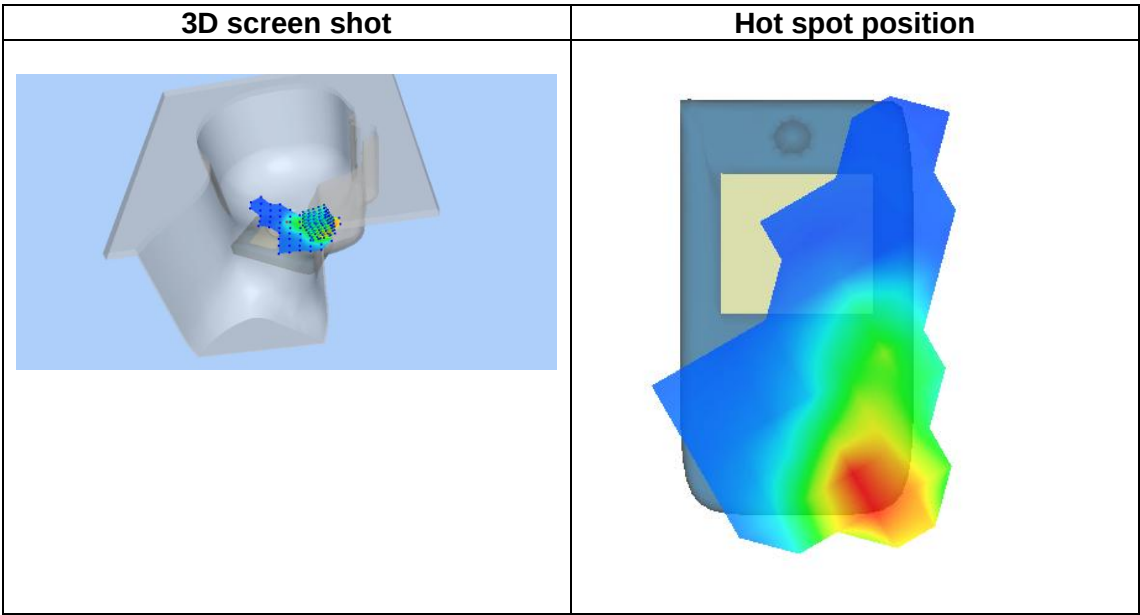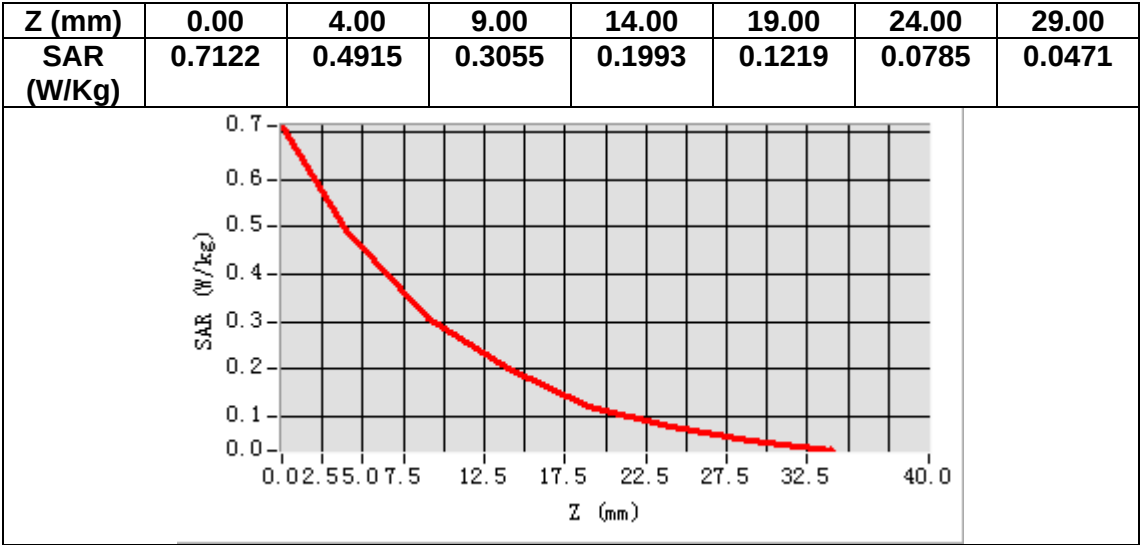

MEASUREMENT 4

Date of measurement: 13/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.7)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.784592
Relative permittivity (imaginary part)	13.447636
Conductivity (S/m)	1.404531
Variation (%)	3.010000

SURFACE SAR

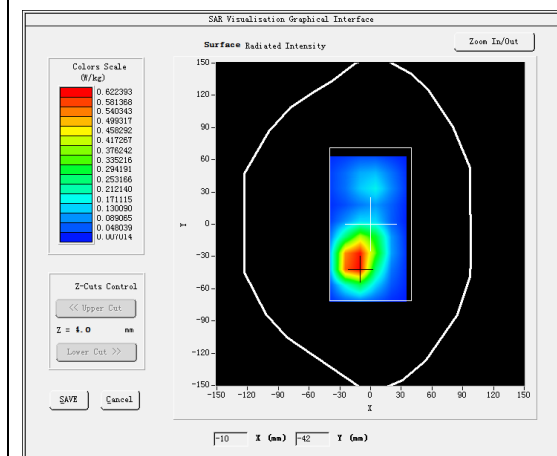



VOLUME SAR

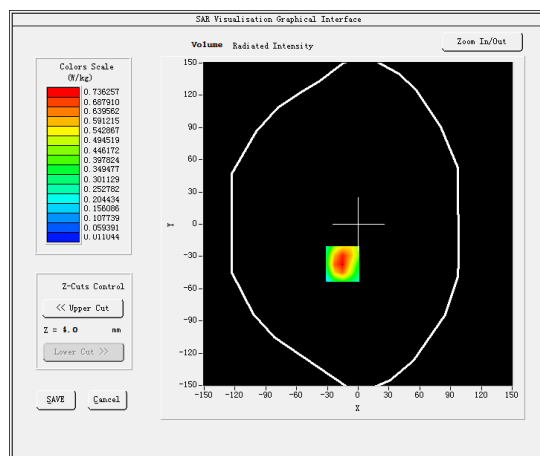

Maximum location: X=-15.00, Y=-37.00

SAR Peak: 1.19 W/kg

SAR 10g (W/Kg)	0.371748
SAR 1g (W/Kg)	0.716343

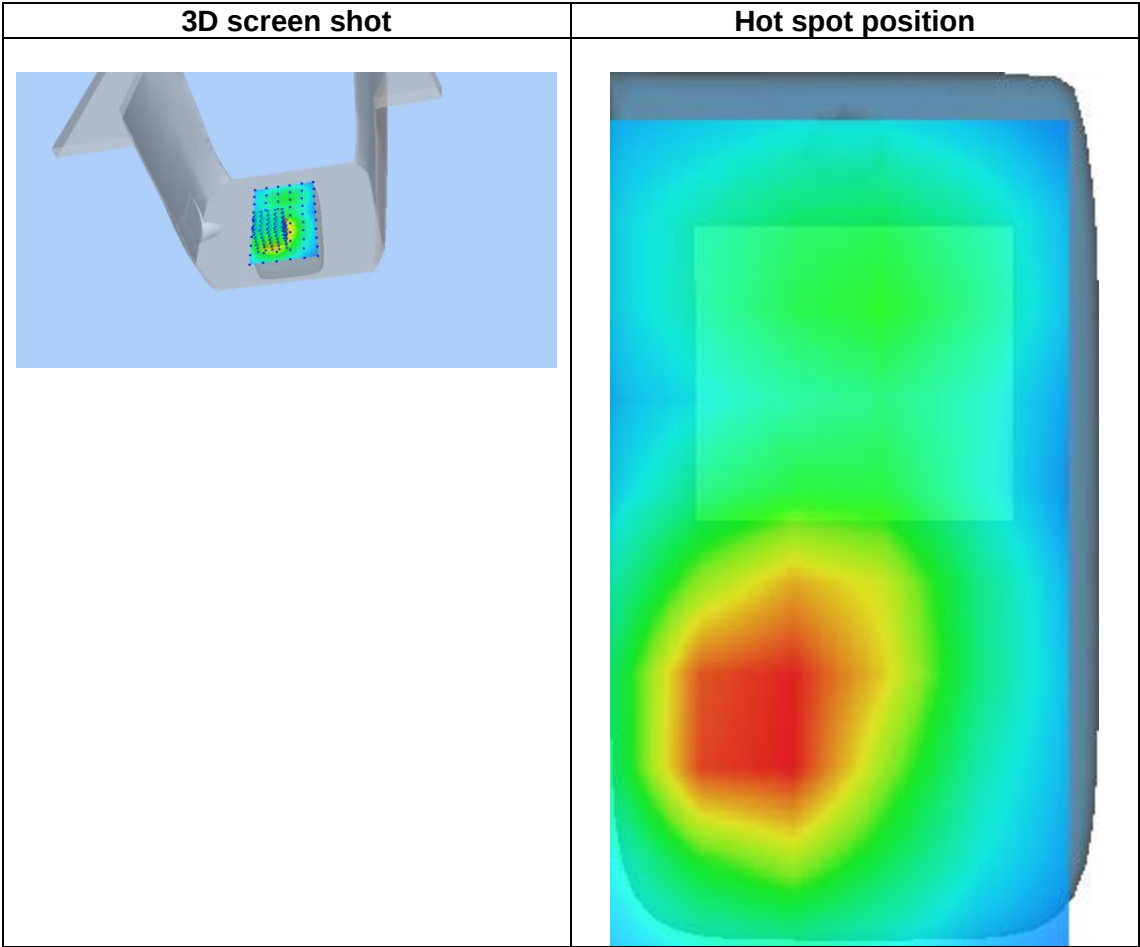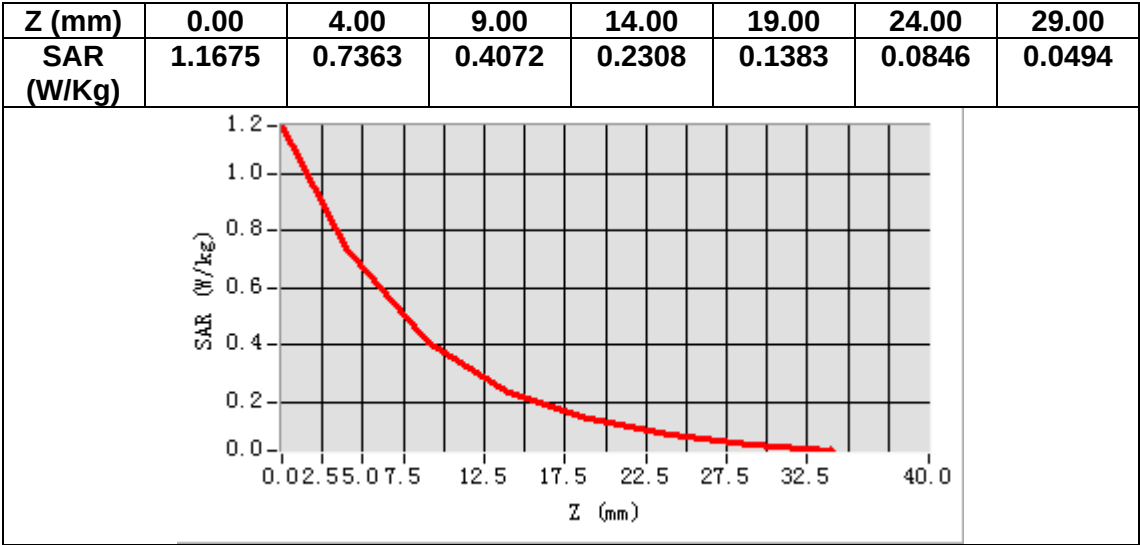

MEASUREMENT 5

Date of measurement: 13/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.784592
Relative permittivity (imaginary part)	13.447636
Conductivity (S/m)	1.404531
Variation (%)	-2.430000

SURFACE SAR

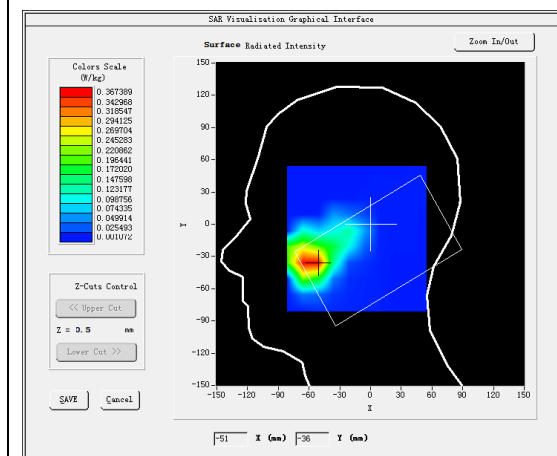



VOLUME SAR

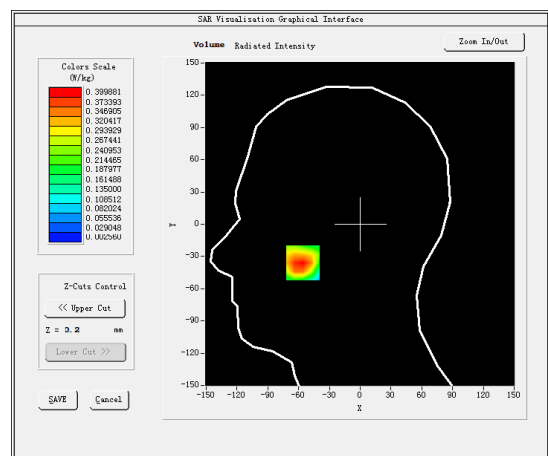

Maximum location: X=-56.00, Y=-36.00

SAR Peak: 0.56 W/kg

SAR 10g (W/Kg)	0.223969
SAR 1g (W/Kg)	0.385070

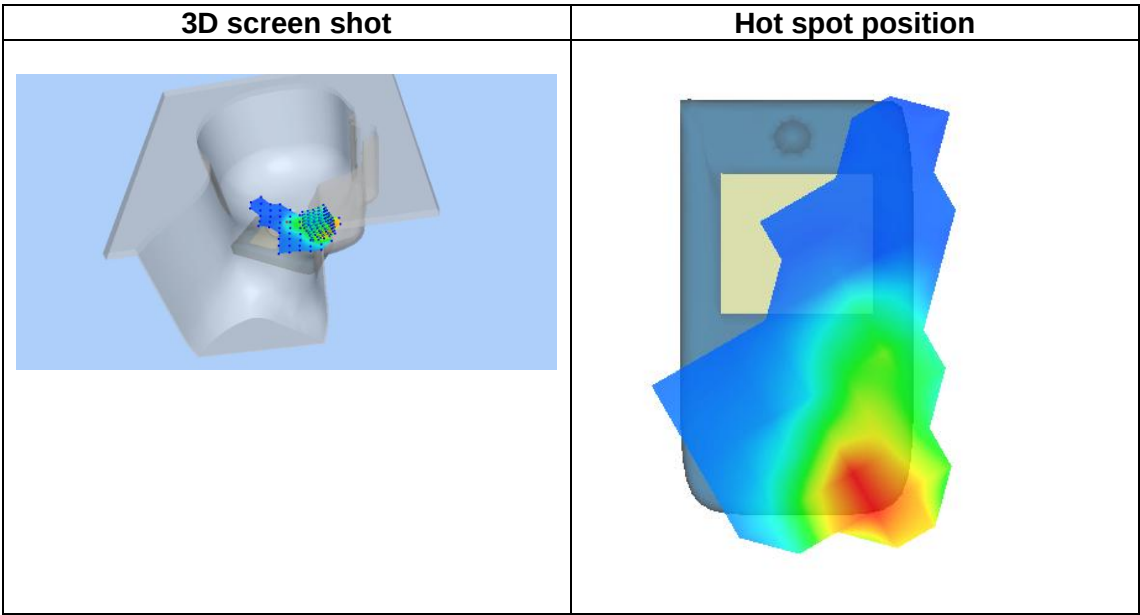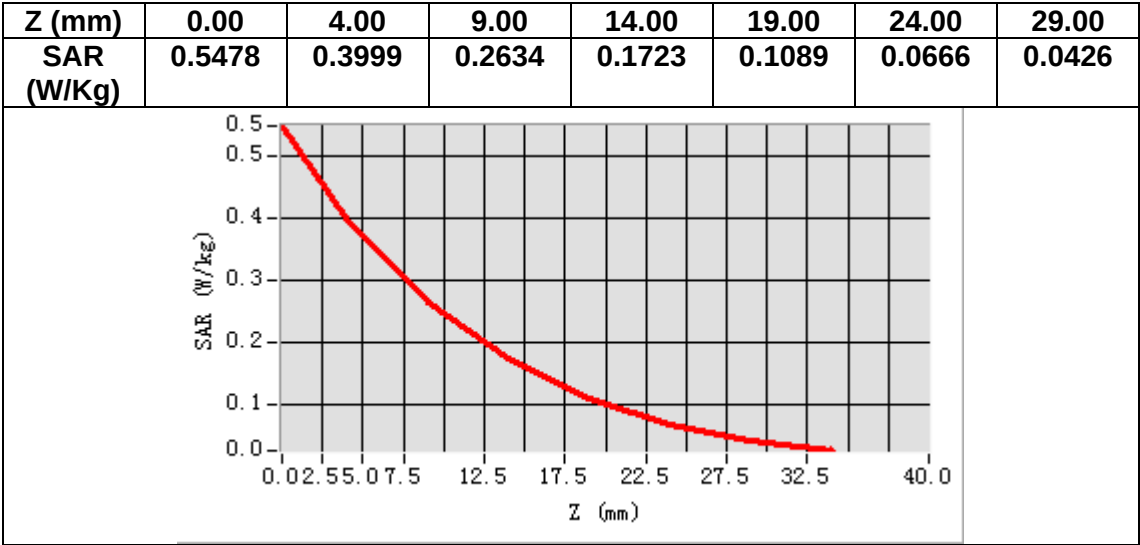

MEASUREMENT 6


Date of measurement: 13/3/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band2 WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>

B. SAR Measurement Results



Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.784592
Relative permittivity (imaginary part)	13.447636
Conductivity (S/m)	1.404531
Variation (%)	-0.870000

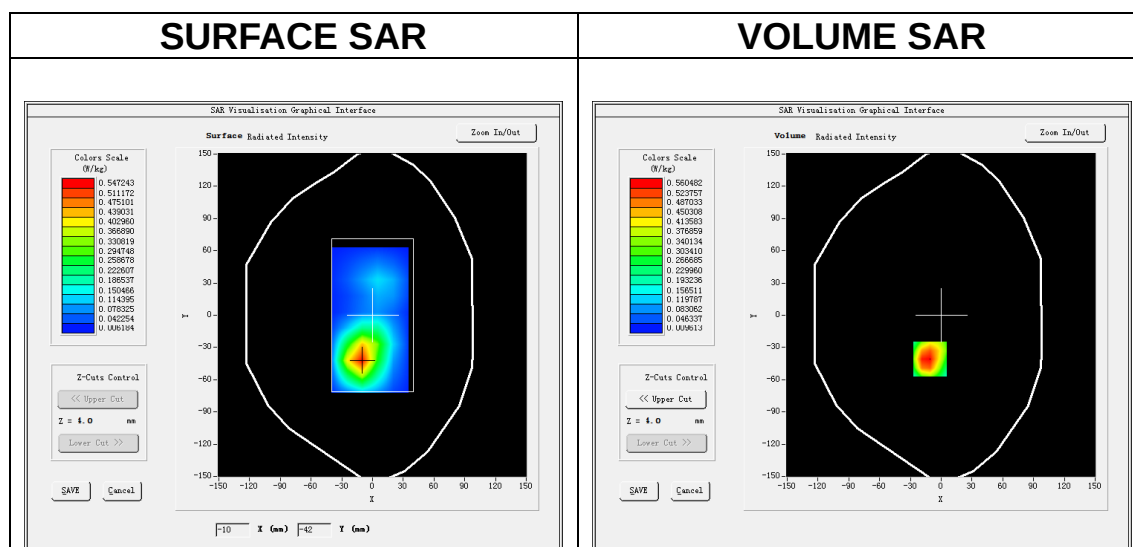

Maximum location: X=-11.00, Y=-41.00

SAR Peak: 0.88 W/kg

SAR 10g (W/Kg)	0.299947
SAR 1g (W/Kg)	0.553729

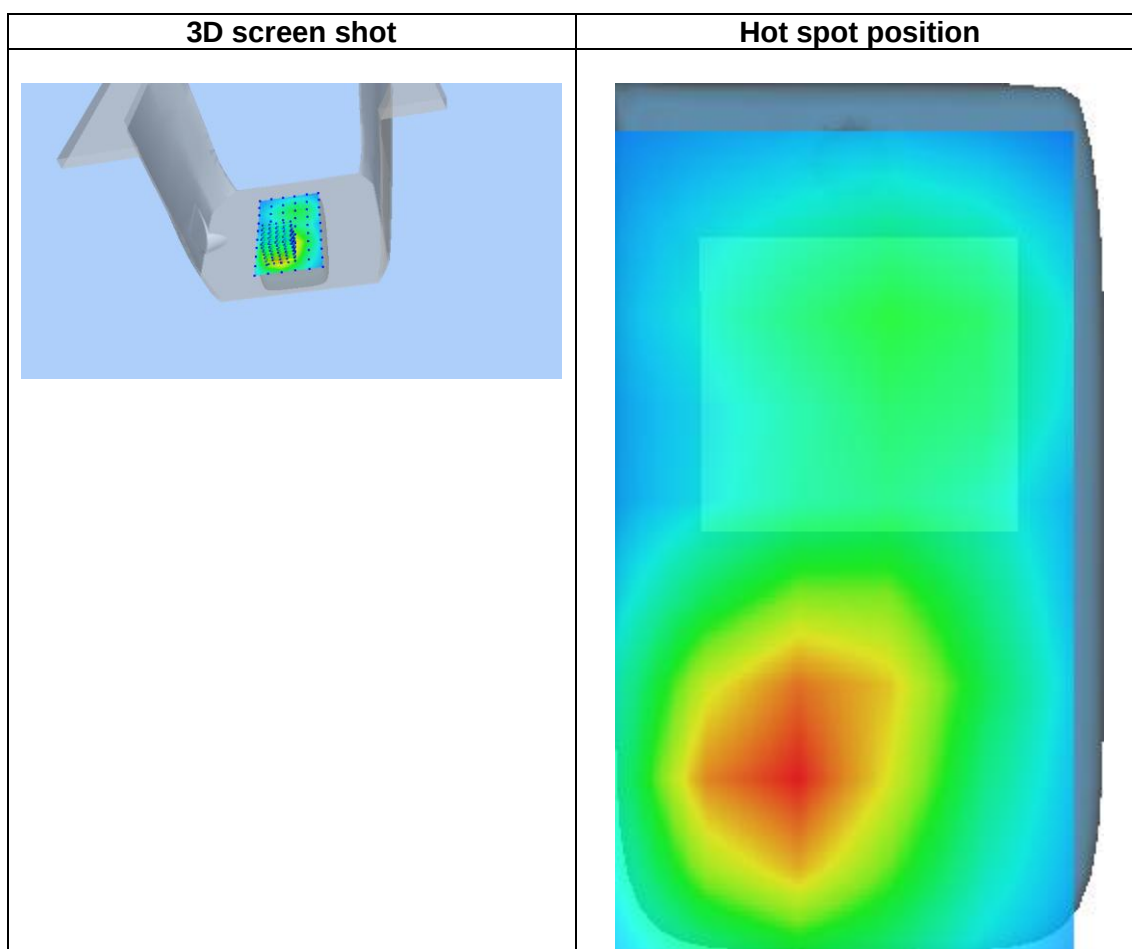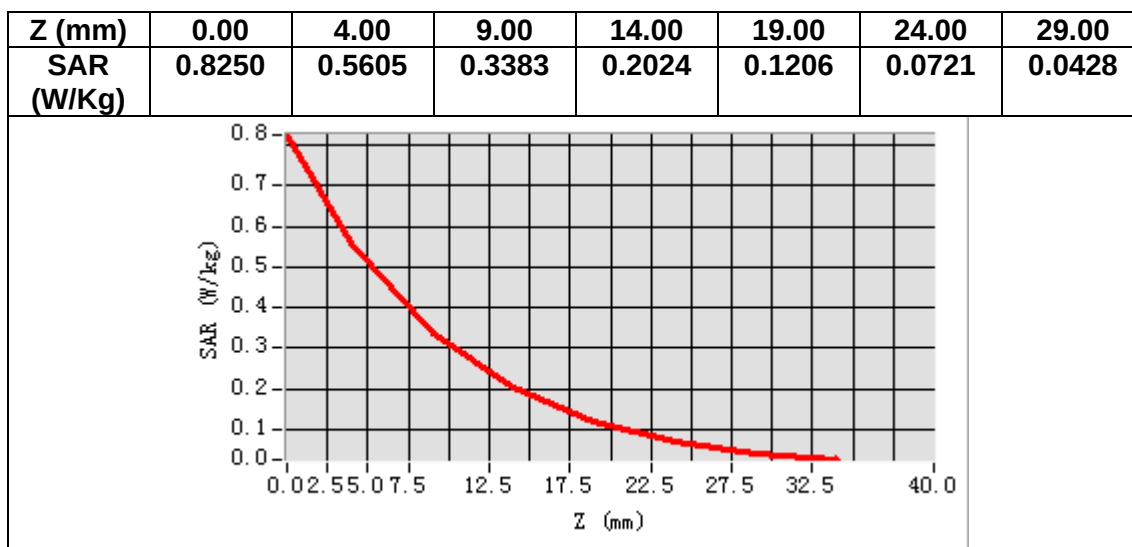

MEASUREMENT 7

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	41.209236
Relative permittivity (imaginary part)	19.945681
Conductivity (S/m)	0.926809
Variation (%)	-0.710000

SURFACE SAR

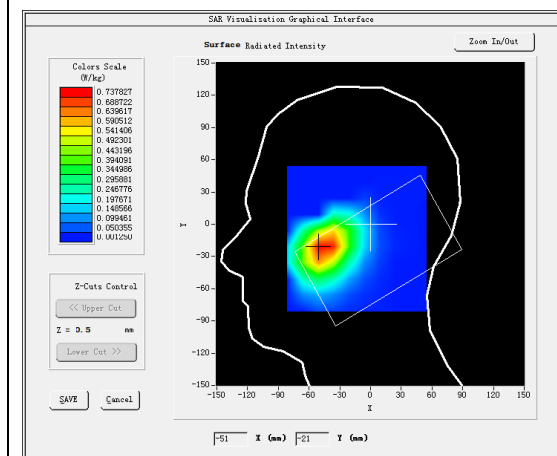



VOLUME SAR

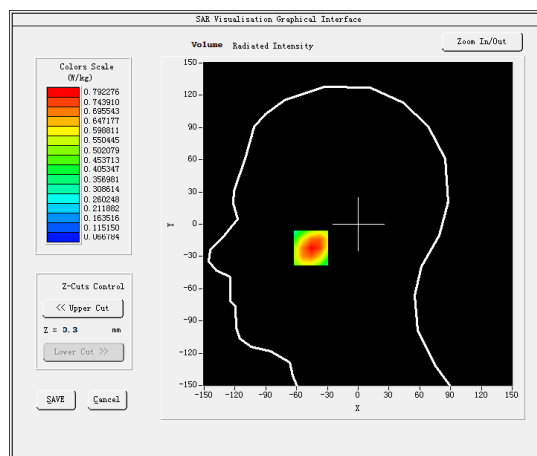

Maximum location: X=-46.00, Y=-22.00

SAR Peak: 1.03 W/kg

SAR 10g (W/Kg)	0.516937
SAR 1g (W/Kg)	0.774858

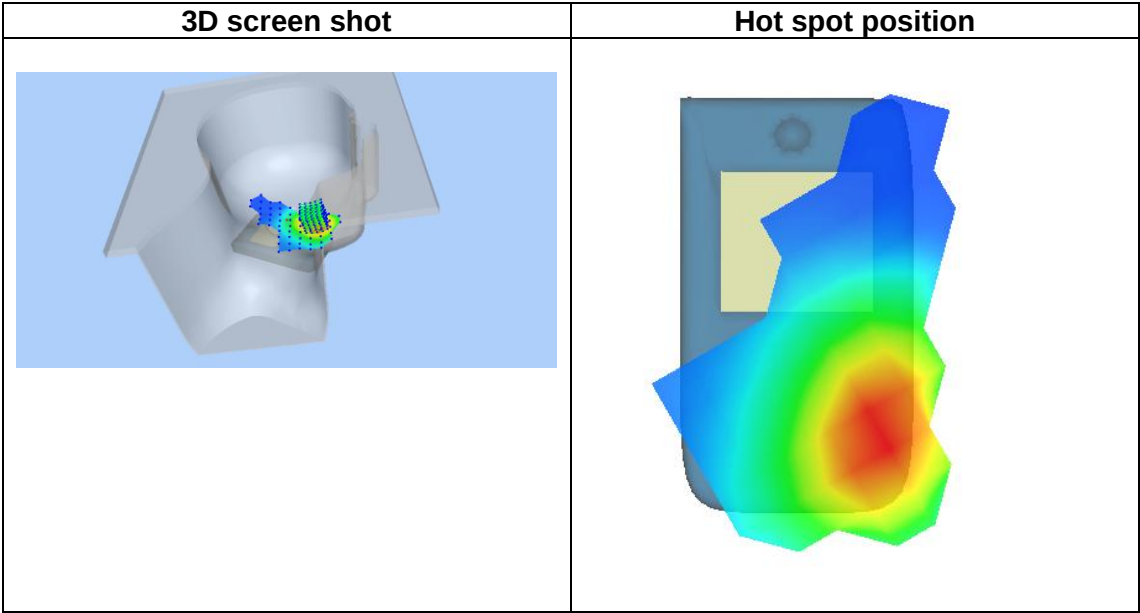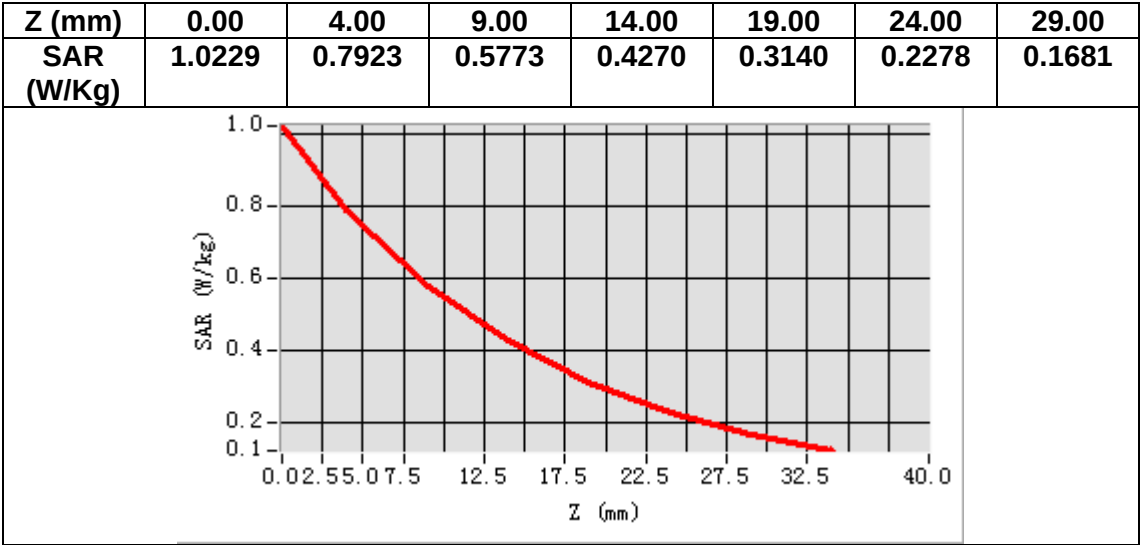

MEASUREMENT 8

Date of measurement: 14/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.50</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	41.209236
Relative permittivity (imaginary part)	19.945681
Conductivity (S/m)	0.926809
Variation (%)	1.000000

SURFACE SAR

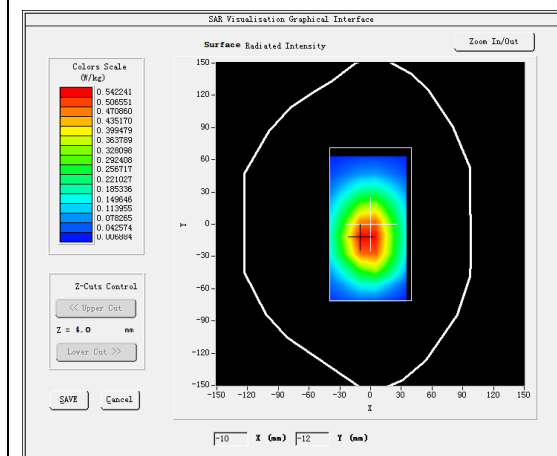



VOLUME SAR

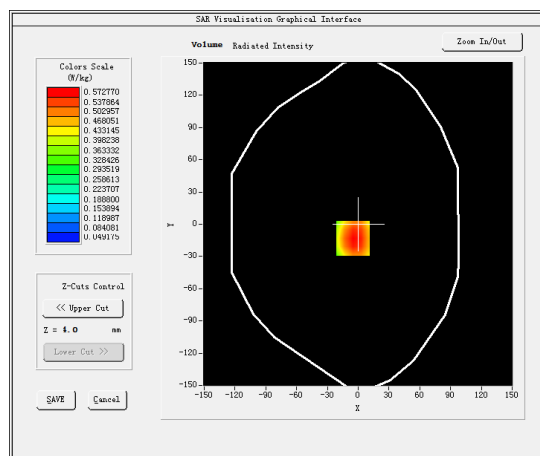

Maximum location: X=-5.00, Y=-13.00

SAR Peak: 0.76 W/kg

SAR 10g (W/Kg)	0.390414
SAR 1g (W/Kg)	0.570026

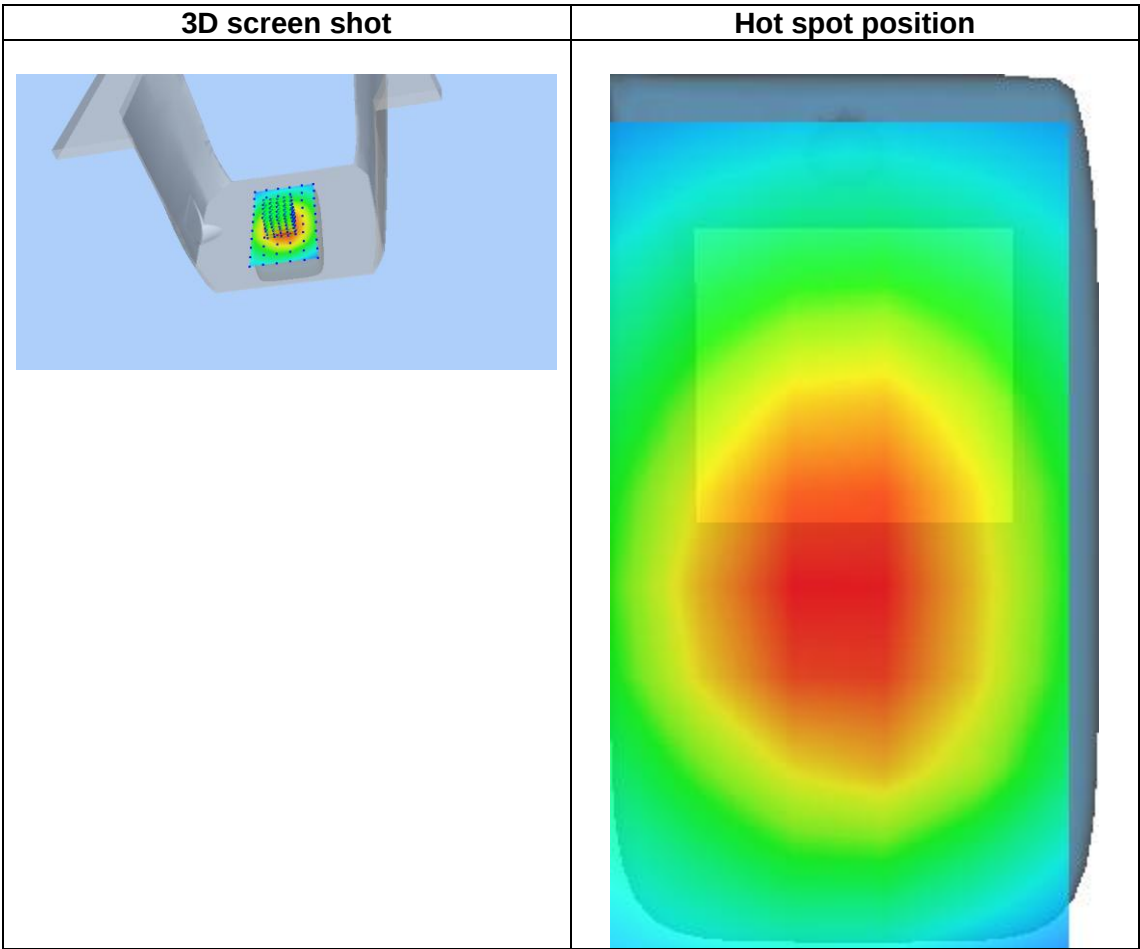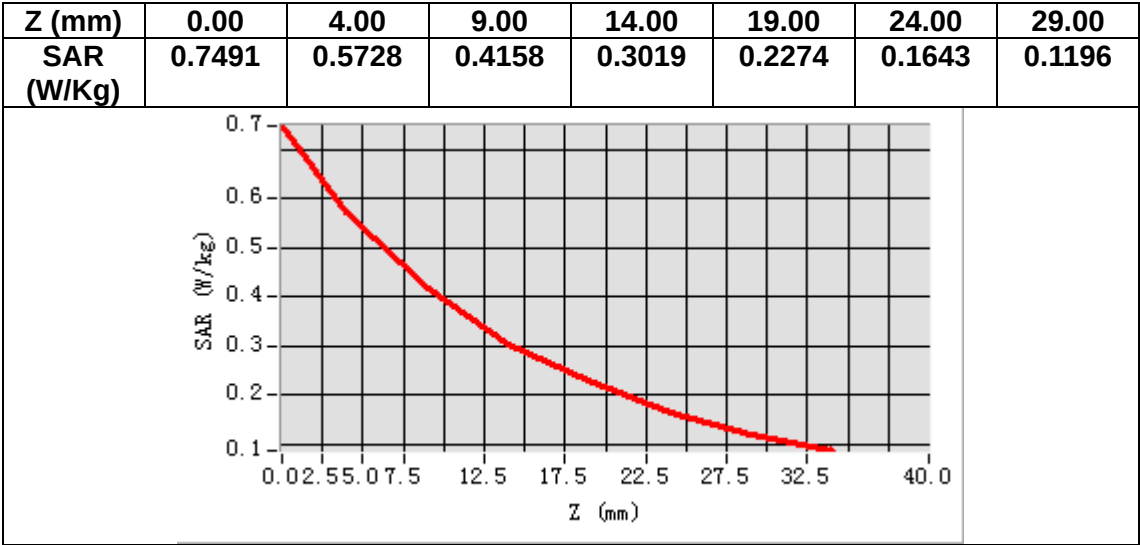

MEASUREMENT 9

Date of measurement: 13/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.793091
Relative permittivity (imaginary part)	13.451386
Conductivity (S/m)	1.404549
Variation (%)	-0.570000

SURFACE SAR

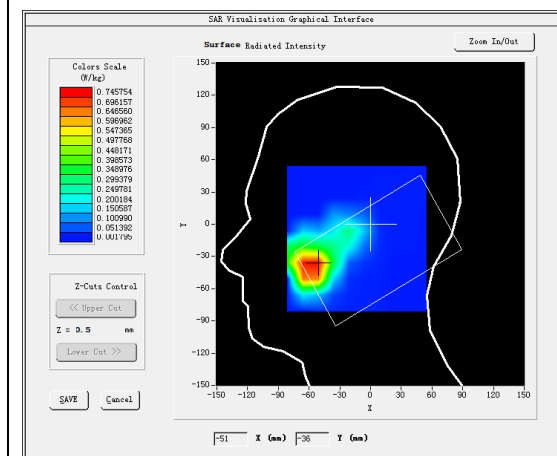



VOLUME SAR

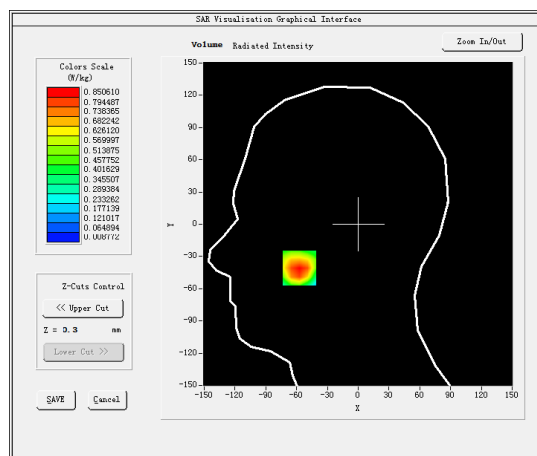

Maximum location: X=-57.00, Y=-41.00

SAR Peak: 1.17 W/kg

SAR 10g (W/Kg)	0.482289
SAR 1g (W/Kg)	0.820552

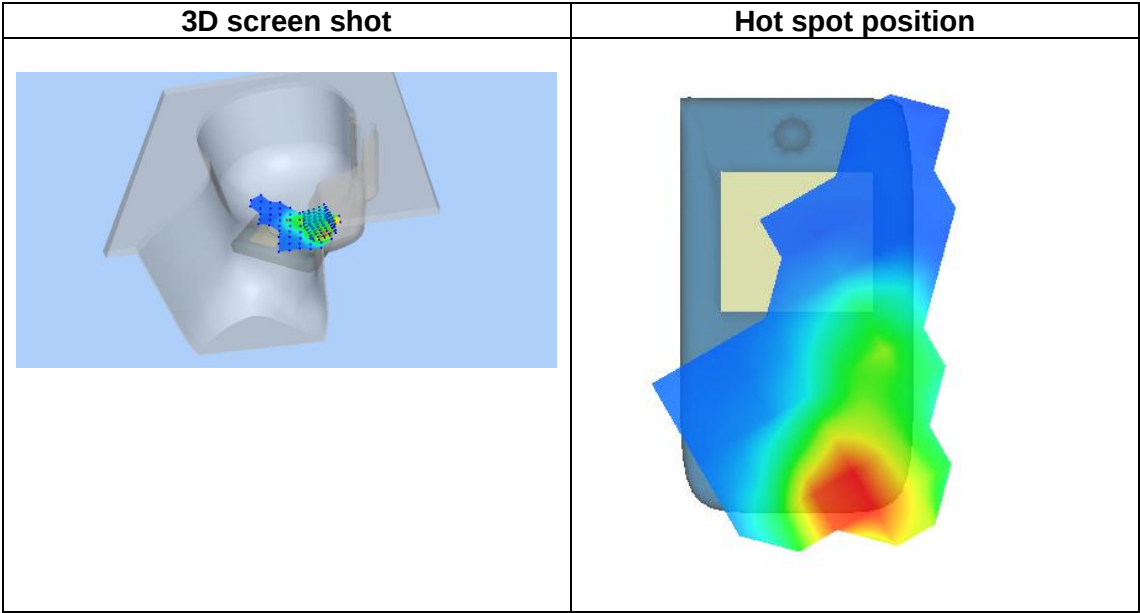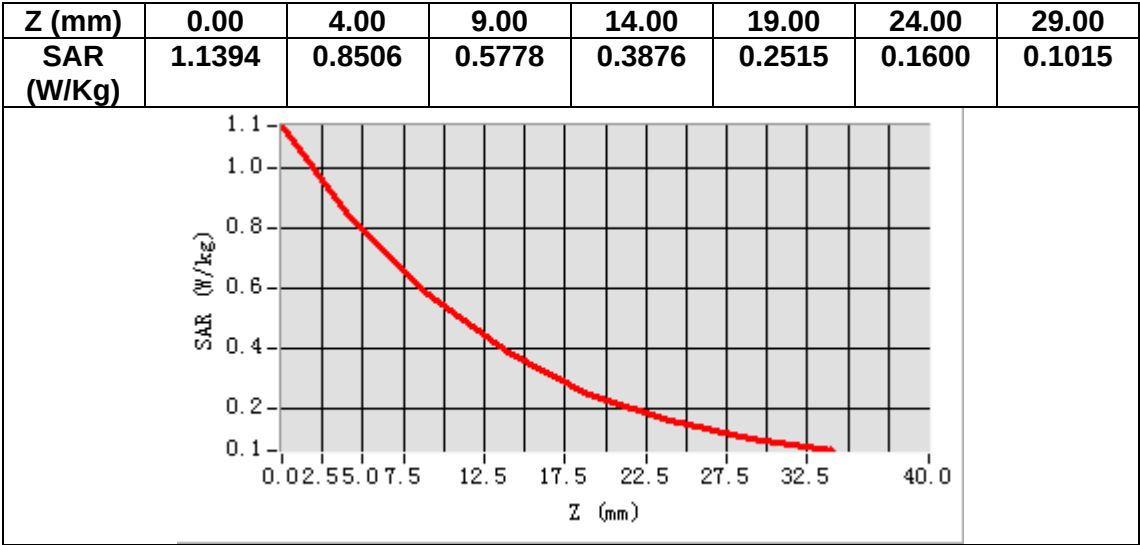

MEASUREMENT 10

Date of measurement: 13/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.91</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	38.793091
Relative permittivity (imaginary part)	13.451386
Conductivity (S/m)	1.404549
Variation (%)	-4.940000

SURFACE SAR

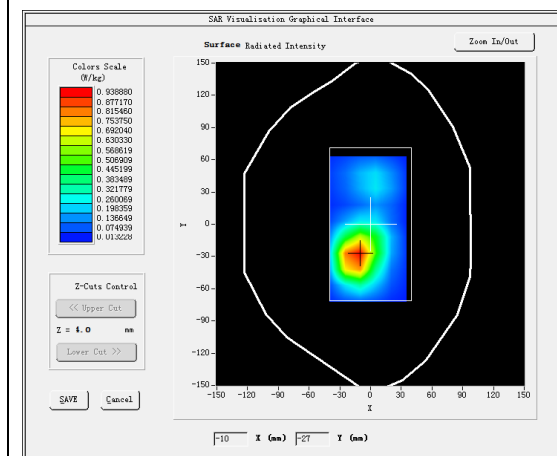



VOLUME SAR

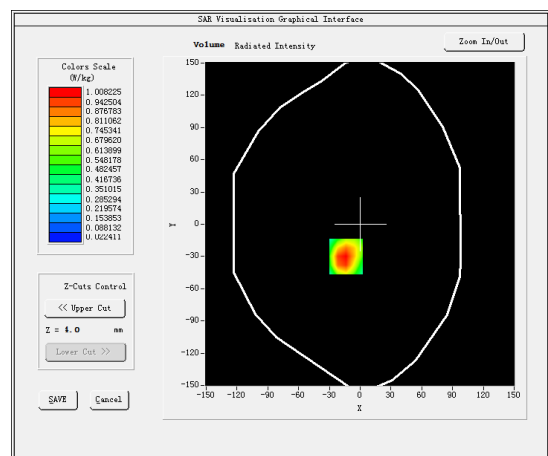

Maximum location: X=-14.00, Y=-30.00

SAR Peak: 1.58 W/kg

SAR 10g (W/Kg)	0.541638
SAR 1g (W/Kg)	0.992512

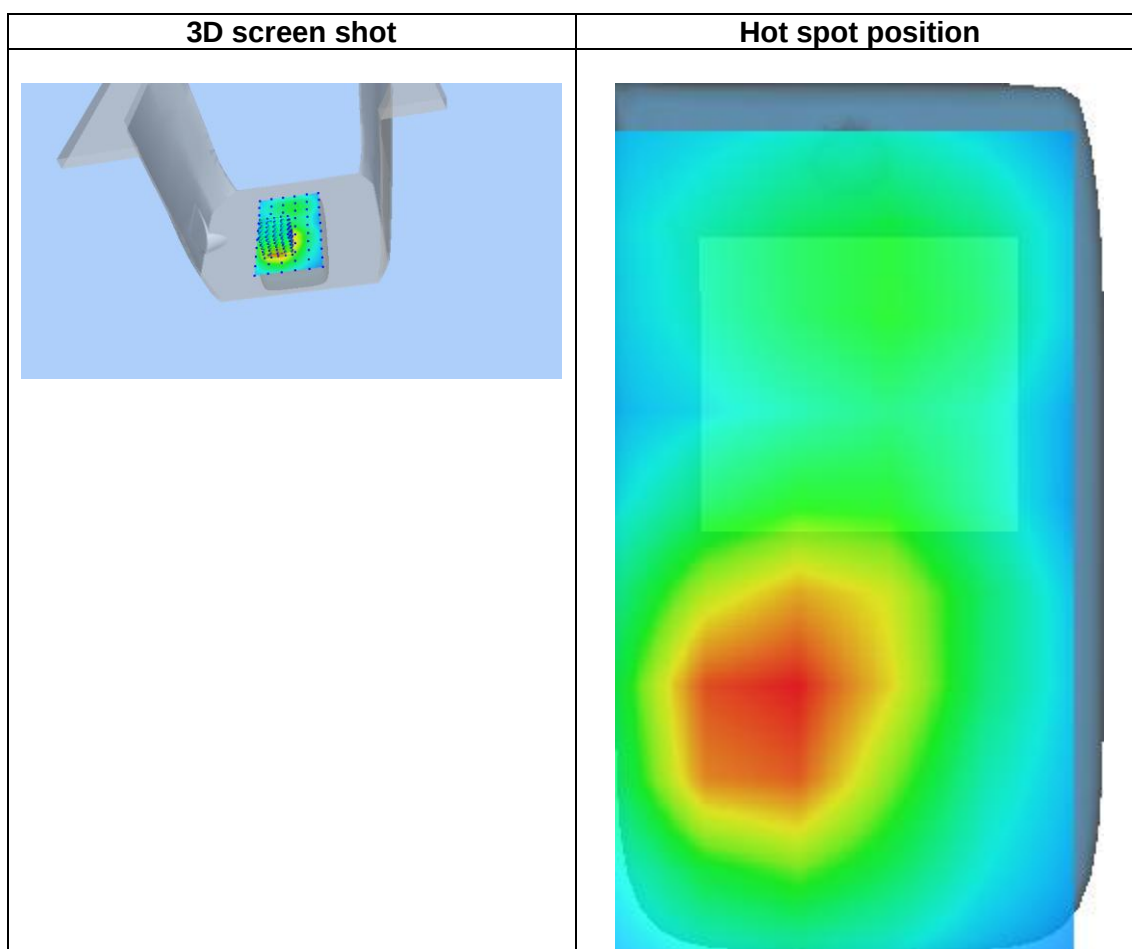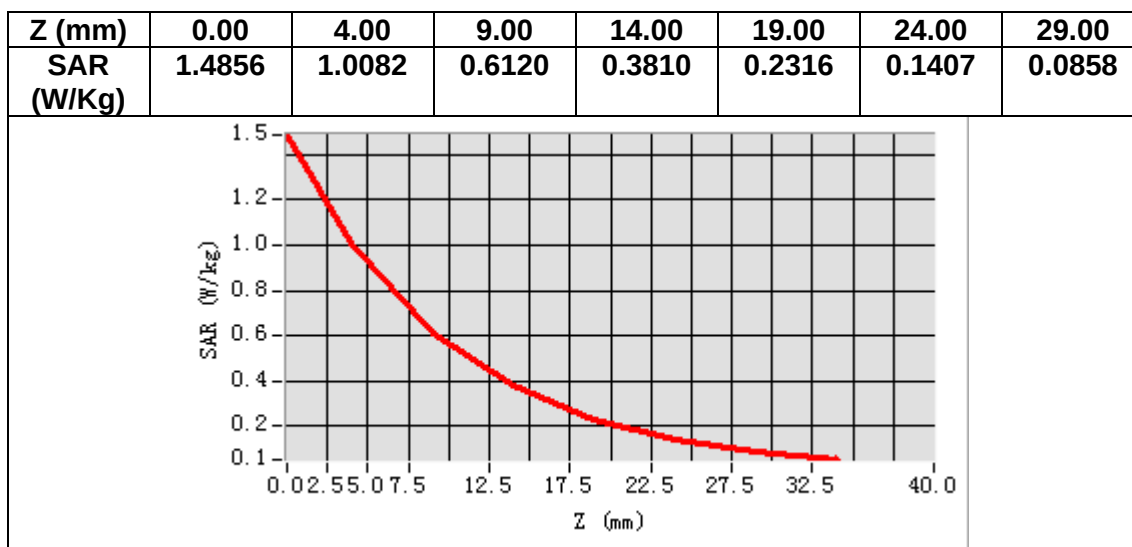

MEASUREMENT 11

Date of measurement: 23/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.73</u>


B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	39.282204
Relative permittivity (imaginary part)	13.635870
Conductivity (S/m)	1.312452
Variation (%)	-2.970000

SURFACE SAR

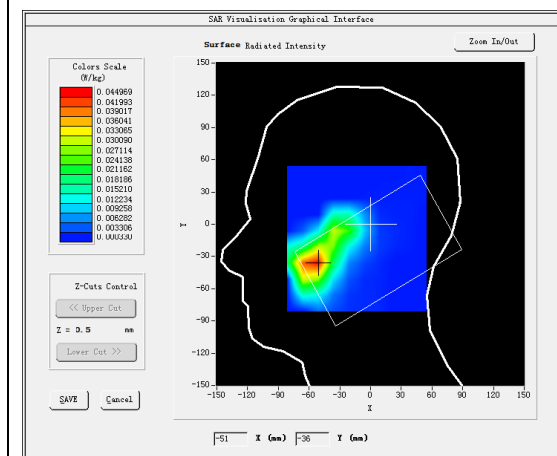



VOLUME SAR

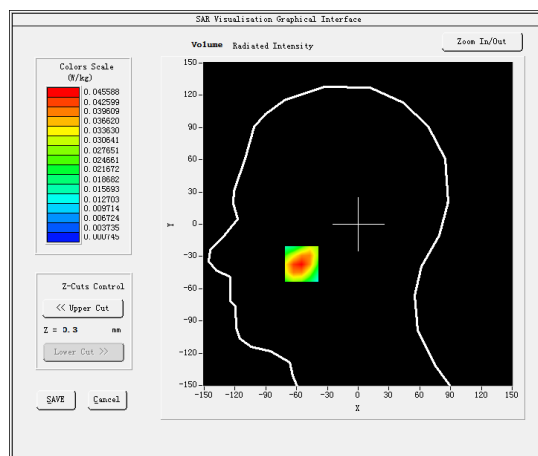

Maximum location: X=-55.00, Y=-37.00

SAR Peak: 0.06 W/kg

SAR 10g (W/Kg)	0.025727
SAR 1g (W/Kg)	0.043469

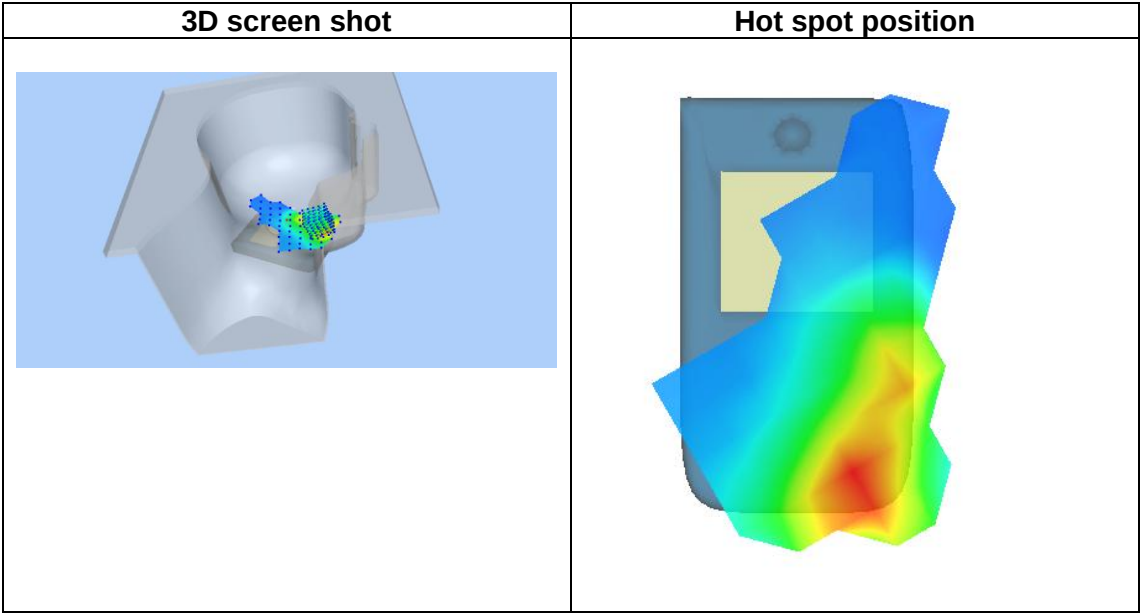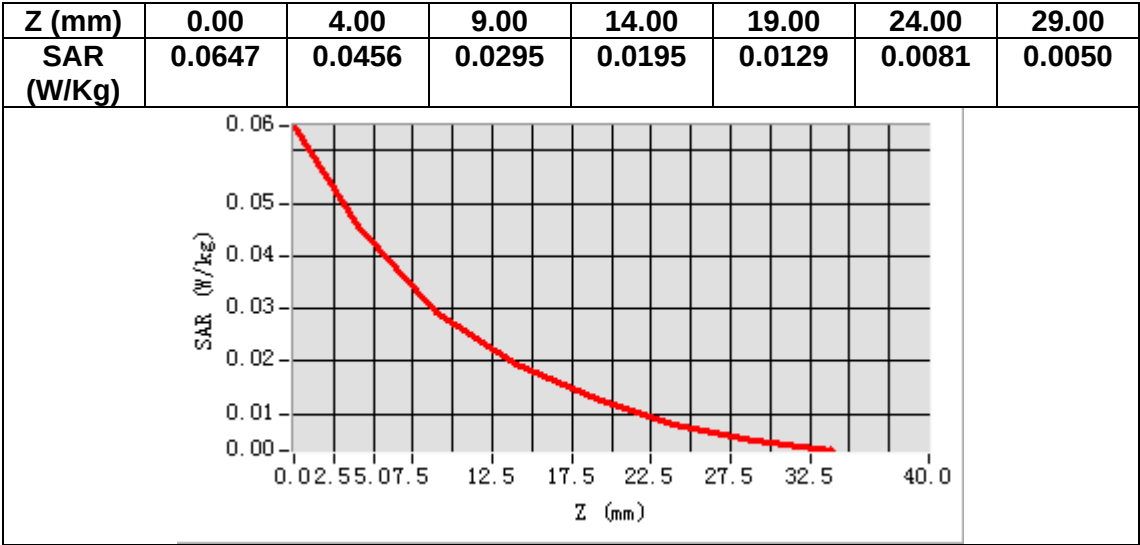

MEASUREMENT 12


Date of measurement: 23/3/2023

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.73</u>

B. SAR Measurement Results



Frequency (MHz)	1732.500000
Relative permittivity (real part)	39.282204
Relative permittivity (imaginary part)	13.635870
Conductivity (S/m)	1.312452
Variation (%)	-3.540000

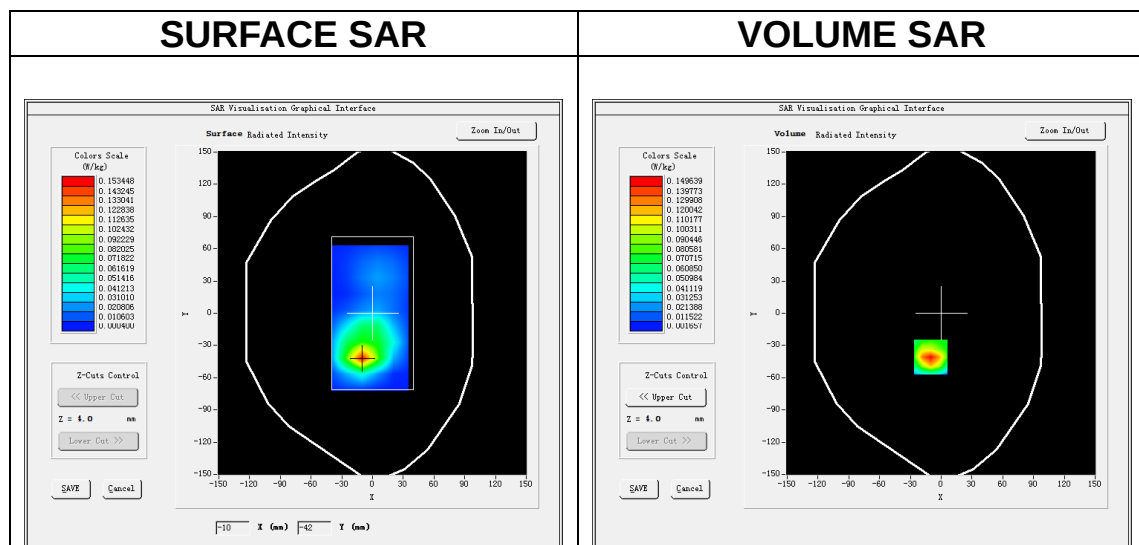

Maximum location: X=-10.00, Y=-41.00

SAR Peak: 0.24 W/kg

SAR 10g (W/Kg)	0.067979
SAR 1g (W/Kg)	0.139909

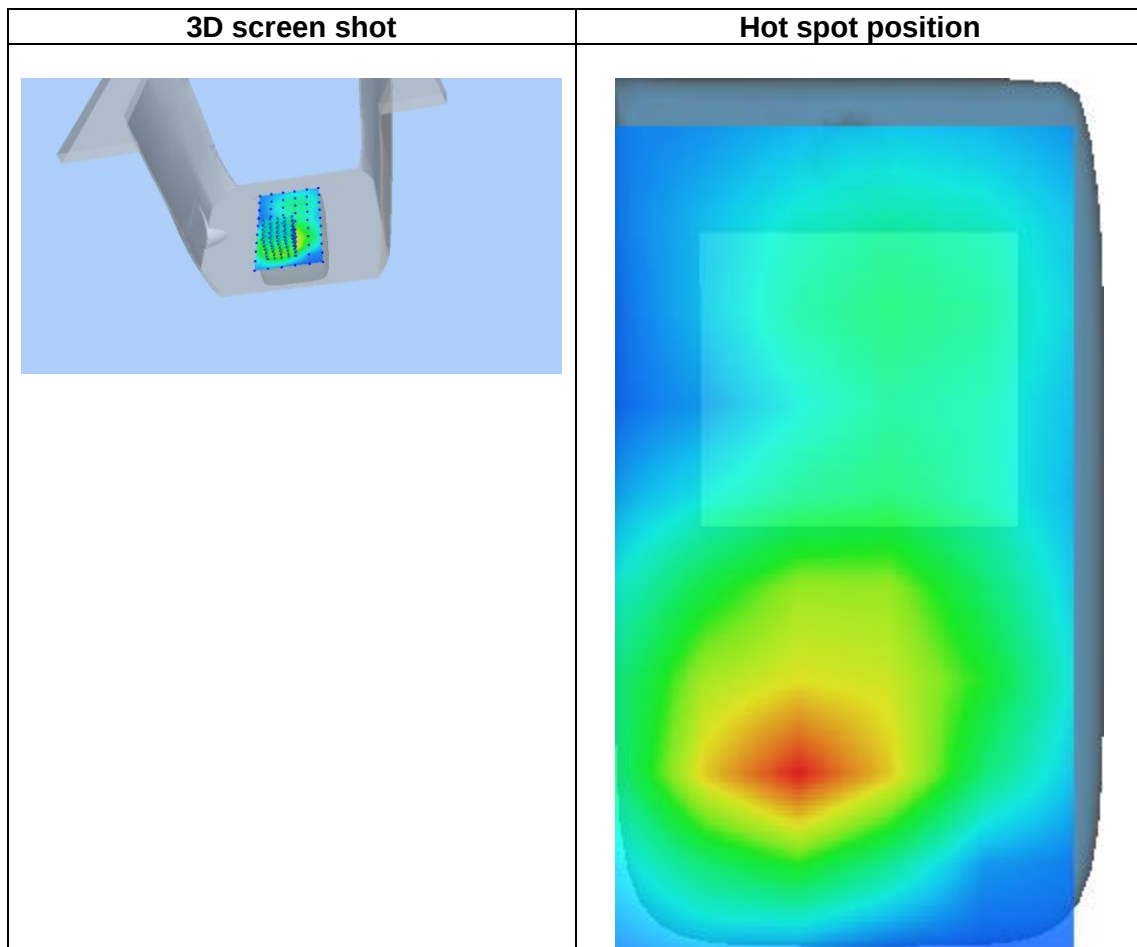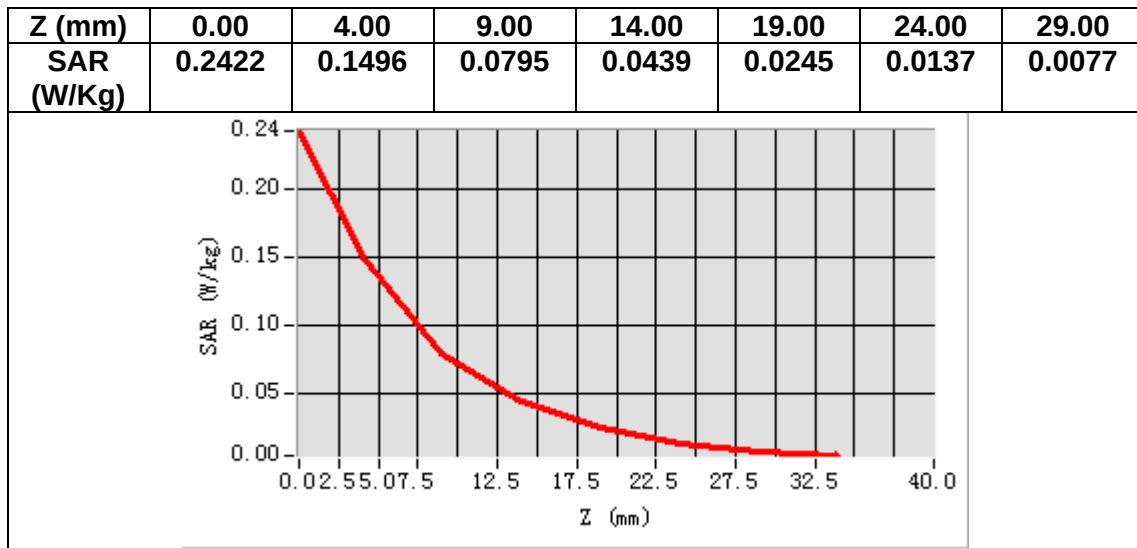

MEASUREMENT 13

Date of measurement: 10/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.87</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.381603
Relative permittivity (imaginary part)	13.582723
Conductivity (S/m)	1.912900
Variation (%)	-1.140000

SURFACE SAR

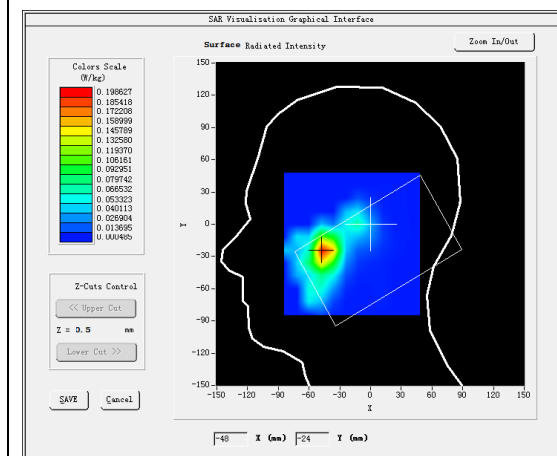



VOLUME SAR

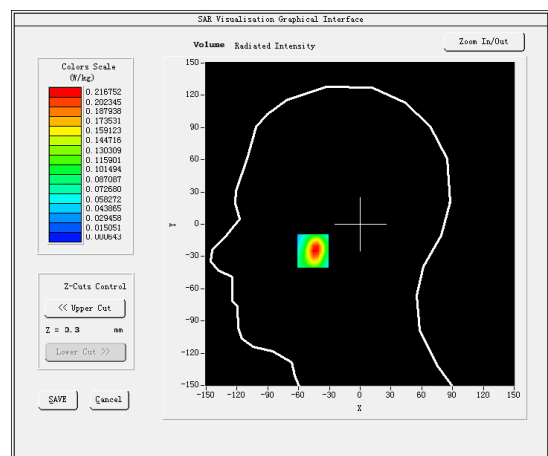

Maximum location: X=-46.00, Y=-25.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.093999
SAR 1g (W/Kg)	0.204260

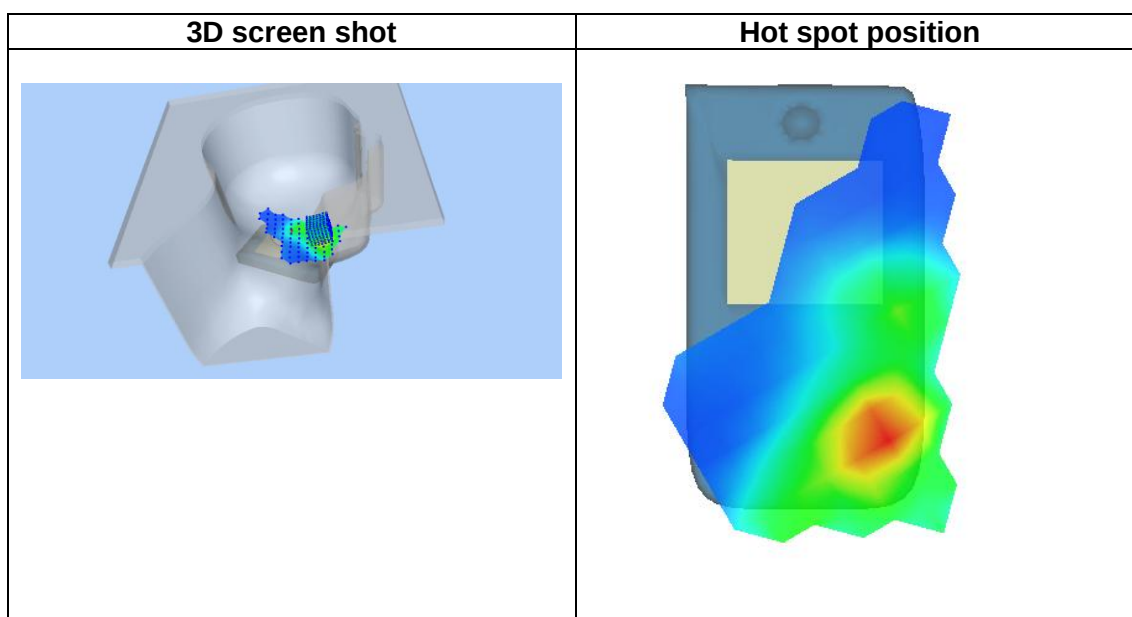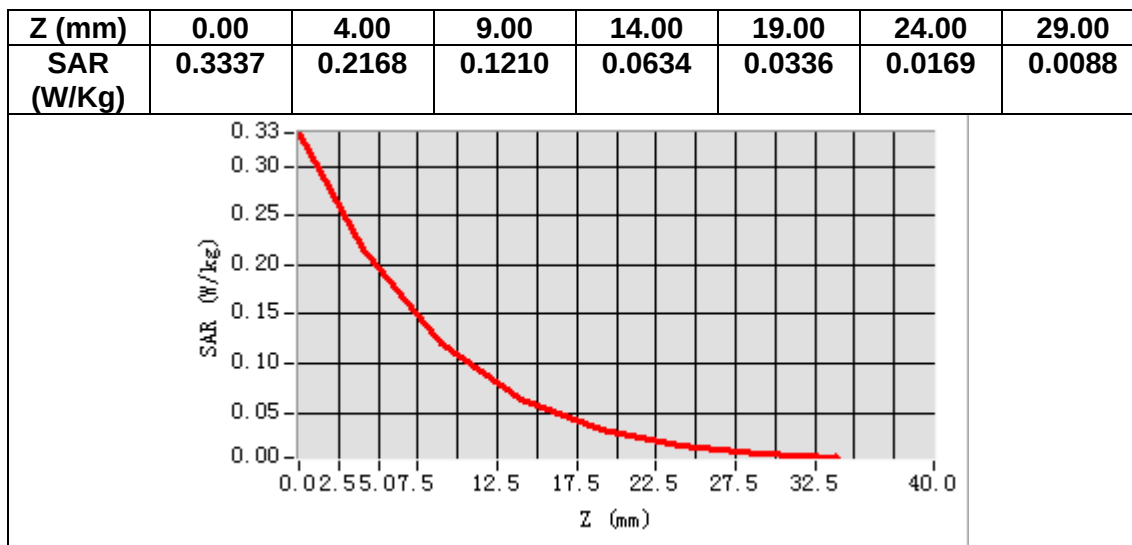

MEASUREMENT 14

Date of measurement: 10/3/2023


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>
<u>ConvF</u>	<u>1.87</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.381603
Relative permittivity (imaginary part)	13.582723
Conductivity (S/m)	1.912900
Variation (%)	-1.340000

SURFACE SAR

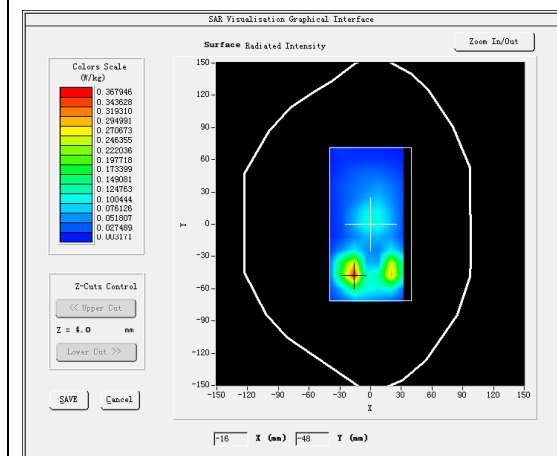



VOLUME SAR

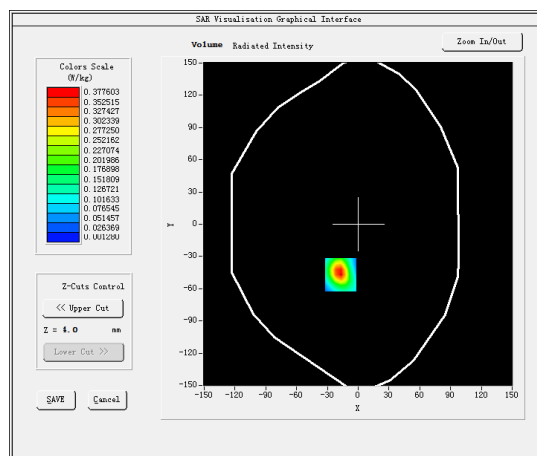

Maximum location: X=-17.00, Y=-47.00

SAR Peak: 0.66 W/kg

SAR 10g (W/Kg)	0.149333
SAR 1g (W/Kg)	0.351367

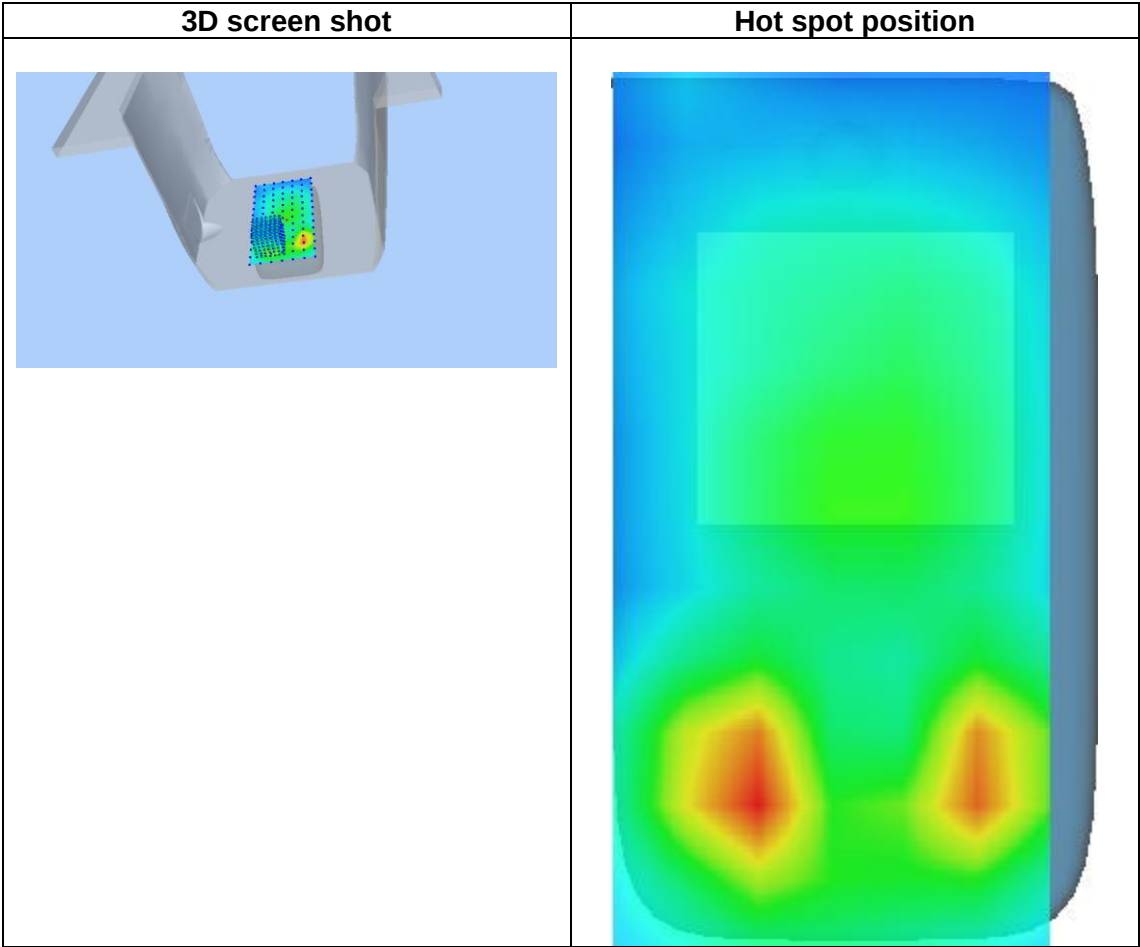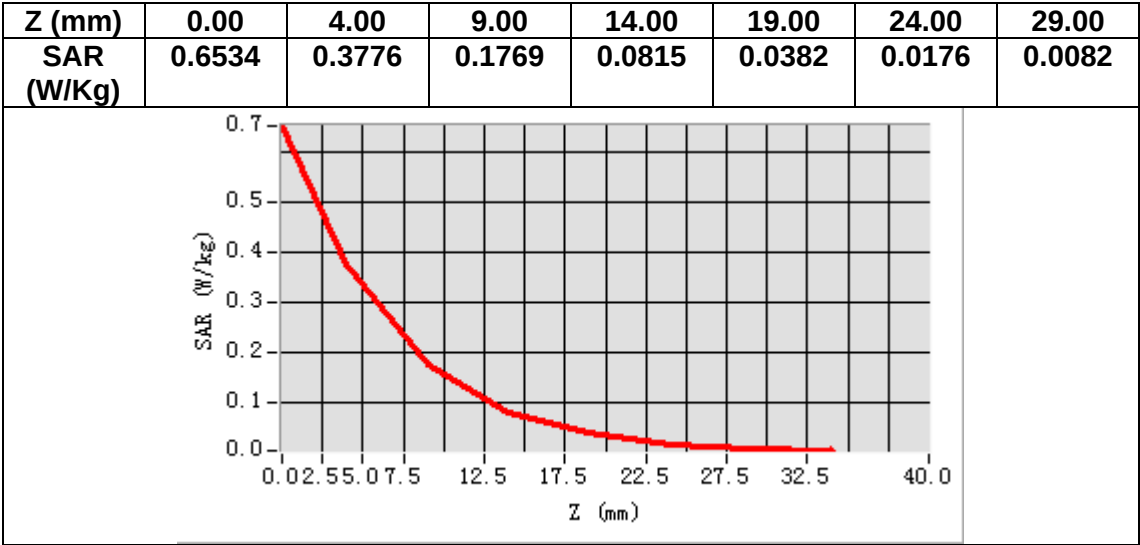

14. Appendix D. Calibration Certificate

Table of contents
E Field Probe - SN 08/16 EPGO287
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2600 MHz Dipole - SN 03/15 DIP 2G600-356
Extended Calibration Certificate



COMOSAR E-Field Probe Calibration Report

Ref : ACR.60.1.21.MVGB.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 08/16 EPG0287

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 01/10/2023



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr


Summary:

This document presents the method and results from an accredited COMOSAR E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

	Name	Function	Date	Signature
Prepared by :	Jérôme Luc	Technical Manager	1/10/2023	
Checked by :	Jérôme Luc	Technical Manager	1/10/2023	
Approved by :	Yann Toutain	Laboratory Director	1/10/2023	

Modifié le

2023.01.10

11:27:33

+01'00'

PHILIPS

	Customer Name
Distribution :	SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

Issue	Name	Date	Modifications
A	Jérôme Luc	1/10/2023	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	5
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.1	Boundary Effect	5
4	Measurement Uncertainty	6
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	8
5.4	Isotropy	9
6	List of Equipment	10



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 08/16 EPGO287
Product Condition (new / used)	Used
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.211 MΩ Dipole 2: R2=0.199 MΩ Dipole 3: R3=0.199 MΩ

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, FCC KDB865664 D01, CENELEC EN62209 and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEEE 1528, FCC KDB865664 D01, CENELEC EN62209 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.1 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta} - e^{-d_{be} + d_{step}/\delta})}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

$SAR_{uncertainty}$	is the uncertainty in percent of the probe boundary effect
d_{be}	is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre
d_{step}	is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
δ	is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;
δSAR_{be}	in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

The measured worst case boundary effect SARuncertainty[%] for scanning distances larger than 4mm is 1.0% Limit ,2%).

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Expanded uncertainty 95 % confidence level k = 2					14 %

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 SENSITIVITY IN AIR

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
0.72	0.66	0.77

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
107	110	110

Calibration curves $e_i=f(V)$ ($i=1,2,3$) allow to obtain E-field value using the formula:


$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$



COMOSAR E-FIELD PROBE CALIBRATION REPORT


Ref: ACR.60.1.21.MVGB.A

Calibration curves

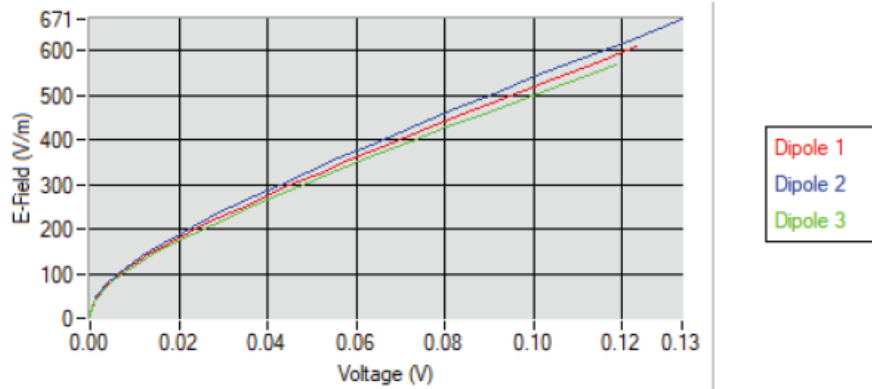

5.2 LINEARITY

Linearity

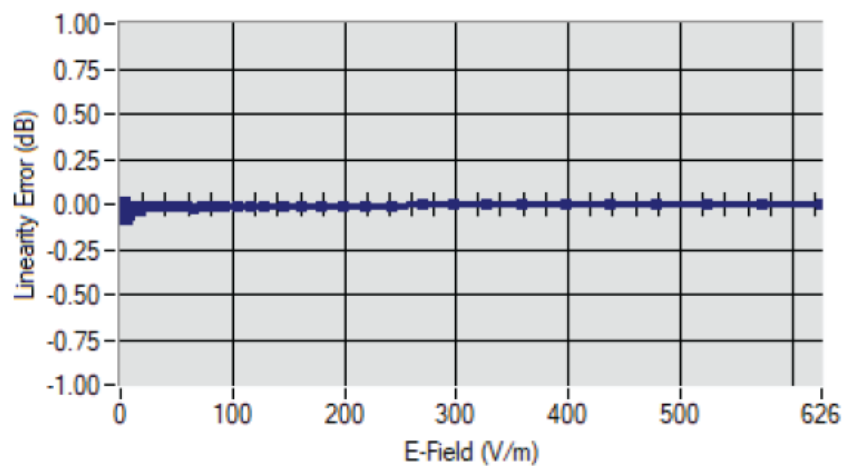

Linearity: +/-1.90% (+/-0.08dB)



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

5.3 SENSITIVITY IN LIQUID

<u>Liquid</u>	<u>Frequency</u> <u>(MHz +/-</u> <u>100MHz)</u>	<u>ConvF</u>
HL750	750	1.49
HL850	835	1.50
HL900	900	1.61
HL1800	1800	1.73
HL1900	1900	1.91
HL2000	2000	1.97
HL2300	2300	1.92
HL2450	2450	1.98
HL2600	2600	1.87
HL3300	3300	1.79
HL3500	3500	1.85
HL3700	3700	1.79
HL3900	3900	2.07
HL4200	4200	2.21
HL4600	4600	2.25
HL4900	4900	2.05
HL5200	5200	1.80
HL5400	5400	2.05
HL5600	5600	2.16
HL5800	5800	2.07

LOWER DETECTION LIMIT: 8mW/kg




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

5.4 ISOTROPY

HL1800 MHz

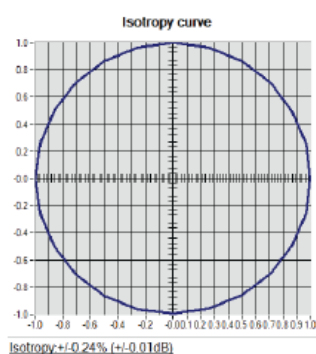



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.60.1.21.MVGB.A

6 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
Flat Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	05/2022	05/2025
Network Analyzer – Calibration kit	Rohde & Schwarz ZV-Z235	101223	05/2022	05/2025
Multimeter	Keithley 2000	1160271	02/2022	02/2025
Signal Generator	Rohde & Schwarz SMB	106589	04/2022	04/2025
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	05/2022	05/2025
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Waveguide	Mega Industries	069Y7-158-13-712	Validated. No cal required.	Validated. No cal required.
Waveguide Transition	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Waveguide Termination	Mega Industries	069Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44220687	05/2020	05/2023



SAR Reference Dipole Calibration Report

Ref : ACR.60.3.21.MVGB.A

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.

BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 835 MHZ

SERIAL NO.: SN 03/15 DIP0G835-347

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon

29280 PLOUZANE - FRANCE

Calibration date: 03/01/2021



Accreditations #2-6789 and #2-6814
Scope available on www.cofrac.fr

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed at MVG, using the COMOSAR test bench. The test results covered by accreditation are traceable to the International System of Units (SI).