



FCC RADIO TEST REPORT

FCC ID: 2AC343396993T702C

Of

Product Name: WCDMA Smart Phone
Brand Name: Cellacom
Model No.: T702c
Series Model: T702x(x for cdefg)
Test Report Number: STS1409023 F01

Issued for

Cellacom incorporation

20955 pathfinder road, ste 200, diamond bar, ca 91765, USA China

Issued by

Shenzhen STS Test Services Co., Ltd.

**1/F, Building 2, Zhuoke Science Park, Chongqing Road, Fuyong,
Baoan District, Shenzhen, China**

TEL: +86-755 6119 6328

FAX: +86-755 6119 6328

E-mail: sts@stsapp.com

TEST RESULT CERTIFICATION

Applicant's name : Cellacom incorporation
Address..... : 20955 pathfinder road, ste 200, diamond bar, ca 91765, USA
Manufacture's Name : Cellacom incorporation
Address..... : 20955 pathfinder road, ste 200, diamond bar, ca 91765, USA
Product name..... : WCDMA Smart Phone
Band name : Cellacom
Model and/or type reference : T702c
Standards..... : FCC Part 22H and 24E
Test procedure: ANSI C63.4-2003

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests ... Sep 19, 2014 ~ Sep 26, 2014

Date of Issue Sep 27, 2014

Test Result..... **Pass**

Testing Engineer :




(Tony Liu)

Technical Manager :



(Vita Li)

Authorized Signatory :



(Bovey Yang)



TABLE OF CONTENTS

1.1 PRODUCT DESCRIPTION.....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 MEASUREMENT INSTRUMENTS	5
1.6 SPECIAL ACCESSORIES	5
1.7 EQUIPMENT MODIFICATIONS	5
2. SYSTEM TEST CONFIGURATION	6
2.1 EUT CONFIGURATION.....	6
2.2 EUT EXERCISE.....	6
2.3 GENERAL TECHNICAL REQUIREMENTS	6
2.4 CONFIGURATION OF EUT SYSTEM.....	7
3. SUMMARY OF TEST RESULTS	8
4. DESCRIPTION OF TEST MODES	8
5. OUTPUT POWER	9
5.1 CONDUCTED OUTPUT POWER.....	9
5.2 RADIATED OUTPUT POWER	14
6. SPURIOUS EMISSION	18
6.1 CONDUCTED SPURIOUS EMISSION	18
6.2 RADIATED SPURIOUS EMISSION.....	20
7. FREQUENCY STABILITY.....	26
7.1 MEASUREMENT METHOD	26
7.2 PROVISIONS APPLICABLE.....	26
7.3 MEASUREMENT RESULT	27
8. OCCUPIED BANDWIDTH	31
8.1 MEASUREMENT METHOD.....	31
8.2 PROVISIONS APPLICABLE.....	31

8.3 MEASUREMENT RESULT	31
9. EMISSION BANDWIDTH.....	34
9.1 MEASUREMENT METHOD	34
9.2 PROVISIONS APPLICABLE.....	34
9.3 MEASUREMENT RESULT	34
10. BAND EDGE	37
10.1 MEASUREMENT METHOD	37
10.2 PROVISIONS APPLICABLE.....	37
10.3 MEASUREMENT RESULT.....	37
APPENDIX I	38
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION.....	38
APPENDIX II	62
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)	62
EMISSION BANDWIDTH (-26DBC)	62
APPENDIX III	83
TEST PLOTS FOR BAND EDGES.....	83
APPENDIX IV	94
PHOTOGRAPHS OF TEST SETUP	94

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	WCDMA Smart Phone
Hardware version:	--
Software version:	--
FCC ID:	2AC343396993T702C
Frequency Bands:	<input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 (U.S. Bands) <input type="checkbox"/> GSM 900 <input type="checkbox"/> DCS 1800 (Non-U.S. Bands) U.S. Bands: <input checked="" type="checkbox"/> UMTS FDD Band II <input checked="" type="checkbox"/> UMTS FDD Band V Non-U.S. Bands: <input type="checkbox"/> UMTS FDD Band I <input type="checkbox"/> UMTS FDD Band VIII
Bluetooth	Frequency: 2402 – 2480 MHz Modulation: GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps), 8-DPSK(3Mbps)
Antenna:	PIFA Antenna
Antenna gain:	0 dBi
Power Supply:	DC 3.7V by battery or DC 5.0V supplied by adapter
Battery parameter:	DC 3.7V/1300mAh
Adapter Input:	AC100-240V, 50-60Hz, 200mA
Adapter Output:	DC 5.0V, 1000mA
GPRS/EDGE Class	Multi-Class12
Extreme Vol. Limits:	DC3.4 V to 4.2 V (Nominal DC3.7 V)
Extreme Temp. Tolerance	-10°C to +50°C
** Note: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AC343396993T702C** filing to comply with the FCC Part 22H&24E.

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:
Shenzhen STS Test Services Co., Ltd.

1/F, Building 2, Zhuoke Science Park, Chongqing Road, Fuyong, Baoan District, Shenzhen, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.
FCC Registration No.: 842334

1.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	NEXT CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2015.6.26
TEST RECEIVER	R&S	ESCI	A0304218	2015.6.26
COMMUNICATION TESTER	AGILENT	8960	3104A03367	2015.7.21
COMMUNICATION TESTER	R&S	CMU200	A0304247	2015.7.21
TEST RECEIVER	R&S	FCKL1528	A0304230	2015.6.26
LISN	SCHWARZBECK	NSLK8127	A0304233	2015.6.26
CLIMATE CHAMBER	ALBATROSS	--	--	2015.6.26
Loop Antenna	Daze	ZN30900N	SEL0097	2015.6.26
Biological Antenna	A.H. Systems Inc.	SAS-521-4	N/A	2015.4.26
Horn Antenna	EM	EM-AH-10180	N/A	2015.4.26

1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted output power	22.913(a) / 24.232 (b)
		Radiated output power	
2	Spurious Emission	Conducted spurious emission	2.1051 / 22.917 / 24.238
		Radiated spurious emission	
3	Frequency Stability		2.1055 /24.235
4	Occupied Bandwidth		2.1049 (h)(i)
5	Emission Bandwidth		22.917(b) / 24.238 (b)
6	Band Edge		22.917(b) / 24.238 (b)

2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	WCDMA Smart Phone	T702c	FCC ID: 2AC343396993T702C	EUT

*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

3. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	22.913(a) / 24.232 (b)	Pass
		Radiated Output Power		
2	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238	Pass
		Radiated Spurious Emission		
3	Mains Conducted Emission		15.107 / 15.207	Pass
4	Frequency Stability		2.1055 / 24.235	Pass
5	Occupied Bandwidth		2.1049 (h)(i)	Pass
6	Emission Bandwidth		22.917(b) / 24.238 (b)	Pass
7	Band Edge		22.917(b) / 24.238 (b)	Pass

4. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS/EDGE850, GSM/GPRS/EDGE1900, HSDPA band V, HSUPA band V And HSDPA band II, HSUPA band II modes have been tested during the test.

the worst condition (GPRS/EDGE 850) be recorded in the test report if no other modes test data.

5. OUTPUT POWER

5.1 CONDUCTED OUTPUT POWER

5.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GPRS/EDGE850, GPRS/EDGE1900, HSDPA band V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

5.1.2 MEASUREMENT RESULT

Conducted Output Power Limits for GSM 850 MHZ		
Mode	Nominal Peak Power	Tolerance(dB)
GSM850	32 dBm	+/- 1

Conducted Output Power Limits for PCS 1900 MHZ		
Mode	Nominal Peak Power	Tolerance(dB)
GSM1900	27 dBm	+/- 1

Conducted Output Power Limits for WCDMA band V /II		
Mode	Nominal Peak Power	Tolerance(dB)
WCDMA band V	22.5 dBm	+/-1
WCDMA band II	20.5 dBm	+/-1

GSM 850:

Mode	Frequency (MHz)	Peak Power
GSM850	824.2	32.56
	836.6	32.63
	848.8	32.43
GPRS850 (1 Slot)	824.2	32.54
	836.6	32.46
	848.8	32.65
GPRS850 (2 Slot)	824.2	30.54
	836.6	30.46
	848.8	30.43
GPRS850 (3 Slot)	824.2	28.57
	836.6	28.34
	848.8	28.54
GPRS850 (4 Slot)	824.2	26.41
	836.6	26.42
	848.8	26.54

PCS 1900:

Mode	Frequency (MHz)	Peak Power
GSM1900	1850.2	27.32
	1880	27.45
	1909.8	27.52
GPRS1900 (1 Slot)	1850.2	27.51
	1880	27.43
	1909.8	27.46
GPRS1900 (2 Slot)	1850.2	25.45
	1880	25.65
	1909.8	25.54
GPRS1900 (3 Slot)	1850.2	23.75
	1880	23.73
	1909.8	23.67
GPRS1900 (4 Slot)	1850.2	22.64
	1880	22.63
	1909.8	22.66

UMTS BAND II

Mode	Frequency (MHz)	Peak Power
WCDMA 1900	1852.4	21.68
	1880	21.87
	1907.6	21.65
HSDPA Subtest 1	1852.4	21.15
	1880	21.22
	1907.6	21.41
HSDPA Subtest 2	1852.4	20.38
	1880	20.46
	1907.6	20.52
HSDPA Subtest 3	1852.4	19.36
	1880	19.42
	1907.6	19.42
HSDPA Subtest 4	1852.4	19.54
	1880	19.63
	1907.6	19.71
HSUPA Subtest 1	1852.4	20.48
	1880	20.76
	1907.6	20.54
HSUPA Subtest 2	1852.4	20.36
	1880	20.50
	1907.6	20.51
HSUPA Subtest 3	1852.4	19.43
	1880	19.57
	1907.6	19.52
HSUPA Subtest 4	1852.4	20.03
	1880	20.07
	1907.6	20.12
HSUPA Subtest 5	1852.4	18.91
	1880	18.65
	1907.6	18.61

UMTS BAND V

Mode	Frequency (MHz)	Peak Power
WCDMA 850	826.4	22.32
	836.6	22.31
	846.6	22.43
HSDPA Subtest 1	826.4	22.31
	836.6	22.22
	846.6	22.13
HSDPA Subtest 2	826.4	20.87
	836.6	20.57
	846.6	20.65
HSDPA Subtest 3	826.4	19.76
	836.6	19.78
	846.6	19.76
HSDPA Subtest 4	826.4	19.44
	836.6	19.56
	846.6	19.57
HSUPA Subtest 1	826.4	20.58
	836.6	20.61
	846.6	20.61
HSUPA Subtest 2	826.4	19.75
	836.6	19.83
	846.6	19.86
HSUPA Subtest 3	826.4	18.87
	836.6	18.92
	846.6	18.86
HSUPA Subtest 4	826.4	20.43
	835.6	20.52
	846.6	20.46
HSUPA Subtest 5	826.4	18.56
	836.6	18.65
	846.6	18.71

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$\text{MAX}(CM-1,0)$
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

5.2 RADIATED OUTPUT POWER

5.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $AR_{pl} = P_{in} + 2.15 - P_r$. The AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.
9. Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Mode	Nominal Peak Power
GSM 850	≤ 38.45 dBm (7W)
PCS 1900	≤ 33 dBm (2W)
UMTS BAND V	≤ 38.45 dBm (7W)
UMTS BAND II	≤ 33 dBm (2W)

5.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM850	824.2	27.30	Horizontal	Pass
	824.2	29.35	Vertical	Pass
	836.6	27.19	Horizontal	Pass
	836.6	29.25	Vertical	Pass
	848.8	27.27	Horizontal	Pass
	848.8	29.34	Vertical	Pass

Radiated Power (ERP) for GPRS 850 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GPRS850	824.2	26.80	Horizontal	Pass
	824.2	28.73	Vertical	Pass
	836.6	26.65	Horizontal	Pass
	836.6	28.77	Vertical	Pass
	848.8	26.75	Horizontal	Pass
	848.8	28.83	Vertical	Pass

Radiated Power (E. R.P) for PCS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
PCS1900	1850.2	25.19	Horizontal	Pass
	1850.2	27.10	Vertical	Pass
	1880.0	25.22	Horizontal	Pass
	1880.0	27.02	Vertical	Pass
	1909.8	25.13	Horizontal	Pass
	1909.8	27.19	Vertical	Pass

Radiated Power (E. R.P) for GPRS 1900 MHZ				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GPRS 1900	1850.2	24.64	Horizontal	Pass
	1850.2	26.64	Vertical	Pass
	1880.0	24.76	Horizontal	Pass
	1880.0	26.73	Vertical	Pass
	1909.8	24.67	Horizontal	Pass
	1909.8	26.76	Vertical	Pass

Radiated Power (E.R.P) for UMTS band V				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
RMC 12.2kbps	826.4	19.15	Horizontal	Pass
	836.4	20.26	Vertical	Pass
	846.6	19.21	Horizontal	Pass
	826.4	20.34	Vertical	Pass
	836.4	19.09	Horizontal	Pass
	846.6	20.23	Vertical	Pass

NOTE 1: in the part, result the worst case GPRS 1slot for GSM 850 and PCS1900, and RMC 12.2kbps for band V.

Radiated Power (E. R.P) for UMTS band II				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
RMC 12.2kbps	1852.4	19.36	Horizontal	Pass
	1880	20.35	Vertical	Pass
	1907.6	19.15	Horizontal	Pass
	1852.4	20.29	Vertical	Pass
	1880	19.26	Horizontal	Pass
	1907.6	20.36	Vertical	Pass

6. SPURIOUS EMISSION

6.1 CONDUCTED SPURIOUS EMISSION

6.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.

2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM/GPRS 850 MHz	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS/ GPRS 1900 MHz	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

Typical Channels for testing of UMTS band V	
Channel	Frequency (MHz)
4132	826.4
4183	836.6
4233	846.6

Typical Channels for testing of UMTS band II	
Channel	Frequency (MHz)
9262	1852.4
9400	1880
9538	1907.6

6.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

6.1.3 MEASUREMENT RESULT

PLEASE REFER TO : APPENDIX I TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

- Note:**
1. Below 30MHz no Spurious found and The GSM modes is the worst condition.
 2. As no emission found in standby or receive mode, no recording in this report.


6.2 RADIATED SPURIOUS EMISSION

6.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS850, GPRS1900, HSDPA band V,) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = Rx \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$ The SA is calibrated using following setup.

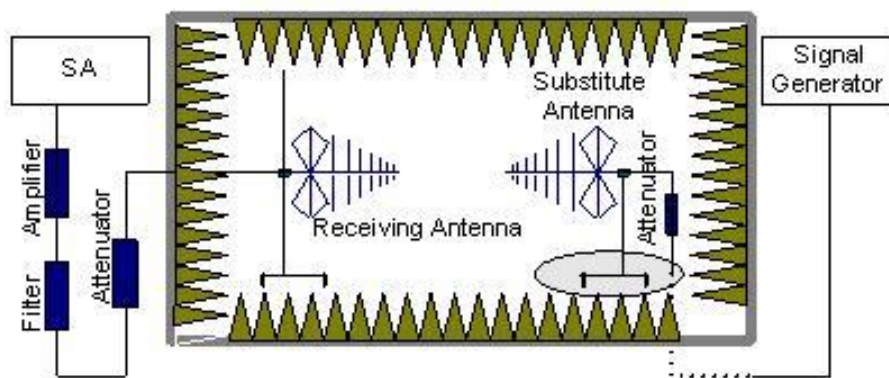

b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

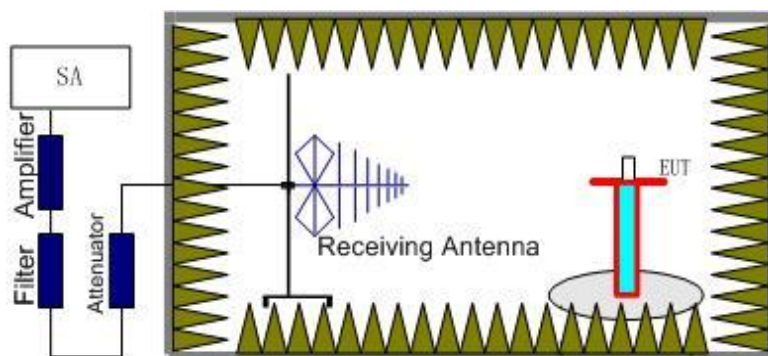

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of

the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band V (4132 (826.4MHz), 4183(835MHz) and 4233 (846.6MHz)). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + A_{Rpl}$

6.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Note: only result the worst condition of each test mode:

6.2.3 MEASUREMENT RESULT

GSM 850:

The Worst Test Results Channel 128/824.2 MHz						
Frequency(MHz)	Power(dBm)	AR _{pl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
1648.331	-35.45	-4.65	-40.1	-13	-27.1	Horizontal
2472.562	-36.43	-2.21	-38.64	-13	-25.64	Horizontal
3296.770	-31.23	0.21	-31.02	-13	-18.02	Horizontal
1648.392	-38.56	-4.65	-43.21	-13	-30.21	Vertical
2472.560	-41.32	-2.21	-43.53	-13	-30.53	Vertical
3296.725	-40.12	0.21	-40.33	-13	-27.33	Vertical
The Worst Test Results Channel 190/836.6 MHz						
Frequency(MHz)	Power(dBm)	AR _{pl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
1673.195	-36.54	-4.65	-41.19	-13	-28.19	Horizontal
2509.786	-42.43	-2.21	-44.64	-13	-31.64	Horizontal
3346.347	-31.33	0.21	-31.12	-13	-18.12	Horizontal
1673.193	-37.43	-4.65	-42.08	-13	-29.08	Vertical
2509.746	-32.51	-2.21	-34.72	-13	-21.72	Vertical
3346.397	-36.54	0.21	-36.33	-13	-23.33	Vertical
The Worst Test Results Channel 251/848.8 MHz						
Frequency(MHz)	Power(dBm)	AR _{pl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
1697.545	-35.23	-4.65	-39.88	-13	-26.88	Horizontal
2546.333	-43.54	-2.21	-45.75	-13	-32.75	Horizontal
3395.174	-45.43	0.21	-45.22	-13	-32.22	Horizontal
1697.535	-35.34	-4.65	-39.99	-13	-26.99	Vertical
2546.384	-41.24	-2.21	-43.45	-13	-30.45	Vertical
3395.139	-36.35	0.21	-36.14	-13	-23.14	Vertical

Note: Below 30MHZ no Spurious found and The GSM modes is the worst condition.

PCS 1900:

The Worst Test Results for Channel 512/1850.2MHz					
Power(dBm)	ARpl (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
-36.12	0.33	-35.79	-13	-22.79	Horizontal
-43.43	4.01	-39.42	-13	-26.42	Horizontal
-42.23	10.7	-32.33	-13	-19.33	Horizontal
-34.63	0.33	-34.01	-13	-21.01	Vertical
-45.43	4.01	-30.7	-13	-17.7	Vertical
-41.83	10.7	-31.13	-13	-18.13	Vertical
The Worst Test Results for Channel 661/1880.0MHz					
Power(dBm)	ARpl (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
-36.54	0.33	-36.21	-13	-23.21	Horizontal
-52.13	4.01	-48.12	-13	-35.12	Horizontal
-43.45	10.7	-32.75	-13	-19.75	Horizontal
-31.65	0.33	-31.32	-13	-18.32	Vertical
-43.23	4.01	-39.22	-13	-26.22	Vertical
-33.59	10.7	-22.89	-13	-9.89	Vertical
The Worst Test Results for Channel 810/1909.8MHz					
Power(dBm)	ARpl (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
-32.14	0.33	-31.81	-13	-18.81	Horizontal
-45.23	4.01	-41.22	-13	-28.22	Horizontal
-37.24	10.7	-26.54	-13	-13.54	Horizontal
-32.54	0.33	-32.21	-13	-19.21	Vertical
-45.54	4.01	-41.53	-13	-28.53	Vertical
-38.34	10.7	-27.64	-13	-14.64	Vertical

Note: Below 30MHZ no Spurious found and The GSM modes is the worst condition.

UMTS band V

Channel 4132/824.6MHz						
Frequency(MHz)	Power(dBm)	ARpl (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
1652.823	-34.43	-4.65	-39.08	-13	-26.08	Horizontal
2479.232	-35.51	-2.21	-37.72	-13	-24.72	Horizontal
1652.823	-34.63	-4.65	-39.28	-13	-26.28	Vertical
2479.232	-31.43	-2.21	-33.64	-13	-20.64	Vertical
Channel 4183/836.6MHz						
Frequency(MHz)	Power(dBm)	ARpl (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
1673.223	-31.43	-4.65	-36.08	-13	-23.08	Horizontal
2509.812	-35.23	-2.21	-37.44	-13	-24.44	Horizontal
1673.223	-27.42	-4.65	-32.07	-13	-19.07	Vertical
2509.812	-35.43	-2.21	-37.64	-13	-24.64	Vertical
Channel 4233/846.6MHz						
Frequency(MHz)	Power(dBm)	ARpl (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
1693.223	-36.63	-4.65	-41.28	-13	-28.28	Horizontal
2539.812	-38.23	-2.21	-40.44	-13	-27.44	Horizontal
1693.223	-27.65	-4.65	-32.3	-13	-19.3	Vertical
2539.812	-35.32	-2.21	-37.53	-13	-24.53	Vertical

:

Note: Below 30MHZ no Spurious found and The RMC modes is the worst condition.

UMTS band II

Channel 9262/1852.4MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
3704.811	-34.23	0.33	-33.9	-13	-20.9	Horizontal
5557.224	-35.54	4.01	-31.53	-13	-18.53	Horizontal
3704.811	-34.32	0.33	-33.99	-13	-20.99	Vertical
5557.224	-31.23	4.01	-27.22	-13	-14.22	Vertical
Channel 9400/1880MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
3760.127	-31.54	0.33	-31.21	-13	-18.21	Horizontal
5640.221	-35.43	4.01	-31.42	-13	-18.42	Horizontal
3760.127	-27.23	0.33	-26.9	-13	-13.9	Vertical
5640.221	-35.54	4.01	-31.53	-13	-18.53	Vertical
Channel 9538/1907.4MHz						
Frequency(MHz)	Power(dBm)	A _{Rpl} (dBm)	P _{Mea} (dBm)	Limit (dBm)	Margin	Polarity
3815.221	-36.21	0.33	-35.88	-13	-22.88	Horizontal
5722.812	-38.43	4.01	-34.42	-13	-21.42	Horizontal
3815.221	-27.52	0.33	-27.19	-13	-14.19	Vertical
5722.812	-35.43	4.01	-31.42	-13	-18.42	Vertical

:

Note: Below 30MHz no Spurious found and The RMC modes is the worst condition.

7. FREQUENCY STABILITY

7.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 . Measure the carrier frequency at room temperature.
- 2 .Subject the EUT to overnight soak at -10°C.
- 3 .With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GSM 850 band and channel 4183 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 .Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 .Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 .Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 .Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 .At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

7.2 PROVISIONS APPLICABLE

7.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

7.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

7.3 MEASUREMENT RESULT

Frequency Error Against Voltage for GSM 850 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	26	0.031
3.7	27	0.032
4.2	24	0.029

0	31	0.037
10	27	0.032
20	28	0.033
30	-26	-0.031
40	31	0.037
50	32	0.038

Frequency Error Against Voltage for GPRS850 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	23	0.028
3.7	27	0.032
4.2	-26	-0.031

Frequency Error Against Temperature for GPRS850 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	-31	-0.037
0	24	0.029
10	-24	-0.029
20	28	0.033
30	-24	-0.029
40	34	0.041
50	34	0.041

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for GSM1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	27	0.014
3.7	-24	-0.013
4.2	-22	-0.012

Frequency Error Against Temperature for GSM1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	27	0.014
0	25	0.013
10	-24	-0.013
20	26	0.014
30	31	0.016
40	27	0.014
50	-25	-0.013

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for GPRS1900 band		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	23	0.012
3.7	27	0.014
4.2	34	0.018

Frequency Error Against Temperature for GPRS1900 band		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	27	0.014
0	24	0.013
10	32	0.017
20	29	0.015
30	27	0.014
40	32	0.017
50	26	0.014

Note: The EUT doesn't work below -10°C

Frequency Error Against Voltage for UMTS band V		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	31	0.037
3.7	26	0.031
4.2	-28	-0.034

Frequency Error Against Temperature for UMTS band V		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	31	0.037
0	45	0.054
10	27	0.032
20	26	0.031
30	25	0.030
40	23	0.028
50	26	0.031

Note: The EUT doesn't work below -10°C

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	37	0.044
3.7	25	0.030
4.2	-28	-0.034

Frequency Error Against Temperature for UMTS band II		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-10	32	0.038
0	31	0.037
10	24	0.029
20	24	0.029
30	25	0.030
40	24	0.029
50	23	0.028

Note: The EUT doesn't work below -10°C

8. OCCUPIED BANDWIDTH

8.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

8.2 PROVISIONS APPLICABLE

The occupied bandwidth (99%) shall not exceed 300 KHz.

8.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	240.3095
Middle Channel	836.6	245.1860
High Channel	848.8	243.3862

Occupied Bandwidth (99%) for GPRS 850 band		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	824.2	247.7088
Middle Channel	836.6	248.8051
High Channel	848.8	247.2119

Occupied Bandwidth (99%) for GSM1900 band

Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	243.2449
Middle Channel	1880.0	245.2502
High Channel	1909.8	246.0625

Occupied Bandwidth (99%) for GPRS1900 band

Mode	Frequency(MHz)	Occupied Bandwidth (99%)(kHz)
Low Channel	1850.2	248.2181
Middle Channel	1880.0	243.3606
High Channel	1909.8	244.6123

Occupied Bandwidth (99%) for UMTS band V

Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	826.4	4.0836
Middle Channel	836.6	4.0961
High Channel	846.6	4.0780

Occupied Bandwidth (99%) for UMTS HSDPA band V

Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	826.4	4.1247
Middle Channel	836.6	4.0821
High Channel	846.6	4.1149

Occupied Bandwidth (99%) for UMTS HSUPA band V

Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	826.4	4.0985
Middle Channel	836.6	4.1073
High Channel	846.6	4.0625

Occupied Bandwidth (99%) for UMTS band II		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1852.4	4.0938
Middle Channel	1880	4.0903
High Channel	1907.4	4.1148
Occupied Bandwidth (99%) for UMTS HSDPA band II		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1852.4	4.0999
Middle Channel	1880	4.1001
High Channel	1907.4	4.1011
Occupied Bandwidth (99%) for UMTS HSUPA band II		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)(MHz)
Low Channel	1852.4	4.1165
Middle Channel	1880	4.0890
High Channel	1907.4	4.0836

9. EMISSION BANDWIDTH

9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

9.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

9.3 MEASUREMENT RESULT

Emission Bandwidth (-26dBc) for GSM850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	316.257
Middle Channel	836.6	308.335
High Channel	848.8	316.487

Emission Bandwidth (-26dBc) for GPRS850 band		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	824.2	320.208
Middle Channel	836.6	314.004
High Channel	848.8	319.896

Emission Bandwidth (-26dBc) for GSM1900 band

Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	319.535
Middle Channel	1880.0	313.651
High Channel	1909.8	315.637

Emission Bandwidth (-26dBc) for GPRS1900 band

Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)
Low Channel	1850.2	317.717
Middle Channel	1880.0	322.195
High Channel	1909.8	319.826

Emission Bandwidth (-26dBc) for UMTS band V

Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	826.4	4.673
Middle Channel	836.6	4.686
High Channel	846.6	4.673

Emission Bandwidth (-26dBc) for UMTS HSDPA band V

Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	826.4	4.673
Middle Channel	836.6	4.655
High Channel	846.6	4.667

Emission Bandwidth (-26dBc) for UMTS HSUPA band V

Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	826.4	4.645
Middle Channel	836.6	4.645
High Channel	846.6	4.674

Emission Bandwidth (-26dBc) for UMTS band II		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	1852.4	4.679
Middle Channel	1880	4.683
High Channel	1907.4	4.671
Emission Bandwidth (-26dBc) for UMTS HSDPA band II		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	1852.4	4.670
Middle Channel	1880	4.680
High Channel	1907.4	4.672
Emission Bandwidth (-26dBc) for UMTS HSUPA band II		
Mode	Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)
Low Channel	1852.4	4.665
Middle Channel	1880	4.684
High Channel	1907.4	4.659

10. BAND EDGE

10.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

10.2 PROVISIONS APPLICABLE

as Specified in FCC rules of 22.917(b) and 24.238(b)


10.3 MEASUREMENT RESULT

Please refers to Appendix III for compliance test plots for band edges

APPENDIX I


TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION

CONDUCTED EMISSION IN GSM 850 BAND
Conducted Emission Transmitting Mode CH 128 30MHz – 10GHz

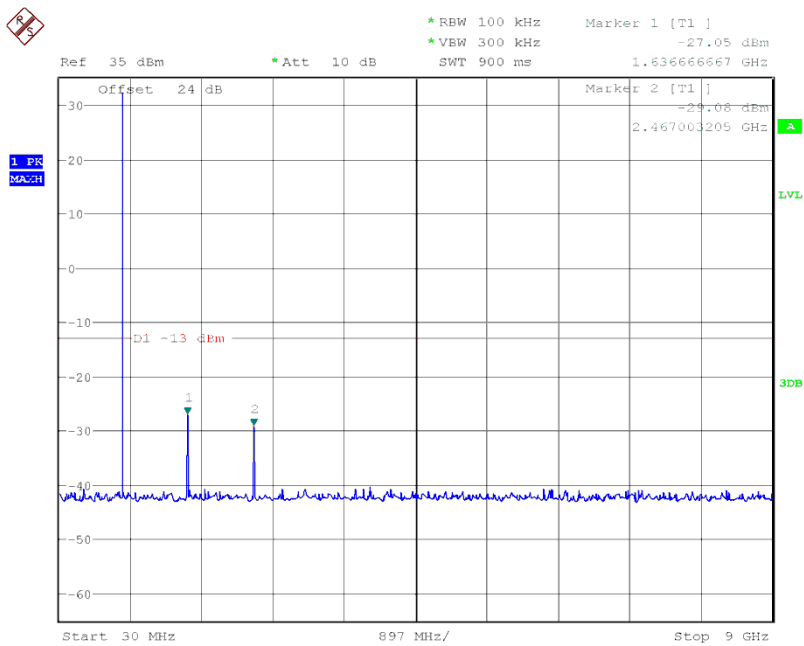


Date: 20.SEP.2014 15:26:52

Conducted Emission Transmitting Mode CH 190 30MHz – 10GHz

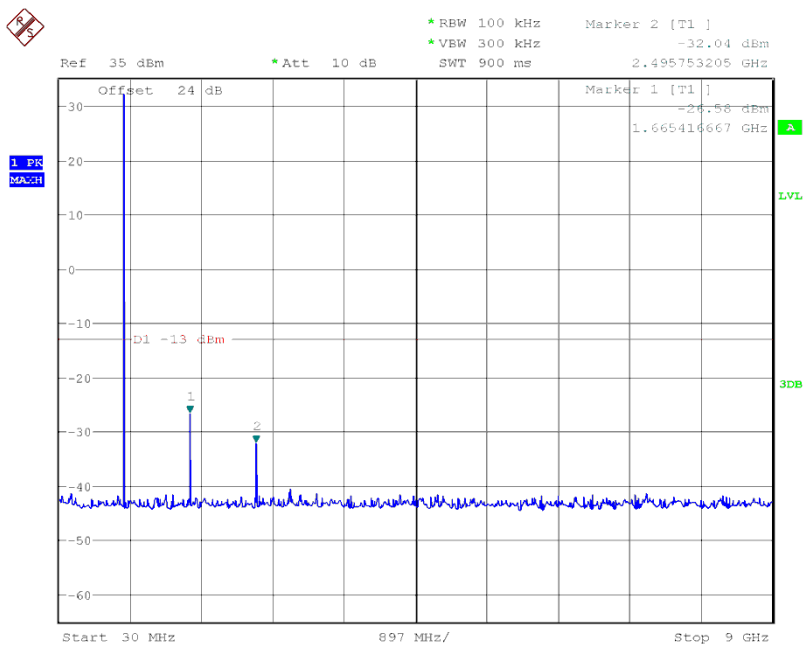


Date: 20.SEP.2014 15:27:28

Conducted Emission Transmitting Mode CH 251 30MHz – 10GHz

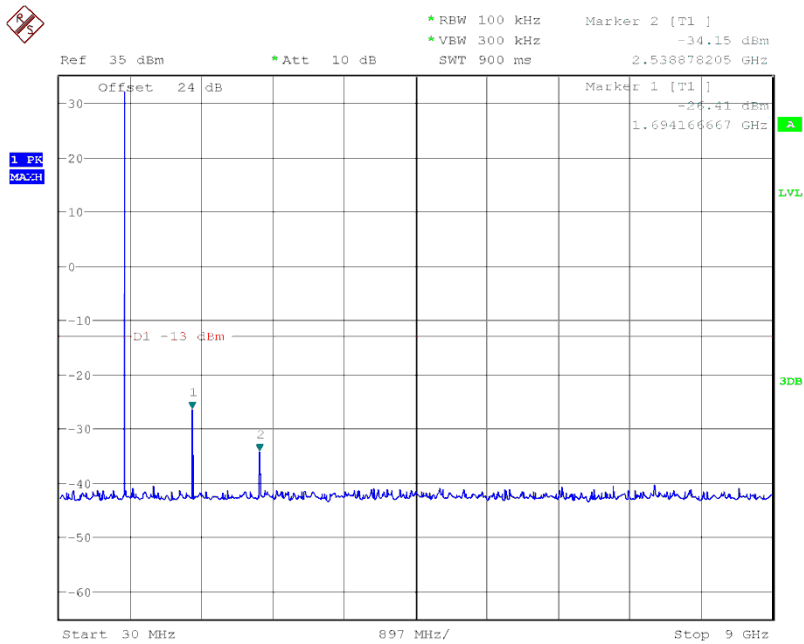


Date: 20.SEP.2014 15:28:31


CONDUCTED EMISSION IN GPRS 850 BAND
Conducted Emission Transmitting Mode CH 128 30MHz – 10GHz

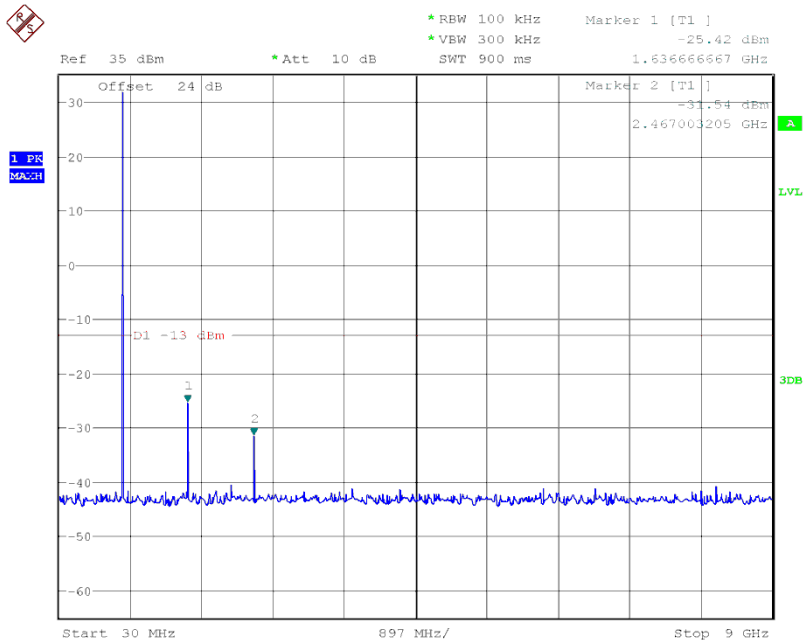

Conducted Emission Transmitting Mode CH 190 30MHz – 10GHz

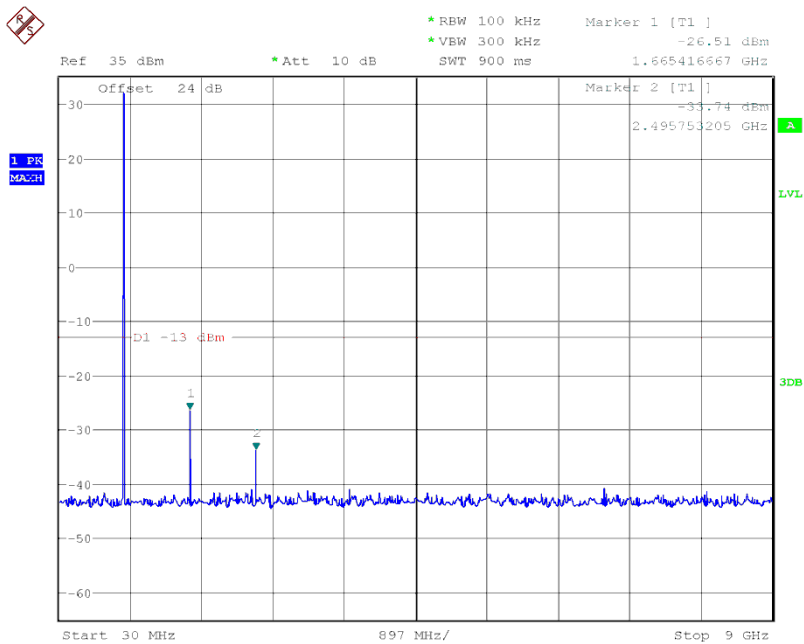


Conducted Emission Transmitting Mode CH 251 30MHz – 10GHz

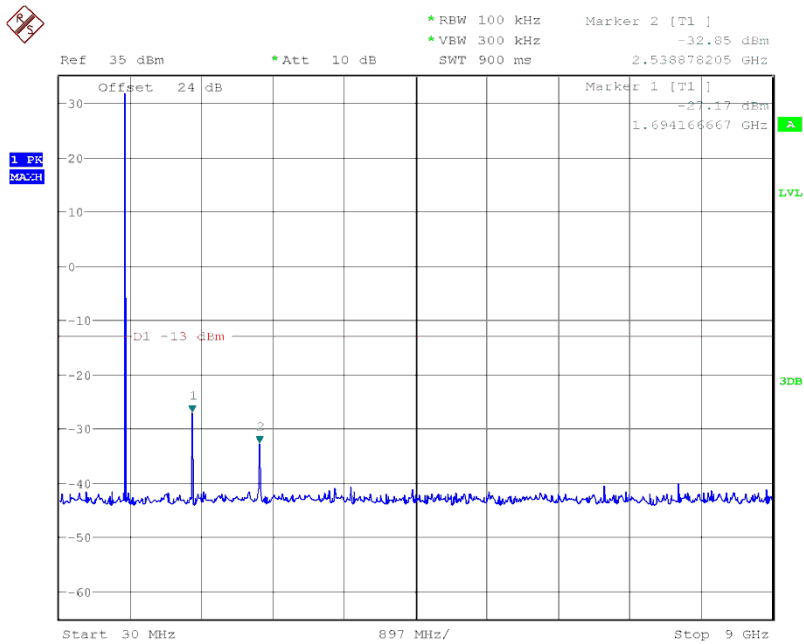

Date: 20.SEP.2014 15:34:49

CONDUCTED EMISSION IN GSM1900 BAND
Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

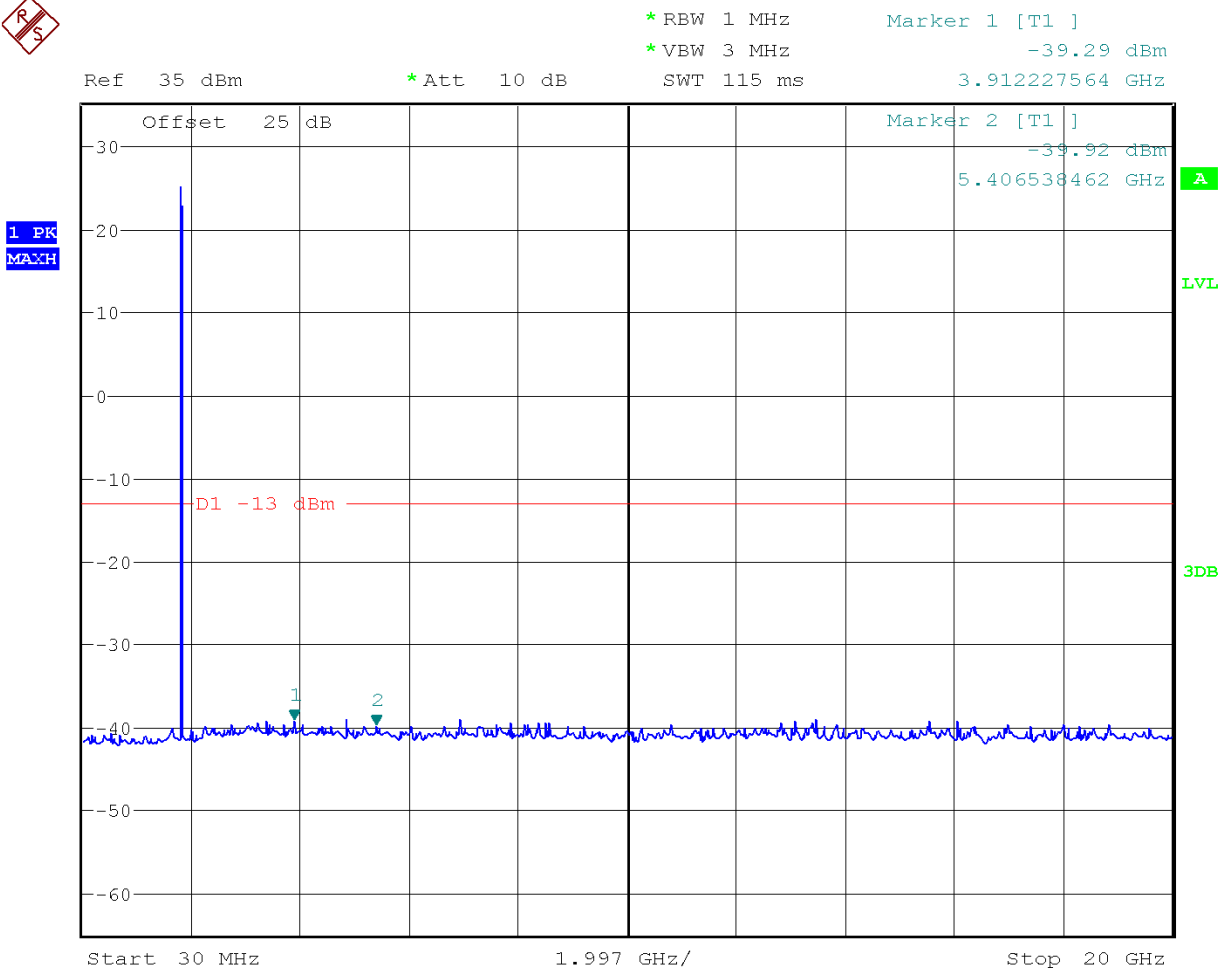


Date: 20.SEP.2014 15:19:43

Conducted Emission Transmitting Mode CH 661 30MHz – 20GHz




1 PK
MAXH

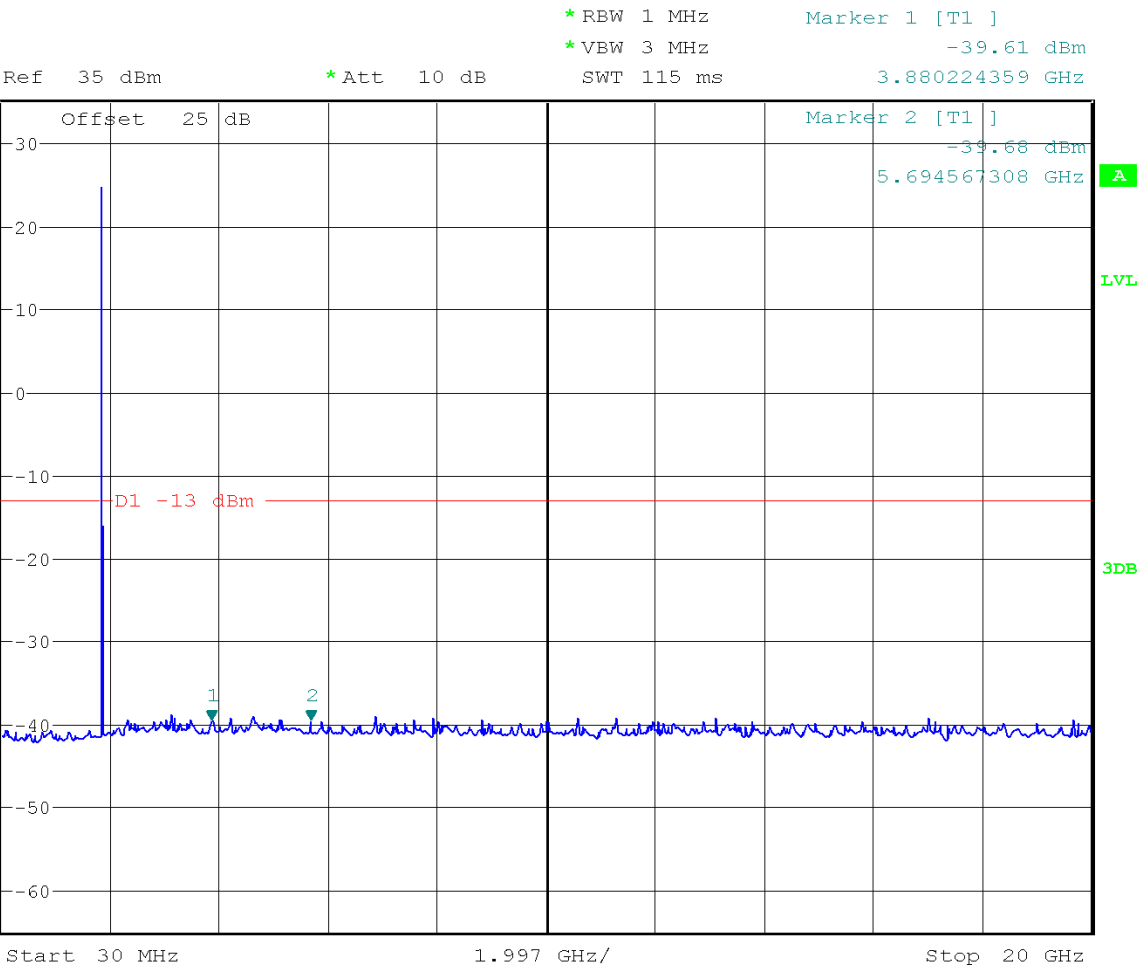


Date: 20.SEP.2014 15:20:29

Conducted Emission Transmitting Mode CH 810 30MHz – 20GHz

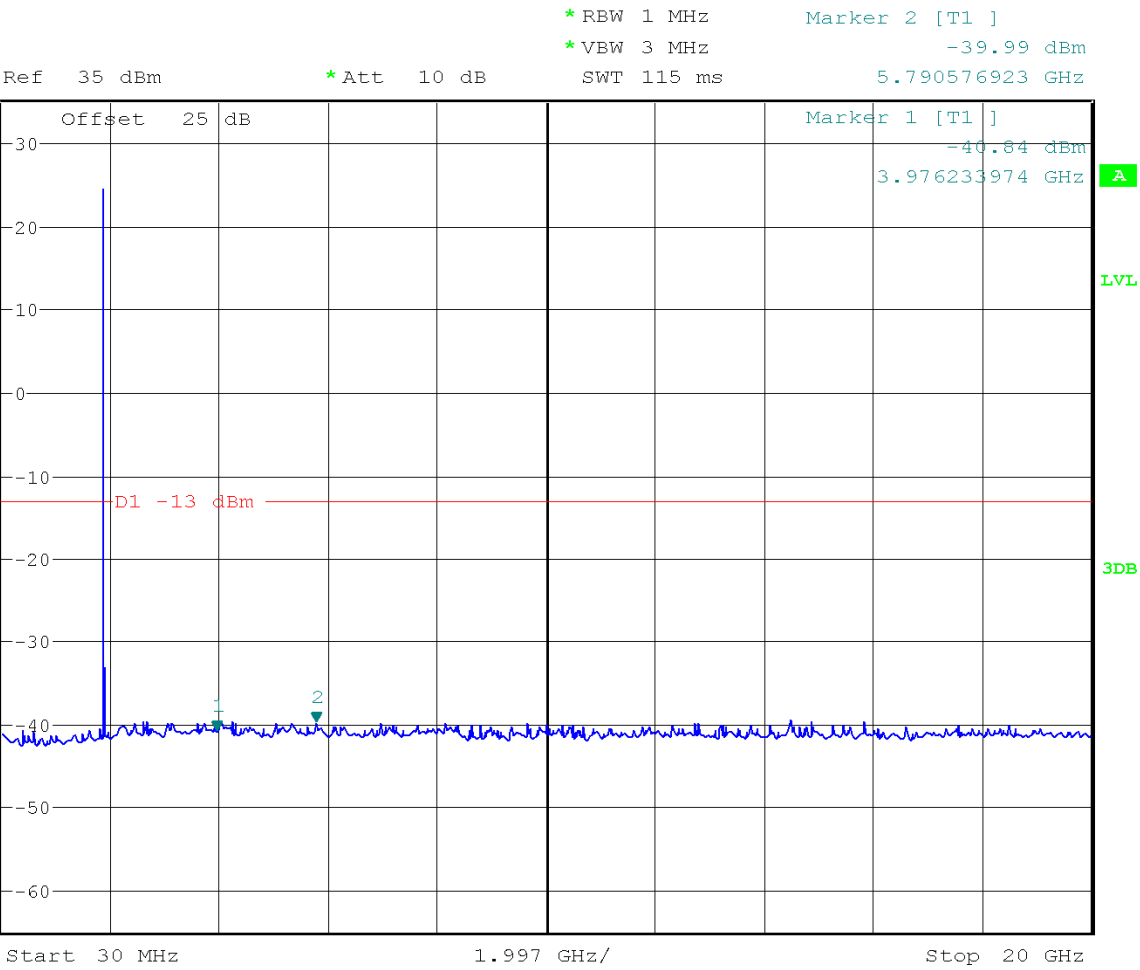

Date: 20.SEP.2014 15:21:06

CONDUCTED EMISSION IN GPRS1900 BAND
Conducted Emission Transmitting Mode CH 512 30MHz – 20GHz

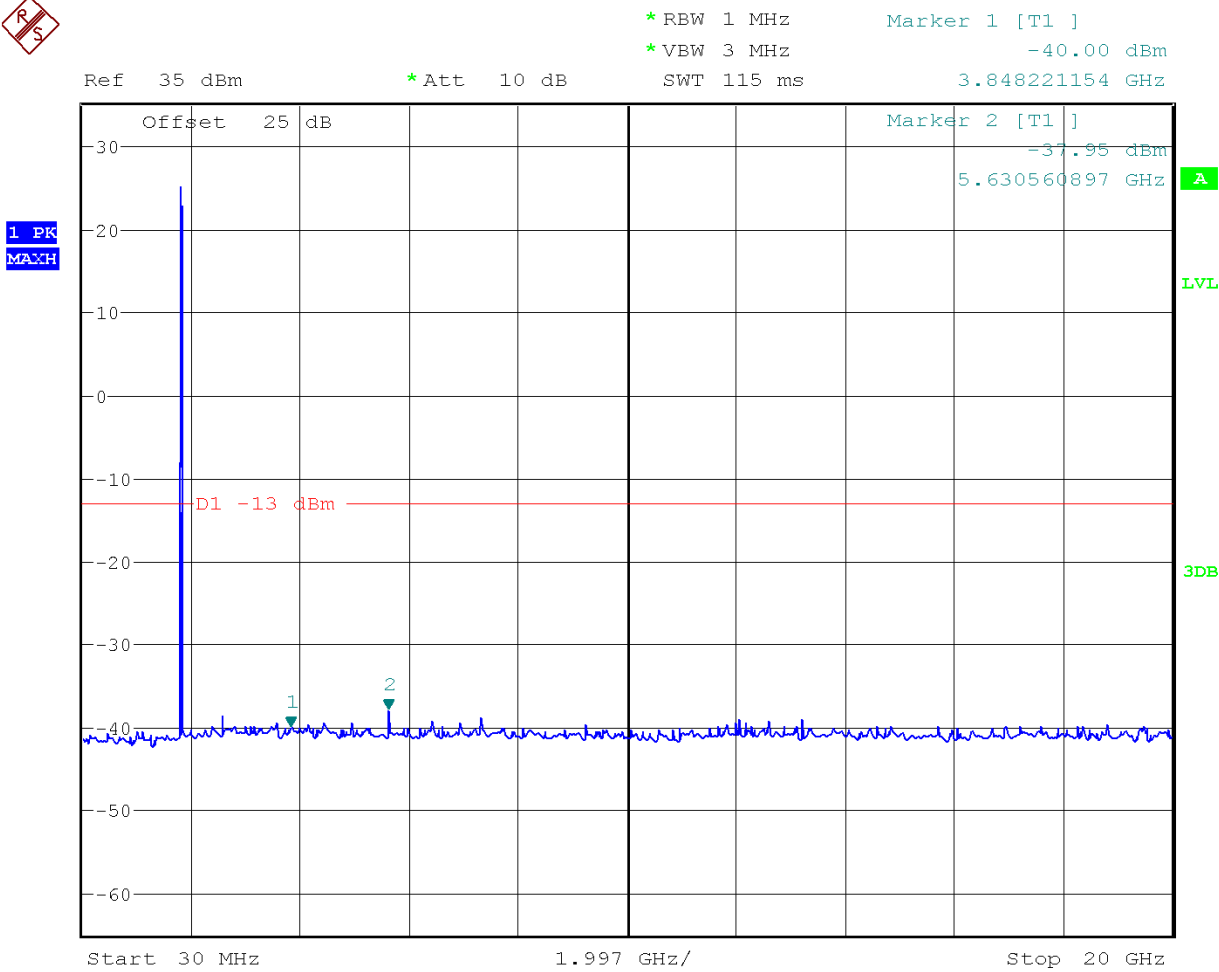


Date: 20.SEP.2014 15:23:22

Conducted Emission Transmitting Mode CH 661 30MHz – 20GHz




1 PK
MAXH

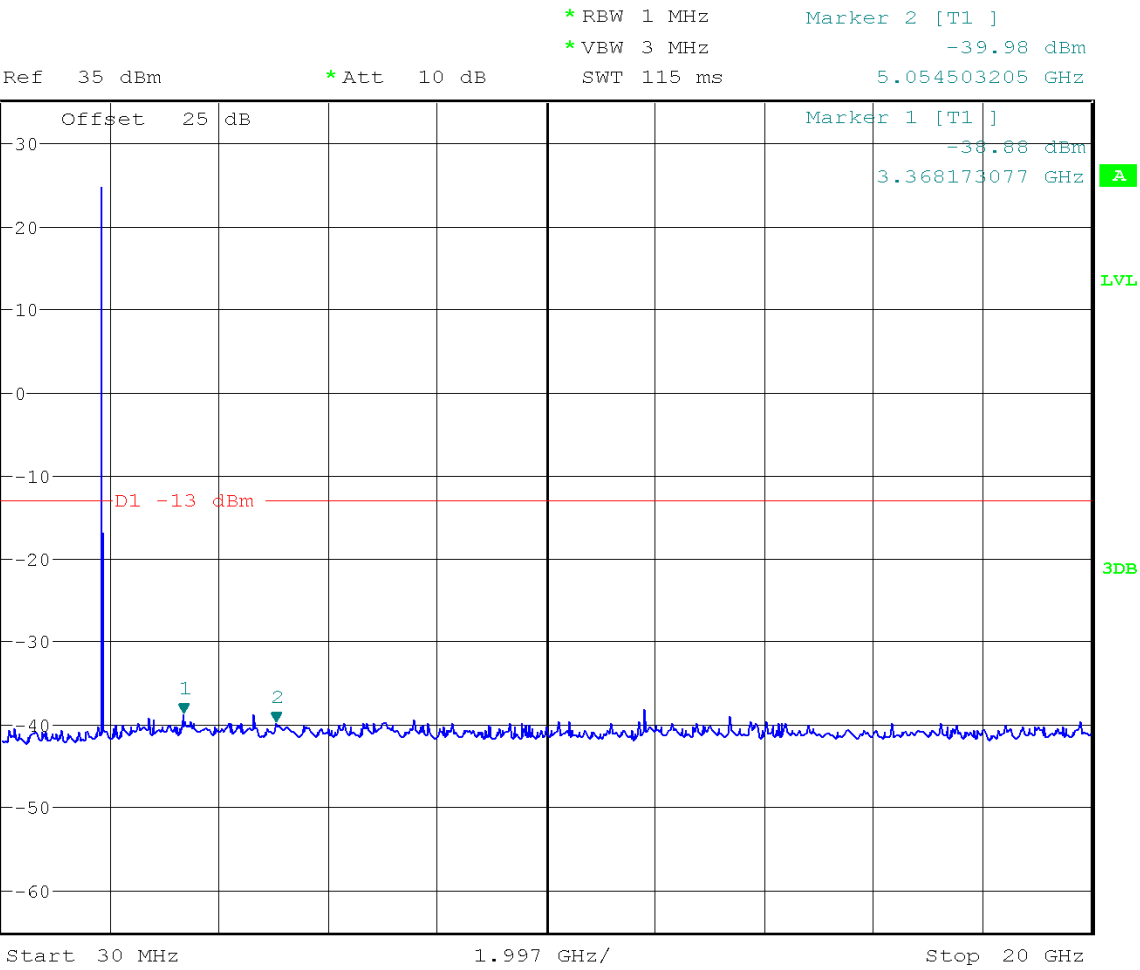


Date: 20.SEP.2014 15:24:01

Conducted Emission Transmitting Mode CH 810 30MHz – 20GHz

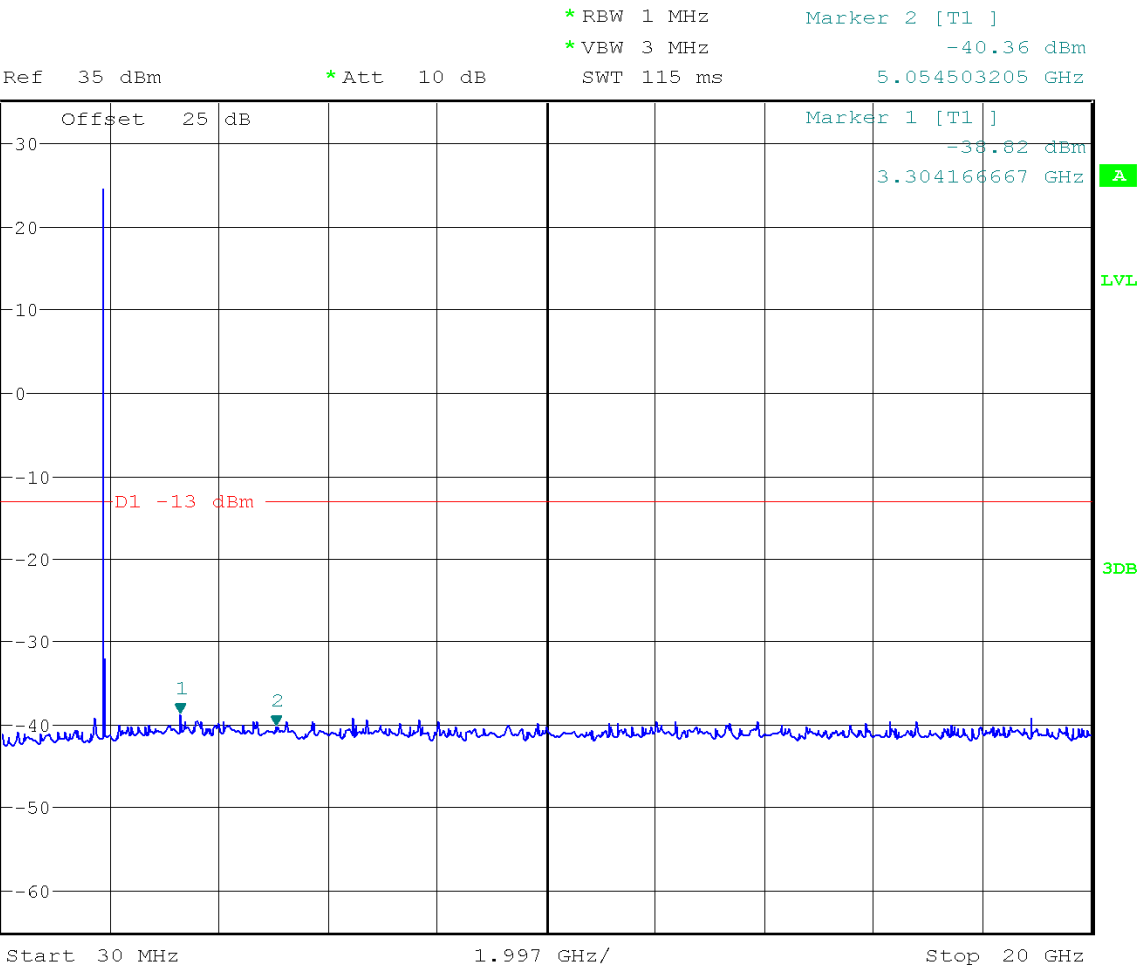


Date: 20.SEP.2014 15:24:32

CONDUCTED EMISSION IN UMTS band V
Conducted Emission Transmitting Mode 4132 30MHz – 10GHz

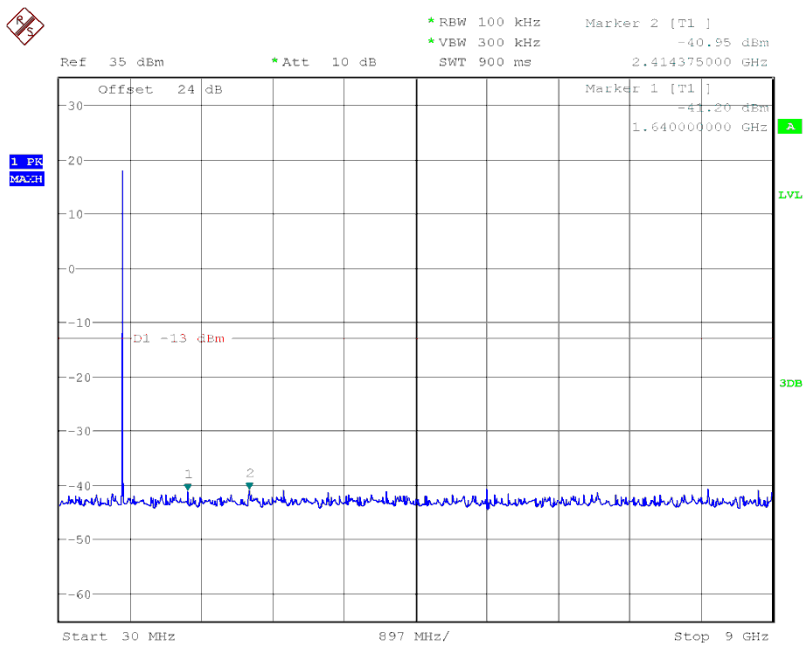


Date: 20.SEP.2014 15:01:45

Conducted Emission Transmitting Mode CH 4183 30MHz – 10GHz

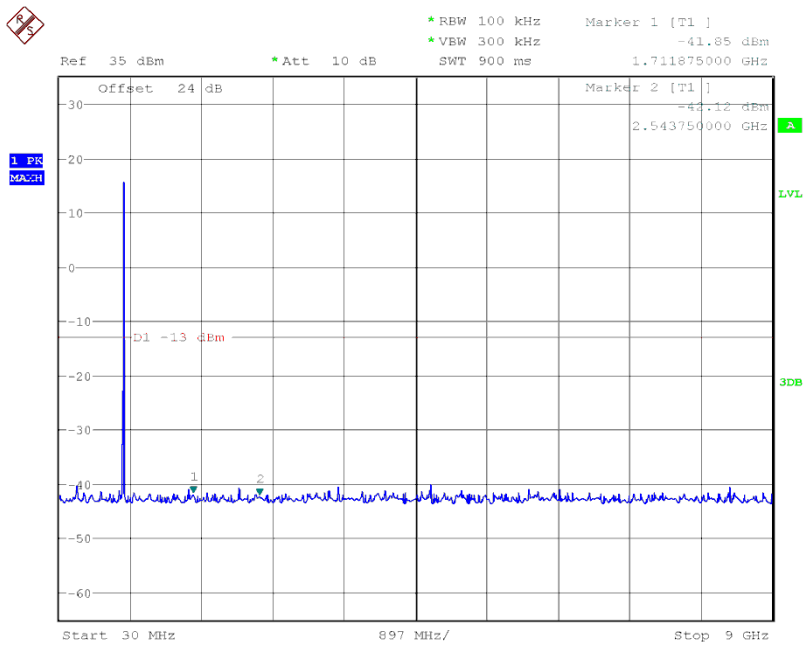


Date: 20.SEP.2014 15:01:11

Conducted Emission Transmitting Mode CH 4233 30MHz – 10GHz

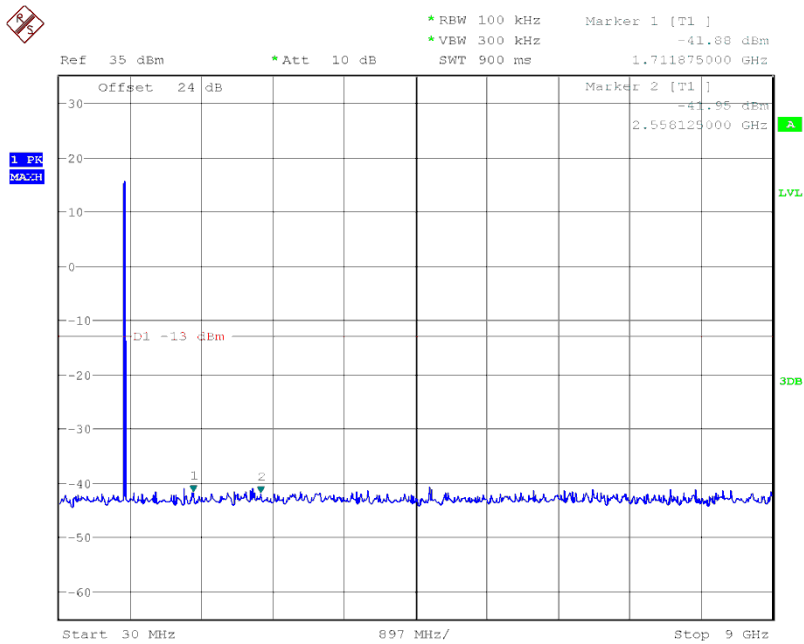


Date: 20.SEP.2014 15:00:26

CONDUCTED EMISSION IN UMTS HSDPA band V
Conducted Emission Transmitting Mode 4132 30MHz – 10GHz

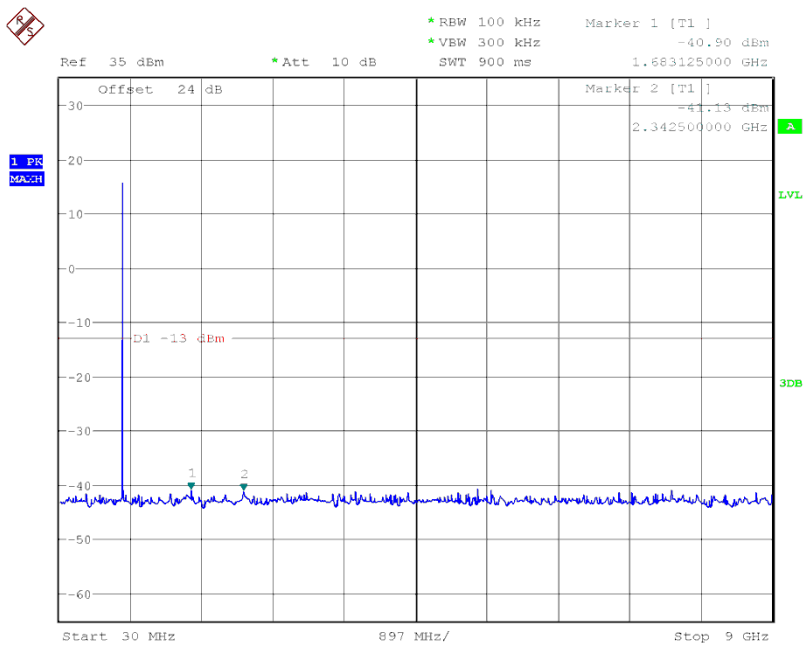


Date: 20.SEP.2014 14:57:20

Conducted Emission Transmitting Mode CH 4183 30MHz – 10GHz

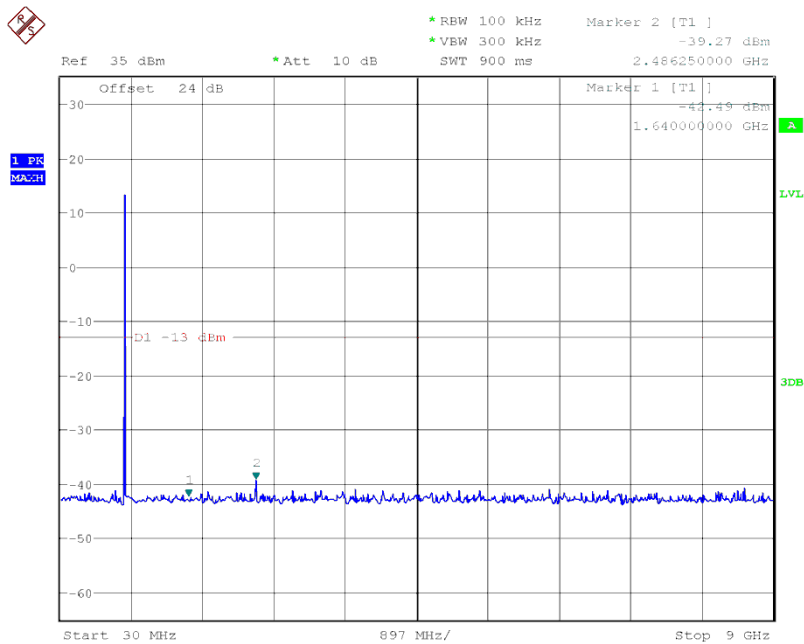


Date: 20.SEP.2014 14:56:37

Conducted Emission Transmitting Mode CH 4233 30MHz – 10GHz

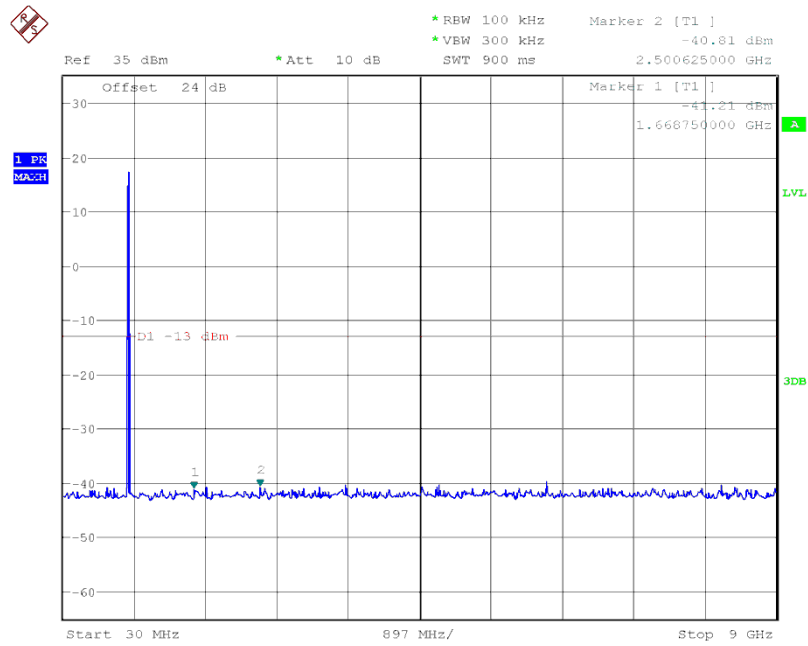


Date: 20.SEP.2014 14:55:24

CONDUCTED EMISSION IN UMTS HSUPA band V
Conducted Emission Transmitting Mode 4132 30MHz – 10GHz

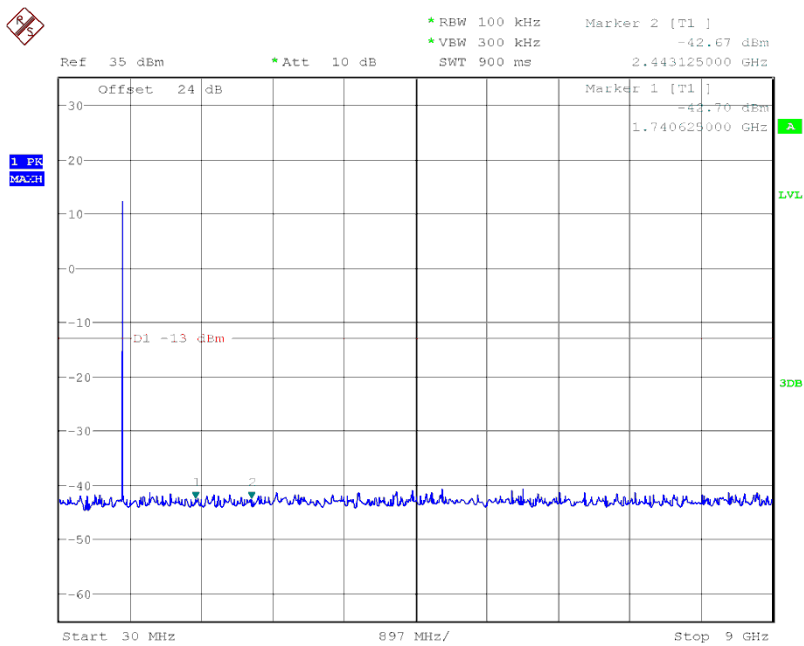


Date: 20.SEP.2014 14:58:15

Conducted Emission Transmitting Mode CH 4183 30MHz – 10GHz

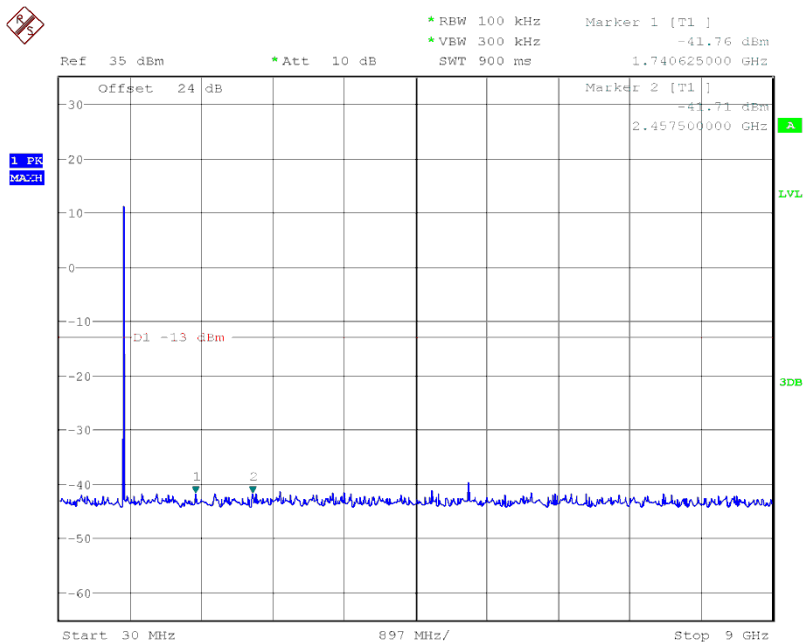


Date: 20.SEP.2014 14:58:55

Conducted Emission Transmitting Mode CH 4233 30MHz – 10GHz

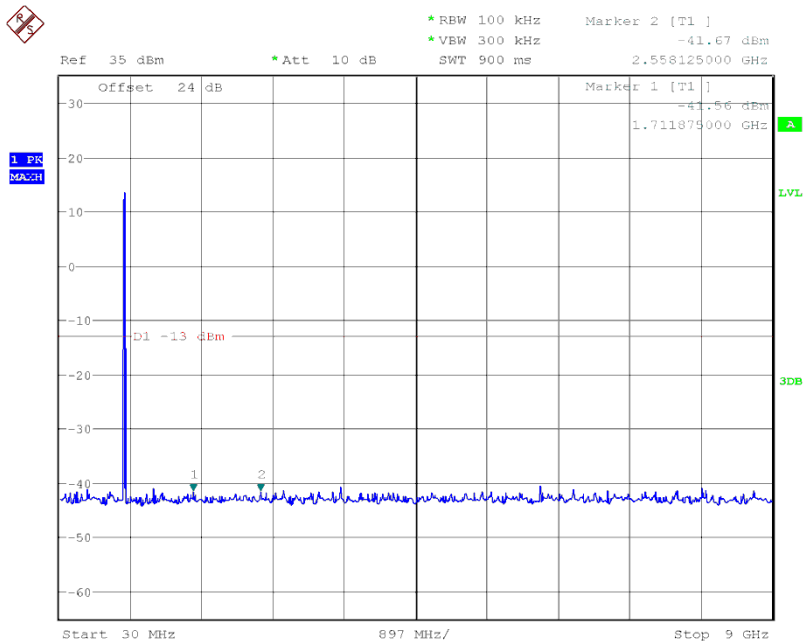


Date: 20.SEP.2014 14:59:34

CONDUCTED EMISSION IN UMTS band II
Conducted Emission Transmitting Mode 9262 30MHz – 20GHz

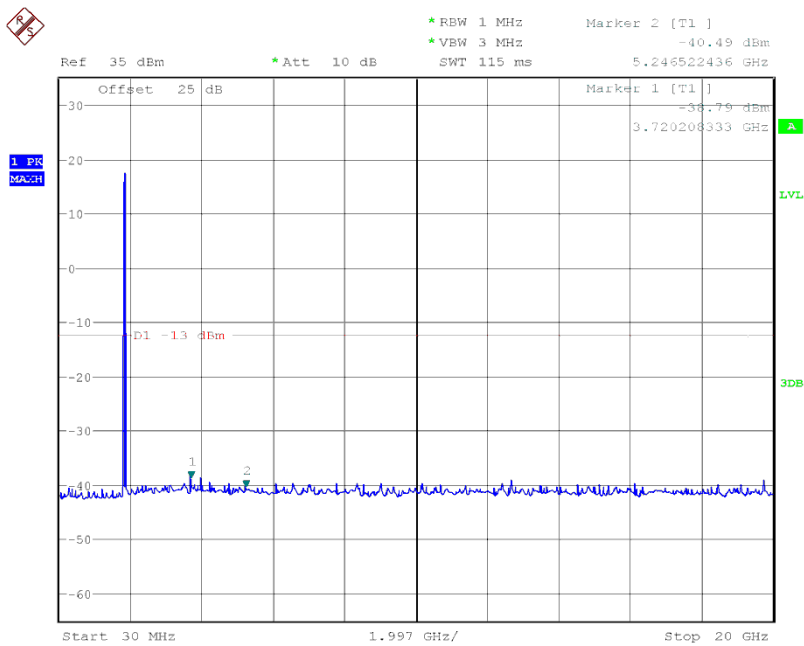


Date: 20.SEP.2014 15:06:02

Conducted Emission Transmitting Mode CH 9400 30MHz – 20GHz

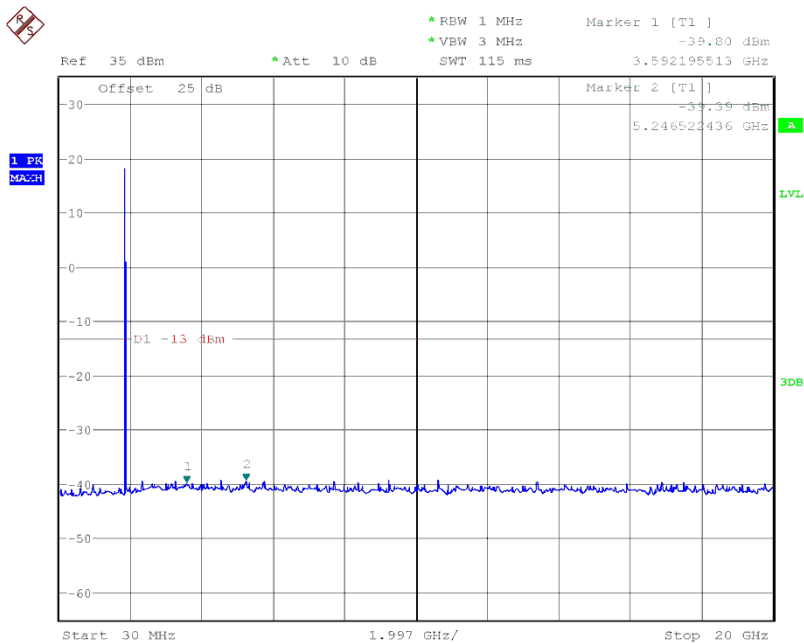


Date: 20.SEP.2014 15:05:28

Conducted Emission Transmitting Mode CH 9538 30MHz – 20GHz

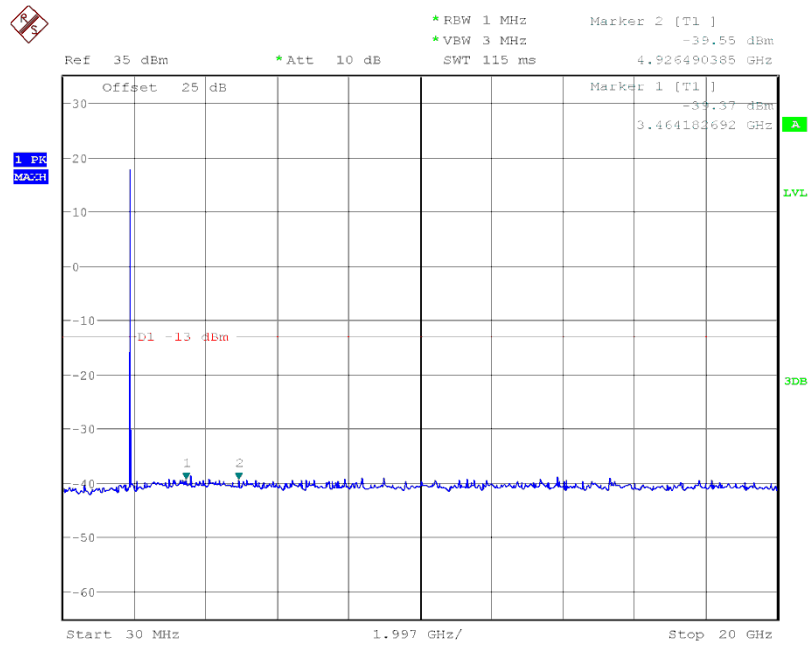


Date: 20.SEP.2014 15:04:34

CONDUCTED EMISSION IN UMTS HSDPA band II
Conducted Emission Transmitting Mode 9262 30MHz – 20GHz

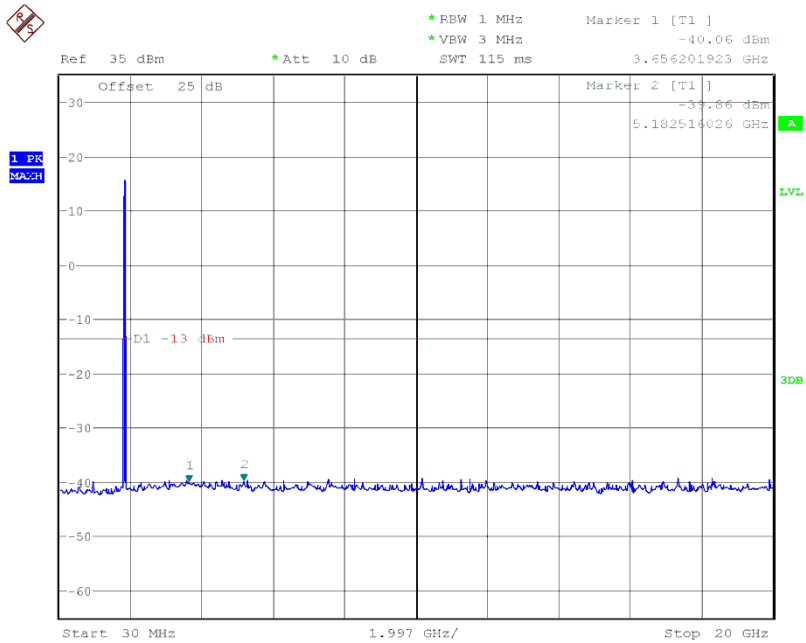


Date: 20.SEP.2014 15:07:20

Conducted Emission Transmitting Mode CH 9400 30MHz – 20GHz

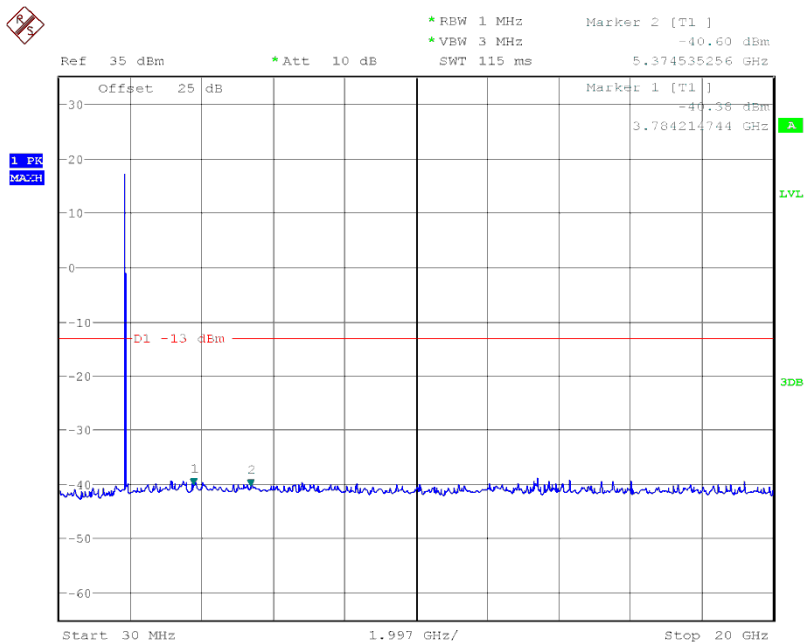


Date: 20.SEP.2014 15:08:04

Conducted Emission Transmitting Mode CH 9538 30MHz – 20GHz

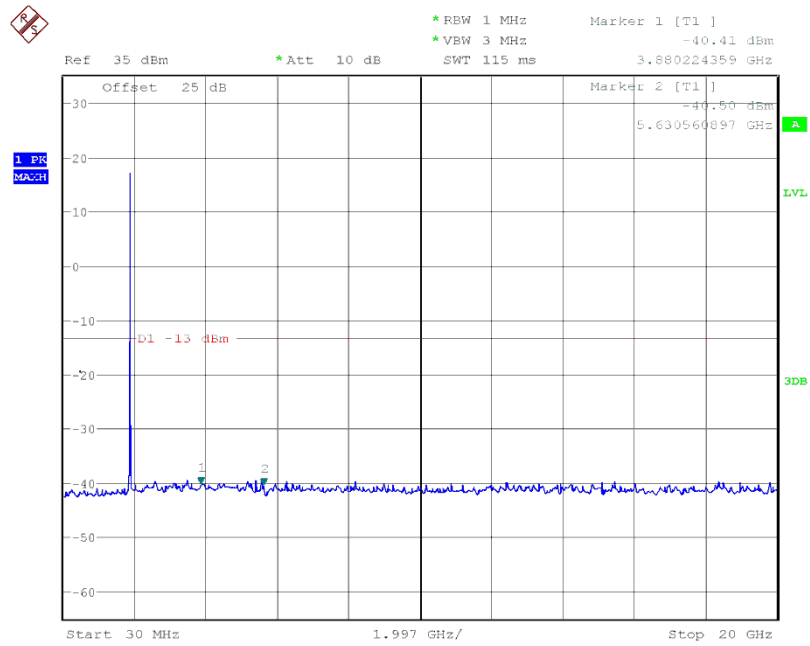


Date: 20.SEP.2014 15:08:44

CONDUCTED EMISSION IN UMTS HSUPA band II
Conducted Emission Transmitting Mode 9262 30MHz – 20GHz

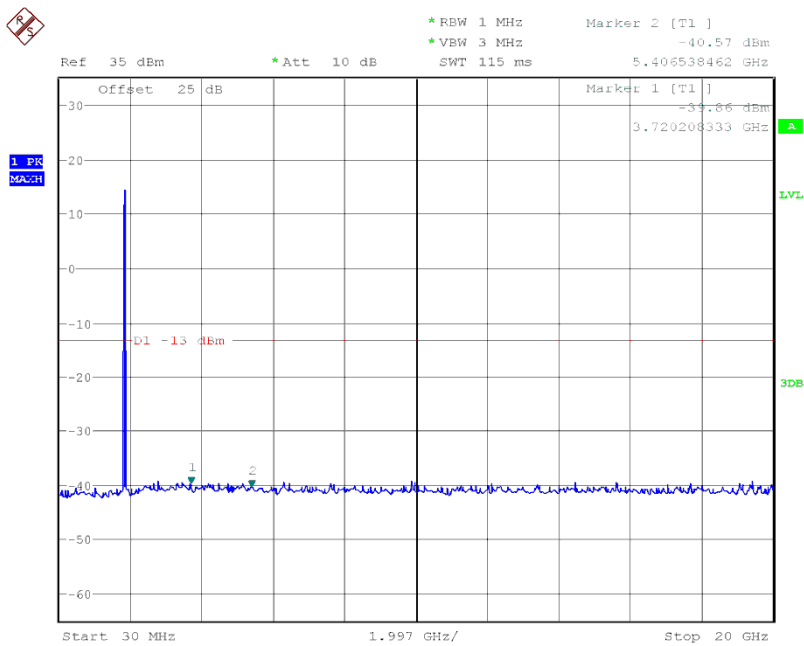


Date: 20.SEP.2014 15:11:11

Conducted Emission Transmitting Mode CH 9400 30MHz – 20GHz

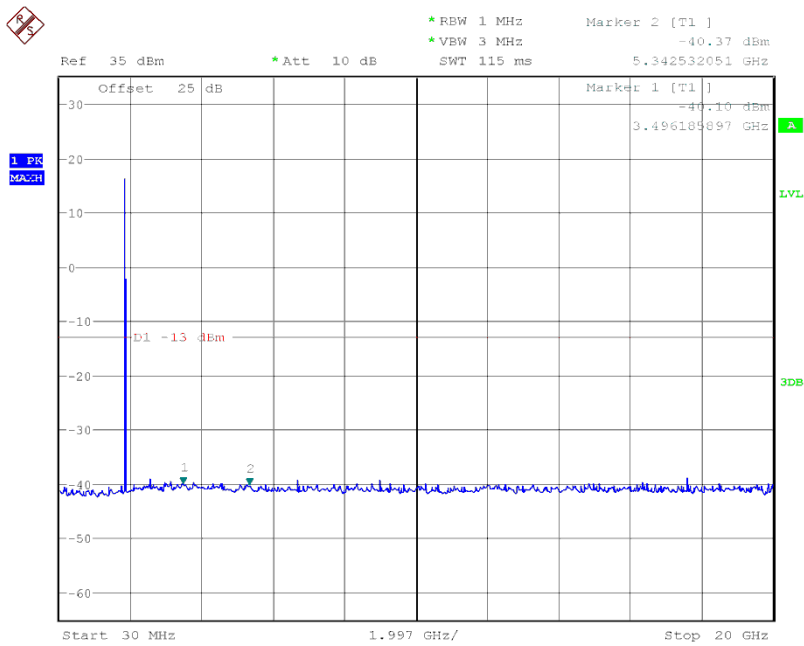

Date: 20.SEP.2014 15:10:33

Conducted Emission Transmitting Mode CH 9538 30MHz – 20GHz

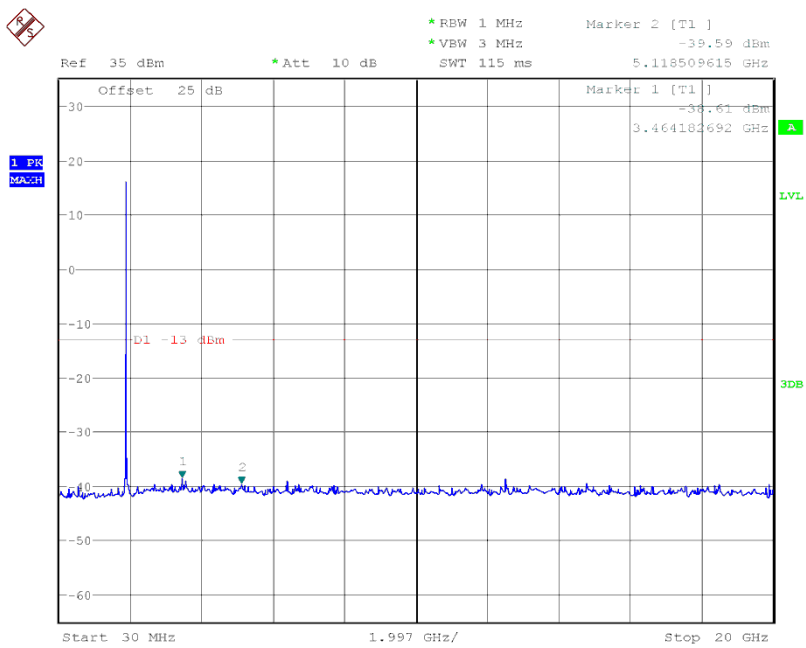

Date: 20.SEP.2014 15:09:51

APPENDIX II


TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)

EMISSION BANDWIDTH (-26dBC)

Occupied Bandwidth (99%&-26) GSM 850 BAND CH 128

* Agilent

R T

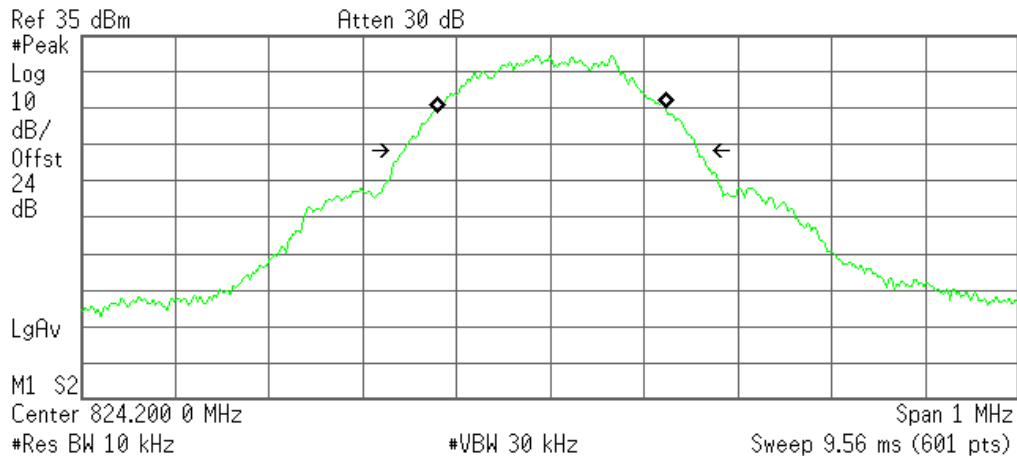

Occupied Bandwidth
245.3095 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 1.684 kHz
x dB Bandwidth 316.257 kHz

Occupied Bandwidth(99%&-26) GSM 850 BAND CH 190

* Agilent

R T

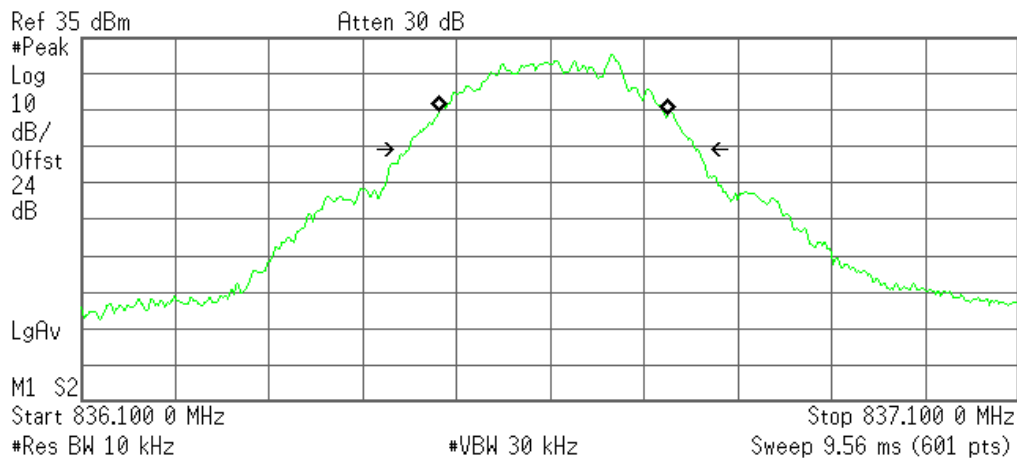

Occupied Bandwidth
245.1860 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 3.386 kHz
x dB Bandwidth 308.335 kHz

Occupied Bandwidth (99%&-26) GSM 850 BAND CH 251

Agilent

R T

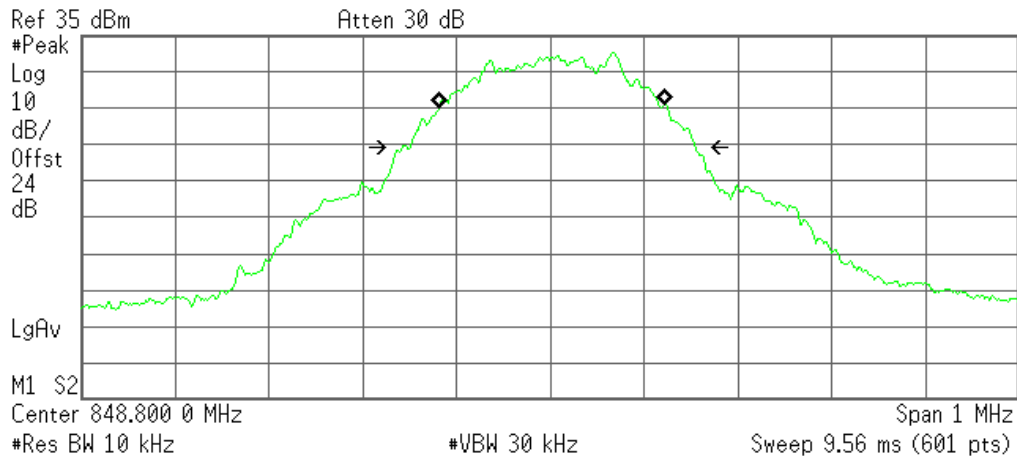

Occupied Bandwidth
243.3862 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 1.771 kHz
x dB Bandwidth 316.435 kHz

Occupied Bandwidth (99%&-26)GRPS 850 BAND CH 128

Agilent

R T

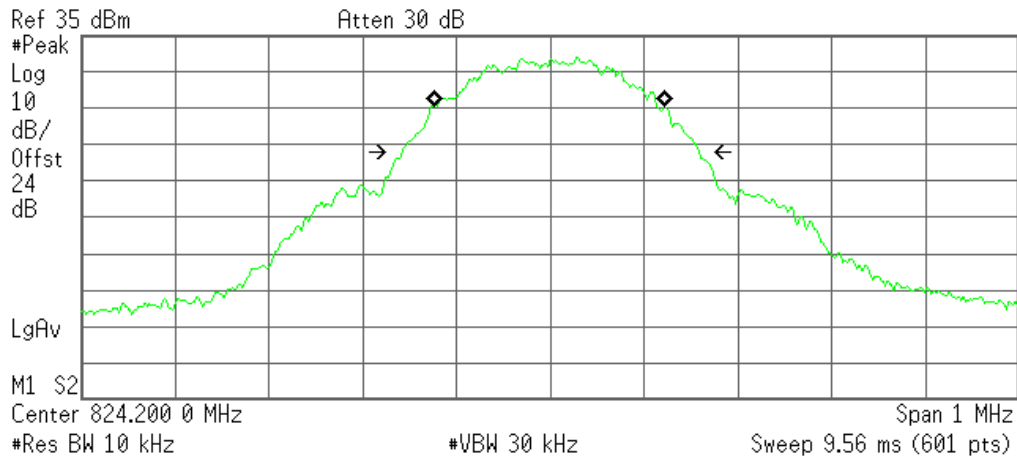

Occupied Bandwidth
247.7088 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -469.472 Hz
x dB Bandwidth 320.208 kHz

Occupied Bandwidth(99%&-26) GRPS 850 BAND CH 190

Agilent

R T

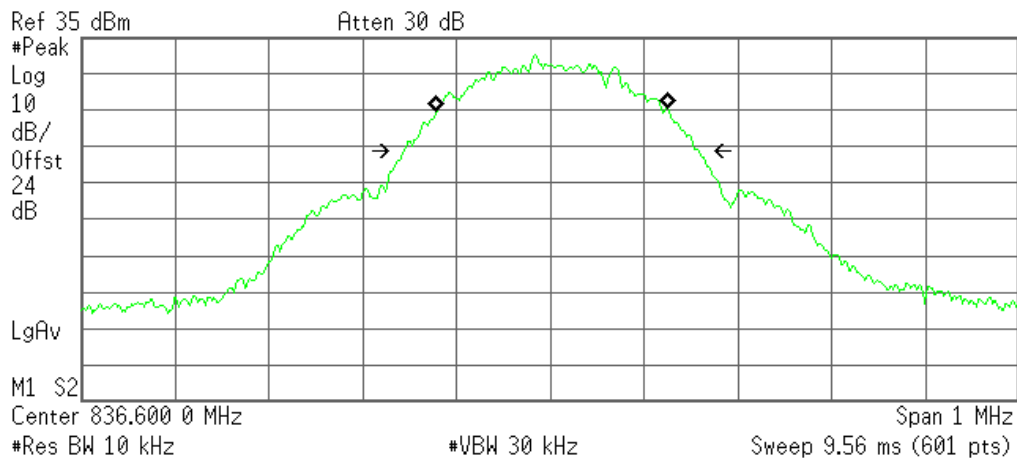


Occupied Bandwidth
248.8561 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 1.995 kHz
x dB Bandwidth 317.004 kHz

Occupied Bandwidth(99%&-26) GRPS 850 BAND CH 251

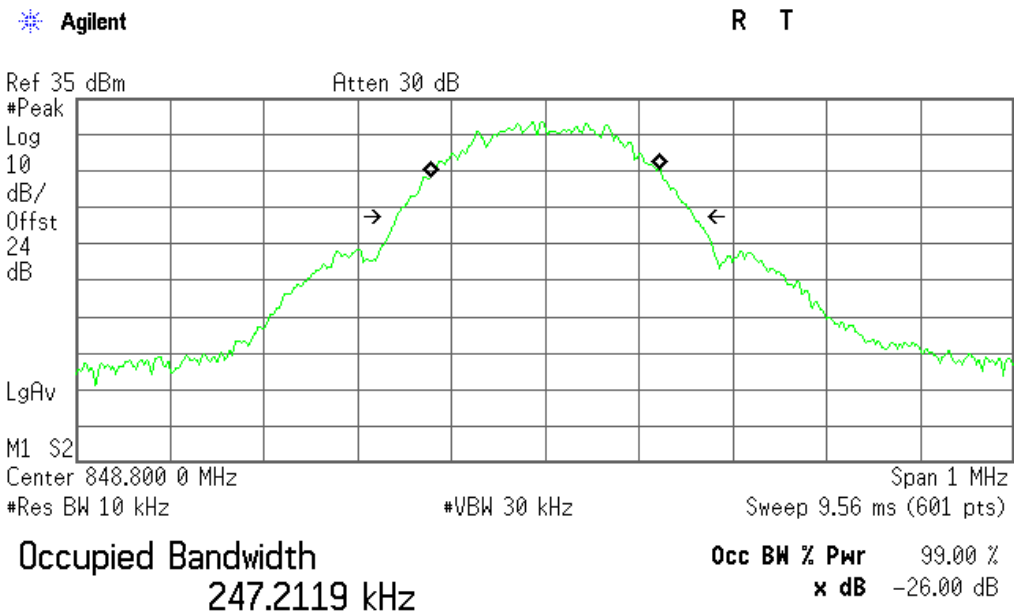


Transmit Freq Error 342.100 Hz

x dB Bandwidth 319.896 kHz

Occupied Bandwidth (99%&-26) PCS 1900 BAND CH 512

Agilent

R T

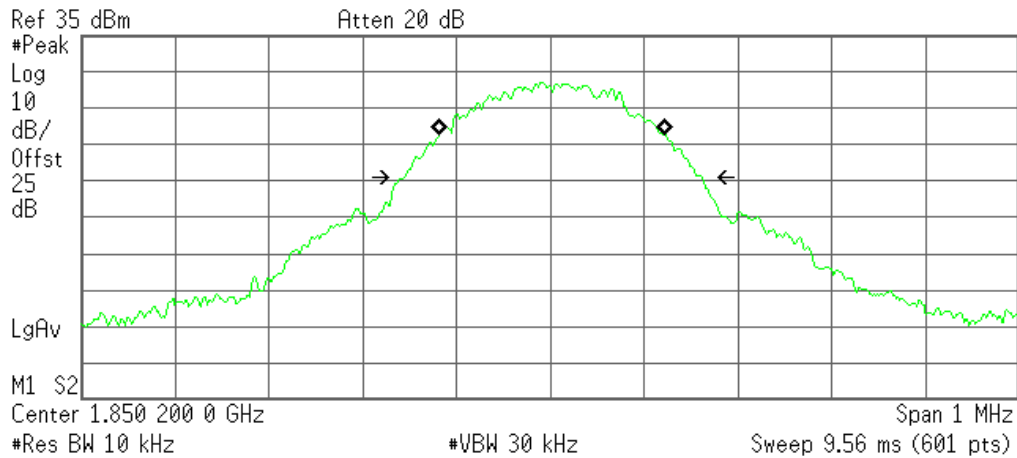

Occupied Bandwidth
243.2449 kHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 1.692 kHz
x dB Bandwidth 319.535 kHz

Occupied Bandwidth (99%&-26) PCS 1900 BAND CH 661

Agilent

R T

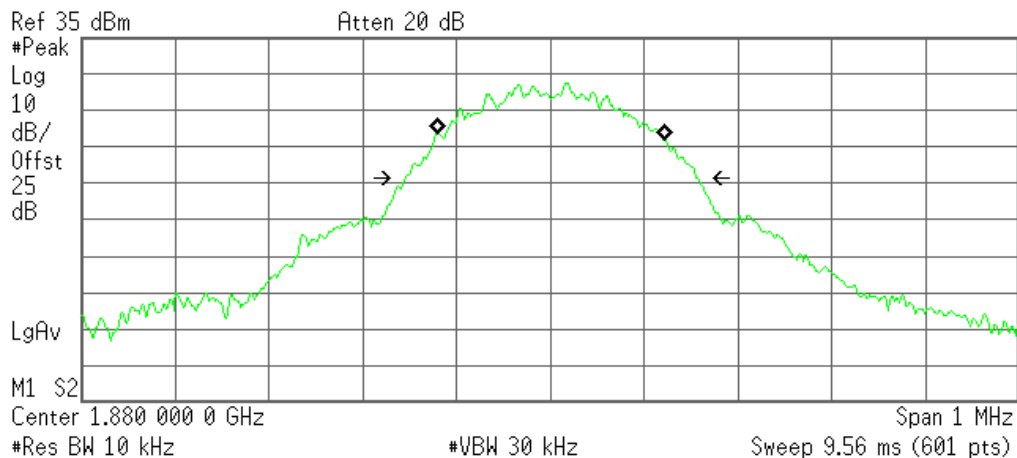


Occupied Bandwidth
245.2502 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 639.285 Hz
x dB Bandwidth 313.651 kHz

Occupied Bandwidth (99%&-26) PCS 1900 BAND CH 810

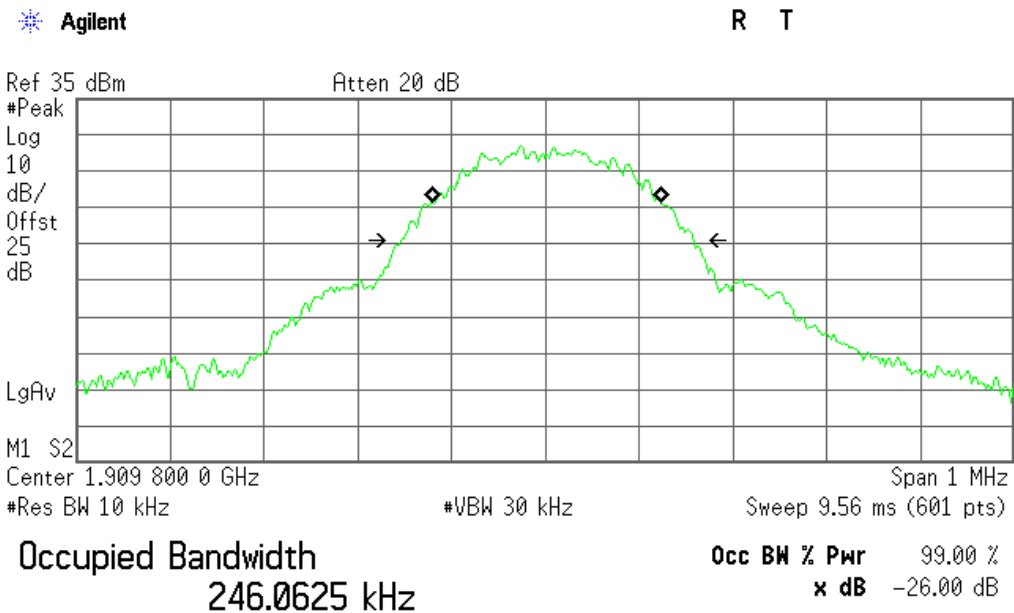


Transmit Freq Error 1.313 kHz

x dB Bandwidth 315.637 kHz

Occupied Bandwidth (99%&-26) GPRS 1900 BAND CH 512

* Agilent

R T

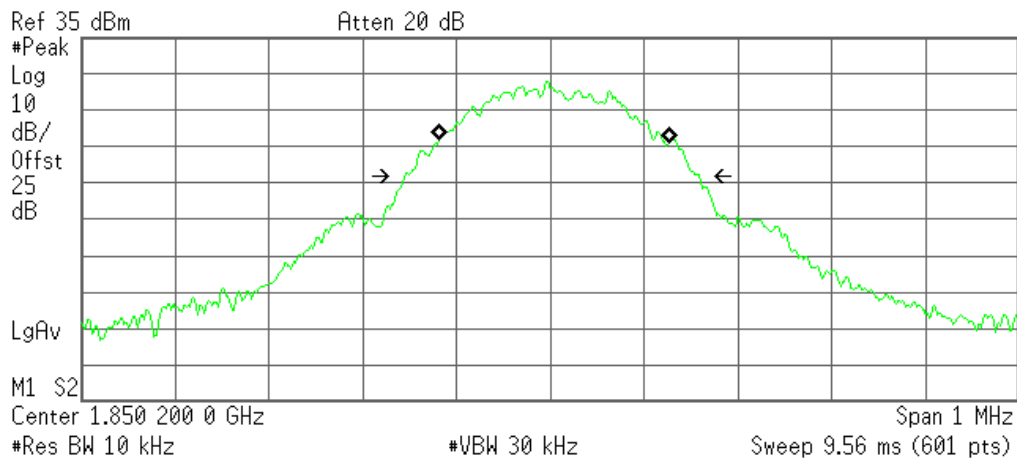

Occupied Bandwidth
 248.2181 kHz


Occ BW % Pwr 99.00 %
 x dB -26.00 dB

Transmit Freq Error 4.547 kHz
 x dB Bandwidth 317.717 kHz

Occupied Bandwidth (99%&-26) GPRS 1900 BAND CH 661

* Agilent

R T

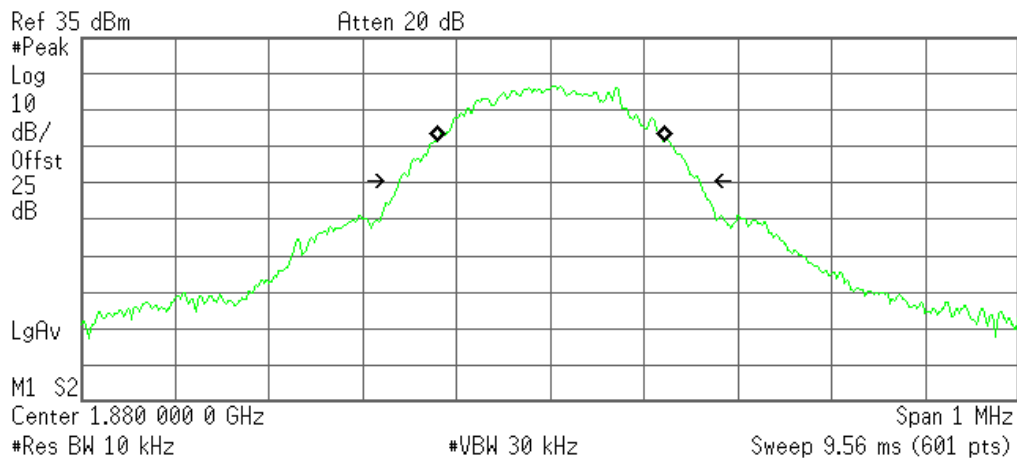


Occupied Bandwidth
 243.3606 kHz

Occ BW % Pwr 99.00 %
 x dB -26.00 dB

Transmit Freq Error 742.523 Hz
 x dB Bandwidth 322.195 kHz

Occupied Bandwidth (99%&-26) GPRS 1900 BAND CH 810

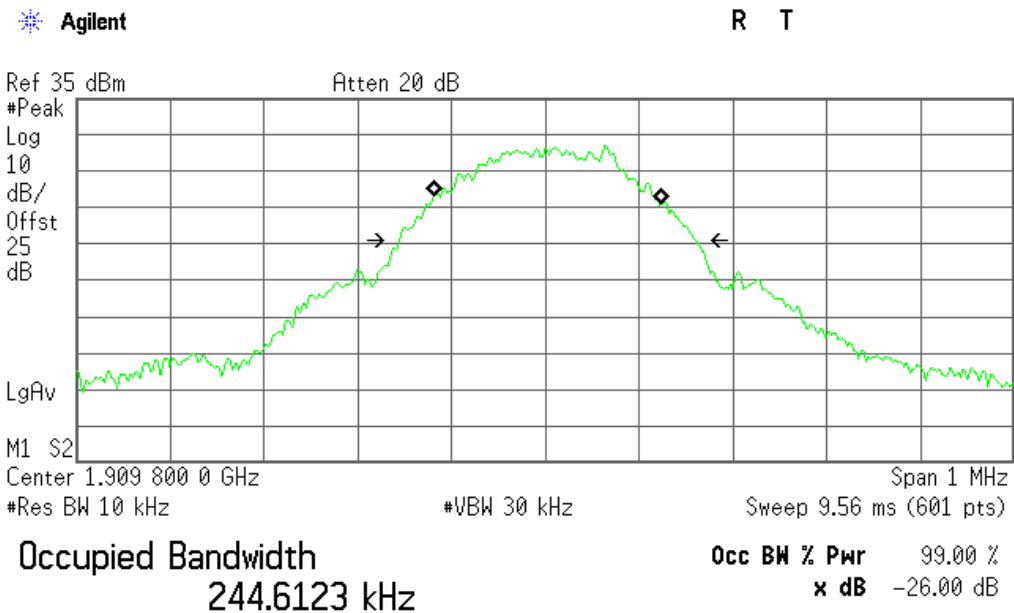


Transmit Freq Error 1.883 kHz
x dB Bandwidth 319.826 kHz

Occupied Bandwidth (99%&-26) UMTS BAND V CH 4132

R T

Ref 35 dBm

Atten 30 dB

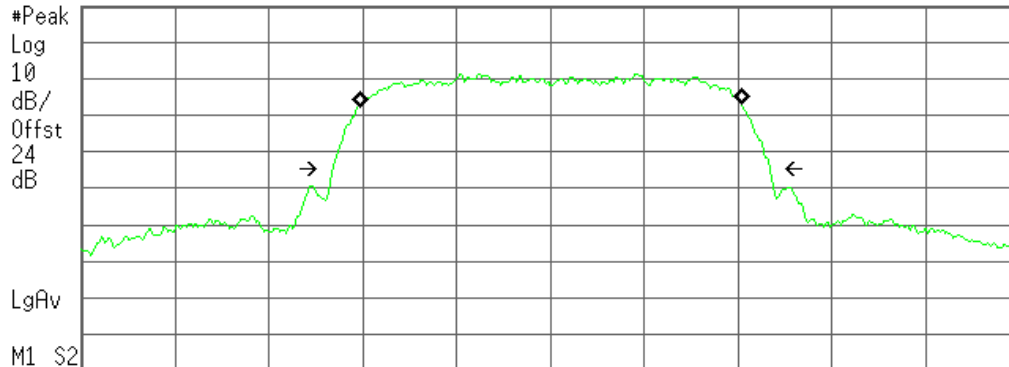

Center 826.400 MHz

#Res BW 100 kHz

#VBW 300 kHz

Span 10 MHz

Sweep 1 ms (601 pts)

Occupied Bandwidth
4.0836 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error 1.404 kHz


x dB Bandwidth	4.673 MHz
----------------	-----------

Occupied Bandwidth (99%&-26) UMTS BAND V CH 4183

R T

Ref 35 dBm

Atten 30 dB

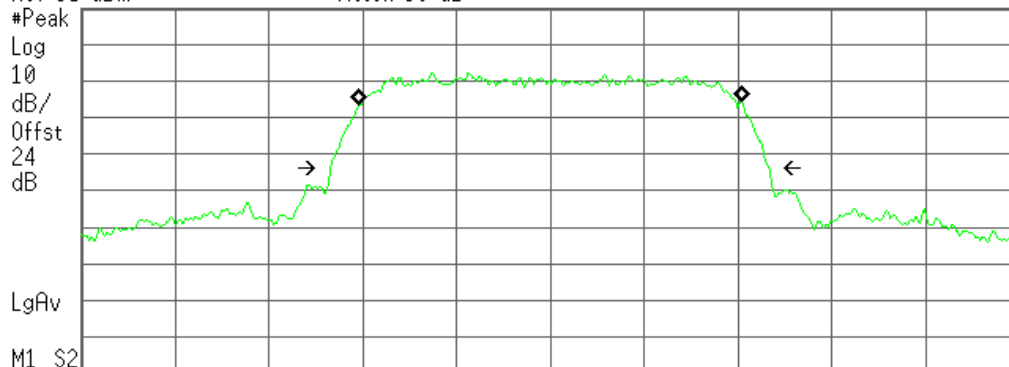

Center 836.400 MHz

#Res BW 100 kHz

#VBW 300 kHz

Span 10 MHz

Sweep 1 ms (601 pts)

Occupied Bandwidth
4.0961 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB


Transmit Freq Error 4.090 kHz

x dB Bandwidth	4.686 MHz
----------------	-----------

Occupied Bandwidth (99%&-26) UMTS BAND V CH 4233

Agilent

R T

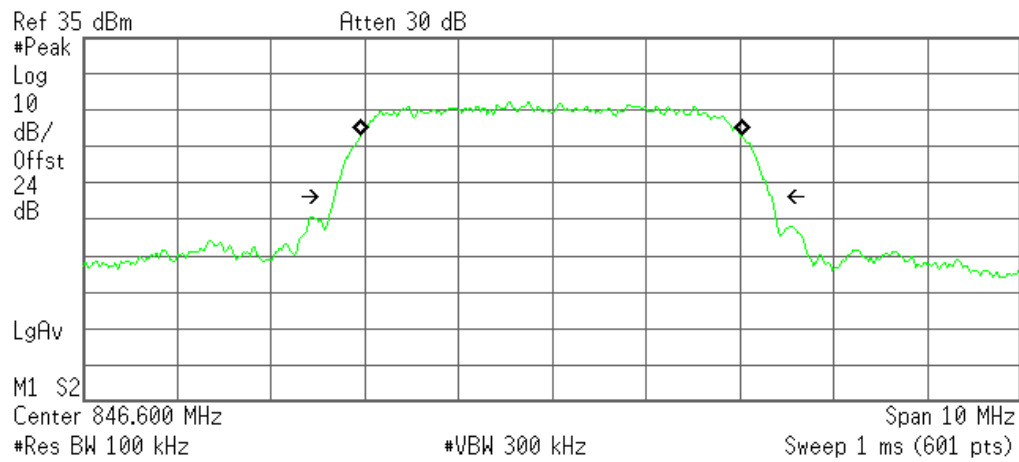

Occupied Bandwidth
4.0780 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -5.769 kHz
x dB Bandwidth 4.673 MHz

Occupied Bandwidth (99%&-26) UMTS HSDPA BAND V CH 4132

Agilent

R T

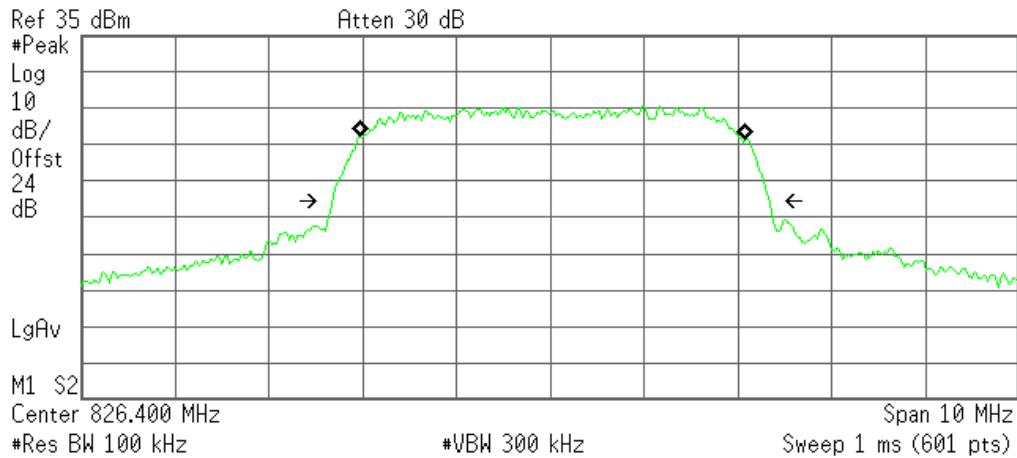

Occupied Bandwidth
4.1247 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 22.393 kHz
x dB Bandwidth 4.673 MHz

Occupied Bandwidth (99%&-26) UMTS HSDPA BAND V CH 4183

Agilent

R T

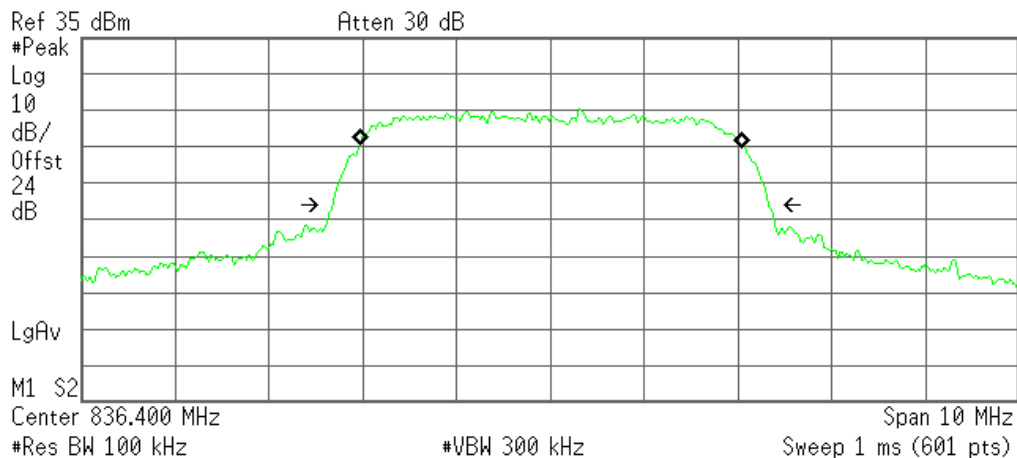

Occupied Bandwidth
4.0821 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 8.837 kHz
x dB Bandwidth 4.655 MHz

Occupied Bandwidth (99%&-26)UMTS HSDPA BAND V CH 4233

Agilent

R T

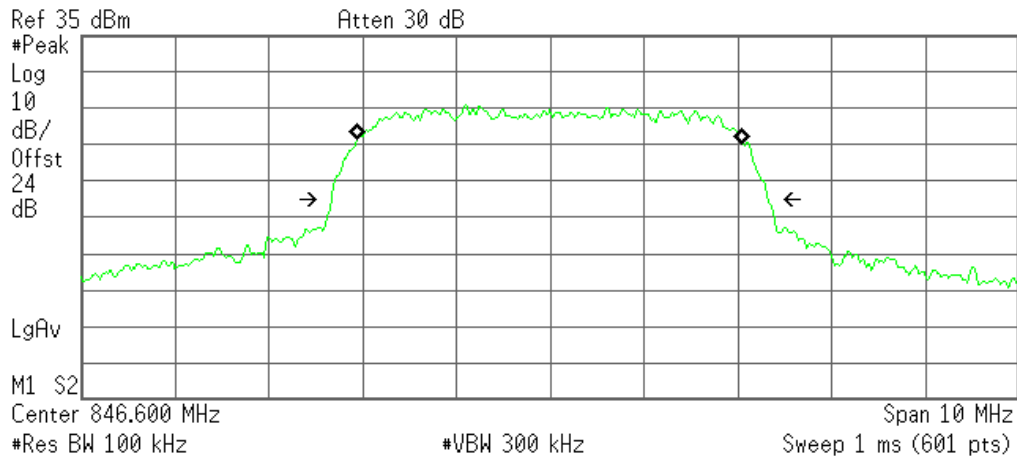

Occupied Bandwidth
4.1149 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -2.685 kHz
x dB Bandwidth 4.667 MHz

Occupied Bandwidth(99%&-26) UMTS HSUPA BAND V CH 4132

Agilent

R T

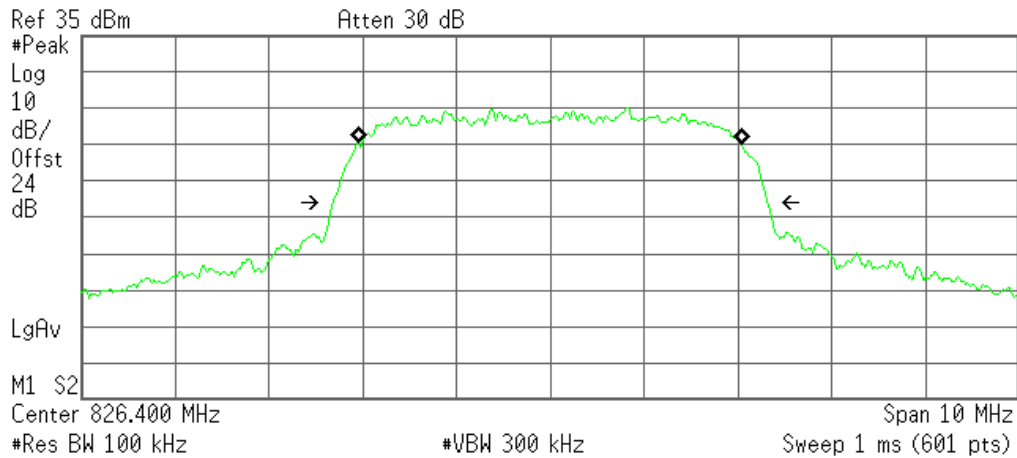

Occupied Bandwidth
4.0985 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 46.487 Hz
x dB Bandwidth 4.645 MHz

Occupied Bandwidth (99%&-26) UMTS HSUPA BAND V CH 4183

Agilent

R T

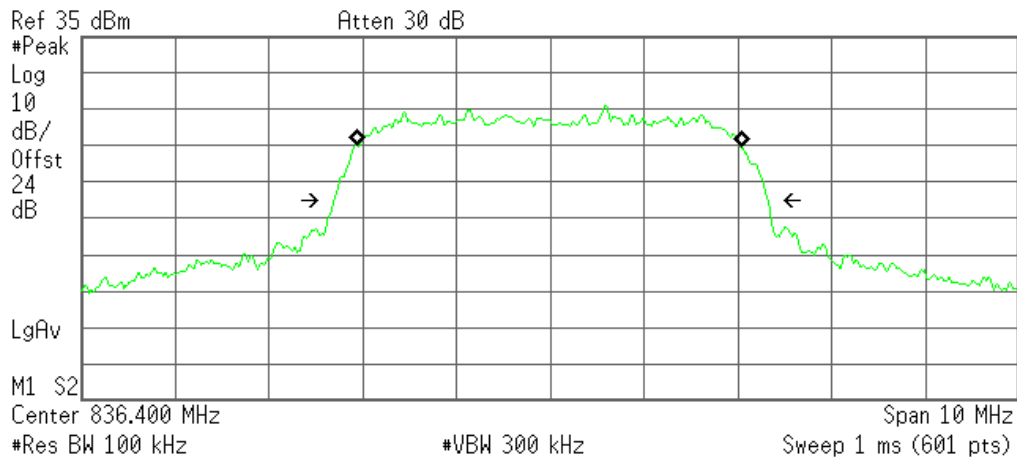

Occupied Bandwidth
4.1073 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -7.614 kHz
x dB Bandwidth 4.645 MHz

Occupied Bandwidth (99%&-26) UMTS HSUPA BAND V CH 4233

Agilent

R T

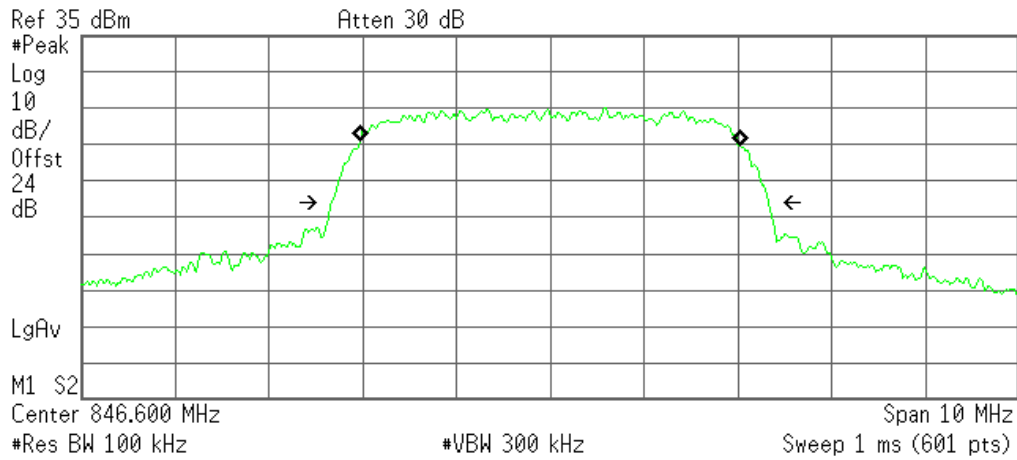

Occupied Bandwidth
4.0625 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -6.089 kHz
x dB Bandwidth 4.674 MHz

Occupied Bandwidth (99%&-26) UMTS BAND II CH 9264

Agilent

R T

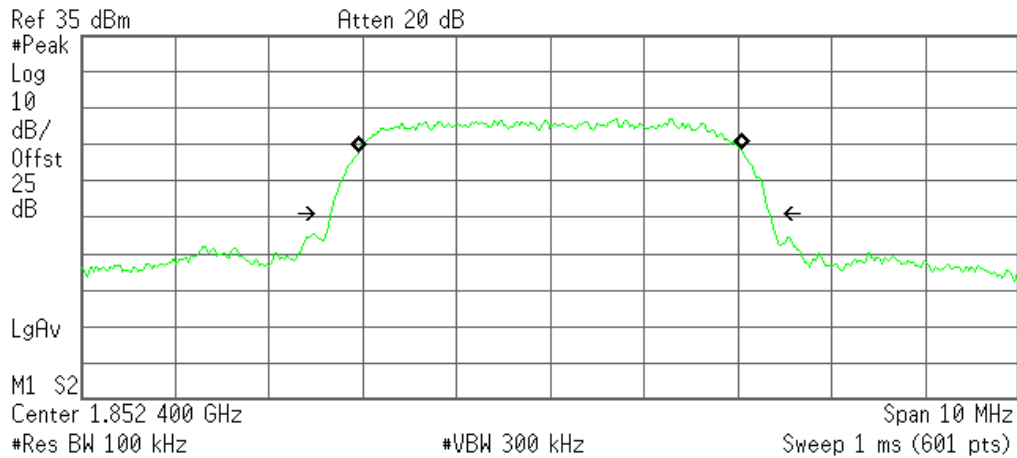

Occupied Bandwidth
 4.0938 MHz


Occ BW % Pwr 99.00 %
 x dB -26.00 dB

Transmit Freq Error 709.353 Hz
 x dB Bandwidth 4.679 MHz

Occupied Bandwidth (99%) UMTS BAND II CH 9400

Agilent

R T

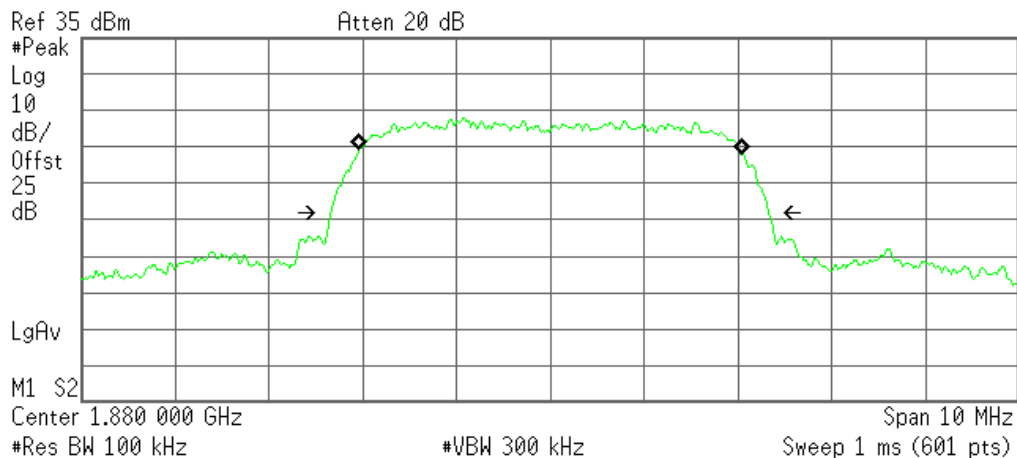

Occupied Bandwidth
 4.0903 MHz

Occ BW % Pwr 99.00 %
 x dB -26.00 dB

Transmit Freq Error -891.219 Hz
 x dB Bandwidth 4.683 MHz

Occupied Bandwidth (99%&-26)UMTS BAND II CH 9538

Agilent

R T

Ref 35 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

25

dB

LgAv

M1 S2

Center 1.907 600 GHz

#Res BW 100 kHz

#VBW 300 kHz

Span 10 MHz

Sweep 1 ms (601 pts)

Occupied Bandwidth

4.1148 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB


Transmit Freq Error -2.300 kHz

x dB Bandwidth 4.671 MHz

Occupied Bandwidth(99%&-26) UMTS HSDPA BAND II CH 9262

Agilent

R T

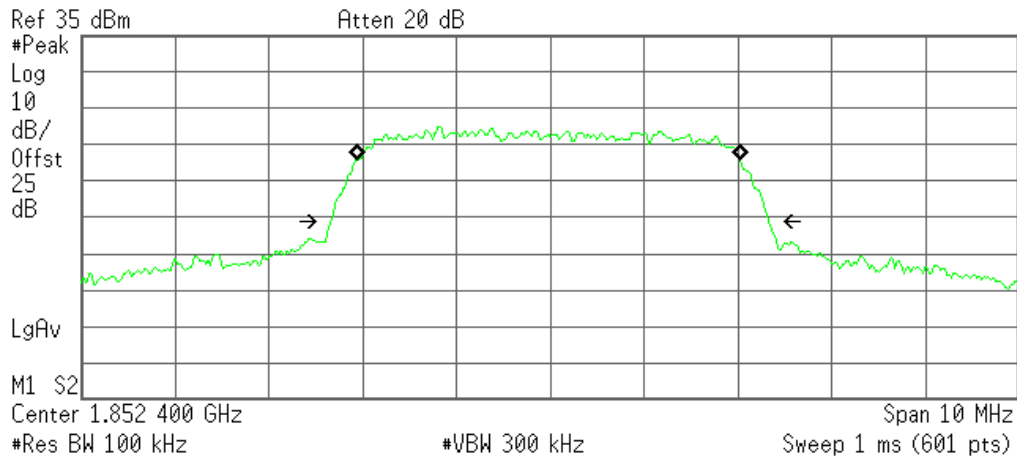

Occupied Bandwidth
4.0999 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -17.054 kHz
x dB Bandwidth 4.670 MHz

Occupied Bandwidth (99%&-26) UMTS HSDPA BAND II CH 9400

Agilent

R T

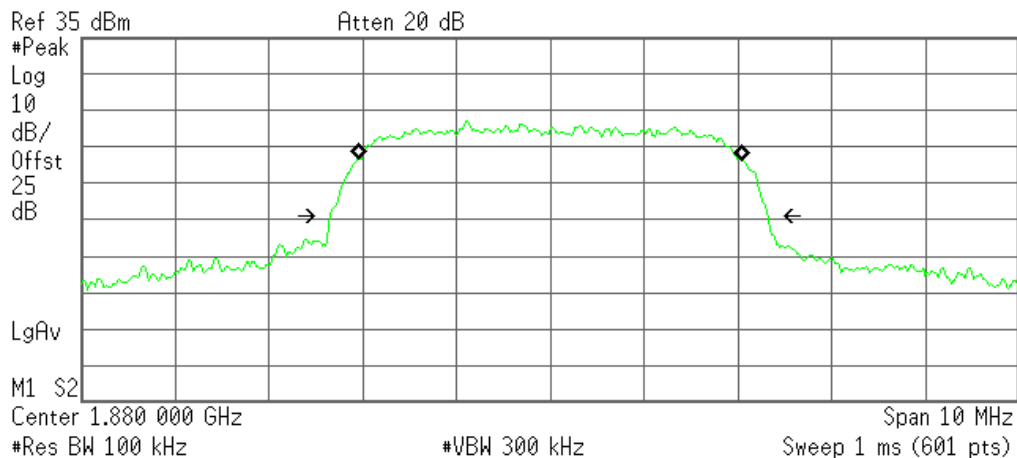

Occupied Bandwidth
4.1001 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -540.046 Hz
x dB Bandwidth 4.680 MHz

Occupied Bandwidth (99%&-26) UMTS HSDPA BAND II CH 9538

Agilent

R T

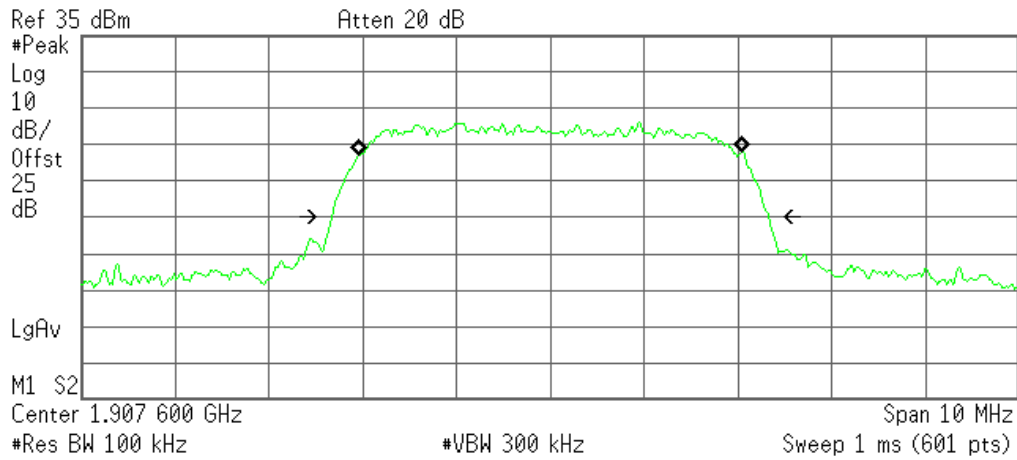

Occupied Bandwidth
 4.1076 MHz


Occ BW % Pwr 99.00 %
 x dB -26.00 dB

Transmit Freq Error 2.321 kHz
 x dB Bandwidth 4.672 MHz

Occupied Bandwidth (99%&-26) UMTS HSUPA BAND II CH 9262

Agilent

R T

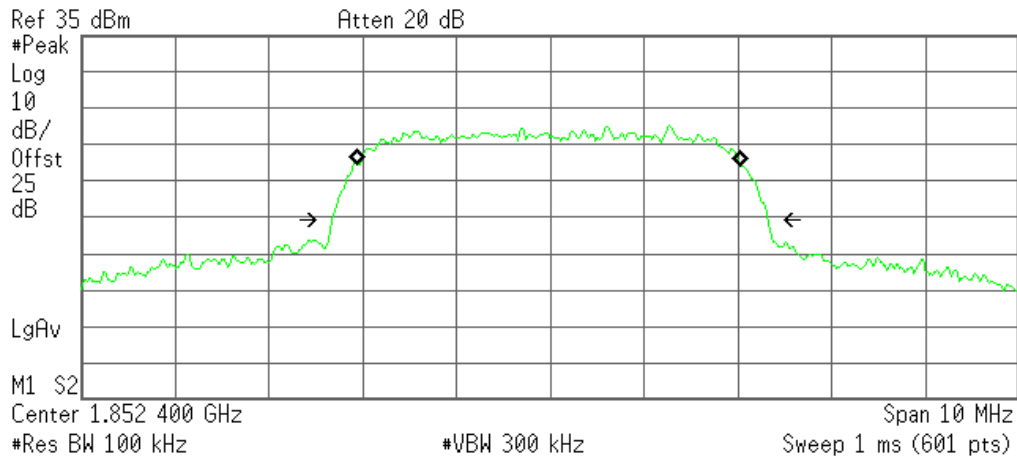

Occupied Bandwidth
 4.1011 MHz


Occ BW % Pwr 99.00 %
 x dB -26.00 dB

Transmit Freq Error -10.402 kHz
 x dB Bandwidth 4.665 MHz

Occupied Bandwidth (99%&-26) UMTS HSUPA BAND II CH 9400

Agilent

R T

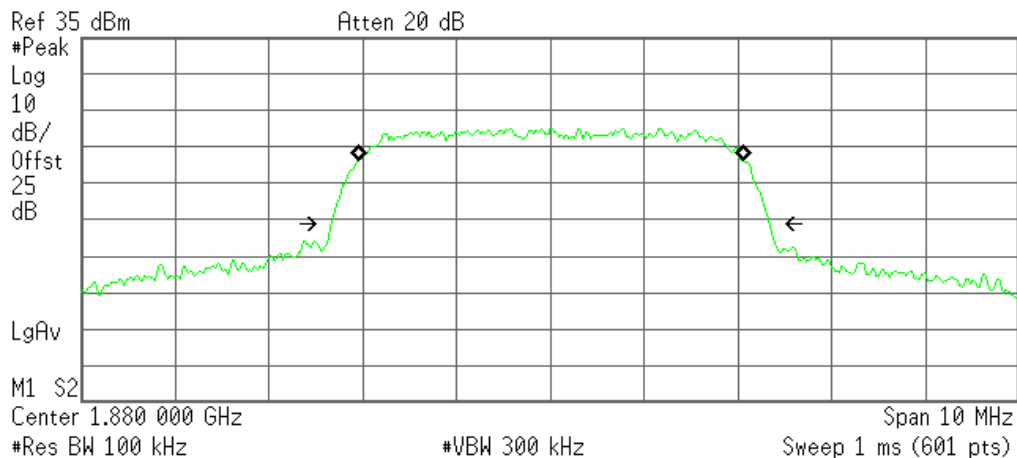

Occupied Bandwidth
 4.1165 MHz


Occ BW % Pwr 99.00 %
 x dB -26.00 dB

Transmit Freq Error 7.922 kHz
 x dB Bandwidth 4.684 MHz

Occupied Bandwidth (99%&-26) UMTS HSUPA BAND II CH 9538

Agilent

R T

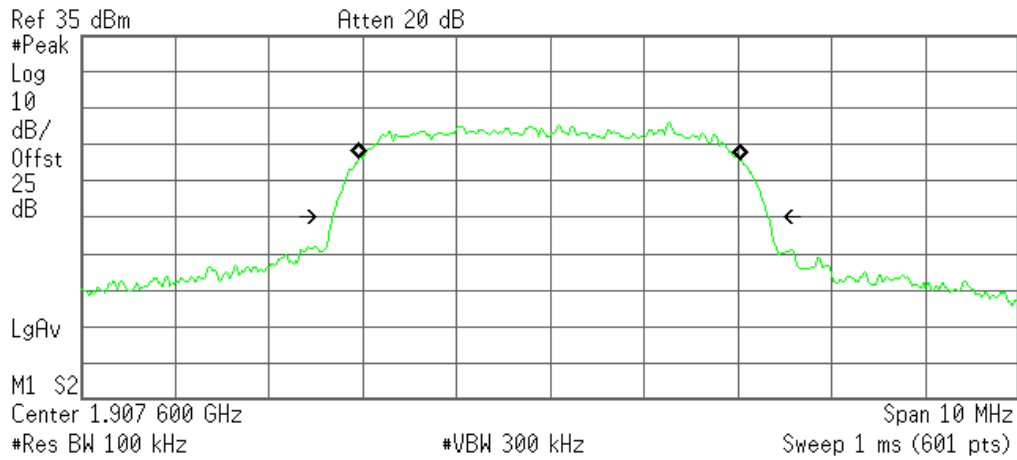

Occupied Bandwidth
4.0890 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -4.764 kHz
x dB Bandwidth 4.659 MHz


APPENDIX III

TEST PLOTS FOR BAND EDGES


Low Band Edge GSM 850 BAND CH 128

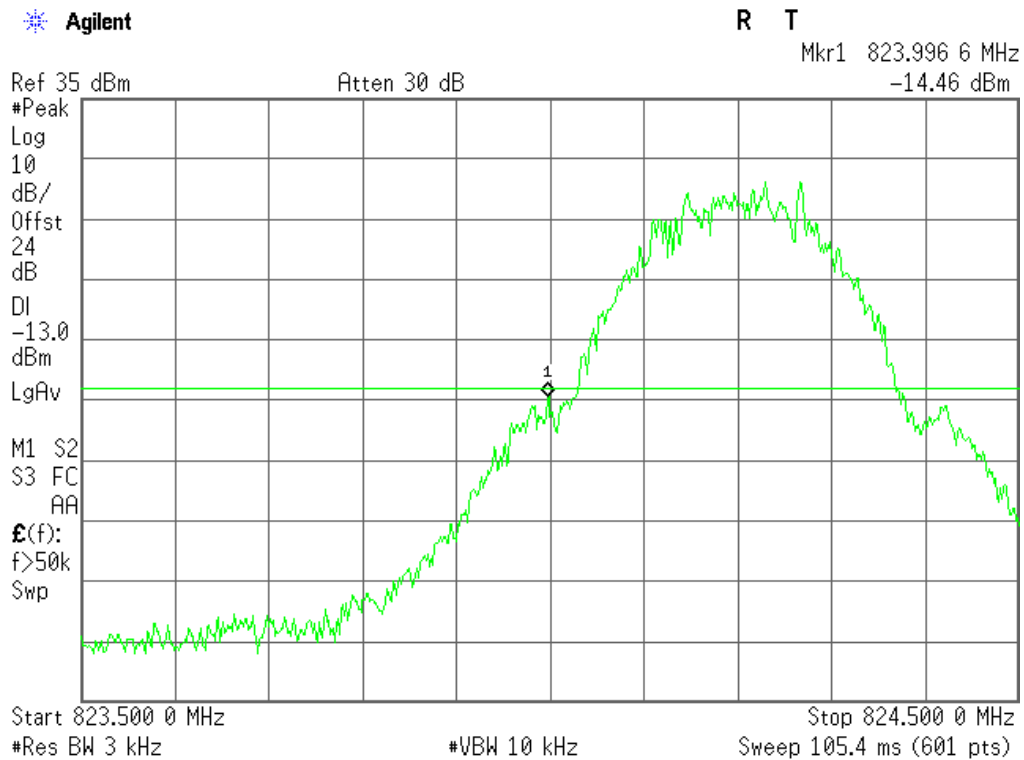


High Band Edge GSM 850 BAND CH 251

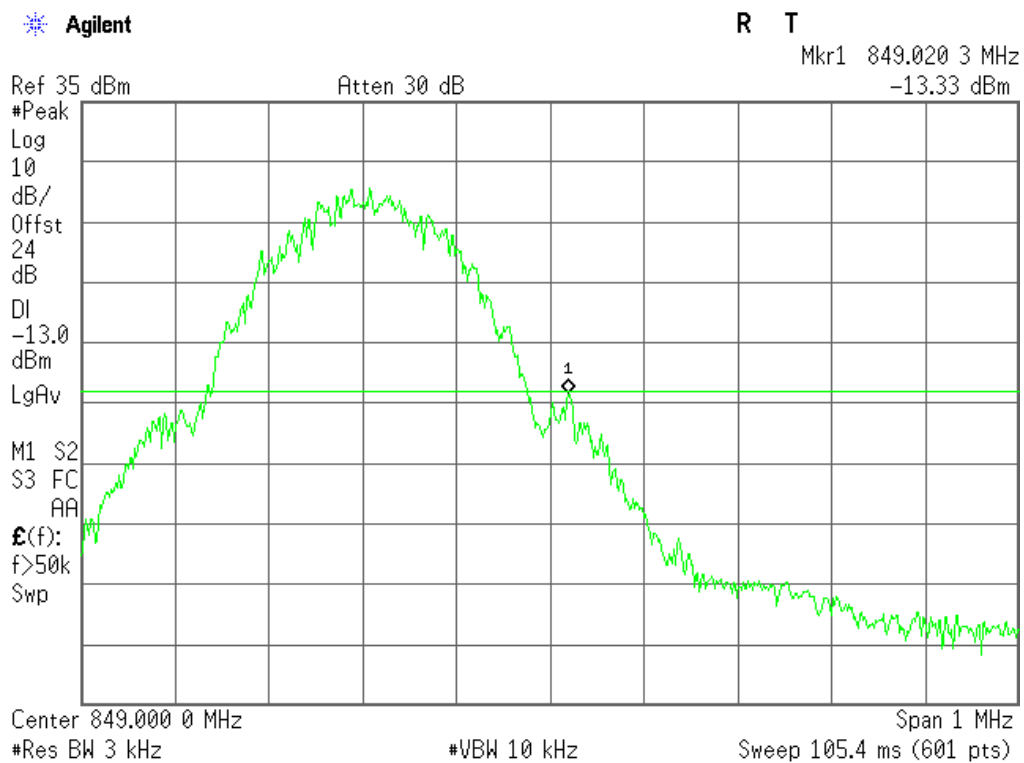


Low Band Edge GPRS 850 BAND CH 128

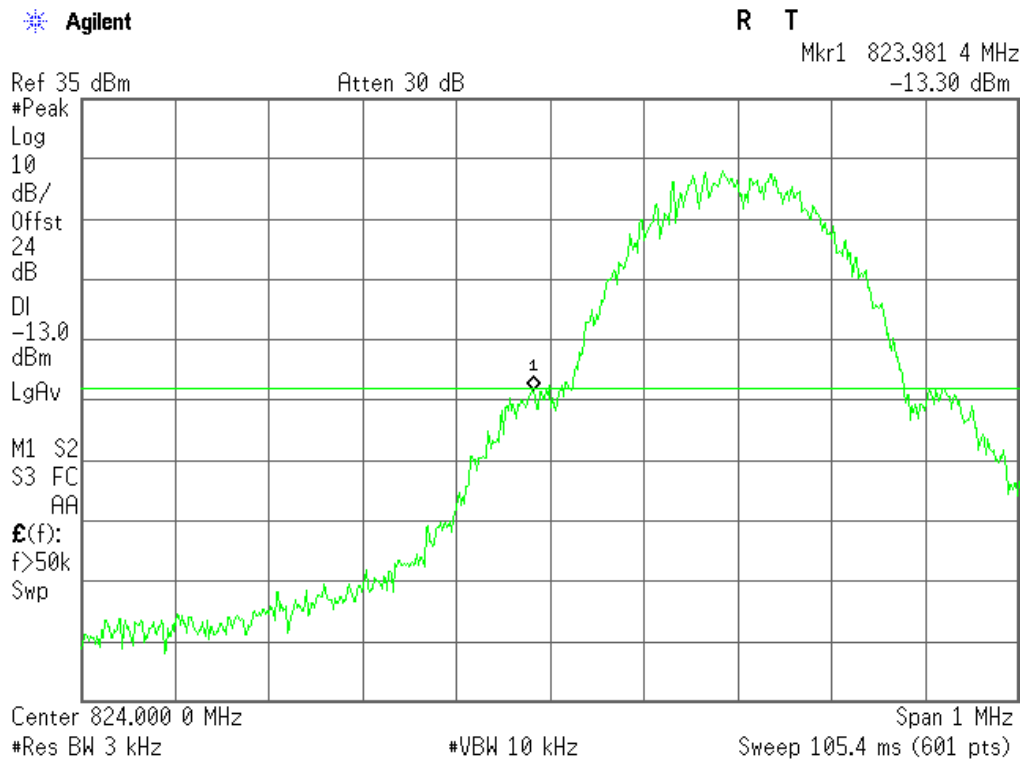


High Band Edge GPRS 850 BAND CH 251

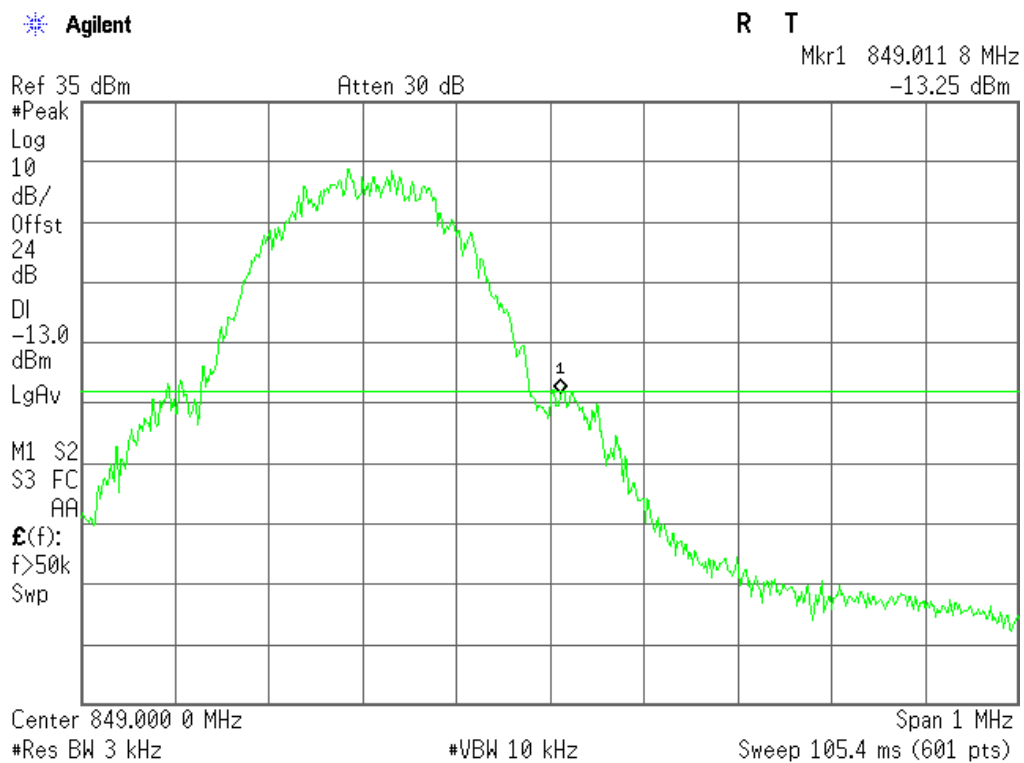


Low Band Edge PCS 1900 BAND CH 512

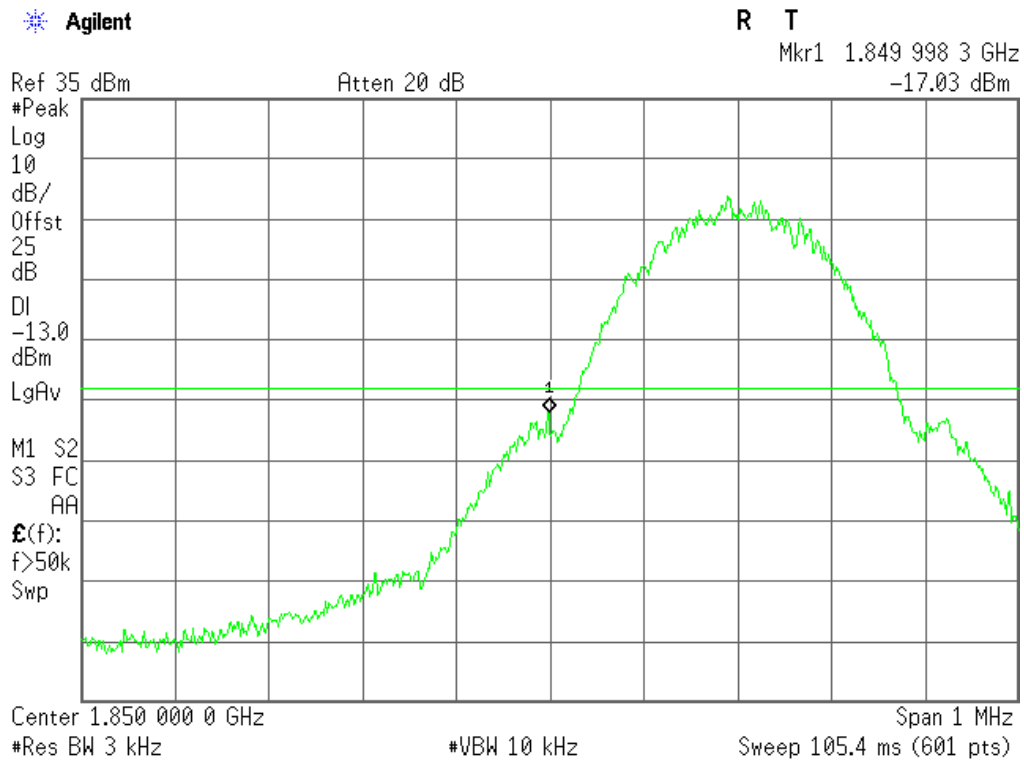


High Band Edge PCS 1900 BAND CH 810

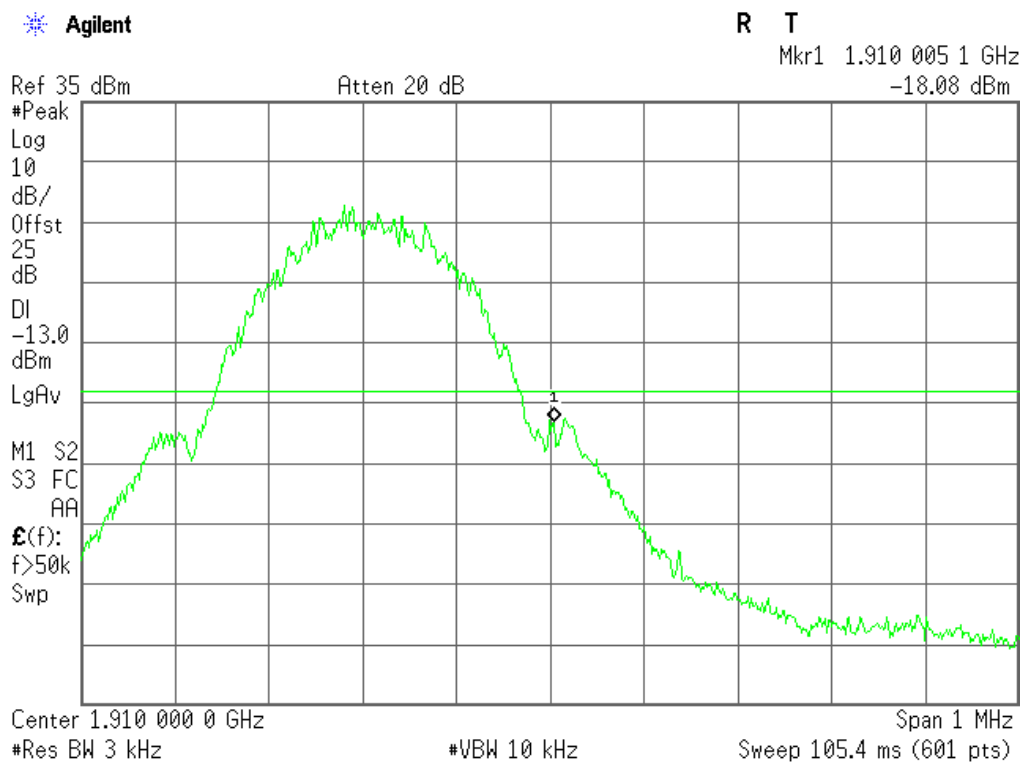


Low Band Edge GPRS 1900 BAND CH 512

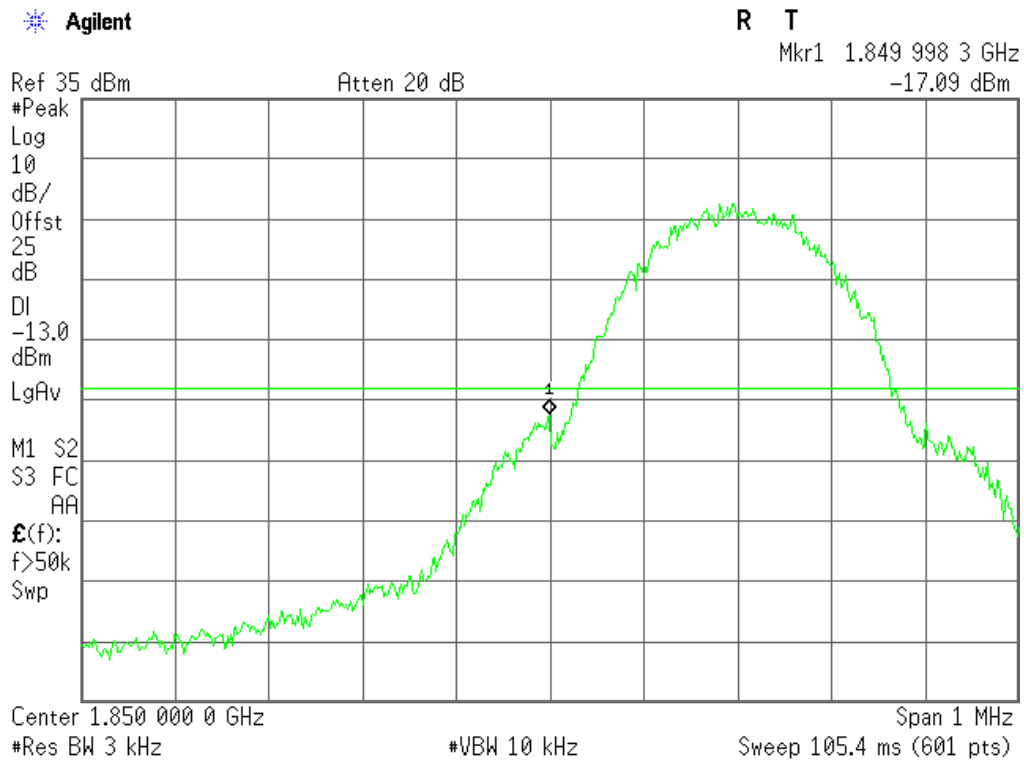


High Band Edge GPRS 1900 BAND CH 810

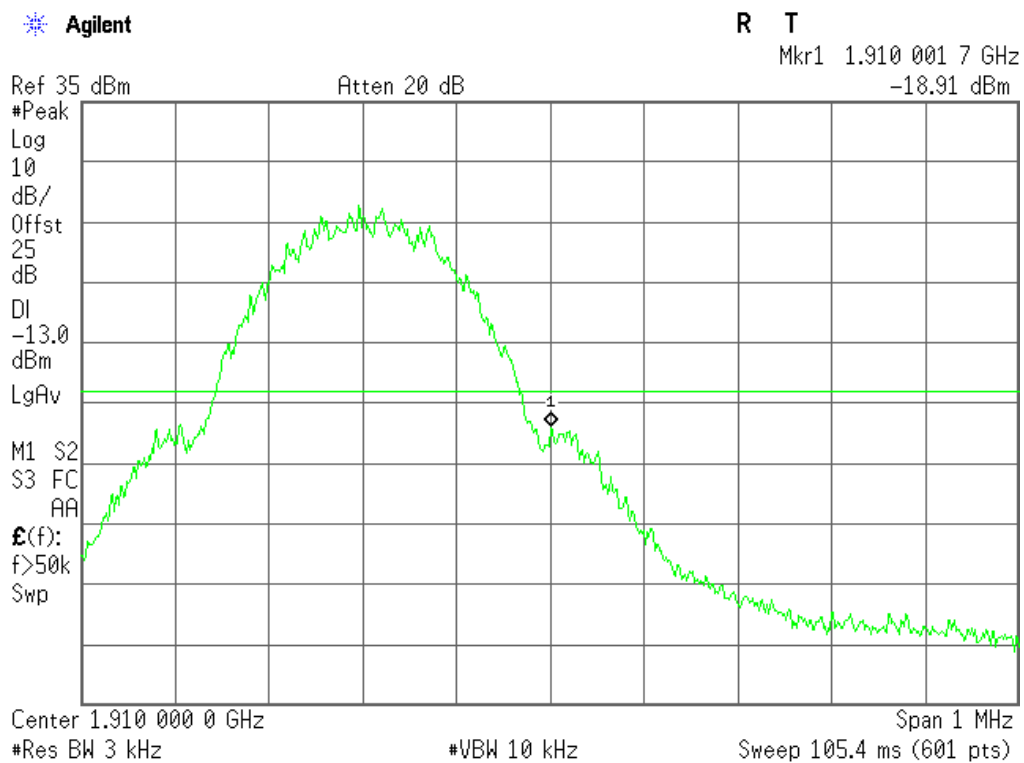


Low Band Edge UMTS BAND V CH 4132

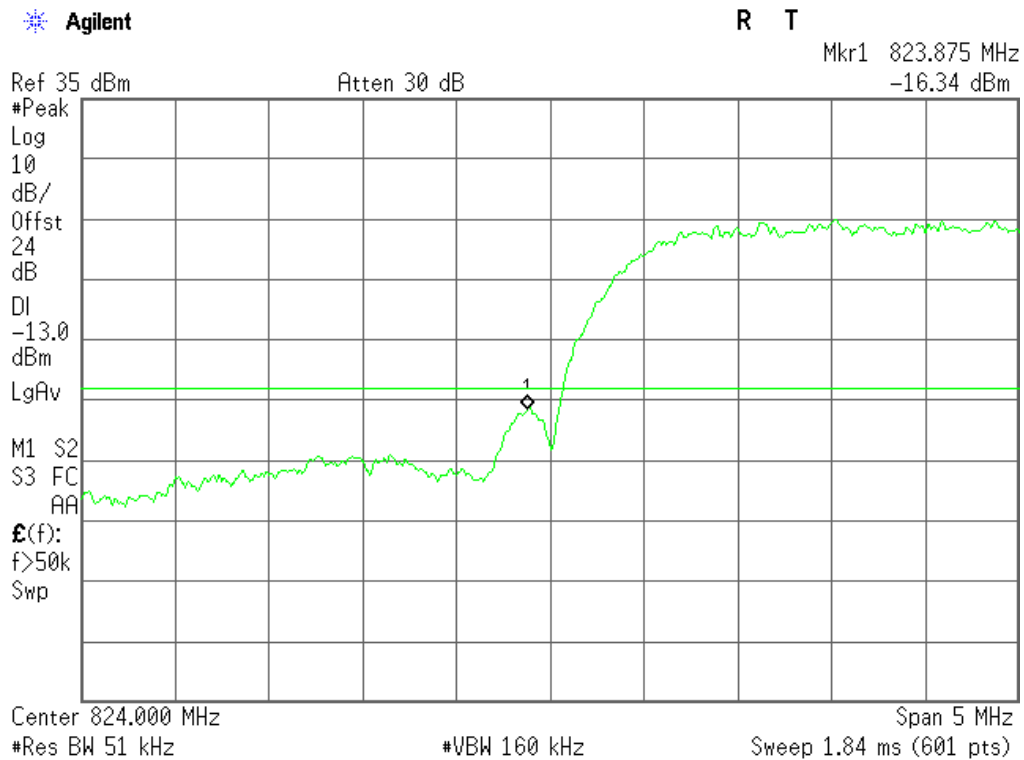


High Band Edge UMTS BAND V CH 4233

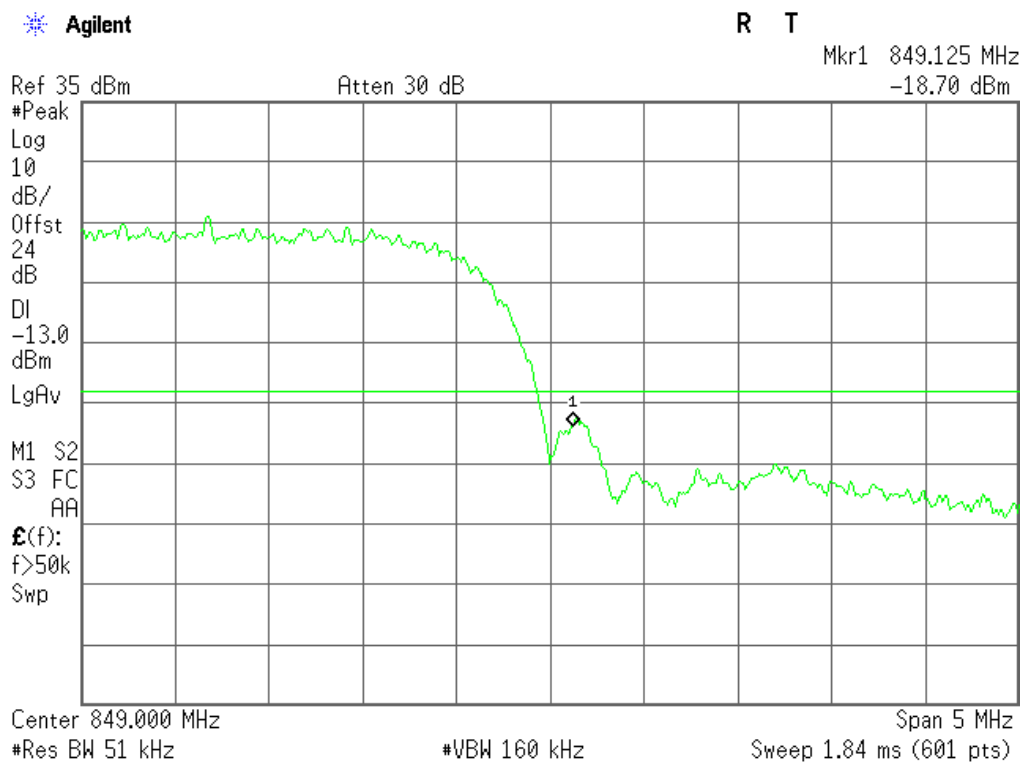

Low Band Edge HSDPA BAND V CH 4132

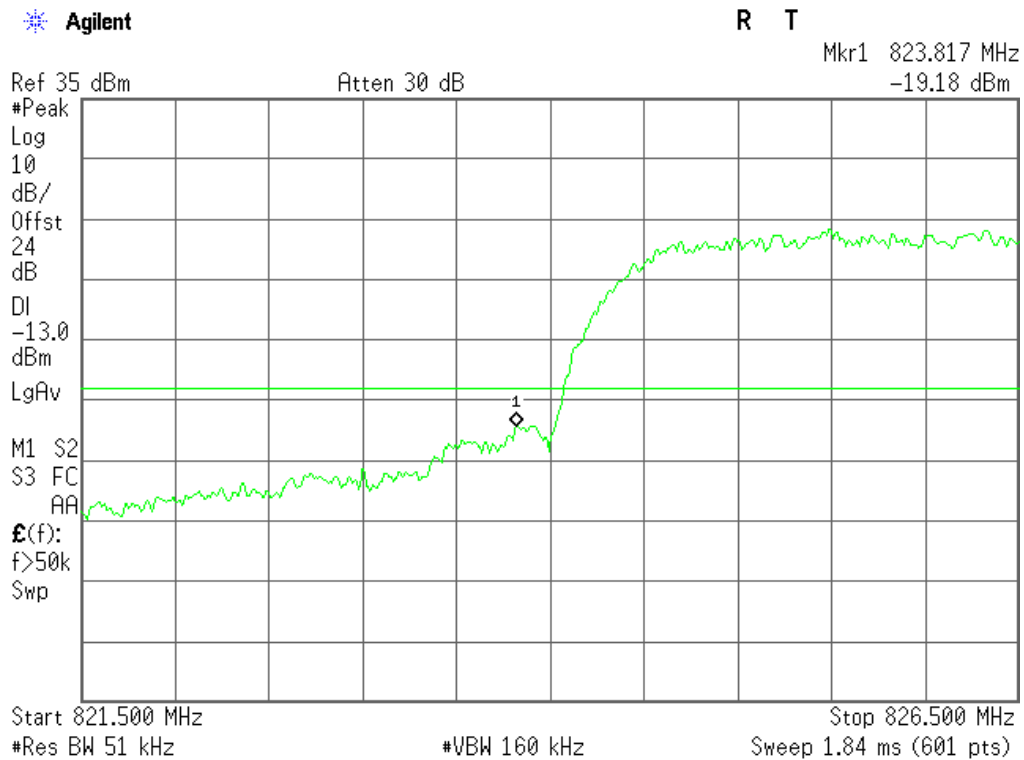

High Band Edge HSDPA BAND V CH 4233

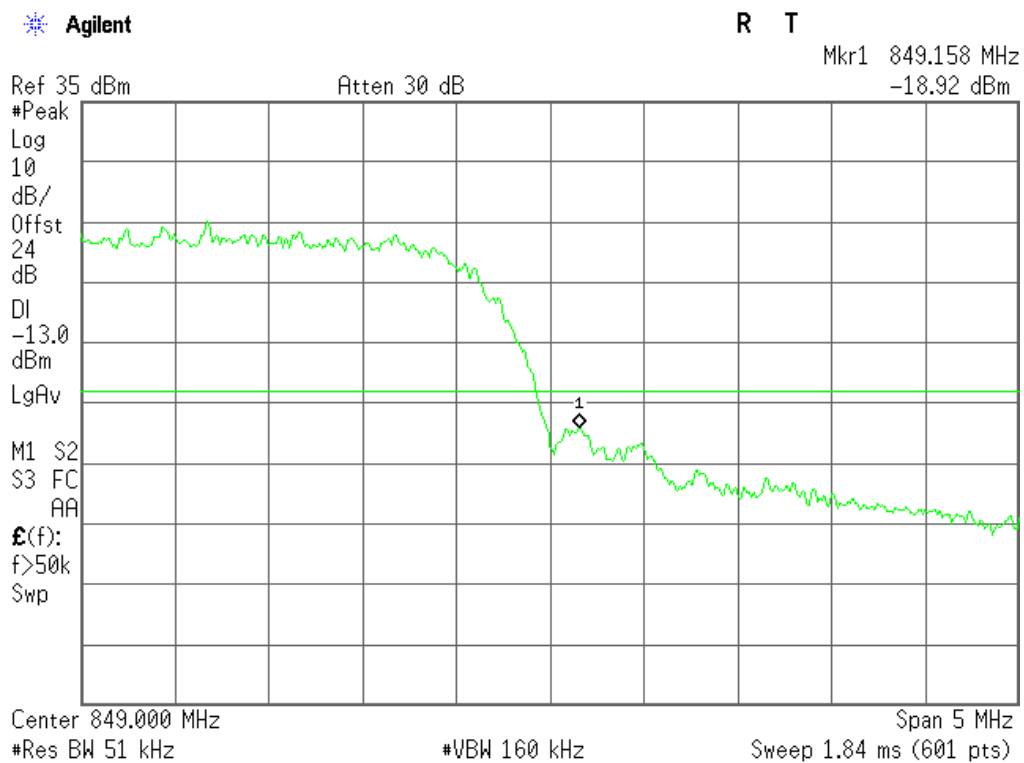

Low Band Edge HSUPA BAND V CH 4132

Agilent

R T

Mkr1 823.867 MHz
-20.83 dBm

Ref 35 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

24

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

AA

£(f):

f>50k

Swp

Start 821.500 MHz

Stop 826.500 MHz

#Res BW 51 kHz

#VBW 160 kHz

Sweep 1.84 ms (601 pts)

High Band Edge HSUPA BAND V CH 4233

Agilent

R T

Mkr1 1.910 150 GHz
-24.10 dBm

Ref 35 dBm

Atten 20 dB

#Peak

Log

10

dB/

Offst

25

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

AA

£(f):

f>50k

Swp

Center 1.910 000 GHz


Span 5 MHz

#Res BW 51 kHz


#VBW 160 kHz

Sweep 1.84 ms (601 pts)


Low Band Edge UMTS BAND II CH 9262

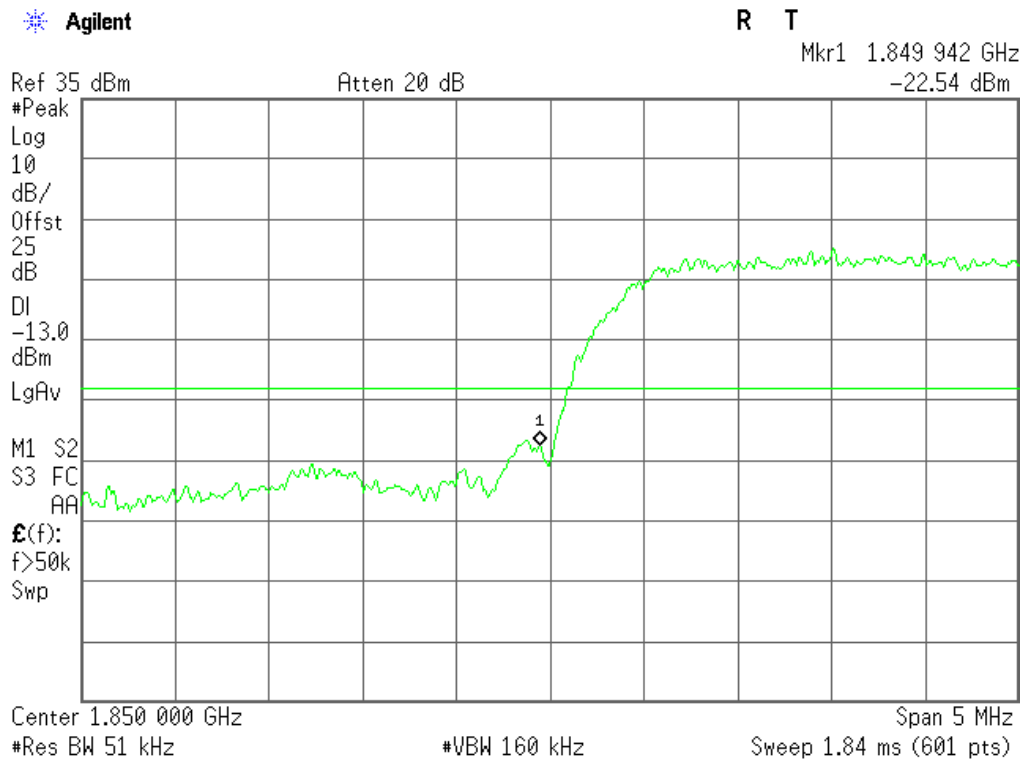


High Band Edge UMTS BAND II CH 9538

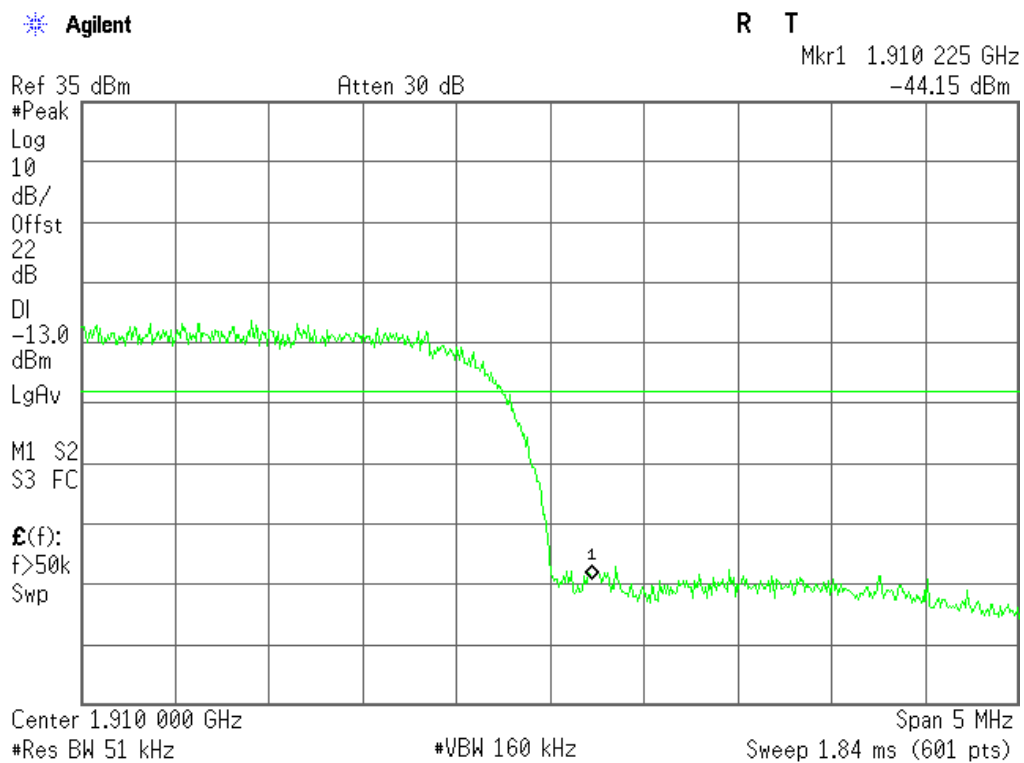


Low Band Edge HSDPA BAND II CH 9262

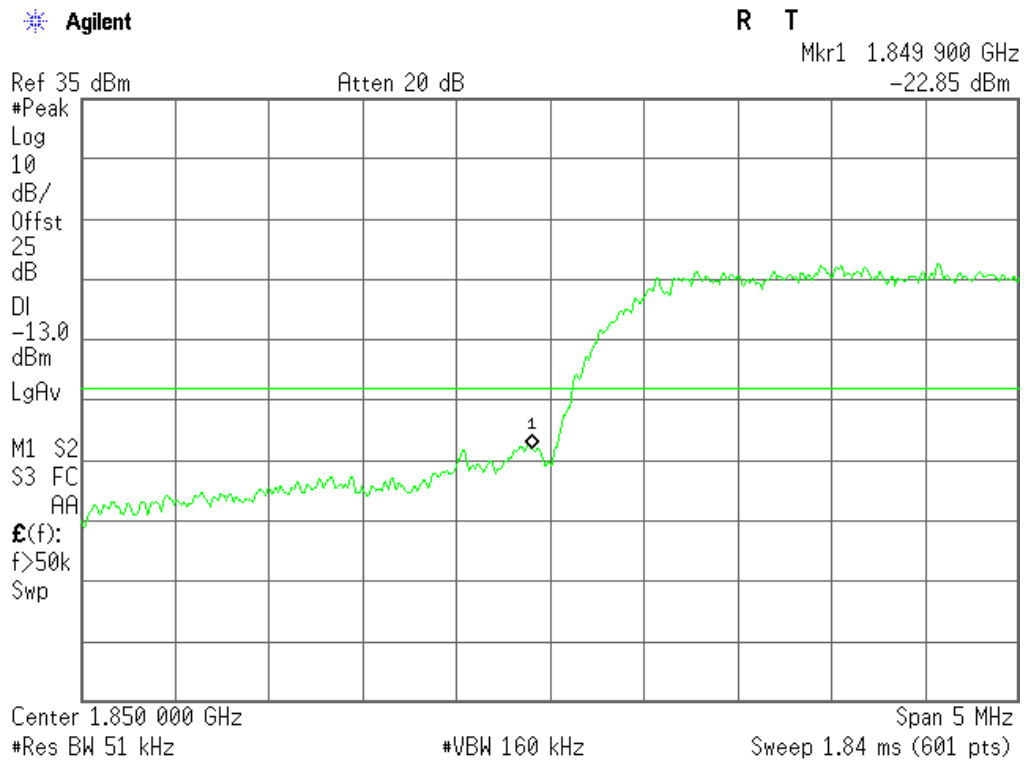


High Band Edge HSDPA BAND II CH 9538

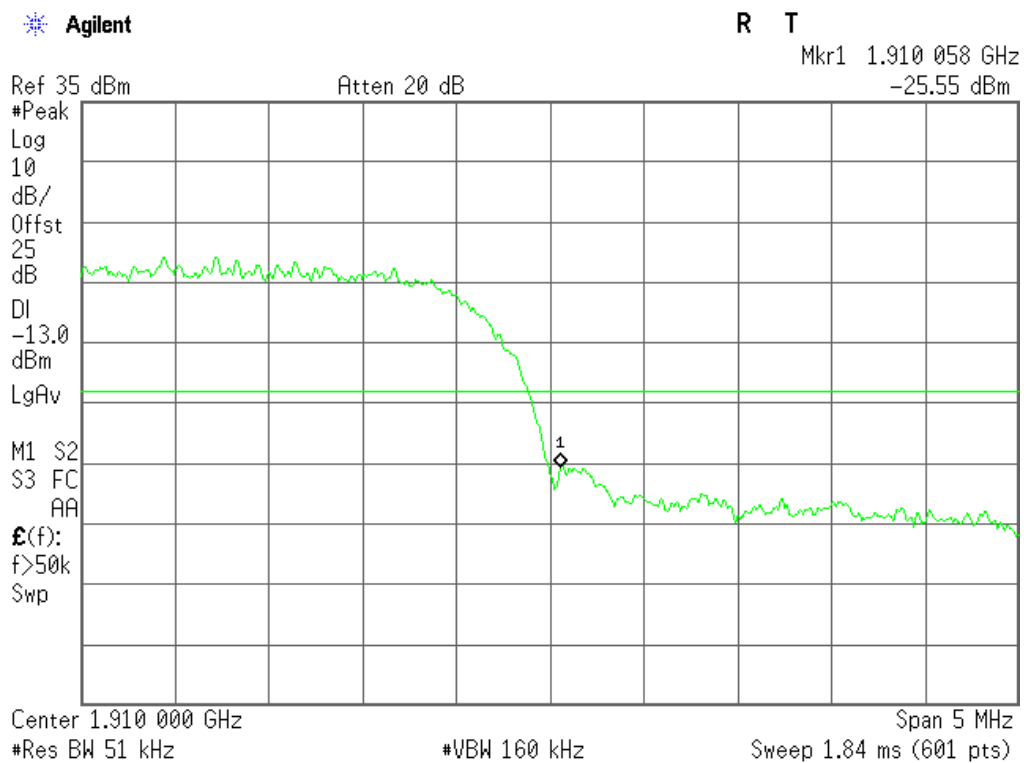

Low Band Edge HSUPA BAND II CH 9262

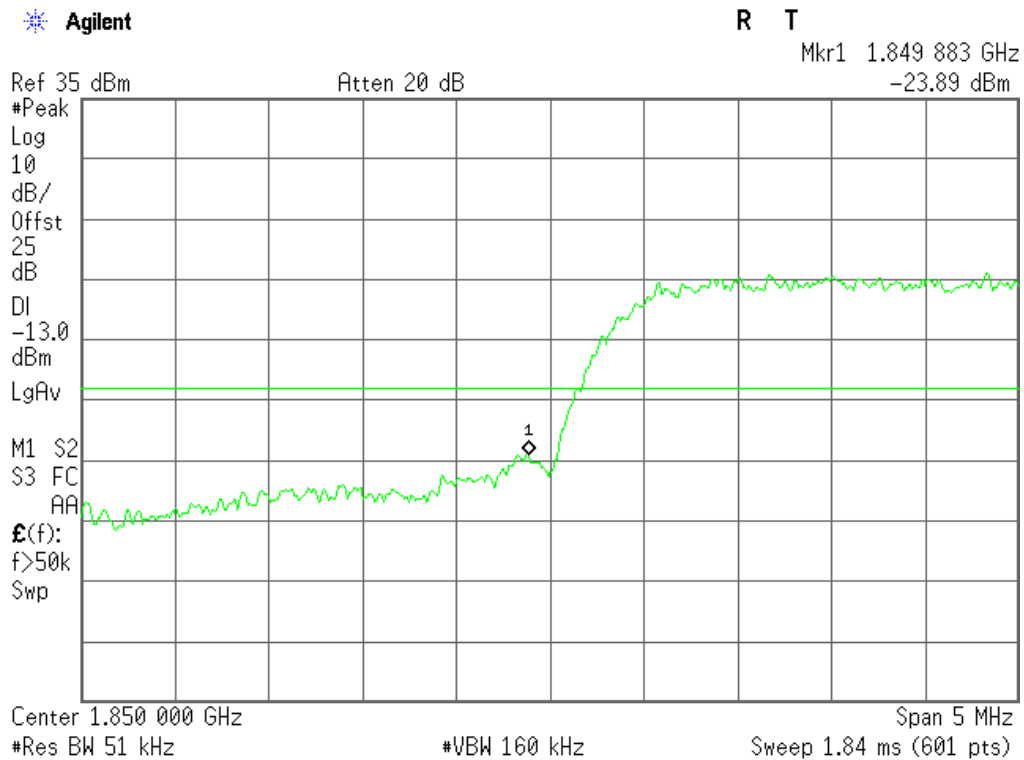



High Band Edge HSUPA BAND II CH 9538

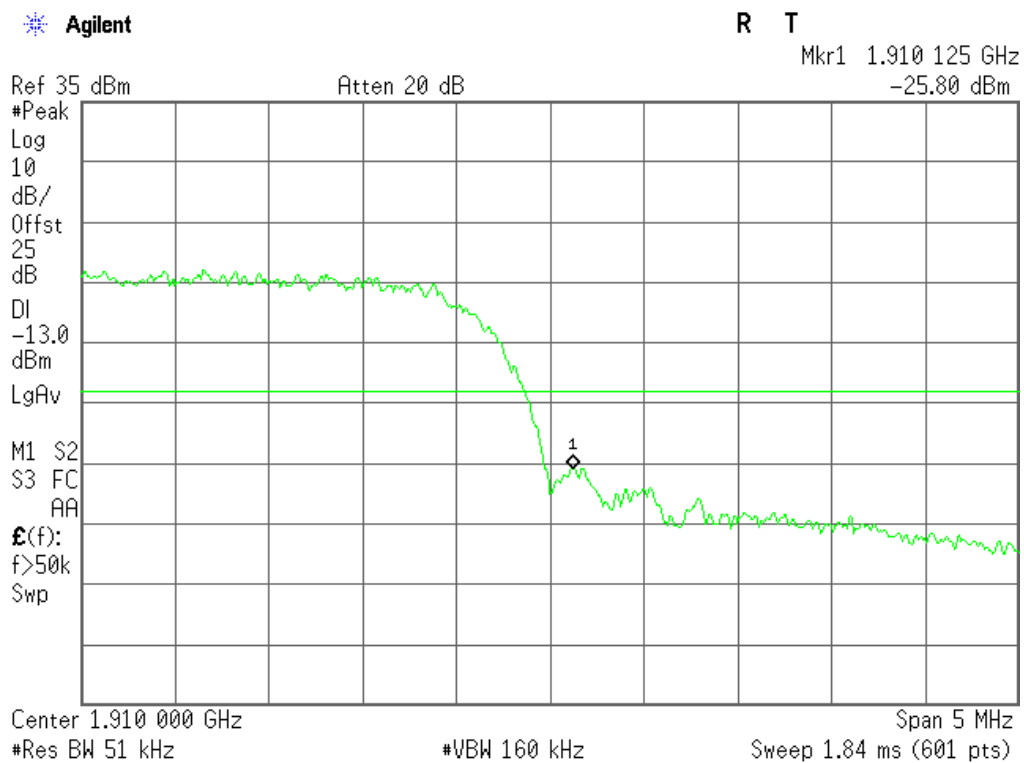

APPENDIX IV

PHOTOGRAPHS OF TEST SETUP

RADIATED SPURIOUS EMISSION

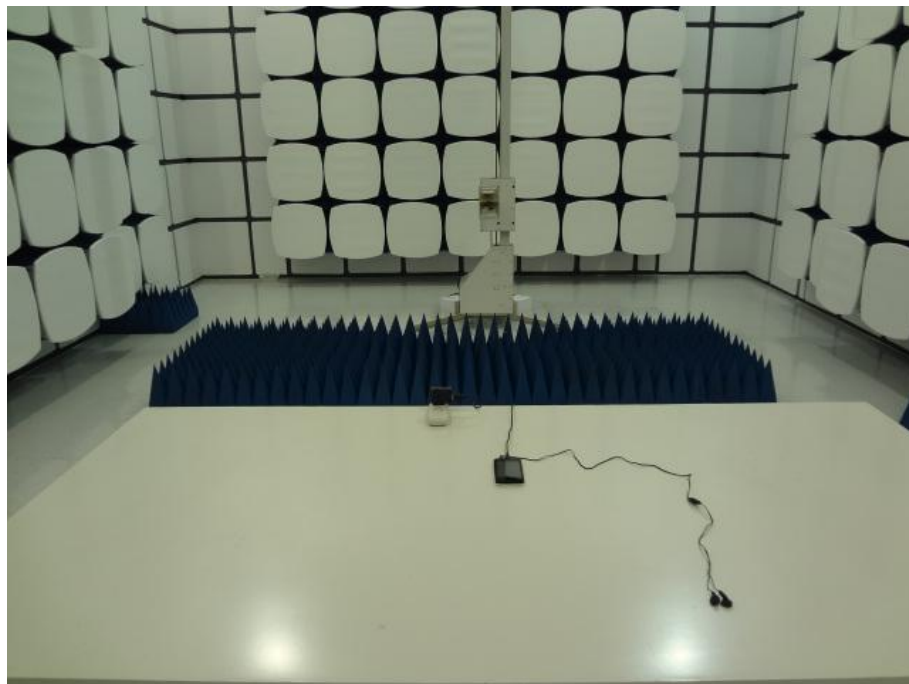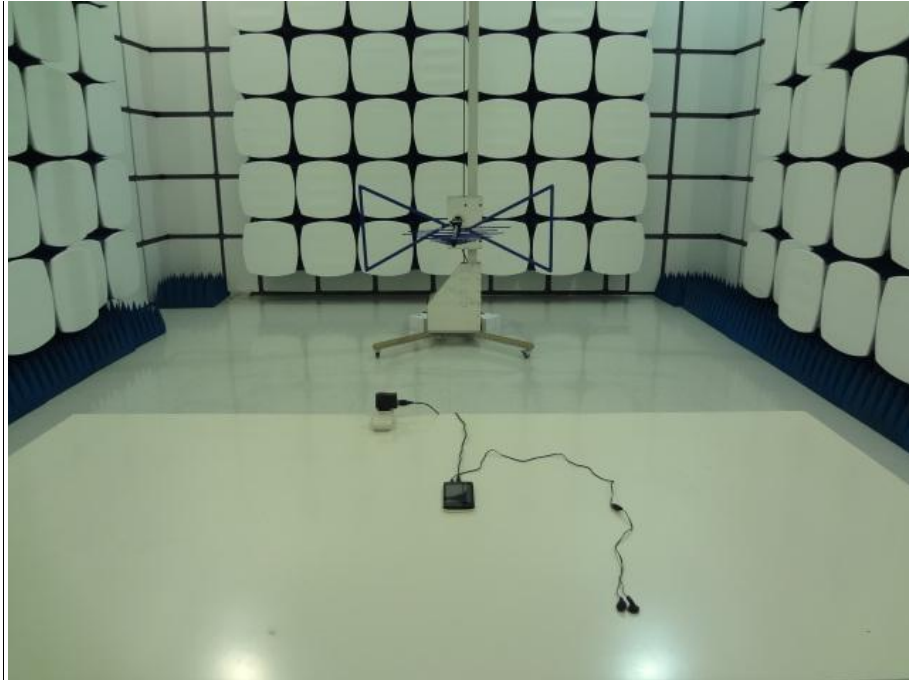

----END OF REPORT----