



FCC PART 15.231

TEST REPORT

For

X-Sense Innovations Co., Ltd.

B4 503D, Tower B, Kexing Science Park, No15 Keyuan Road, Technology Park Community,
Yuehai Avenue, Nanshan District, Shenzhen, China

FCC ID: 2AU4DDBE

Report Type: Original Report	Product Type: Wireless Doorbell
Report Number: RSZ201111010-00	
Report Date: 2020-12-23	
Reviewed By: RF Engineer	Jacob Kong
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
TEST EQUIPMENT LIST AND DETAILS	7
FCC §15.203 - ANTENNA REQUIREMENT.....	8
APPLICABLE STANDARD	8
ANTENNA CONNECTOR CONSTRUCTION	8
FCC §15.205, §15.209, §15.231 (B) - RADIATED EMISSIONS	9
APPLICABLE STANDARD	9
EUT SETUP	9
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	10
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST RESULTS SUMMARY	11
TEST DATA	11
FCC §15.231(A) (1) - DEACTIVATION TESTING.....	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST DATA	18
FCC §15.231(C) – 20 DB EMISSION BANDWIDTH TESTING	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST DATA	19

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Wireless Doorbell
Tested Model	D-3C
Multiple Models	D-3E,BB-11,BW-11, DB-B
Model Difference	Refer to the DoS letter
Frequency Range	433.92MHz
Modulation Technique	OOK
Antenna Specification*	0dBi(It is provided by the applicant)
Voltage Range	DC 3V from battery
Date of Test	2020-11-13 to 2020-12-22
Sample serial number	RSZ201111010-RF-S1(Assigned by BACL, Shenzhen)
Received date	2020-11-11
Sample/EUT Status	Good condition

Objective

All the test measurements were performed according to the measurement procedure described in ANSI C63.10 - 2013.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209, 15.35(c) and 15.231 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10 - 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.5dB
RF conducted test with spectrum		±1.5dB
AC Power Lines Conducted Emissions		±1.95dB
Radiated Emissions	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±3 °C
Humidity		±6%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing by manufacturer.

Operating frequency: 433.92MHz

Special Accessories

No special accessories was used

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From / Port	To
/	/	/	/

Block Diagram of Test Setup

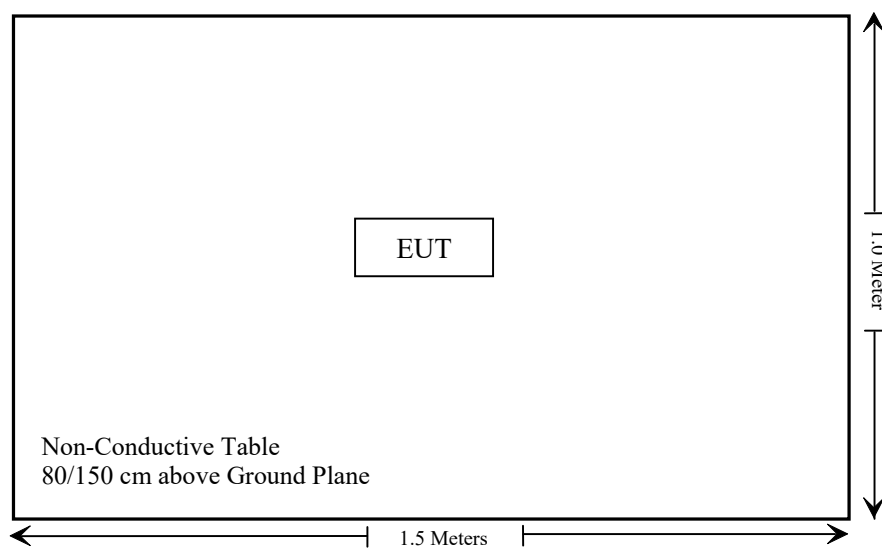

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Not Applicable
§15.205, §15.209, §15.231(b)	Radiated Emissions	Compliance
§15.231 (c)	20dB Emission Bandwidth	Compliance
§15.231 (a) (1)	Deactivation	Compliance

Not Applicable: The EUT is powered by battery only.

TEST EQUIPMENT LIST AND DETAILS

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknown	Cable 2	RF Cable 2	F-03-EM197	2020/11/29	2021/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2020/11/29	2021/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached. And the antenna gain is 0dBi; fulfill the requirement of this section. Please refer to EUT photos.

Result: Compliant.

FCC §15.205, §15.209, §15.231 (b) - RADIATED EMISSIONS**Applicable Standard**


FCC §15.205, §15.209, §15.231 (b)


According to FCC §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field Strength of Fundamental (Microvolts /meter)	Field Strength of spurious emissions ((Microvolts /meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750**	125 to 375**
174-260	3750	375
260-470	3750 to 12500**	375 to 1250**
Above 470	12500	1250

*Linear interpolations.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.

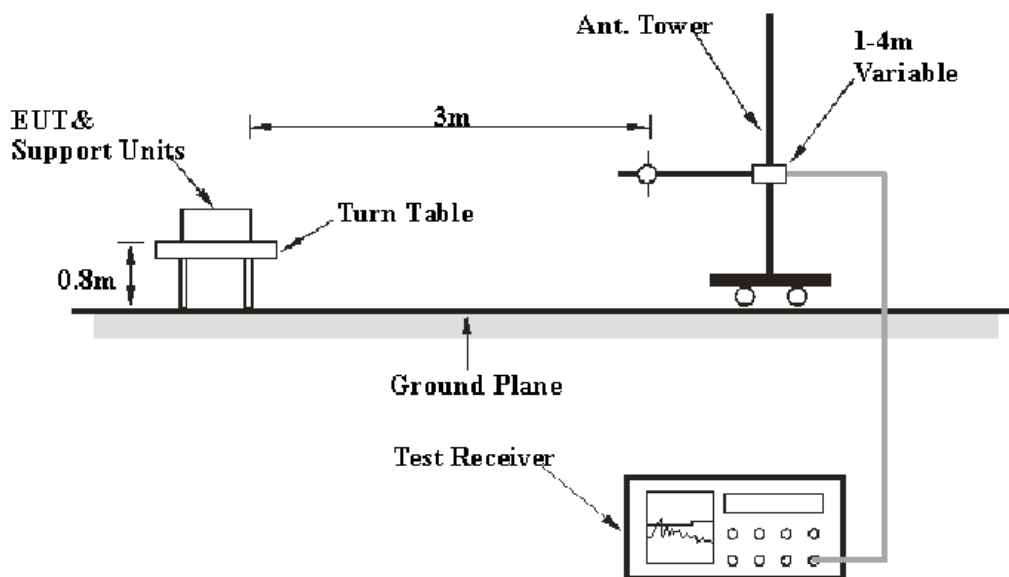EUT Setup**Below 1 GHz:**

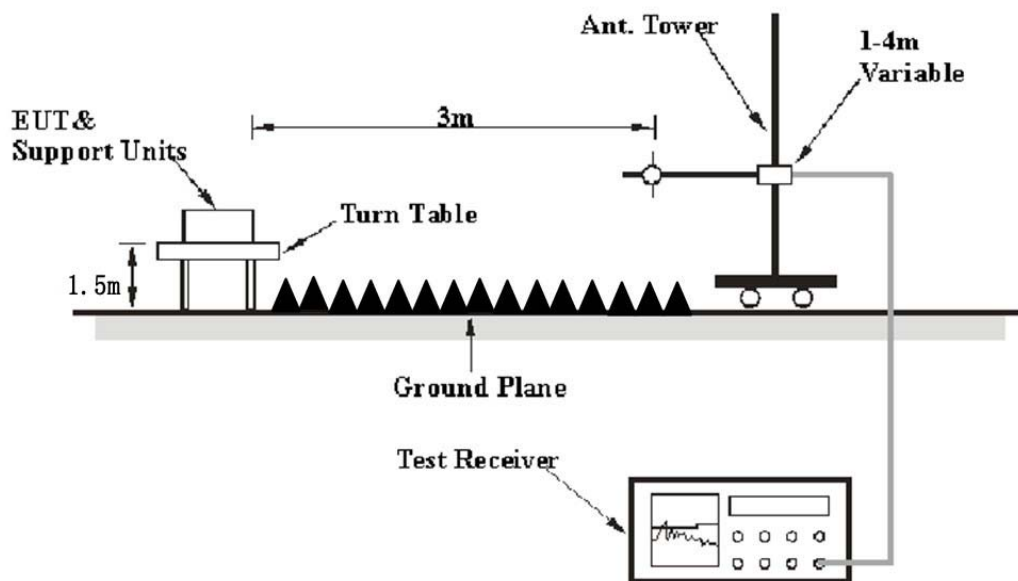Above 1 GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10 - 2013. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	PK
Above 1 GHz	1 MHz	3 MHz	/	PK

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 5.8 dB means the emission is 5.8 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.205, §15.209, §15.231 (b).


Test Data

Environmental Conditions

Temperature:	22~26.5℃
Relative Humidity:	46~60%
ATM Pressure:	101.0 kPa

The testing was performed by Holland Yang from 2020-11-14 to 2020-12-03 for below 1GHz and Leven Gan on 2020-11-13 for above 1GHz.

Test mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

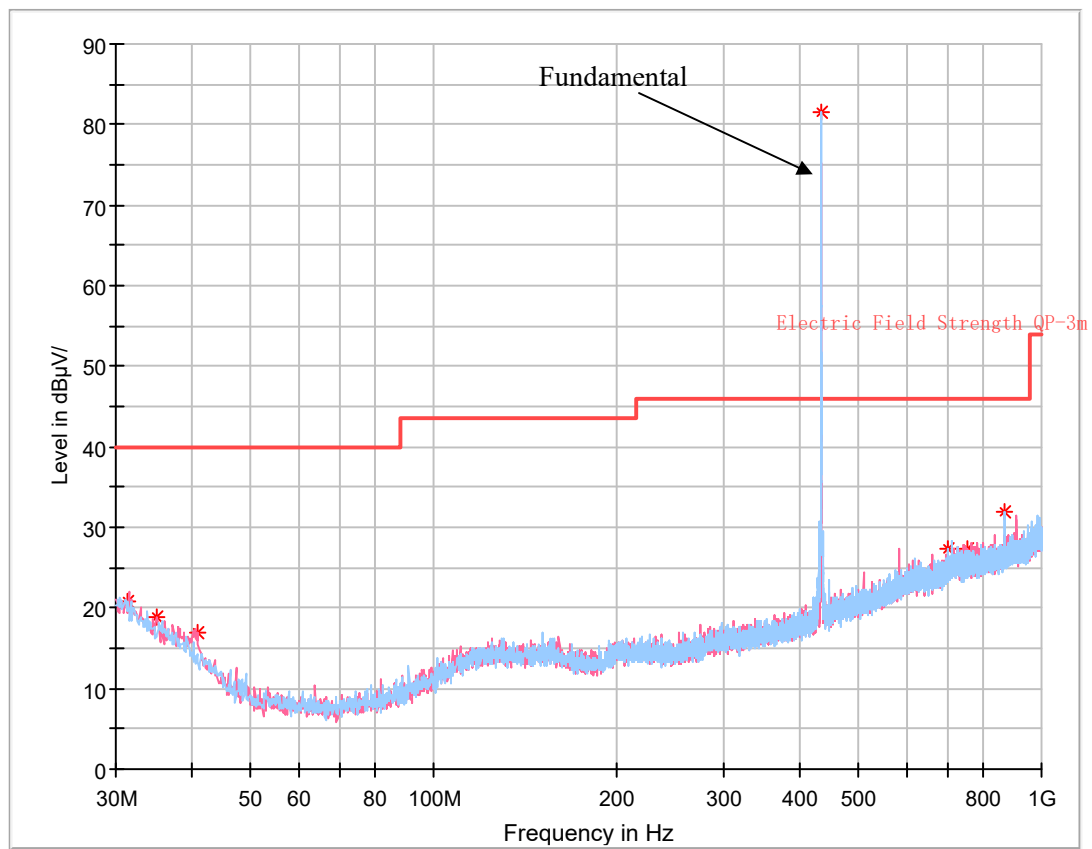

Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
31.455000	20.79	60.83	40.04	105.0	H	0.0	-5.3
34.971250	18.98	60.83	41.85	205.0	V	61.0	-7.4
40.912500	16.97	60.83	43.86	105.0	V	11.0	-11.2
700.391250	27.34	60.83	33.49	105.0	H	174.0	-1.2
758.106250	27.40	60.83	33.43	300.0	V	161.0	-0.1
867.837500	31.94	60.83	28.89	105.0	H	322.0	0.9

Note: the peak value can meet the limit of the average value.

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.231(b)		
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)	Comment
433.92	89.55	PK	224	1.6	H	-6.5	83.05	100.83	17.78	fundamental
433.92	87.62	PK	186	1.5	V	-6.5	81.12	100.83	19.71	fundamental
1301.76	47.17	PK	63	2.4	H	-3.28	43.89	74.00	30.11	Harmonic
1301.76	50.52	PK	325	1.9	V	-3.28	47.24	74.00	26.76	Harmonic
1735.68	54.83	PK	97	2.4	H	-1.86	52.97	80.83	27.86	Harmonic
1735.68	59.25	PK	318	1.6	V	-1.86	57.39	80.83	23.44	Harmonic
2169.60	57.01	PK	342	1.5	H	-0.06	56.95	80.83	23.88	Harmonic
2169.60	58.64	PK	69	1.1	V	-0.06	58.58	80.83	22.25	Harmonic
2603.52	53.38	PK	16	1.7	H	0.83	54.21	80.83	26.62	Harmonic
2603.52	54.29	PK	209	2.0	V	0.83	55.12	80.83	25.71	Harmonic
3037.44	55.42	PK	17	2.3	H	1.94	57.36	80.83	23.47	Harmonic
3037.44	55.47	PK	140	2.1	V	1.94	57.41	80.83	23.42	Harmonic
3471.36	52.61	PK	190	1.9	H	3.13	55.74	80.83	25.09	Harmonic
3471.36	51.74	PK	155	1.4	V	3.13	54.87	80.83	25.96	Harmonic
3905.28	51.83	PK	180	1.7	H	4.68	56.51	74.00	17.49	Harmonic
3905.28	45.75	PK	147	1.8	V	4.68	50.43	74.00	23.57	Harmonic

Field Strength of Average Fundamental & Emission							
Frequency (MHz)	Peak Measurement @3m (dBμV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.231(b)		
					Limit (dBμV/m)	Margin (dB)	Comment
433.92	83.05	H	-5.63	77.42	80.83	3.41	fundamental
433.92	81.12	V	-5.63	75.49	80.83	5.34	fundamental
1301.76	43.89	H	-5.63	38.26	54.00	15.74	Harmonic
1301.76	47.24	V	-5.63	41.61	54.00	12.39	Harmonic
1735.68	52.97	H	-5.63	47.34	60.83	13.49	Harmonic
1735.68	57.39	V	-5.63	51.76	60.83	9.07	Harmonic
2169.60	56.95	H	-5.63	51.32	60.83	9.51	Harmonic
2169.60	58.58	V	-5.63	52.95	60.83	7.88	Harmonic
2603.52	54.21	H	-5.63	48.58	60.83	12.25	Harmonic
2603.52	55.12	V	-5.63	49.49	60.83	11.34	Harmonic
3037.44	57.36	H	-5.63	51.73	60.83	9.1	Harmonic
3037.44	57.41	V	-5.63	51.78	60.83	9.05	Harmonic
3471.36	55.74	H	-5.63	50.11	60.83	10.72	Harmonic
3471.36	54.87	V	-5.63	49.24	60.83	11.59	Harmonic
3905.28	56.51	H	-5.63	50.88	54.00	3.12	Harmonic
3905.28	50.43	V	-5.63	44.8	54.00	9.2	Harmonic

Note:

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (Rx) + cable loss – amplifier factor


Margin = Limit - Corr. Amplitude

Dutycycle: $Ton = 2.04 + 40 \times 0.528 + 28 \times 1.04ms = 52.28ms$ $Tp = 100 ms$ Duty cycle = $Ton / Tp = Ton / 100 = 0.5228$ Duty Cycle Corrected Factor = $20lg(Duty\ cycle) = 20lg(0.5228) = -5.63$


Duty Cycle




Pulse 1

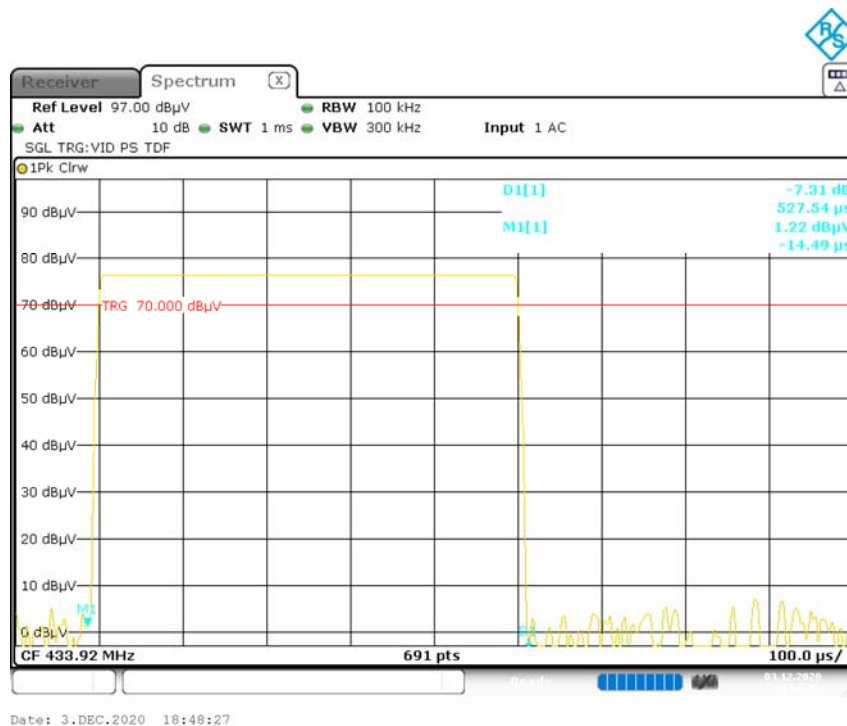


Pulse 2

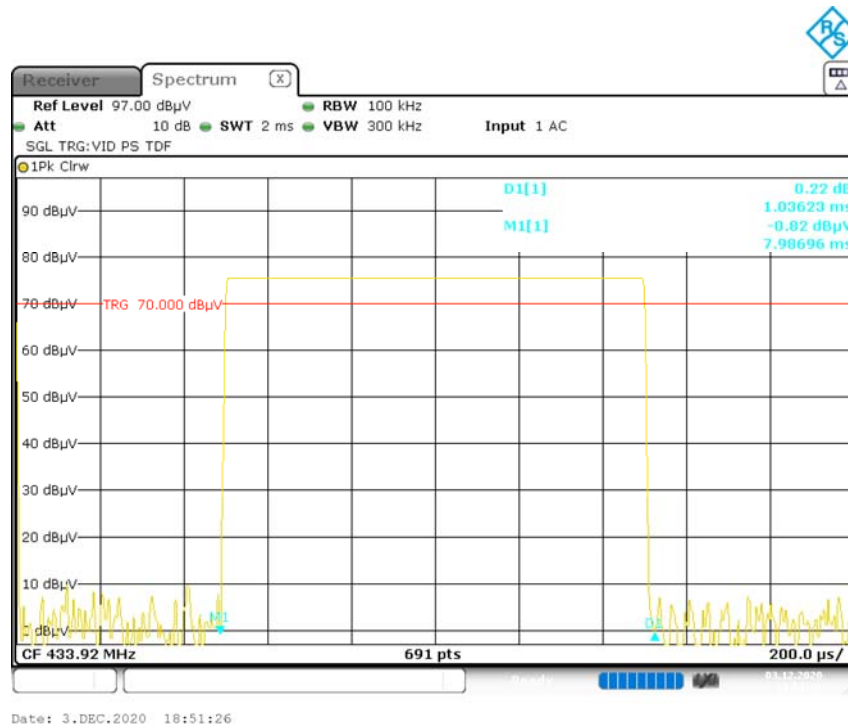


Pulse 3

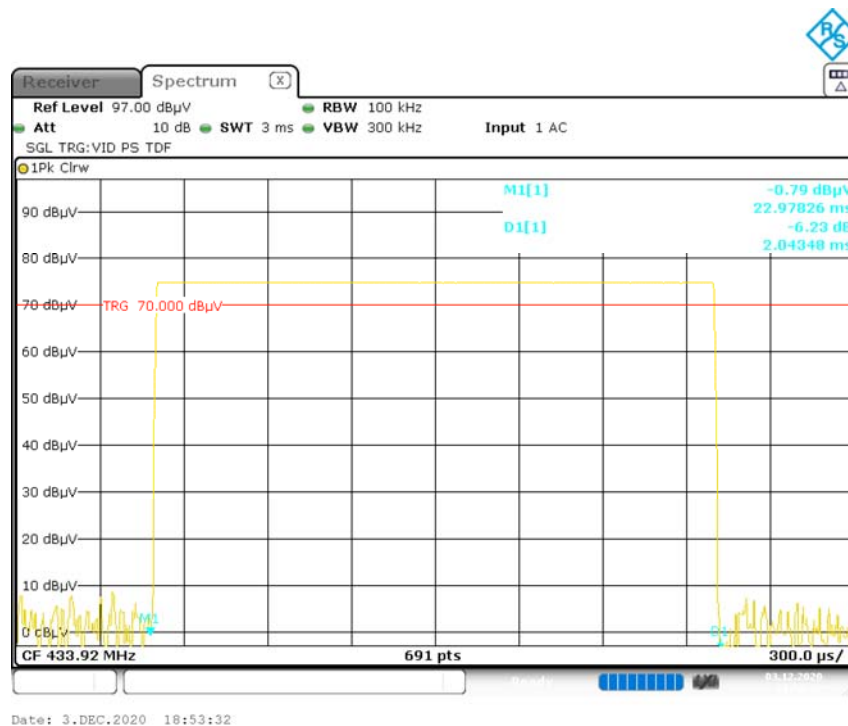

Pre-scan-Horizontal

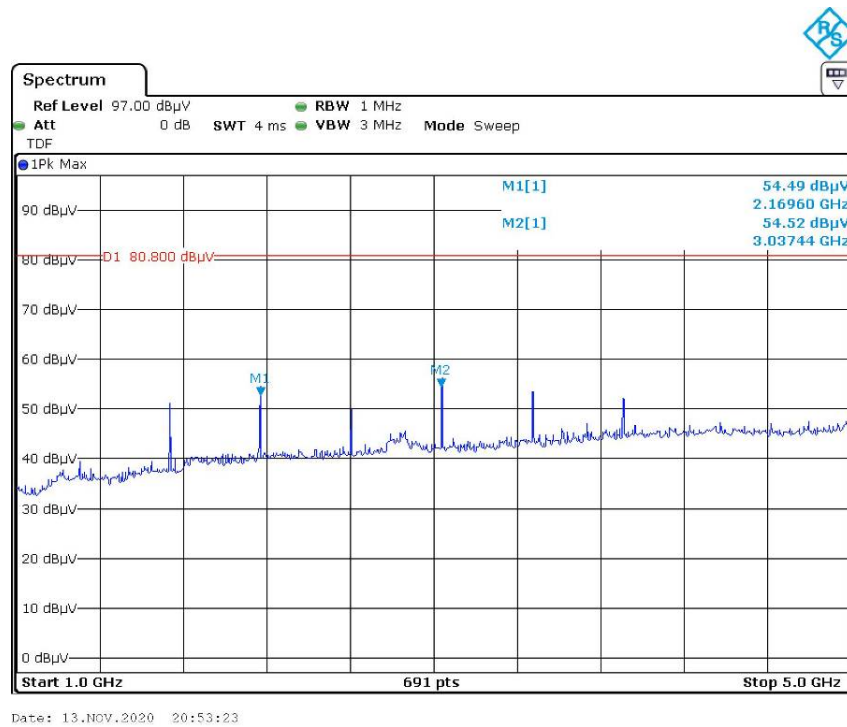

Pre-scan – Vertical

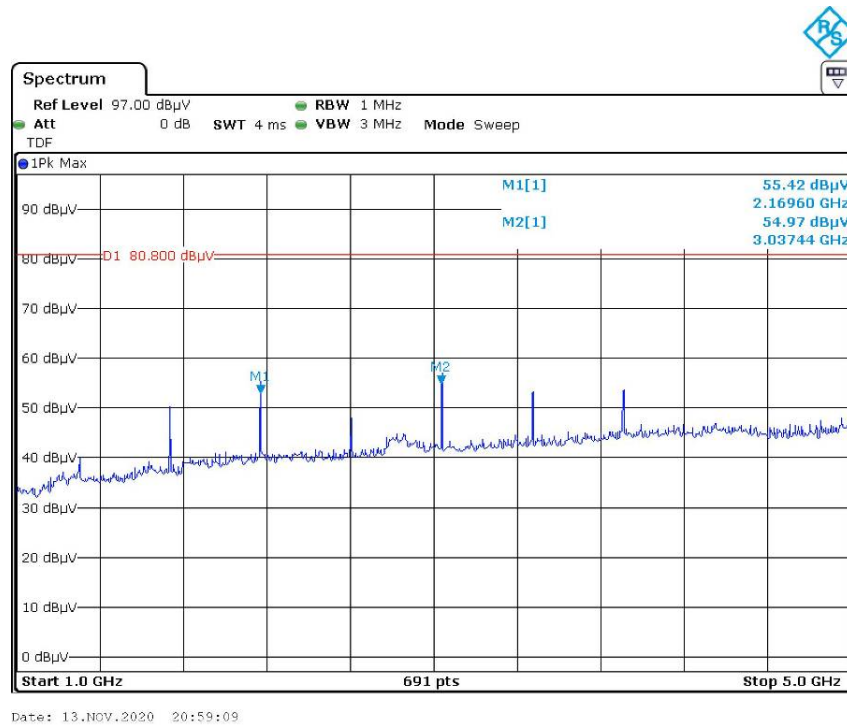

FCC §15.231(a) (1) - DEACTIVATION TESTING

Applicable Standard

Per FCC §15.231(a) (1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer=operating frequency.
3. Set the spectrum analyzer as RBW=100kHz/ VBW=300kHz/ Span=0Hz.
4. Repeat above procedures until all frequency measured was complete.


Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Thea Xiao on 2020-12-22.
Test mode: Transmitting

Test Result: Compliant. This product will cease transmission within 5 seconds after activation. Please refer to following plots.

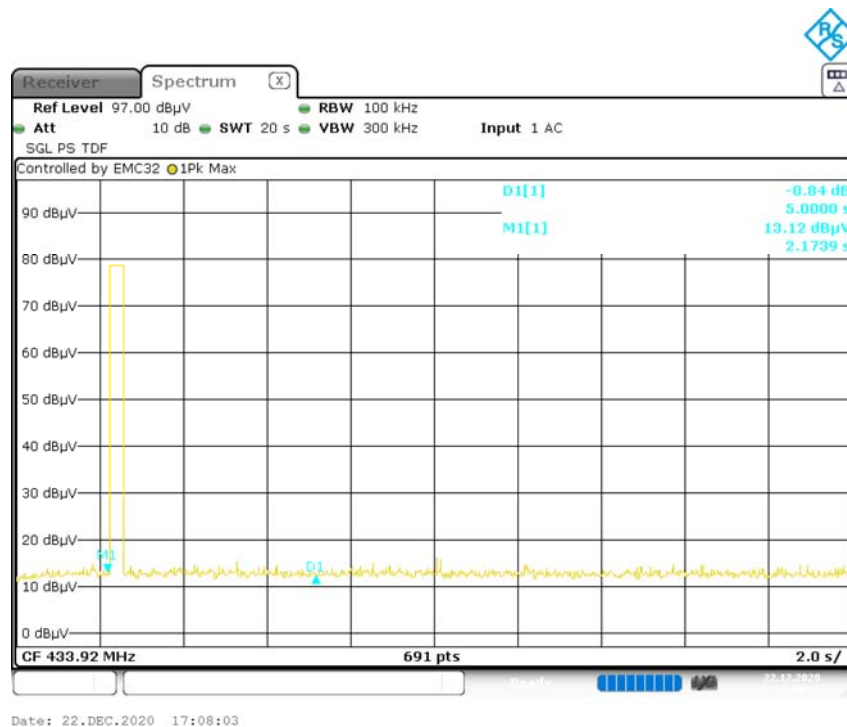

Date: 22.DEC.2020 17:08:03

FCC §15.231(c) – 20 dB EMISSION BANDWIDTH TESTING

Applicable Standard

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Procedure

The EUT is setting to the transmit mode, the waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

Test Data

Environmental Conditions


Temperature:	25°C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Thea Xiao on 2020-12-03.

Test Mode: Transmitting

Please refer to following table and plots.

Channel Frequency (MHz)	20 dB Emission Bandwidth (kHz)	<Limit (kHz)	Result
433.92	5.210	1085	Pass

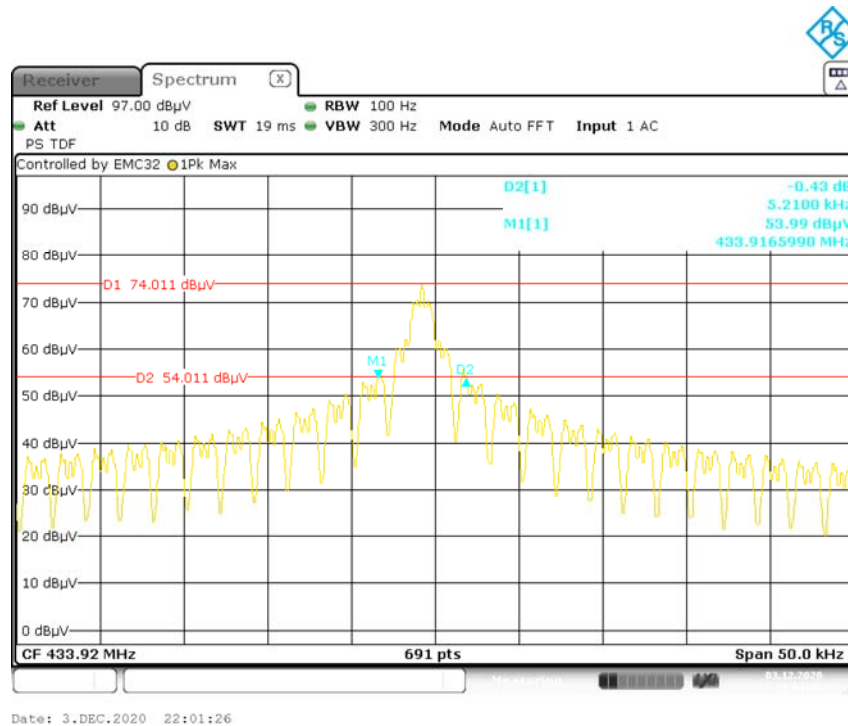20 dB Emission Bandwidth

***** END OF REPORT *****