



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: HONG KONG IPRO TECHNOLOGY CO.,LIMITED

Address: 12/F 3 LOCKHART ROAD WANCHAI HK

FCC ID: PQ4IPROY100

Product Name: Smart Phone

Model Number: Y100

**Standard(s): 47 CFR Part 15 Subpart B
ANSI C63.4-2014**

The above equipment has been tested and found compliance with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR21100102-00D

Date Of Issue: 2021-11-25

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 DESCRIPTION OF TEST CONFIGURATION	5
1.2.4 Block Diagram of Test Setup.....	6
1.3 MEASUREMENT UNCERTAINTY	7
2. SUMMARY OF TEST RESULTS	8
3. REQUIREMENTS AND TEST PROCEDURES	9
3.1 AC LINE CONDUCTED EMISSIONS	9
3.1.1 EUT Setup.....	9
3.1.2 EMI Test Receiver Setup	9
3.1.3 Test Procedure	10
3.1.4 Corrected Amplitude & Margin Calculation.....	10
3.2 RADIATION EMISSIONS.....	11
3.2.1 EUT Setup.....	11
3.2.2 EMI Test Receiver Setup	12
3.2.3 Test Procedure	12
3.2.4 Corrected Amplitude & Margin Calculation.....	12
4. TEST DATA AND RESULTS.....	13
4.1 AC LINE CONDUCTED EMISSIONS	13
4.2 RADIATION EMISSIONS.....	16

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Smart Phone
EUT Model:	Y100
Highest Operation Frequency:	2480 MHz
Rated Input Voltage:	DC 3.8 from battery or DC 5V from adapter
Serial Number:	CR21100102-RF S3/6
EUT Received Date:	2021.10.23
EUT Received Status:	GOOD

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	IPRO	Y100	Input: AC100V-240V 50/60Hz 150mA Output: DC 5.0V DC 1A

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Typical Use Mode, which was provided by the manufacturer. Test Mode: Downloading
Equipment Modifications:	No
EUT Exercise Software:	Winthrax.exe

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	E480	PF-1QQYYP 19/06
Unknown	Earphone	Unknown	Earphone 01
PHILIPS	Keyboard	SPK6234	K234210510742
PHILIPS	Mouse	SPK7214	M214BQ210411113

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Mouse Cable	No	No	2	Mouse	Laptop
Earphone Cable	No	No	2	Earphone	EUT
RJ45 Cable	No	No	1.2	Laptop	Router
Keyboard Cable	No	No	1.8	Keyboard	Laptop
USB Cable	No	No	1.2	EUT	Laptop

1.2.4 Block Diagram of Test Setup

Conducted emissions:

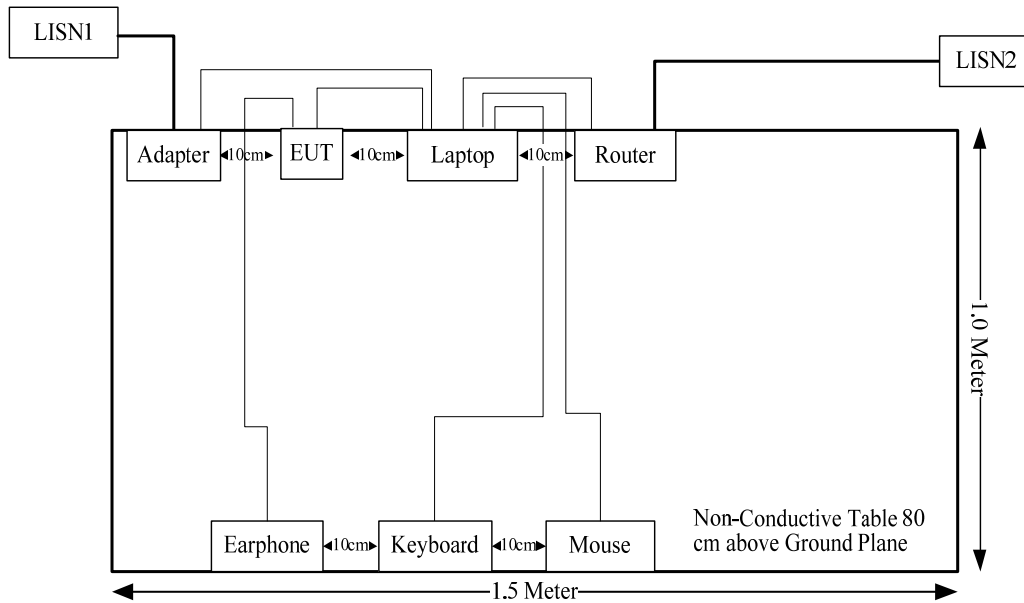

Radiated emissions:

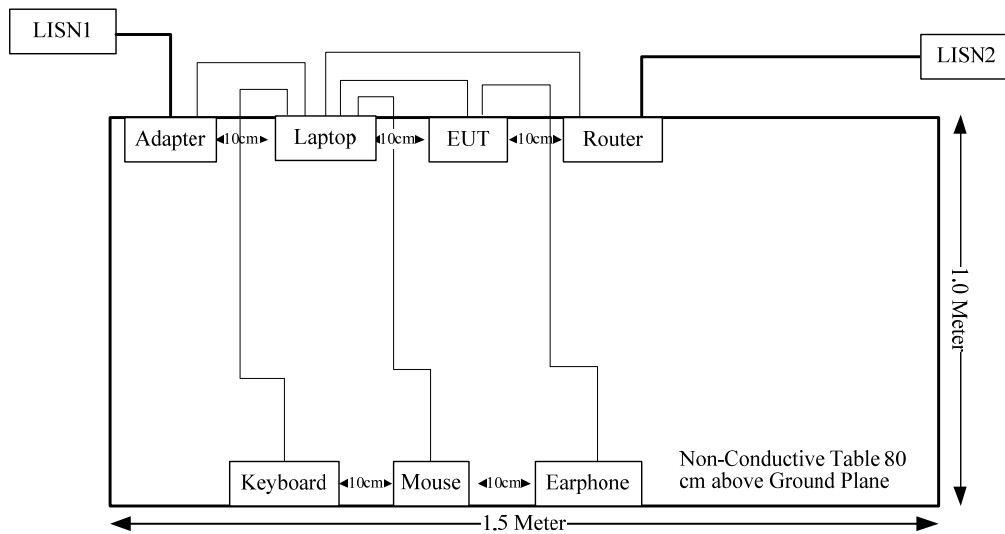

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 5\%$
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)


2. SUMMARY OF TEST RESULTS

Standard(s) Section	Description of Test	Result
§15.107	Conducted emissions	Compliance
§15.109	Radiated emissions	Compliance

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 EUT Setup

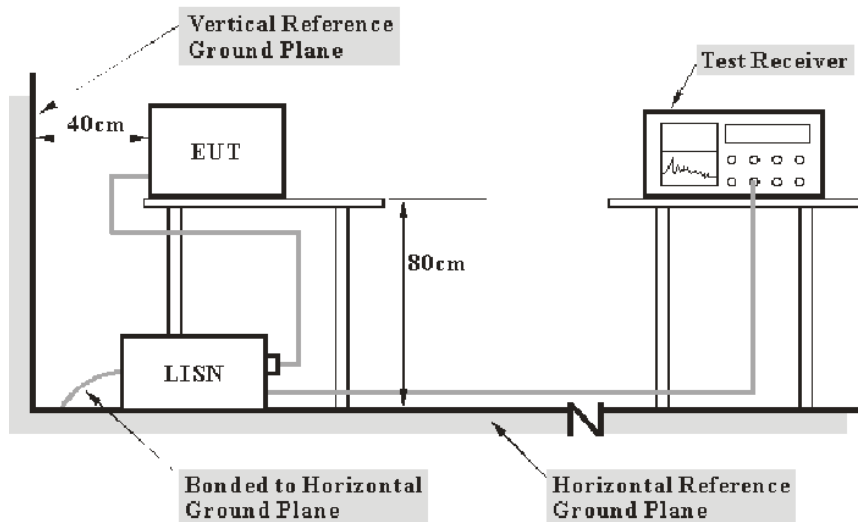

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.2 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.3 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT, the report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

All data was recorded in the Quasi-peak and average detection mode.

The report shall list the six emissions with the smallest margin relative to the limit, unless the margin is greater than 20 dB.

3.1.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN


The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.2 Radiation Emissions

3.2.1 EUT Setup

Below 1GHz:

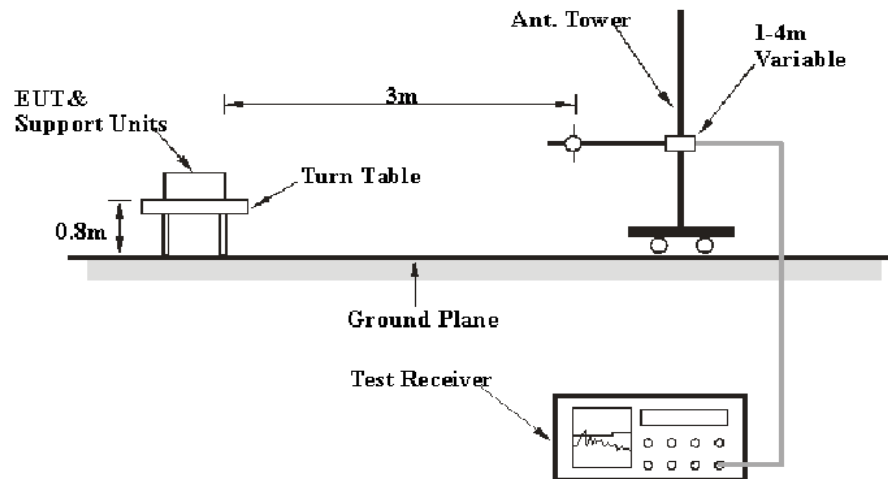

Above 1GHz:

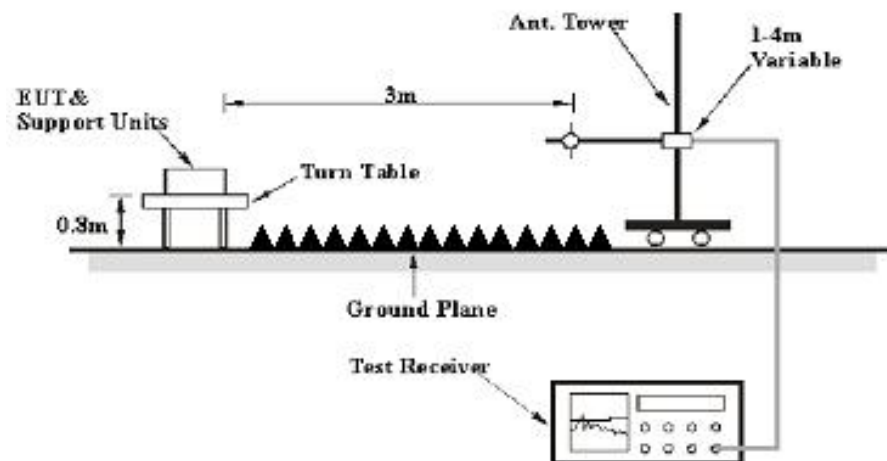

The radiated emission was performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was with the FCC Part 15 B Class B limits.

3.2.2 EMI Test Receiver Setup

The system was investigated from 30 MHz to 18 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

If the maximized peak measured value complies with under the limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.3 Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.4 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR21100102-RF S3/6	Test Date:	2021-10-29
Test Site:	CE	Test Mode:	Downloading
Tester:	Nick Tang	Test Result:	Pass


Environmental Conditions:					
Temperature: (°C)	21.7	Relative Humidity: (%)	65	ATM Pressure: (kPa)	101.3

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101132	2021-04-25	2022-04-24
R&S	LISN	ENV216	101134	2021-04-25	2022-04-24
R&S	EMI Test Receiver	ESR3	102726	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2021-08-08	2022-08-07
Audix	Test Software	E3	190306 (V9)	N/A	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Line:

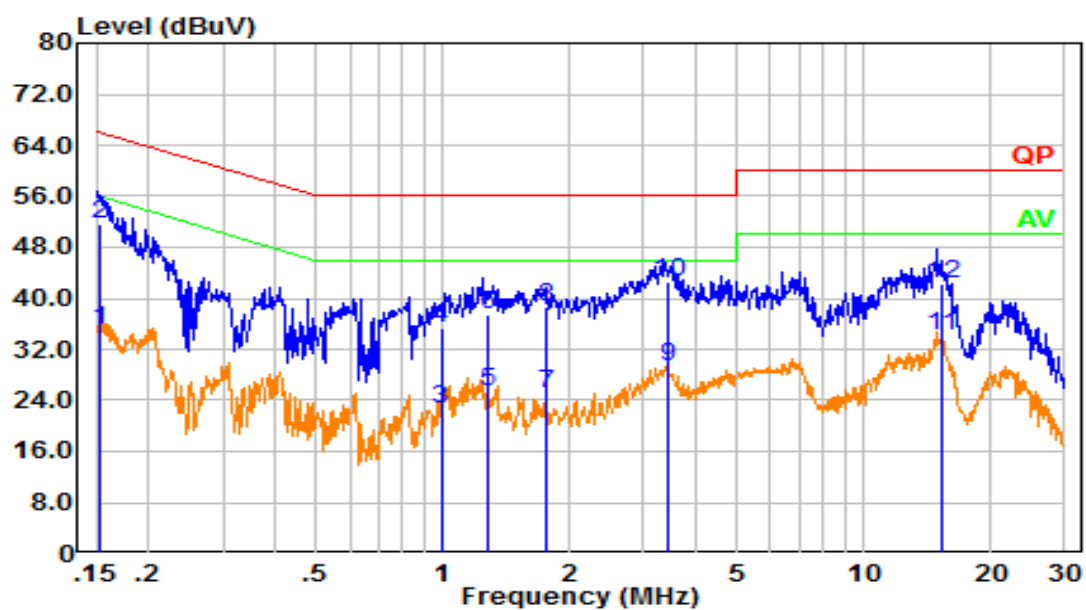

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.153	25.49	9.61	35.10	55.83	20.73	Average
2	0.153	42.15	9.61	51.76	65.83	14.07	QP
3	0.989	12.88	9.62	22.50	46.00	23.50	Average
4	0.989	25.85	9.62	35.47	56.00	20.53	QP
5	1.278	15.63	9.62	25.25	46.00	20.75	Average
6	1.278	27.76	9.62	37.38	56.00	18.62	QP
7	1.757	15.38	9.63	25.01	46.00	20.99	Average
8	1.757	28.97	9.63	38.60	56.00	17.40	QP
9	3.421	19.66	9.65	29.31	46.00	16.69	Average
10	3.421	32.98	9.65	42.63	56.00	13.37	QP
11	15.251	24.29	9.70	33.98	50.00	16.02	Average
12	15.251	32.67	9.70	42.37	60.00	17.63	QP

Neutral:

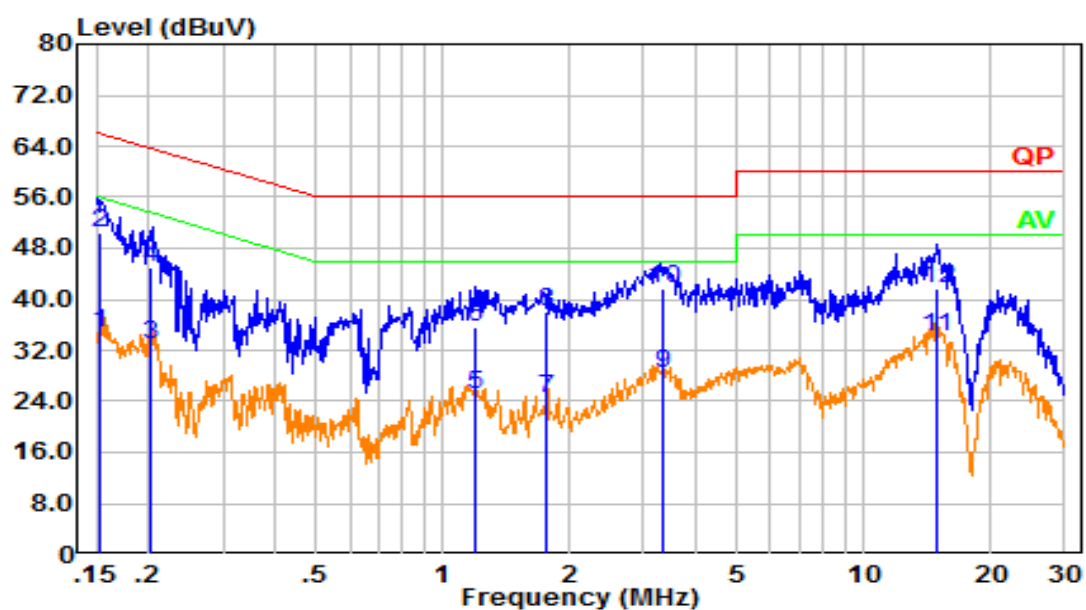

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.152	25.18	9.61	34.79	55.87	21.08	Average
2	0.152	40.70	9.61	50.31	65.87	15.56	QP
3	0.201	23.38	9.61	32.99	53.59	20.60	Average
4	0.201	35.27	9.61	44.88	63.59	18.71	QP
5	1.190	15.52	9.62	25.15	46.00	20.85	Average
6	1.190	25.88	9.62	35.50	56.00	20.50	QP
7	1.766	14.82	9.63	24.44	46.00	21.56	Average
8	1.766	28.47	9.63	38.10	56.00	17.90	QP
9	3.341	18.81	9.65	28.46	46.00	17.54	Average
10	3.341	31.88	9.65	41.53	56.00	14.47	QP
11	14.912	24.39	9.69	34.08	50.00	15.92	Average
12	14.912	32.05	9.69	41.74	60.00	18.26	QP

4.2 Radiation Emissions

Serial Number:	CR21100102-RF S3/6	Test Date:	2021-11-01~2021-11-10
Test Site:	966-1, 966-2	Test Mode:	Downloading
Tester:	Great Qiao, Tommy luo	Test Result:	Pass


Environmental Conditions:					
Temperature: (°C)	20.8~25.4	Relative Humidity: (%)	46~60	ATM Pressure: (kPa)	101.6~101.7

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2021-08-08	2022-08-07
AH	Pre-amplifier	PAM-0118P	530	2021-11-04	2022-11-03
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2021-08-08	2022-08-07
Mini Circuits	High Pass Filter	VHF-6010+	31119	2021-08-08	2022-08-07

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

1) 30MHz-1GHz:

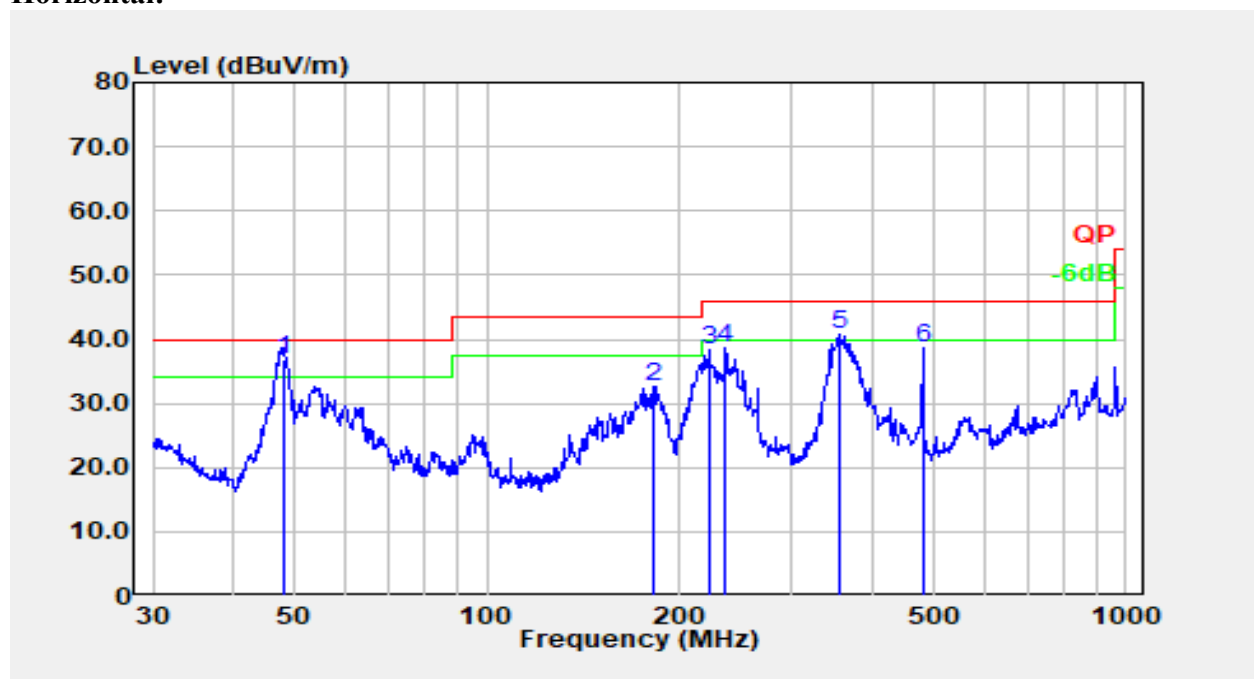
Horizontal:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.994	53.00	-16.24	36.76	40.00	3.24	QP
2	182.559	46.34	-13.75	32.59	43.50	10.91	Peak
3	222.950	51.23	-13.01	38.22	46.00	7.78	Peak
4	236.645	51.87	-13.22	38.65	46.00	7.35	Peak
5	355.427	51.00	-10.14	40.86	46.00	5.14	QP
6	480.528	45.15	-6.49	38.66	46.00	7.34	Peak

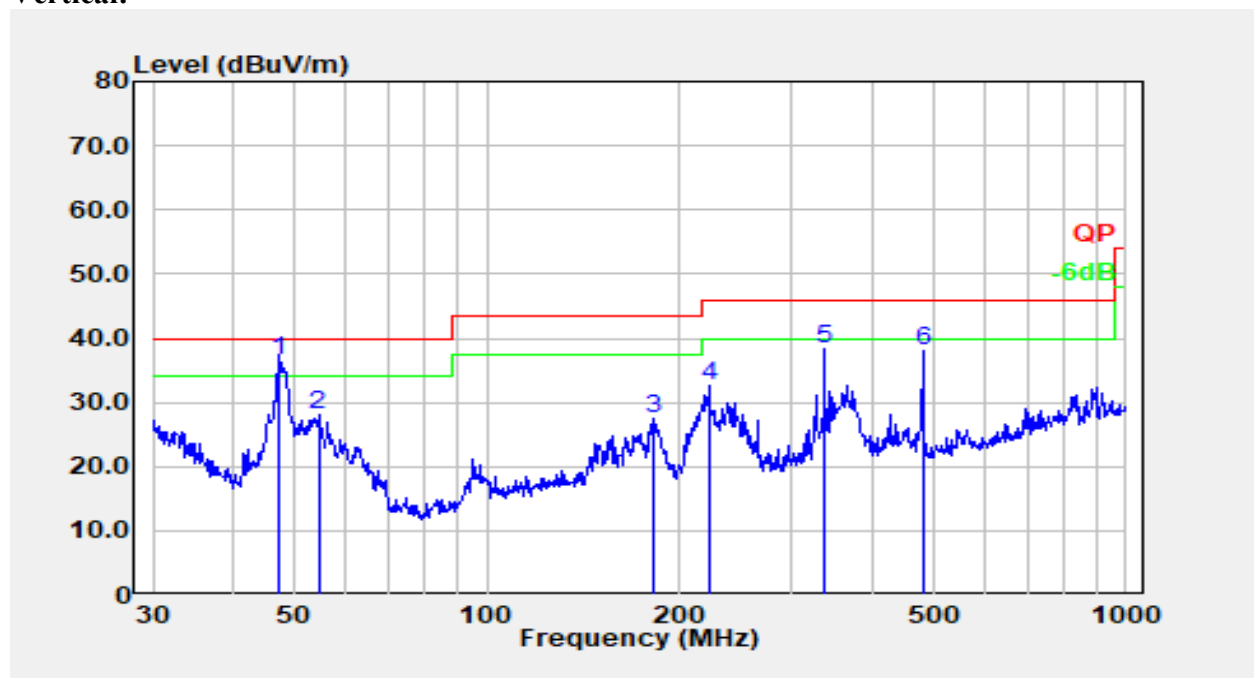
Vertical:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	47.326	52.33	-15.84	36.49	40.00	3.51	QP
2	54.452	45.55	-17.49	28.06	40.00	11.94	Peak
3	181.920	41.35	-13.76	27.58	43.50	15.92	Peak
4	222.950	45.57	-13.01	32.56	46.00	13.44	Peak
5	337.216	48.67	-10.30	38.38	46.00	7.62	Peak
6	480.528	44.60	-6.49	38.11	46.00	7.89	Peak


2) Above 1GHz

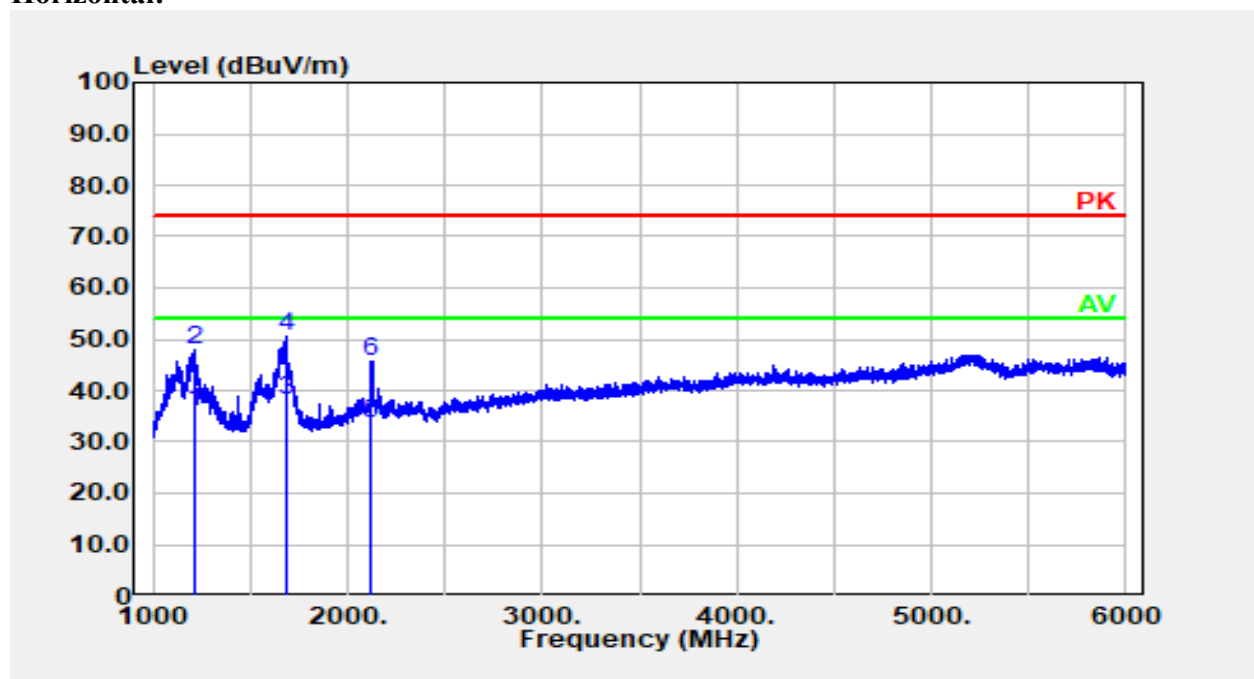Horizontal:


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	1209.042	45.62	-9.90	35.72	54.00	18.28	Average
2	1209.042	57.75	-9.90	47.85	74.00	26.15	Peak
3	1683.137	45.49	-7.34	38.15	54.00	15.85	Average
4	1683.137	57.74	-7.34	50.40	74.00	23.60	Peak
5	2124.225	39.05	-5.47	33.58	54.00	20.42	Average
6	2124.225	51.12	-5.47	45.65	74.00	28.35	Peak

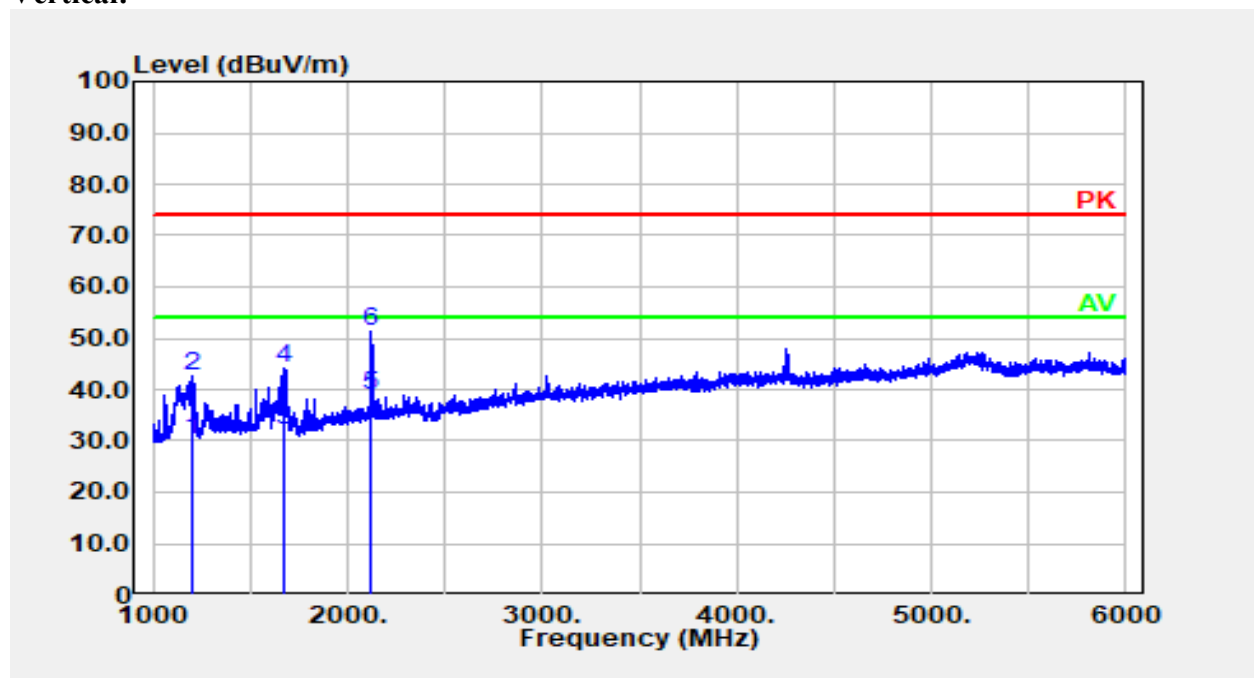Vertical:

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	1198.040	40.26	-9.99	30.27	54.00	23.73	Average
2	1198.040	52.54	-9.99	42.55	74.00	31.45	Peak
3	1679.136	39.41	-7.36	32.05	54.00	21.95	Average
4	1679.136	51.40	-7.36	44.04	74.00	29.96	Peak
5	2124.225	44.30	-5.47	38.83	54.00	15.17	Average
6	2124.225	56.76	-5.47	51.29	74.00	22.71	Peak

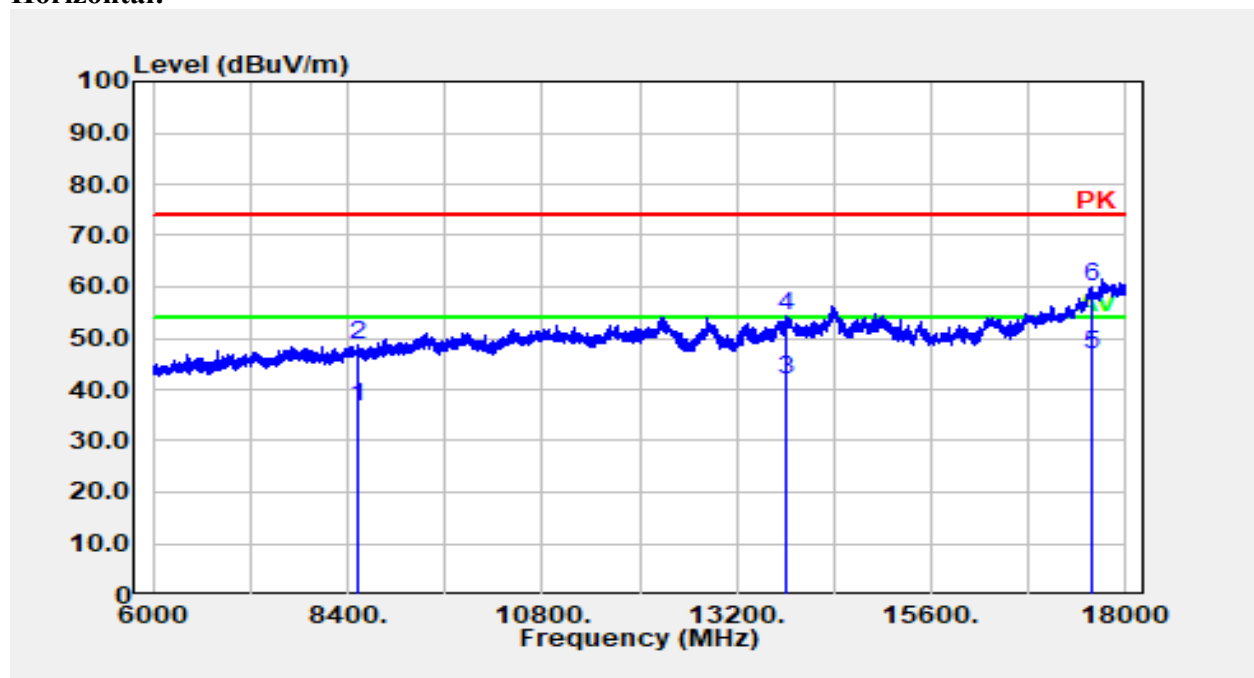Horizontal:

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	8525.305	29.47	7.19	36.66	54.00	17.34	Average
2	8525.305	41.64	7.19	48.83	74.00	25.17	Peak
3	13815.960	32.10	9.97	42.07	54.00	11.93	Average
4	13815.960	44.36	9.97	54.33	74.00	19.67	Peak
5	17577.520	25.14	21.54	46.68	54.00	7.32	Average
6	17577.520	38.42	21.54	59.96	74.00	14.04	Peak

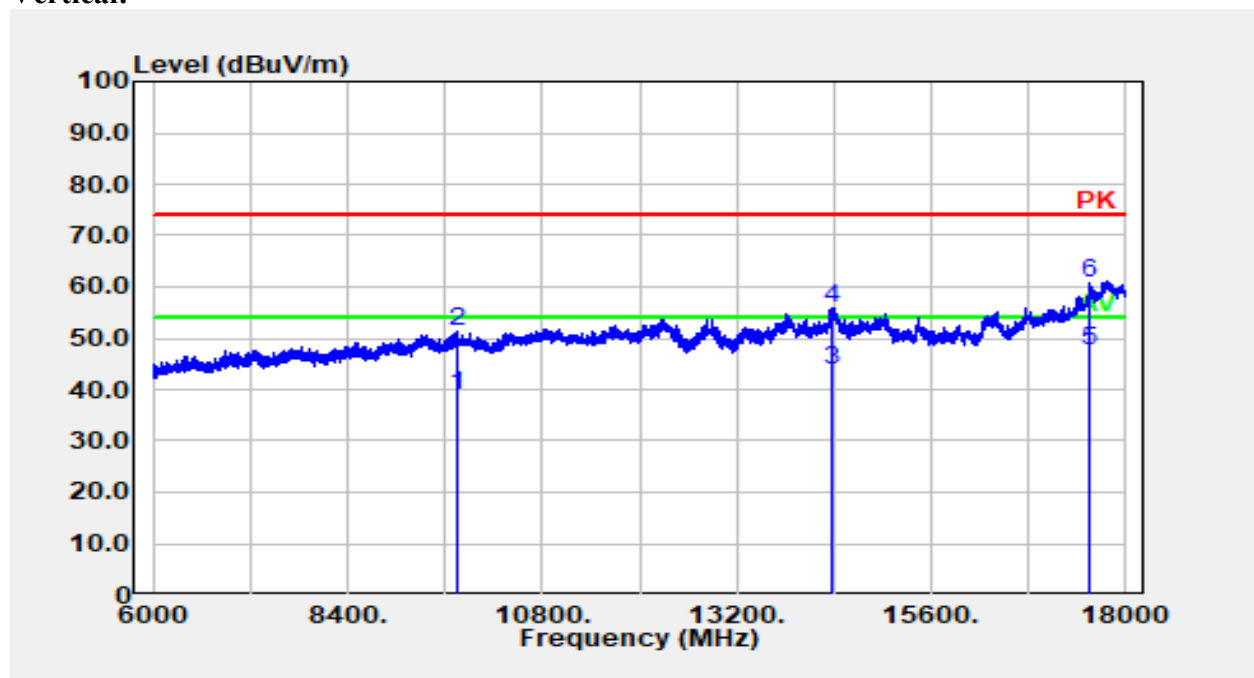Vertical:

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	9751.950	29.58	9.47	39.05	54.00	14.95	Average
2	9751.950	41.98	9.47	51.45	74.00	22.55	Peak
3	14368.070	33.47	10.45	43.92	54.00	10.08	Average
4	14368.070	45.49	10.45	55.94	74.00	18.06	Peak
5	17558.310	26.08	21.47	47.55	54.00	6.45	Average
6	17558.310	39.14	21.47	60.61	74.00	13.39	Peak

===== END OF REPORT =====