

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE

FCC Class II Permissive Change

Applicant Name:
Pantech Co.,Ltd.

Address:
DMC I-2, PANTECH R&D Center Sang Am Dong,
Mapogu, 121-792, Korea

Date of Issue:

March 06, 2014

Test Site/Location:

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

Report No.: HCT-R-1403-F001-1

HCT FRN: 0005866421

FCC ID: JYC78

APPLICANT: Pantech Co.,Ltd.

FCC Model(s): C781R3

EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth

FCC Classification: Licensed Non-Broadcast Station Transmitter (TNB)

FCC Rule Part(s): §22, §24, §2

Tx Frequency: 824.70 — 848.31 MHz (CDMA)
1 851.25 — 1 908.75 MHz (PCS CDMA)

Rx Frequency: 869.70 — 893.31 MHz (CDMA)
1 931.25 — 1 988.75 MHz (PCS CDMA)


Max. RF Output Power:

Extended	: 0.448 W ERP CDMA(26.51 dBm)/ 0.573 W EIRP PCS CDMA(27.58 dBm)
Battery	0.431 W ERP CDMA EVDO(26.34 dBm) / 0.708 W EIRP PCS CDMA EVDO(28.50 dBm)
UnExtended	: 0.408 W ERP CDMA(26.11 dBm)/0.553 W EIRP PCS CDMA(27.43 dBm)
Battery	0.565 W ERP CDMA EVDO(27.52 dBm) / 0.634 W EIRP PCS CDMA EVDO(28.02 dBm)

Emission Designator(s): 1M29F9W (CDMA), 1M27F9W (CDMA EVDO)
1M28F9W (PCS CDMA), 1M28F9W (PCS CDMA EVDO)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by
: Jong Seok Lee
Test engineer of RF Team



Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1403-F001	March 03, 2014	- First Approval Report
HCT-R-1403-F001-1	March 06, 2014	- Add the FCC Part 24 Requirements

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. EUT DESCRIPTION.....	5
2.2. MEASURING INSTRUMENT CALIBRATION.....	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS	6
3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....	6
3.2 PEAK- TO- AVERAGE RATIO	7
3.3 OCCUPIED BANDWIDTH.	9
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	10
3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	11
4. LIST OF TEST EQUIPMENT	12
5. SUMMARY OF TEST RESULTS	13
6. SAMPLE CALCULATION	14
7. TEST DATA	15
7.1 EFFECTIVE RADIATED POWER OUTPUT (Extended Battery)	15
7.2 EQUIVALENT ISOTROPIC RADIATED POWER (Extended Battery).....	16
7.3 EFFECTIVE RADIATED POWER OUTPUT (Un Extended Battery)	17
7.4 EQUIVALENT ISOTROPIC RADIATED POWER (Un Extended Battery).....	18
7.5 RADIATED SPURIOUS EMISSIONS (Extended Battery).....	19
7.5.1 RADIATED SPURIOUS EMISSIONS (CDMA Mode)	19
7.5.2 RADIATED SPURIOUS EMISSIONS (PCS Mode).....	20
7.6 RADIATED SPURIOUS EMISSIONS (UnExtended Battery).....	21
7.6.1 RADIATED SPURIOUS EMISSIONS (CDMA Mode)	21
7.6.2 RADIATED SPURIOUS EMISSIONS (PCS Mode).....	22
7.7 PEAK-TO-AVERAGE RATIO	23
7.8 OCCUPIED BANDWIDTH	23
7.9 CONDUCTED SPURIOUS EMISSIONS	23
7.9.1 Band Edge	23
7.10 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	24
7.10.1 RADIATED SPURIOUS EMISSIONS (CDMA Mode)	24
7.10.2 RADIATED SPURIOUS EMISSIONS (PCS Mode).....	25
8. TEST PLOTS.....	26

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: Pantech Co.,Ltd.

Address: DMC I-2, PANTECH R&D Center Sang Am dong, Mapogu, 121-792, Korea

FCC ID: JYC78

Application Type: Class II Permissive Change

FCC Classification: Licensed Non-Broadcast Station Transmitter (TNB)

FCC Rule Part(s): §22, §24, §2

EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth

FCC Model(s): C781R3

Tx Frequency: 824.70 — 848.31 MHz (CDMA)
1 851.25 – 1 908.75 MHz (PCS CDMA)

Rx Frequency: 869.70 — 893.31 MHz (CDMA)
1 931.25 – 1 988.75 MHz (PCS CDMA)

Max. RF Output Power: Extended : 0.448 W ERP CDMA(26.51 dBm)/ 0.573 W EIRP PCS CDMA(27.58 dBm)
Battery 0.431 W ERP CDMA EVDO(26.34 dBm) /
0.708 W EIRP PCS CDMA EVDO(28.50 dBm)
UnExtended : 0.408 W ERP CDMA(26.11 dBm)/0.553 W EIRP PCS CDMA(27.43 dBm)
Battery 0.565 W ERP CDMA EVDO(27.52 dBm) /
0.634 W EIRP PCS CDMA EVDO(28.02 dBm)

Emission Designator(s): 1M29F9W (CDMA), 1M27F9W (CDMA EVDO)
1M28F9W (PCS CDMA), 1M28F9W (PCS CDMA EVDO)

Date(s) of Tests: February 17, 2014 ~ February 27, 2014

Antenna Specification Manufacturer: KARAM SOLUTION
Antenna type: Built-in
Peak Gain: CDMA : -2.16 dBi
PCS CDMA : 2.15 dBi

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78

2. INTRODUCTION

2.1. EUT DESCRIPTION

The C781R3 Cellular/PCS CDMA/GSM Phone with Bluetooth consists of Cellular CDMA and PCS CDMA.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78

3. DESCRIPTION OF TESTS

3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a positive peak detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

Radiated spurious emissions

Frequency Range : 30 MHz ~ 10th Harmonics of highest channel fundamental frequency.

Note : This device was tested under all R.C.s and S.O.s and worst case is reported with 'All Up' power control bits.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78

3.2 PEAK- TO- AVERAGE RATIO

Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 5.7.

- Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,
 - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

- Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as P_{Pk} . Use one of the applicable procedures presented 5.2 to measure the total average power and record as P_{Avg} . Determine the P.A.R. from: $P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)}$ (P_{Avg} = Average Power + Duty cycle Factor)

5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW \geq OBW.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 2 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points \geq span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78

5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

5.2.2.2 Constant burst duty cycle

If the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then:


- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is a constant 25%.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78

3.3 OCCUPIED BANDWIDTH.

Test set-up

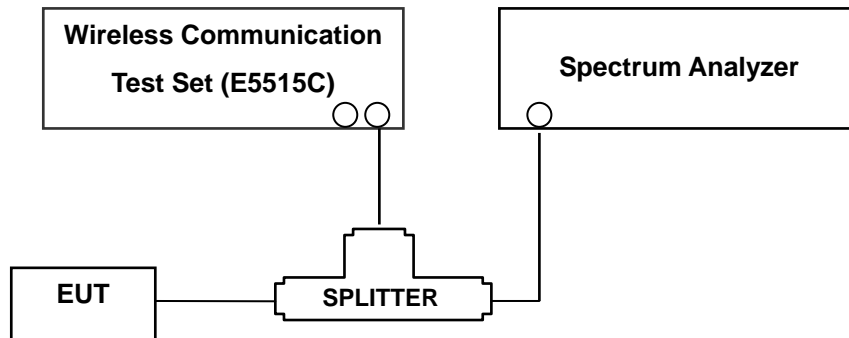

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Procedure

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Note : This device was tested under all R.C.s and S.O.s and worst case is reported with 'All Up' power control bits.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78

3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. The RBW settings used in the testing are greater than 1 % of the occupied bw. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Measurements of all out of band are made on RBW = 1MHz and VBW \geq 3 MHz in the worst case despite RBW = 100 kHz and VBW \geq 300 kHz upon 1 GHz.

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Trace Mode = max hold
- Sweep time = auto
- Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

- Band Edge Requirement : According to FCC 22.917 , 24.238(a) specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Note : This device was tested under all R.C.s and S.O.s with 'All Up' power control bits.


NOTES: The analyzer plot offsets were determined by below conditions.

- For CDMA, total offset 26.1 dBm = 20 dBm attenuator + 6 dBm Splitter + 0.1 dBm RF cables,
- For PCS, total offset 26.4 dBm = 20 dBm attenuator + 6 dBm Splitter + 0.4 dBm RF cables,

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78

3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

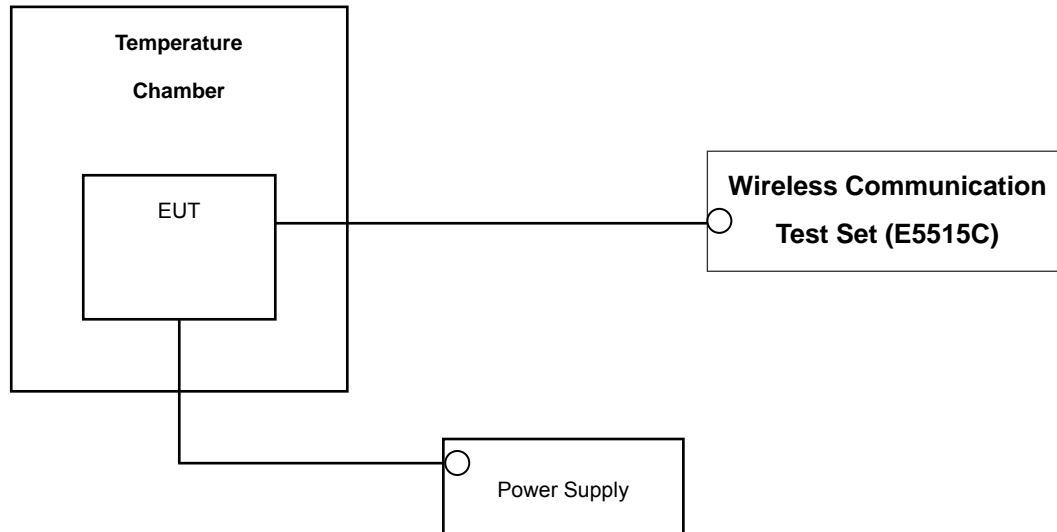

* Nominal Operating Voltage

Test Procedure

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Note : This device was tested under all R.C.s and S.O.s with ‘All Up’ power control bits.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
Agilent	E9327A/ Power Sensor	MY4442009	Annual	04/16/2014
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/12/2014
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	04/25/2014
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	04/25/2014
Hewlett Packard	11667B / Power Splitter	11275	Annual	05/13/2014
Digital	EP-3010/ Power Supply	3110117	Annual	10/29/2014
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	03/05/2015
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	05/03/2015
Korea Engineering	KR-1005L / Chamber	KRAB05063-3CH	Annual	10/30/2014
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	05/15/2014
Schwarzbeck	BBHA 9120D/ Horn Antenna	1151	Biennial	10/05/2015
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	04/25/2014
WEINSCHL	ATTENUATOR	BR0592	Annual	10/28/2014
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/10/2014
Agilent	8960 (E5515C)/ Base Station	GB45070669	Annual	08/31/2014

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions		PASS
* 2.1046	Conducted Output Power	-		PASS
24.232(d)	Peak- to- Average Ratio	< 13 dB		PASS
2.1055, 22.355, 24.235	Frequency stability / variation of ambient temperature	< 2.5 ppm		PASS
22.913(a)(2) 24.232(c)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS
	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	< 43 + 10log10 (P[Watts]) for all out-of band emissions		PASS

*: See SAR Report

6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
CDMA	384	836.52	-23.45	38.92	-10.53	0.88	V	0.564	27.51

ERP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (**ERP**).

B. Emission Designator

CDMA Emission Designator

Emission Designator = 1M27F9W

CDMA BW = 1.27 MHz (Measured at the 99% power bandwidth)

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

7. TEST DATA

7.1 EFFECTIVE RADIATED POWER OUTPUT (Extended Battery)

(CDMA Mode)

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
CDMA	1013	824.20	-24.61	37.94	-10.59	0.84	V	0.448	26.51
	384	836.60	-26.07	36.30	-10.53	0.88	H	0.308	24.89
	777	848.80	-25.34	37.02	-10.48	0.86	V	0.370	25.68
EVDO	1013	824.20	-24.78	37.77	-10.59	0.84	H	0.431	26.34
	384	836.60	-25.30	37.07	-10.53	0.88	H	0.368	25.66
	777	848.80	-24.88	37.48	-10.48	0.86	V	0.411	26.14

Note: Standard batteries are the only options for this Phone. And a peak detector is used.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW \geq OBW, VBW \geq 3 x RBW. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is in y plane in CDMA mode. Also worst case of detecting Antenna is in vertical polarization in CDMA mode.

The EVDO mode testing were performed using FETAP on Rev.A because FETAP on Rev.A is highest power in EVDO mode.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth		FCC ID: JYC78

7.2 EQUIVALENT ISOTROPIC RADIATED POWER (Extended Battery)

(PCS CDMA Mode)

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
PCS	1013	1,851.25	-12.86	18.73	10.04	1.19	V	0.573	27.58
	384	1,880.00	-14.01	17.72	10.04	1.23	V	0.450	26.53
	777	1,908.75	-14.11	17.87	10.05	1.22	V	0.468	26.70
EVDO	1013	1,851.25	-11.94	19.65	10.04	1.19	V	0.708	28.50
	384	1,880.00	-13.24	18.49	10.04	1.23	V	0.537	27.30
	777	1,908.75	-13.07	18.91	10.05	1.22	V	0.594	27.74

Note: Standard batteries are the only options for this Phone. And a peak detector is used.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW \geq OBW, VBW \geq 3 x RBW. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is in y plane in CDMA mode. Also worst case of detecting Antenna is in vertical polarization in CDMA mode.

The EVDO mode testing were performed using FETAP on Rev.A because FETAP on Rev.A is highest power in EVDO mode.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth		FCC ID: JYC78

7.3 EFFECTIVE RADIATED POWER OUTPUT (Un Extended Battery)

(CDMA Mode)

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
CDMA	1013	824.20	-25.15	37.40	-10.59	0.84	V	0.395	25.97
	384	836.60	-24.85	37.52	-10.53	0.88	H	0.408	26.11
	777	848.80	-25.42	36.94	-10.48	0.86	V	0.363	25.60
EVDO	1013	824.20	-23.60	38.95	-10.59	0.84	H	0.565	27.52
	384	836.60	-26.47	35.90	-10.53	0.88	H	0.281	24.49
	777	848.80	-24.95	37.41	-10.48	0.86	V	0.405	26.07

Note: Standard batteries are the only options for this Phone. And a peak detector is used.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW \geq OBW, VBW \geq 3 x RBW. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is in y plane in CDMA mode. Also worst case of detecting Antenna is in vertical polarization in CDMA mode.

The EVDO mode testing were performed using FETAP on Rev.A because FETAP on Rev.A is highest power in EVDO mode.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78

7.4 EQUIVALENT ISOTROPIC RADIATED POWER (Un Extended Battery)

(PCS CDMA Mode)

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
PCS	1013	1,851.25	-13.01	18.58	10.04	1.19	V	0.553	27.43
	384	1,880.00	-13.81	17.92	10.04	1.23	V	0.471	26.73
	777	1,908.75	-14.01	17.97	10.05	1.22	V	0.479	26.80
EVDO	1013	1,851.25	-12.42	19.17	10.04	1.19	V	0.634	28.02
	384	1,880.00	-13.48	18.25	10.04	1.23	V	0.508	27.06
	777	1,908.75	-13.15	18.83	10.05	1.22	V	0.583	27.66

Note: Standard batteries are the only options for this Phone. And a peak detector is used.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW \geq OBW, VBW \geq 3 x RBW. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. And worst case of the EUT is in z plane in PCS mode. Also worst case of detecting Antenna is in horizontal in PCS mode.

The EVDO mode testing were performed using FETAP on Rev.A because FETAP on Rev.A is highest power in EVDO mode.

-

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78

7.5 RADIATED SPURIOUS EMISSIONS (Extended Battery)

7.5.1 RADIATED SPURIOUS EMISSIONS (CDMA Mode)

MEASURED OUTPUT POWER: 26.51 dBm = 0.448 W

MODULATION SIGNAL: CDMA

DISTANCE: 3 meters

LIMIT: $43 + 10 \log_{10}(W) = 39.51 \text{ dBc}$

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
1013	1,649.40	-48.22	7.56	-55.16	1.13	V	-48.73	75.24
	2,474.10	-56.25	8.39	-60.77	1.35	H	-53.73	80.24
	3,298.80	-52.73	10.08	-57.65	1.58	V	-49.15	75.66
384	1,673.04	-47.44	7.62	-54.53	1.12	V	-48.03	74.54
	2,509.56	-56.58	8.50	-61.01	1.35	H	-53.86	80.37
	3,346.08	-53.76	10.26	-58.82	1.61	H	-50.17	76.68
777	1,696.62	-49.87	7.69	-57.06	1.16	V	-50.53	77.04
	2,544.93	-56.47	8.57	-61.22	1.37	H	-54.02	80.53
	3,393.24	-52.77	10.25	-57.75	1.61	V	-49.11	75.62

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth		FCC ID: JYC78

7.5.2 RADIATED SPURIOUS EMISSIONS (PCS Mode)

MEASURED OUTPUT POWER: 27.58 dBm = 0.573 W

MODULATION SIGNAL: PCS

DISTANCE: 3 meters

LIMIT: $43 + 10 \log_{10} (W) =$ 40.58 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
1013	1,649.40	-38.16	12.32	-43.30	1.72	H	-32.70	61.20
	2,474.10	-57.06	13.02	-57.52	2.13	H	-46.63	75.13
	3,298.80	-58.28	11.06	-48.55	2.41	H	-39.90	68.40
384	1,673.04	-38.20	12.29	-43.33	1.79	H	-32.83	61.33
	2,509.56	-56.84	13.12	-57.12	2.11	H	-46.11	74.61
	3,346.08	-57.61	11.09	-48.60	2.35	H	-39.86	68.36
777	1,696.62	-37.57	12.28	-42.71	1.77	H	-32.20	60.70
	2,544.93	-57.14	13.07	-57.22	2.13	V	-46.28	74.78
	3,393.24	-56.82	11.37	-46.72	2.47	H	-37.82	66.32

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.6 RADIATED SPURIOUS EMISSIONS (UnExtended Battery)

7.6.1 RADIATED SPURIOUS EMISSIONS (CDMA Mode)

MEASURED OUTPUT POWER: 26.11 dBm = 0.408 W

MODULATION SIGNAL: CDMA

DISTANCE: 3 meters

LIMIT: $43 + 10 \log_{10} (W) =$ 39.11 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
1013	1,649.40	-51.27	7.56	-58.21	1.13	V	-51.78	79.30
	2,474.10	-56.34	8.39	-60.86	1.35	H	-53.82	81.34
	3,298.80	-52.36	10.08	-57.28	1.58	V	-48.78	76.30
384	1,673.04	-48.96	7.62	-56.05	1.12	V	-49.55	77.07
	2,509.56	-56.42	8.50	-60.85	1.35	H	-53.70	81.22
	3,346.08	-54.00	10.26	-59.06	1.61	H	-50.41	77.93
777	1,696.62	-48.82	7.69	-56.01	1.16	V	-49.48	77.00
	2,544.93	-56.48	8.57	-61.23	1.37	H	-54.03	81.55
	3,393.24	-53.28	10.25	-58.26	1.61	V	-49.62	77.14

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.6.2 RADIATED SPURIOUS EMISSIONS (PCS Mode)

MEASURED OUTPUT POWER: 27.43 dBm = 0.553 W

MODULATION SIGNAL: PCS

DISTANCE: 3 meters

LIMIT: $43 + 10 \log_{10} (W) =$ 40.43 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
1013	1,649.40	-37.38	12.32	-42.52	1.72	H	-31.92	59.94
	2,474.10	-56.64	13.02	-57.10	2.13	H	-46.21	74.23
	3,298.80	-58.28	11.06	-48.55	2.41	H	-39.90	67.92
384	1,673.04	-36.76	12.29	-41.89	1.79	H	-31.39	59.41
	2,509.56	-57.34	13.12	-57.62	2.11	H	-46.61	74.63
	3,346.08	-56.82	11.09	-47.81	2.35	H	-39.07	67.09
777	1,696.62	-37.79	12.28	-42.93	1.77	H	-32.42	60.44
	2,544.93	-57.17	13.07	-57.25	2.13	V	-46.31	74.33
	3,393.24	-56.80	11.37	-46.70	2.47	H	-37.80	65.82

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.7 PEAK-TO-AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown Page 31.

7.8 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (MHz)
CDMA	1013	824.70	1.2736
	384	836.52	1.2771
	777	848.31	1.2748
CDMA EVDO	1013	824.70	1.2733
PCS	25	1851.25	1.2776
	600	1880.00	1.2706
	1175	1908.75	1.2763
PCS EVDO	600	1880.00	1.2769

- Plots of the EUT's Occupied Bandwidth are shown Page 27 ~ 30.

7.9 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
CDMA	1013	4.807910	-29.41
	384	4.983350	-30.12
	777	4.638930	28.89
PCS	25	6.997290	-27.14
	600	6.551630	-26.65
	1175	6.993300	-27.18

- Plots of the EUT's Conducted Spurious Emissions are shown Page 40 ~ 45

7.9.1 Band Edge


- Plots of the EUT's Band Edge are shown Page 32 ~ 39

7.10 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.10.1 RADIATED SPURIOUS EMISSIONS (CDMA Mode)

OPERATING FREQUENCY: 836,520,000 Hz
 CHANNEL: 384
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.7	+20(Ref)	836 520 080	3.3	0.000 000	0.004
100%		-30	836 520 003	3.33	0.000 000	0.004
100%		-20	836 520 003	2.88	0.000 000	0.003
100%		-10	836 520 003	3.22	0.000 000	0.004
100%		0	836 520 003	2.79	0.000 000	0.003
100%		+10	836 520 003	3.17	0.000 000	0.004
100%		+30	836 520 003	2.69	0.000 000	0.003
100%		+40	836 520 003	3.15	0.000 000	0.004
100%		+50	836 520 003	2.86	0.000 000	0.003
115%	4.255	+20	836 520 003	3.19	0.000 000	0.004
85%	3.400	+20	836 520 003	3.01	0.000 000	0.004

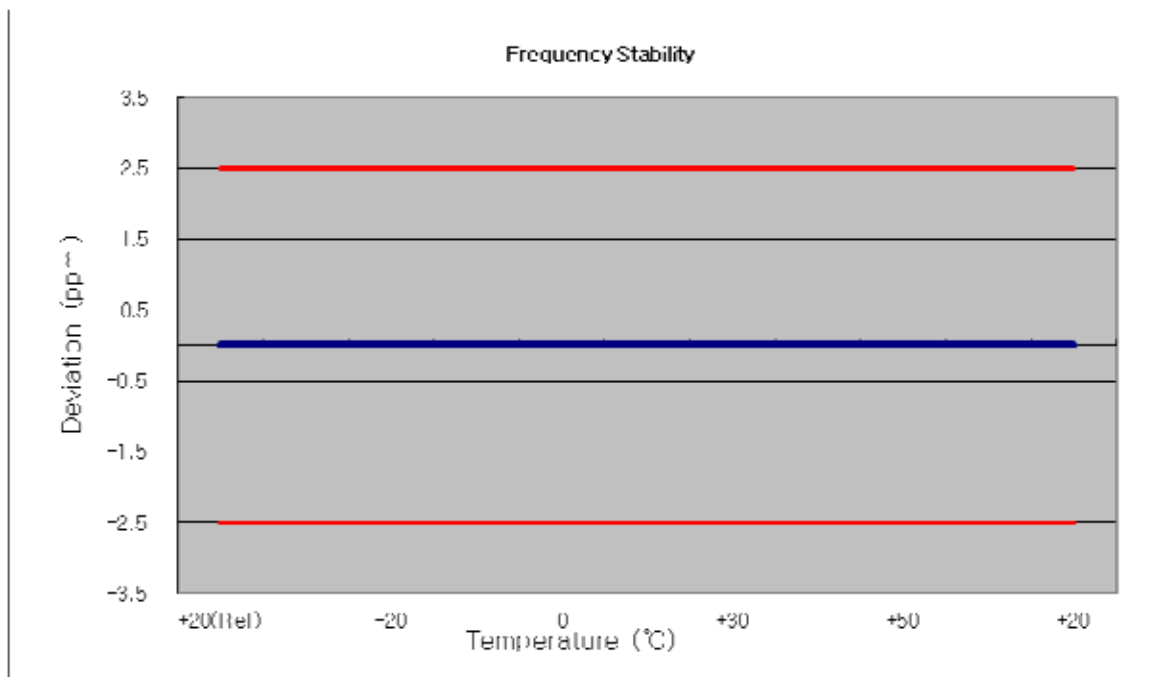

7.10.2 RADIATED SPURIOUS EMISSIONS (PCS Mode)

OPERATING FREQUENCY: 1880,000,000 Hz
CHANNEL: 600
REFERENCE VOLTAGE: 3.7 VDC
DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.7	+20(Ref)	1879 999 956	4.36	0.000 001	0.005
100%		-30	1880 000 004	4.14	0.000 000	0.005
100%		-20	1880 000 004	4.16	0.000 000	0.005
100%		-10	1880 000 004	4.05	0.000 000	0.005
100%		0	1880 000 005	4.80	0.000 001	0.006
100%		+10	1880 000 005	4.69	0.000 001	0.006
100%		+30	1880 000 004	4.26	0.000 001	0.005
100%		+40	1880 000 005	5.40	0.000 001	0.006
100%		+50	1880 000 004	4.35	0.000 001	0.005
115%	4.255	+20	1880 000 004	3.80	0.000 000	0.005
85%	3.400	+20	1880 000 004	3.66	0.000 000	0.004

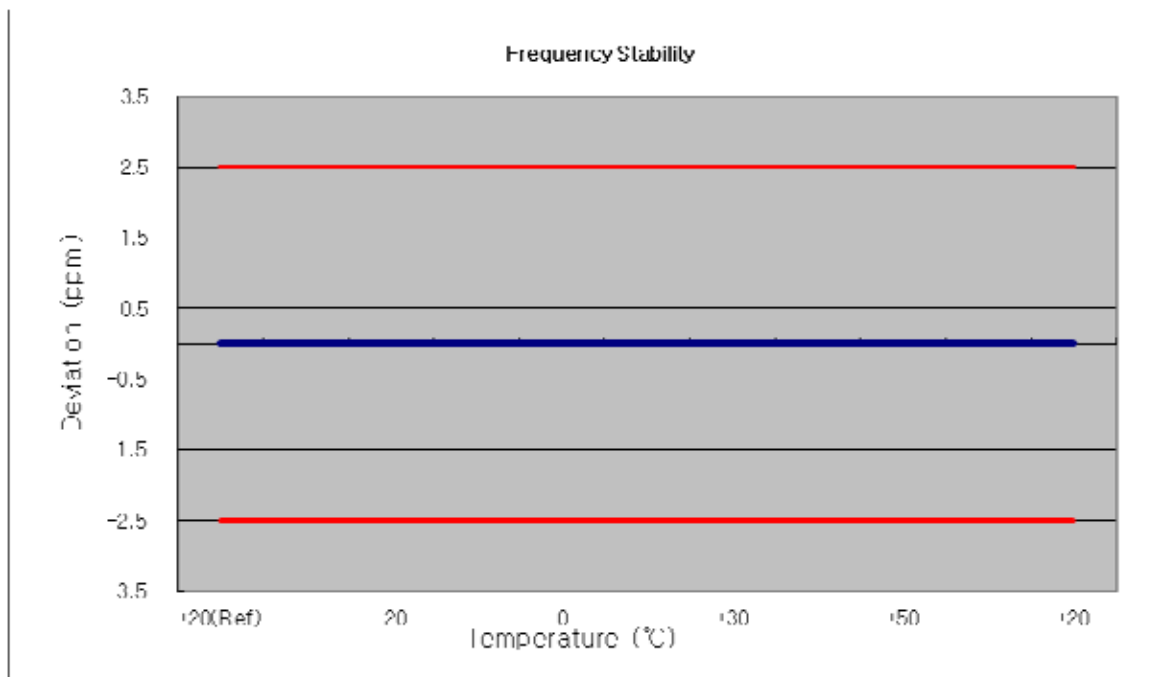


8. TEST PLOTS

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78


■ CDMA MODE (1013 CH.) Occupied Bandwidth

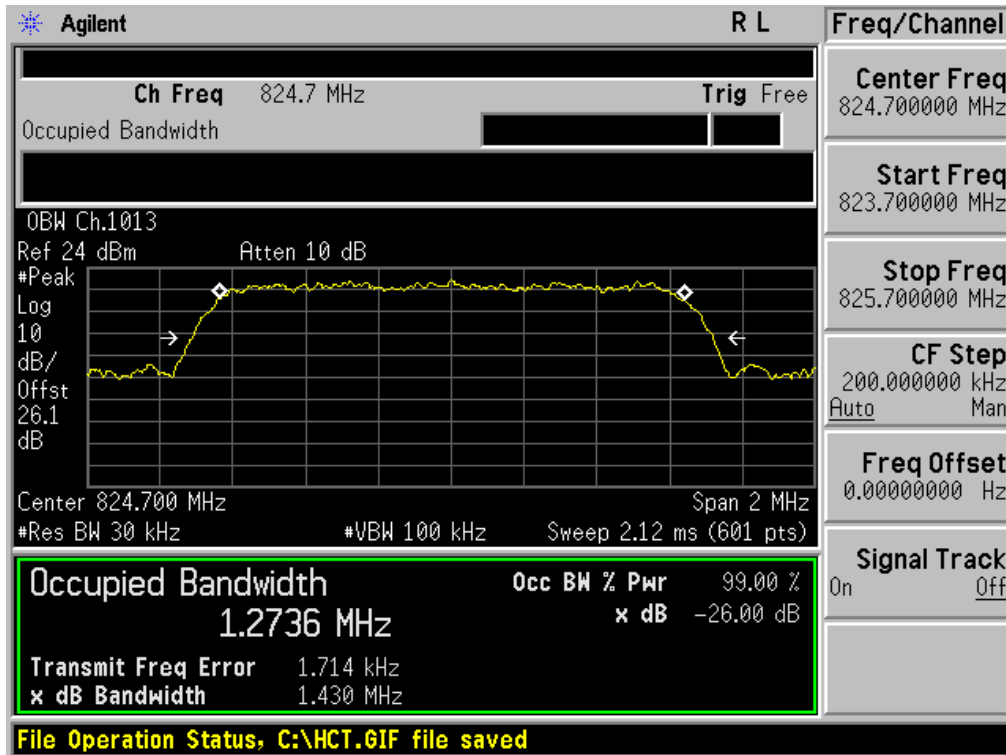


■ CDMA MODE (384 CH.) Occupied Bandwidth

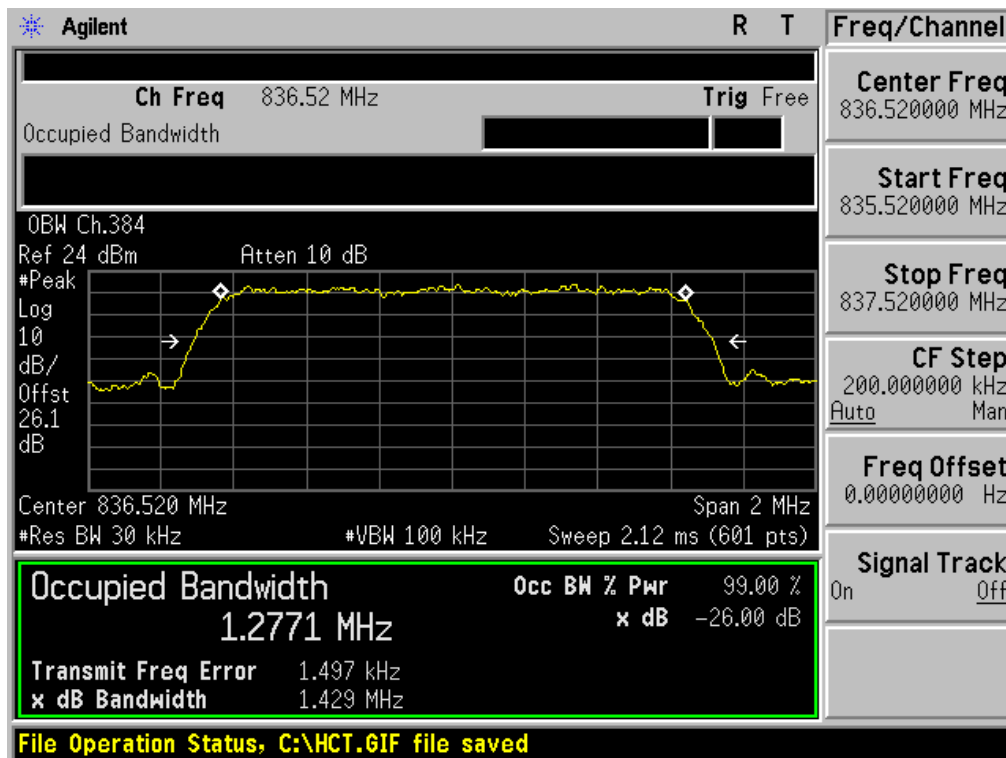


■ CDMA MODE (777 CH.) Occupied Bandwidth

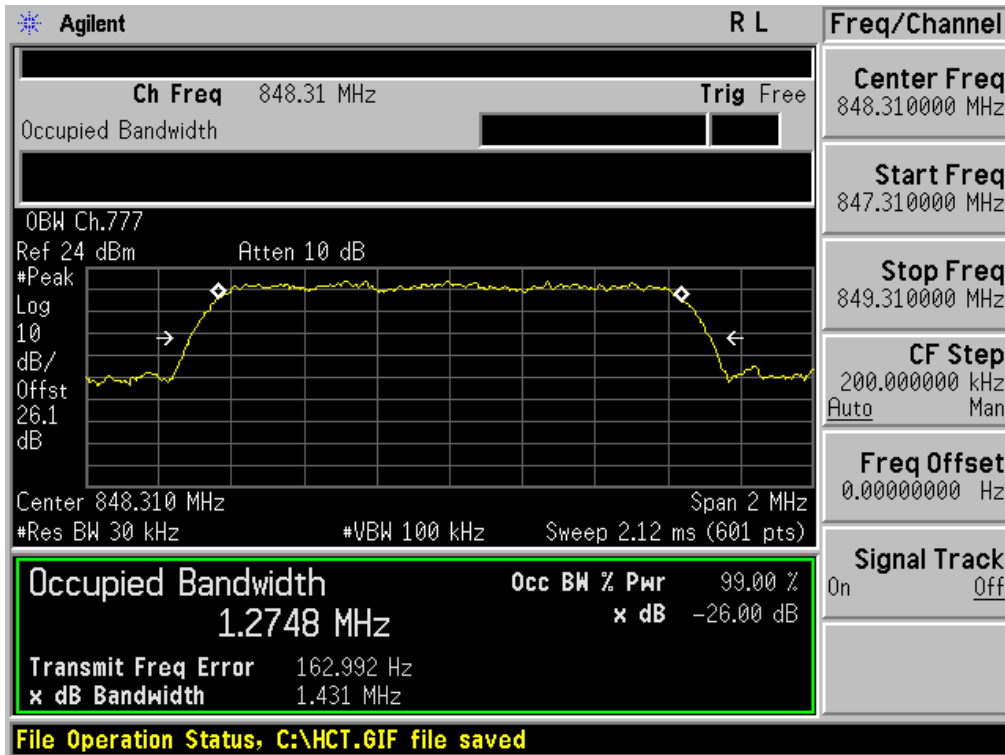


■ CDMA EVDO MODE (1013 CH.) Occupied Bandwidth

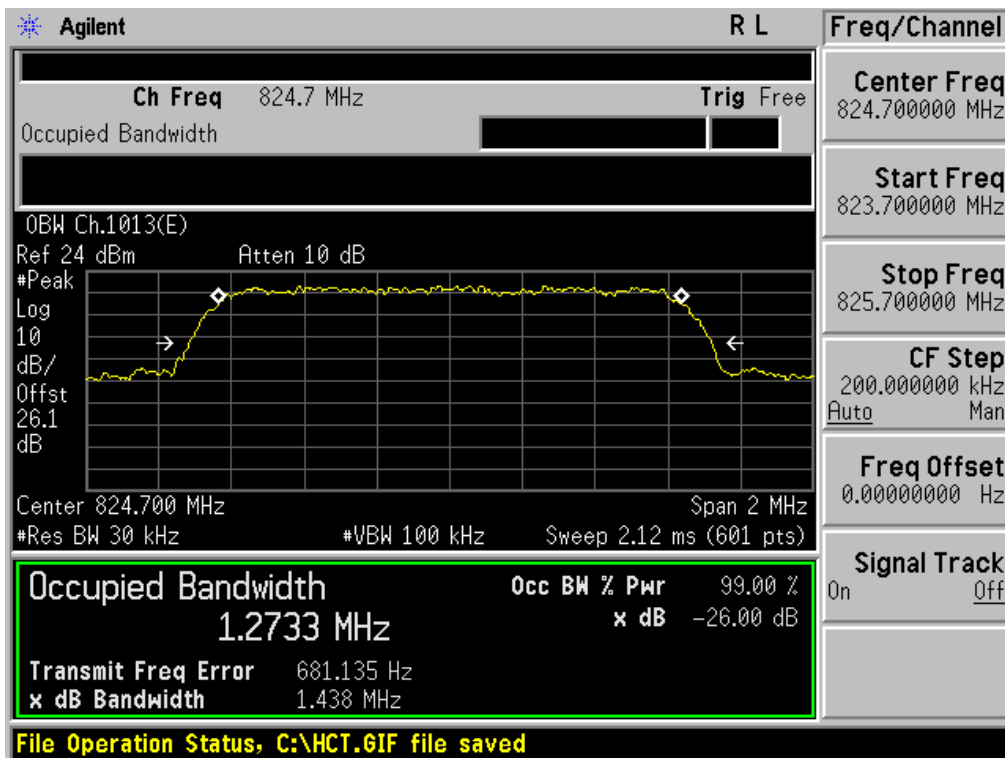


■ PCS MODE (25 CH.) Occupied Bandwidth

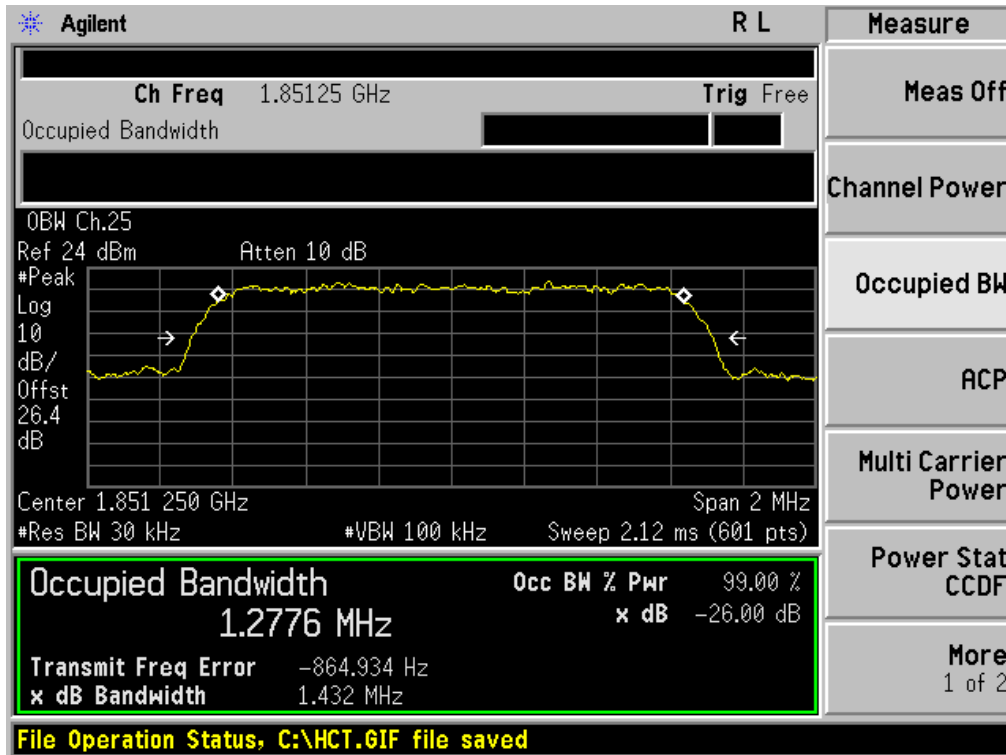


■ PCS MODE (600 CH.) Occupied Bandwidth

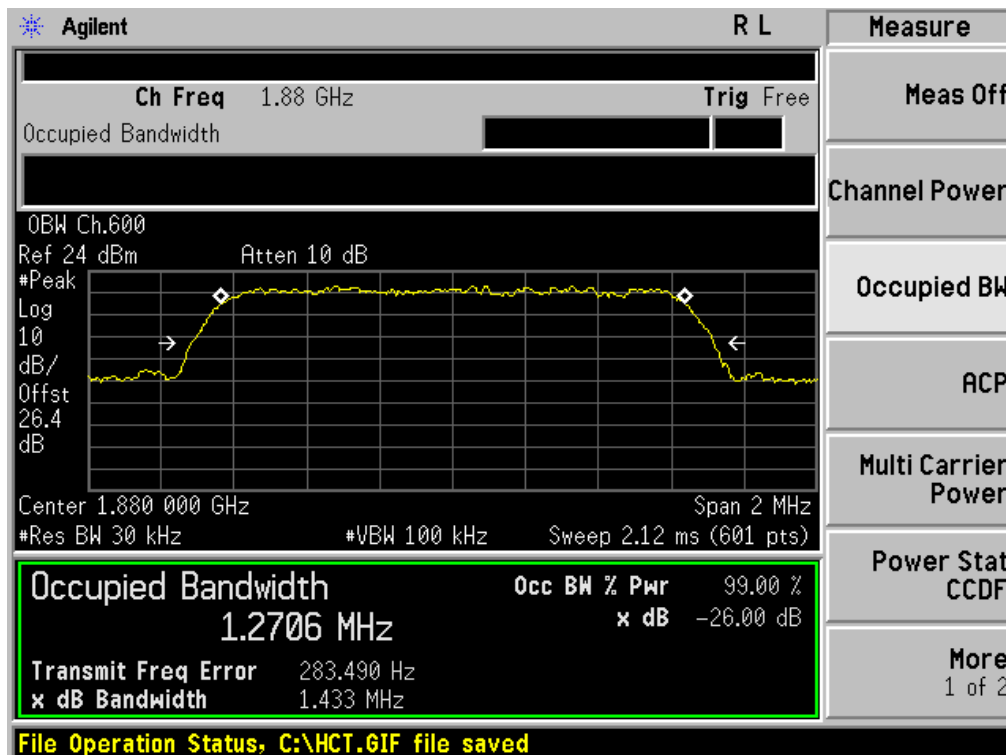


■ PCS MODE (1175 CH.) Occupied Bandwidth

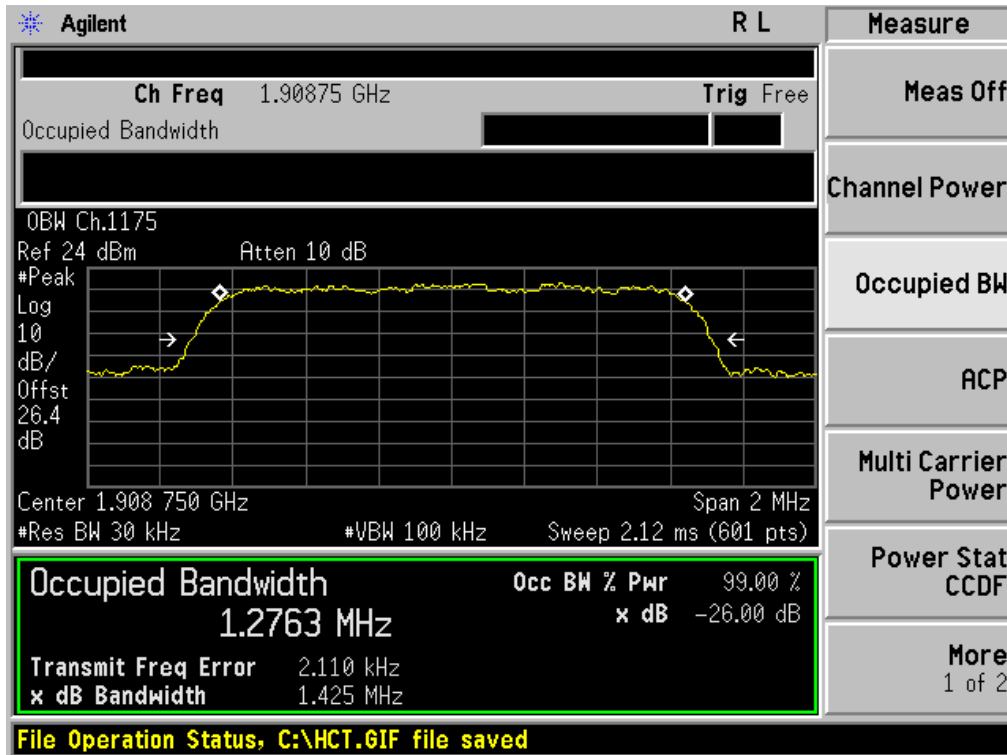


■ PCS EVDO MODE (600 CH.) Occupied Bandwidth

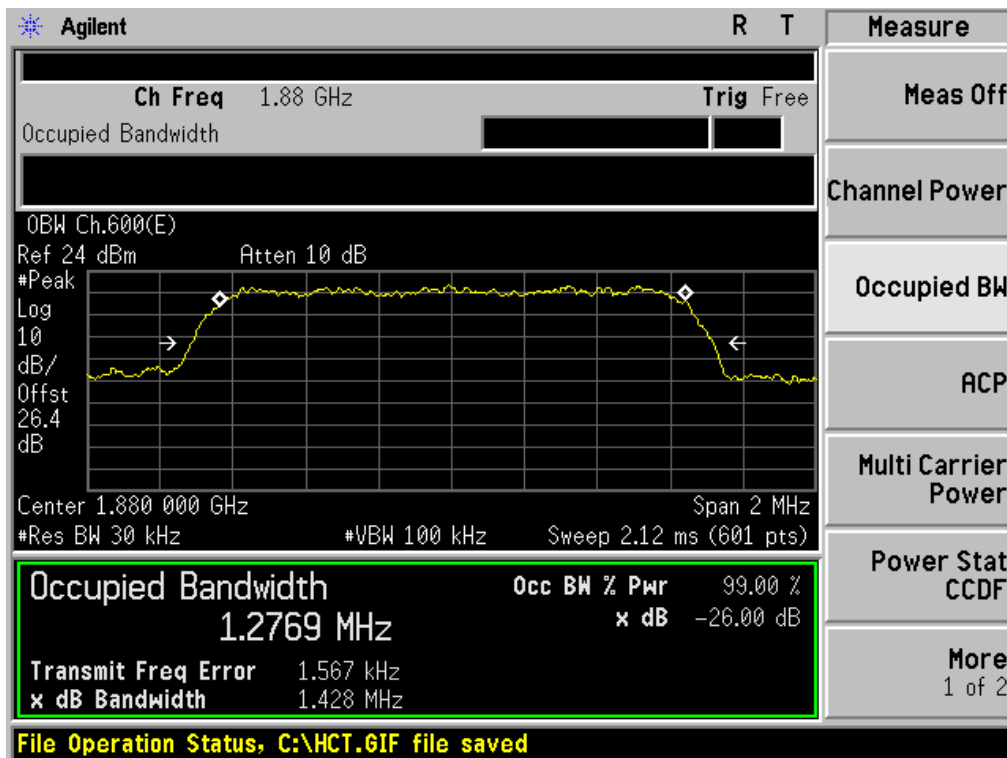


■ PCS CDMA MODE (600 CH.) Peak-to-Average Ratio

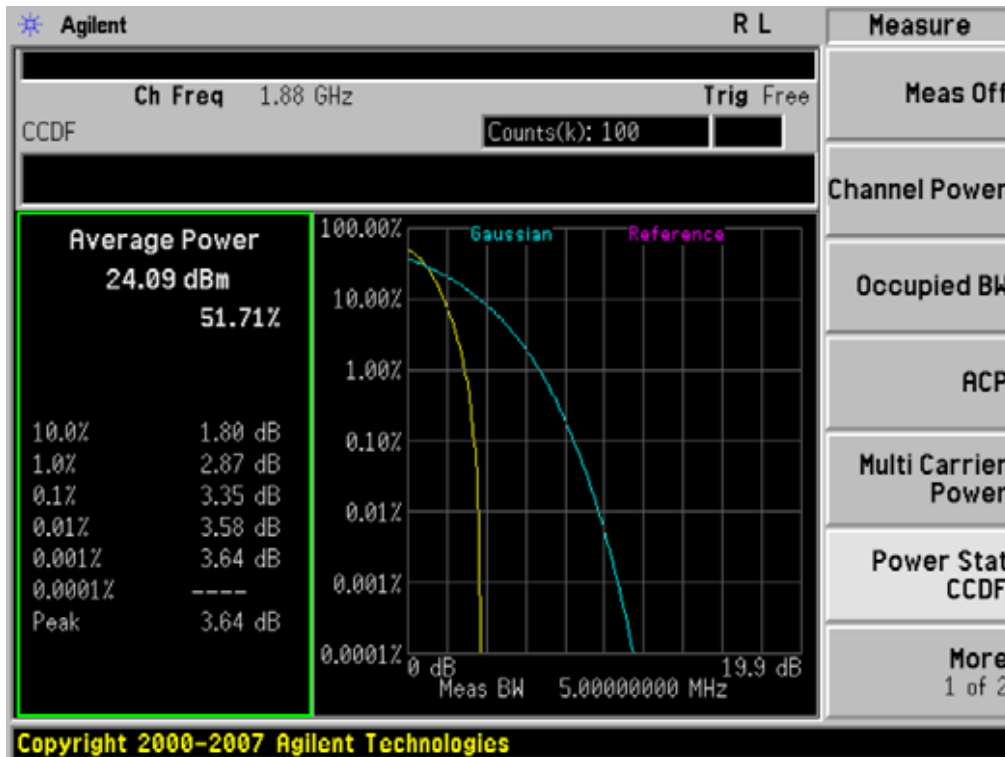


■ PCS CDMA EVDO MODE (600 CH.) Peak-to-Average Ratio

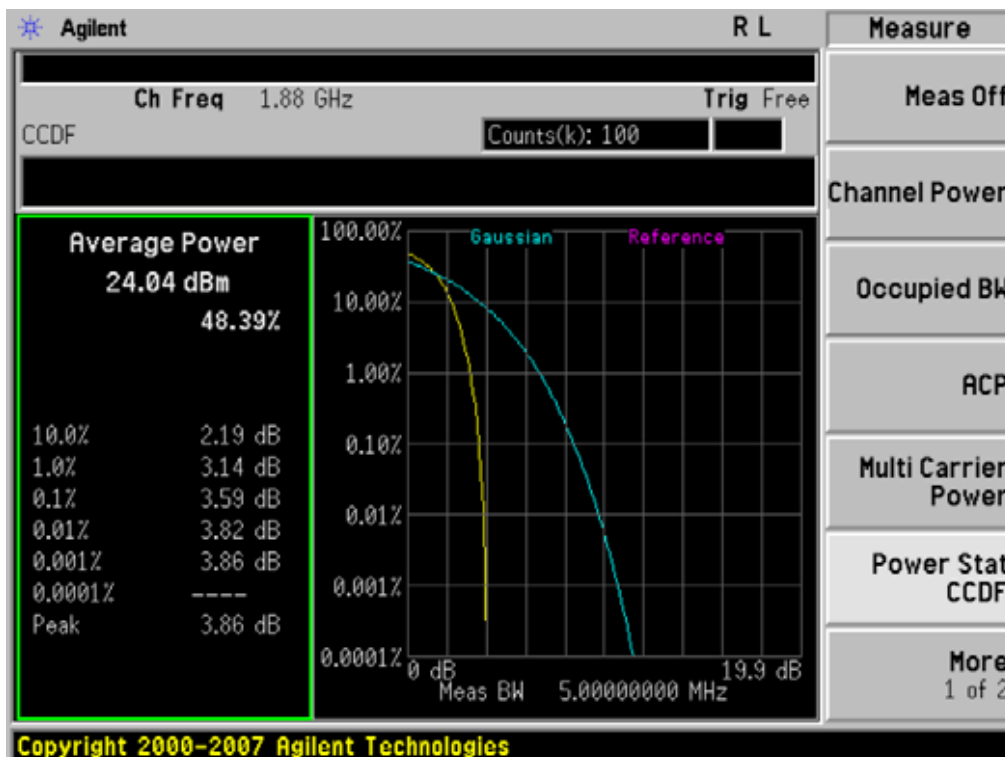


■ CDMA MODE (1013 CH.) Block Edge

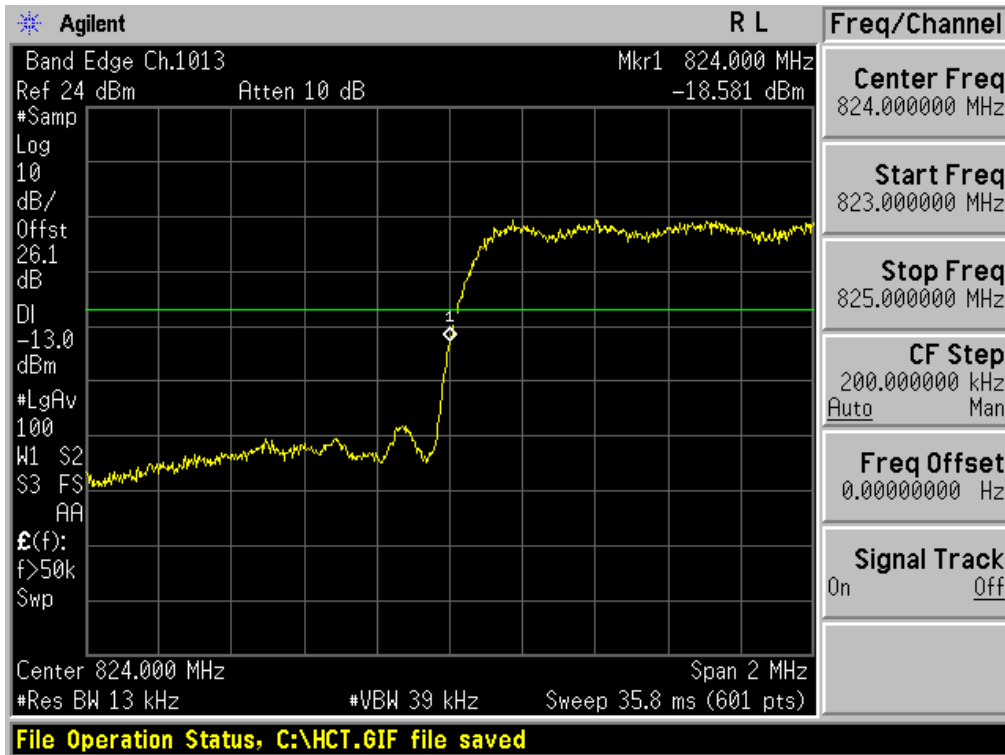


■ CDMA MODE (777 CH.) Block Edge

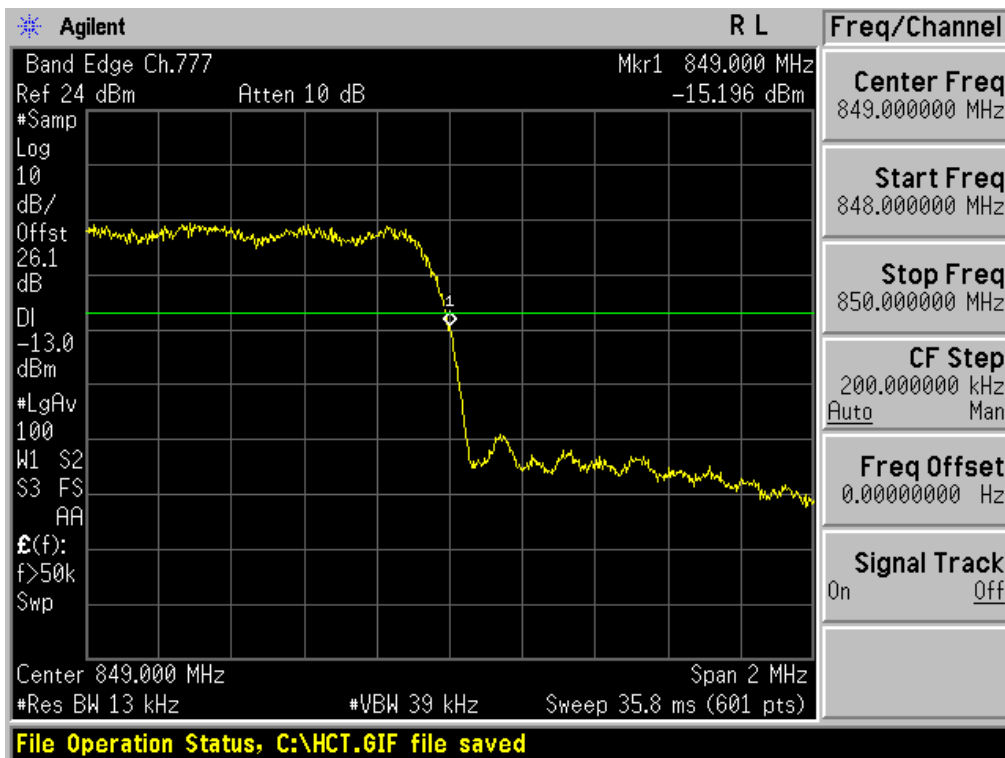


■ CDMA EVDO MODE (1013 CH.) Block Edge

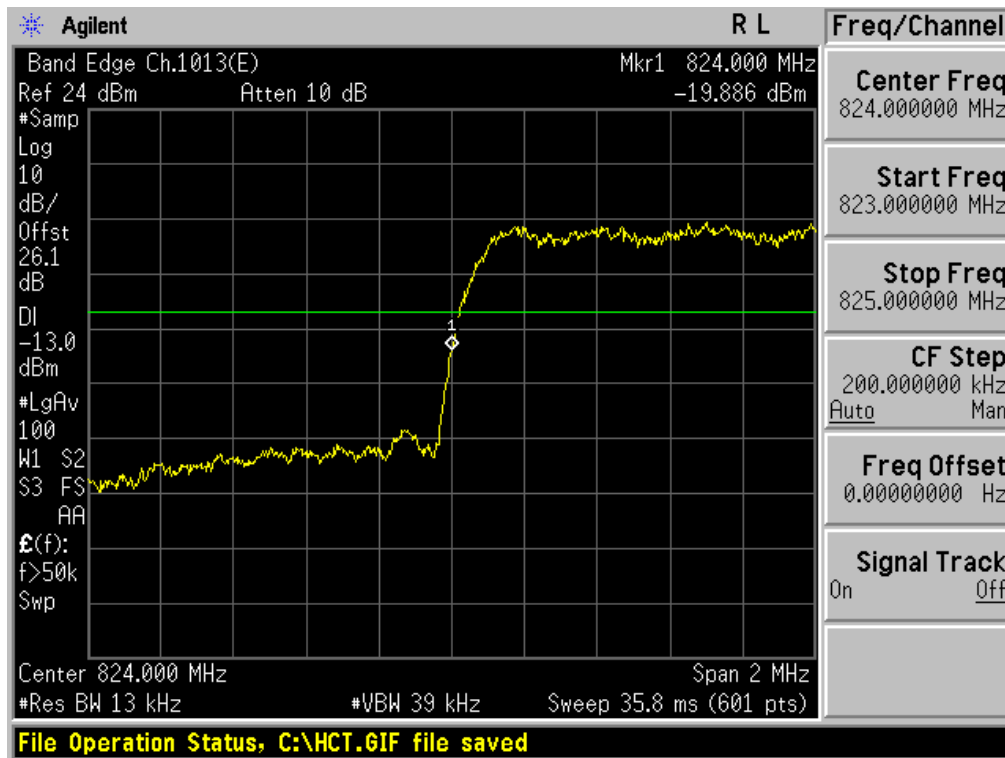


■ CDMA EVDO MODE (777 CH.) Block Edge

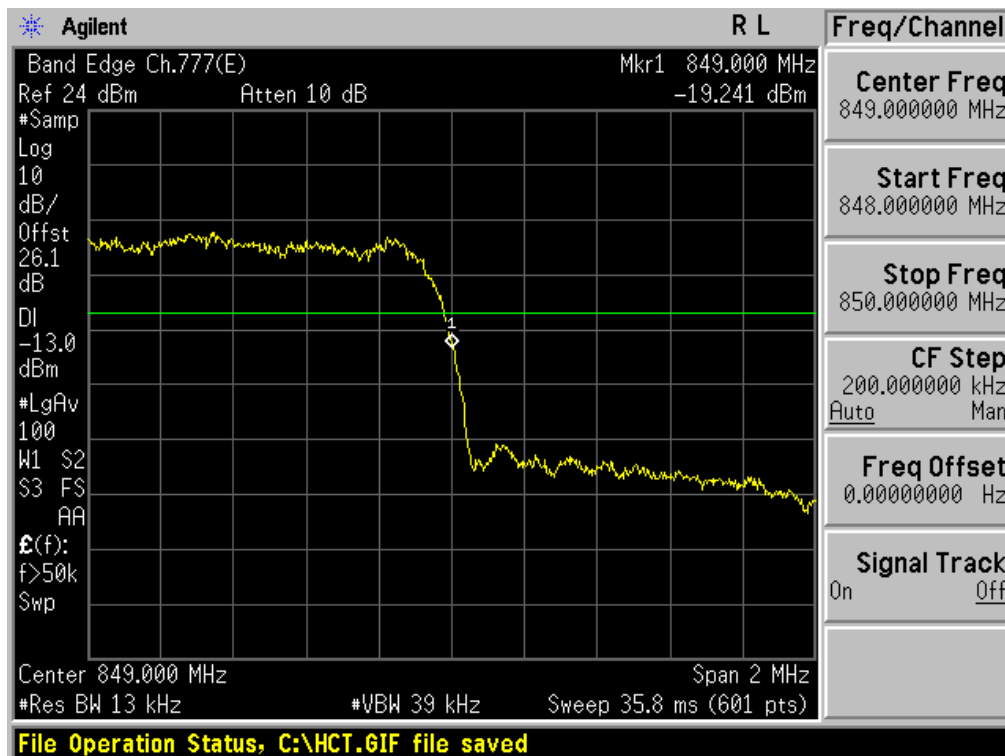


■ PCS MODE (25 CH.) Block Edge

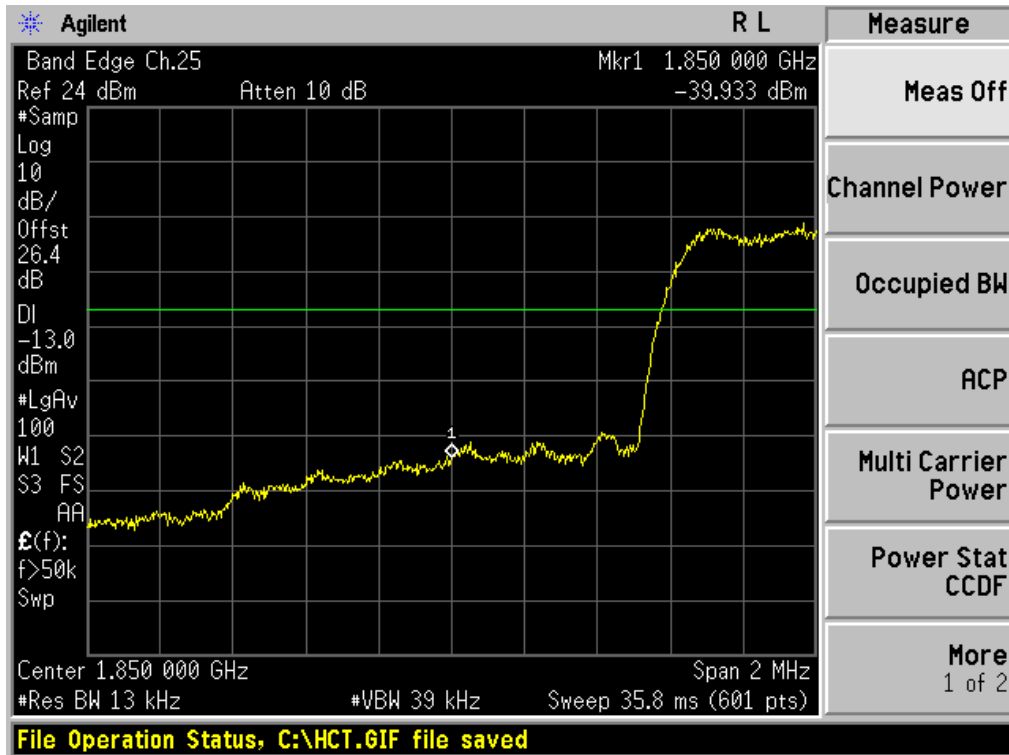


■ PCS MODE (1175 CH.) Block Edge

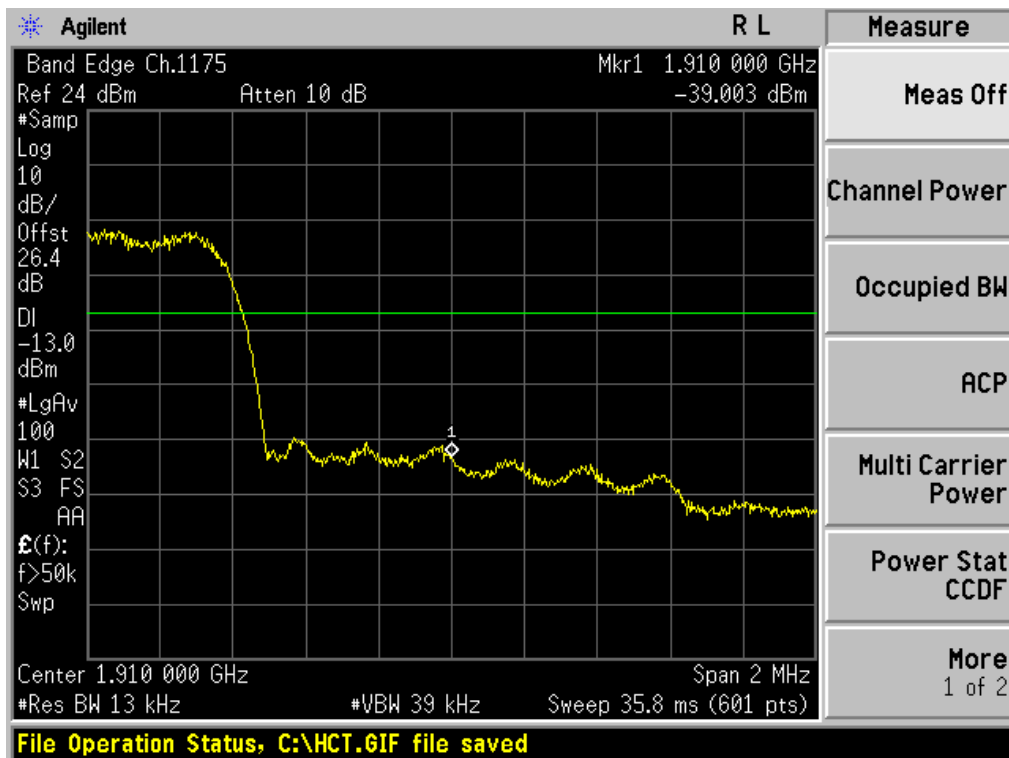


■ PCS EVDO MODE (25 CH.) Block Edge

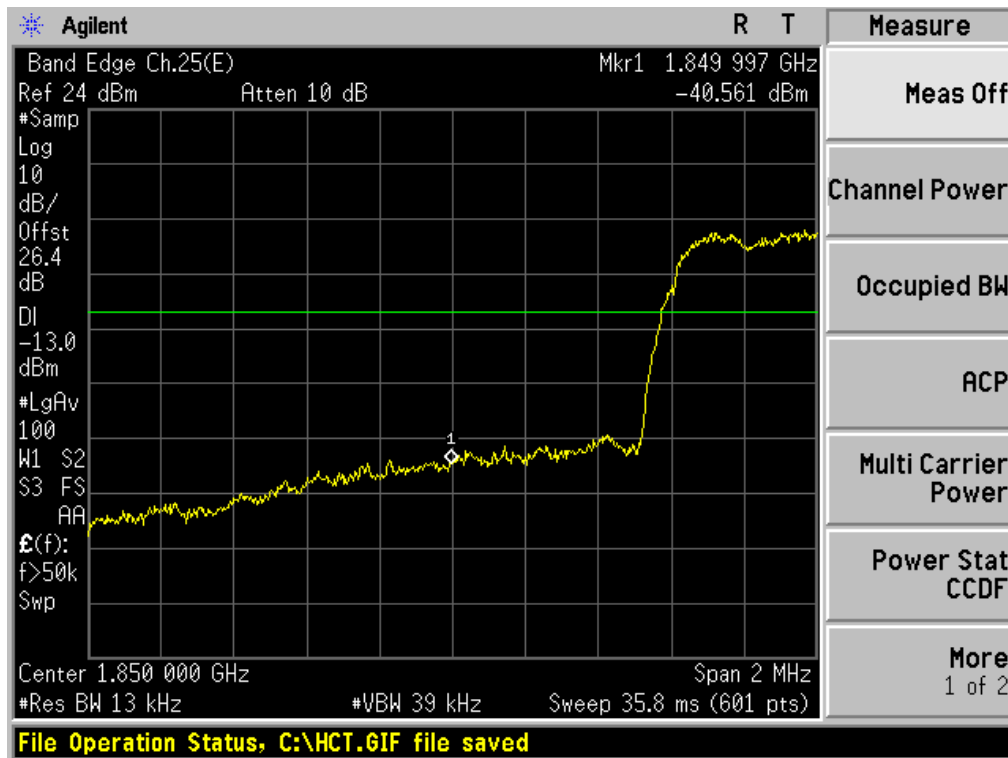


■ PCS EVDO MODE (1175 CH.) Block Edge

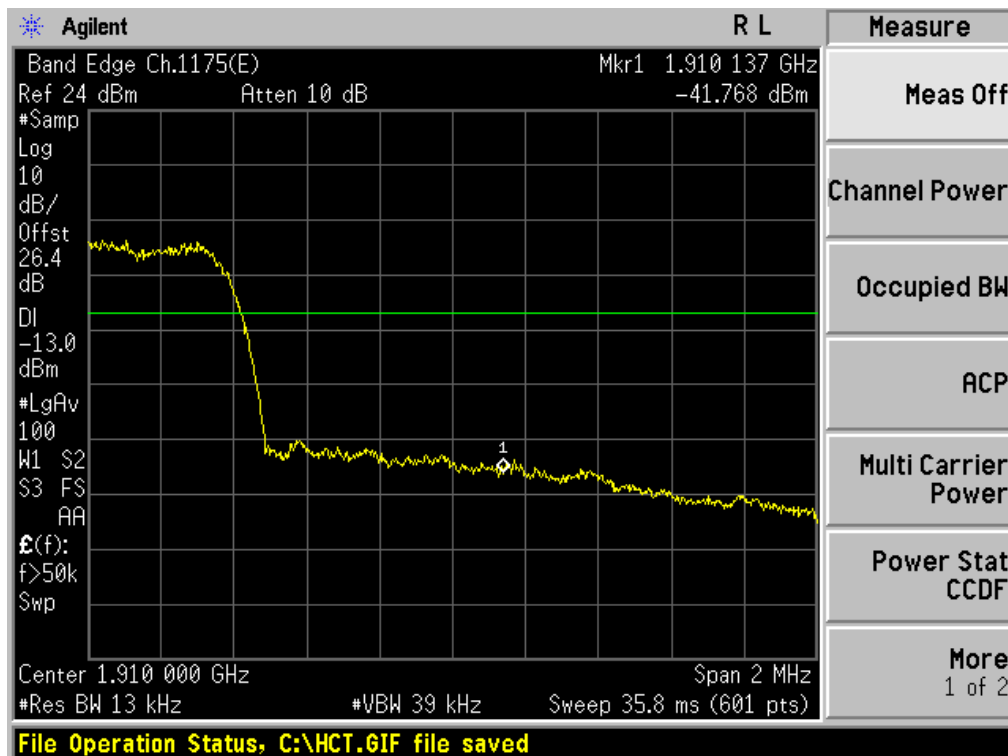


■ CDMA MODE (1013 CH.) 4 MHz Span

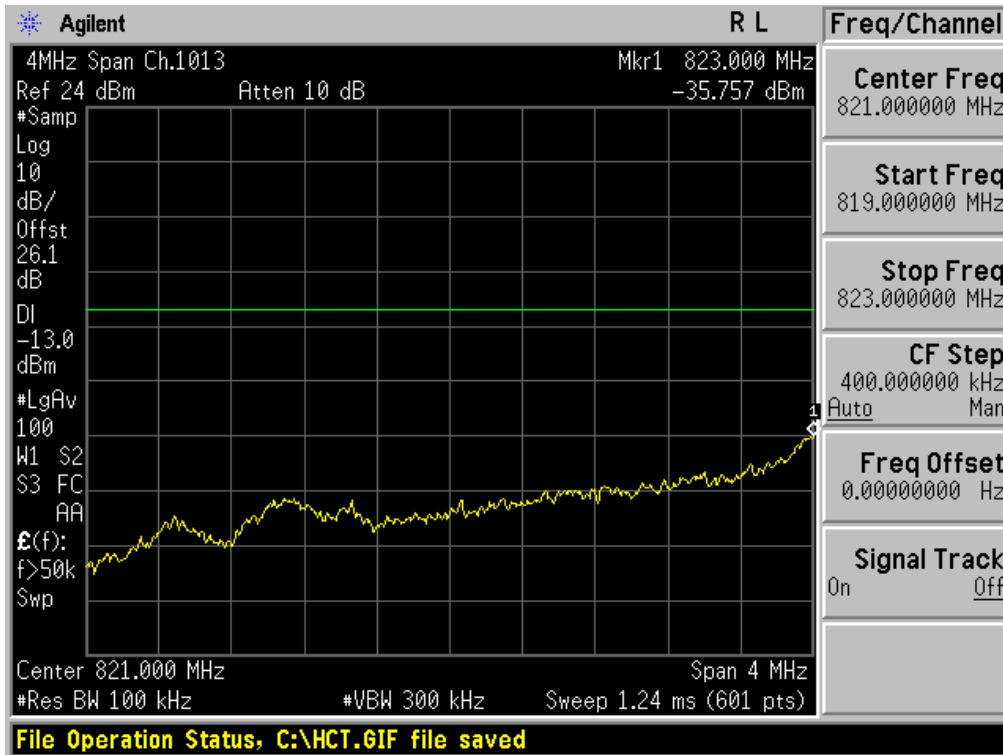


■ CDMA MODE (777 CH.) 4 MHz Span

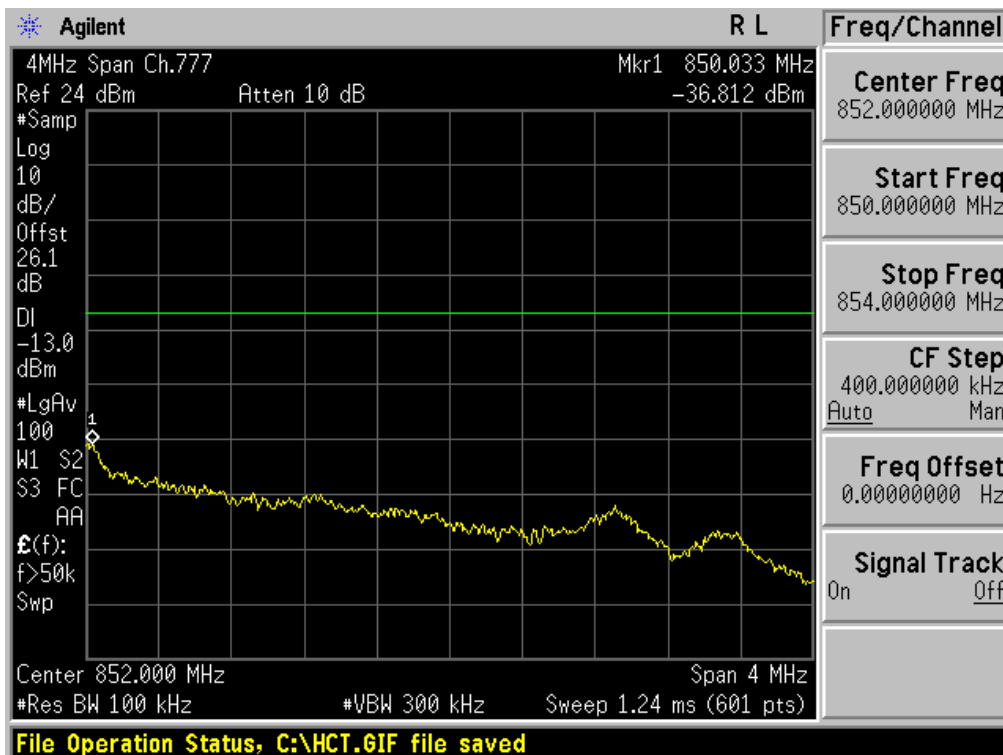


■ CDMA EVDO MODE (1013 CH.) 4 MHz Span

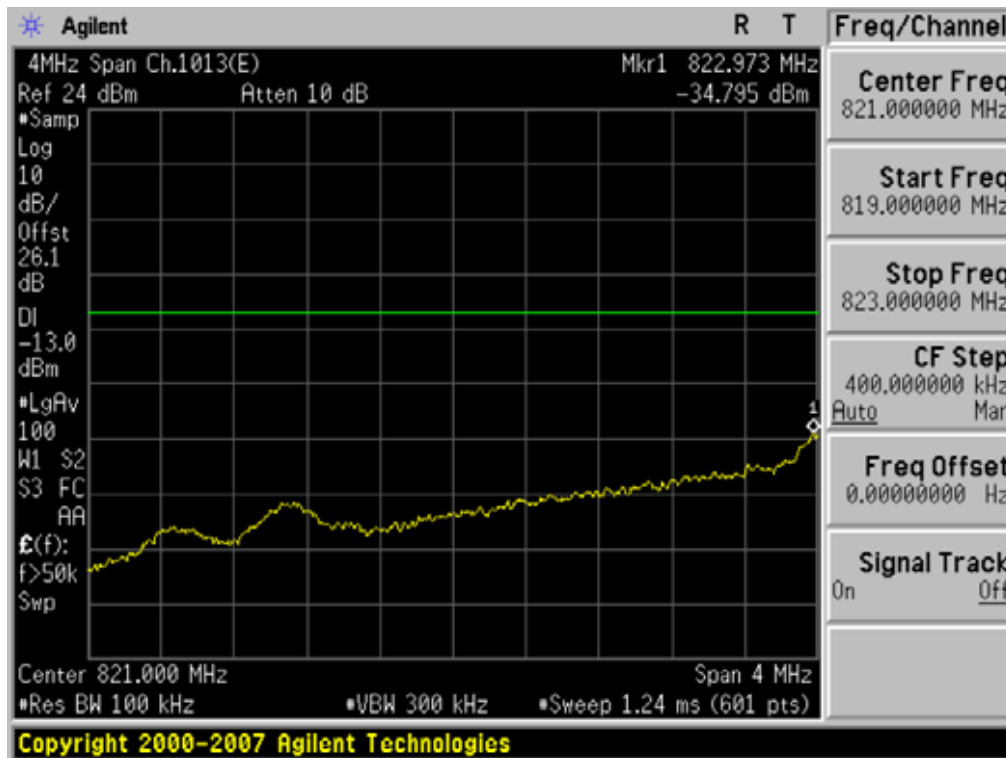


■ CDMA EVDO MODE (777 CH.) 4 MHz Span

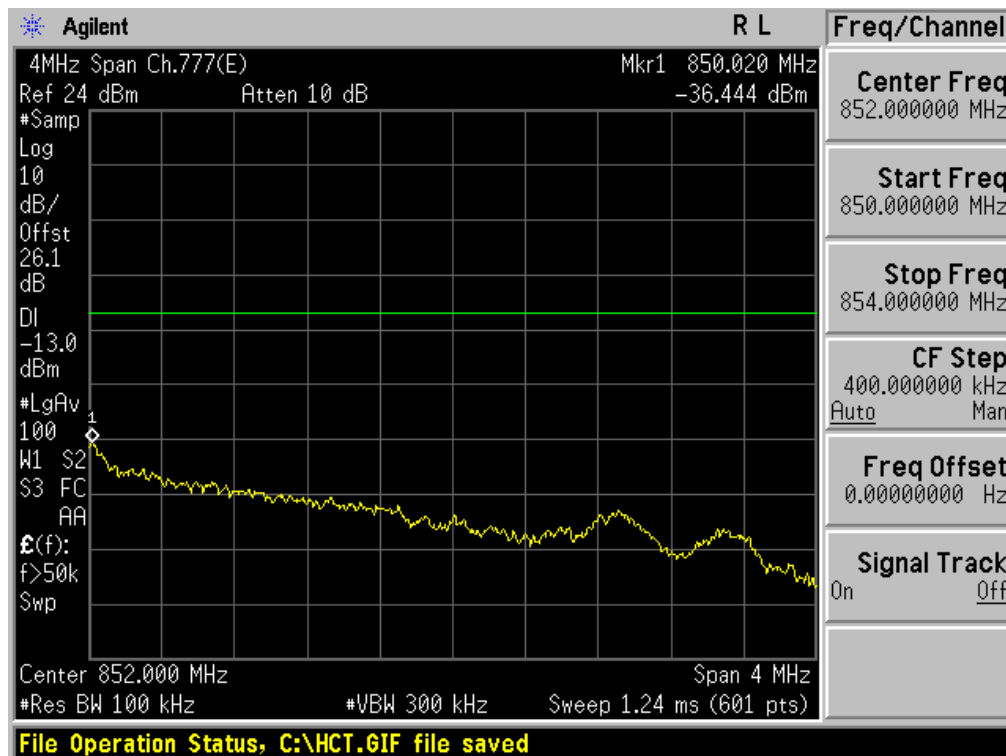


■ PCS MODE (25 CH.) 4 MHz Span

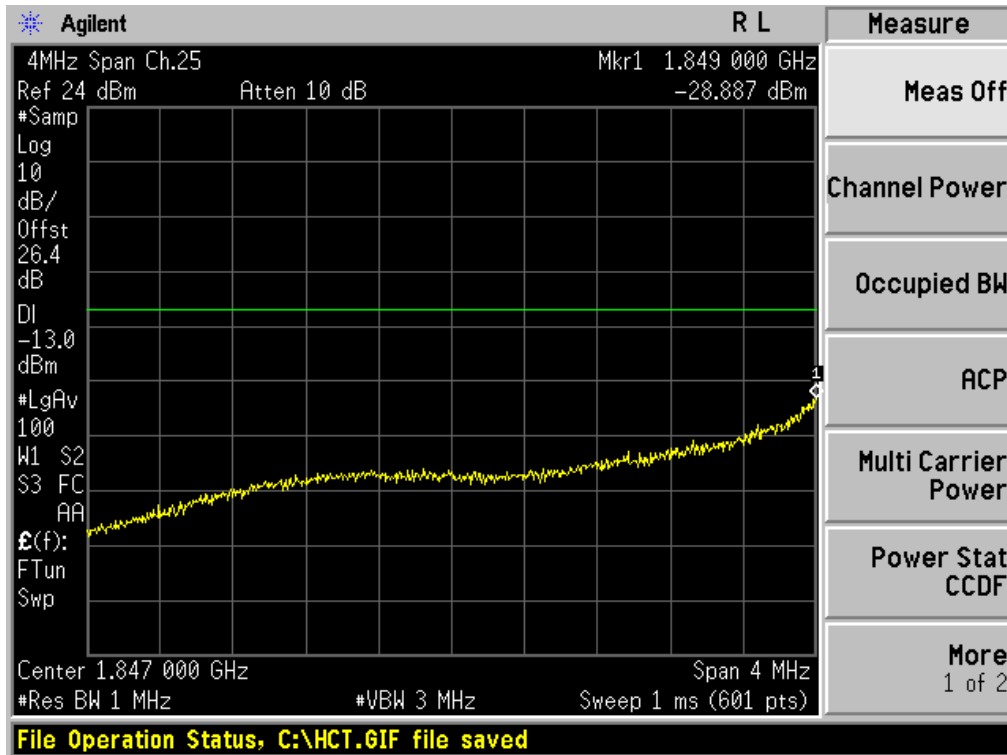


■ PCS MODE (1175 CH.) 4 MHz Span

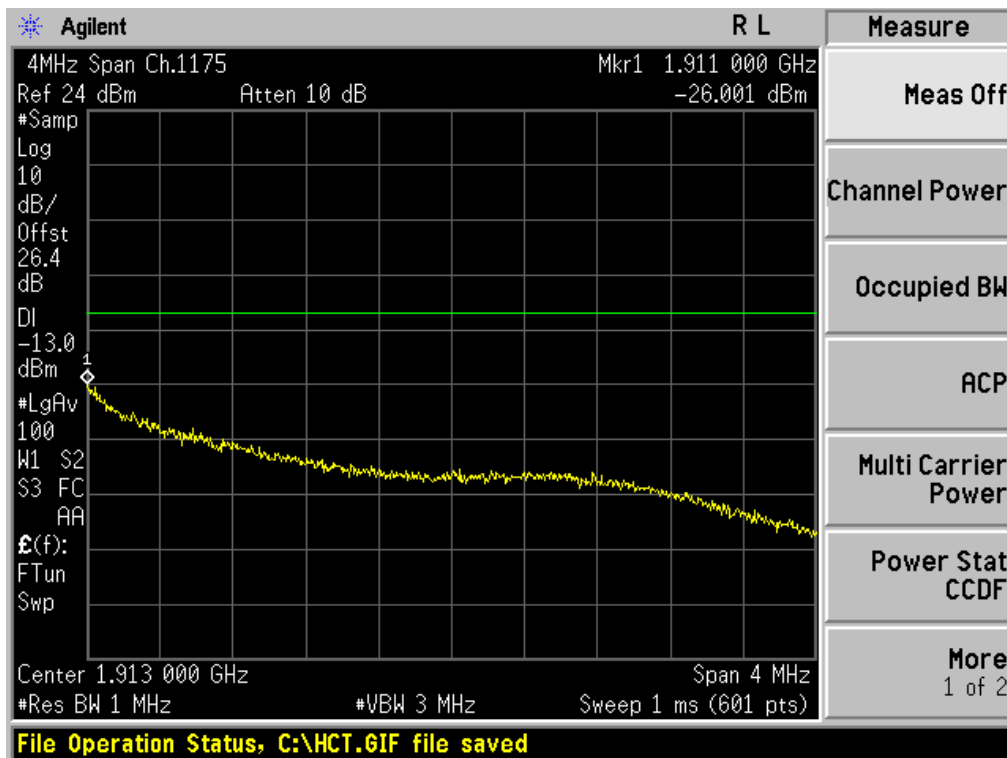


■ PCS EVDO MODE (25 CH.) 4 MHz Span

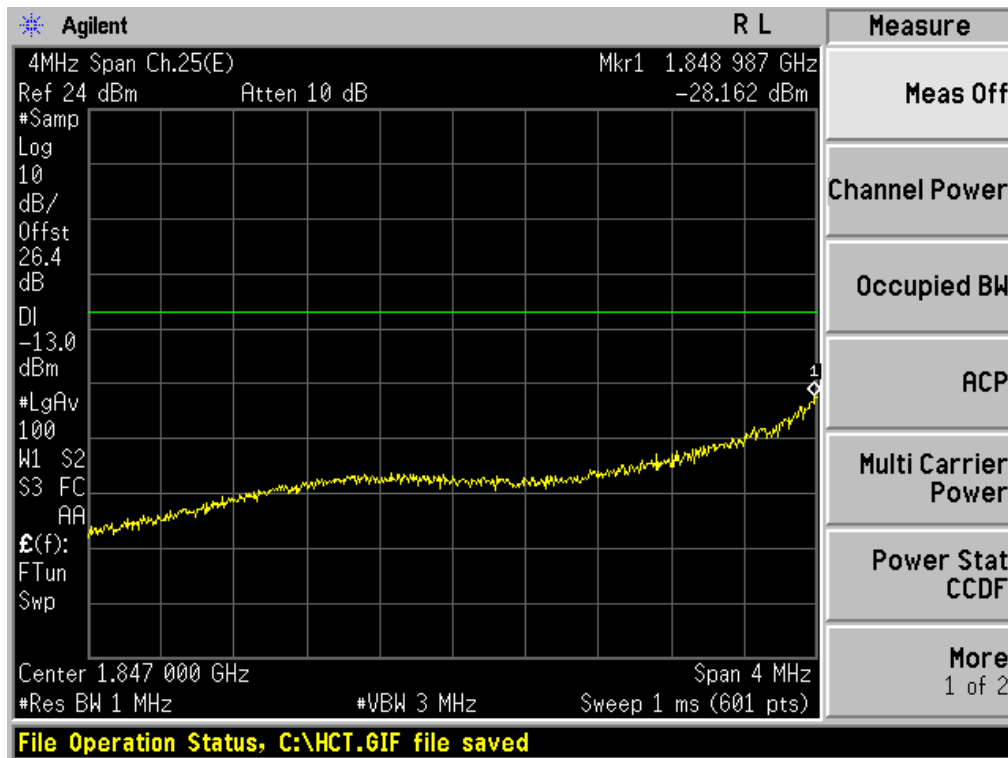


■ PCS EVDO MODE (1175 CH.) 4 MHz Span

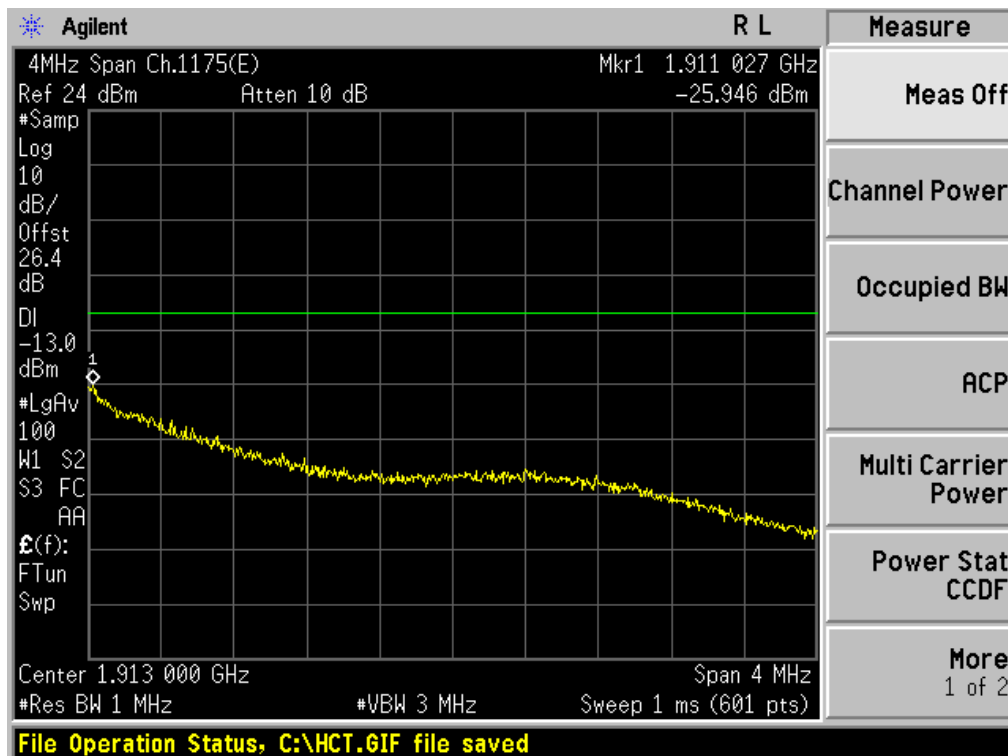


■ CDMA MODE (1013 CH.) Conducted Spurious Emissions - 1

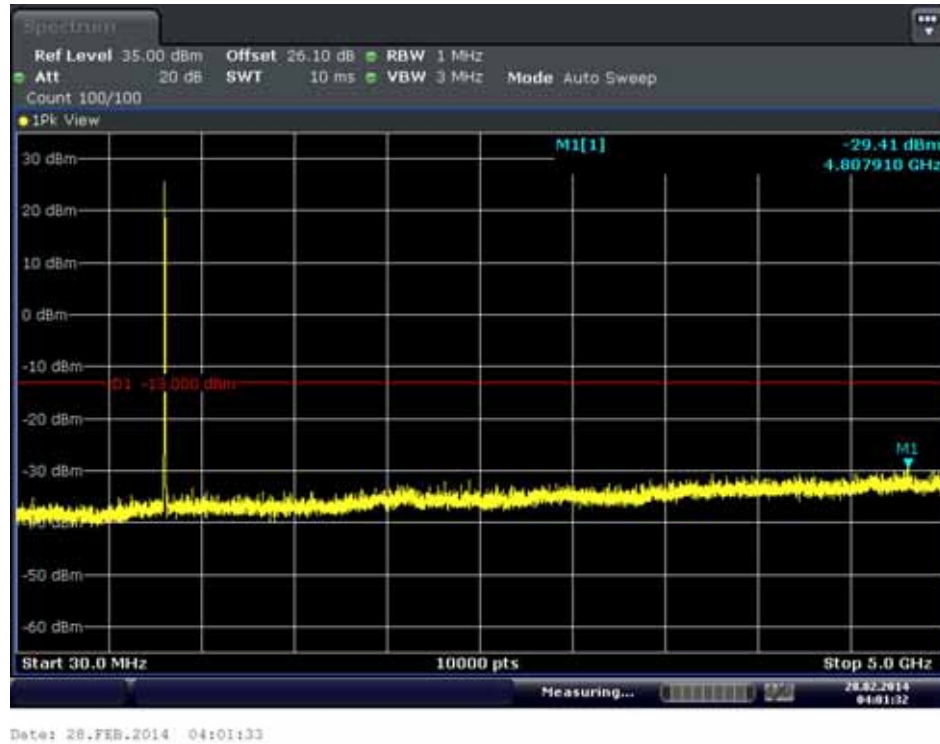


■ CDMA MODE (1013 CH.) Conducted Spurious Emissions - 2

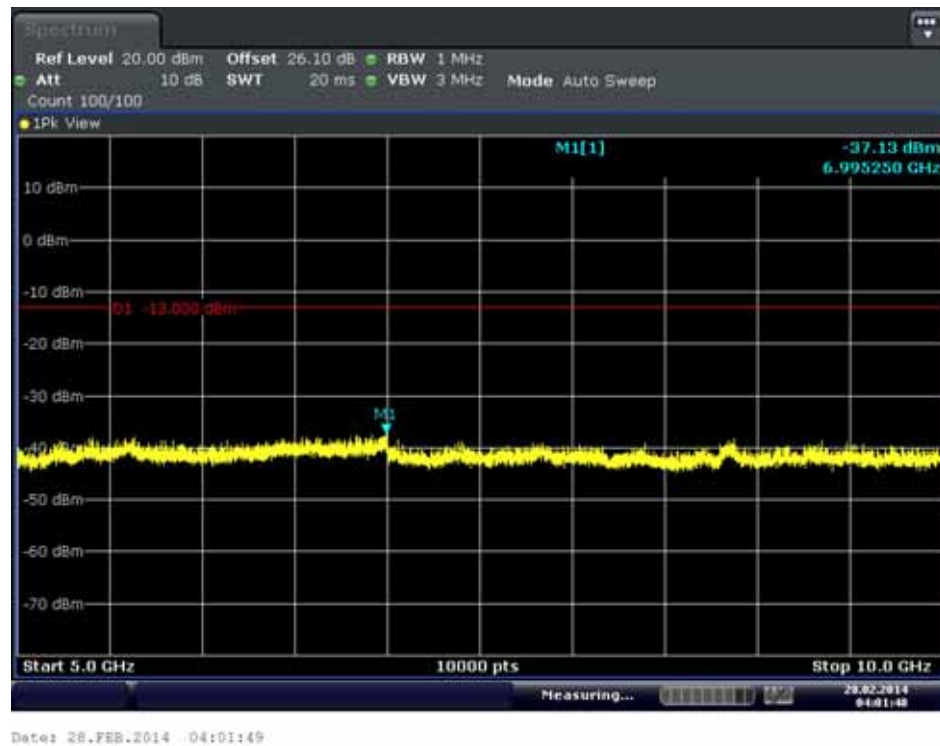


■ CDMA MODE (384 CH.) Conducted Spurious Emissions - 1

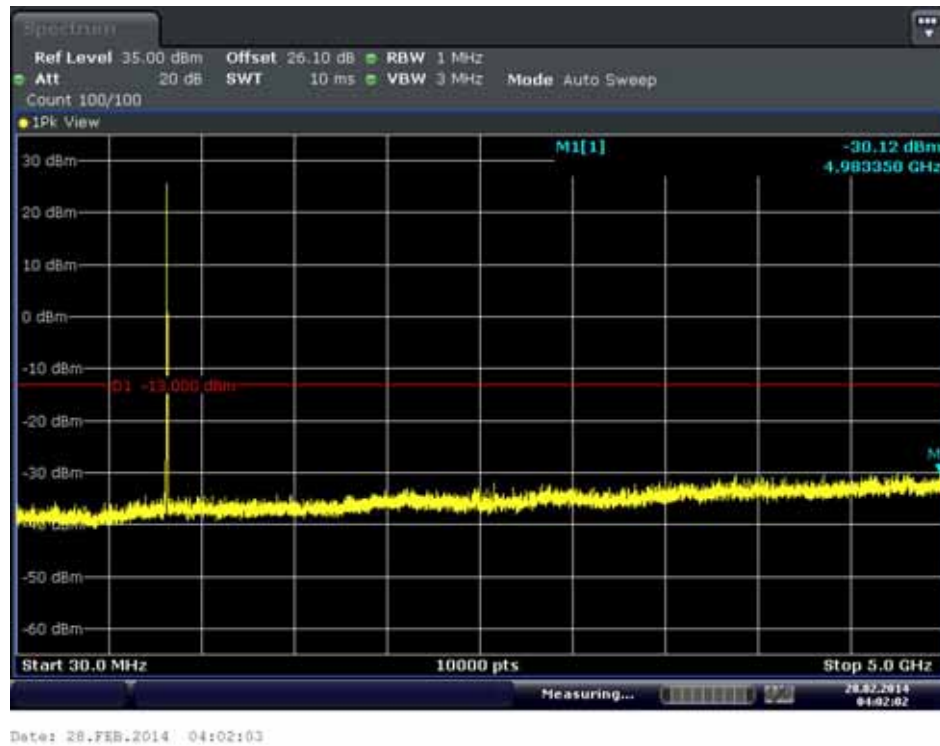


■ CDMA MODE (384 CH.) Conducted Spurious Emissions - 2

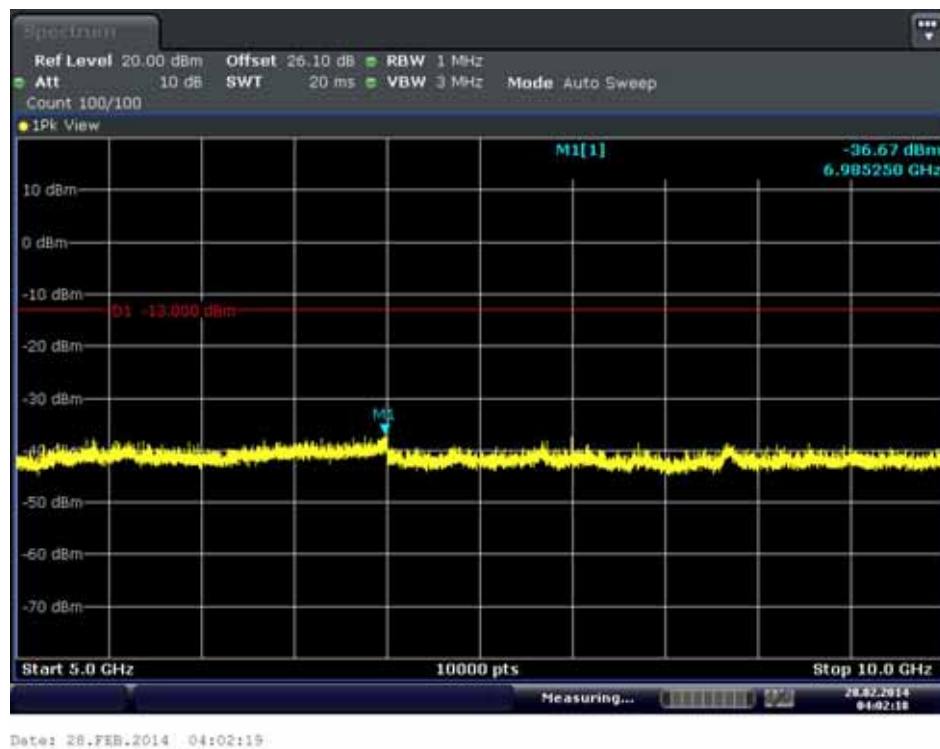


■ CDMA MODE (777 CH.) Conducted Spurious Emissions - 1

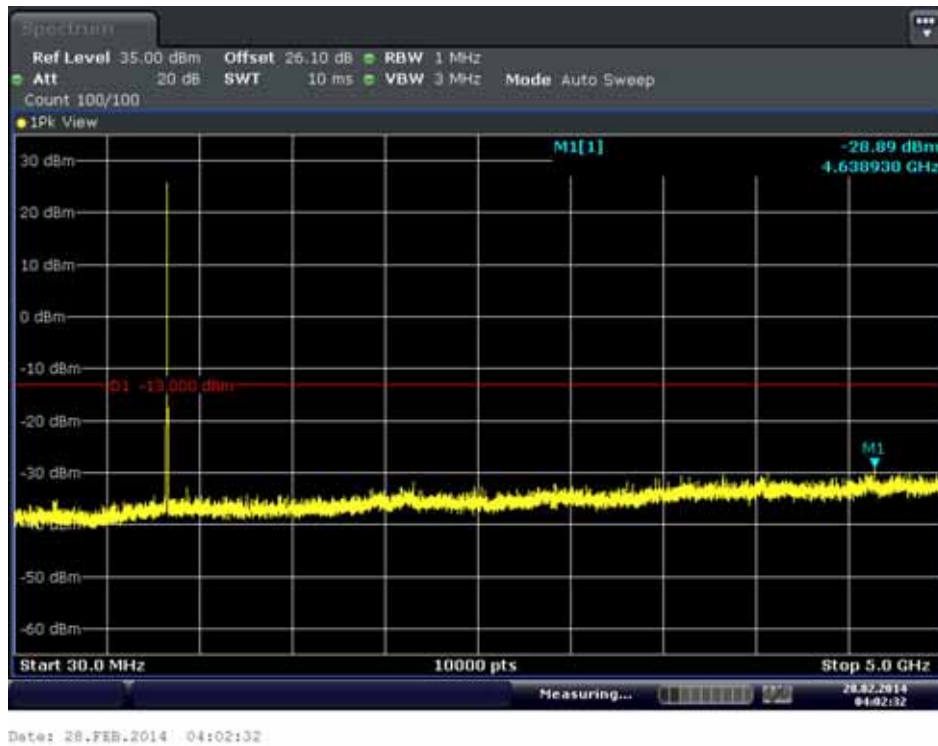

■ CDMA MODE (777 CH.) Conducted Spurious Emissions - 2

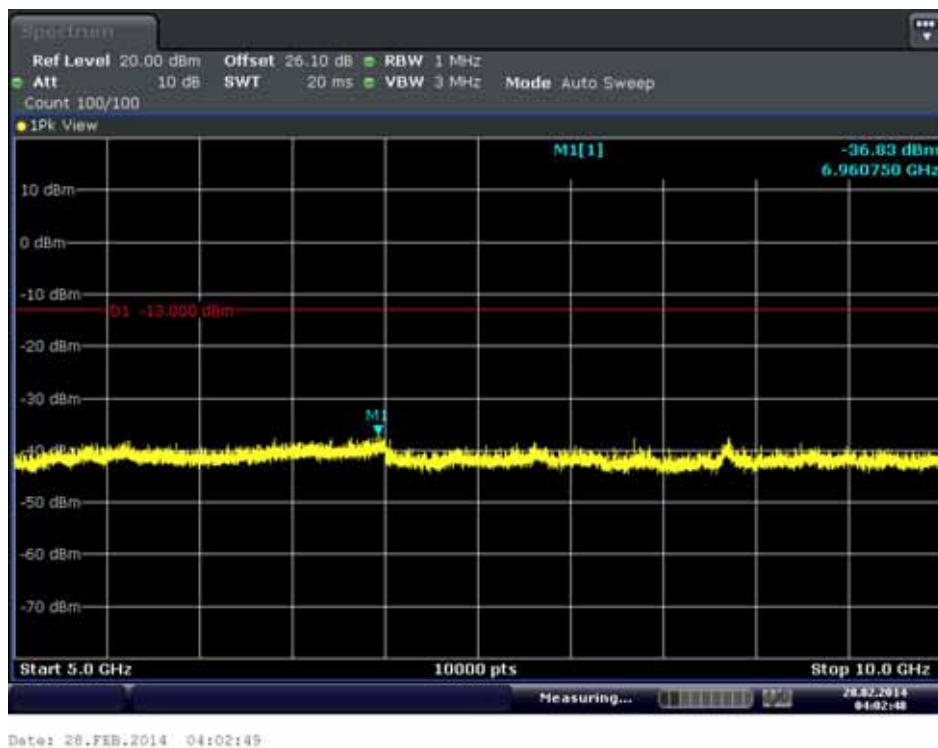

■ PCS MODE (25 CH.) Conducted Spurious Emissions - 1

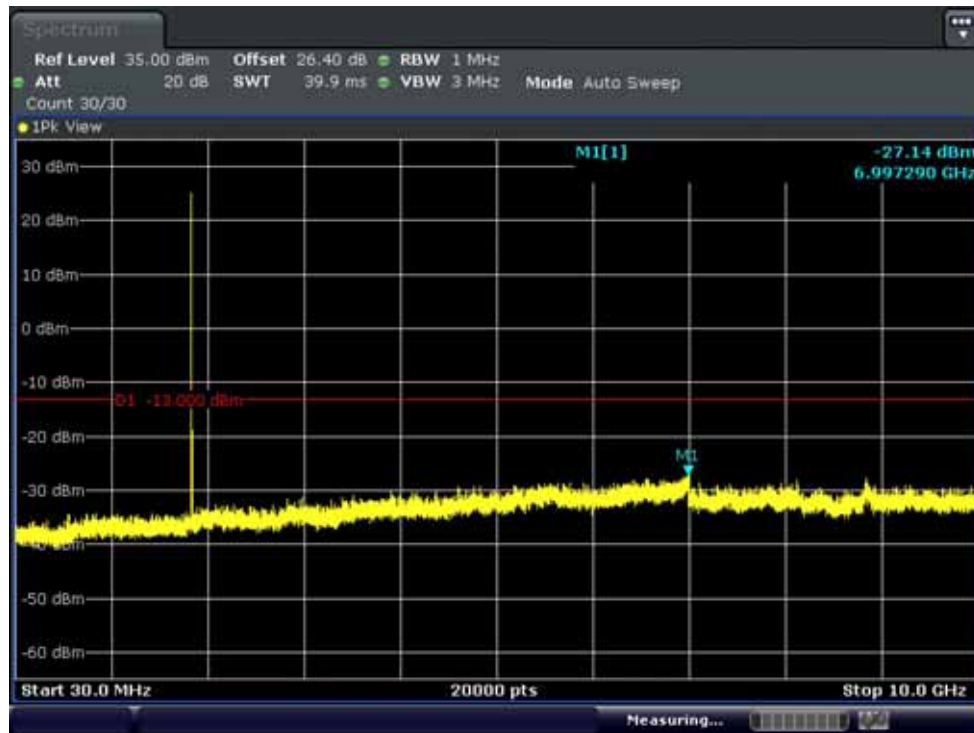

■ PCS MODE (25 CH.) Conducted Spurious Emissions - 2




FCC CERTIFICATION REPORT

www.hct.co.kr

Test Report No. HCT-R-1403-F001-1	Date of Issue: March 06, 2014	EUT Type: Cellular/PCS CDMA/GSM Phone with Bluetooth	FCC ID: JYC78
--------------------------------------	----------------------------------	---	------------------


■ PCS MODE (600 CH.) Conducted Spurious Emissions - 1

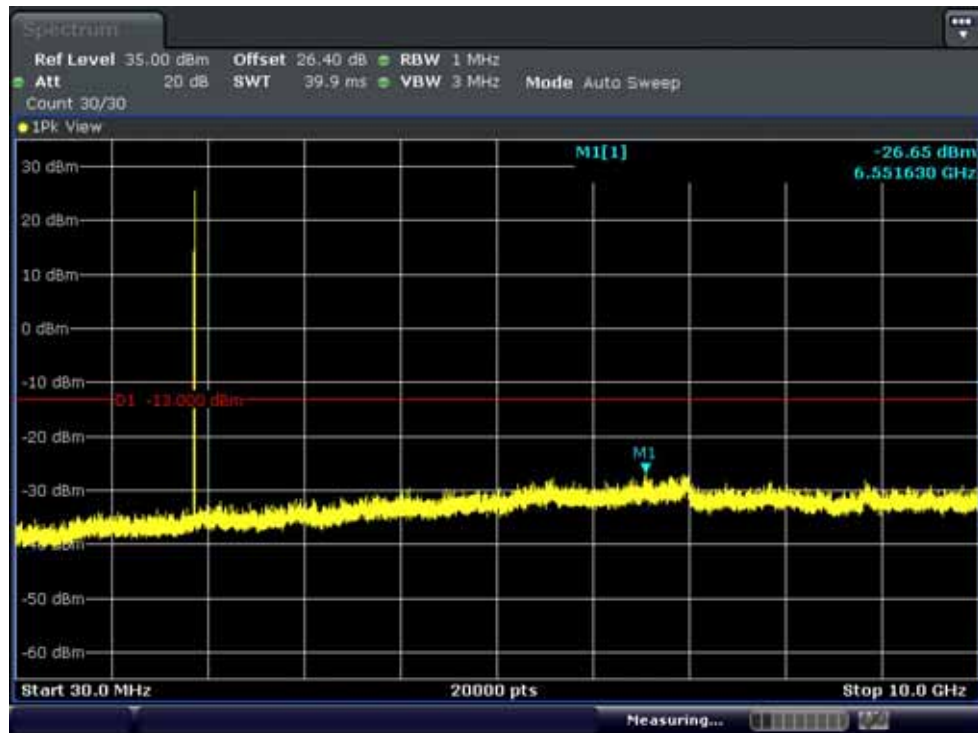

■ PCS MODE (600 CH.) Conducted Spurious Emissions - 2



■ PCS MODE (1175 CH.) Conducted Spurious Emissions - 1

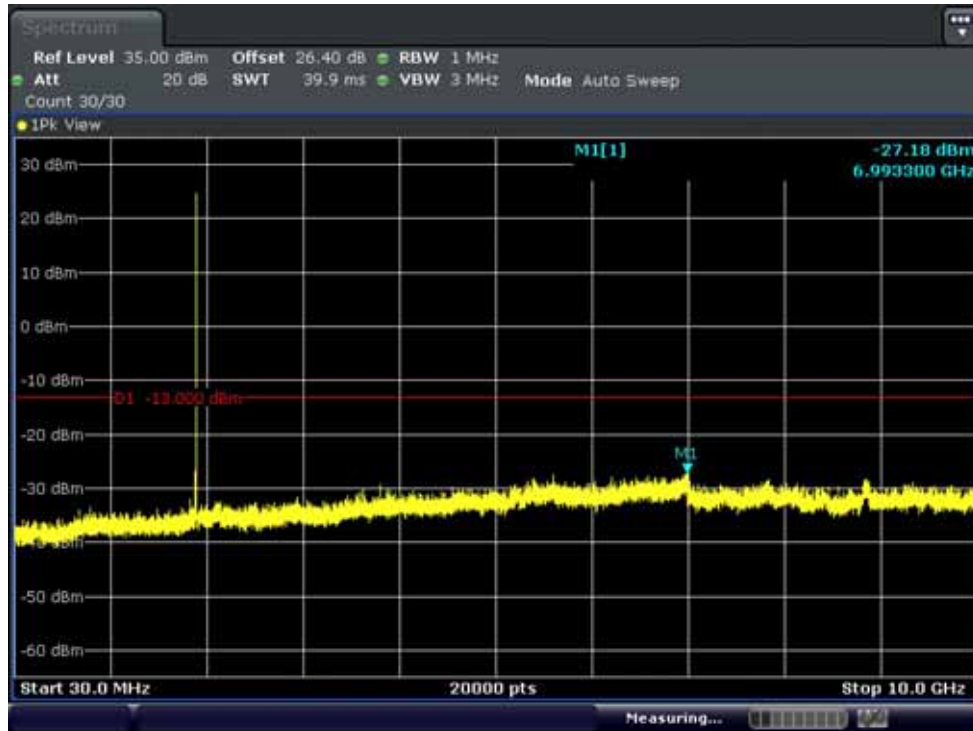

■ PCS MODE (1175 CH.) Conducted Spurious Emissions - 2

