

# TEST REPORT

Report No.: BCTC2412972220E

---

Applicant: Shenzhen Creality 3D Technology Co., Ltd.

---

Product Name: 3D Printer

---

Test Model: Ender V4

---

Tested Date: 2024-12-11 to 2025-02-28

---

Issued Date: 2025-04-02

---

**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID:2AXH6-ENDERV4

Product Name: 3D Printer

Trademark: **CREALITY**  CREALITY  CREALITY 创想三维  Ender

Model/Type Reference: Ender V4,Ender V4S,EnderV4A,Ender V4B,Ender V4C,Ender V4 Pro,Ender V4 SE,Ender V4 Lite

Prepared For: Shenzhen Creality 3D Technology Co., Ltd.

Address: 18F, JinXiuHongDu Building, Meilong Blvd., Longhua Dist., Shenzhen,China 518131

Manufacturer: Shenzhen Creality 3D Technology Co., Ltd.

Address: 18F, JinXiuHongDu Building, Meilong Blvd., Longhua Dist., Shenzhen,China 518131

Prepared By: Shenzhen BCTC Testing Co., Ltd

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-12-11

Sample Tested Date: 2024-12-11 to 2025-02-28


Report No.: BCTC2412972220E

Test Standards: FCC Part15.247  
ANSI C63.10-2013

Test Results: PASS

Remark: This is WIFI-2.4GHz band radio test report.

Tested by:

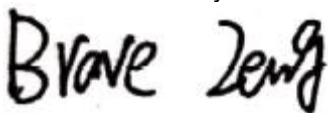

Brave Zeng/ Project Handler

Approved by:




Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table of Content


Test Report Declaration	Page
1. Version .....	5
2. Test Summary .....	6
3. Measurement Uncertainty .....	7
4. Product Information and Test Setup .....	8
4.1 Product Information .....	8
4.2 Test Setup Configuration .....	9
4.4 Channel List .....	10
4.5 Test Mode .....	10
4.6 Table Of Parameters Of Text Software Setting .....	11
5. Test Facility And Test Instrument Used .....	12
5.1 Test Facility .....	12
5.2 Test Instrument Used .....	12
6. Conducted Emissions .....	14
6.1 Block Diagram Of Test Setup .....	14
6.2 Limit .....	14
6.3 Test procedure .....	14
6.4 EUT operating Conditions .....	14
6.5 Test Result .....	15
7. Radiated Emissions .....	17
7.1 Block Diagram Of Test Setup .....	17
7.2 Limit .....	18
7.3 Test procedure .....	19
7.4 EUT Operating Conditions .....	20
7.5 Test Result .....	20
8. Radiated Band Emission Measurement and Restricted Bands Of Operation .....	27
8.1 Block Diagram Of Test Setup .....	27
8.2 Limit .....	27
8.3 Test procedure .....	28
8.4 EUT Operating Conditions .....	28
8.5 Test Result .....	29
9. Power Spectral Density Test .....	31
9.1 Block Diagram Of Test Setup .....	31
9.2 Limit .....	31
9.3 Test procedure .....	31
9.4 EUT Operating Conditions .....	31
9.5 Test Result .....	32
10. -6dB Bandwidth Test .....	39
10.1 Block Diagram Of Test Setup .....	39
10.2 Limit .....	39
10.3 Test procedure .....	39
10.4 EUT Operating Conditions .....	39
10.5 Test Result .....	40
11. Peak Output Power Test .....	47
11.1 Block Diagram Of Test Setup .....	47
11.2 Limit .....	47
11.3 Test Procedure .....	47

11.4	EUT Operating Conditions .....	47
11.5	Test Result .....	48
12.	100 kHz Bandwidth Of Frequency Band Edge .....	49
12.1	Block Diagram Of Test Setup.....	49
12.2	Limit .....	49
12.3	Test Procedure .....	49
12.4	EUT Operating Conditions .....	49
12.5	Test Result.....	50
13.	Duty Cycle Of Test Signal .....	70
13.1	Standard Requirement .....	70
13.2	Formula.....	70
13.3	Test Procedure .....	70
13.4	Test Result.....	70
14.	Antenna Requirement .....	71
14.1	Limit .....	71
14.1	Test Result.....	71
15.	EUT Test Setup Photographs.....	72

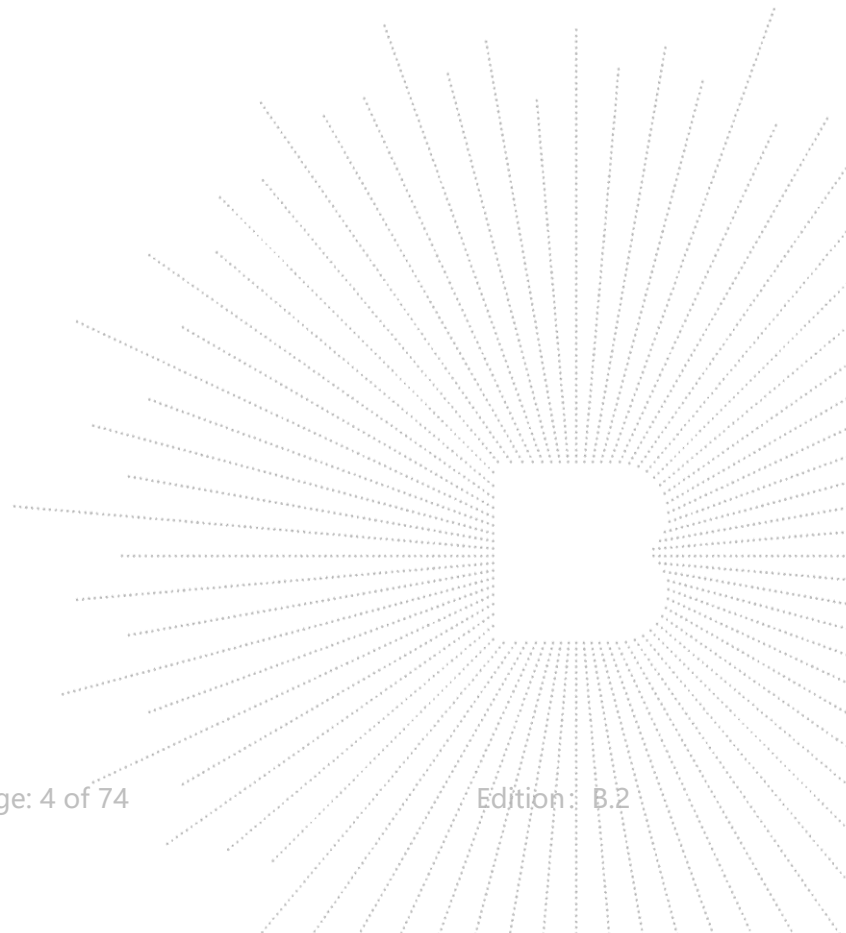

**1. Version**

Report No.	Issue Date	Description	Approved
BCTC2412972220E	2025-04-02	Original	Valid

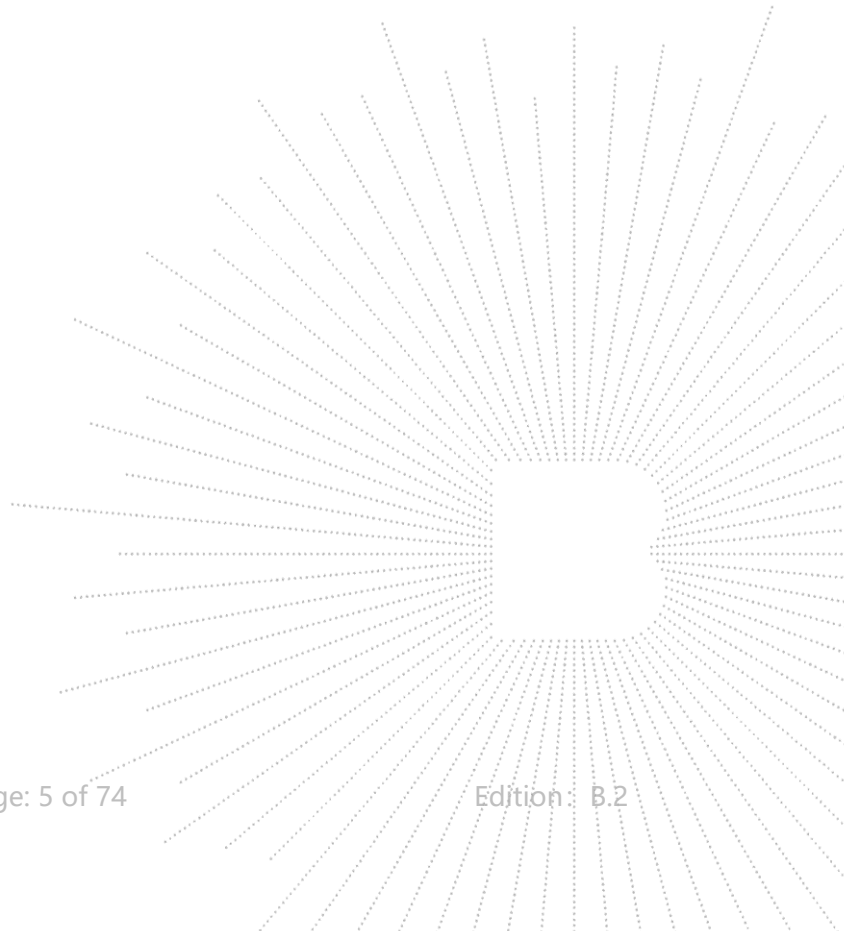

## 2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d)	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247 (d)	PASS
8	Antenna Requirement	15.203	PASS
<p>NOTE1: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.</p>			

CO., LTD.

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

## 4. Product Information and Test Setup

### 4.1 Product Information


Model/Type Ref.	Ender V4,Ender V4S,EnderV4A,Ender V4B,Ender V4C,Ender V4 Pro,Ender V4 SE,Ender V4 Lite
Model differences:	The following models of units we produce are identical in electrical, mechanical and physical structure; The difference is only in the model name, we finally have Ender V4 as test model.
Hardware Version:	N/A
Software Version:	N/A
IEEE 802.11 WLAN Mode Supported	802.11b 802.11g 802.11n(20MHz channel bandwidth) 802.11n(40MHz channel bandwidth)
Operation Frequency:	802.11b/g/n 20MHz:2412~2462 MHz 802.11n/ 40MHz:2422~2452 MHz
Type of Modulation:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Number Of Channel:	11 channels for 802.11b/g/n(HT20); 7 Channels for 802.11n(HT40)
Antenna installation:	Internal antenna
Antenna Gain:	1.80dBi
Remark:	The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information.
Ratings:	AC100-240V~50/60Hz,900W




## 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP Photographs for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



## 4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	3D Printer	N/A	Ender V4	N/A	EUT
E-2	N/A	N/A	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

Channel List for 802.11b/g/n (20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

Channel List for 802.11n (40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432
06	2437	07	2442	08	2447
09	2452				

#### 4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH 01	802.11b
Mode 2	CH 06	
Mode 3	CH 11	
Mode 4	CH 01	802.11g
Mode 5	CH 06	
Mode 6	CH 11	
Mode 7	CH 01	802.11n20
Mode 8	CH 06	
Mode 9	CH 11	
Mode 10	CH 03	802.11n 40
Mode 11	CH 06	
Mode 12	CH 09	
Mode 13	Link mode (Conducted emission and Radiated emission)	

##### Notes:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
3. According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup" 1Mbps for 802.11b,6Mbps for 802.11g,13Mbps for 802.11n 20 , 54Mbps for 802.11 n 40

#### 4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Frequency	2412 MHz	2437 MHz	2462 MHz
Parameters	DEF	DEF	DEF
Frequency	2422 MHz	2437 MHz	2452 MHz
Parameters	DEF	DEF	DEF

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

### 5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD 9561-F	01323	May 16, 2024	May 15, 2025


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer 20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer 9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025

Radiated Emissions Test (966 Chamber02)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	SKET	966 Room	966	Oct. 31. 2024	Oct. 30. 2027
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRI7	100010	Oct. 31. 2024	Oct. 30. 2025
Amplifier	SKET	LNPA-30M01 G-30	SK2021082004	Oct. 31. 2024	Oct. 30. 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9168	1323	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G1 8G-45dB	SK202104090 1	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 16, 2024	May 15, 2025
Horn Antenn(18GH z-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\
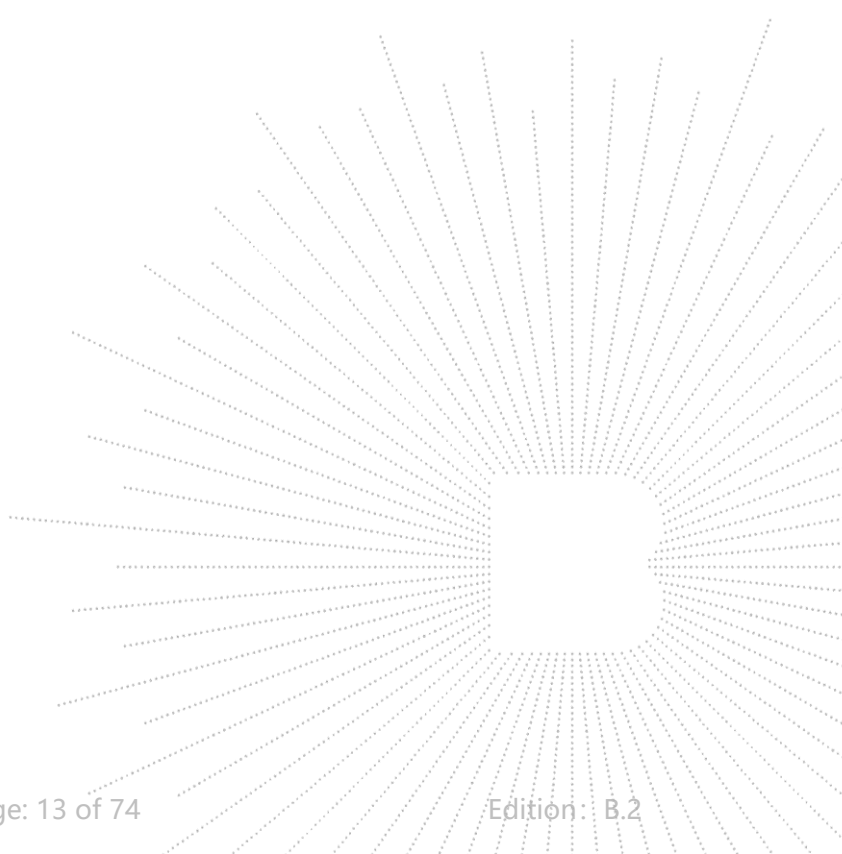
## 6. Conducted Emissions

### 6.1 Block Diagram Of Test Setup

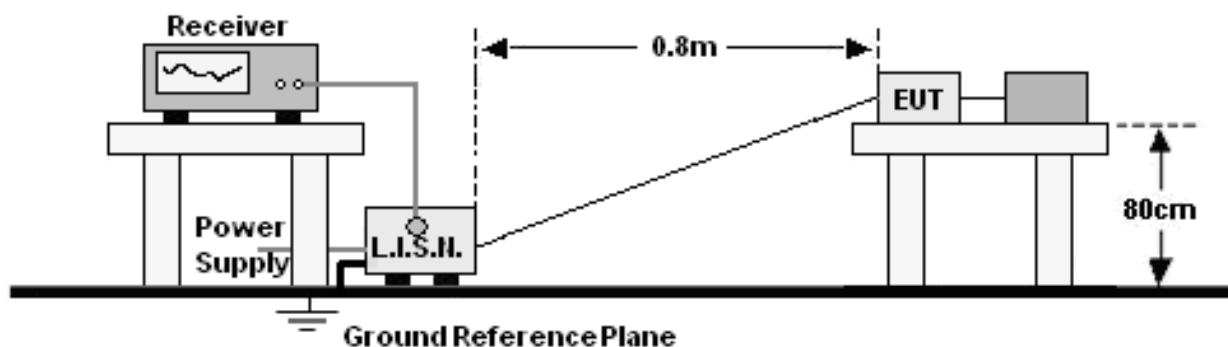

### 6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- \*Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

### 6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

### 6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 13

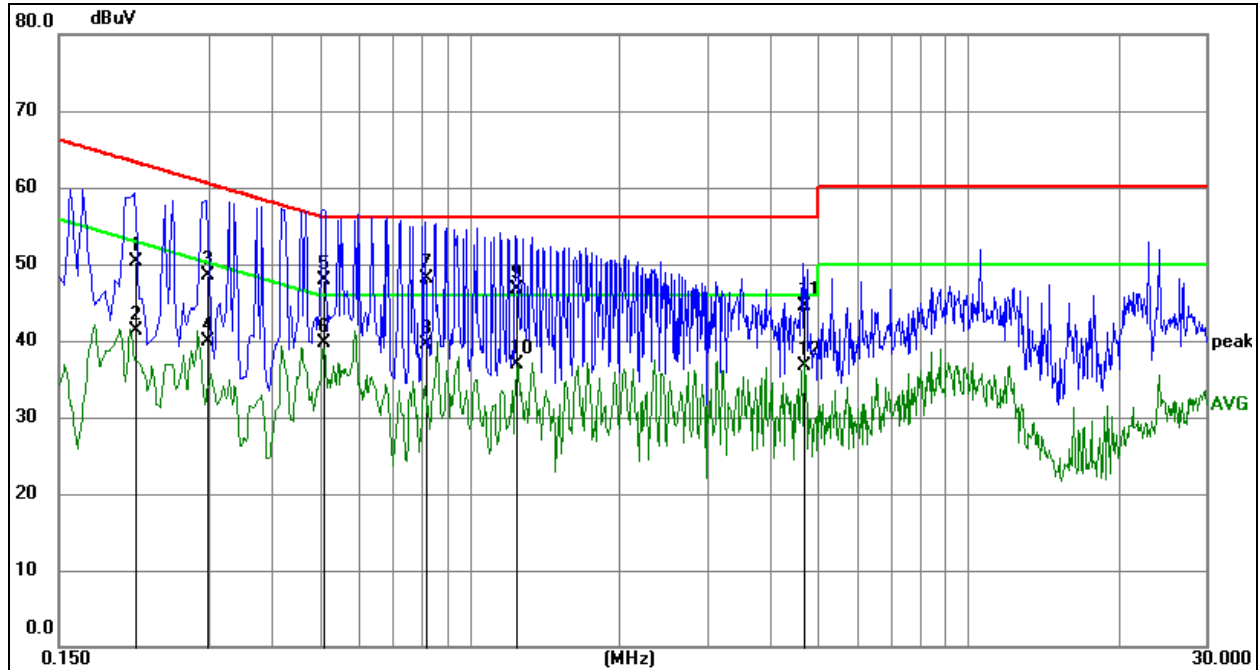


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2130	39.79	10.51	50.30	63.09	-12.79	QP
2	0.2130	30.79	10.51	41.30	53.09	-11.79	AVG
3	0.2985	38.00	10.50	48.50	60.28	-11.78	QP
4	0.2985	29.40	10.50	39.90	50.28	-10.38	AVG
5	0.5100	37.49	10.51	48.00	56.00	-8.00	QP
6 *	0.5100	29.29	10.51	39.80	46.00	-6.20	AVG
7	0.8160	37.69	10.51	48.20	56.00	-7.80	QP
8	0.8160	29.09	10.51	39.60	46.00	-6.40	AVG
9	1.2390	36.25	10.55	46.80	56.00	-9.20	QP
10	1.2390	26.45	10.55	37.00	46.00	-9.00	AVG
11	4.6770	33.81	10.79	44.60	56.00	-11.40	QP
12	4.6770	26.01	10.79	36.80	46.00	-9.20	AVG



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 13

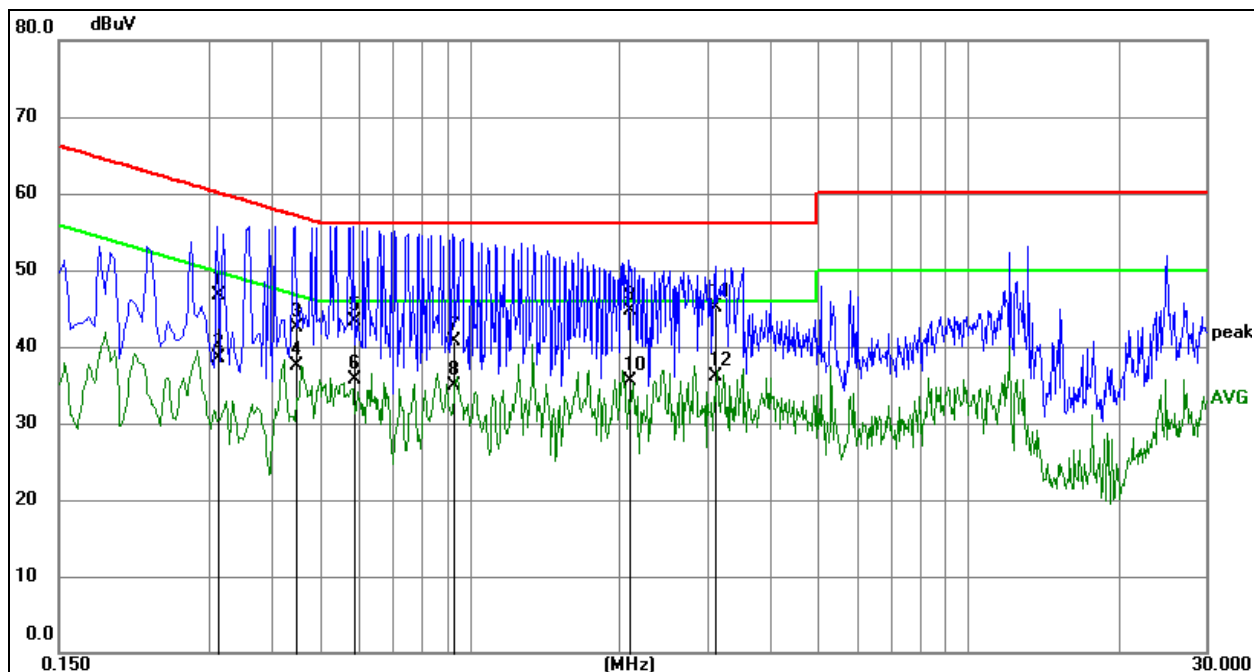
**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3120	36.20	10.50	46.70	59.92	-13.22	QP
2	0.3120	28.10	10.50	38.60	49.92	-11.32	AVG
3	0.4470	32.00	10.50	42.50	56.93	-14.43	QP
4 *	0.4470	27.00	10.50	37.50	46.93	-9.43	AVG
5	0.5865	32.89	10.51	43.40	56.00	-12.60	QP
6	0.5865	25.29	10.51	35.80	46.00	-10.20	AVG
7	0.9240	30.18	10.52	40.70	56.00	-15.30	QP
8	0.9240	24.38	10.52	34.90	46.00	-11.10	AVG
9	2.0895	34.14	10.66	44.80	56.00	-11.20	QP
10	2.0895	24.94	10.66	35.60	46.00	-10.40	AVG
11	3.1155	34.52	10.68	45.20	56.00	-10.80	QP
12	3.1155	25.52	10.68	36.20	46.00	-9.80	AVG




## 7. Radiated Emissions

### 7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

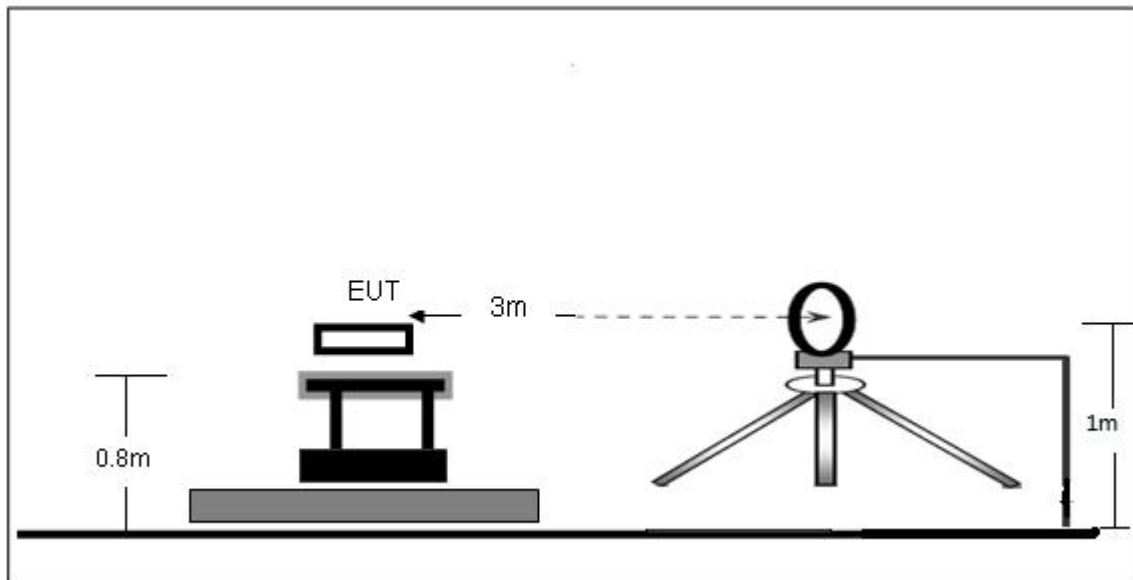

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

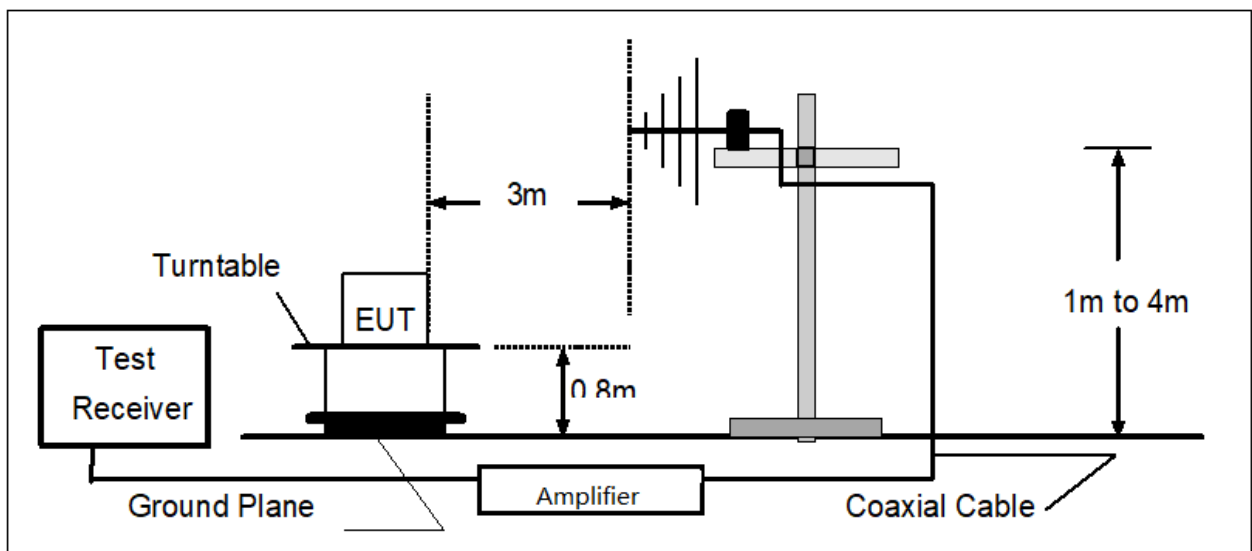

### (C) Radiated Emission Test-Up Frequency Above 1GHz

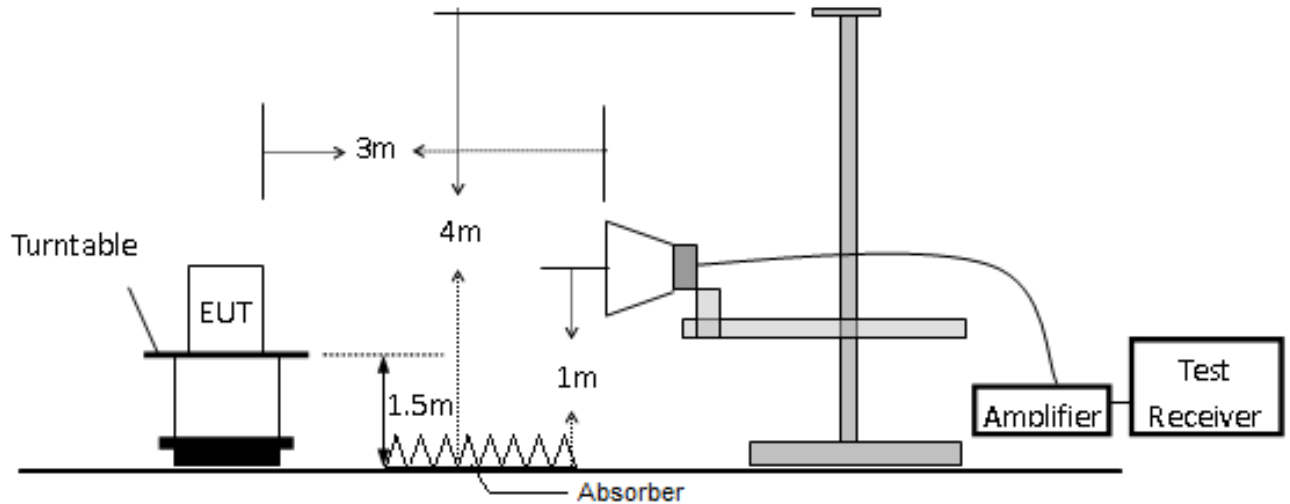

## 7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

#### Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

## Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1) through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

## 7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

## 7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC120V/60Hz
Test Mode:	Mode 13	Polarization:	---

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 13

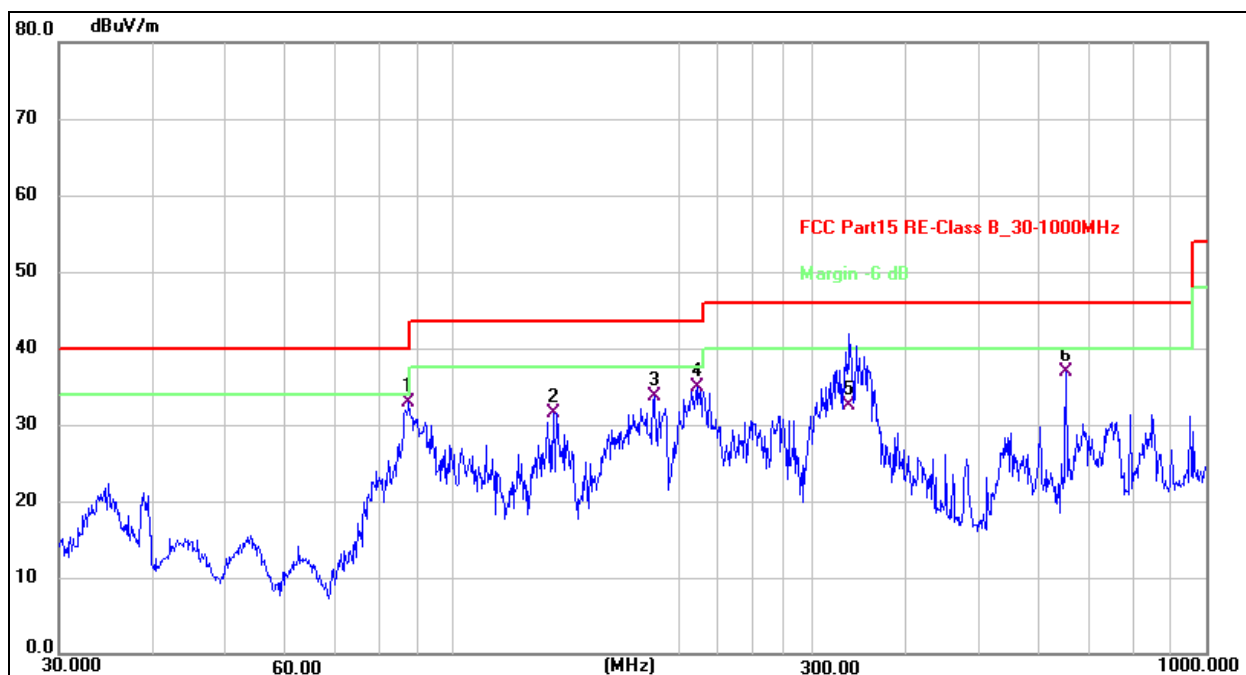


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	87.4177	53.91	-20.96	32.95	40.00	-7.05	QP
2	135.9822	49.50	-18.07	31.43	43.50	-12.07	QP
3	185.1379	52.52	-18.90	33.62	43.50	-9.88	QP
4	210.7860	55.06	-20.15	34.91	43.50	-8.59	QP
5	336.0352	48.37	-15.77	32.60	46.00	-13.40	QP
6	651.9417	44.52	-7.65	36.87	46.00	-9.13	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 13

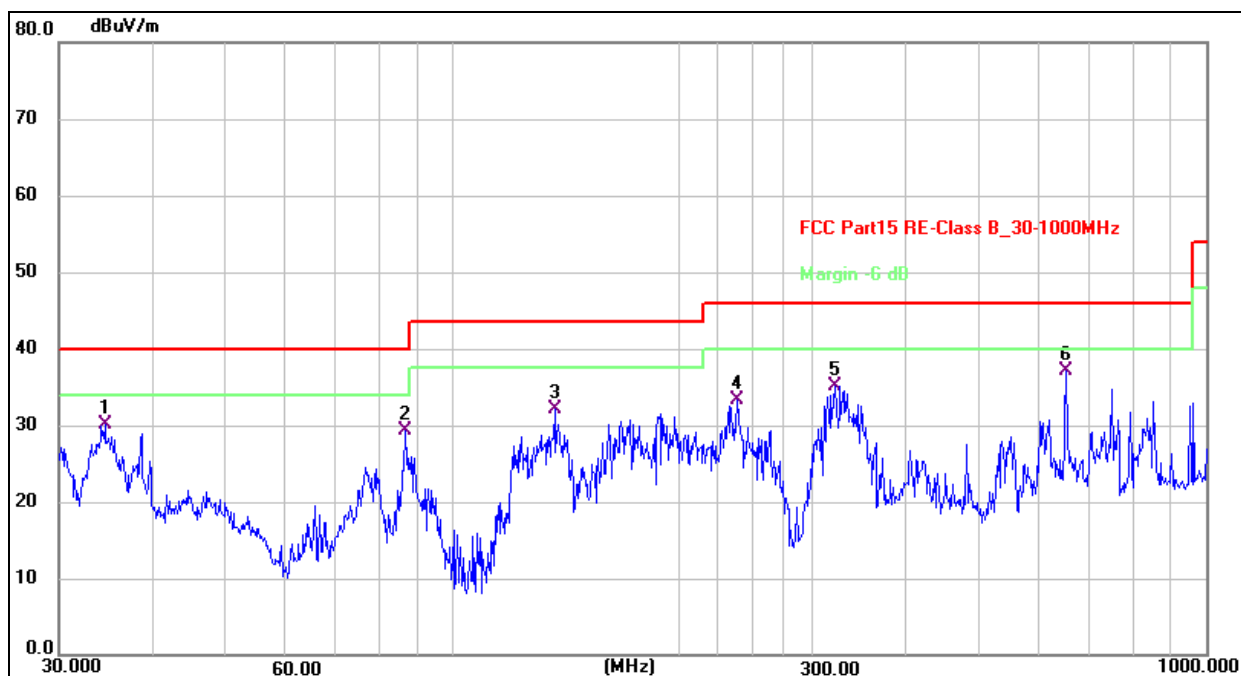

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	34.5173	47.77	-17.67	30.10	40.00	-9.90	QP
2	86.5029	50.22	-20.90	29.32	40.00	-10.68	QP
3	136.4598	50.22	-18.03	32.19	43.50	-11.31	QP
4	238.3102	52.95	-19.56	33.39	46.00	-12.61	QP
5	321.0608	51.33	-16.17	35.16	46.00	-10.84	QP
6 *	651.9417	44.69	-7.65	37.04	46.00	-8.96	QP



### Between 1GHz – 25GHz

#### 802.11b

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	72.84	-19.95	52.89	74.00	-21.11	PK
V	4824.00	61.97	-19.95	42.02	54.00	-11.98	AV
V	7236.00	62.42	-14.14	48.28	74.00	-25.72	PK
V	7236.00	51.64	-14.14	37.50	54.00	-16.50	AV
H	4824.00	70.38	-19.95	50.43	74.00	-23.57	PK
H	4824.00	61.32	-19.95	41.37	54.00	-12.63	AV
H	7236.00	59.81	-14.14	45.67	74.00	-28.33	PK
H	7236.00	52.71	-14.14	38.57	54.00	-15.43	AV
Middle channel:2437MHz							
V	4874.00	71.83	-19.85	51.98	74.00	-22.02	PK
V	4874.00	65.44	-19.85	45.59	54.00	-8.41	AV
V	7311.00	63.24	-13.93	49.31	74.00	-24.69	PK
V	7311.00	54.73	-13.93	40.80	54.00	-13.20	AV
H	4874.00	67.37	-19.85	47.52	74.00	-26.48	PK
H	4874.00	56.74	-19.85	36.89	54.00	-17.11	AV
H	7311.00	60.58	-13.93	46.65	74.00	-27.35	PK
H	7311.00	53.49	-13.93	39.56	54.00	-14.44	AV
High channel:2462MHz							
V	4924.00	74.45	-19.75	54.70	74.00	-19.30	PK
V	4924.00	64.34	-19.75	44.59	54.00	-9.41	AV
V	7386.00	68.23	-13.72	54.51	74.00	-19.49	PK
V	7386.00	58.36	-13.72	44.64	54.00	-9.36	AV
H	4924.00	72.92	-19.75	53.17	74.00	-20.83	PK
H	4924.00	62.99	-19.75	43.24	54.00	-10.76	AV
H	7386.00	66.41	-13.72	52.69	74.00	-21.31	PK
H	7386.00	59.12	-13.72	45.40	54.00	-8.60	AV

#### Remark:

- 1.Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 802.11g

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	72.44	-19.95	52.49	74.00	-21.51	PK
V	4824.00	63.43	-19.95	43.48	54.00	-10.52	AV
V	7236.00	62.75	-14.14	48.61	74.00	-25.39	PK
V	7236.00	52.56	-14.14	38.42	54.00	-15.58	AV
H	4824.00	70.23	-19.95	50.28	74.00	-23.72	PK
H	4824.00	59.61	-19.95	39.66	54.00	-14.34	AV
H	7236.00	60.33	-14.14	46.19	74.00	-27.81	PK
H	7236.00	51.95	-14.14	37.81	54.00	-16.19	AV
Middle channel:2437MHz							
V	4874.00	69.01	-19.85	49.16	74.00	-24.84	PK
V	4874.00	61.76	-19.85	41.91	54.00	-12.09	AV
V	7311.00	60.00	-13.93	46.07	74.00	-27.93	PK
V	7311.00	50.23	-13.93	36.30	54.00	-17.70	AV
H	4874.00	67.74	-19.85	47.89	74.00	-26.11	PK
H	4874.00	56.85	-19.85	37.00	54.00	-17.00	AV
H	7311.00	57.65	-13.93	43.72	74.00	-30.28	PK
H	7311.00	48.88	-13.93	34.95	54.00	-19.05	AV
High channel:2462MHz							
V	4924.00	71.85	-19.75	52.10	74.00	-21.90	PK
V	4924.00	63.01	-19.75	43.26	54.00	-10.74	AV
V	7386.00	65.63	-13.72	51.91	74.00	-22.09	PK
V	7386.00	56.45	-13.72	42.73	54.00	-11.27	AV
H	4924.00	69.58	-19.75	49.83	74.00	-24.17	PK
H	4924.00	60.20	-19.75	40.45	54.00	-13.55	AV
H	7386.00	63.87	-13.72	50.15	74.00	-23.85	PK
H	7386.00	54.97	-13.72	41.25	54.00	-12.75	AV

## Remark:

1.Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 802.11n20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	70.34	-19.95	50.39	74.00	-23.61	PK
V	4824.00	61.32	-19.95	41.37	54.00	-12.63	AV
V	7236.00	62.24	-14.14	48.10	74.00	-25.90	PK
V	7236.00	51.35	-14.14	37.21	54.00	-16.79	AV
H	4824.00	68.97	-19.95	49.02	74.00	-24.98	PK
H	4824.00	58.77	-19.95	38.82	54.00	-15.18	AV
H	7236.00	60.10	-14.14	45.96	74.00	-28.04	PK
H	7236.00	51.17	-14.14	37.03	54.00	-16.97	AV
Middle channel:2437MHz							
V	4874.00	68.65	-19.85	48.80	74.00	-25.20	PK
V	4874.00	61.51	-19.85	41.66	54.00	-12.34	AV
V	7311.00	58.92	-13.93	44.99	74.00	-29.01	PK
V	7311.00	48.97	-13.93	35.04	54.00	-18.96	AV
H	4874.00	66.07	-19.85	46.22	74.00	-27.78	PK
H	4874.00	56.54	-19.85	36.69	54.00	-17.31	AV
H	7311.00	57.74	-13.93	43.81	74.00	-30.19	PK
H	7311.00	49.61	-13.93	35.68	54.00	-18.32	AV
High channel:2462MHz							
V	4924.00	71.33	-19.75	51.58	74.00	-22.42	PK
V	4924.00	63.00	-19.75	43.25	54.00	-10.75	AV
V	7386.00	63.36	-13.72	49.64	74.00	-24.36	PK
V	7386.00	54.26	-13.72	40.54	54.00	-13.46	AV
H	4924.00	68.44	-19.75	48.69	74.00	-25.31	PK
H	4924.00	59.41	-19.75	39.66	54.00	-14.34	AV
H	7386.00	61.77	-13.72	48.05	74.00	-25.95	PK
H	7386.00	53.66	-13.72	39.94	54.00	-14.06	AV

## Remark:

1.Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 802.11n40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low channel:2422MHz</b>							
V	4844.00	72.86	-19.91	52.95	74.00	-21.05	PK
V	4844.00	63.24	-19.91	43.33	54.00	-10.67	AV
V	7266.00	62.72	-14.06	48.66	74.00	-25.34	PK
V	7266.00	51.88	-14.06	37.82	54.00	-16.18	AV
H	4844.00	70.69	-19.91	50.78	74.00	-23.22	PK
H	4844.00	60.71	-19.91	40.80	54.00	-13.20	AV
H	7266.00	60.31	-14.06	46.25	74.00	-27.75	PK
H	7266.00	51.85	-14.06	37.79	54.00	-16.21	AV
<b>Middle channel:2437MHz</b>							
V	4874.00	70.86	-19.85	51.01	74.00	-22.99	PK
V	4874.00	64.22	-19.85	44.37	54.00	-9.63	AV
V	7311.00	60.65	-13.93	46.72	74.00	-27.28	PK
V	7311.00	51.18	-13.93	37.25	54.00	-16.75	AV
H	4874.00	67.18	-19.85	47.33	74.00	-26.67	PK
H	4874.00	57.06	-19.85	37.21	54.00	-16.79	AV
H	7311.00	59.61	-13.93	45.68	74.00	-28.32	PK
H	7311.00	51.63	-13.93	37.70	54.00	-16.30	AV
<b>High channel:2452MHz</b>							
V	4904.00	73.72	-19.79	53.93	74.00	-20.07	PK
V	4904.00	63.11	-19.79	43.32	54.00	-10.68	AV
V	7356.00	66.38	-13.80	52.58	74.00	-21.42	PK
V	7356.00	56.21	-13.80	42.41	54.00	-11.59	AV
H	4904.00	72.25	-19.79	52.46	74.00	-21.54	PK
H	4904.00	62.11	-19.79	42.32	54.00	-11.68	AV
H	7356.00	63.65	-13.80	49.85	74.00	-24.15	PK
H	7356.00	55.03	-13.80	41.23	54.00	-12.77	AV

## Remark:

1.Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit


2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 8. Radiated Band Emission Measurement and Restricted Bands Of Operation

### 8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

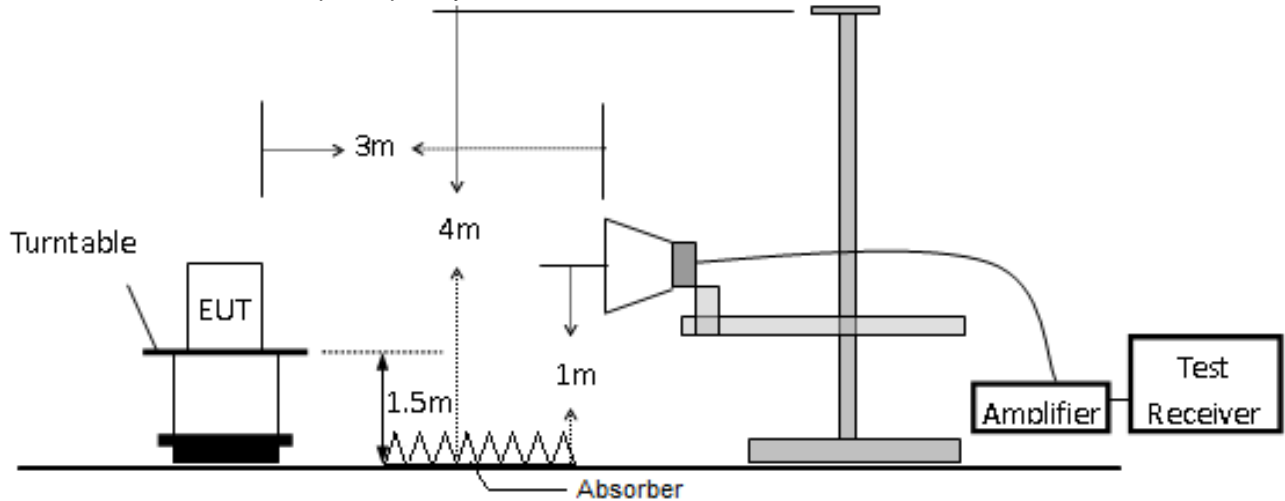

### 8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

#### Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

#### Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3)Emission level (dBuV/m)=20log Emission level (uV/m).

### 8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

#### Above 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

#### Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 8.5 Test Result

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11b	Low Channel 2412MHz							
	H	2390.00	73.20	-25.43	47.77	74.00	54.00	PASS
	H	2400.00	74.23	-25.40	48.83	74.00	54.00	PASS
	V	2390.00	73.04	-25.43	47.61	74.00	54.00	PASS
	V	2400.00	73.41	-25.40	48.01	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	71.78	-25.15	46.63	74.00	54.00	PASS
	H	2500.00	68.64	-25.10	43.54	74.00	54.00	PASS
	V	2483.50	72.85	-25.15	47.70	74.00	54.00	PASS
	V	2500.00	68.32	-25.10	43.22	74.00	54.00	PASS
802.11g	Low Channel 2412MHz							
	H	2390.00	73.94	-25.43	48.51	74.00	54.00	PASS
	H	2400.00	76.54	-25.40	51.14	74.00	54.00	PASS
	V	2390.00	73.78	-25.43	48.35	74.00	54.00	PASS
	V	2400.00	73.61	-25.40	48.21	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	74.25	-25.15	49.10	74.00	54.00	PASS
	H	2500.00	70.31	-25.10	45.21	74.00	54.00	PASS
	V	2483.50	72.72	-25.15	47.57	74.00	54.00	PASS
	V	2500.00	68.04	-25.10	42.94	74.00	54.00	PASS
Remark:								
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit								
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.								
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB								
4.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								

STING  
ED

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11n20	Low Channel 2412MHz							
	H	2390.00	73.18	-25.43	47.75	74.00	54.00	PASS
	H	2400.00	75.59	-25.40	50.19	74.00	54.00	PASS
	V	2390.00	72.43	-25.43	47.00	74.00	54.00	PASS
	V	2400.00	72.37	-25.40	46.97	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	72.45	-25.15	47.30	74.00	54.00	PASS
	H	2500.00	68.51	-25.10	43.41	74.00	54.00	PASS
	V	2483.50	71.07	-25.15	45.92	74.00	54.00	PASS
	V	2500.00	67.15	-25.10	42.05	74.00	54.00	PASS
802.11n40	Low Channel 2422MHz							
	H	2390.00	72.67	-25.43	47.24	74.00	54.00	PASS
	H	2400.00	74.21	-25.40	48.81	74.00	54.00	PASS
	V	2390.00	73.61	-25.43	48.18	74.00	54.00	PASS
	V	2400.00	73.92	-25.40	48.52	74.00	54.00	PASS
	High Channel 2452MHz							
	H	2483.50	70.84	-25.15	45.69	74.00	54.00	PASS
	H	2500.00	68.57	-25.10	43.47	74.00	54.00	PASS
	V	2483.50	71.66	-25.15	46.51	74.00	54.00	PASS
	V	2500.00	68.18	-25.10	43.08	74.00	54.00	PASS
Remark:								
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit								
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.								
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB								
4.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								

CO.LTD



## 9. Power Spectral Density Test

### 9.1 Block Diagram Of Test Setup



### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Limits Of Radiated Emission Measurement (Above 1000MHz)

### 9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW  $\geq 3 \times$  RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 9.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

## 9.5 Test Result



Temperature:	24℃	Relative Humidity:	50%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz



Test Mode	Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
TX b Mode	2412 MHz	-7.97	8	PASS
	2437 MHz	-8.88	8	PASS
	2462 MHz	-8.27	8	PASS
TX g Mode	2412 MHz	-13.94	8	PASS
	2437 MHz	-14.79	8	PASS
	2462 MHz	-14.34	8	PASS
TX n Mode(20M)	2412 MHz	-13.29	8	PASS
	2437 MHz	-14.87	8	PASS
	2462 MHz	-14.02	8	PASS
TX n Mode(40M)	2422 MHz	-18.91	8	PASS
	2437 MHz	-18.2	8	PASS
	2452 MHz	-17.86	8	PASS











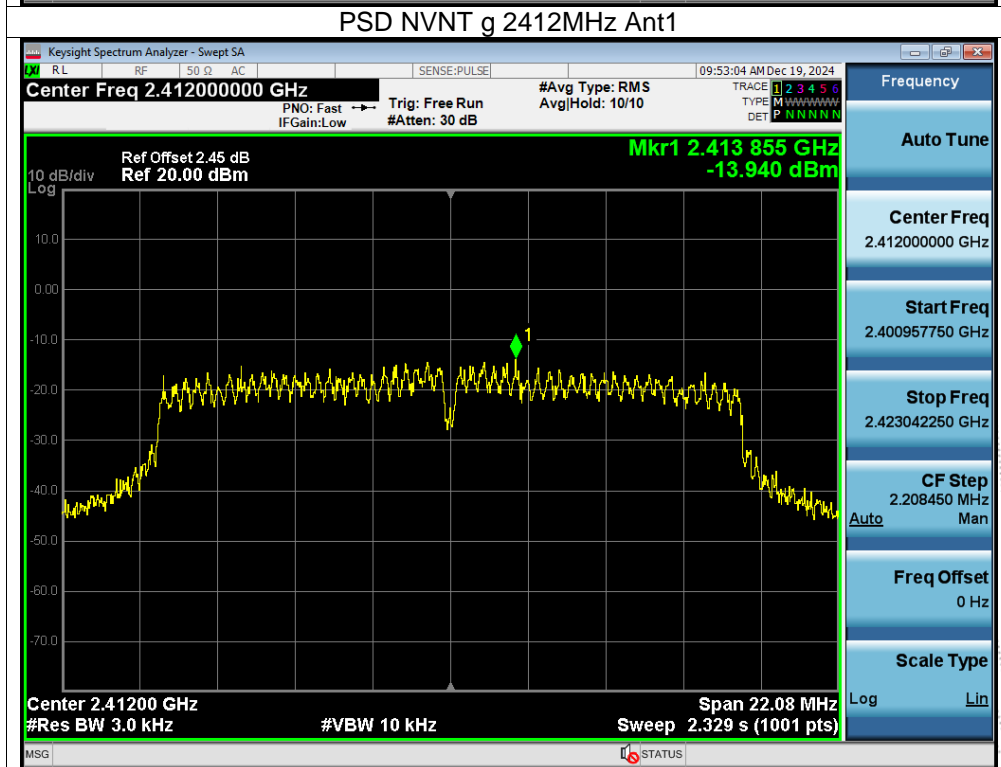
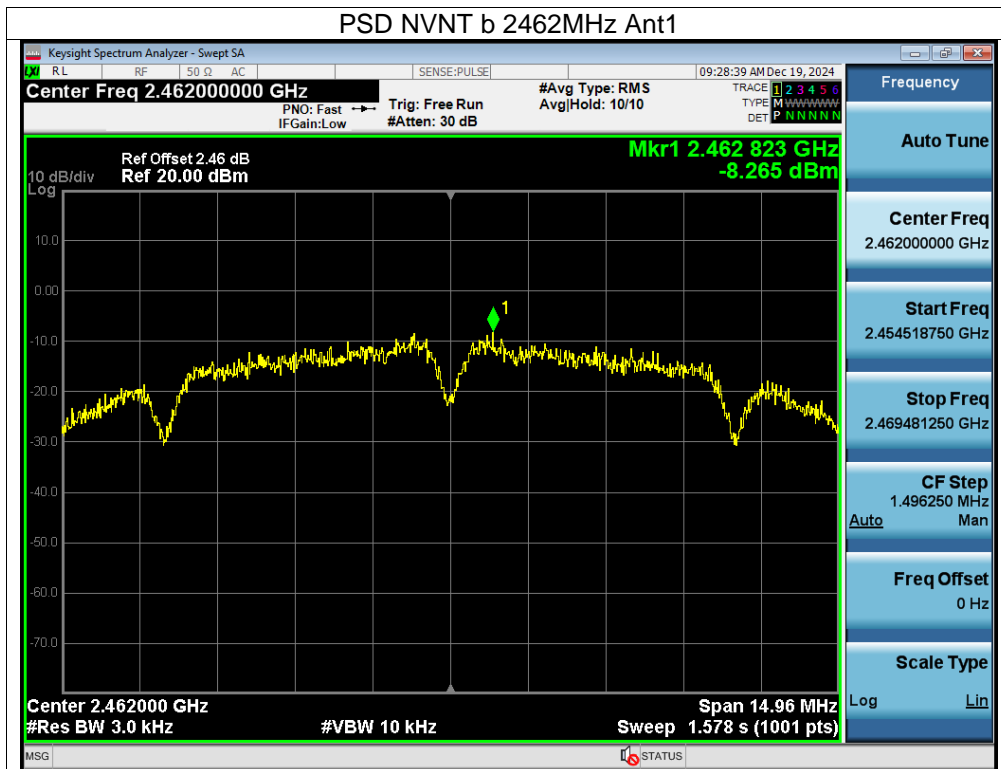


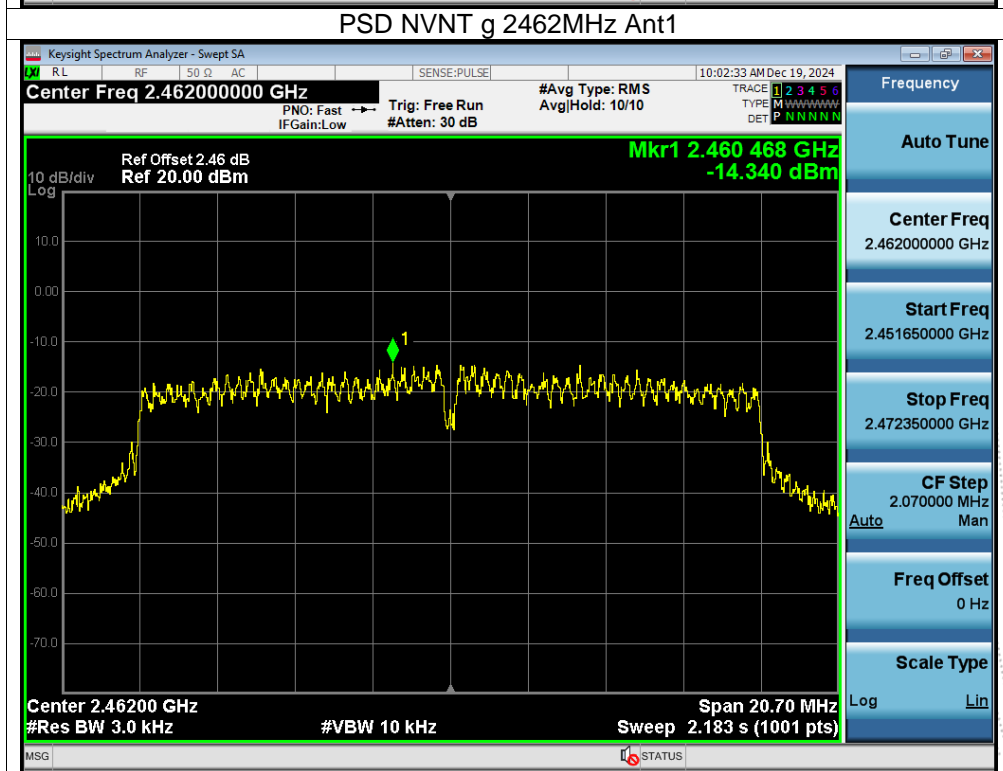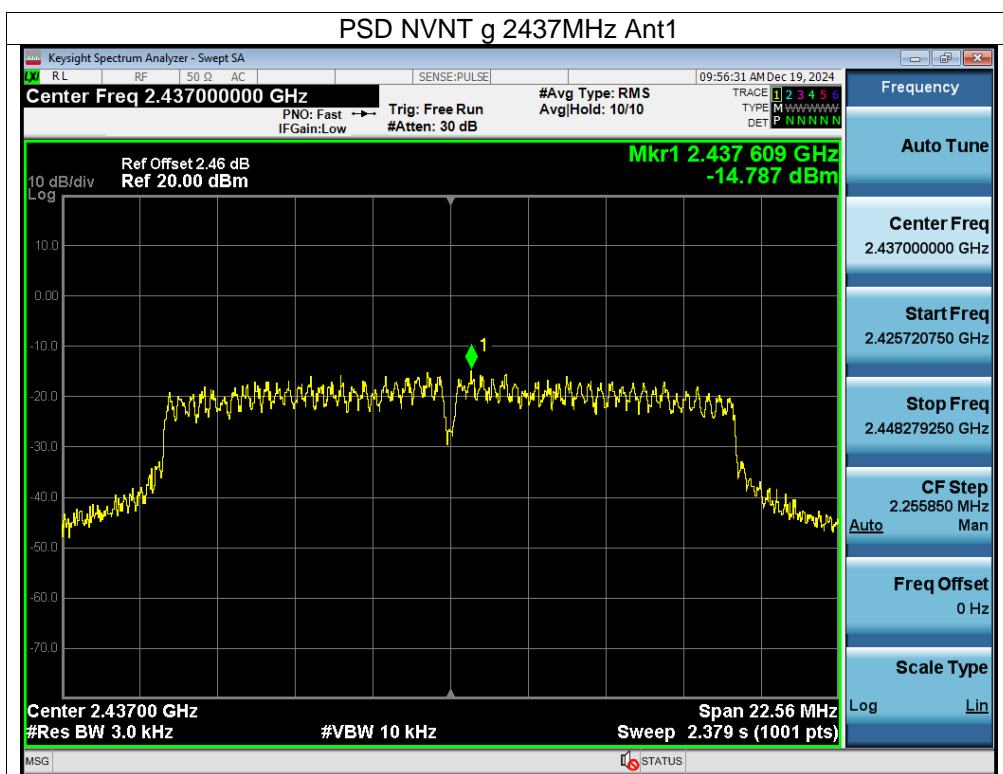

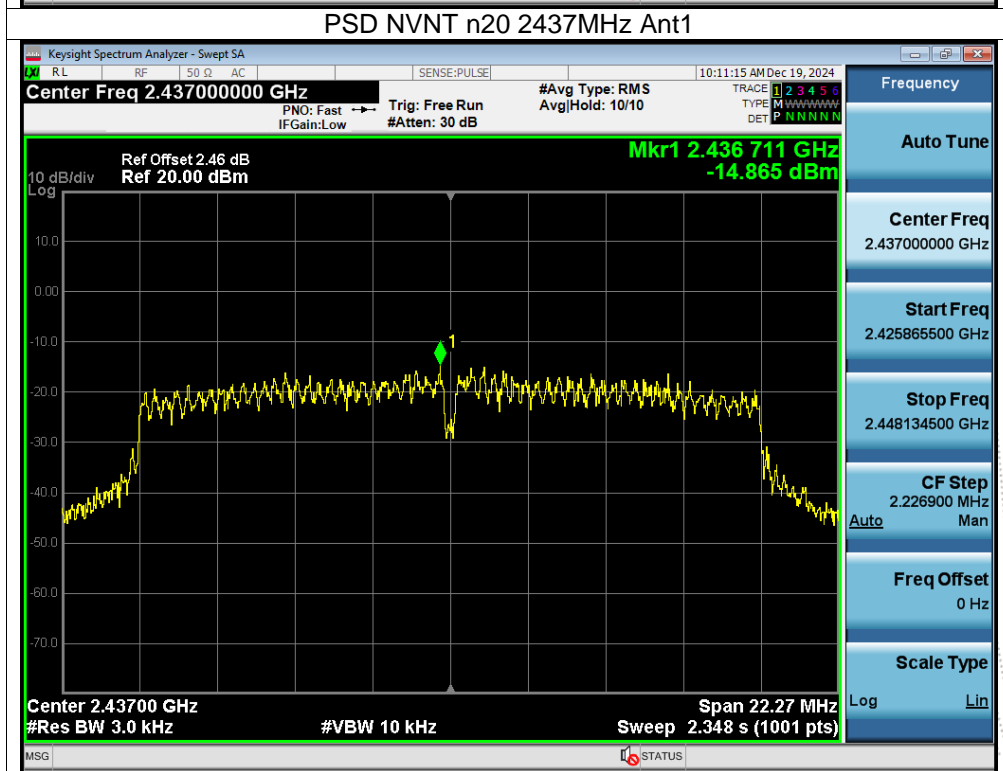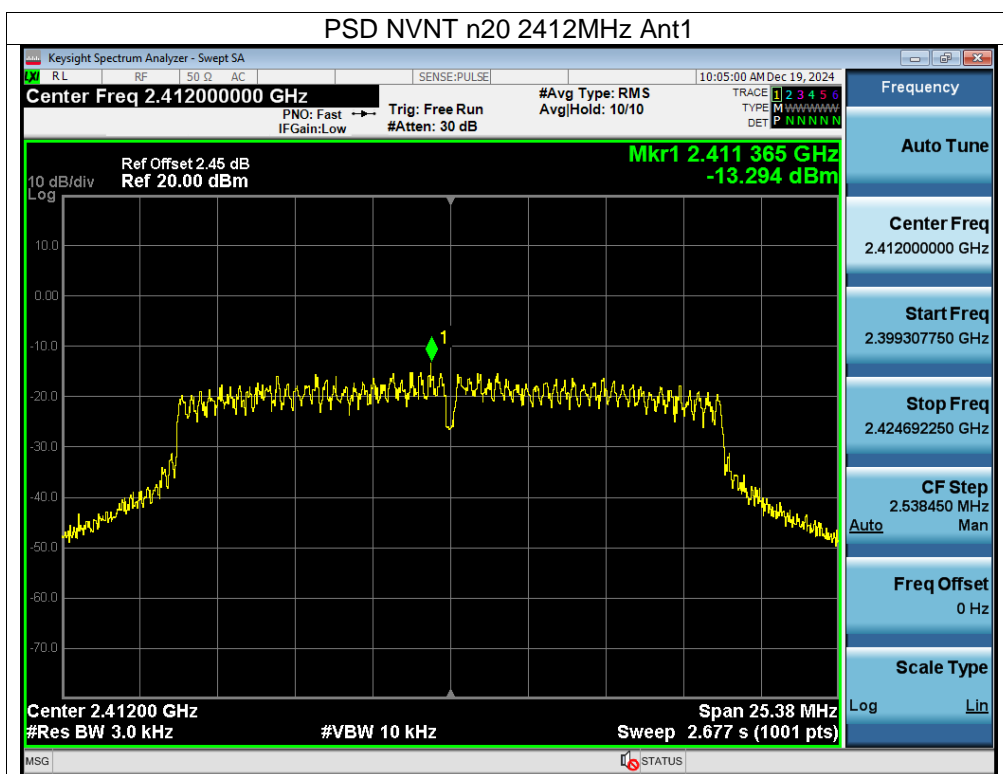


CO. LTD

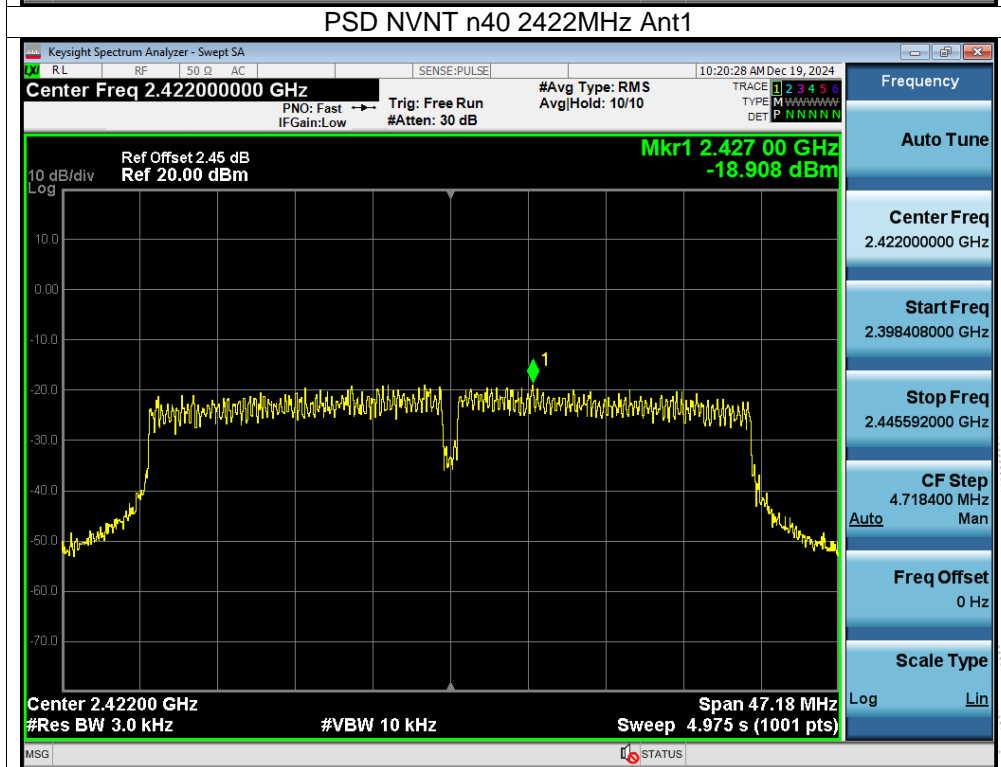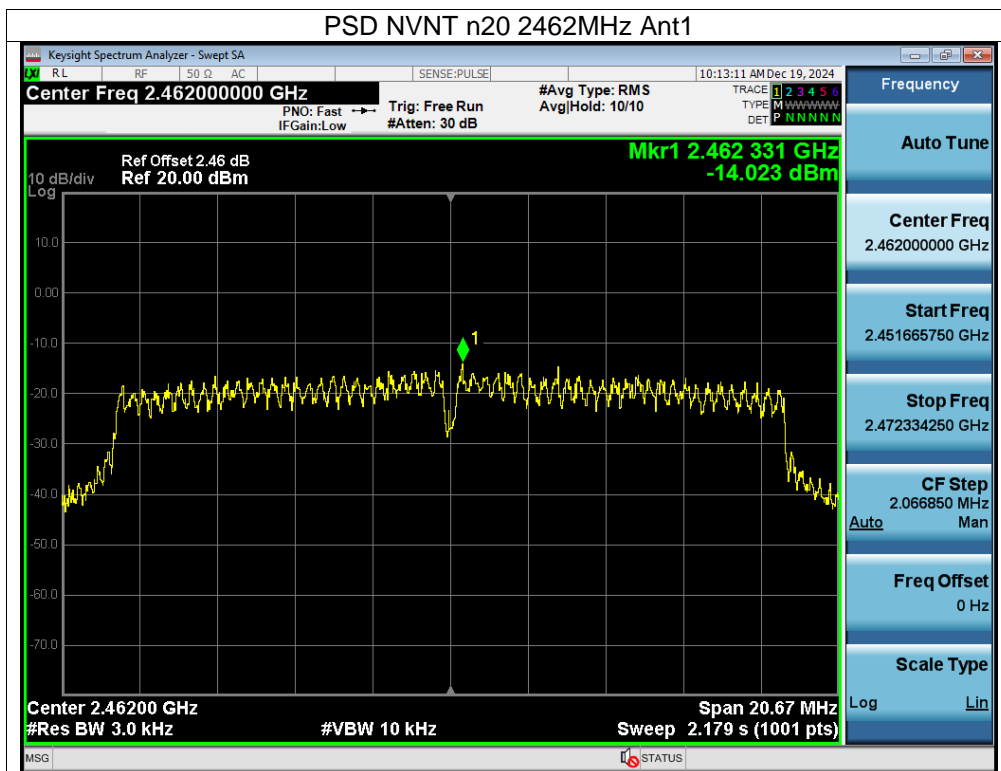

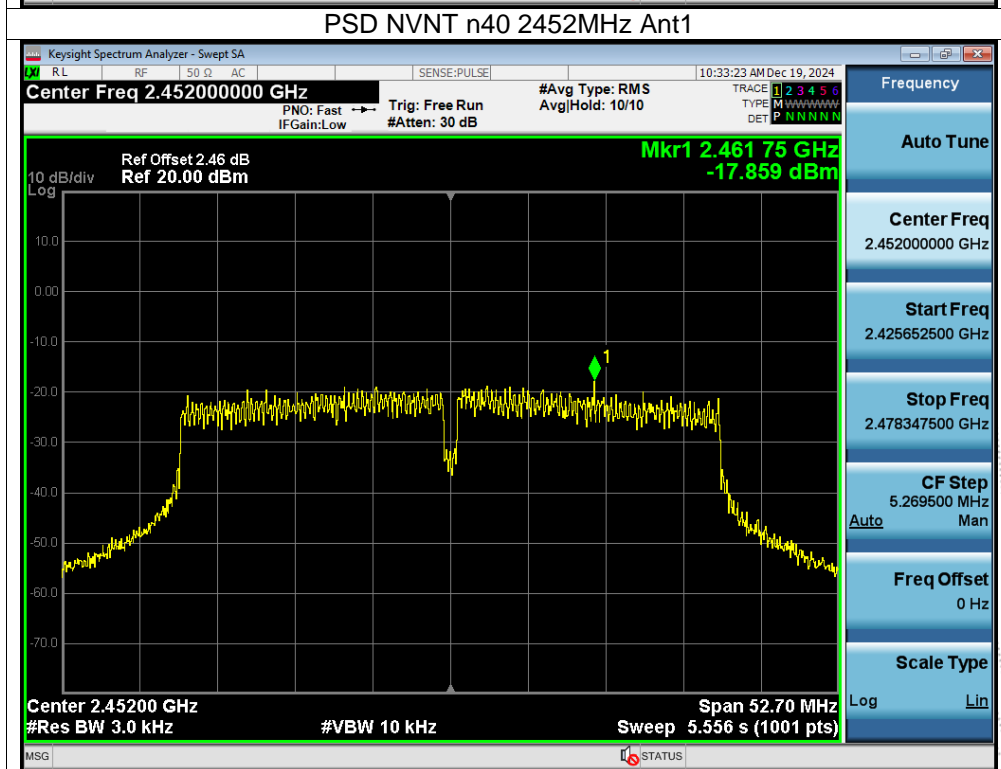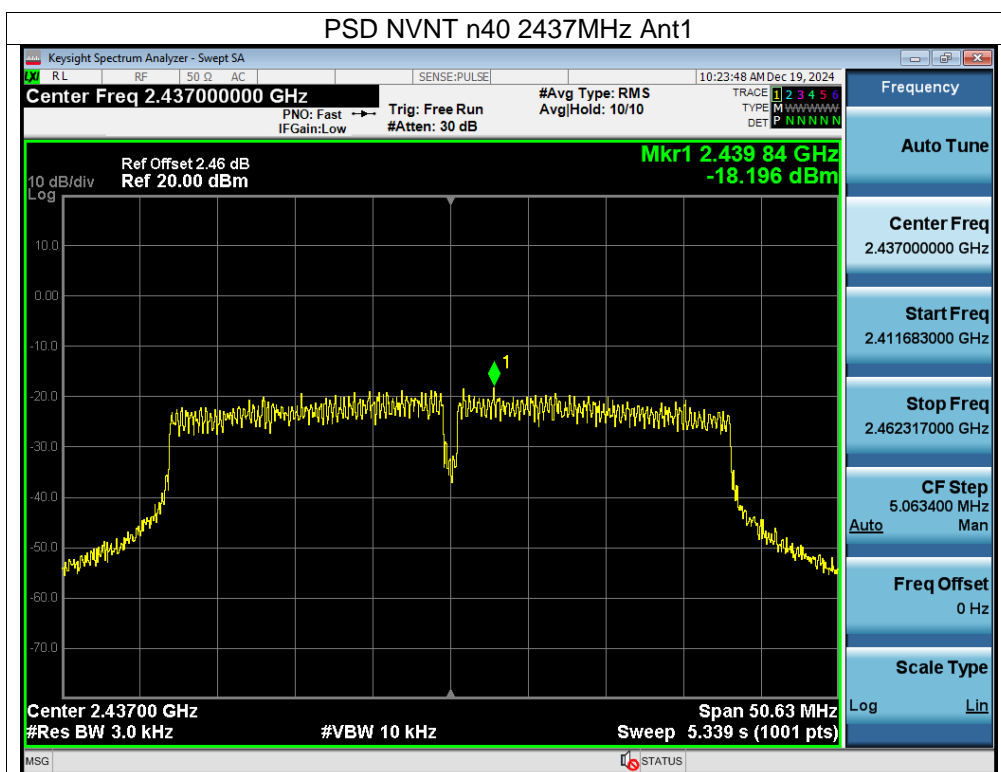

## 10. -6dB Bandwidth Test

### 10.1 Block Diagram Of Test Setup

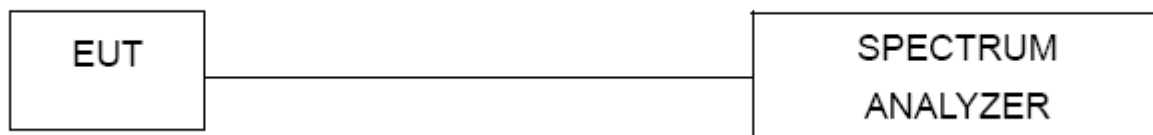

### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (-6dB bandwidth)	2400-2483.5	PASS

### 10.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 10.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

## 10.5 Test Result



Temperature:	24℃	Relative Humidity:	50%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz



Test Mode	Frequency (MHz)	-6dB bandwidth (MHz)	Limit (kHz)	Result
TX b Mode	2412	9.018	500	Pass
	2437	9.073	500	Pass
	2462	9.975	500	Pass
TX g Mode	2412	14.723	500	Pass
	2437	15.039	500	Pass
	2462	13.800	500	Pass
TX n Mode(20M)	2412	16.923	500	Pass
	2437	14.846	500	Pass
	2462	13.779	500	Pass
TX n Mode(40M)	2422	31.456	500	Pass
	2437	33.756	500	Pass
	2452	35.130	500	Pass

TEST  
TO  
OVER  
t See









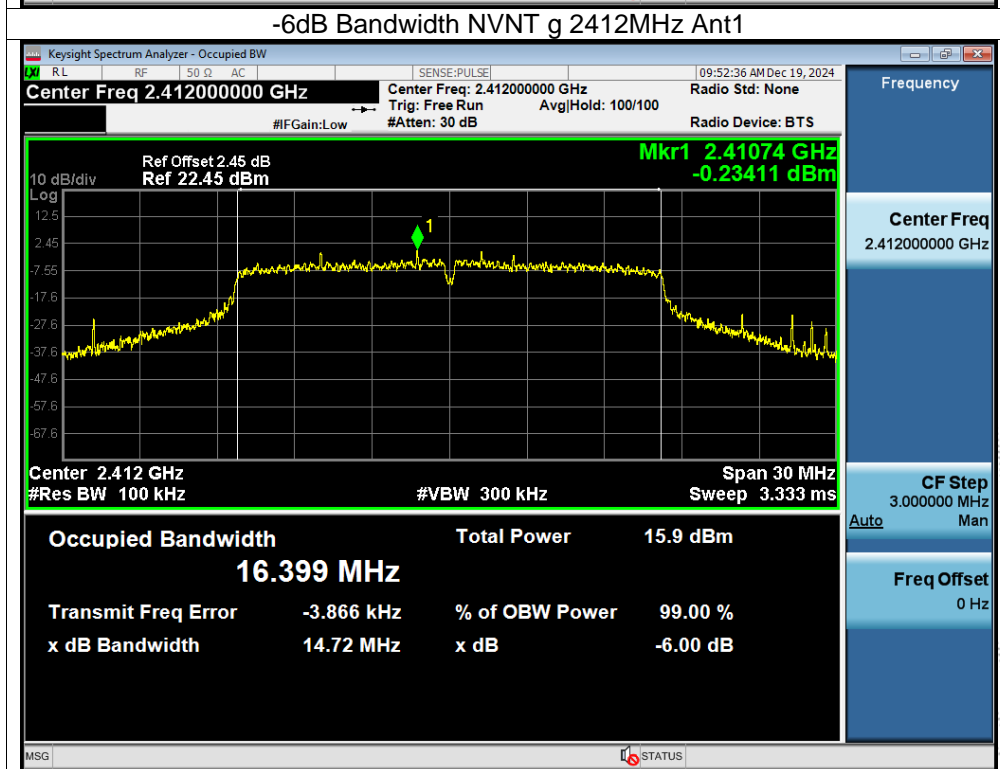
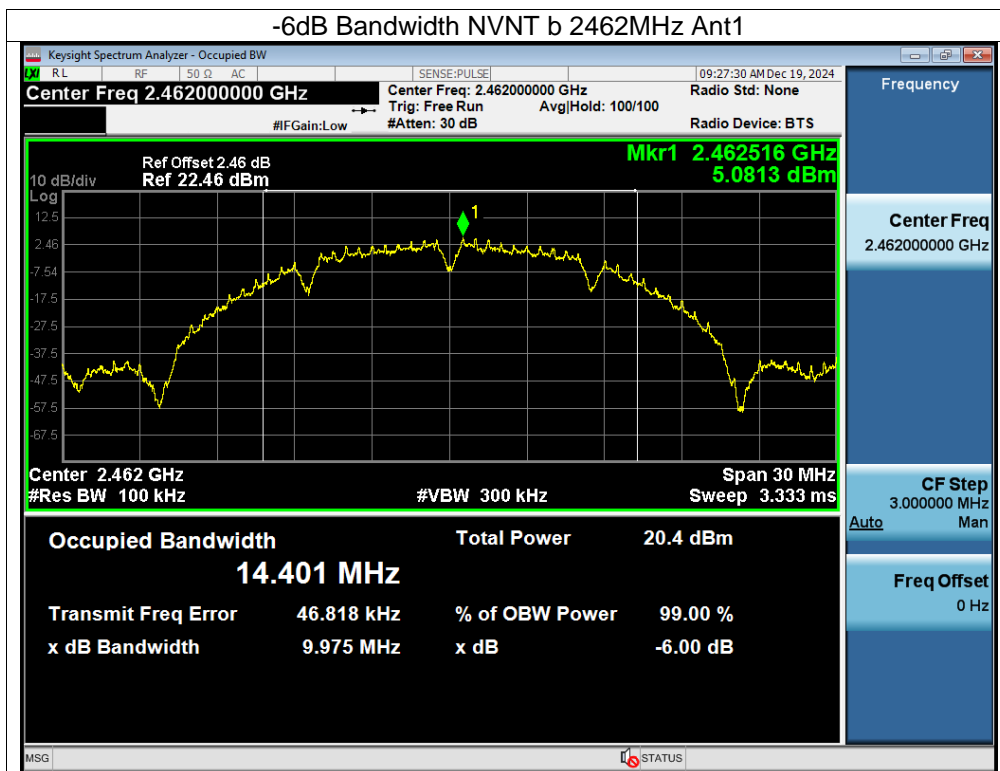


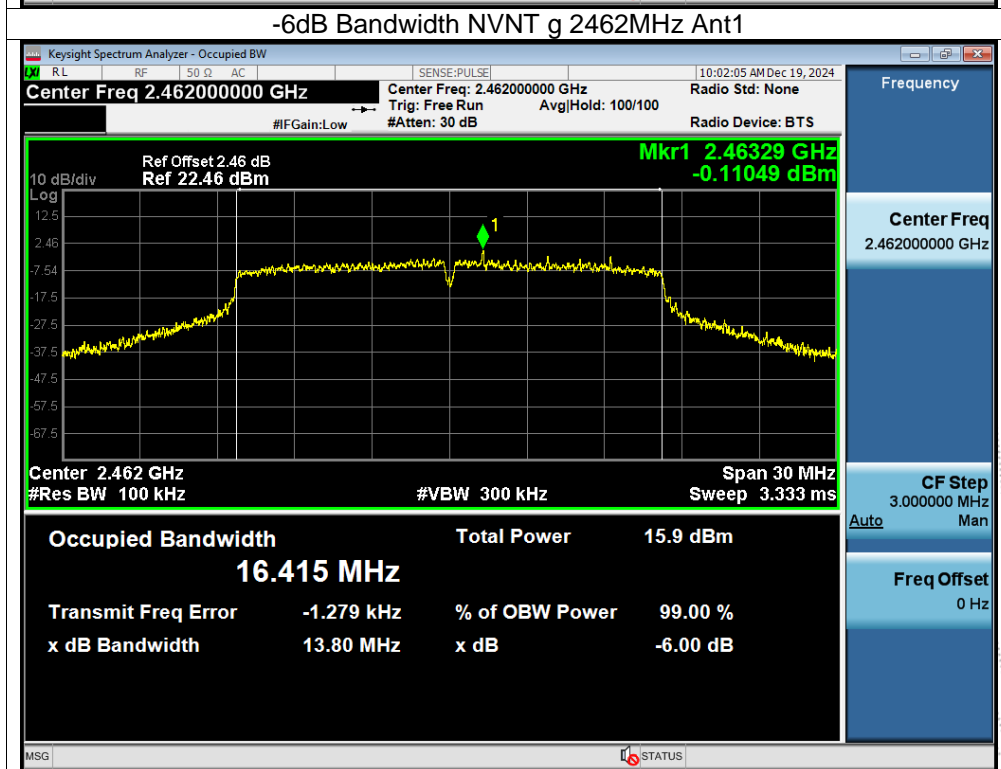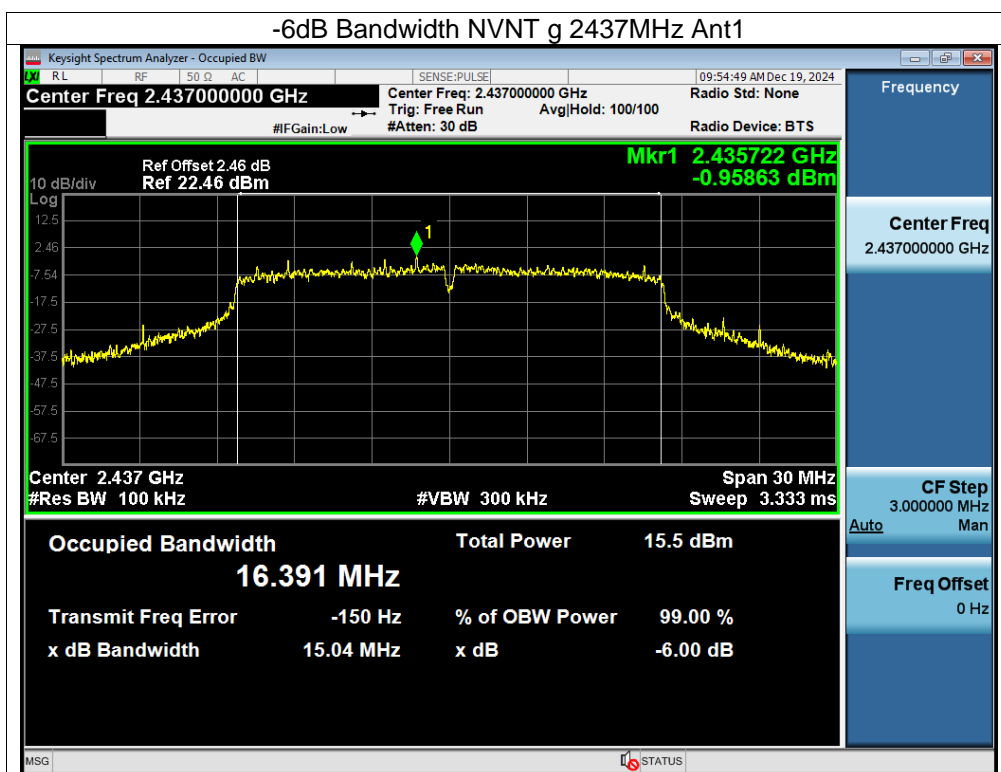

SHENZHEN

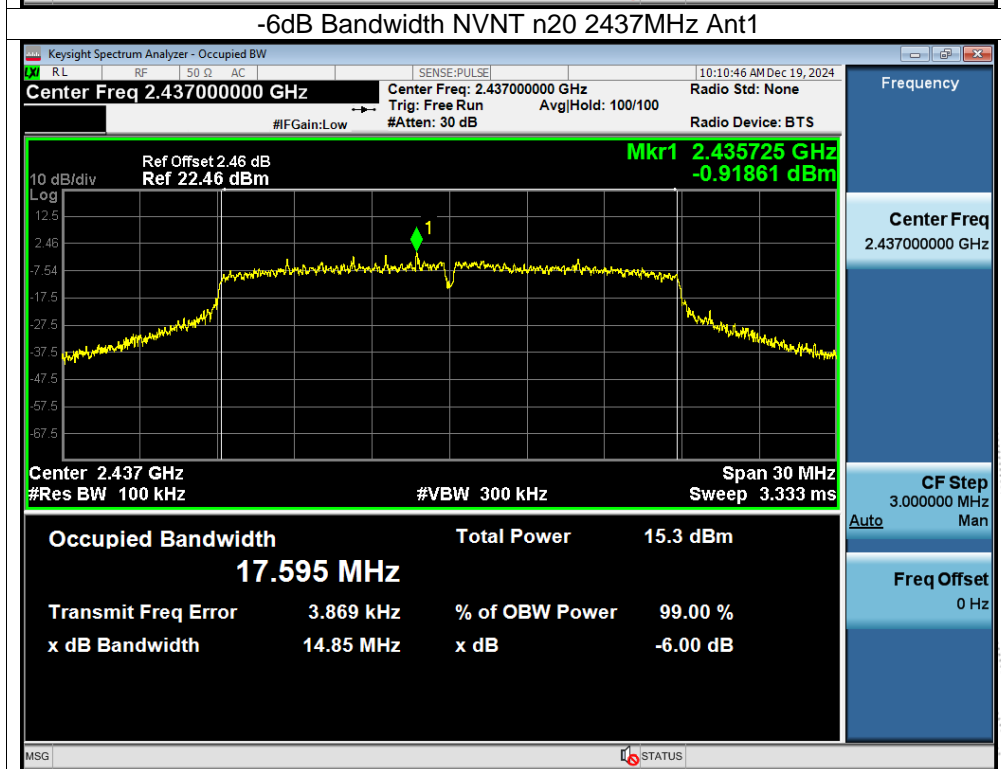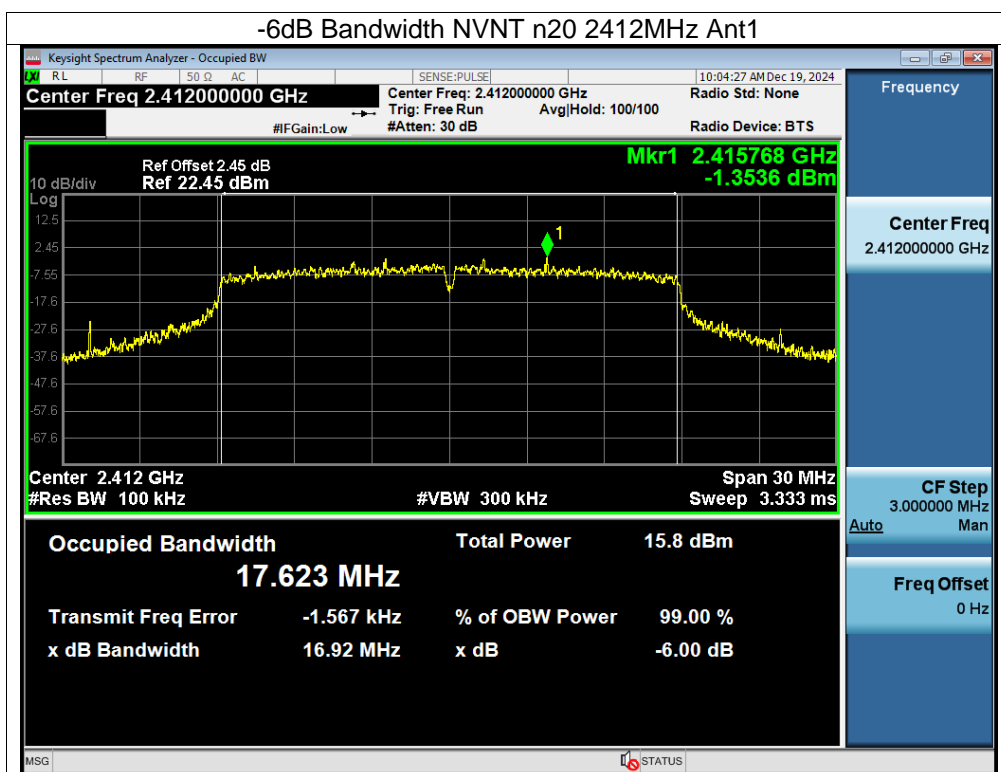

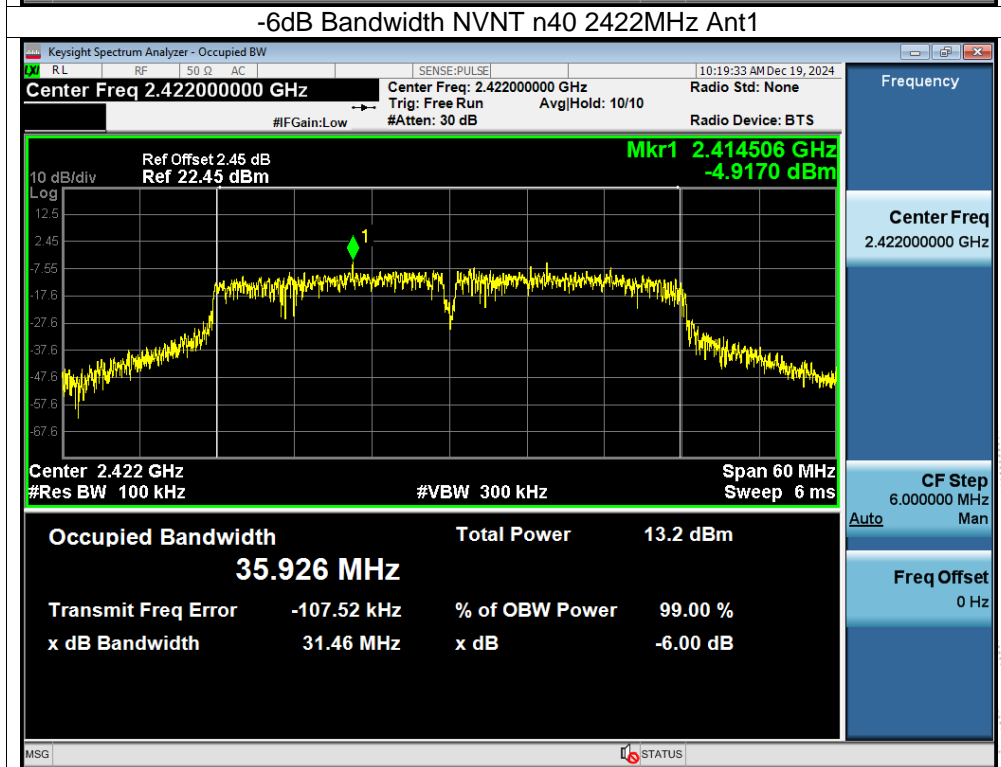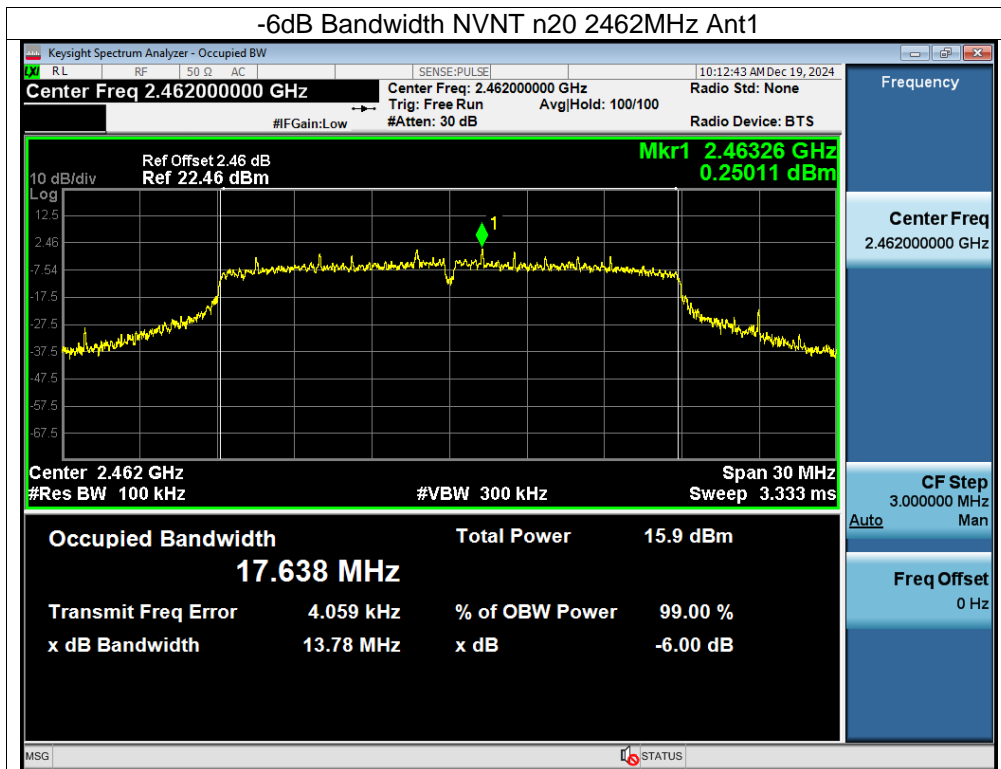

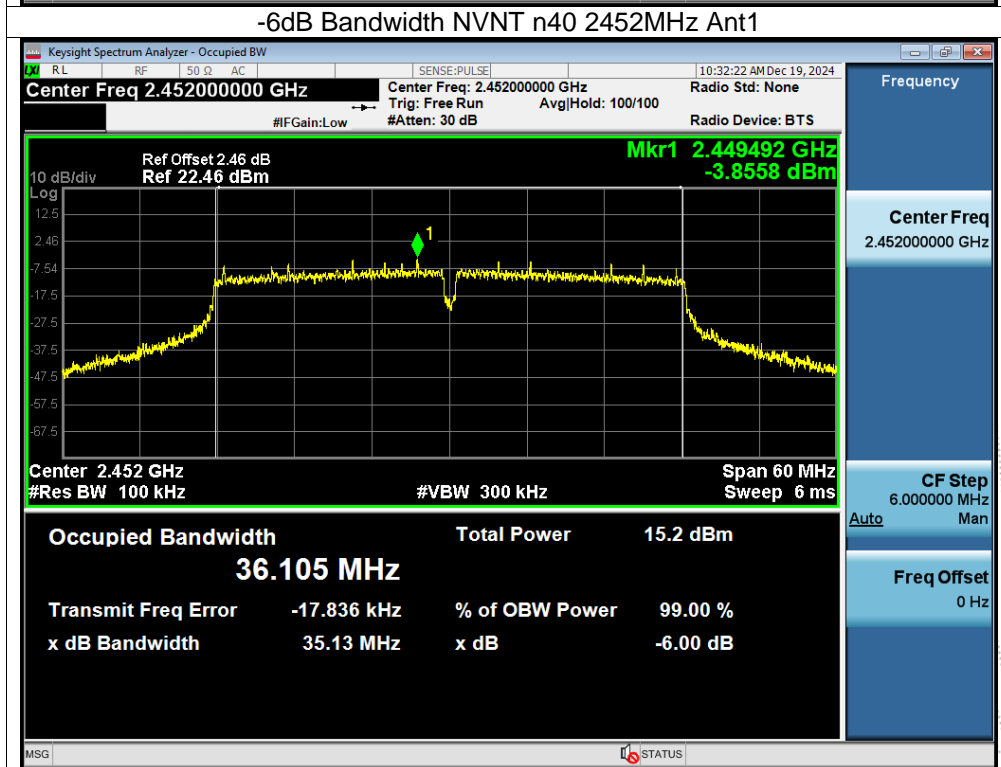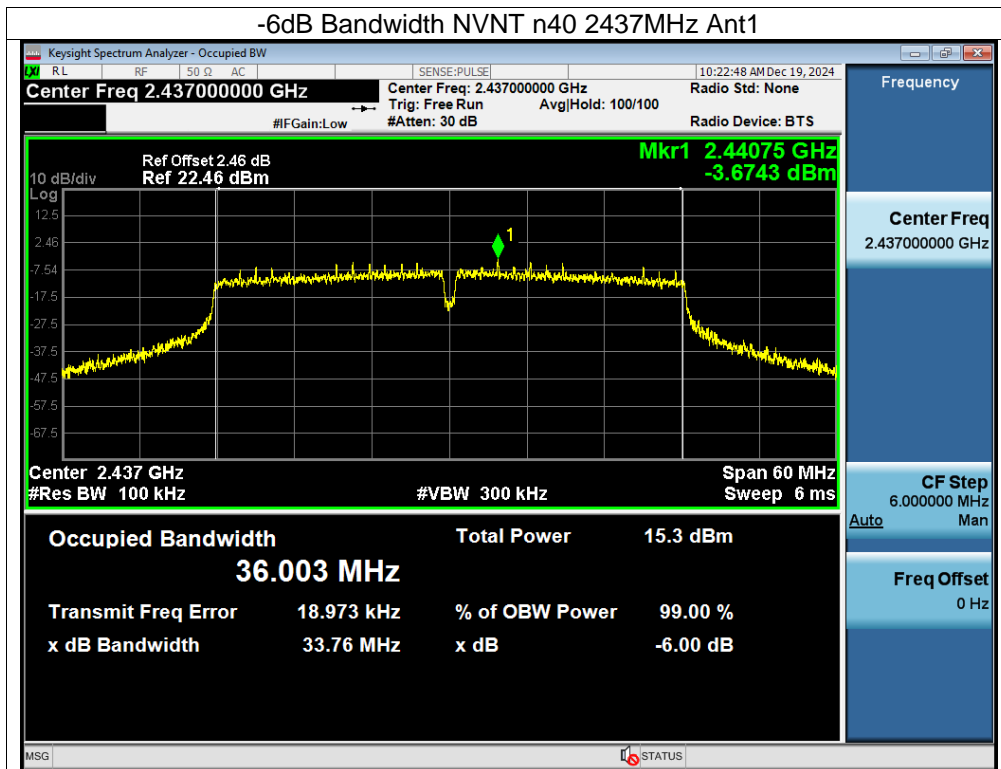

## 11. Peak Output Power Test

### 11.1 Block Diagram Of Test Setup



### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 11.3 Test Procedure

- The EUT was directly connected to the Power meter

### 11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss



## 11.5 Test Result


Temperature:	24℃	Relative Humidity:	50%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz

Test Mode	Frequency(MHz)	Maximum Conducted Output Power(PK) (dBm)	Limit (dBm)
802.11b	2412	15.50	30
	2437	15.37	30
	2462	15.43	30
802.11g	2412	14.86	30
	2437	14.28	30
	2462	14.86	30
802.11n20	2412	14.69	30
	2437	13.97	30
	2462	14.61	30
802.11n40	2422	13.53	30
	2437	13.84	30
	2452	13.76	30

CO., LTD.

## 12. 100 kHz Bandwidth Of Frequency Band Edge

### 12.1 Block Diagram Of Test Setup

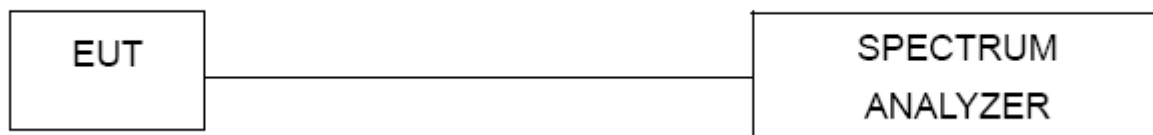

### 12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 12.3 Test Procedure

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize..



### 12.4 EUT Operating Conditions



The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



Note: Power Spectral Density(dBm)=Reading+Cable Loss



## 12.5 Test Result



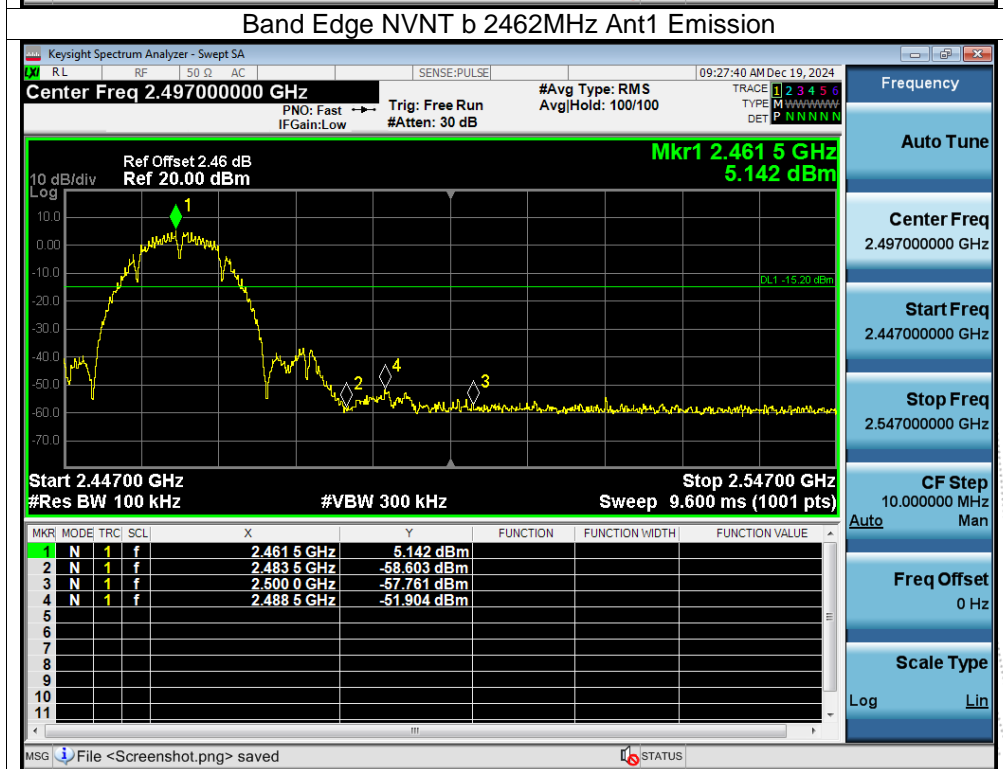
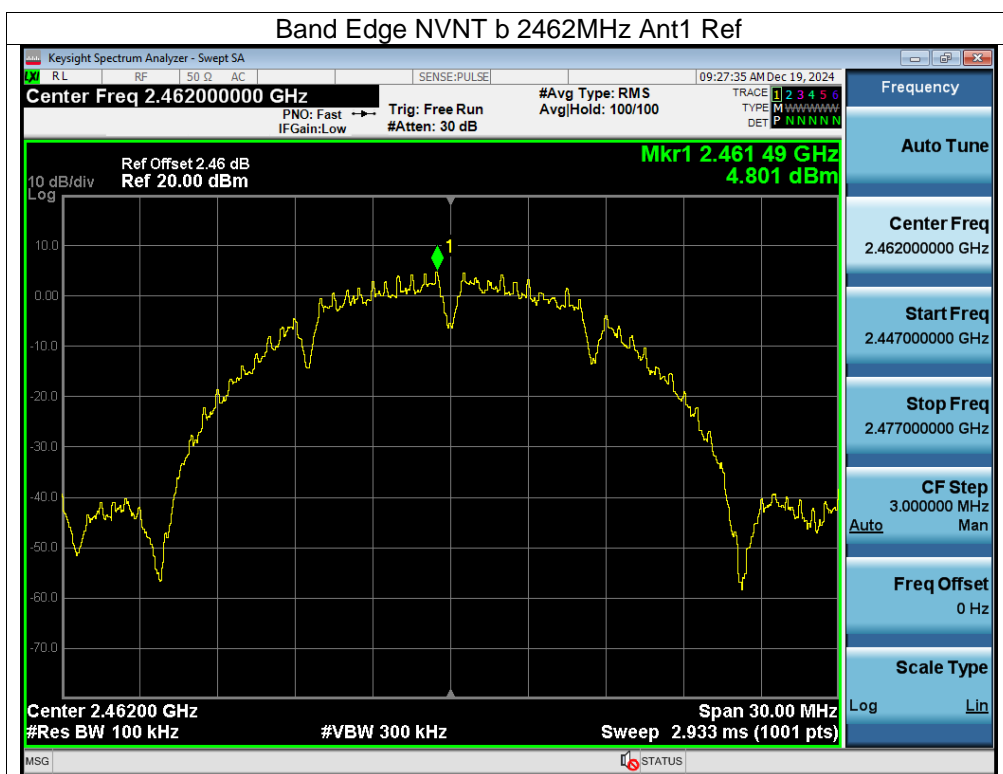


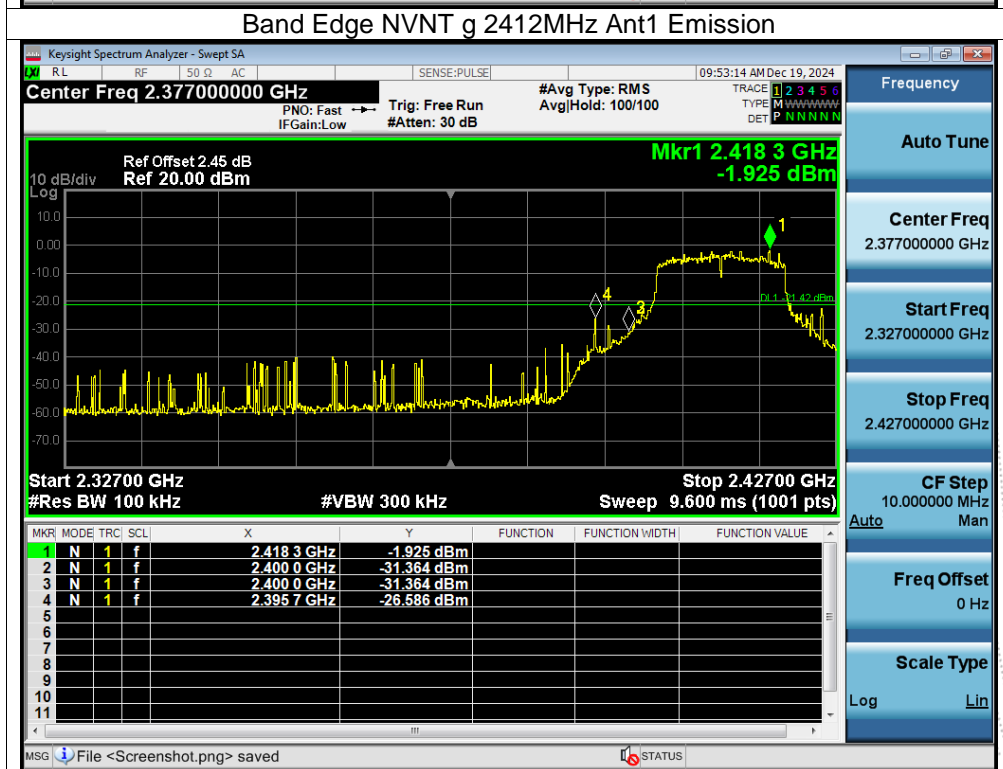
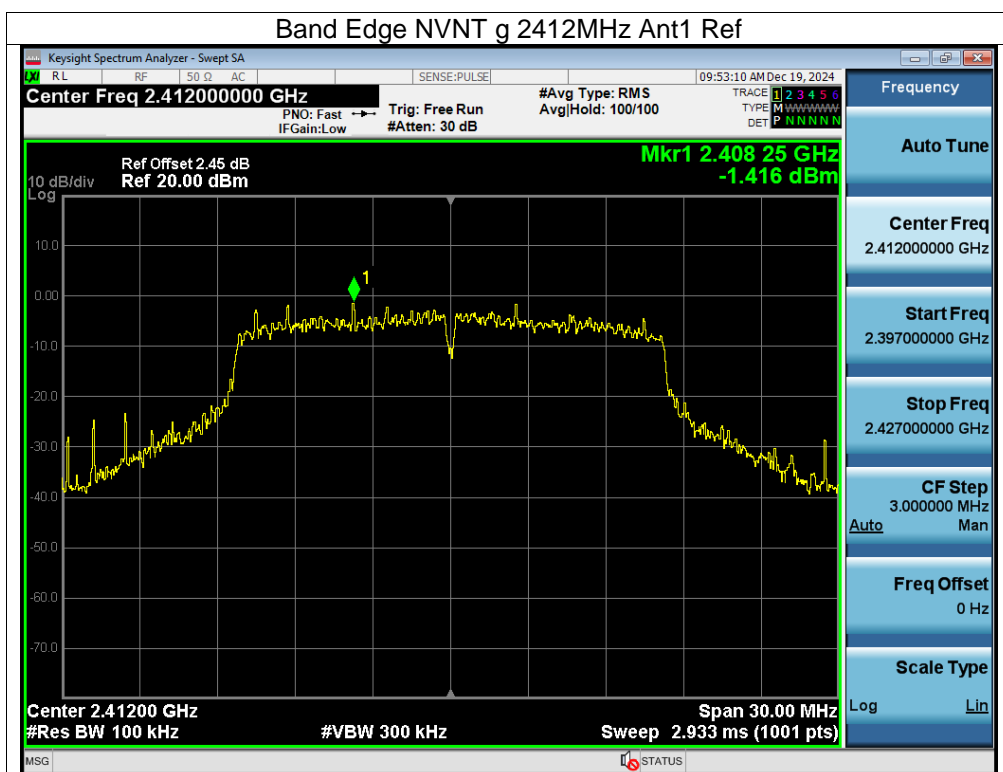


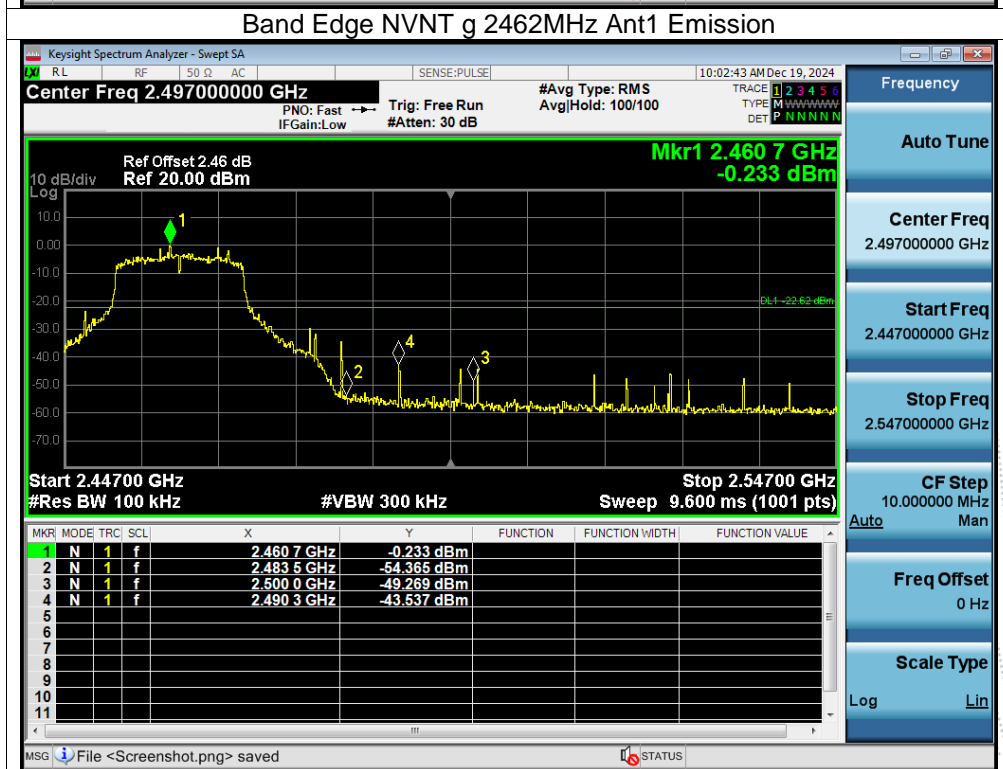
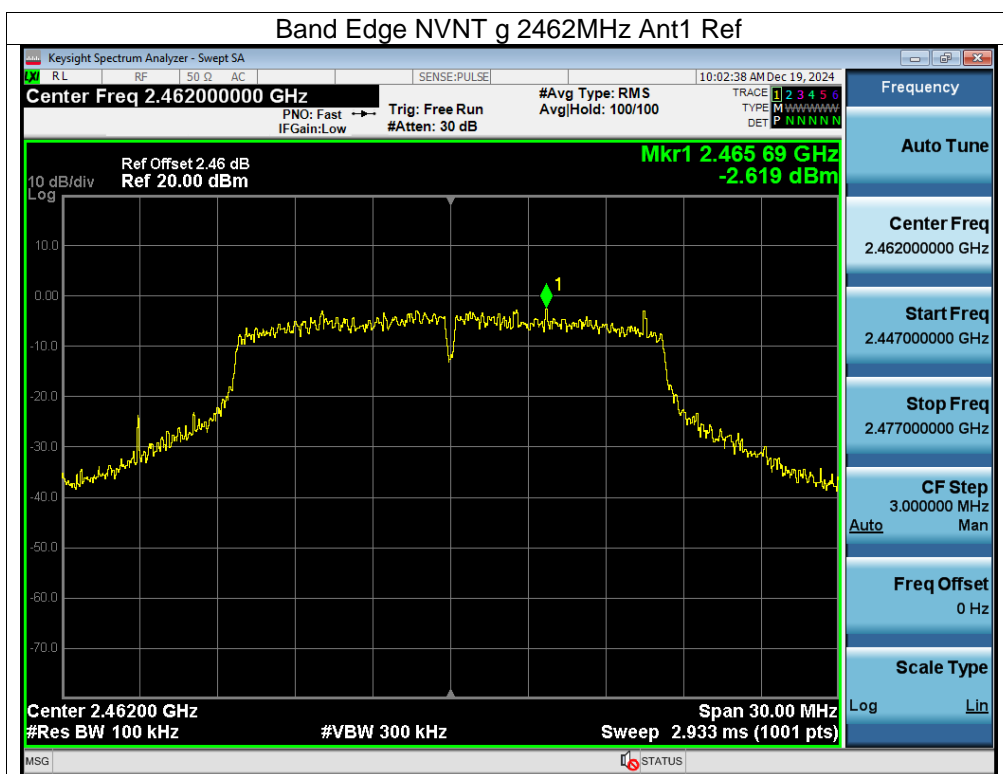


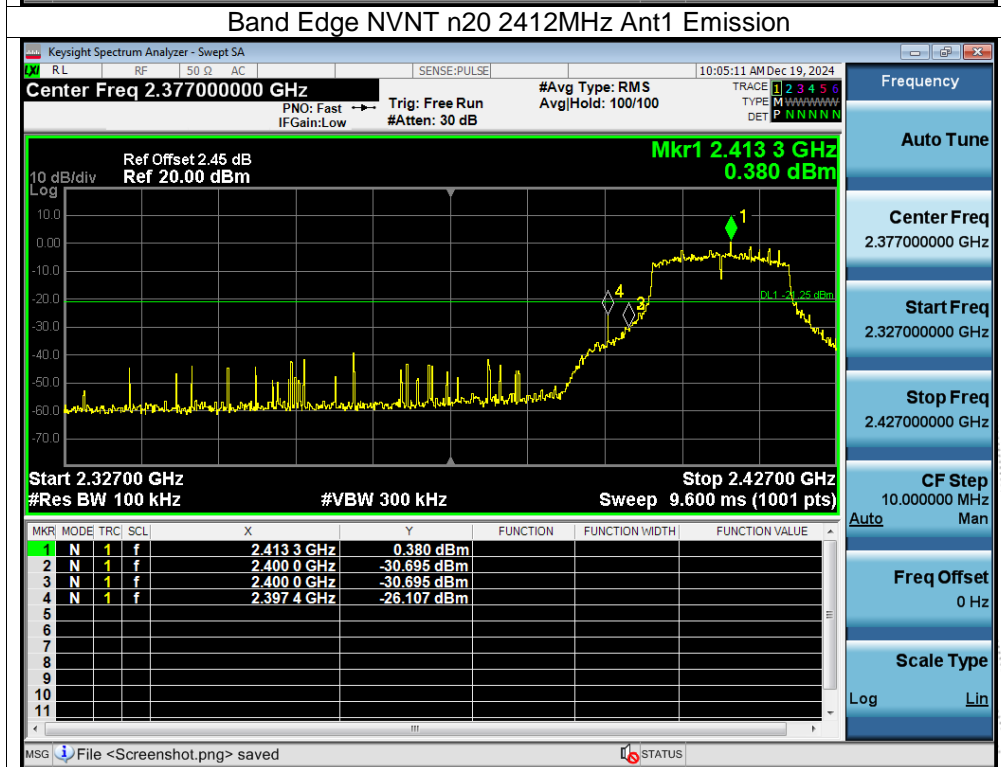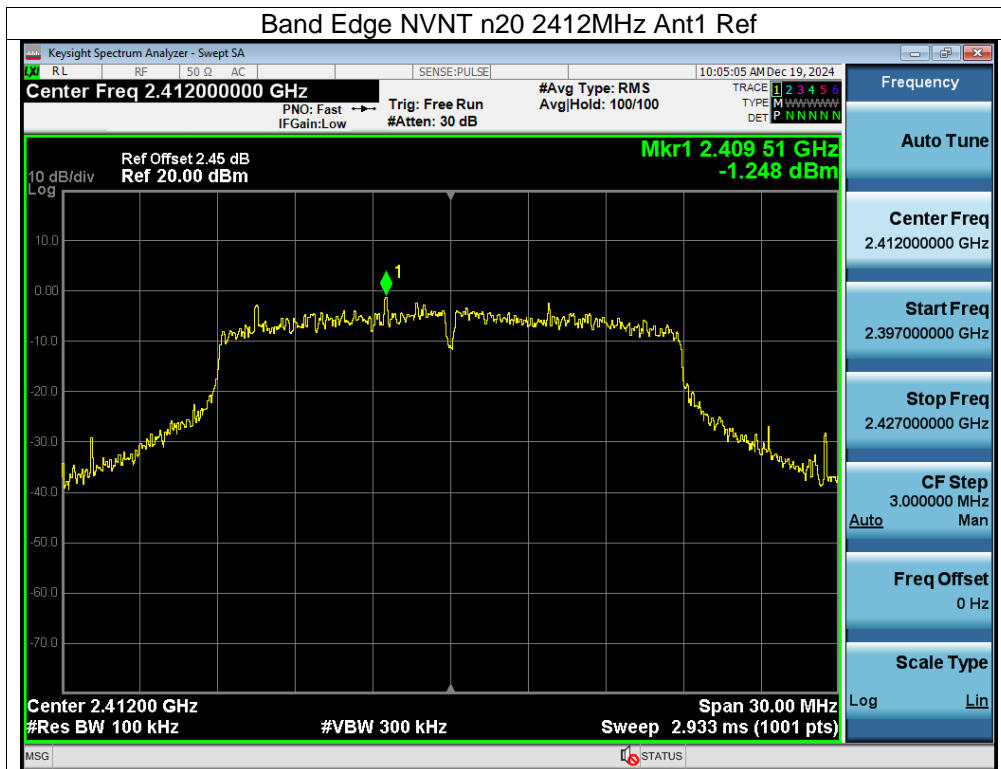






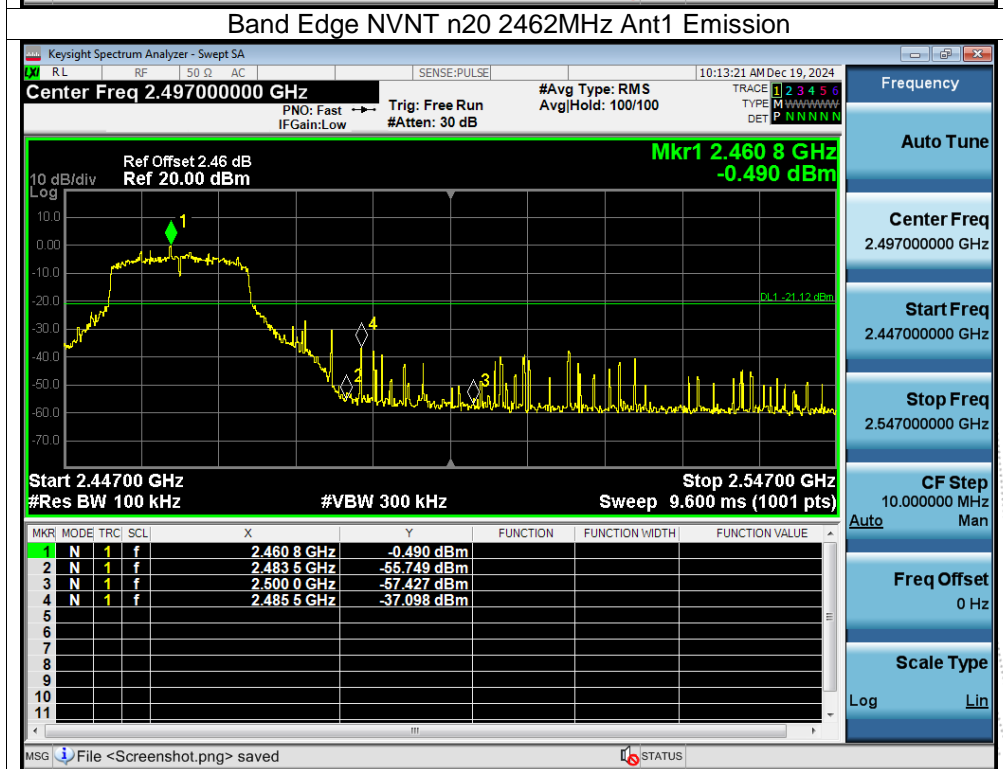
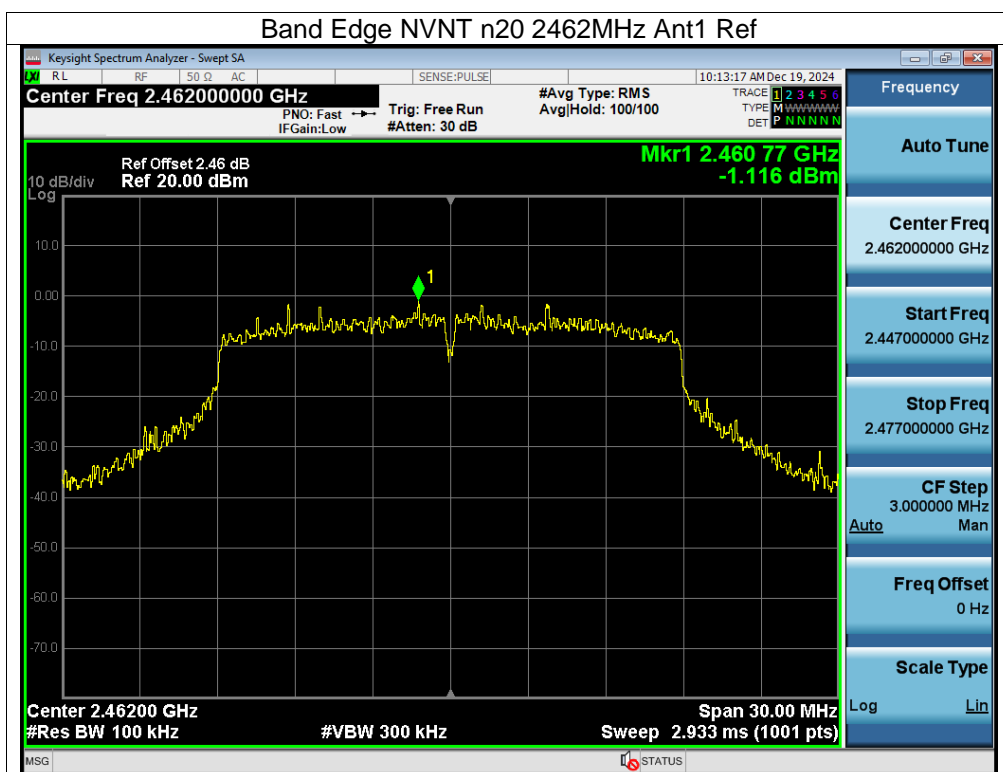


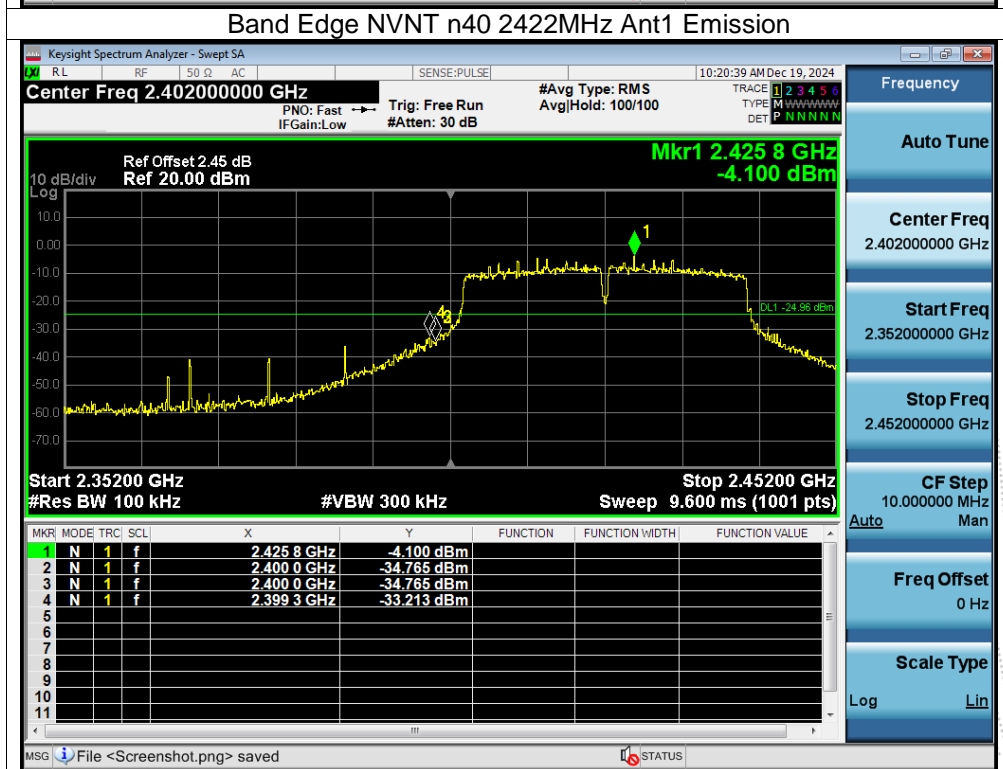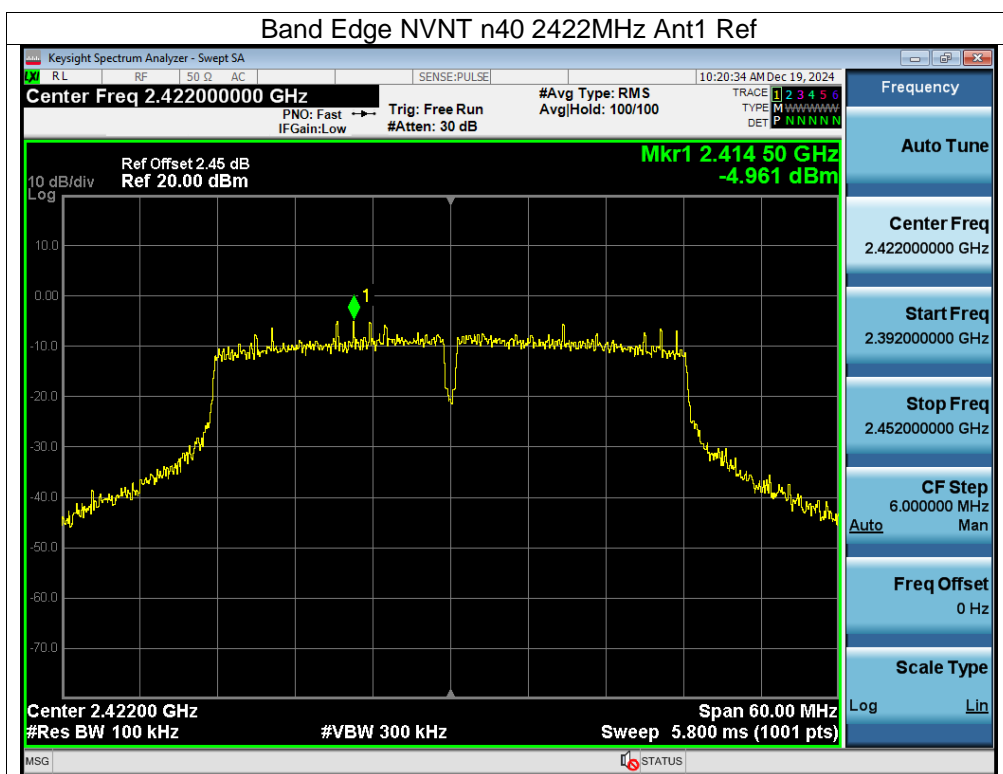

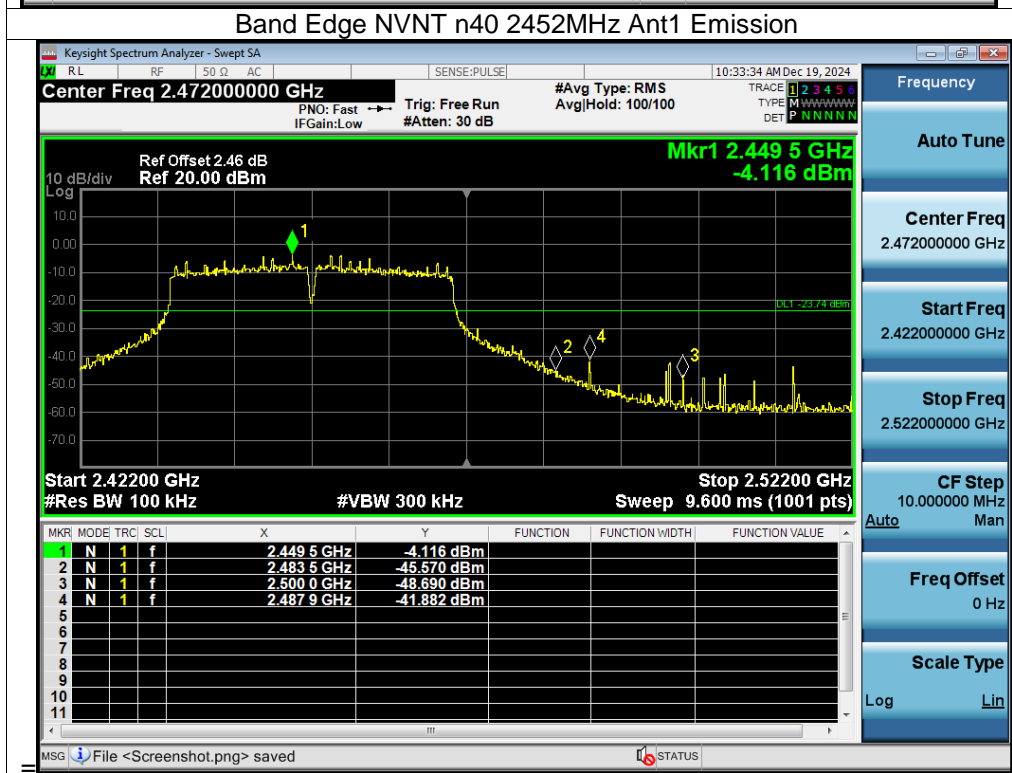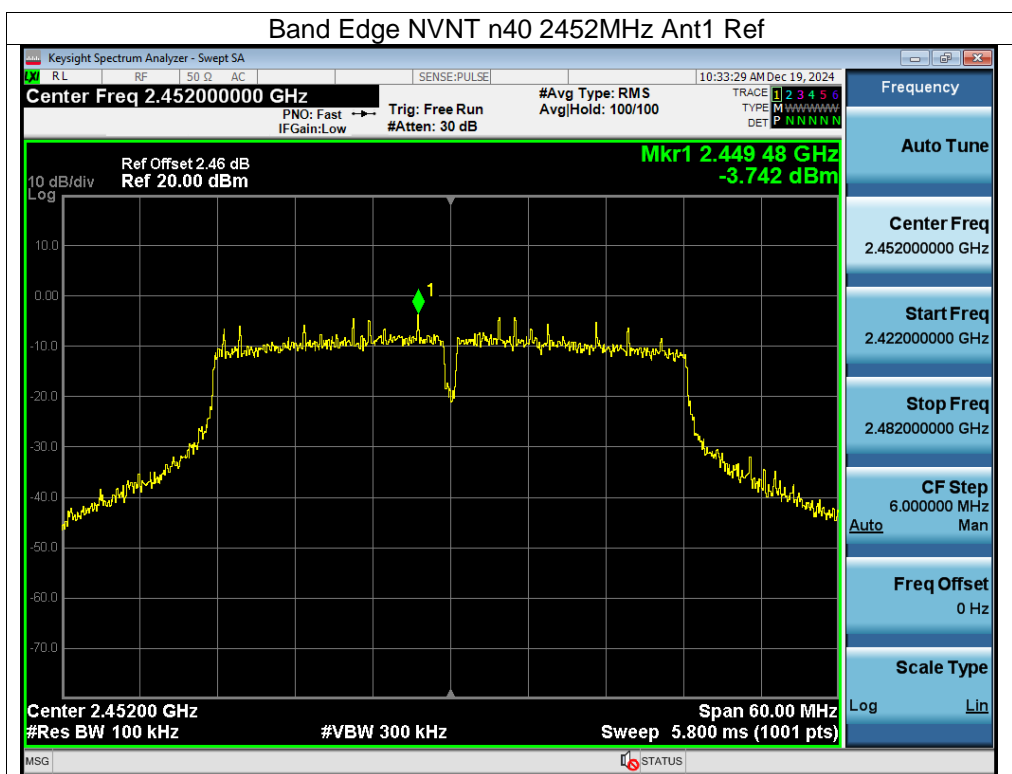


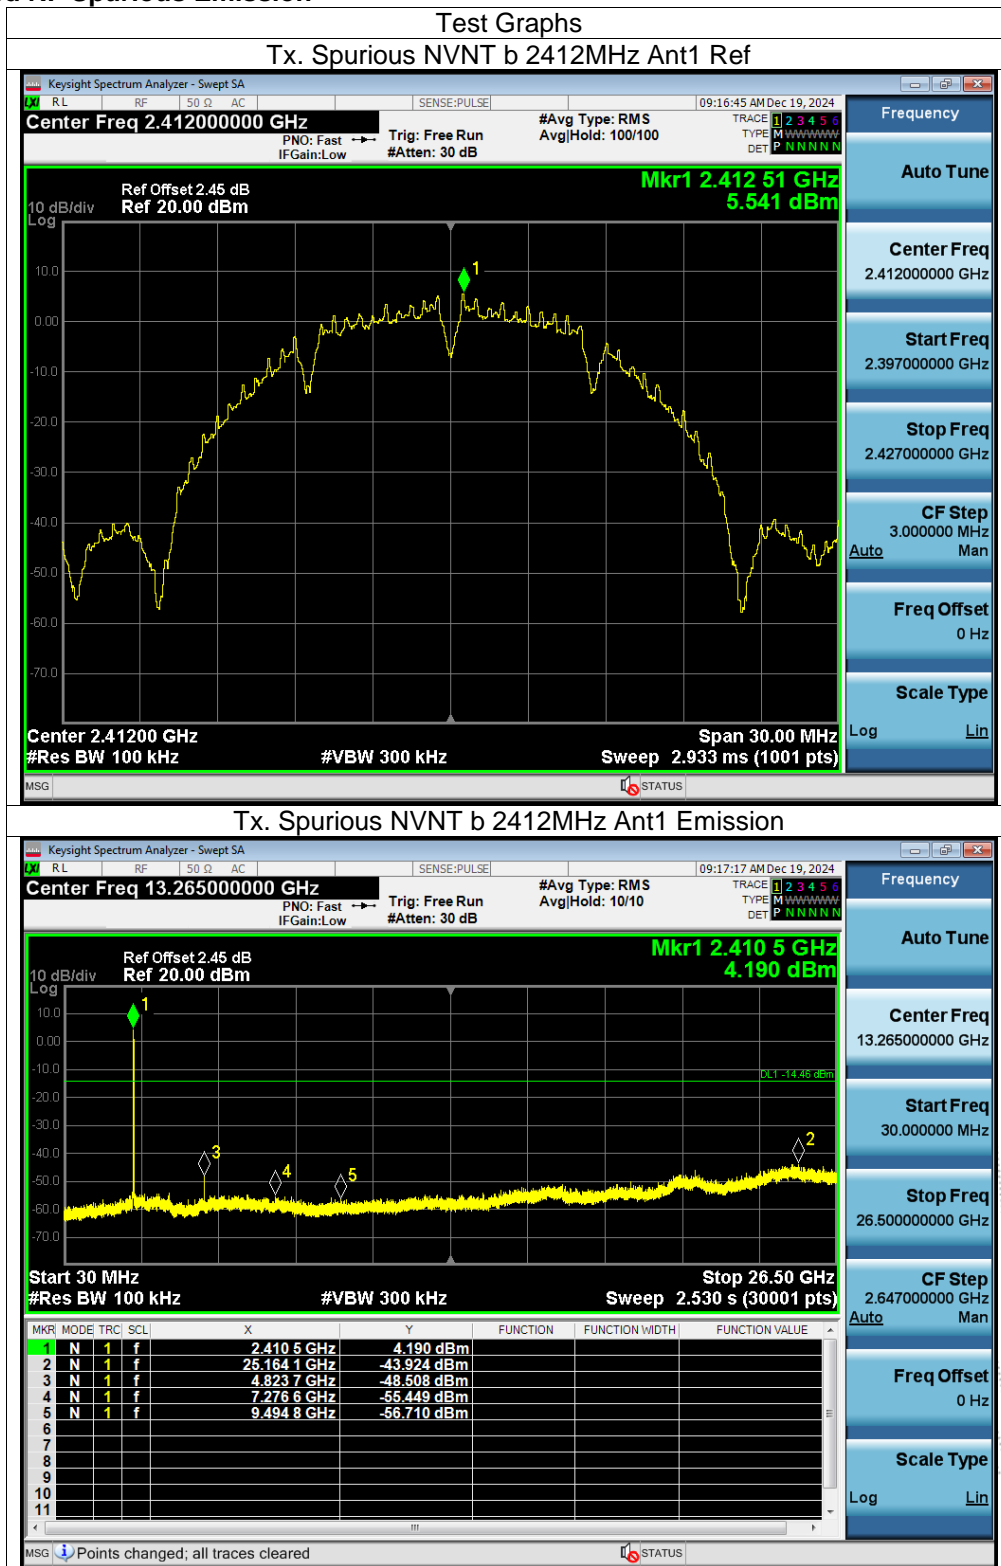**Conducted RF Spurious Emission**

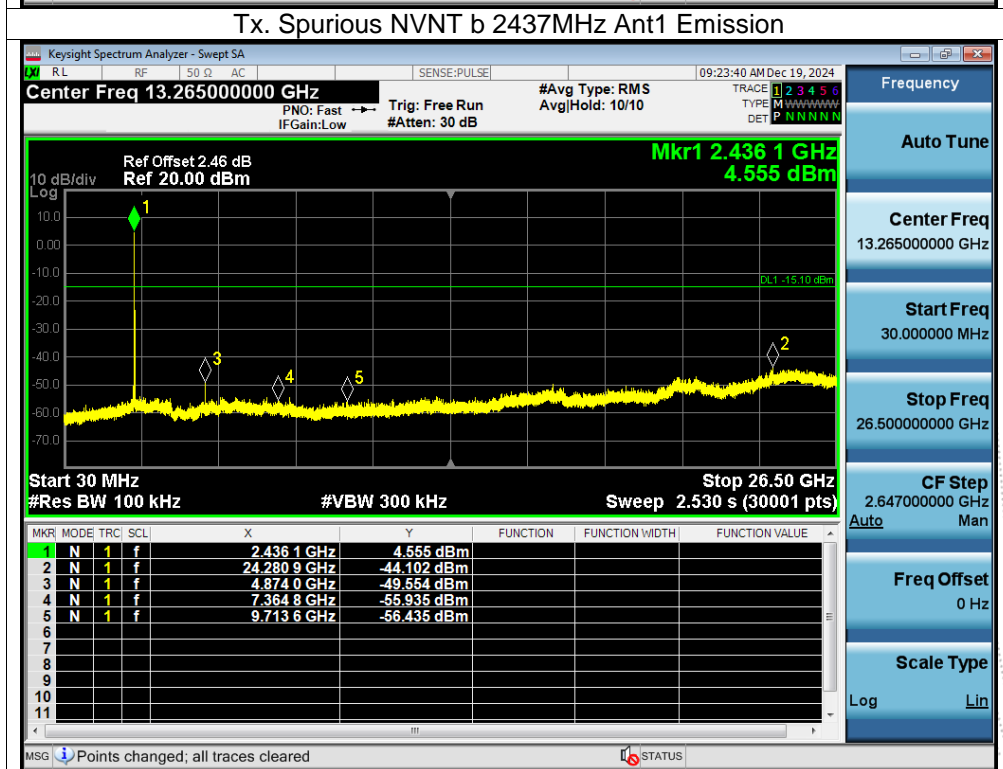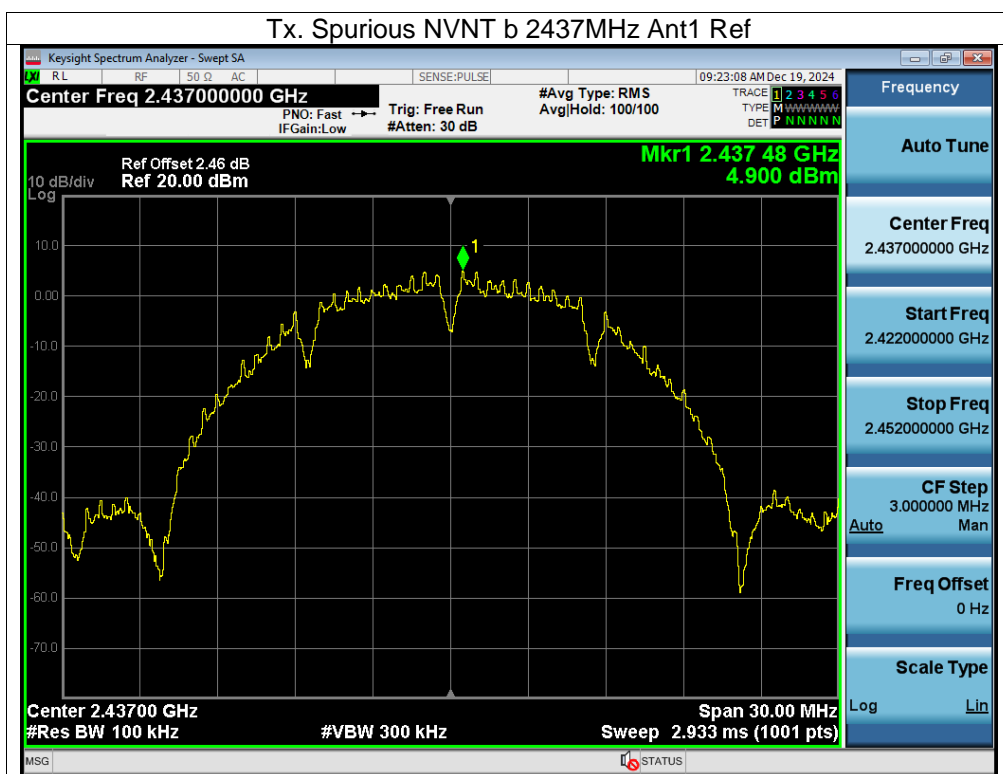
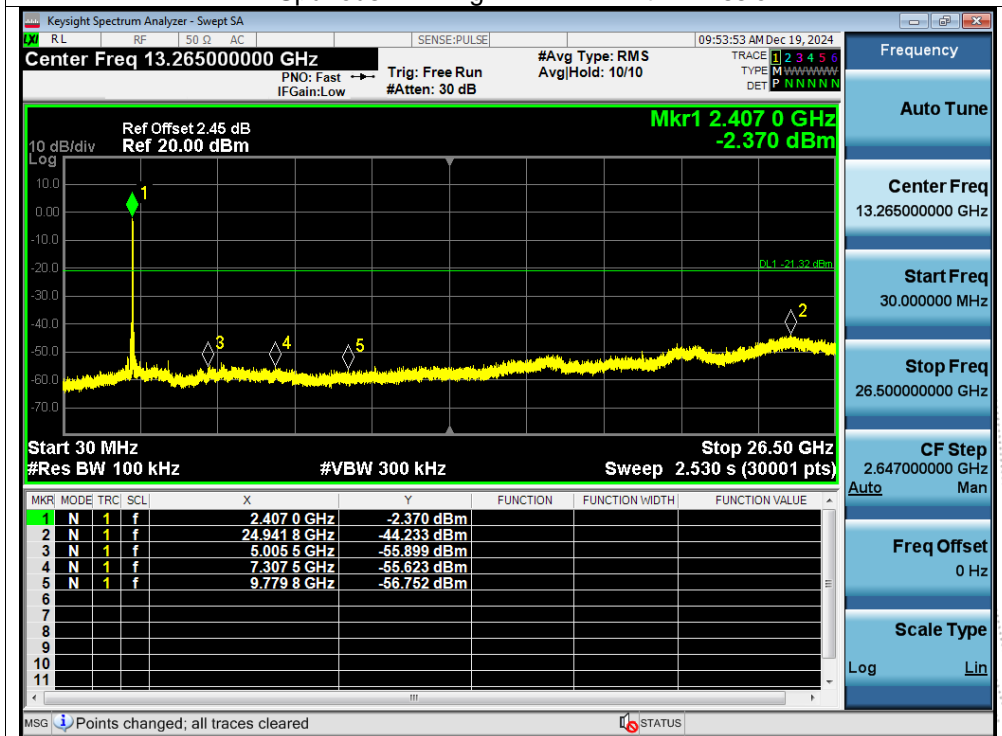


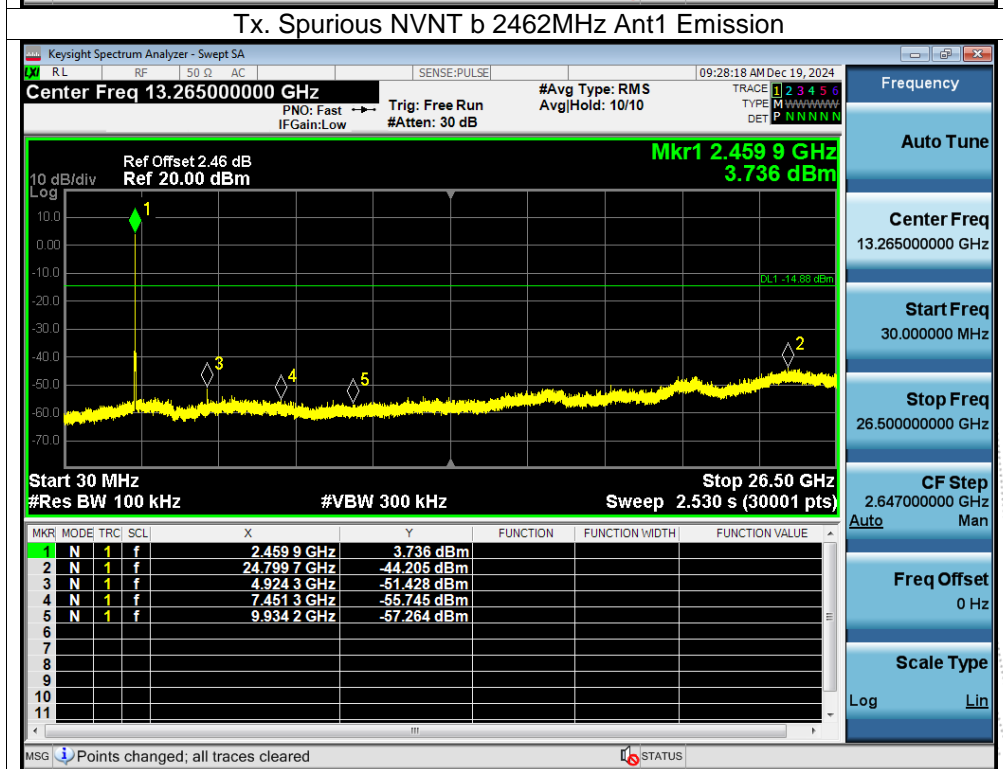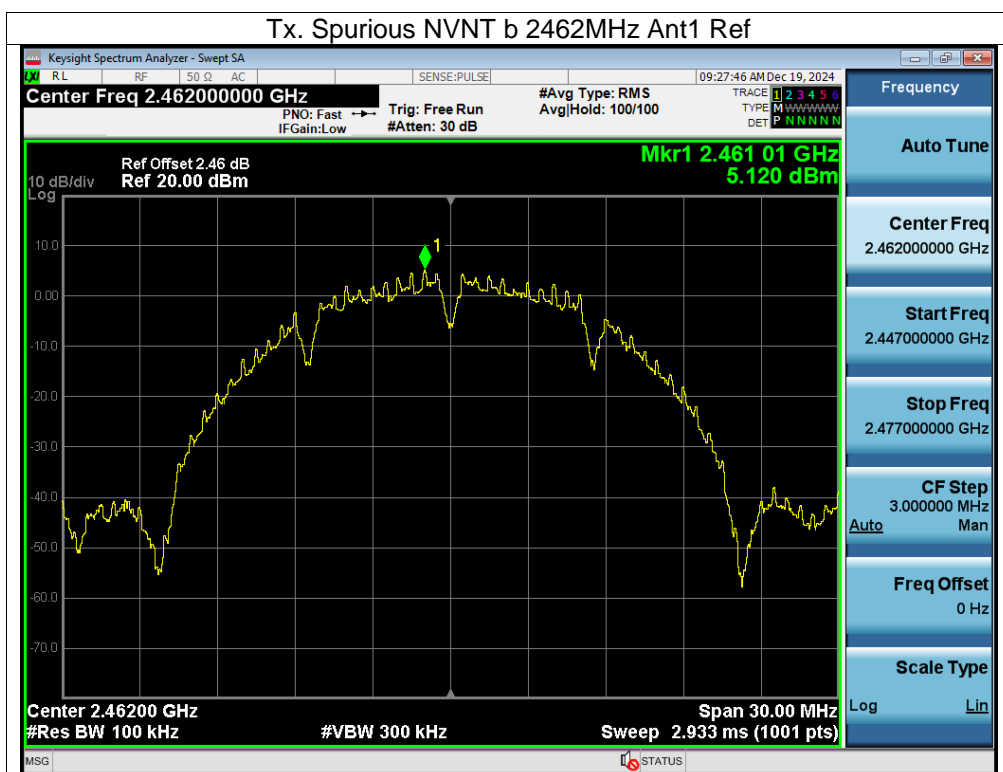

## Tx. Spurious NVNT g 2412MHz Ant1 Ref

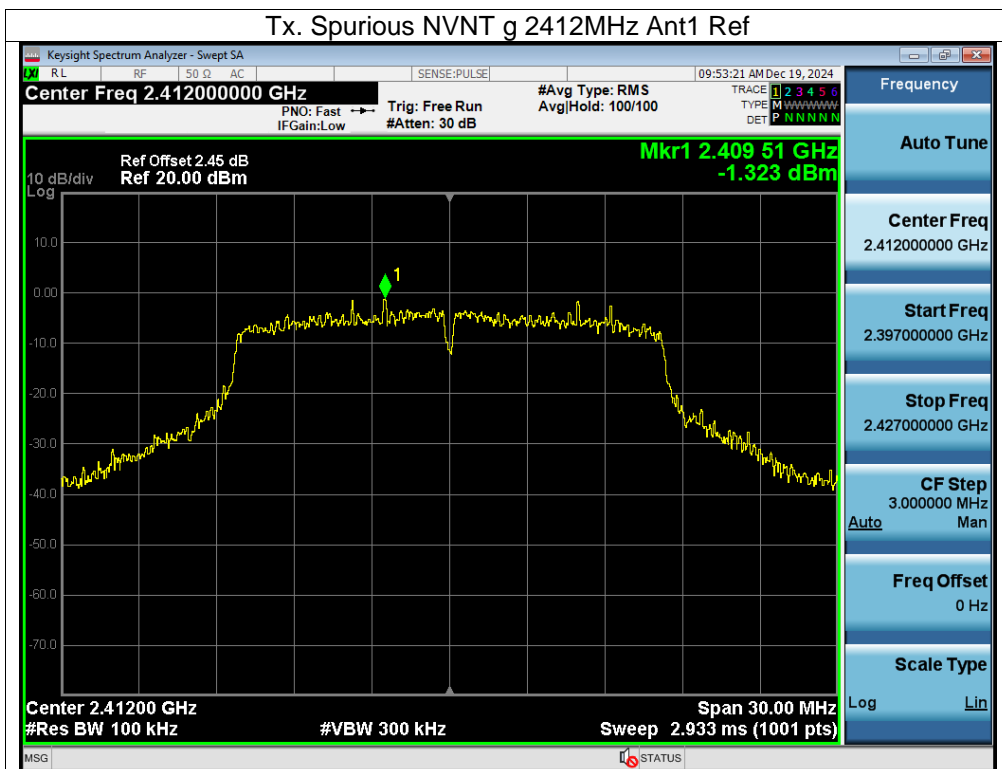


## Tx. Spurious NVNT g 2412MHz Ant1 Emission










## Tx. Spurious NVNT g 2437MHz Ant1 Ref


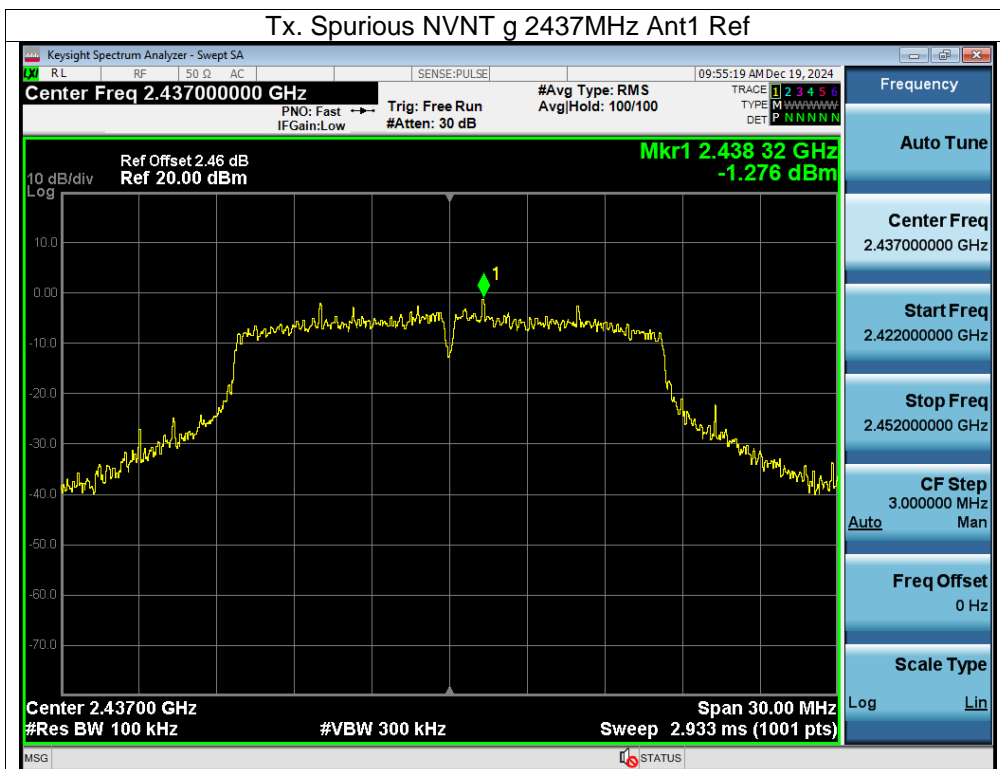




## Tx. Spurious NVNT g 2437MHz Ant1 Emission

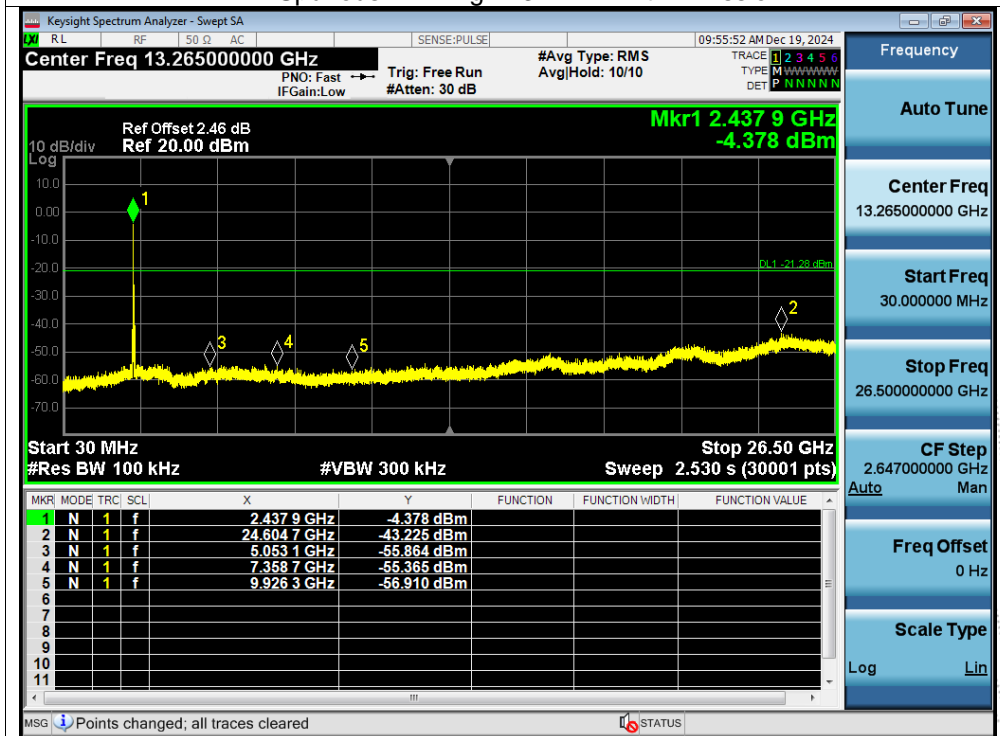

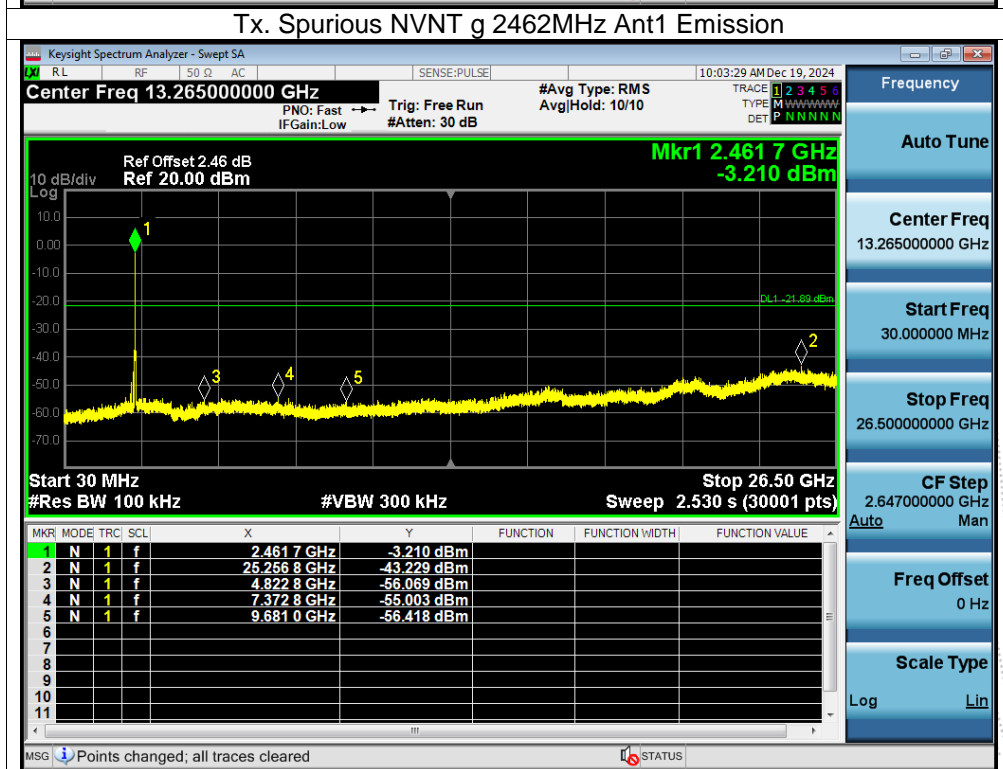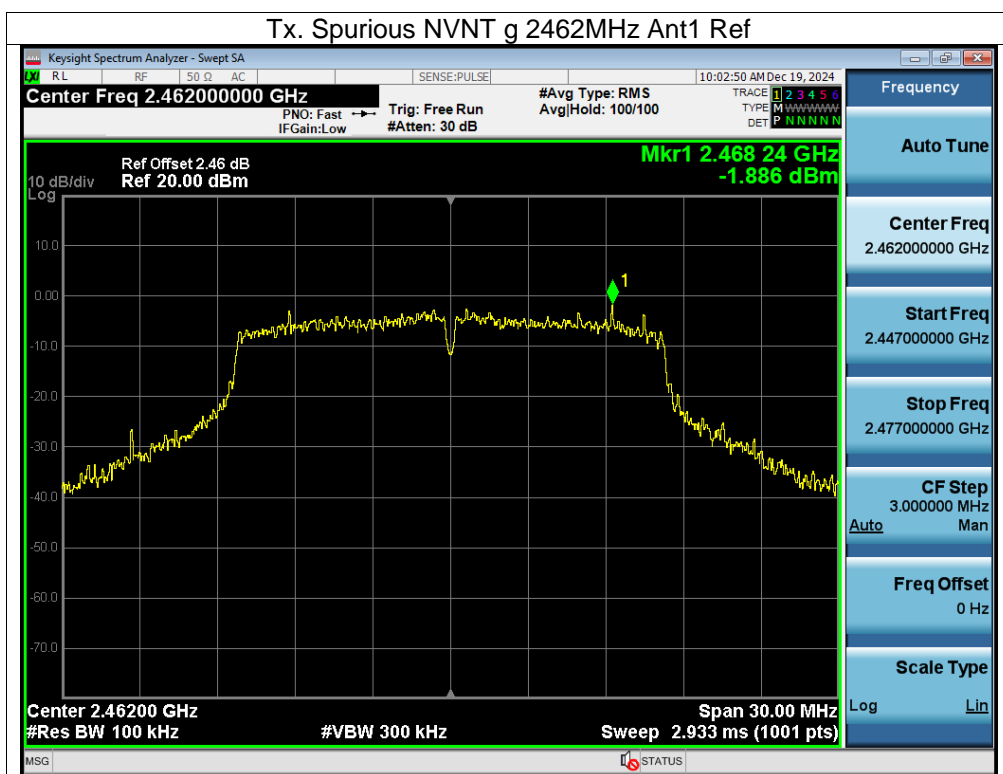

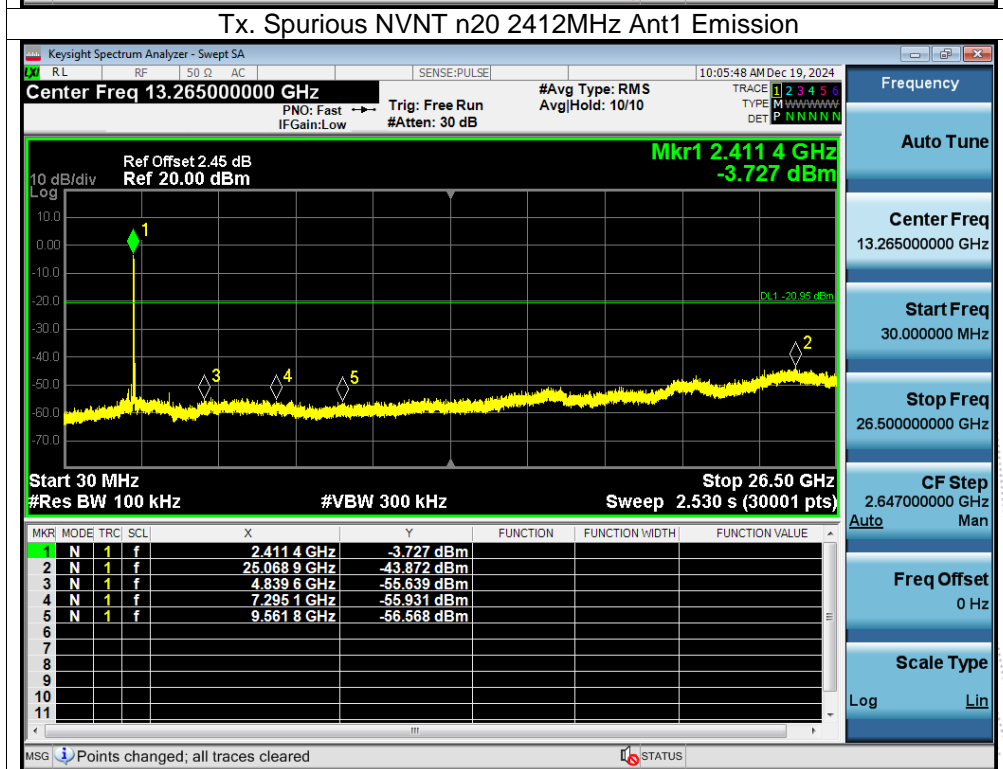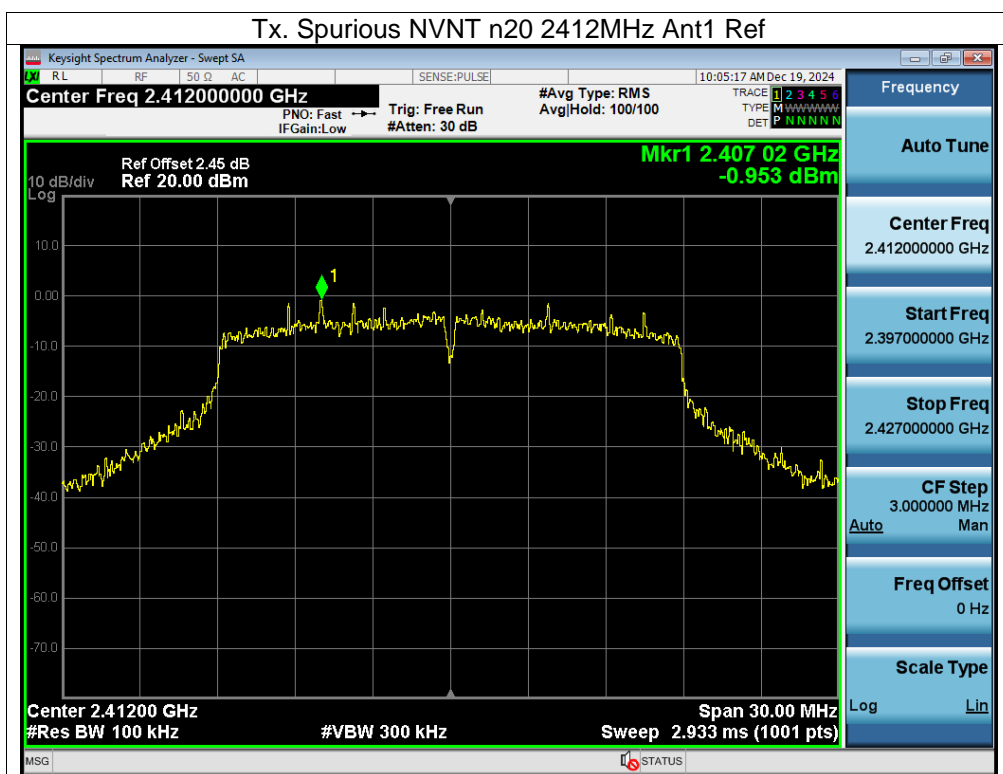


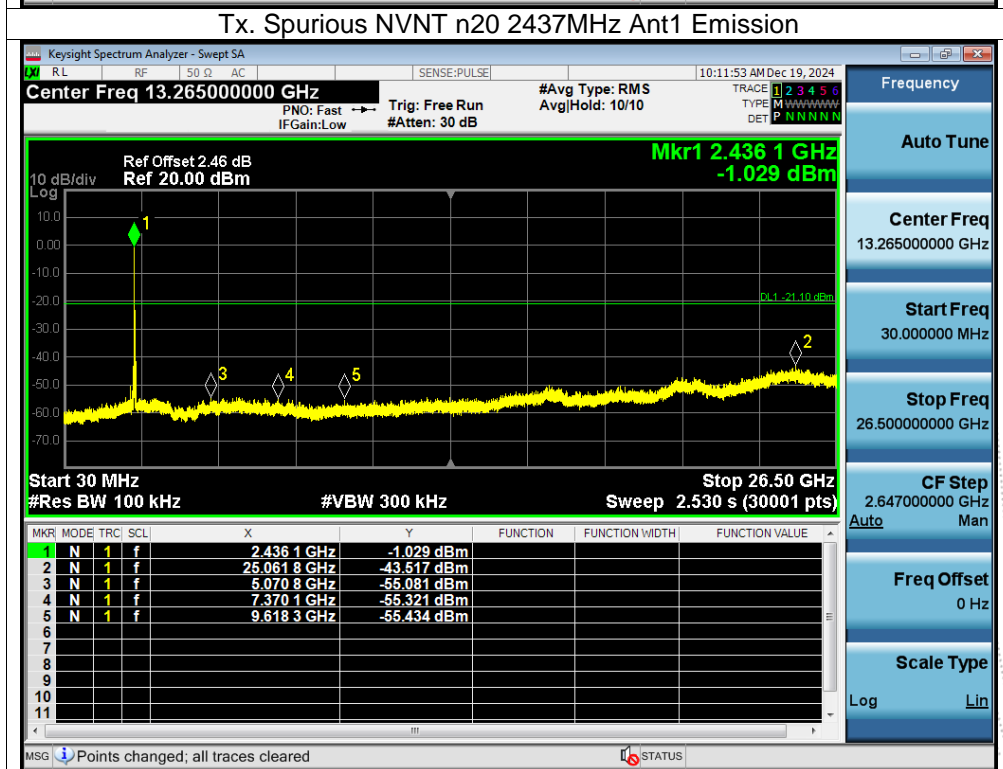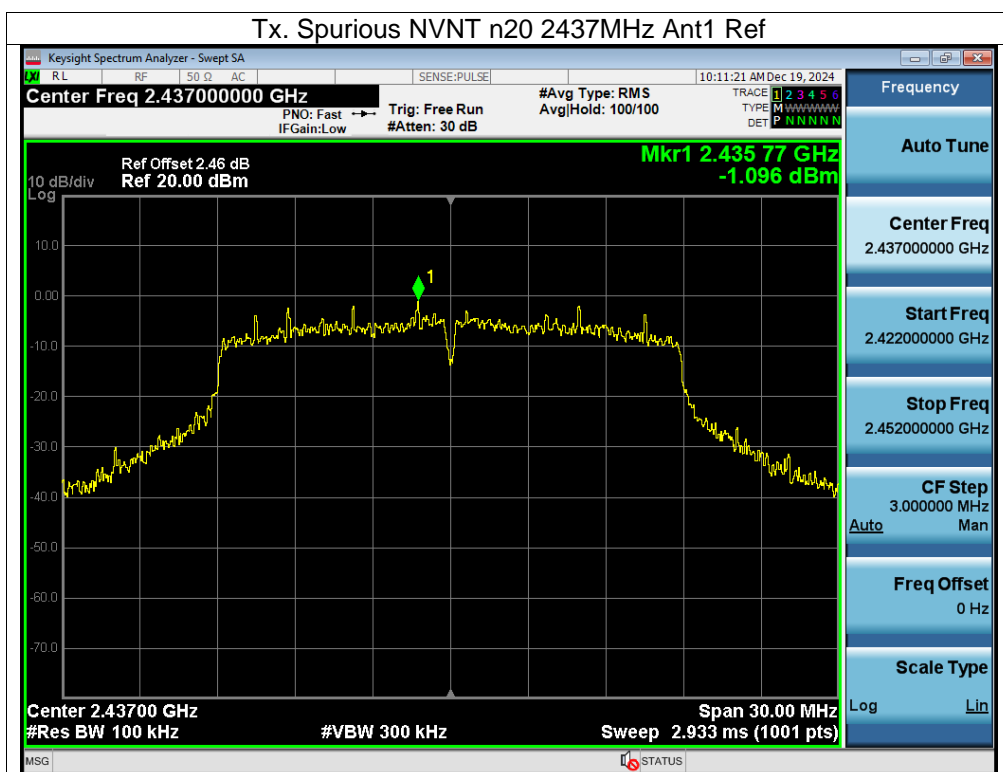

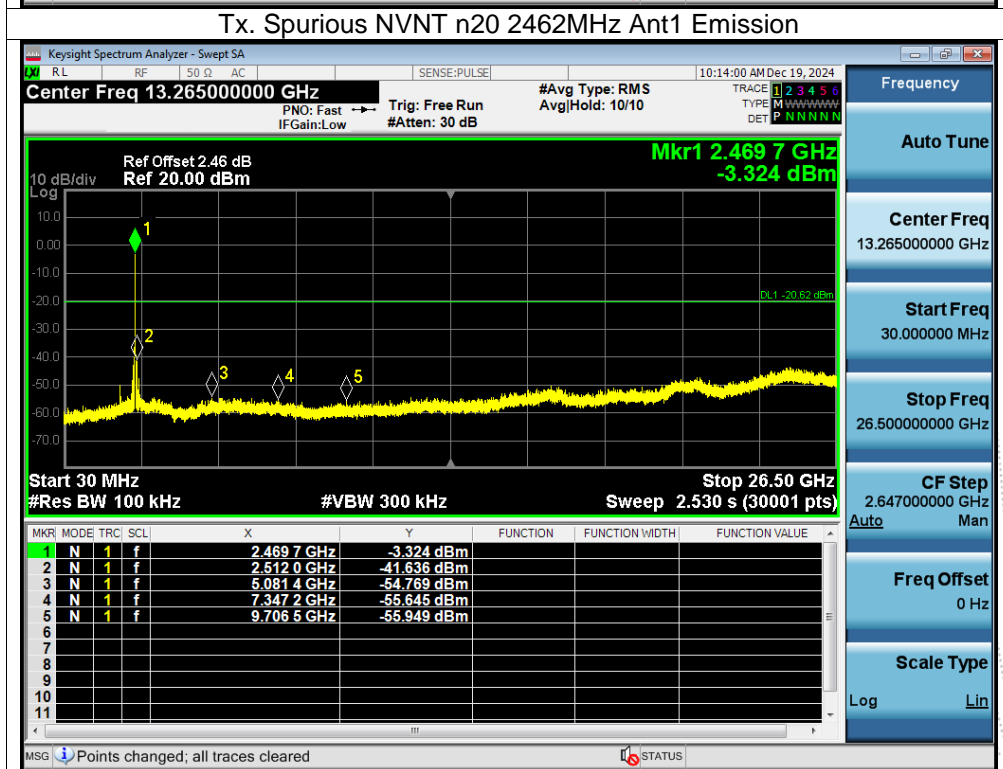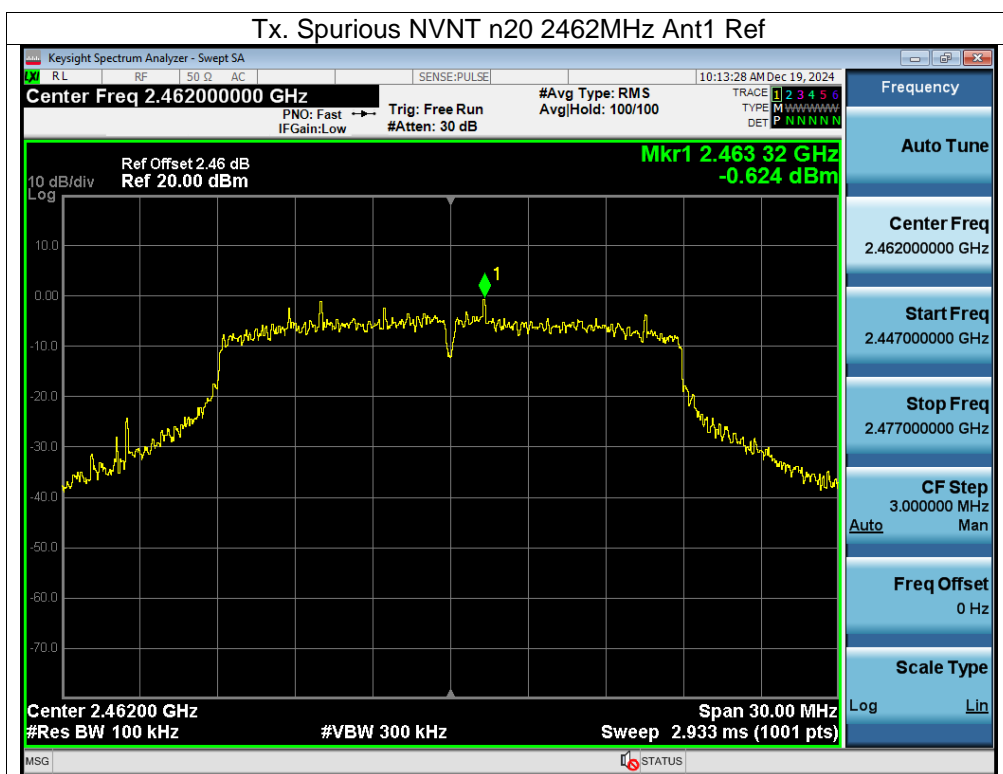


CO. LTD


## Tx. Spurious NVNT n40 2422MHz Ant1 Ref

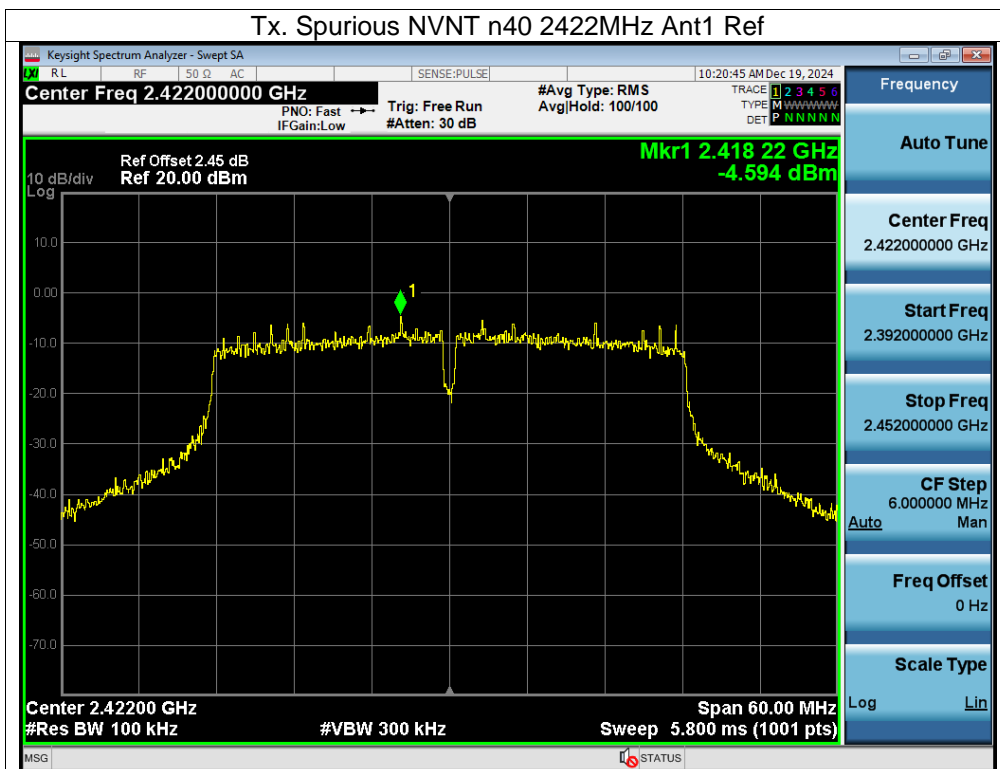


## Tx. Spurious NVNT n40 2422MHz Ant1 Emission

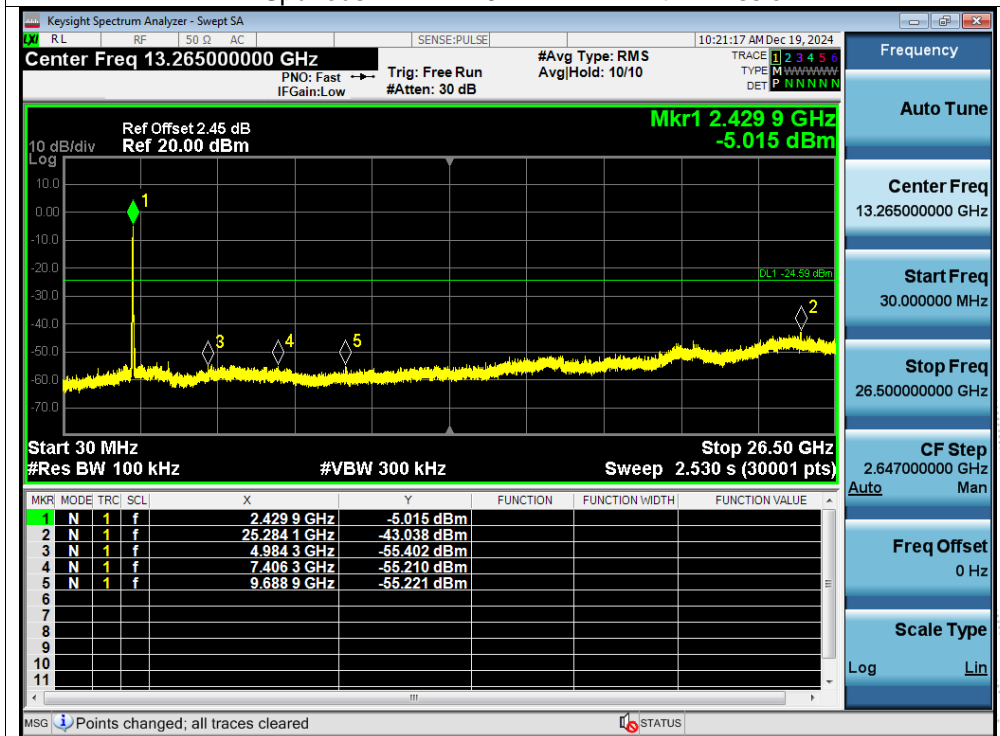

## Tx. Spurious NVNT n40 2437MHz Ant1 Ref

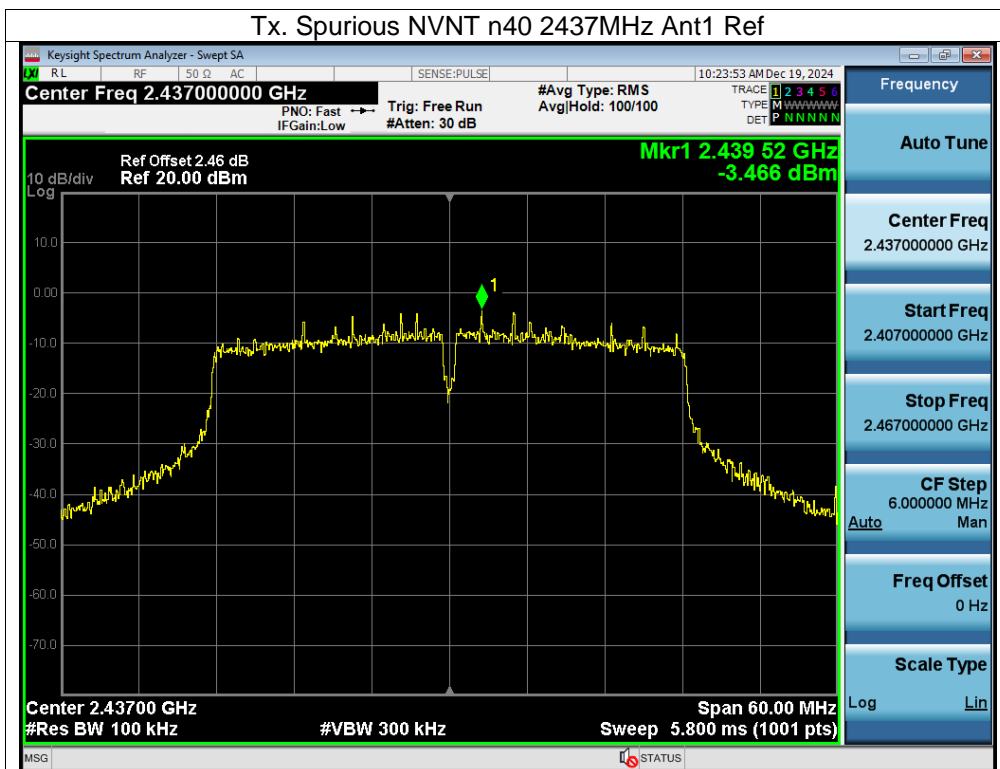


## Tx. Spurious NVNT n40 2437MHz Ant1 Emission

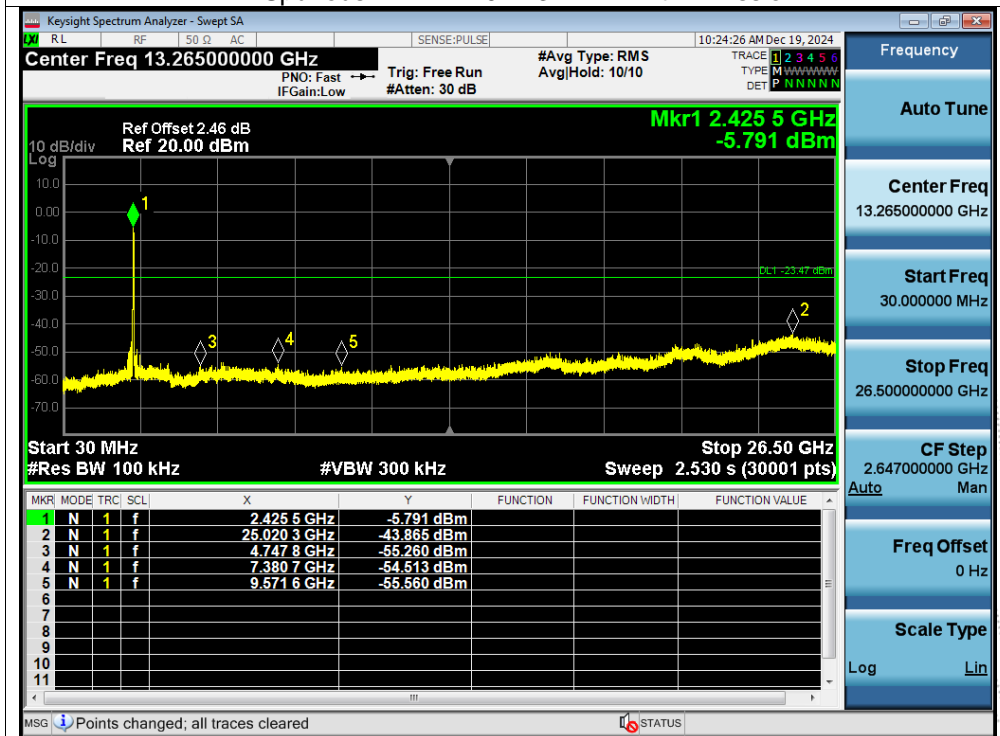




## Tx. Spurious NVNT n40 2452MHz Ant1 Ref

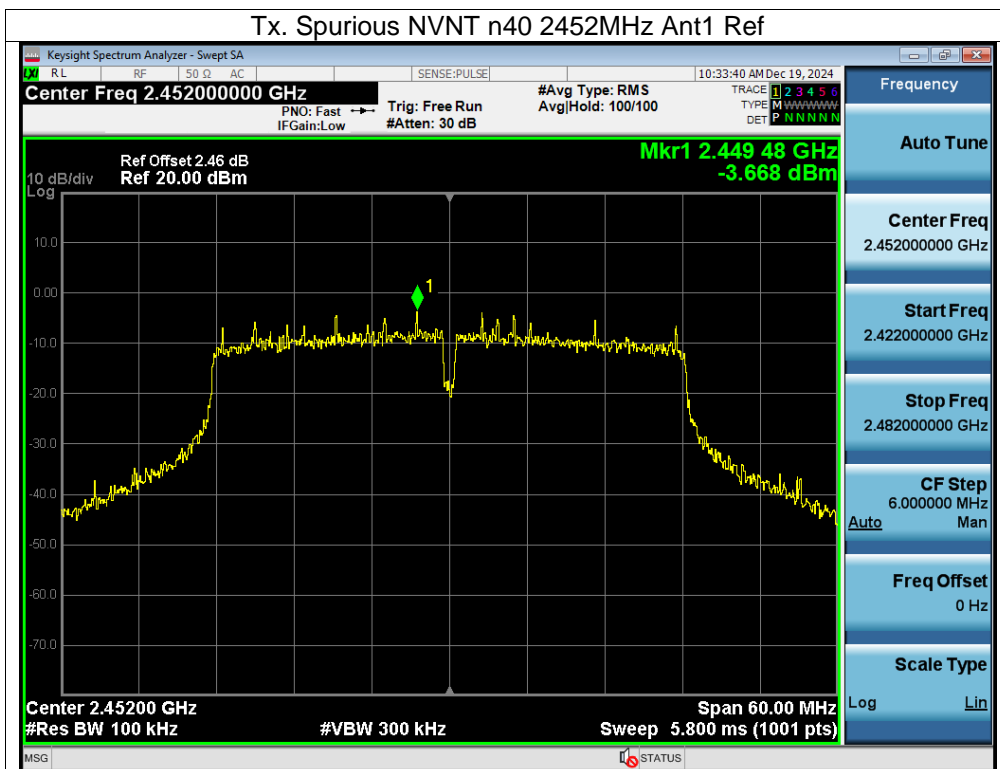

## Tx. Spurious NVNT n40 2452MHz Ant1 Emission

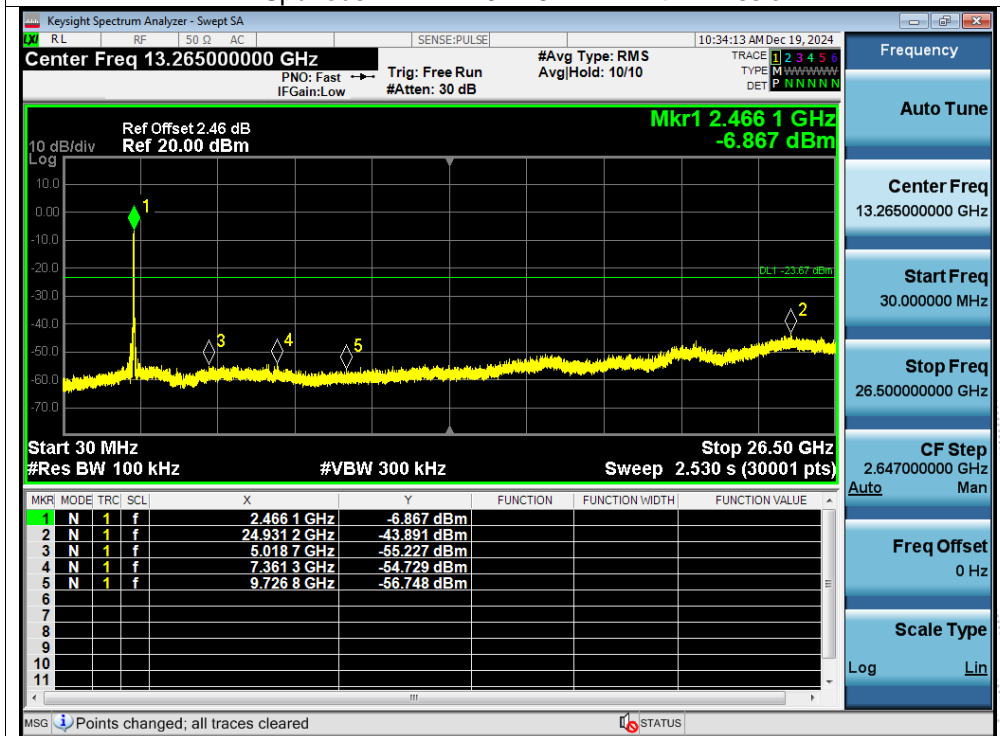

### 13. Duty Cycle Of Test Signal

#### 13.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

#### 13.2 Formula

$$\text{Duty Cycle} = T_{\text{on}} / (T_{\text{on}} + T_{\text{off}})$$

#### 13.3 Test Procedure

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

#### 13.4 Test Result

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	100	0	0
NVNT	b	2462	100	0	0
NVNT	g	2412	100	0	0
NVNT	g	2462	100	0	0
NVNT	n20	2412	100	0	0
NVNT	n20	2462	100	0	0
NVNT	n40	2422	100	0	0
NVNT	n40	2452	100	0	0

## 14. Antenna Requirement

### 14.1 Limit

15.203 requirements: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 14.1 Test Result

The EUT antenna is internal antenna, fulfill the requirement of this section.

## 15. EUT Test Setup Photographs

Conducted emissions Photo



Radiated Measurement Photos







## STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng , Fuhai S  
ubdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

Complaint/Advice E-mail: [advice@bctc-lab.com.cn](mailto:advice@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*