

FCC Part 15C

Measurement and Test Report

For

Shenzhen Junlan Electronic Ltd

No.277 PingKui Road, Shijing Community, Pingshan Street, Pingshan New

District, Shenzhen, China

FCC ID: OKU34030

FCC Rule(s):	<u>FCC Part 15.247</u>	
Product Description:	<u>BLUETOOTH ALEXA VOICE CONTROL</u>	
	<u>SPORT EARPHONE</u>	
Tested Model:	<u>NE-969</u>	
Report No.:	<u>WTG19G02008557W-2</u>	
Sample Receipt Date:	<u>2019-02-23</u>	
Tested Date:	<u>2019-02-23 to 2019-03-15</u>	
Issued Date:	<u>2019-03-15</u>	
Tested By:	<u>Jason Su / Engineer</u>	<i>Jason Su</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u>	<i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>	<i>Jandy So</i>
Prepared By:	Shenzhen SEM Test Technology Co., Ltd. 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn	

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7TEST EQUIPMENT LIST AND DETAILS.....	6
2. SUMMARY OF TEST RESULTS	7
3. RF EXPOSURE	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. ANTENNA REQUIREMENT	9
4.1 STANDARD APPLICABLE.....	9
4.2 EVALUATION INFORMATION.....	9
5. POWER SPECTRAL DENSITY	10
5.1 STANDARD APPLICABLE.....	10
5.2TEST PROCEDURE.....	10
5.3SUMMARY OF TEST RESULTS/PLOTS.....	10
6. 6DB BANDWIDTH	12
6.1 STANDARD APPLICABLE.....	12
6.2TEST PROCEDURE.....	12
6.3SUMMARY OF TEST RESULTS/PLOTS.....	12
7. RF OUTPUT POWER	14
7.1 STANDARD APPLICABLE.....	14
7.2TEST PROCEDURE.....	14
7.3 SUMMARY OF TEST RESULTS/PLOTS	14
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	16
8.1STANDARD APPLICABLE	16
8.2TEST PROCEDURE.....	16
8.3CORRECTED AMPLITUDE & MARGIN CALCULATION	17
8.4SUMMARY OF TEST RESULTS/PLOTS.....	17
9. OUT OF BAND EMISSIONS.....	25
9.1 STANDARD APPLICABLE.....	25
9.2TEST PROCEDURE.....	25
9.3SUMMARY OF TEST RESULTS/PLOTS.....	26
10. CONDUCTED EMISSIONS	33
10.1TEST PROCEDURE.....	33
10.2BASIC TEST SETUP BLOCK DIAGRAM	33
10.3TEST RECEIVER SETUP.....	33
10.4SUMMARY OF TEST RESULTS/PLOTS.....	33

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Junlan Electronic Ltd
Address of applicant: No.277 PingKui Road, Shijing Community, Pingshan Street,
Pingshan New District, Shenzhen, China

Manufacturer: Shenzhen Junlan Electronic Ltd
Address of manufacturer: No.277 PingKui Road, Shijing Community, Pingshan Street,
Pingshan New District, Shenzhen, China

General Description of EUT	
Product Name:	BLUETOOTH ALEXA VOICE CONTROL SPORT EARPHONE
Brand Name:	NAXA
Model No.:	NE-969
Adding Model(s):	BRA-34030
Rated Voltage:	DC 3.7V Battery 90mAh 0.333Wh
Power Adapter:	Input: USB 5V, 1A Output: USB 5V, 1A
Software Version:	V1.0
Hardware Version:	V1.0
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Bluetooth Version:	V4.2(BLE mode)
FrequencyRange:	2402-2480MHz
RF Output Power:	-13.68dBm (Conducted)
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	Ceramic Antenna
Antenna Gain:	0dBi
Lowest Internal Frequency of EUT:	26MHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247:Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 DTS Meas Guidance v04:GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v04

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM. Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

Test Conditions	
Temperature:	22~25°C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-05-22	2019-05-21
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-05-22	2019-05-21
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-05-22	2019-05-21
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-05-22	2019-05-21
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-05-22	2019-05-21
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-05-22	2019-05-21

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure




According to the KDB 558074, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 Summary of Test Results/Plots

Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
GFSK(BLE)	Low	-29.77	8
	Middle	-28.74	8
	High	-28.49	8

Please refer to the following test plots:

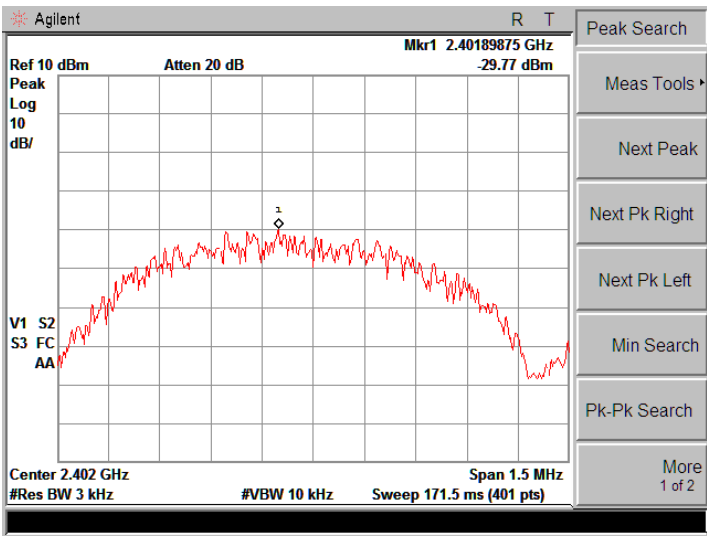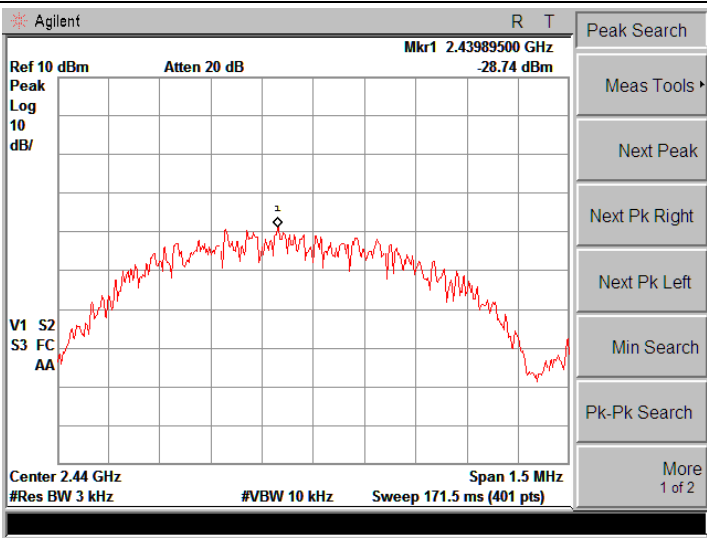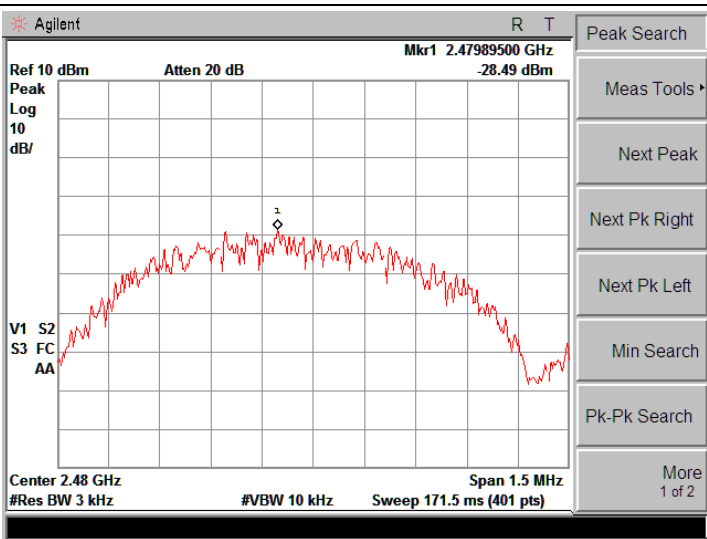Low	
Middle	
High	

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.




6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Summary of Test Results/Plots

Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
GFSK(BLE)	Low	772.911	≥ 500
	Middle	769.526	≥ 500
	High	768.185	≥ 500

Please refer to the following test plots:

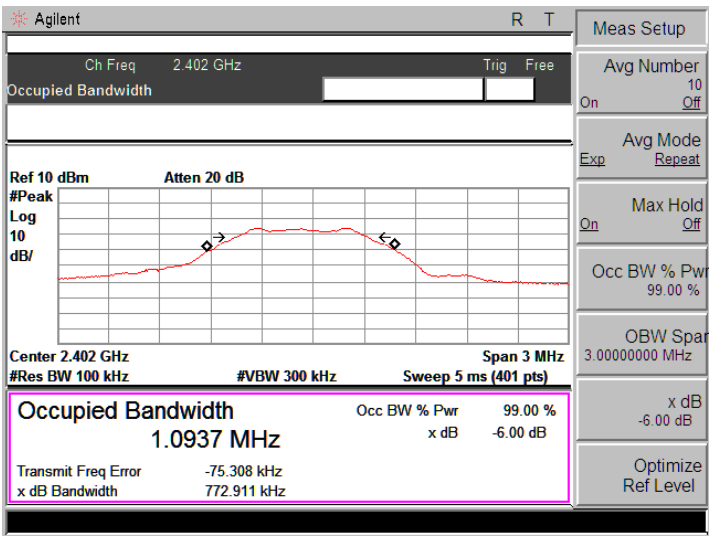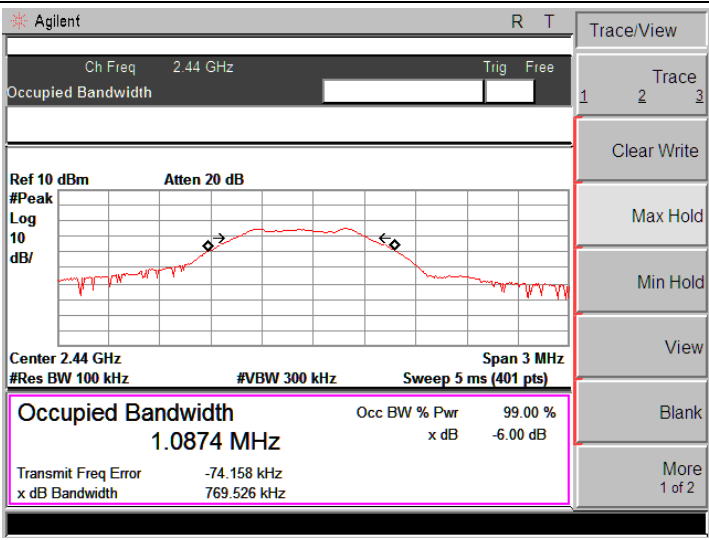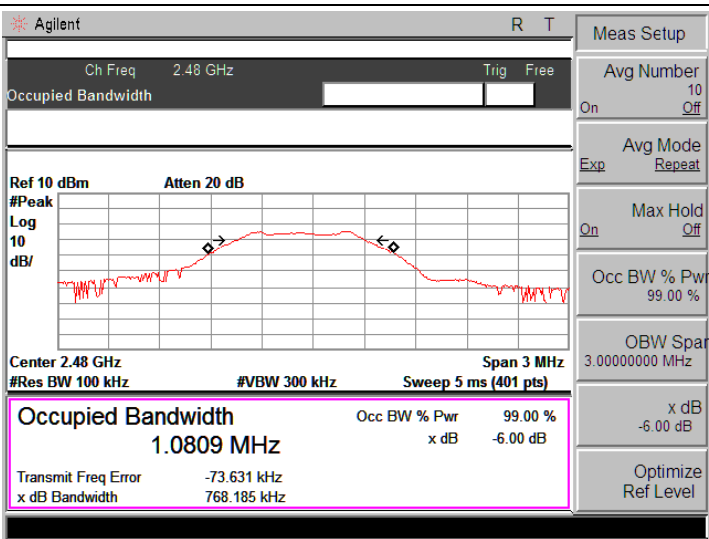Low	 Agilent R T Ch Freq 2.402 GHz Trig Free Occupied Bandwidth Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.402 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts) Occupied Bandwidth 1.0937 MHz Transmit Freq Error -75.308 kHz x dB Bandwidth 772.911 kHz Occ BW % Pwr 99.00 % x dB -6.00 dB Meas Setup Avg Number 10 On Off Avg Mode Exp Repeat Max Hold On Off Occ BW % Pwr 99.00 % OBW Spar 3.00000000 MHz x dB -6.00 dB Optimize Ref Level
Middle	 Agilent R T Ch Freq 2.44 GHz Trig Free Occupied Bandwidth Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.44 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts) Occupied Bandwidth 1.0874 MHz Transmit Freq Error -74.158 kHz x dB Bandwidth 769.526 kHz Occ BW % Pwr 99.00 % x dB -6.00 dB Trace/View 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
High	 Agilent R T Ch Freq 2.48 GHz Trig Free Occupied Bandwidth Ref 10 dBm Atten 20 dB #Peak Log 10 dB/ Center 2.48 GHz Span 3 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 5 ms (401 pts) Occupied Bandwidth 1.0809 MHz Transmit Freq Error -73.631 kHz x dB Bandwidth 768.185 kHz Occ BW % Pwr 99.00 % x dB -6.00 dB Meas Setup Avg Number 10 On Off Avg Mode Exp Repeat Max Hold On Off Occ BW % Pwr 99.00 % OBW Spar 3.00000000 MHz x dB -6.00 dB Optimize Ref Level

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure




According to section KDB-558074 D01 v04 section 9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq 3 \times$ RBW.
- Set span $\geq 3 \times$ RBW
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

7.3 Summary of Test Results/Plots

Test Mode	Test Channel	Reading dBm	Output Power mW	Limit mW
GFSK(BLE)	Low	-14.89	0.00003	1000
	Middle	-14.02	0.00004	1000
	High	-13.68	0.00004	1000

Note: the antenna gain of 0dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.

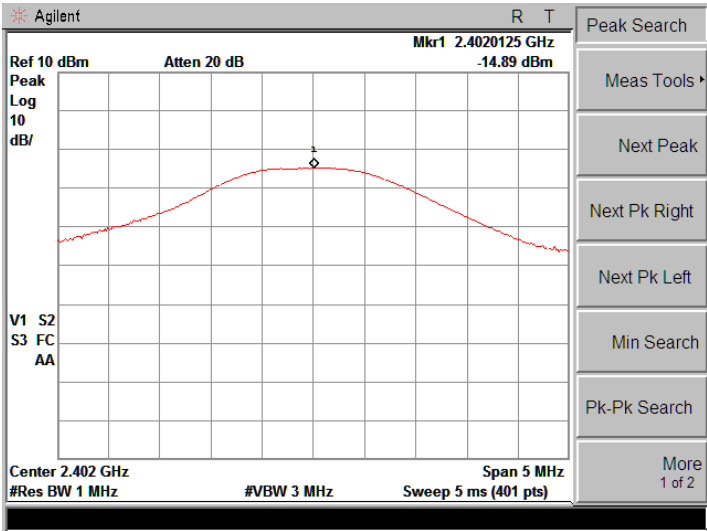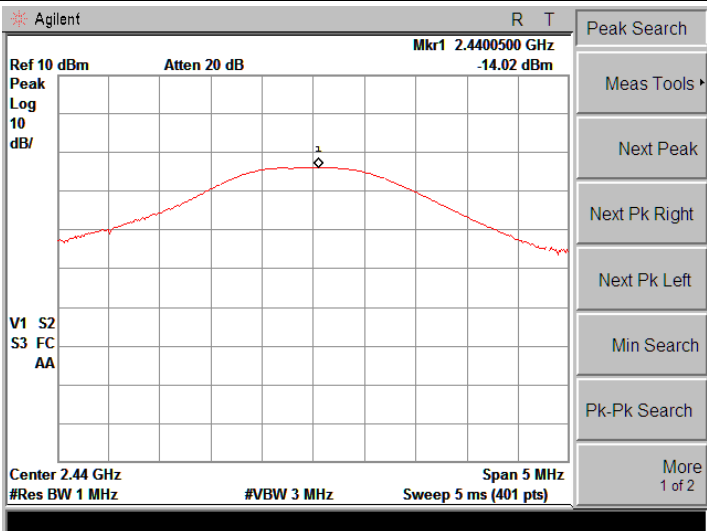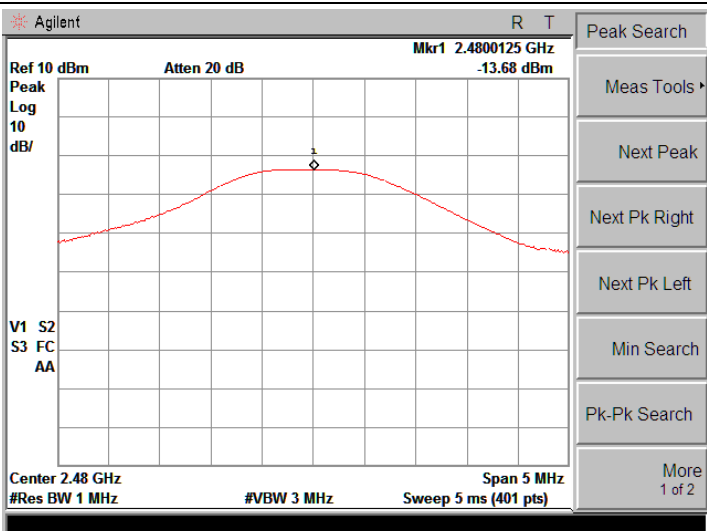Low	
Middle	
High	

8. Field Strength of Spurious Emissions

8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

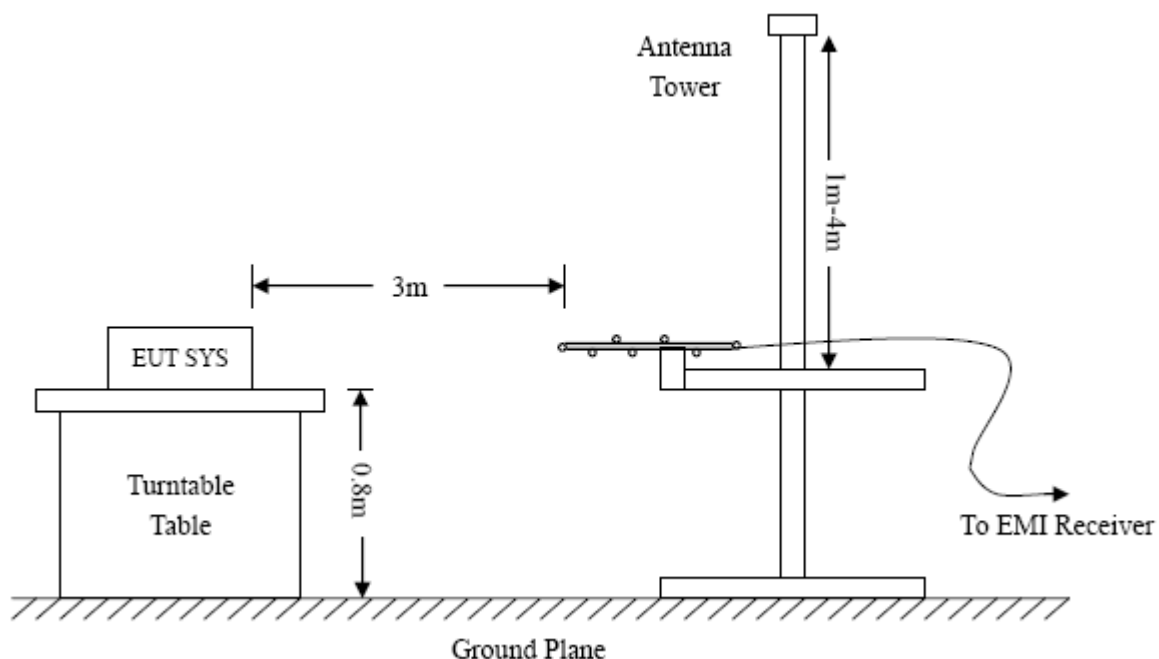

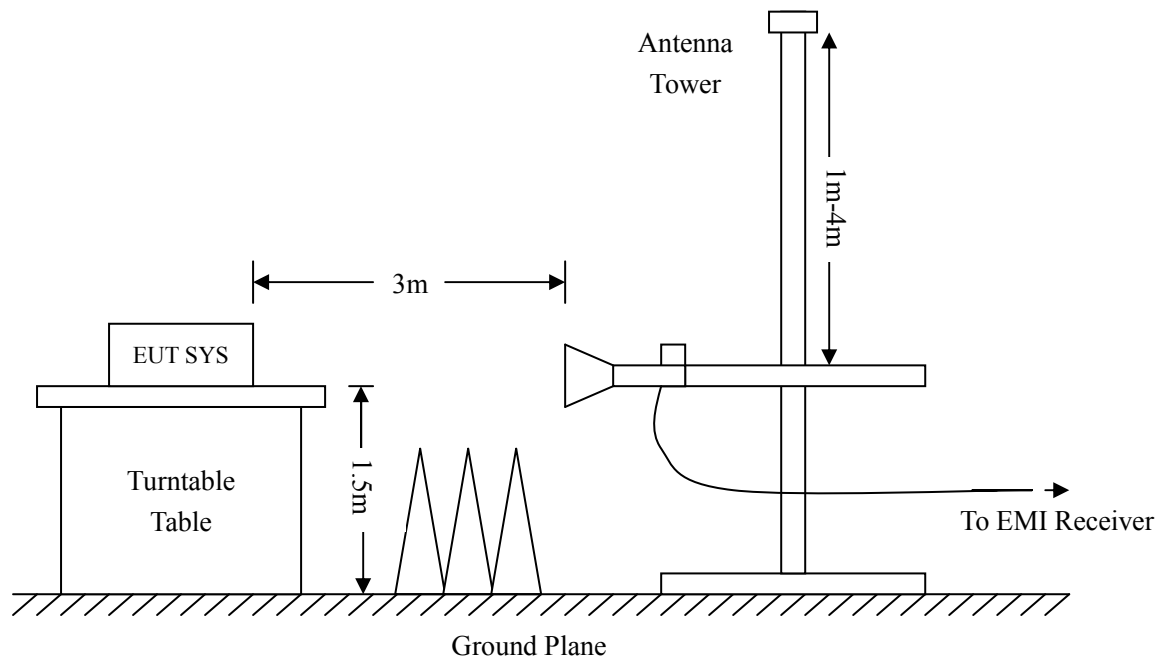

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emissions Below 1GHz

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

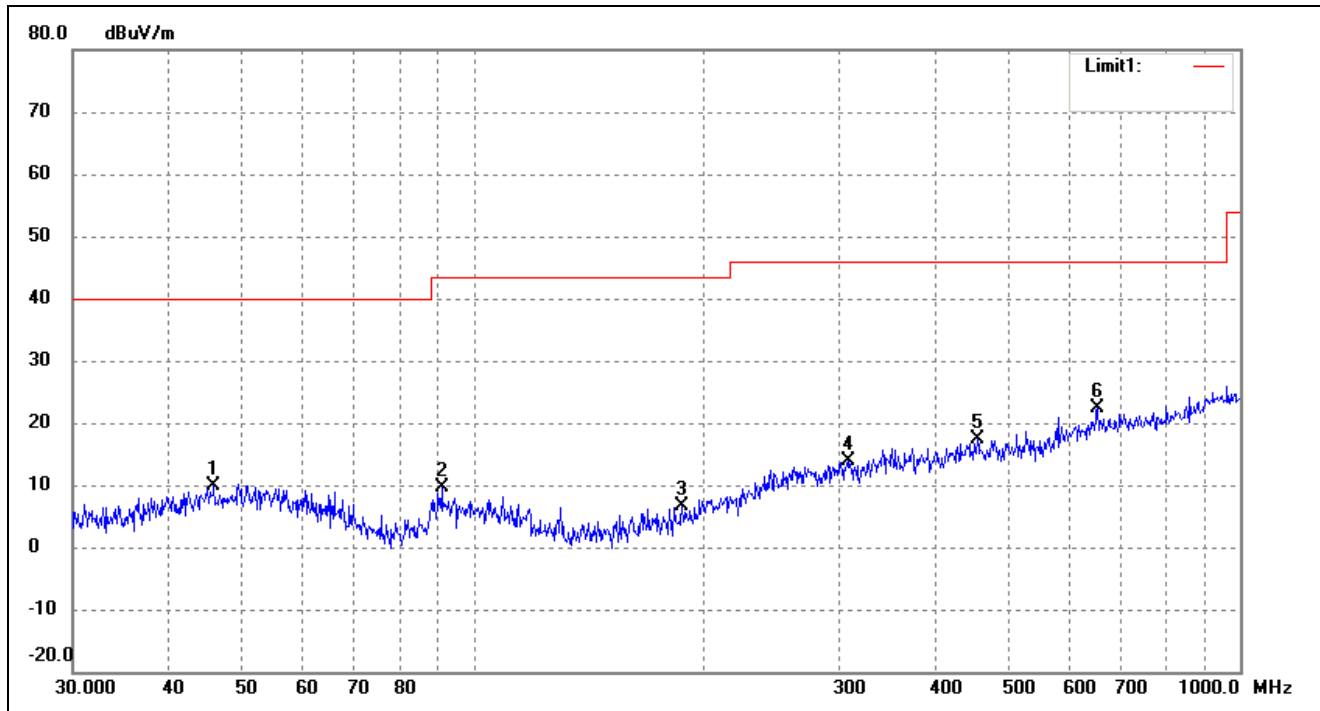


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	45.8553	17.91	-8.08	9.83	40.00	-30.17	peak
2	90.8554	25.25	-15.66	9.59	43.50	-33.91	peak
3	187.0958	20.99	-14.40	6.59	43.50	-36.91	peak
4	308.9126	23.03	-9.09	13.94	46.00	-32.06	peak
5	454.3100	24.24	-6.85	17.39	46.00	-28.61	peak
6	651.9417	25.66	-3.40	22.26	46.00	-23.74	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

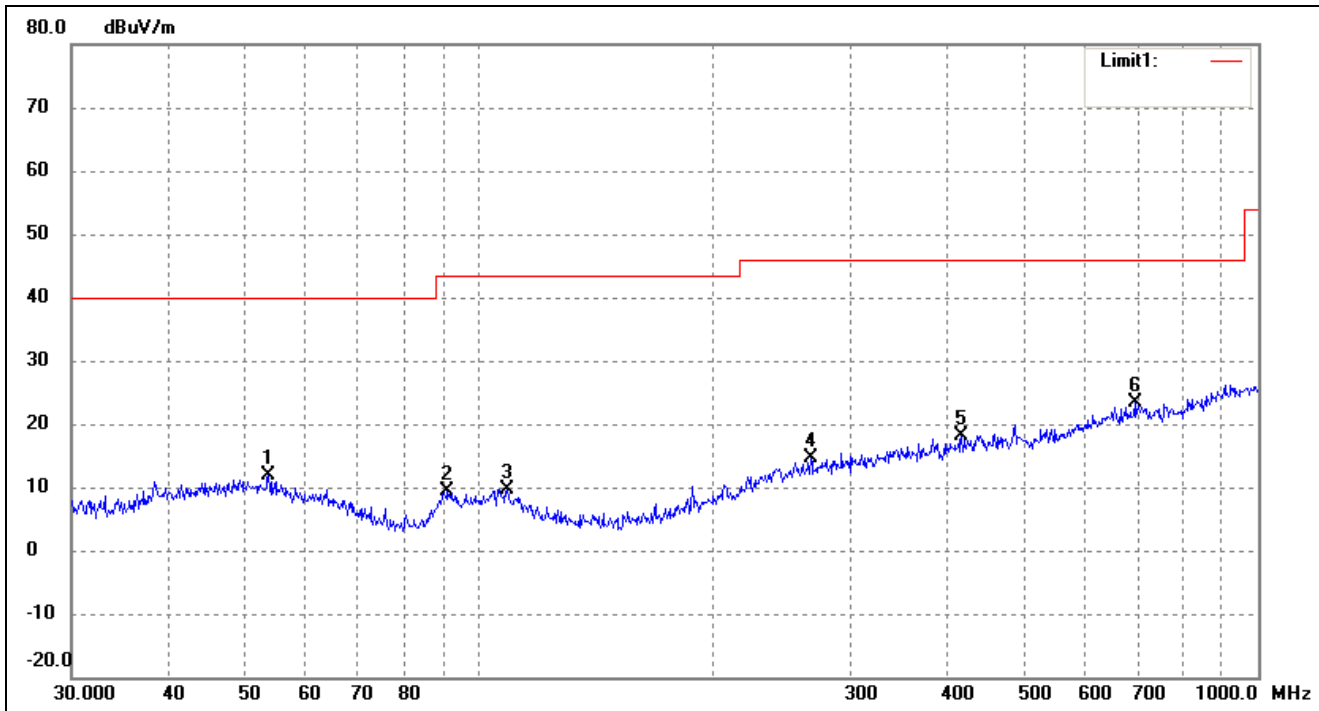


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	53.6932	20.64	-8.88	11.76	40.00	-28.24	peak
2	91.1746	25.08	-15.62	9.46	43.50	-34.04	peak
3	108.6470	24.00	-14.45	9.55	43.50	-33.95	peak
4	266.6089	25.15	-10.56	14.59	46.00	-31.41	peak
5	416.1791	25.14	-6.99	18.15	46.00	-27.85	peak
6	694.4174	26.01	-2.68	23.33	46.00	-22.67	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

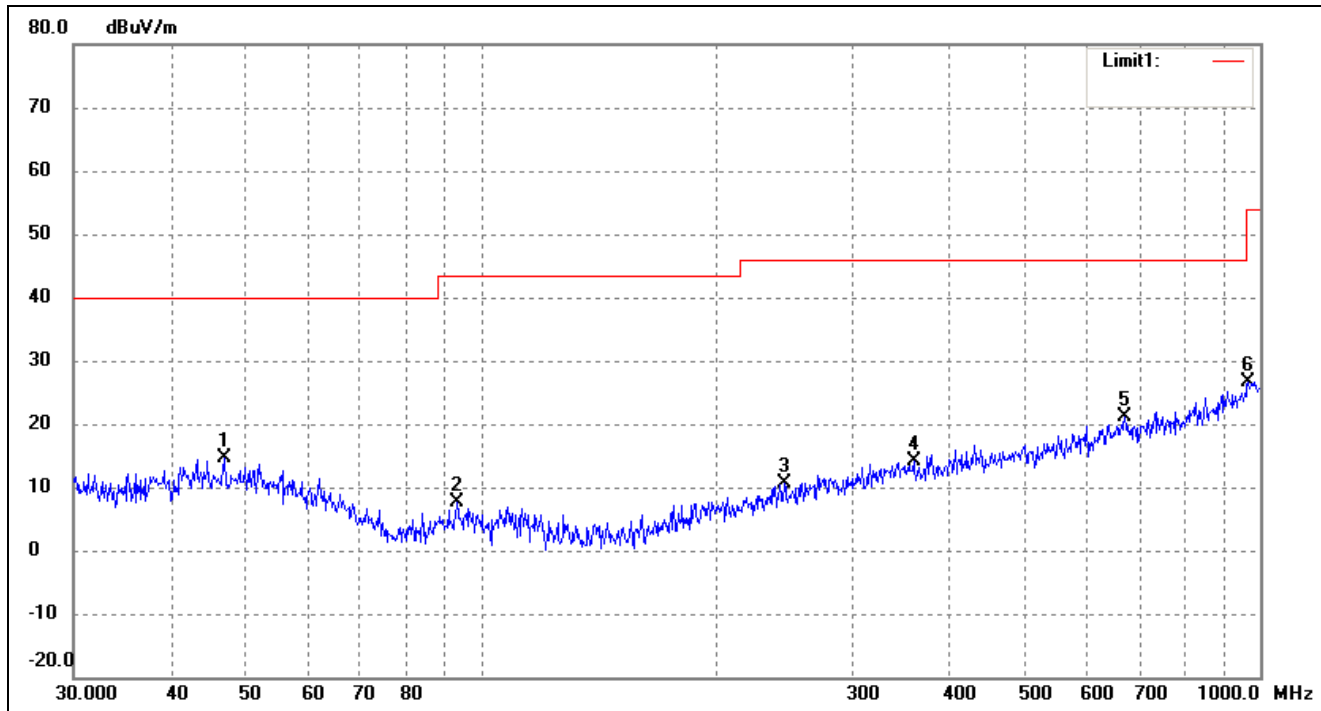


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	46.8303	22.83	-8.11	14.72	40.00	-25.28	peak
2	93.1132	23.09	-15.36	7.73	43.50	-35.77	peak
3	245.0900	21.90	-11.23	10.67	46.00	-35.33	peak
4	359.1860	22.17	-8.16	14.01	46.00	-31.99	peak
5	670.4893	24.22	-3.13	21.09	46.00	-24.91	peak
6	965.5421	23.41	3.20	26.61	54.00	-27.39	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

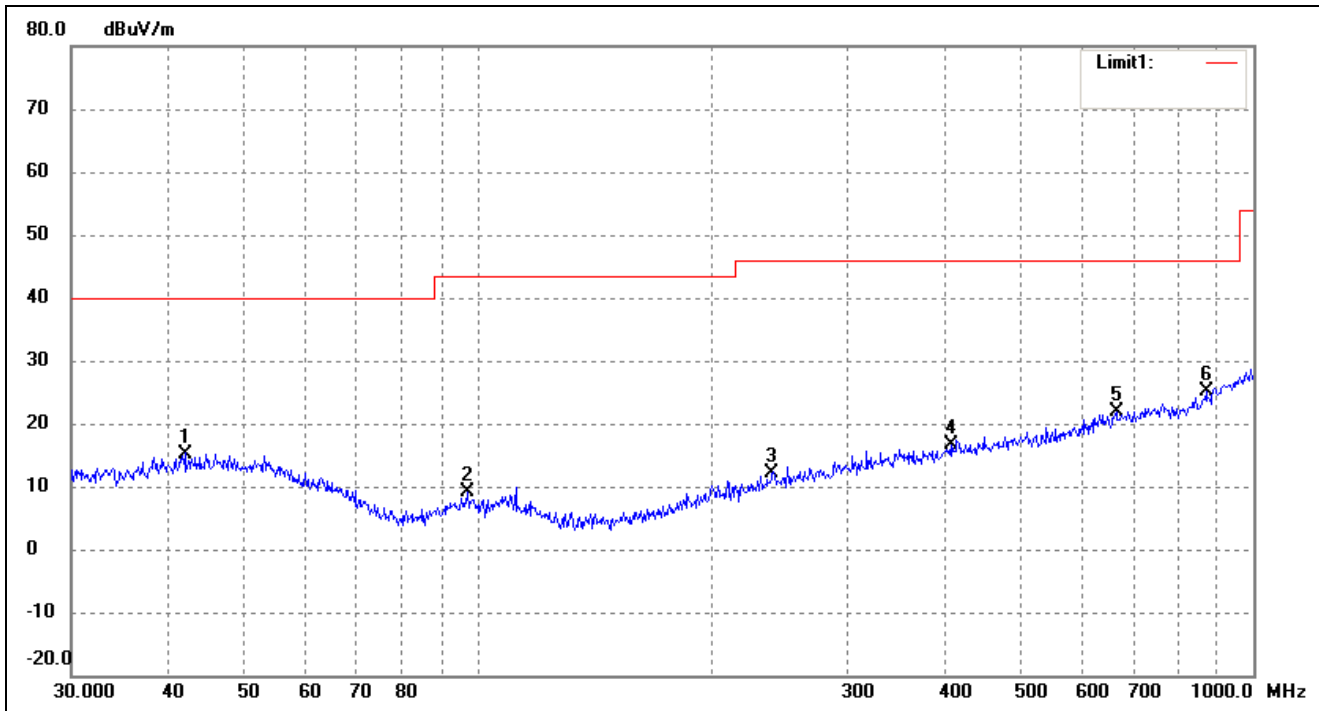


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	42.0066	23.28	-8.03	15.25	40.00	-24.75	peak
2	97.1148	24.06	-15.03	9.03	43.50	-34.47	peak
3	239.9874	23.47	-11.38	12.09	46.00	-33.91	peak
4	407.5145	23.74	-7.23	16.51	46.00	-29.49	peak
5	665.8035	24.97	-3.18	21.79	46.00	-24.21	peak
6	869.1302	24.81	0.42	25.23	46.00	-20.77	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

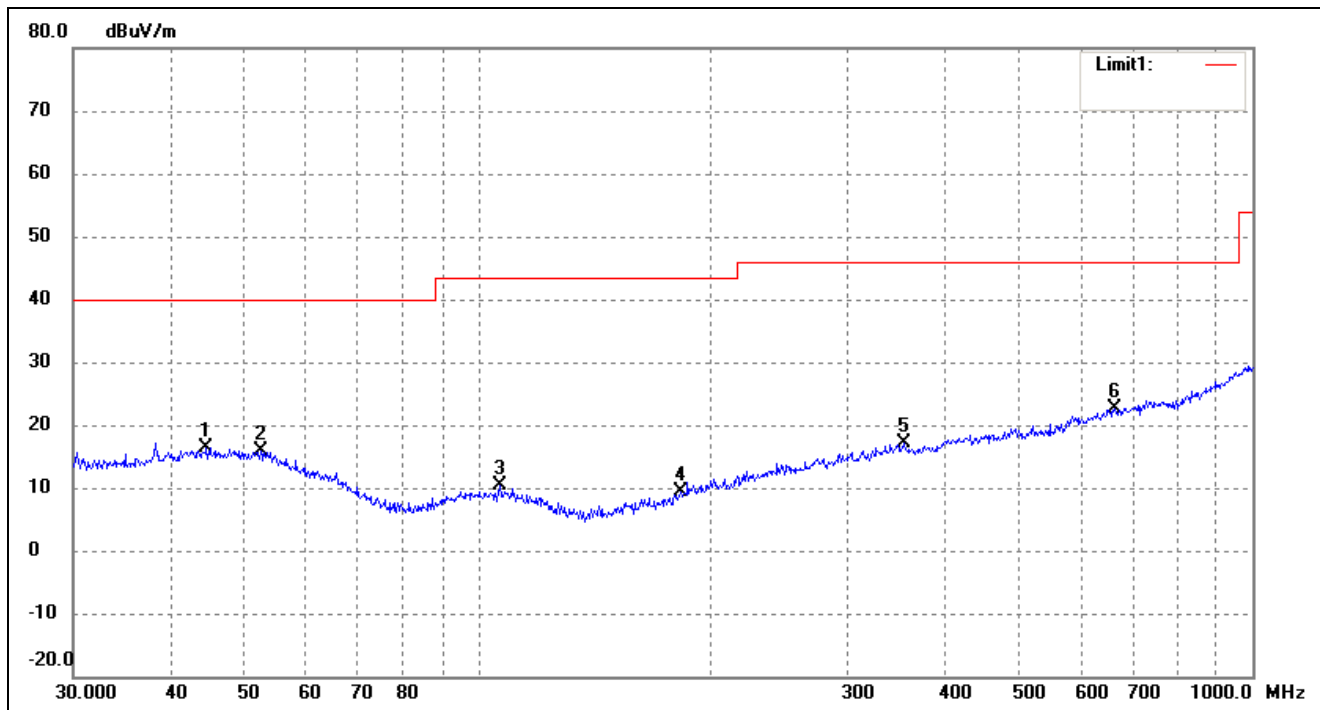

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	44.5868	24.40	-8.03	16.37	40.00	-23.63	peak
2	52.3913	24.44	-8.66	15.78	40.00	-24.22	peak
3	106.7587	24.96	-14.48	10.48	43.50	-33.02	peak
4	182.5592	24.22	-14.83	9.39	43.50	-34.11	peak
5	355.4273	25.29	-8.08	17.21	46.00	-28.79	peak
6	663.4729	25.73	-3.20	22.53	46.00	-23.47	peak

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

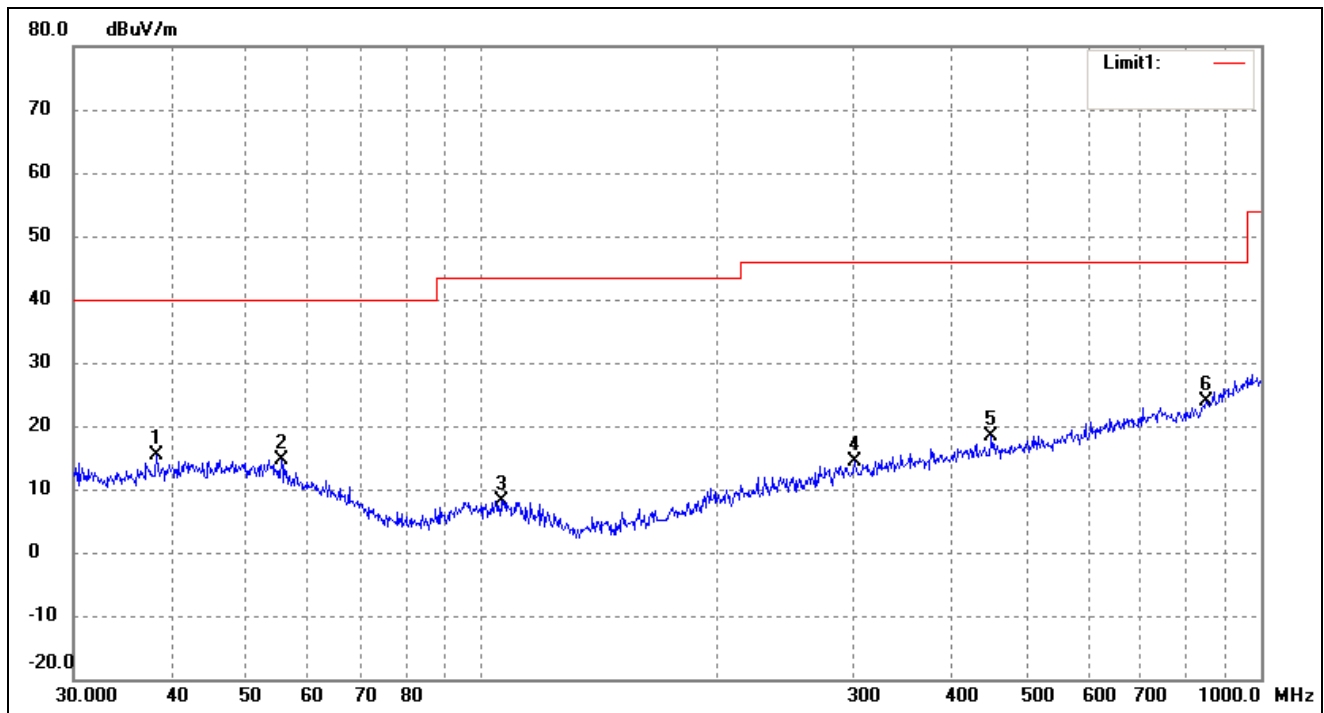

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.3462	24.01	-8.72	15.29	40.00	-24.71	peak
2	55.4147	24.04	-9.40	14.64	40.00	-25.36	peak
3	106.0126	22.62	-14.49	8.13	43.50	-35.37	peak
4	301.4224	23.64	-9.36	14.28	46.00	-31.72	peak
5	451.1350	25.43	-6.94	18.49	46.00	-27.51	peak
6	851.0353	24.02	-0.23	23.79	46.00	-22.21	peak

➤ Spurious Emissions Below 1GHz

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4804	60.05	-3.59	56.46	74	-17.54	H	PK
4804	38	-3.59	34.41	54	-19.59	H	AV
7206	59.96	-0.52	59.44	74	-14.56	H	PK
7206	40.08	-0.52	39.56	54	-14.44	H	AV
4804	61.22	-3.59	57.63	74	-16.37	V	PK
4804	41.74	-3.59	38.15	54	-15.85	V	AV
7206	59.05	-0.52	58.53	74	-15.47	V	PK
7206	40.79	-0.52	40.27	54	-13.73	V	AV
Middle Channel-2440MHz							
4882	60.78	-3.49	57.29	74	-16.71	H	PK
4882	41.1	-3.49	37.61	54	-16.39	H	AV
7323	61.8	-0.47	61.33	74	-12.67	H	PK
7323	38.84	-0.47	38.37	54	-15.63	H	AV
4882	59.9	-3.49	56.41	74	-17.59	V	PK
4882	41.28	-3.49	37.79	54	-16.21	V	AV
7323	61.28	-0.47	60.81	74	-13.19	V	PK
7323	41.32	-0.47	40.85	54	-13.15	V	AV
High Channel-2480MHz							
4960	60.83	-3.41	57.42	74	-16.58	H	PK
4960	40.77	-3.41	37.36	54	-16.64	H	AV
7440	58.94	-0.42	58.52	74	-15.48	H	PK
7440	38.55	-0.42	38.13	54	-15.87	H	AV
4960	61.87	-3.41	58.46	74	-15.54	V	PK
4960	39.71	-3.41	36.3	54	-17.7	V	AV
7440	61.72	-0.42	61.3	74	-12.7	V	PK
7440	41.09	-0.42	40.67	54	-13.33	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074 D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:


1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW $\geq$ 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots


➤ Radiated test

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

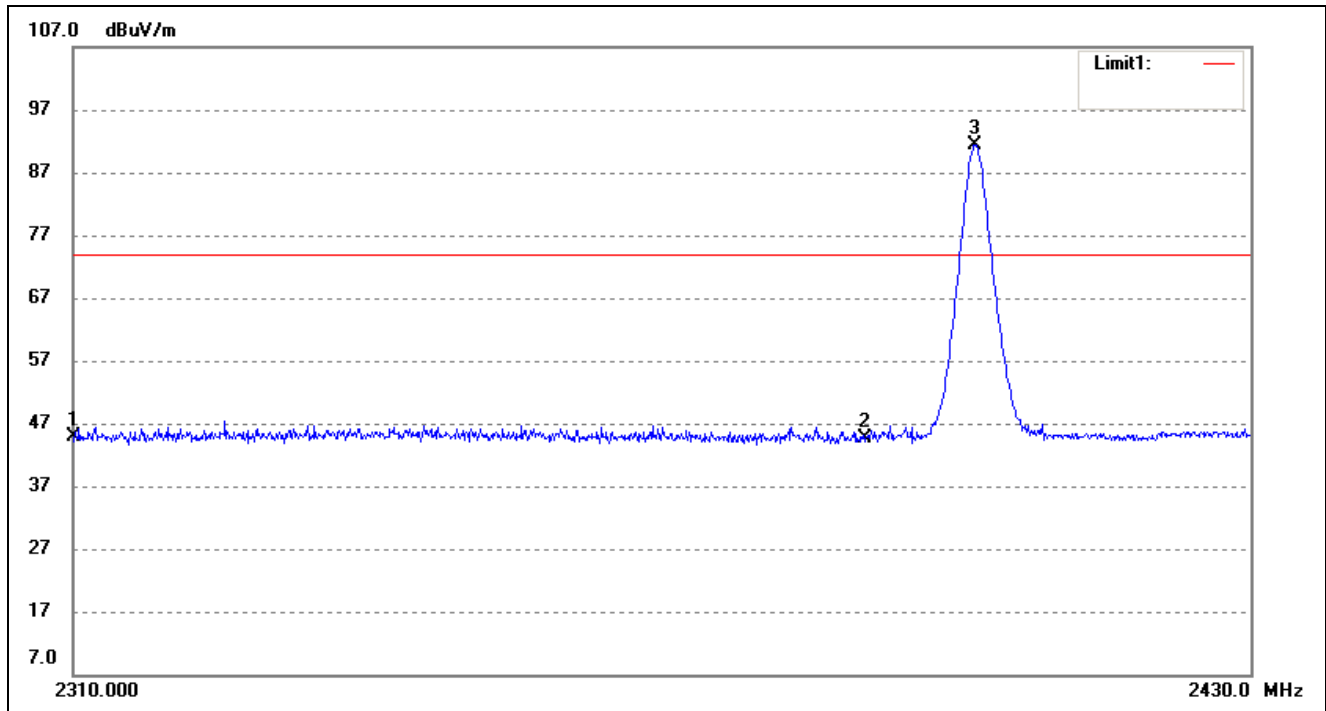


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	52.69	-7.78	44.91	74.00	-29.09	peak
2	2390.000	52.03	-7.32	44.71	74.00	-29.29	peak
3	2401.373	98.61	-7.25	91.36	74.00	17.36	peak

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

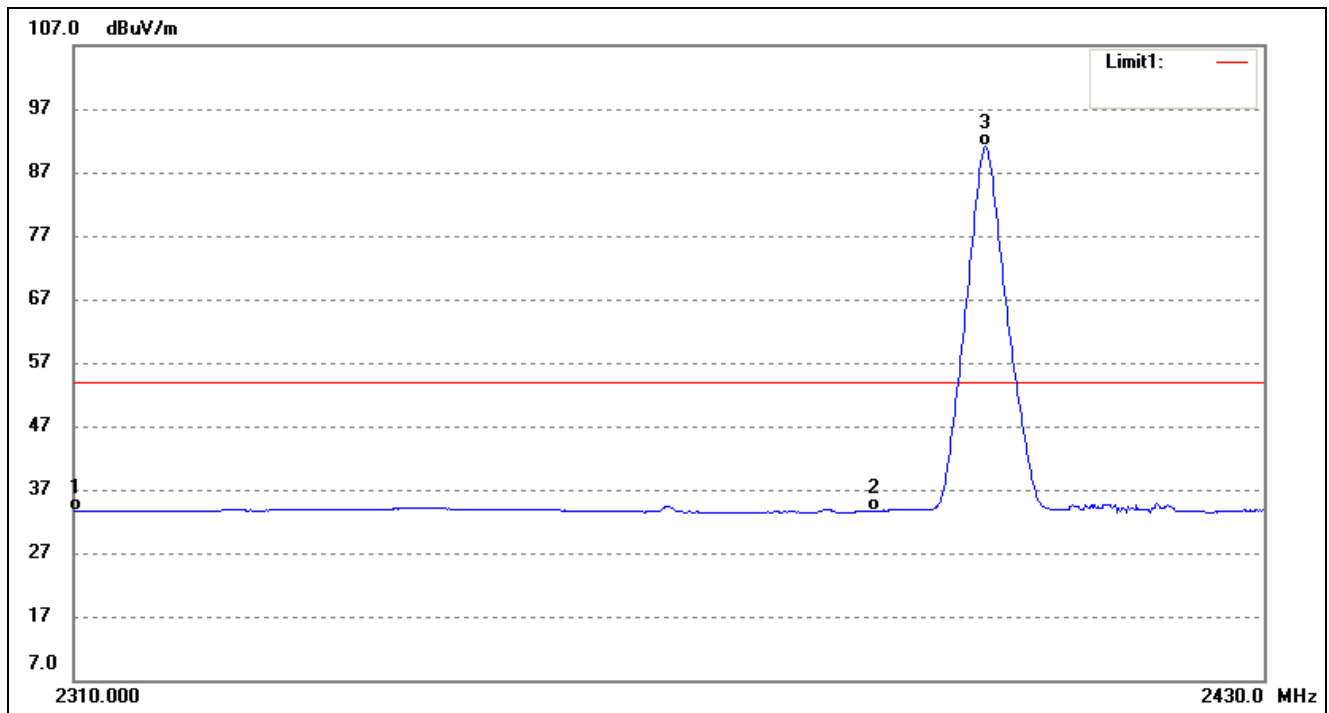


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.37	-7.78	33.59	54.00	-20.41	AVG
2	2390.000	40.99	-7.32	33.67	54.00	-20.33	AVG
3	2401.373	98.40	-7.25	91.15	54.00	37.15	AVG

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

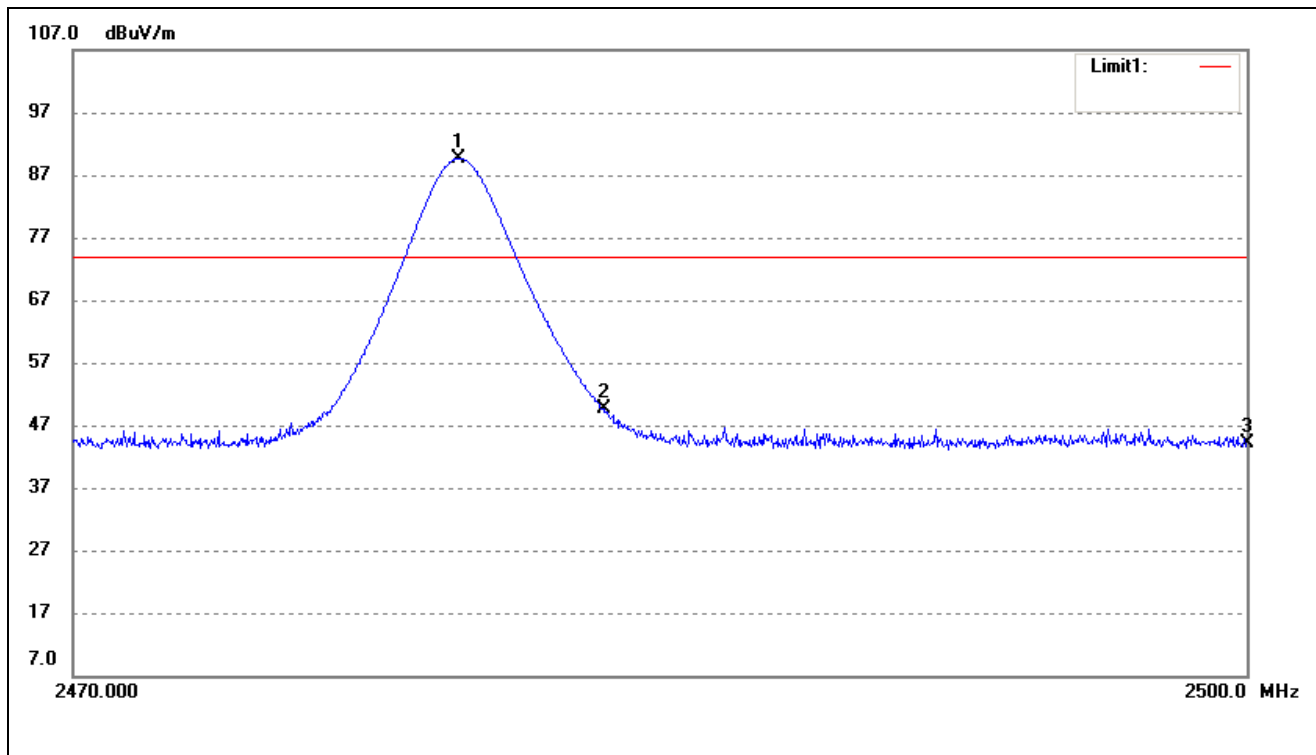


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.830	96.43	-6.79	89.64	74.00	15.64	peak
2	2483.500	56.45	-6.77	49.68	74.00	-24.32	peak
3	2500.000	50.84	-6.67	44.17	74.00	-29.83	peak

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------


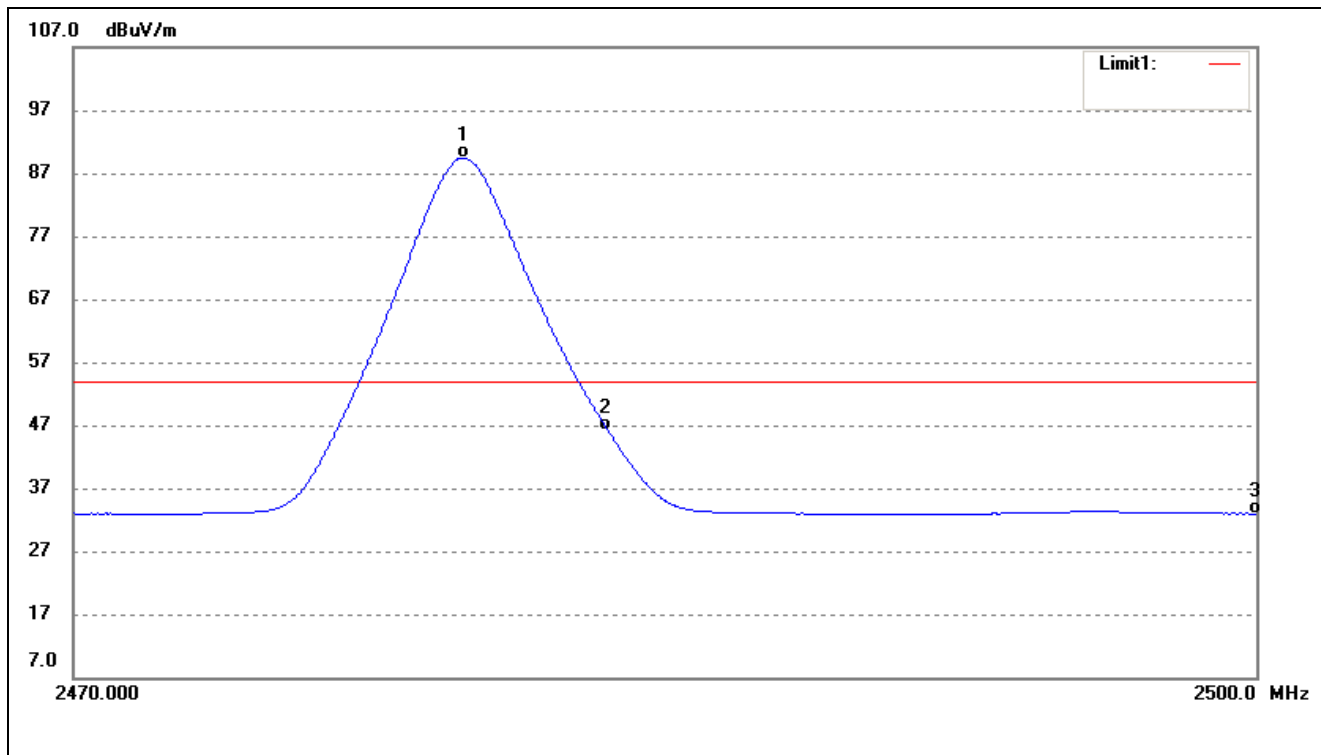


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.860	96.25	-6.79	89.46	54.00	35.46	AVG
2	2483.500	52.90	-6.77	46.13	54.00	-7.87	AVG
3	2500.000	39.64	-6.67	32.97	54.00	-21.03	AVG



➤ Conducted test

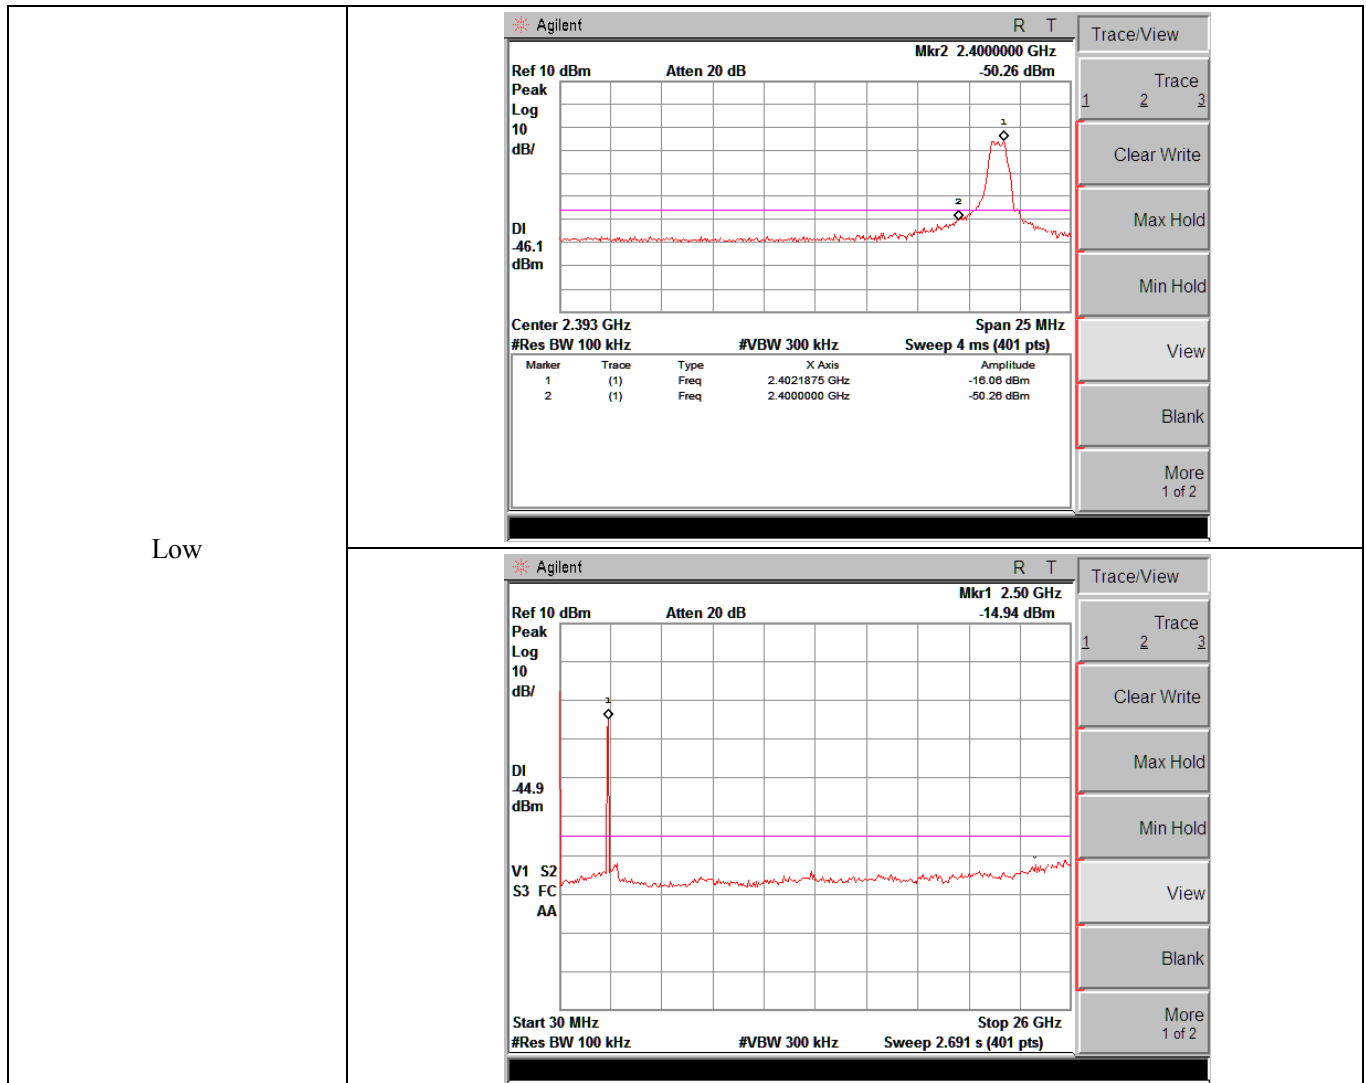

Middle

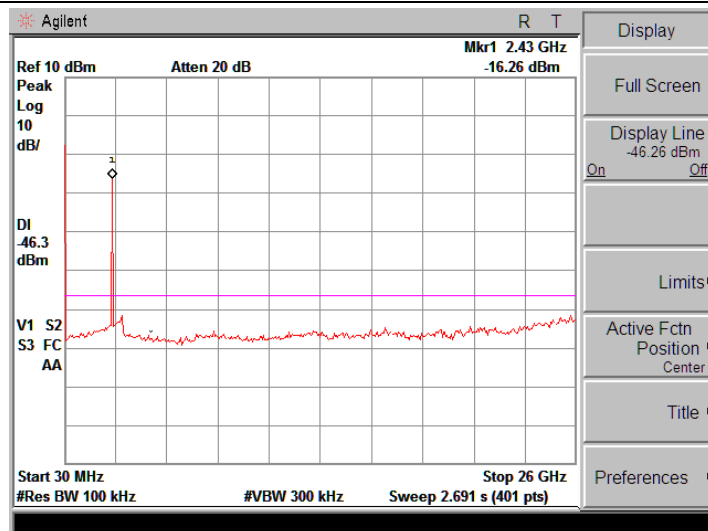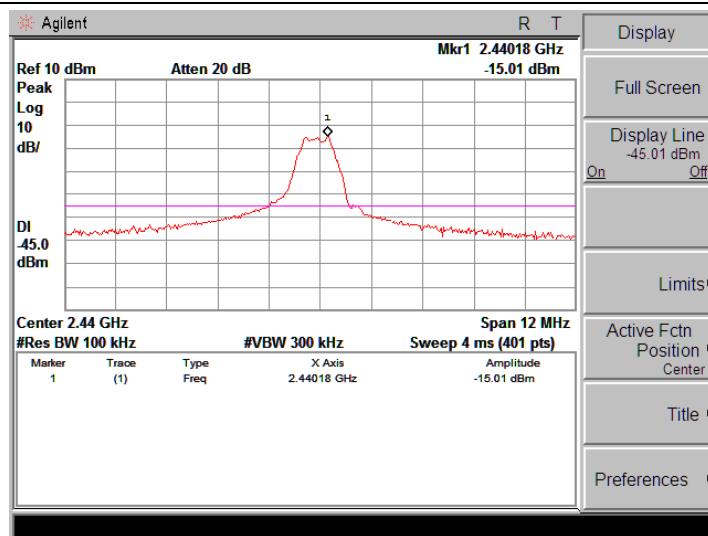

High

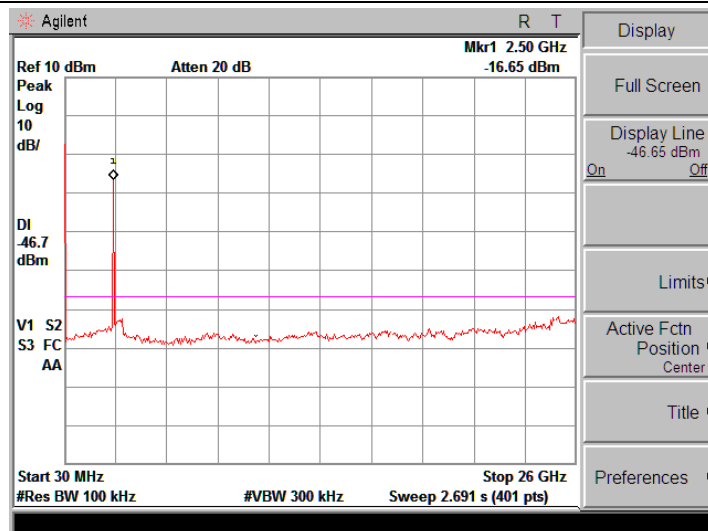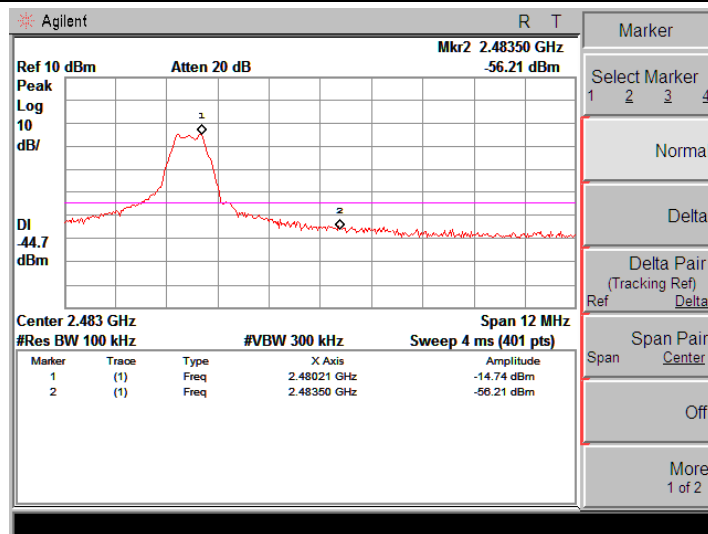


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

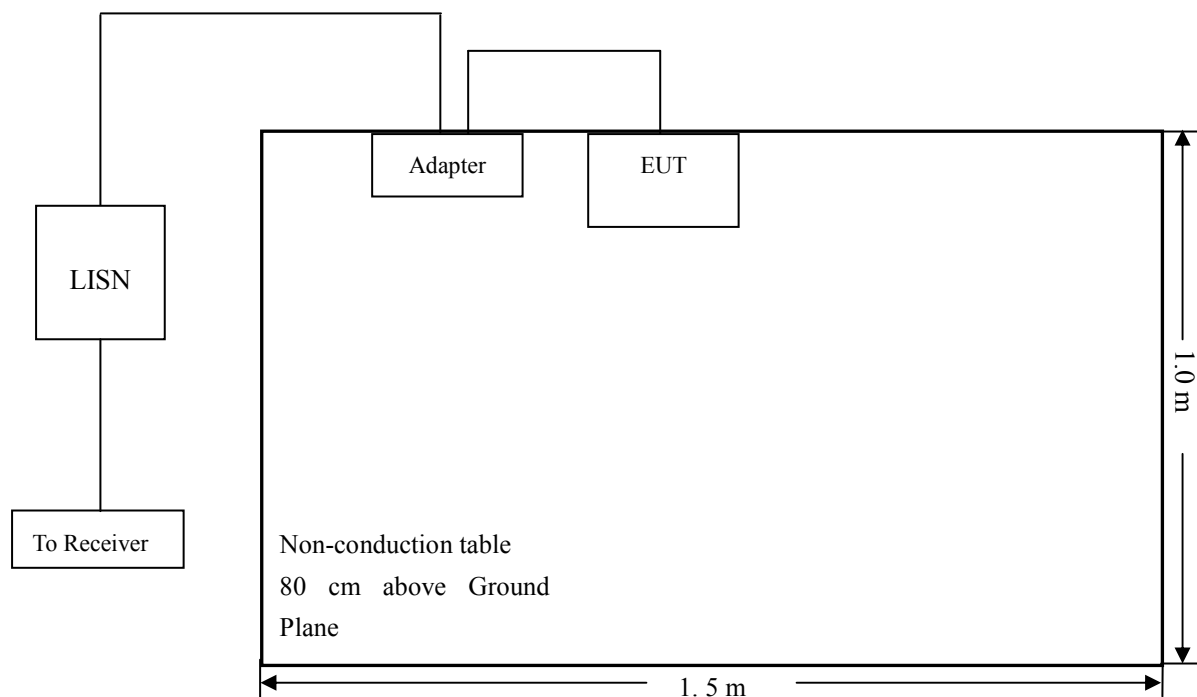


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

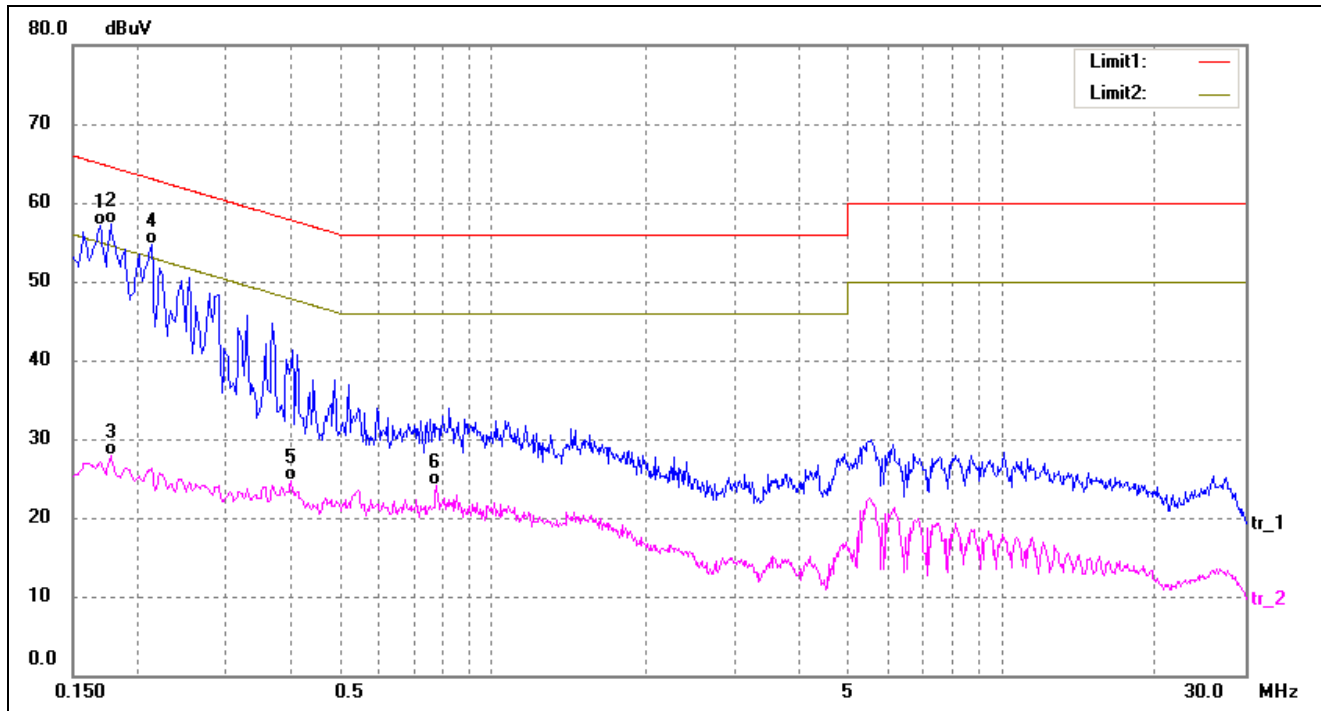

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	47.08	10.11	57.19	64.96	-7.77	QP
2	0.1780	47.10	10.11	57.21	64.58	-7.37	QP
3	0.1780	17.76	10.11	27.87	54.58	-26.71	AVG
4	0.2140	44.62	10.13	54.75	63.05	-8.30	QP
5	0.4020	14.40	10.25	24.65	47.81	-23.16	AVG
6	0.7780	13.66	10.42	24.08	46.00	-21.92	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

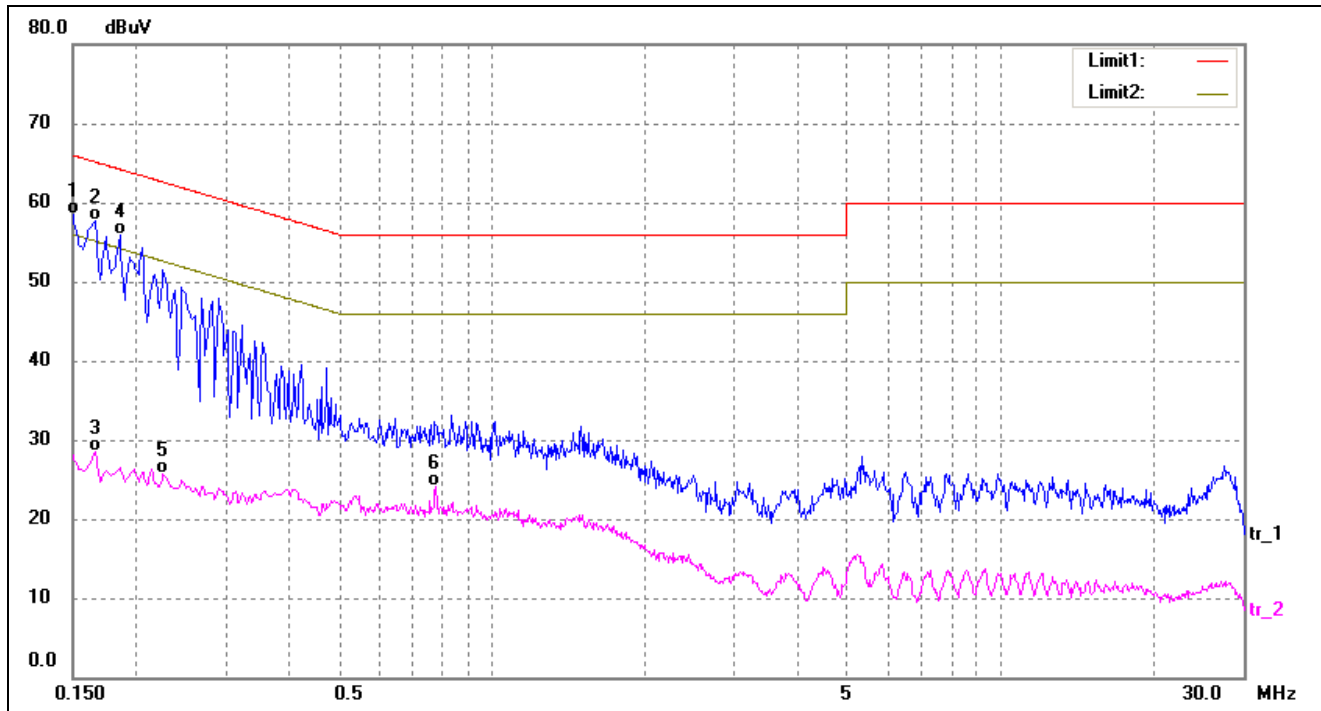

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	48.41	10.10	58.51	66.00	-7.49	QP
2	0.1660	47.52	10.11	57.63	65.16	-7.53	QP
3	0.1660	18.40	10.11	28.51	55.16	-26.65	AVG
4	0.1860	45.70	10.11	55.81	64.21	-8.40	QP
5	0.2260	15.47	10.14	25.61	52.60	-26.99	AVG
6	0.7780	13.64	10.42	24.06	46.00	-21.94	AVG

***** END OF REPORT *****