



FCC TEST REPORT

REPORT NO.: RF930519L06

MODEL NO.: CG-WLUSB2GTST

RECEIVED: May 19, 2004

TESTED: May 20 ~ June 3, 2004

APPLICANT: Alpha Networks Inc.

ADDRESS: No.8, Li-shing 7th Rd., Science-based
Industrial Park, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 19, Hwa Ya 2nd Rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 85 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST	9
4	TEST TYPES AND RESULTS	10
4.1	CONDUCTED EMISSION MEASUREMENT	10
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	10
4.1.2	TEST INSTRUMENTS	10
4.1.3	TEST PROCEDURES	11
4.1.4	DEVIATION FROM TEST STANDARD	11
4.1.5	TEST SETUP	12
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS (A)	14
4.1.8	TEST RESULTS (B)	20
4.1.9	TEST RESULTS (C)	26
4.2	RADIATED EMISSION MEASUREMENT	32
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	32
4.2.2	TEST INSTRUMENTS	33
4.2.3	TEST PROCEDURES	34
4.2.4	DEVIATION FROM TEST STANDARD	34
4.2.5	TEST SETUP	35
4.2.6	EUT OPERATING CONDITIONS	35
4.2.7	TEST RESULTS (A)	36
4.2.8	TEST RESULTS (B)	37
4.2.9	TEST RESULTS (C)	38
4.2.10	TEST RESULTS	39
4.3	6dB BANDWIDTH MEASUREMENT	45
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	45
4.3.2	TEST INSTRUMENTS	45
4.3.3	TEST PROCEDURE	46



4.3.4	DEVIATION FROM TEST STANDARD	46
4.3.5	TEST SETUP	46
4.3.6	EUT OPERATING CONDITIONS	46
4.3.7	TEST RESULTS	47
4.4	MAXIMUM PEAK OUTPUT POWER	55
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	55
4.4.2	TEST INSTRUMENTS	55
4.4.3	TEST PROCEDURES	56
4.4.4	DEVIATION FROM TEST STANDARD	56
4.4.5	TEST SETUP	56
4.4.6	EUT OPERATING CONDITIONS	56
4.4.7	TEST RESULTS	57
4.5	POWER SPECTRAL DENSITY MEASUREMENT	58
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	58
4.5.2	TEST INSTRUMENTS	58
4.5.3	TEST PROCEDURE	59
4.5.4	DEVIATION FROM TEST STANDARD	59
4.5.5	TEST SETUP	59
4.5.6	EUT OPERATING CONDITIONS	59
4.5.7	TEST RESULTS	60
4.6	BAND EDGES MEASUREMENT	68
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	68
4.6.2	TEST INSTRUMENTS	68
4.6.3	TEST PROCEDURE	68
4.6.4	DEVIATION FROM TEST STANDARD	68
4.6.5	EUT OPERATING CONDITION	68
4.6.6	TEST RESULTS	69
4.7	ANTENNA REQUIREMENT	78
4.7.1	STANDARD APPLICABLE	78
4.7.2	ANTENNA CONNECTED CONSTRUCTION	78
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	79
6	INFORMATION ON THE TESTING LABORATORIES	85



1 CERTIFICATION

PRODUCT : 802.11g USB Adapter
BRAND NAME : corega K.K
MODEL NO. : CG-WLUSB2GTST
APPLICANT : Alpha Networks Inc.
TESTED : May 20 ~ June 3, 2004
TEST ITEM : Engineering Sample
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY: Wendy Liao , **DATE:** June 7, 2004
Wendy Liao
APPROVED BY: Cody Chang , **DATE:** June 7, 2004
Cody Chang /
Supervisor

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.09dB at 0.162MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.87dB at 100.00MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

NOTE: The information of measurement uncertainty is available upon the customer's request.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11g USB Adapter
MODEL NO.	CG-WLUSB2GTST
POWER SUPPLY	5Vdc from host equipment
MODULATION TYPE	BPSK, QPSK, CCK, 16QAM, 64QAM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	18.00dBm
ANTENNA TYPE	Chip antenna with 0dBi gain
DATA CABLE	Long cable: 1.5m nonshielded USB cable Short cable: 0.205m shielded USB cable
I/O PORTS	USB
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
2. The EUT complies with IEEE 802.11g draft standards and backwards compatible with IEEE 802.11b products.
3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. From our experience and technical viewpoint, we have chosen data rates 11Mbps for CCK technique and 6Mbps for OFDM technique, as the worst cases for the test among other data rates.
4. For conduction and radiation emission measurement below 1GHz test, there are three test results presented in the following sections:
The test result A was for the EUT plug-in host equipment directly, and the test result B was tested for the EUT with short USB cable, and the test result C was for the EUT with long USB cable.
5. For radiation emission measurement above 1GHz test, we found the worst case appear when the EUT was connected with long USB cable after pretested, therefore only the test data were recorded in this report.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an 802.11g USB Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4: 2001

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	Compaq	N800C	470048-515	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY054147	FCC DoC Approved
3	600 Ω LOAD	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable without core
3	NA


NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

Mode A

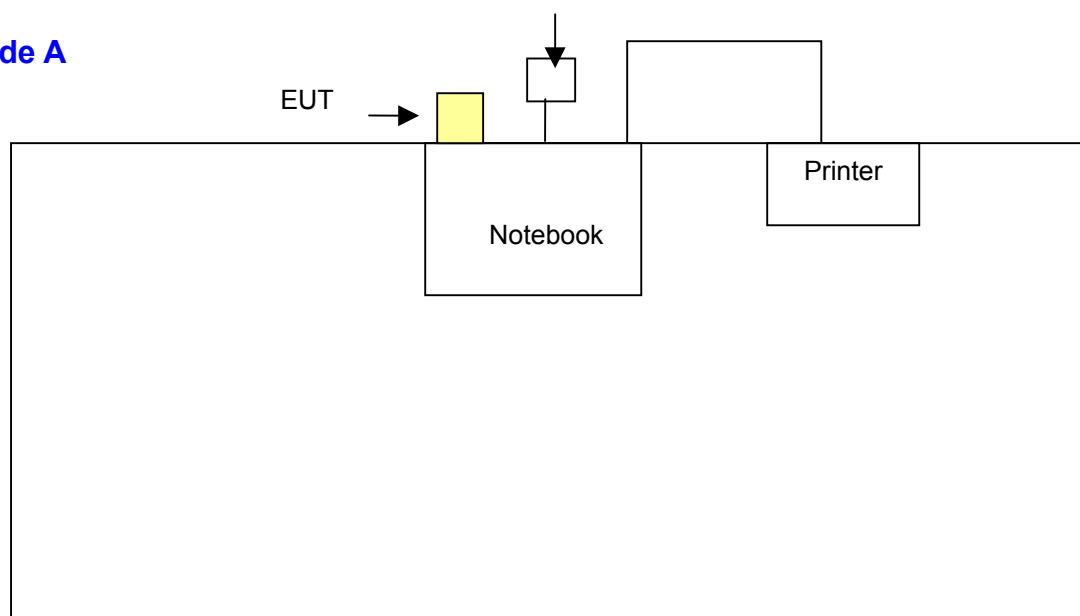

Mode B & C

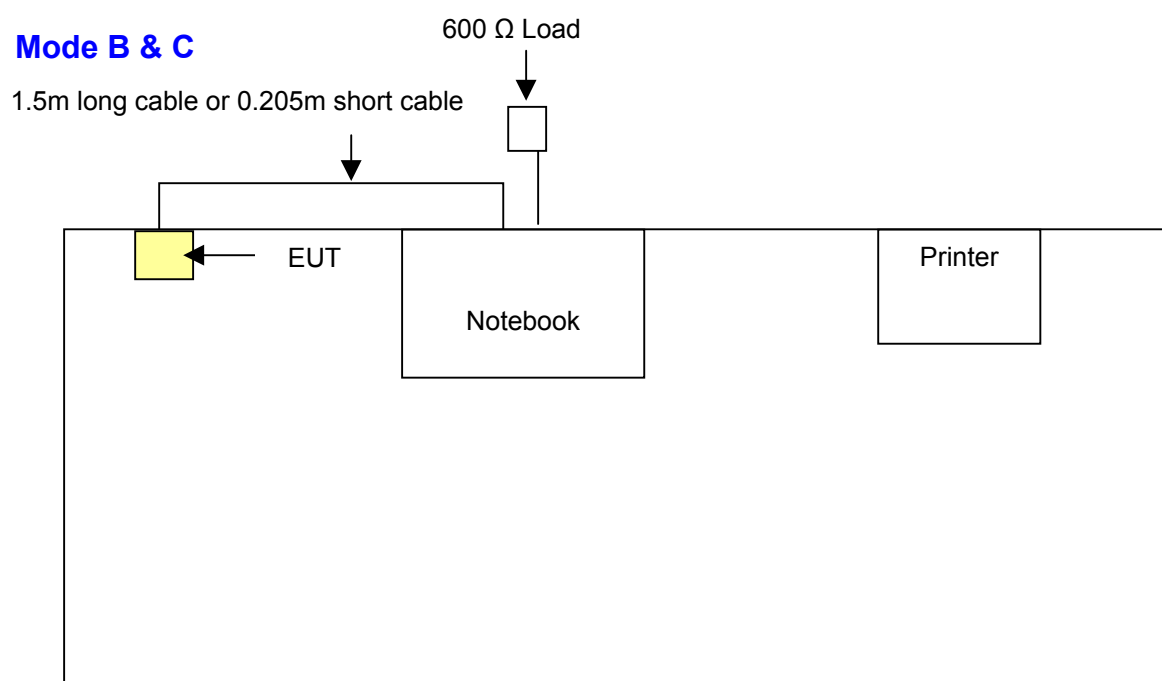

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Dec. 12, 2004
RF signal cable Woken	5D-FB	Cable-HYC01-01	Mar. 02, 2005
LISN ROHDE & SCHWARZ	ESH3-Z5	847265/023	Oct. 22, 2004
LISN ROHDE & SCHWARZ	ESH3-Z5	100220	Dec. 10, 2004
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels (Limit -20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

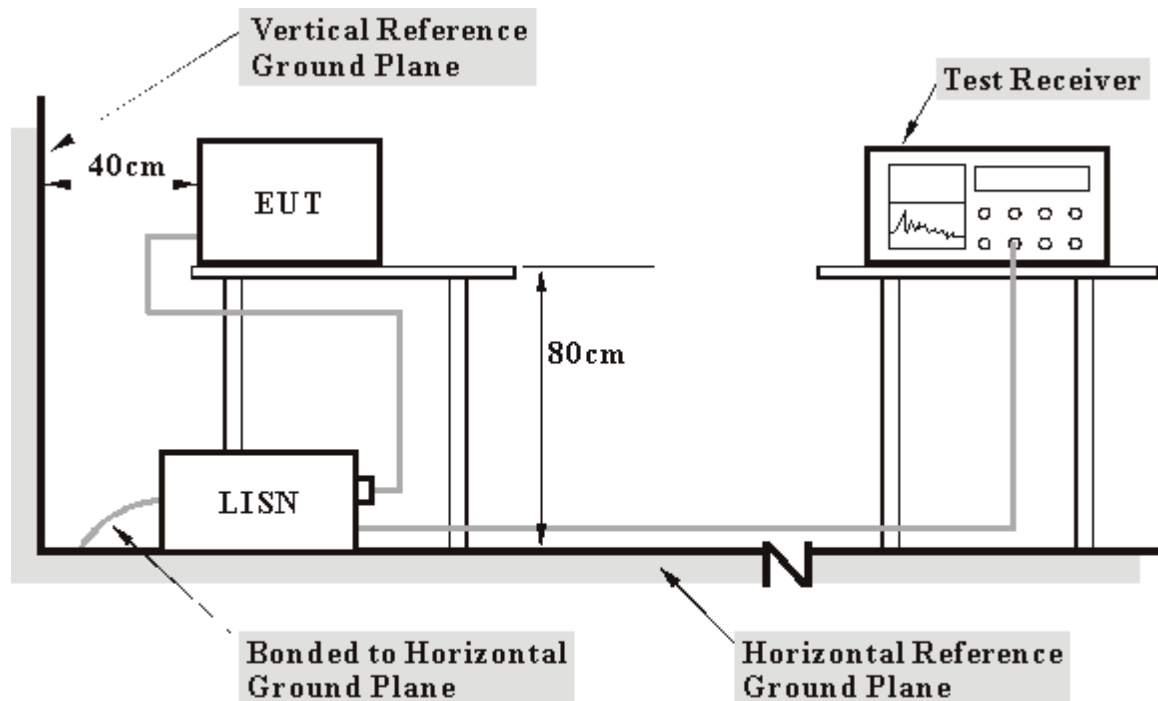

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.1.6 EUT OPERATING CONDITIONS


- a. Plug the EUT in a notebook system placed on a testing table.
- b. The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.
- d. The notebook system sent "H" messages to printer, and the printer printed them on paper.
- e. Steps c ~ d were repeated.

4.1.7 TEST RESULTS (A)

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.11	46.98	-	47.09	-	64.98	54.98	-17.89	-
2	0.197	0.12	40.49	-	40.61	-	63.74	53.74	-23.13	-
3	0.318	0.12	34.96	-	35.08	-	59.76	49.76	-24.68	-
4	0.427	0.13	31.68	-	31.81	-	57.30	47.30	-25.50	-
5	0.646	0.13	31.20	-	31.33	-	56.00	46.00	-24.67	-
6	8.691	0.30	28.40	-	28.70	-	60.00	50.00	-31.30	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

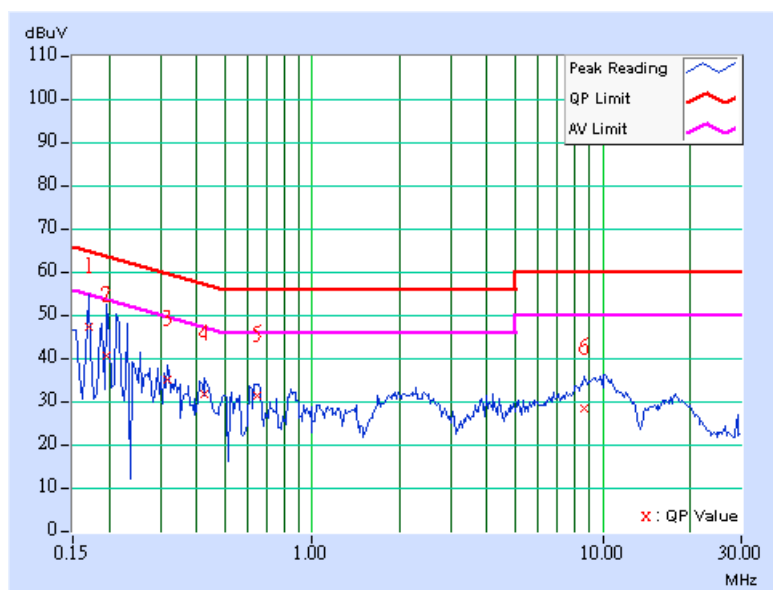

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	42.02	-	42.12	-	65.79	55.79	-23.67	-
2	0.216	0.11	45.08	-	45.19	-	62.96	52.96	-17.77	-
3	0.326	0.11	33.94	-	34.05	-	59.56	49.56	-25.50	-
4	0.658	0.12	28.81	-	28.93	-	56.00	46.00	-27.07	-
5	2.203	0.16	28.19	-	28.35	-	56.00	46.00	-27.65	-
6	10.504	0.32	29.89	-	30.21	-	60.00	50.00	-29.79	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

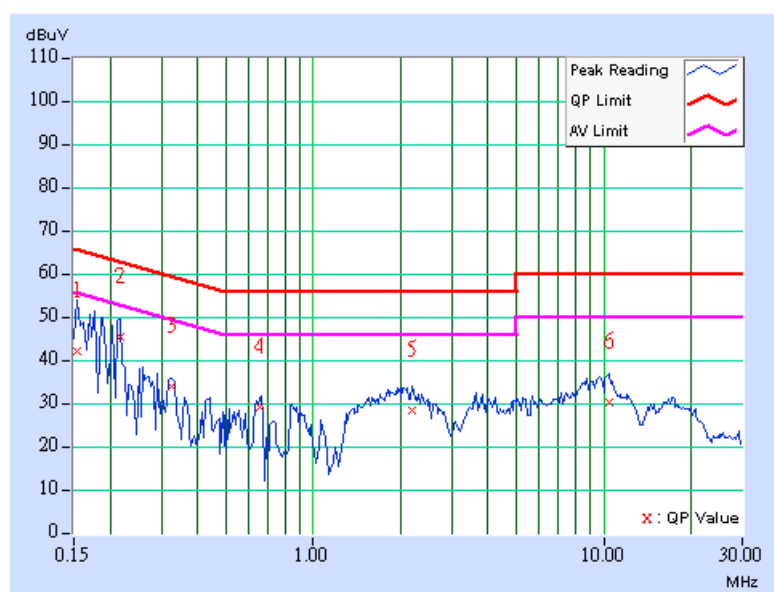

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.12	43.30	-	43.42	-	64.08	54.08	-20.66	-
2	0.244	0.12	37.04	-	37.16	-	61.97	51.97	-24.81	-
3	0.435	0.13	31.30	-	31.43	-	57.15	47.15	-25.73	-
4	0.654	0.13	31.46	-	31.59	-	56.00	46.00	-24.41	-
5	2.211	0.16	27.65	-	27.81	-	56.00	46.00	-28.19	-
6	10.086	0.31	30.82	-	31.13	-	60.00	50.00	-28.87	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

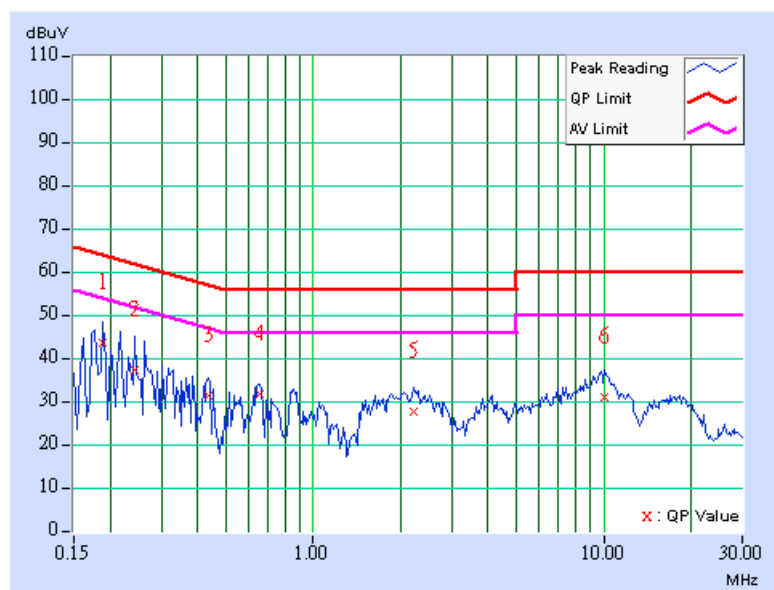

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.11	45.36	-	45.47	-	64.43	54.43	-18.96	-
2	0.267	0.11	34.18	-	34.29	-	61.20	51.20	-26.91	-
3	0.326	0.11	33.60	-	33.71	-	59.56	49.56	-25.84	-
4	0.673	0.12	25.48	-	25.60	-	56.00	46.00	-30.40	-
5	2.086	0.16	29.05	-	29.21	-	56.00	46.00	-26.79	-
6	9.816	0.28	30.64	-	30.92	-	60.00	50.00	-29.08	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

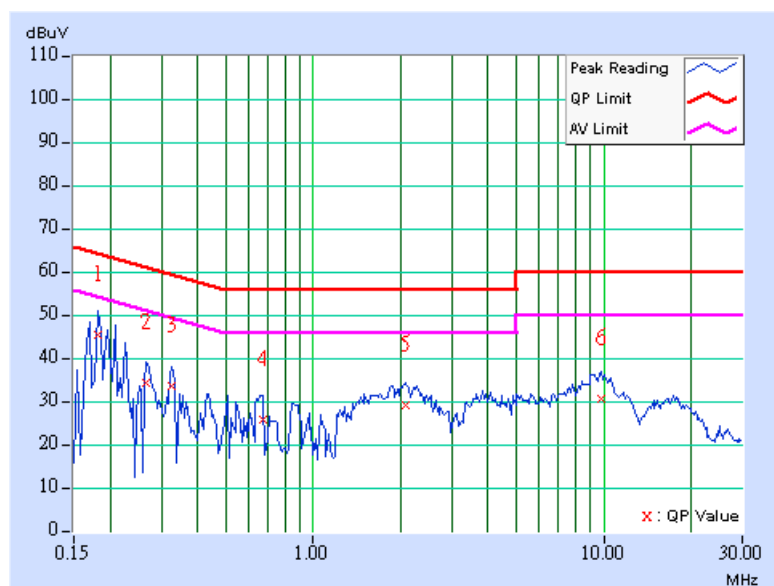

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.11	41.59	-	41.70	-	64.79	54.79	-23.09	-
2	0.220	0.12	43.60	-	43.72	-	62.81	52.81	-19.09	-
3	0.279	0.12	34.58	-	34.70	-	60.85	50.85	-26.15	-
4	0.650	0.13	31.42	-	31.55	-	56.00	46.00	-24.45	-
5	2.148	0.16	27.85	-	28.01	-	56.00	46.00	-27.99	-
6	9.656	0.30	31.06	-	31.36	-	60.00	50.00	-28.64	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

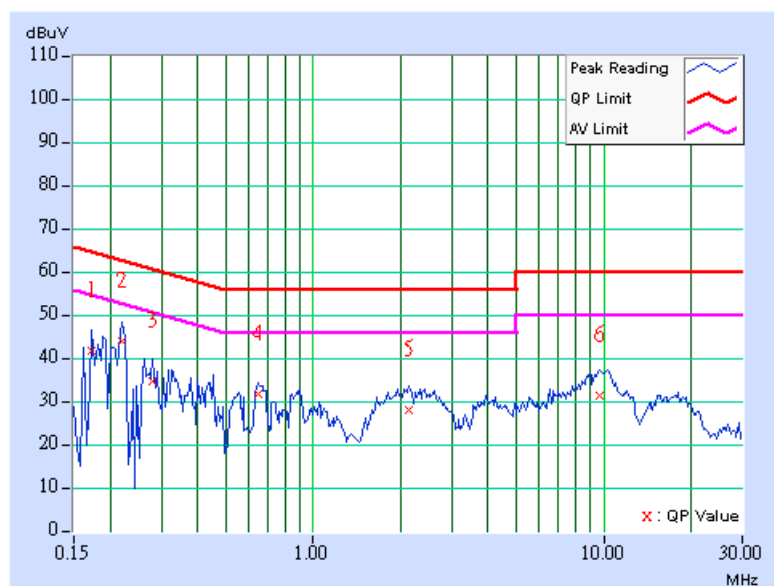

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.11	43.29	-	43.40	-	64.61	54.61	-21.21	-
2	0.216	0.11	44.79	-	44.90	-	62.96	52.96	-18.06	-
3	0.275	0.11	34.66	-	34.77	-	60.97	50.97	-26.19	-
4	0.338	0.11	32.59	-	32.70	-	59.26	49.26	-26.56	-
5	2.074	0.16	28.87	-	29.03	-	56.00	46.00	-26.97	-
6	10.109	0.29	31.00	-	31.29	-	60.00	50.00	-28.71	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

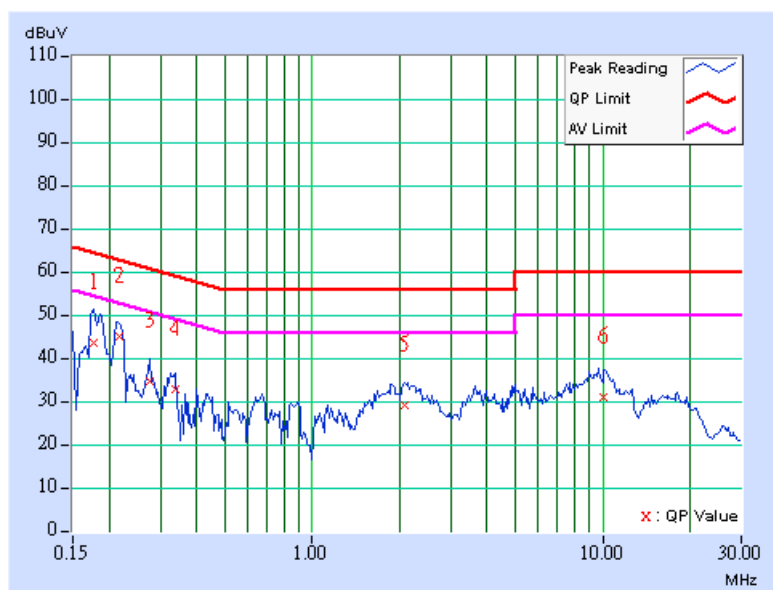


4.1.8 TEST RESULTS (B)

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.216	0.12	46.83	-	46.95	-	62.96	52.96	-16.01	-
2	0.431	0.13	39.39	-	39.52	-	57.23	47.23	-17.71	-
3	2.332	0.17	33.72	-	33.89	-	56.00	46.00	-22.11	-
4	4.816	0.23	31.17	-	31.40	-	56.00	46.00	-24.60	-
5	10.336	0.33	30.21	-	30.54	-	60.00	50.00	-29.46	-
6	13.246	0.61	36.31	-	36.92	-	60.00	50.00	-23.08	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

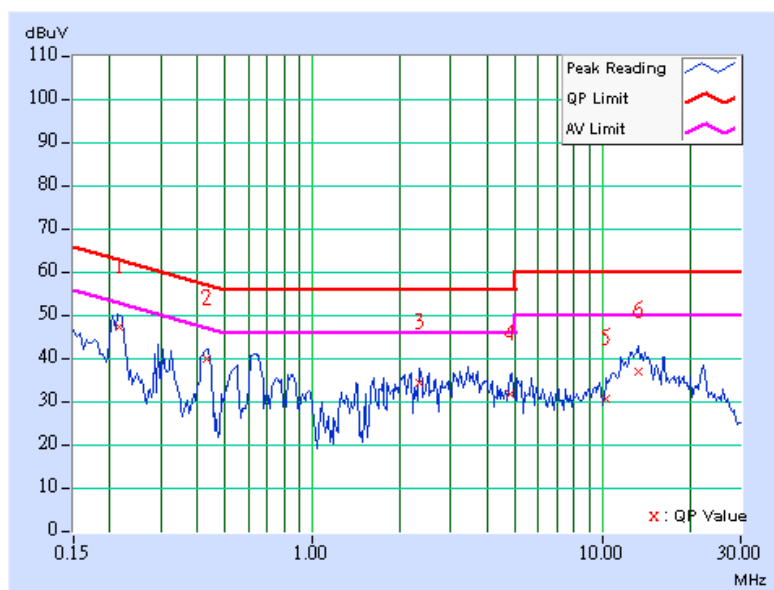

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.11	46.55	-	46.66	-	63.26	53.26	-16.60	-
2	0.431	0.12	38.29	-	38.41	-	57.23	47.23	-18.82	-
3	1.605	0.16	30.75	-	30.91	-	56.00	46.00	-25.09	-
4	3.434	0.19	29.14	-	29.33	-	56.00	46.00	-26.67	-
5	7.746	0.28	28.82	-	29.10	-	60.00	50.00	-30.90	-
6	13.434	0.53	35.28	-	35.81	-	60.00	50.00	-24.19	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

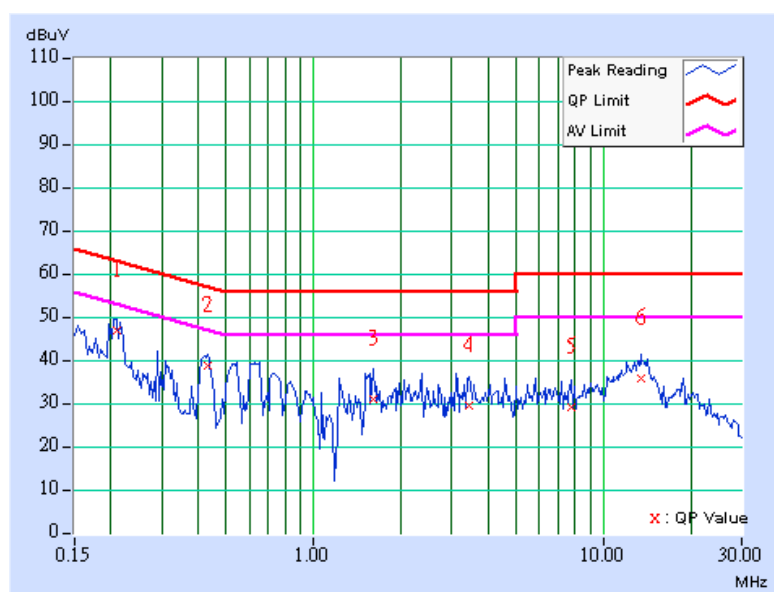

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY: Leo Hung	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	0.12	43.32	-	43.44	-	63.42	53.42	-19.98	-
2	0.439	0.13	39.55	-	39.68	-	57.08	47.08	-17.40	-
3	1.883	0.16	32.27	-	32.43	-	56.00	46.00	-23.57	-
4	3.250	0.19	31.58	-	31.77	-	56.00	46.00	-24.23	-
5	6.063	0.27	28.13	-	28.40	-	60.00	50.00	-31.60	-
6	12.617	0.55	35.24	-	35.79	-	60.00	50.00	-24.21	-


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

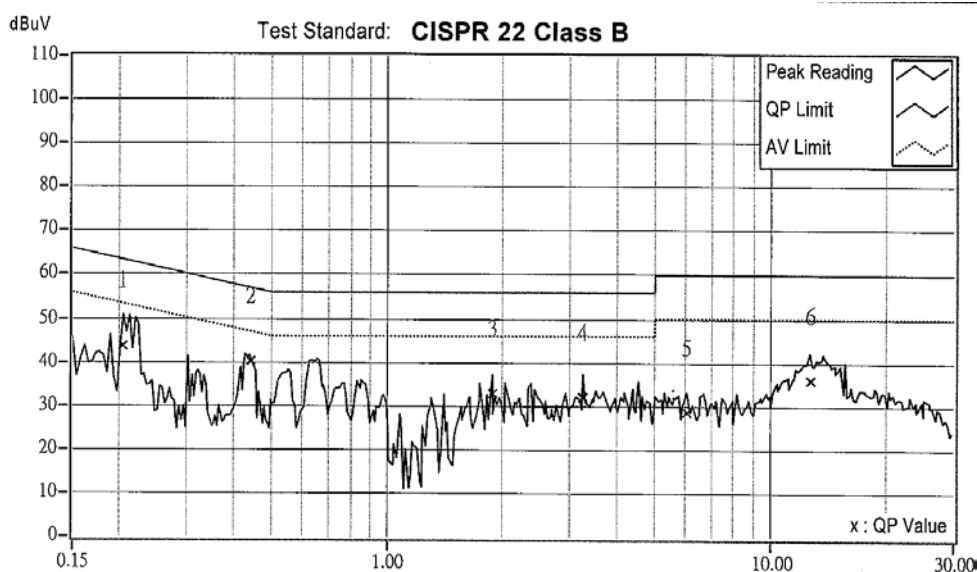

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY: Leo Hung	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.220	0.11	45.32	-	45.43	-	62.81	52.81	-17.38	-
2	0.431	0.12	38.57	-	38.69	-	57.23	47.23	-18.54	-
3	1.602	0.16	34.43	-	34.59	-	56.00	46.00	-21.41	-
4	3.449	0.19	32.44	-	32.63	-	56.00	46.00	-23.37	-
5	7.418	0.28	28.12	-	28.04	-	60.00	50.00	-31.60	-
6	13.523	0.53	35.22	-	35.75	-	60.00	50.00	-24.25	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

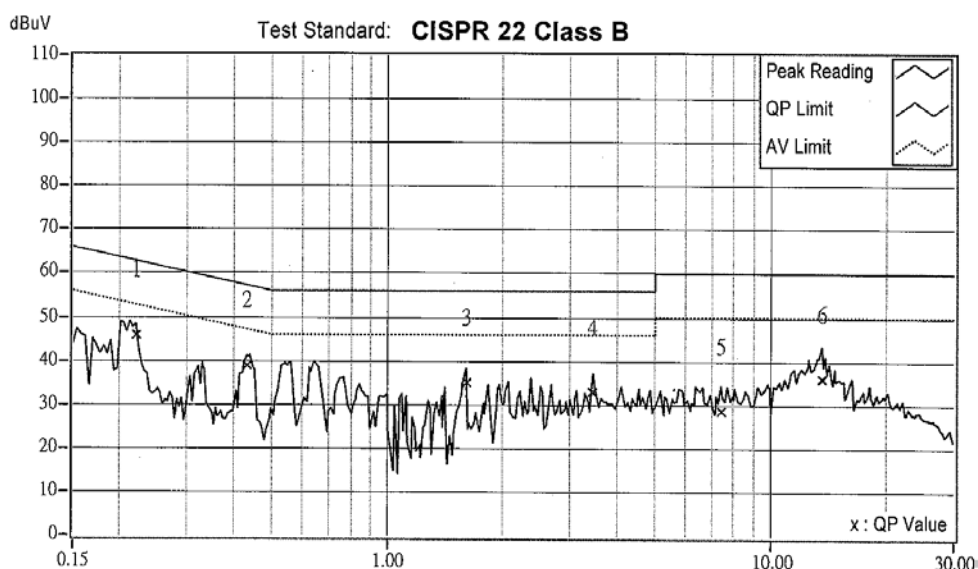

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY: Leo Hung	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.216	0.12	47.11	-	47.23	-	62.96	52.96	-15.73	-
2	0.435	0.13	38.96	-	39.09	-	57.15	47.15	-18.07	-
3	0.630	0.13	36.92	-	37.05	-	56.00	46.00	-18.95	-
4	1.625	0.16	33.36	-	33.52	-	56.00	46.00	-22.48	-
5	3.367	0.19	29.68	-	29.87	-	56.00	46.00	-26.13	-
6	12.117	0.50	28.46	-	28.96	-	60.00	50.00	-31.04	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

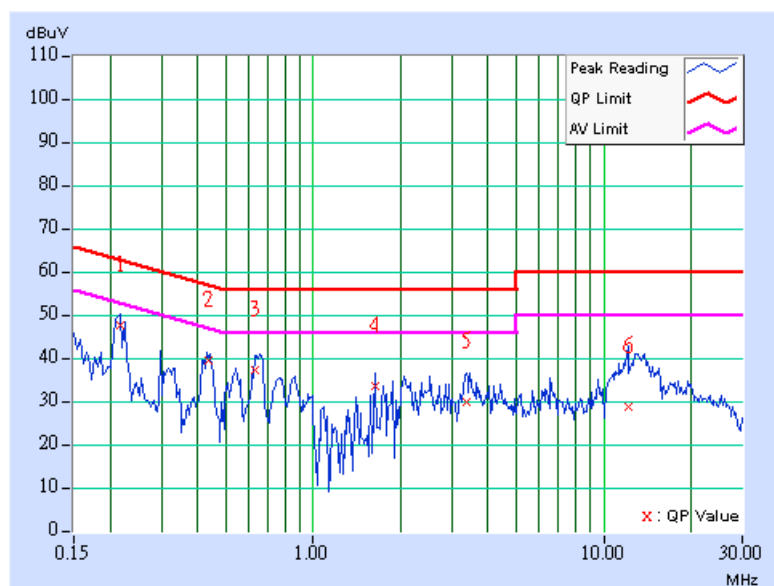

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 64% RH, 991 hPa	TESTED BY: Leo Hung	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.209	0.11	45.01	-	45.12	-	63.26	53.26	-18.14	-
2	0.431	0.12	38.63	-	38.75	-	57.23	47.23	-18.48	-
3	0.654	0.12	36.81	-	36.93	-	56.00	46.00	-19.07	-
4	1.621	0.16	34.98	-	35.14	-	56.00	46.00	-20.86	-
5	3.770	0.20	30.98	-	31.18	-	56.00	46.00	-24.82	-
6	13.137	0.51	35.07	-	35.58	-	60.00	50.00	-24.42	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

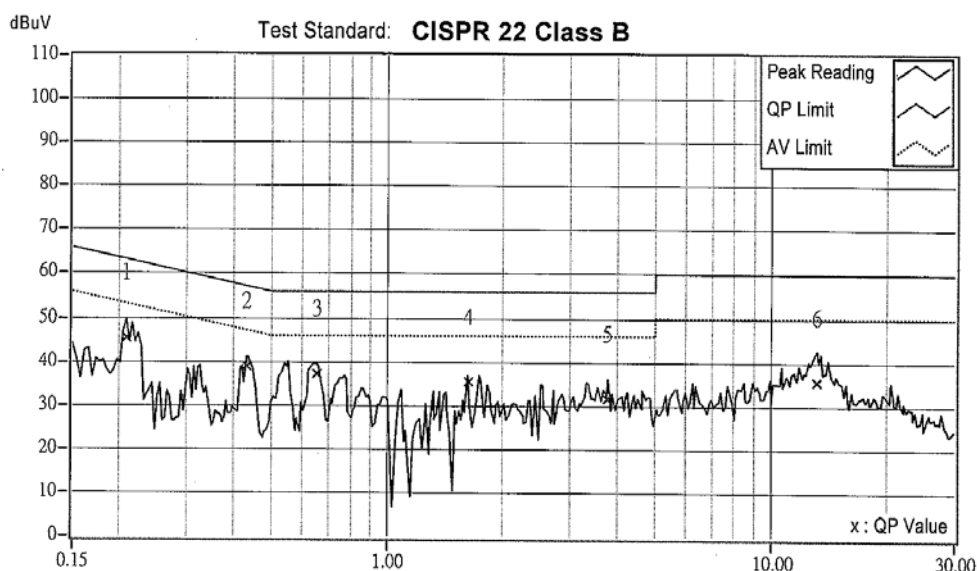


4.1.9 TEST RESULTS (C)

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.11	47.73	-	47.84	-	65.18	55.18	-17.34	-
2	0.269	0.12	42.81	-	42.93	-	61.14	51.14	-18.21	-
3	0.353	0.13	34.53	-	34.66	-	58.90	48.90	-24.24	-
4	0.951	0.15	29.13	-	29.28	-	56.00	46.00	-26.72	-
5	13.109	0.60	38.87	-	39.47	-	60.00	50.00	-20.53	-
6	20.613	1.04	31.93	-	32.97	-	60.00	50.00	-27.03	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

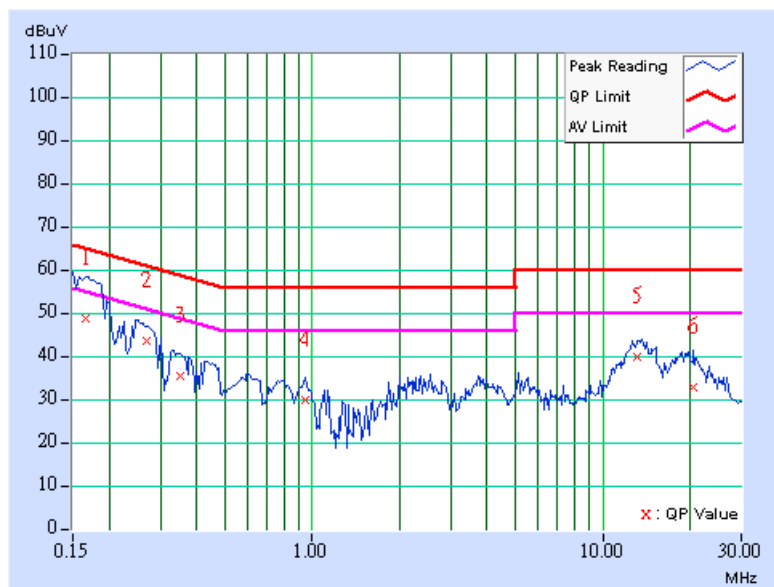

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	57.18	40.25	57.28	40.35	65.38	55.38	-8.09	-15.02
2	0.205	0.11	42.27	-	42.38	-	63.42	53.42	-21.04	-
3	0.255	0.11	42.88	-	42.99	-	61.59	51.59	-18.59	-
4	2.094	0.16	31.97	-	32.13	-	56.00	46.00	-23.87	-
5	13.105	0.50	38.32	-	38.82	-	60.00	50.00	-21.18	-
6	19.879	0.71	33.36	-	34.07	-	60.00	50.00	-25.93	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

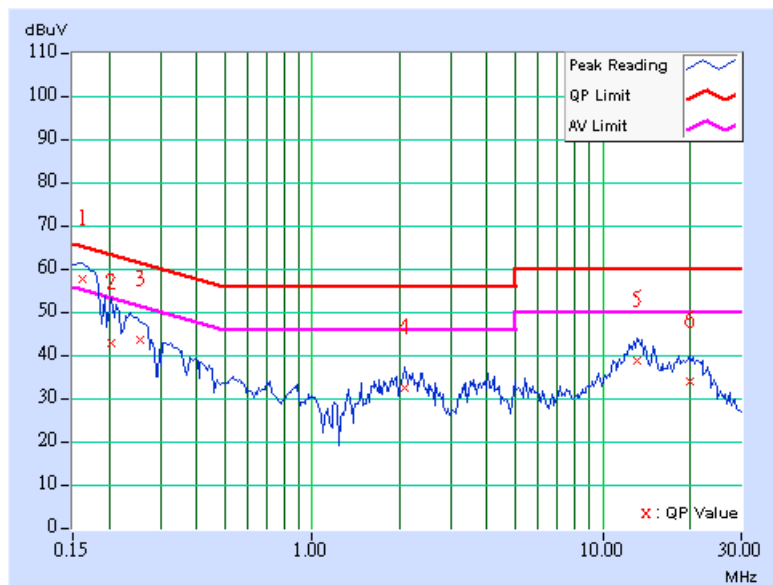

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.11	43.69	-	43.80	-	64.79	54.79	-20.99	-
2	0.284	0.12	41.46	-	41.58	-	60.71	50.71	-19.12	-
3	0.650	0.13	30.24	-	30.37	-	56.00	46.00	-25.63	-
4	4.016	0.21	31.13	-	31.34	-	56.00	46.00	-24.66	-
5	13.359	0.62	41.24	-	41.86	-	60.00	50.00	-18.14	-
6	19.098	0.98	32.60	-	33.58	-	60.00	50.00	-26.42	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

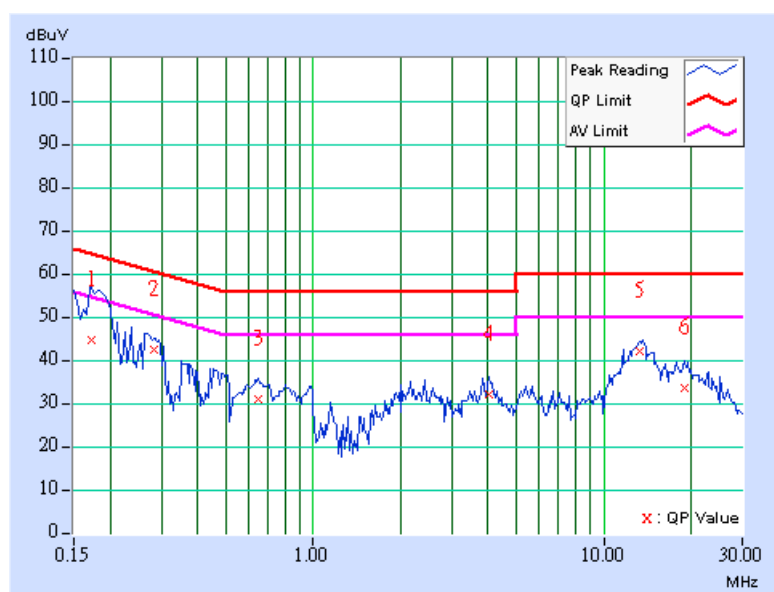

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.11	43.96	-	44.07	-	64.43	54.43	-20.36	-
2	0.500	0.12	34.63	-	34.75	-	56.00	46.00	-21.25	-
3	0.599	0.12	35.46	-	35.58	-	56.00	46.00	-20.42	-
4	2.203	0.16	32.40	-	32.56	-	56.00	46.00	-23.44	-
5	13.355	0.52	38.74	-	39.26	-	60.00	50.00	-20.74	-
6	16.141	0.66	29.61	-	30.27	-	60.00	50.00	-29.73	-


- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

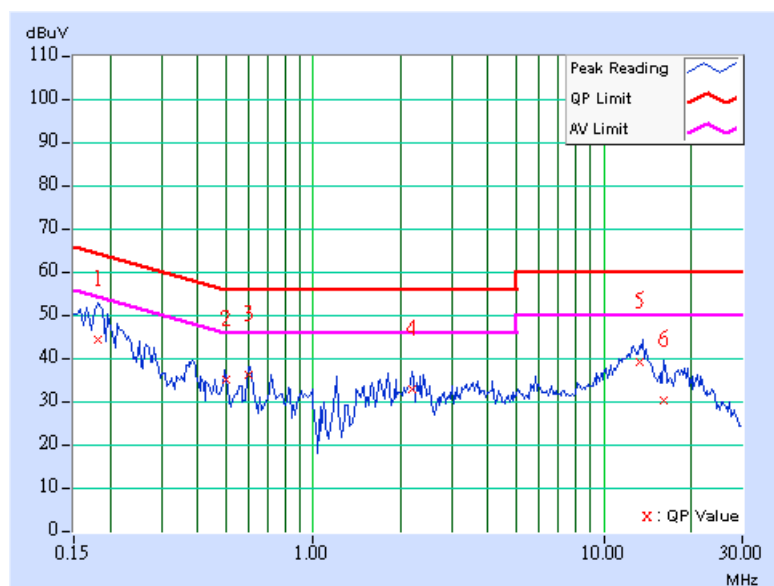

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.11	41.46	-	41.57	-	64.61	54.61	-23.04	-
2	0.302	0.12	30.82	-	30.94	-	60.18	50.18	-29.23	-
3	0.391	0.13	35.63	-	35.76	-	58.04	48.04	-22.28	-
4	0.603	0.13	36.82	-	36.95	-	56.00	46.00	-19.05	-
5	2.215	0.17	32.75	-	32.92	-	56.00	46.00	-23.08	-
6	13.602	0.65	39.21	-	39.86	-	60.00	50.00	-20.14	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

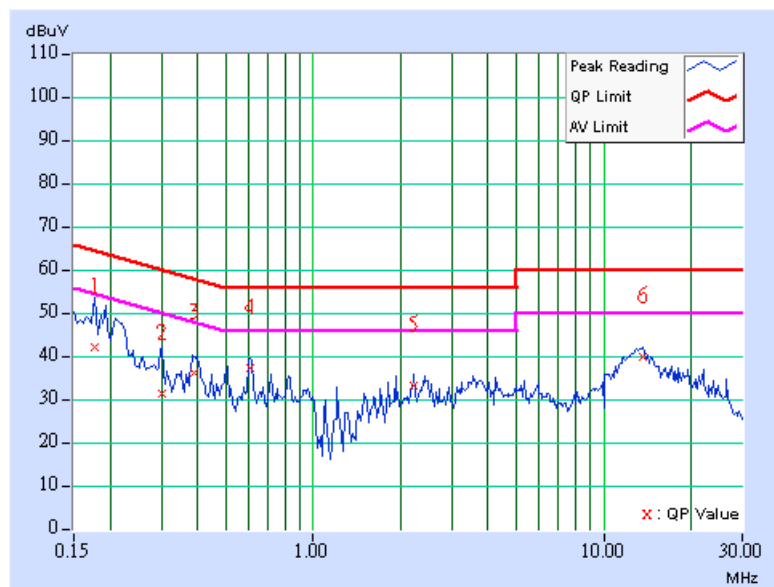

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.11	44.12	-	44.23	-	64.25	54.25	-20.02	-
2	0.384	0.12	35.88	-	36.00	-	58.18	48.18	-22.19	-
3	0.607	0.12	35.99	-	36.11	-	56.00	46.00	-19.89	-
4	1.215	0.15	33.61	-	33.76	-	56.00	46.00	-22.24	-
5	13.223	0.51	35.93	-	36.44	-	60.00	50.00	-23.56	-
6	18.879	0.69	28.74	-	29.43	-	60.00	50.00	-30.57	-

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

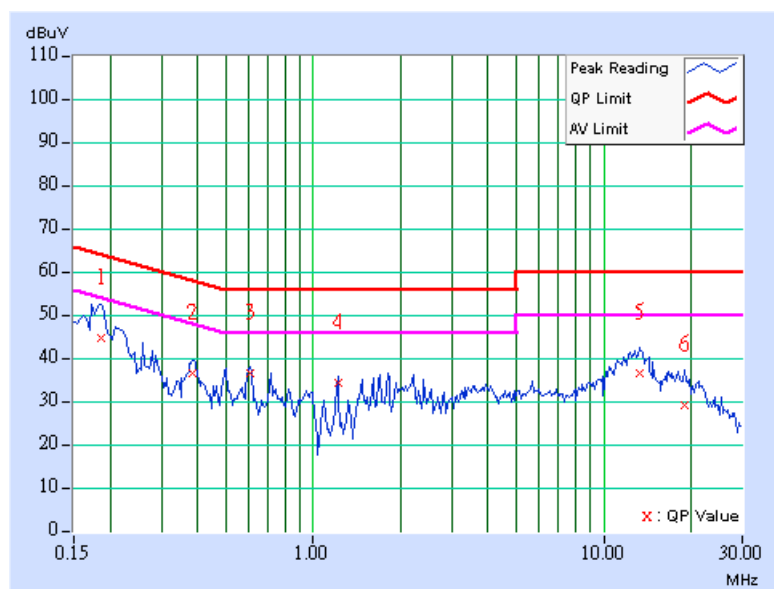

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Jan. 13, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2005
Preamplifier Agilent	8449B	3008A01961	Jan. 22, 2005
Preamplifier Agilent	8447D	2944A10629	Jan. 14, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Mar. 04, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 1.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

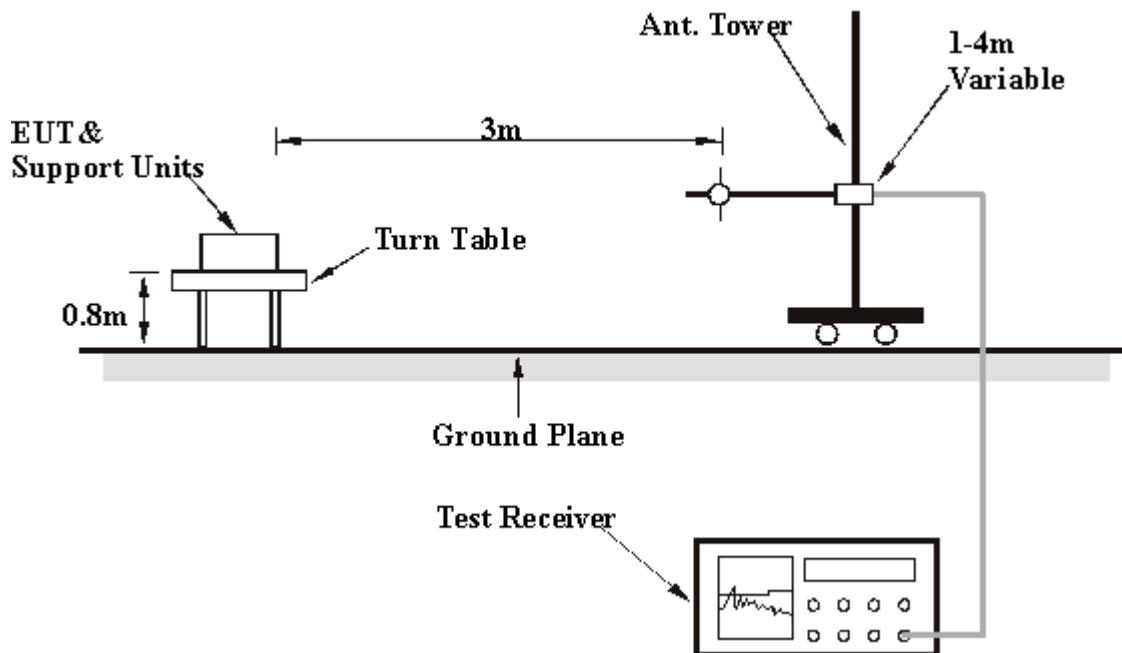

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS (A)

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	121.36	31.26 QP	43.50	-12.24	1.75 H	244	18.14	13.12
2	224.39	27.17 QP	46.00	-18.83	1.25 H	241	14.75	12.42
3	319.64	26.50 QP	46.00	-19.50	1.00 H	64	11.55	14.95
4	527.64	28.12 QP	46.00	-17.88	1.50 H	244	8.86	19.26
5	560.68	30.58 QP	46.00	-15.42	1.50 H	265	10.60	19.97
6	671.48	30.56 QP	46.00	-15.44	1.00 H	280	8.61	21.95
7	731.74	36.06 QP	46.00	-9.94	1.00 H	328	12.98	23.08
8	799.78	32.30 QP	46.00	-13.70	1.00 H	37	8.49	23.82
9	863.93	31.60 QP	46.00	-14.40	1.00 H	343	7.15	24.45

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.03	28.23 QP	43.50	-15.27	1.00 V	10	14.30	13.94
2	199.12	30.94 QP	43.50	-12.56	1.75 V	334	19.48	11.46
3	319.64	25.13 QP	46.00	-20.87	1.50 V	169	10.18	14.95
4	381.84	29.93 QP	46.00	-16.07	1.00 V	31	13.58	16.35
5	560.68	29.70 QP	46.00	-16.30	1.00 V	220	9.73	19.97
6	731.74	32.23 QP	46.00	-13.77	1.25 V	271	9.15	23.08
7	863.93	32.27 QP	46.00	-13.73	1.25 V	334	7.82	24.45
8	935.85	30.15 QP	46.00	-15.85	1.00 V	268	4.66	25.49

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.8 TEST RESULTS (B)

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 64% RH, 991 hPa	TESTED BY: Leo Hung	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.98	30.32 QP	43.50	-13.18	3.00 H	70	19.34	10.98
2	199.12	35.87 QP	43.50	-7.63	1.50 H	61	24.41	11.46
3	239.94	36.63 QP	46.00	-9.37	1.50 H	55	23.56	13.07
4	300.20	33.70 QP	46.00	-12.30	1.00 H	97	19.20	14.50
5	399.34	33.56 QP	46.00	-12.44	1.00 H	115	16.83	16.74
6	533.47	34.17 QP	46.00	-11.83	1.50 H	238	14.80	19.37
7	702.59	34.77 QP	46.00	-11.23	3.00 H	160	12.40	22.36
8	799.78	35.89 QP	46.00	-10.11	1.00 H	10	12.07	23.82

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	99.98	30.34 QP	43.50	-13.16	3.00 V	94	19.36	10.98
2	199.12	36.89 QP	43.50	-6.61	1.50 V	61	25.43	11.46
3	239.94	35.73 QP	46.00	-10.27	1.50 V	43	22.66	13.07
4	300.20	34.48 QP	46.00	-11.52	1.00 V	112	19.98	14.50
5	399.34	31.04 QP	46.00	-14.96	1.00 V	88	14.30	16.74
6	479.04	31.05 QP	46.00	-14.95	2.00 V	178	12.59	18.45
7	525.69	32.07 QP	46.00	-13.93	1.50 V	241	12.84	19.22
8	665.65	29.44 QP	46.00	-16.56	1.50 V	34	7.56	21.87
9	702.59	35.36 QP	46.00	-10.64	1.50 V	358	12.99	22.36
10	795.89	36.50 QP	46.00	-9.50	1.00 V	25	12.70	23.80

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.9 TEST RESULTS (C)

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	11	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120 Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 64% RH, 991 hPa	TESTED BY: Leo Hung	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	100.00	41.63 QP	43.50	-1.87	2.49 H	135	30.65	10.98
2	133.03	34.88 QP	43.50	-8.62	2.50 H	22	20.95	13.94
3	239.94	33.26 QP	46.00	-12.74	1.50 H	202	20.18	13.07
4	319.64	36.91 QP	46.00	-9.09	1.00 H	199	21.96	14.95
5	440.16	43.14 QP	46.00	-2.86	2.00 H	265	25.33	17.81
6	584.01	30.56 QP	46.00	-15.44	1.50 H	118	9.97	20.59
7	663.71	36.39 QP	46.00	-9.61	1.50 H	316	14.54	21.85
8	702.59	38.11 QP	46.00	-7.89	2.00 H	91	15.74	22.36
9	797.84	33.71 QP	46.00	-12.29	2.00 H	283	9.90	23.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	70.82	32.93 QP	40.00	-7.07	1.00 V	73	20.56	12.37
2	131.08	32.04 QP	43.50	-11.46	1.00 V	337	18.24	13.80
3	265.21	30.04 QP	46.00	-15.96	2.00 V	25	16.46	13.58
4	399.34	40.30 QP	46.00	-5.70	1.00 V	55	23.57	16.74
5	584.01	33.90 QP	46.00	-12.10	1.00 V	349	13.31	20.59
6	665.65	37.38 QP	46.00	-8.62	1.00 V	196	15.51	21.87
7	702.59	40.40 QP	46.00	-5.60	1.50 V	313	18.03	22.36
8	799.78	36.49 QP	46.00	-9.51	1.50 V	103	12.67	23.82

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.10 TEST RESULTS

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TEST MODE	CCK
TESTED BY	Steven Lu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.09 PK	74.00	-17.91	1.04 H	192	24.33	31.76
1	2390.00	47.88 AV	54.00	-6.12	1.04 H	192	16.12	31.76
2	*2412.00	107.60 PK			1.04 H	192	75.74	31.86
2	*2412.00	99.39 AV			1.04 H	192	67.53	31.86
3	4824.00	52.66 PK	74.00	-21.34	1.04 H	192	13.95	38.71
3	4824.00	40.97 AV	54.00	-13.03	1.04 H	192	2.26	38.71
4	7236.00	56.65 PK	74.00	-17.35	1.11 H	148	12.29	44.36
4	7236.00	46.08 AV	54.00	-7.92	1.11 H	148	1.72	44.36
5	9648.00	59.74 PK	74.00	-14.26	1.48 H	198	12.53	47.21
5	9648.00	48.74 AV	54.00	-5.26	1.48 H	198	1.53	47.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.83 PK	74.00	-23.17	1.56 V	184	19.07	31.76
1	2390.00	42.73 AV	54.00	-11.27	1.56 V	184	10.97	31.76
2	*2412.00	102.34 PK			1.56 V	187	70.48	31.86
2	*2412.00	94.24 AV			1.56 V	187	62.38	31.86
3	4824.00	51.06 PK	74.00	-22.94	1.25 V	181	12.35	38.71
3	4824.00	40.80 AV	54.00	-13.20	1.25 V	181	2.09	38.71
4	7236.00	56.72 PK	74.00	-17.28	1.32 V	10	12.36	44.36
4	7236.00	44.71 AV	54.00	-9.29	1.32 V	10	0.35	44.36
5	9648.00	59.85 PK	74.00	-14.15	1.04 V	172	12.64	47.21
5	9648.00	49.74 AV	54.00	-4.26	1.04 V	172	2.53	47.21

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TEST MODE	CCK
TESTED BY	Steven Lu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.36 PK			1.02 H	335	77.34	32.02
1	*2437.00	101.25 AV			1.02 H	335	69.23	32.02
2	4874.00	53.50 PK	74.00	-20.50	1.00 H	193	14.77	38.73
2	4874.00	42.36 AV	54.00	-11.64	1.00 H	193	3.63	38.73
3	7311.00	59.90 PK	74.00	-14.10	1.21 H	162	15.30	44.61
3	7311.00	49.73 AV	54.00	-4.27	1.21 H	162	5.13	44.61
4	9748.00	60.53 PK	89.36	-28.83	1.46 H	197	13.36	47.17
4	9748.00	52.60 AV	81.25	-28.65	1.46 H	197	5.43	47.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.58 PK			1.56 V	158	73.56	32.02
1	*2437.00	97.19 AV			1.56 V	158	65.17	32.02
2	4874.00	51.23 PK	74.00	-22.77	1.24 V	180	12.50	38.73
2	4874.00	40.90 AV	54.00	-13.10	1.24 V	180	2.17	38.73
3	7311.00	61.71 PK	74.00	-12.29	1.03 V	169	17.11	44.61
3	7311.00	51.40 AV	54.00	-2.60	1.03 V	169	6.80	44.61
4	9748.00	61.60 PK	85.58	-23.98	1.85 V	184	14.43	47.17
4	9748.00	55.71 AV	77.19	-21.48	1.85 V	184	8.54	47.17

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TEST MODE	CCK
TESTED BY	Steven Lu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.13 PK			1.04 H	188	74.96	32.17
1	*2462.00	98.71 AV			1.04 H	188	66.54	32.17
2	2483.50	57.29 PK	74.00	-16.71	1.04 H	188	24.99	32.30
2	2483.50	47.92 AV	54.00	-6.08	1.04 H	188	15.62	32.30
3	4924.00	50.71 PK	74.00	-23.29	1.53 H	221	11.99	38.72
3	4924.00	39.62 AV	54.00	-14.38	1.53 H	221	0.90	38.72
4	7386.00	56.36 PK	74.00	-17.64	1.11 H	152	11.41	44.95
4	7386.00	46.22 AV	54.00	-7.78	1.11 H	152	1.27	44.95
5	9848.00	59.74 PK	74.00	-14.26	1.45 H	199	12.57	47.17
5	9848.00	48.65 AV	54.00	-5.35	1.45 H	199	1.48	47.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.94 PK			1.49 V	297	71.77	32.17
1	*2462.00	94.85 AV			1.49 V	297	62.68	32.17
2	2483.50	53.05 PK	74.00	-20.95	1.49 V	297	20.75	32.30
2	2483.50	43.96 AV	54.00	-10.04	1.49 V	297	11.66	32.30
3	4924.00	52.32 PK	74.00	-21.68	1.33 V	173	13.60	38.72
3	4924.00	41.57 AV	54.00	-12.43	1.33 V	173	2.85	38.72
4	7386.00	57.63 PK	74.00	-16.37	1.35 V	360	12.68	44.95
4	7386.00	45.32 AV	54.00	-8.68	1.35 V	360	0.37	44.95
5	9848.00	59.65 PK	74.00	-14.35	1.04 V	163	12.48	47.17
5	9848.00	49.77 AV	54.00	-4.23	1.04 V	163	2.60	47.17

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	1	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TEST MODE	OFDM
TESTED BY	Steven Lu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.65 PK	74.00	-13.35	1.23 H	356	28.89	31.76
1	2390.00	50.92 AV	54.00	-3.08	1.23 H	356	19.16	31.76
2	*2412.00	101.78 PK			1.23 H	356	69.92	31.86
2	*2412.00	92.05 AV			1.23 H	356	60.19	31.86
3	4824.00	53.19 PK	74.00	-20.81	1.10 H	202	14.48	38.71
3	4824.00	41.70 AV	54.00	-12.30	1.10 H	202	2.99	38.71
4	9648.00	60.43 PK	74.00	-13.57	1.00 H	120	13.22	47.21
4	9648.00	49.98 AV	54.00	-4.02	1.00 H	120	2.77	47.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.28 PK	74.00	-17.72	1.52 V	79	24.52	31.76
1	2390.00	45.63 AV	54.00	-8.37	1.52 V	79	13.87	31.76
2	*2412.00	97.41 PK			1.52 V	79	65.55	31.86
2	*2412.00	86.76 AV			1.52 V	79	54.90	31.86
3	4824.00	51.99 PK	74.00	-22.01	1.06 V	182	13.28	38.71
3	4824.00	40.76 AV	54.00	-13.24	1.06 V	182	2.05	38.71
4	9648.00	57.79 PK	74.00	-16.21	1.74 V	178	10.58	47.21
4	9648.00	45.74 AV	54.00	-8.26	1.74 V	178	-1.47	47.21

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	6	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TEST MODE	OFDM
TESTED BY	Steven Lu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.39 PK			1.02 H	331	74.37	32.02
1	*2437.00	97.30 AV			1.02 H	331	65.28	32.02
2	4874.00	51.24 PK	74.00	-22.76	1.00 H	189	12.51	38.73
2	4874.00	40.79 AV	54.00	-13.21	1.00 H	189	2.06	38.73
3	7311.00	60.41 PK	74.00	-13.59	1.13 H	328	15.81	44.61
3	7311.00	47.37 AV	54.00	-6.63	1.13 H	328	2.77	44.61
4	9748.00	58.70 PK	86.39	-27.69	1.02 H	122	11.53	47.17
4	9748.00	47.65 AV	77.30	-29.65	1.02 H	122	0.48	47.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	101.92 PK			1.10 V	339	69.90	32.02
1	*2437.00	92.28 AV			1.10 V	339	60.26	32.02
2	4874.00	51.01 PK	74.00	-22.99	1.16 V	182	12.28	38.73
2	4874.00	41.06 AV	54.00	-12.94	1.16 V	182	2.33	38.73
3	7311.00	61.91 PK	74.00	-12.09	1.00 V	333	17.31	44.61
3	7311.00	50.04 AV	54.00	-3.96	1.00 V	333	5.44	44.61
4	9748.00	59.64 PK	81.92	-22.28	1.13 V	171	12.47	47.17
4	9748.00	47.59 AV	72.28	-24.69	1.13 V	171	0.42	47.17

REMARKS:

1. Emission level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
CHANNEL	11	FREQUENCY RANGE	1~25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa	TEST MODE	OFDM
TESTED BY	Steven Lu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.05 PK			1.01 H	333	69.88	32.17
1	*2462.00	92.49 AV			1.01 H	333	60.32	32.17
2	2483.50	60.29 PK	74.00	-13.71	1.01 H	333	27.99	32.30
2	2483.50	50.73 AV	54.00	-3.27	1.01 H	333	18.43	32.30
3	4924.00	53.32 PK	74.00	-20.68	1.10 H	263	14.60	38.72
3	4924.00	42.96 AV	54.00	-11.04	1.10 H	263	4.24	38.72
4	9848.00	60.43 PK	74.00	-13.57	1.10 H	263	13.26	47.17
4	9848.00	50.32 AV	54.00	-3.68	1.10 H	263	3.15	47.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	98.49 PK			1.03 V	257	66.32	32.17
1	*2462.00	88.52 AV			1.03 V	257	56.35	32.17
2	2483.50	56.73 PK	74.00	-17.27	1.03 V	257	24.43	32.30
2	2483.50	46.76 AV	54.00	-7.24	1.03 V	257	14.46	32.30
3	4924.00	51.96 PK	74.00	-22.04	1.06 V	182	13.24	38.72
3	4924.00	40.63 AV	54.00	-13.37	1.06 V	182	1.91	38.72
4	9848.00	57.79 PK	74.00	-16.21	1.77 V	273	10.62	47.17
4	9848.00	47.63 AV	54.00	-6.37	1.77 V	273	0.46	47.17

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TEST MODE	CCK	TESTED BY	Steven Lu


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.48	0.5	PASS
6	2437	11.56	0.5	PASS
11	2462	11.48	0.5	PASS

CH1

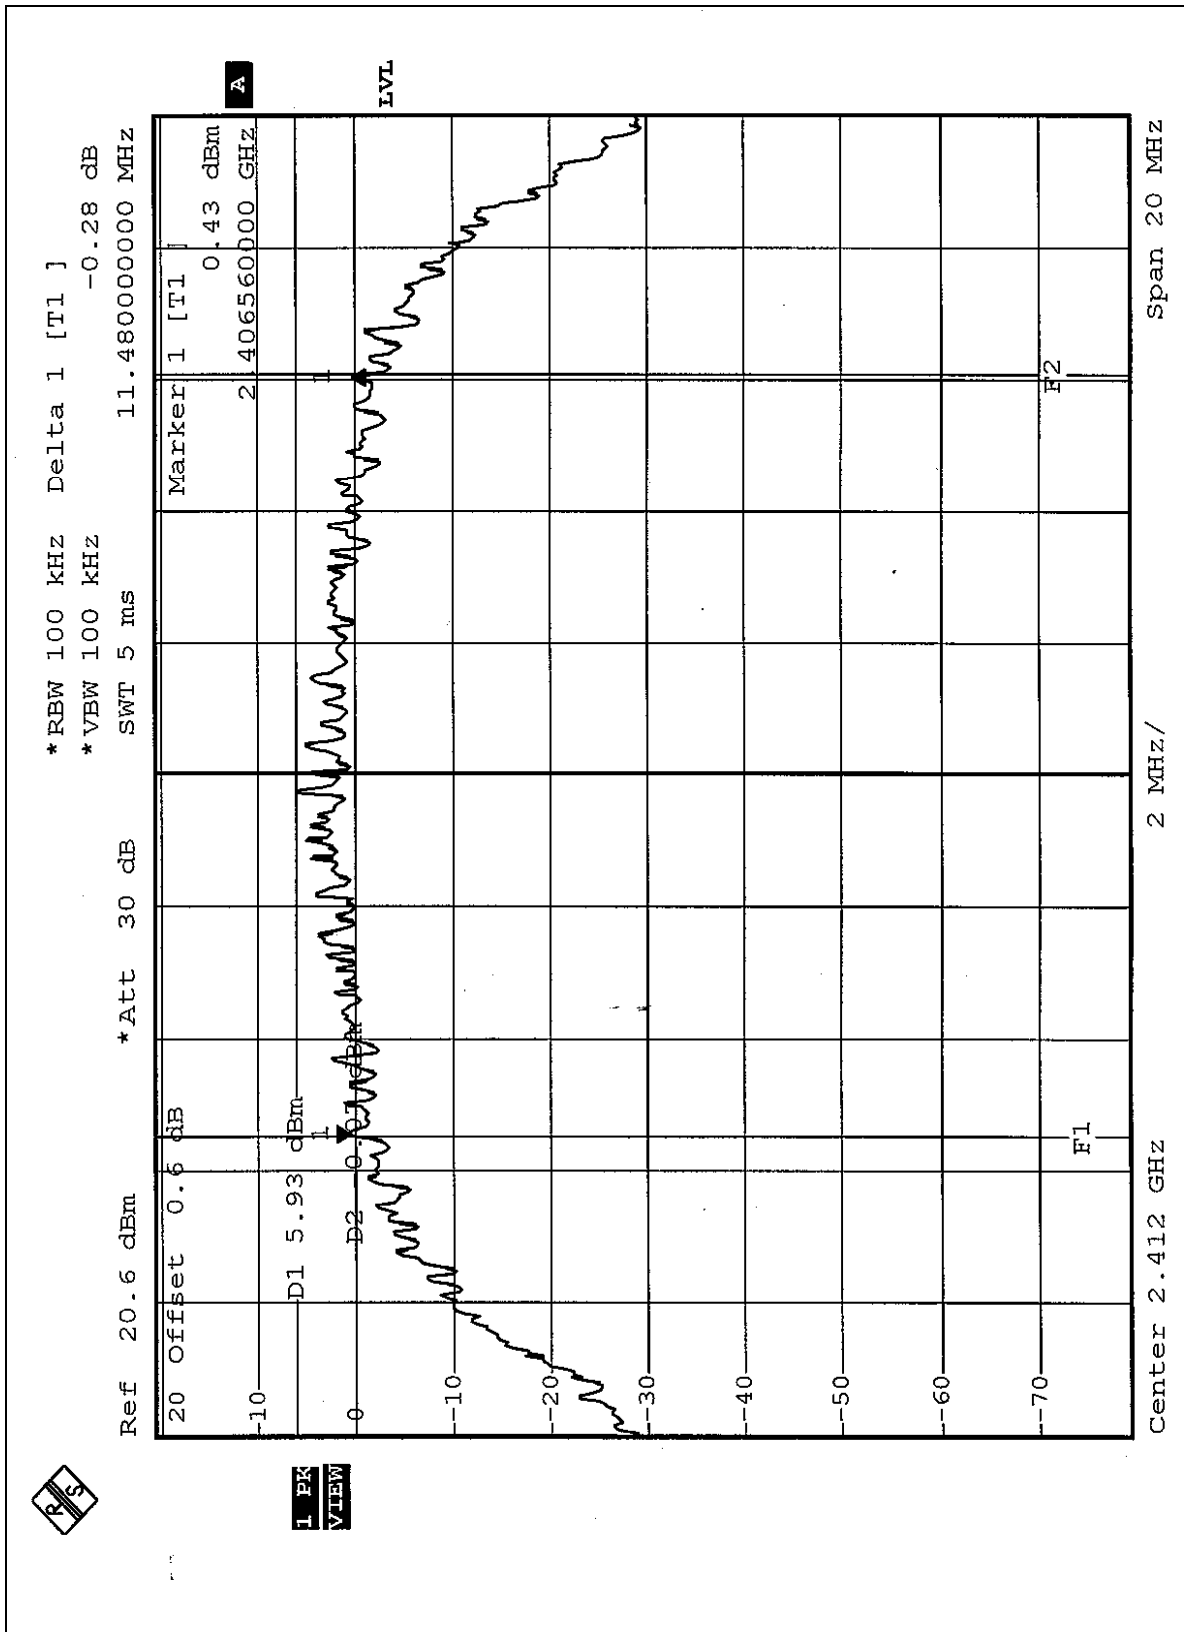




CH6

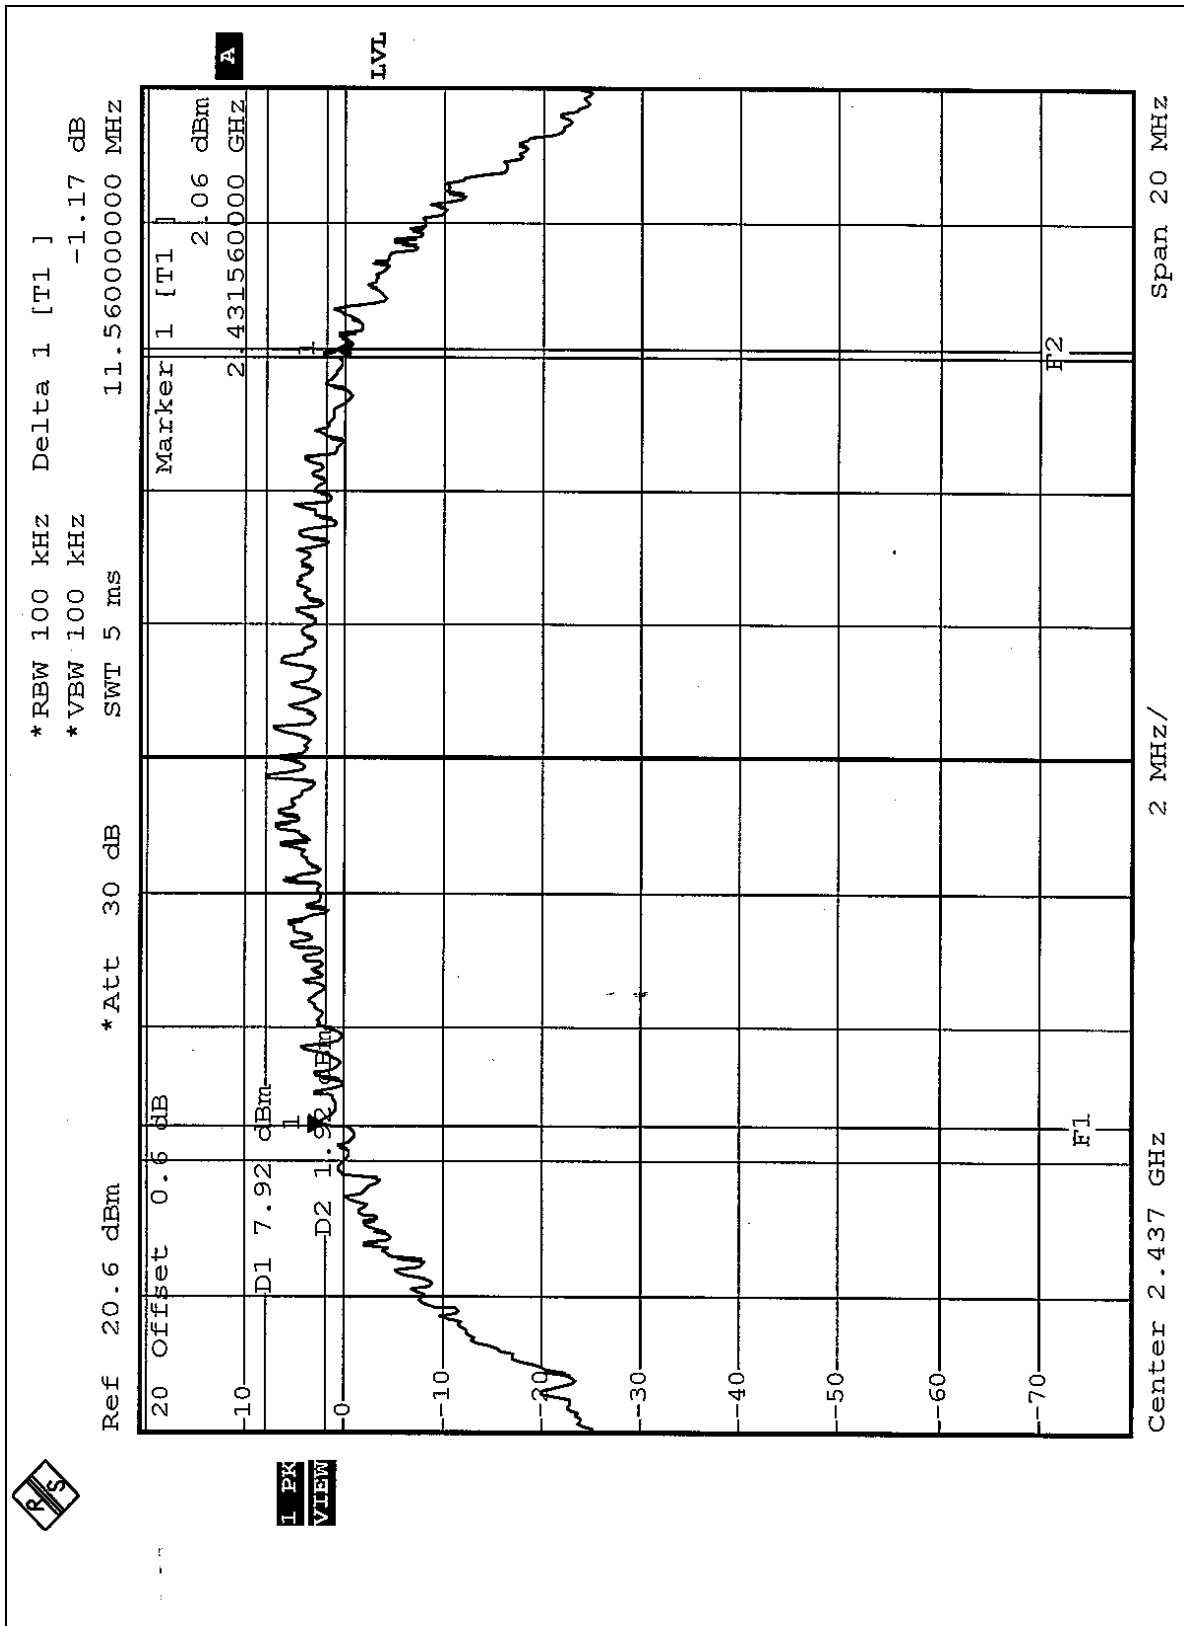



CH11

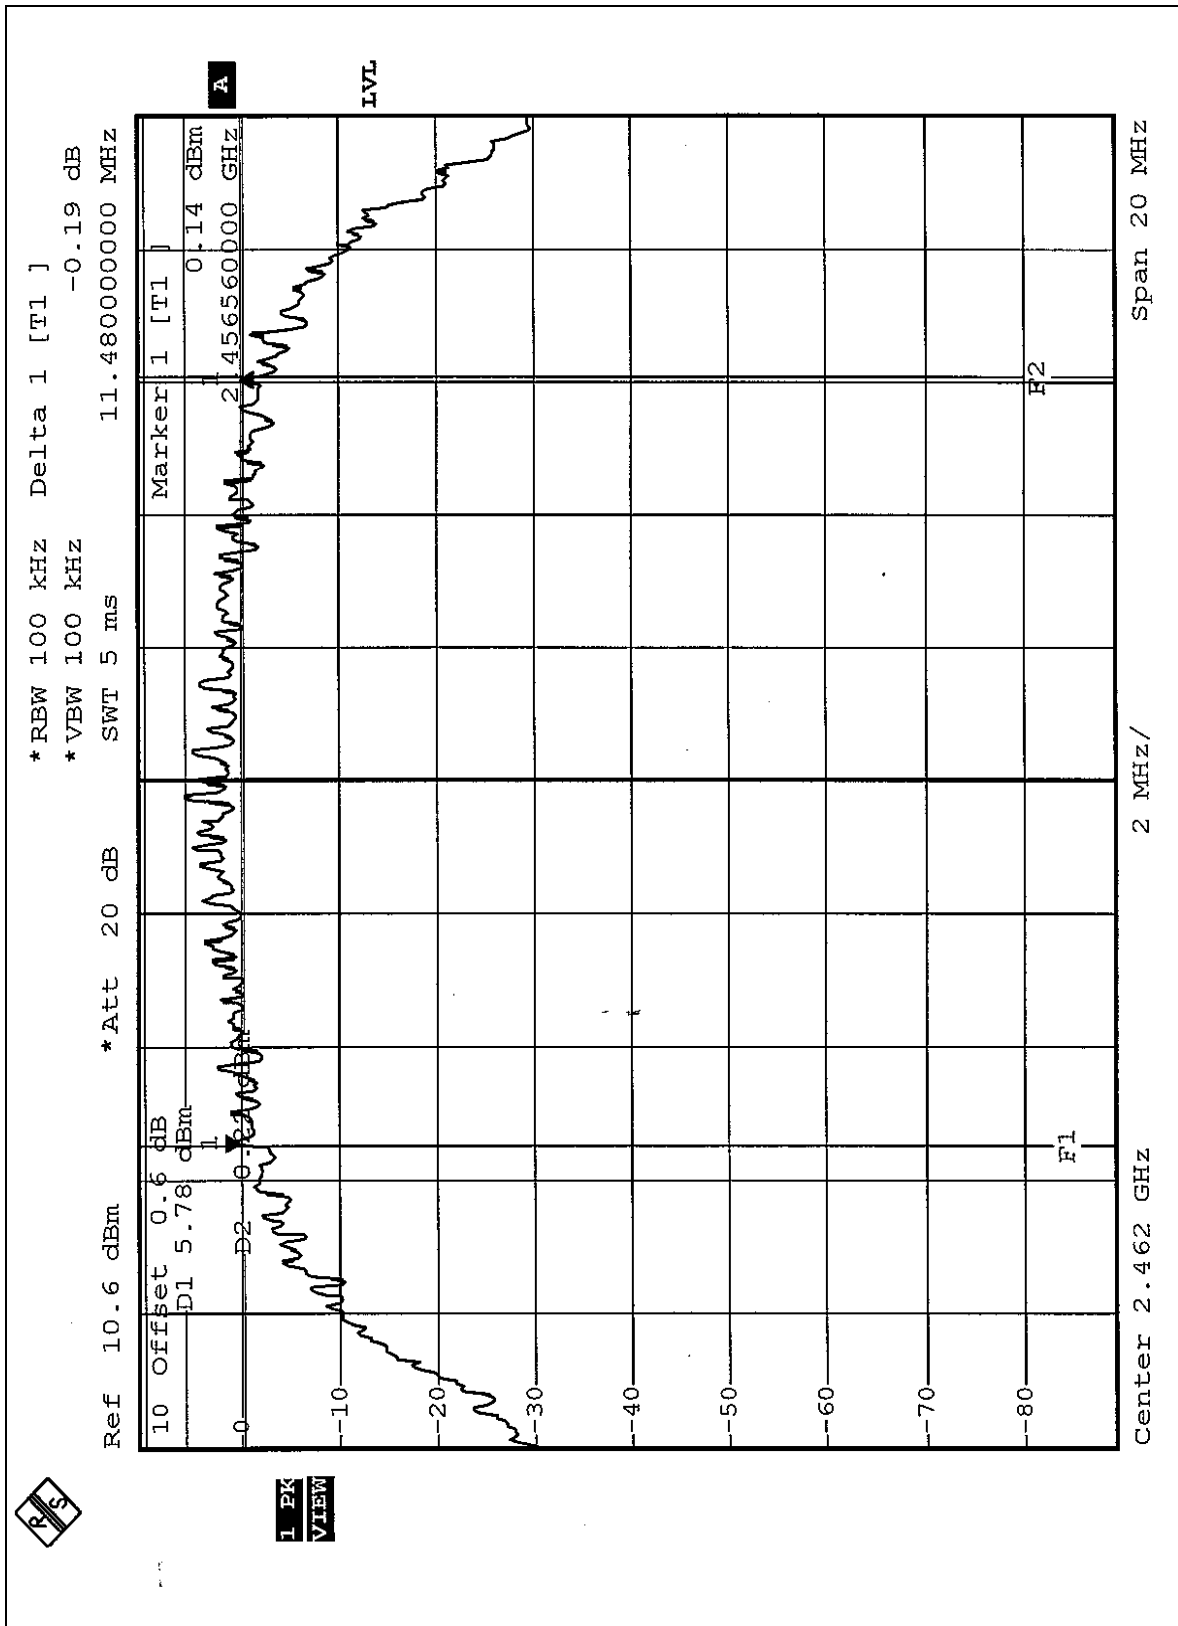





EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TEST MODE	OFDM	TESTED BY	Steven Lu

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.48	0.5	PASS
6	2437	16.52	0.5	PASS
11	2462	16.48	0.5	PASS

CH1

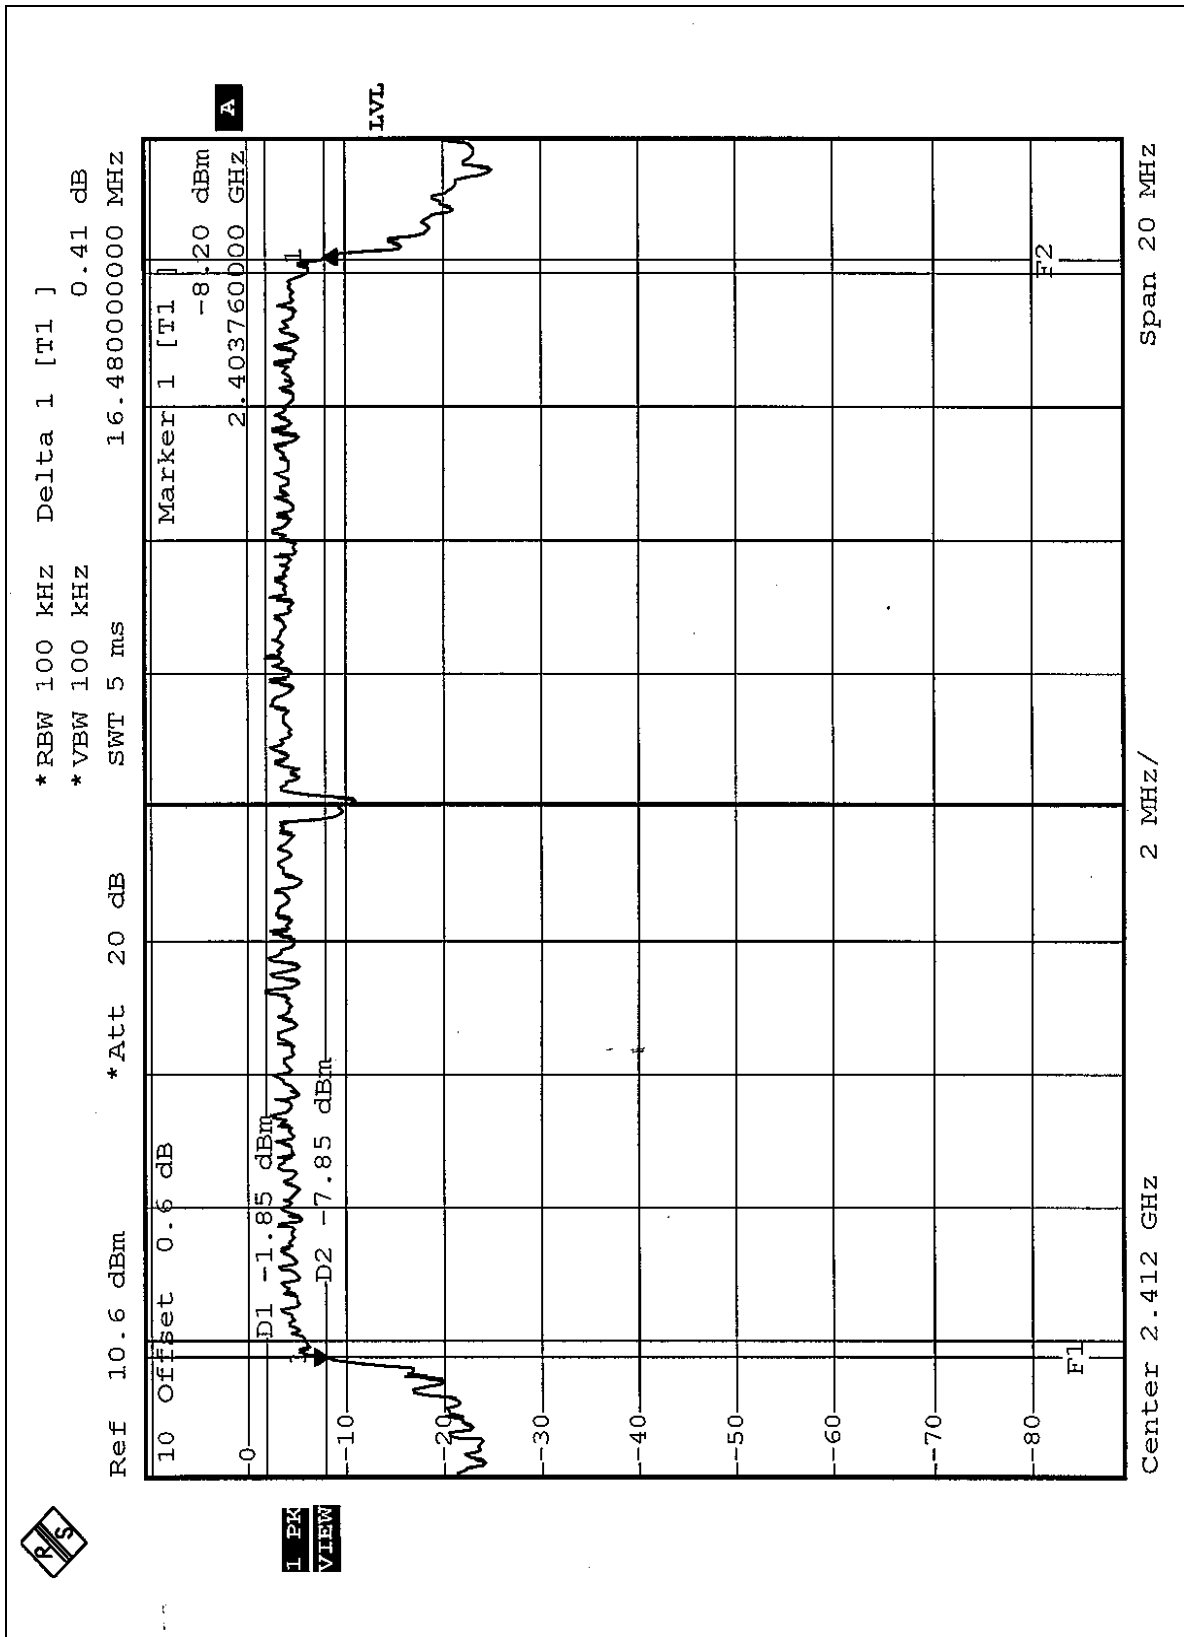

CH6

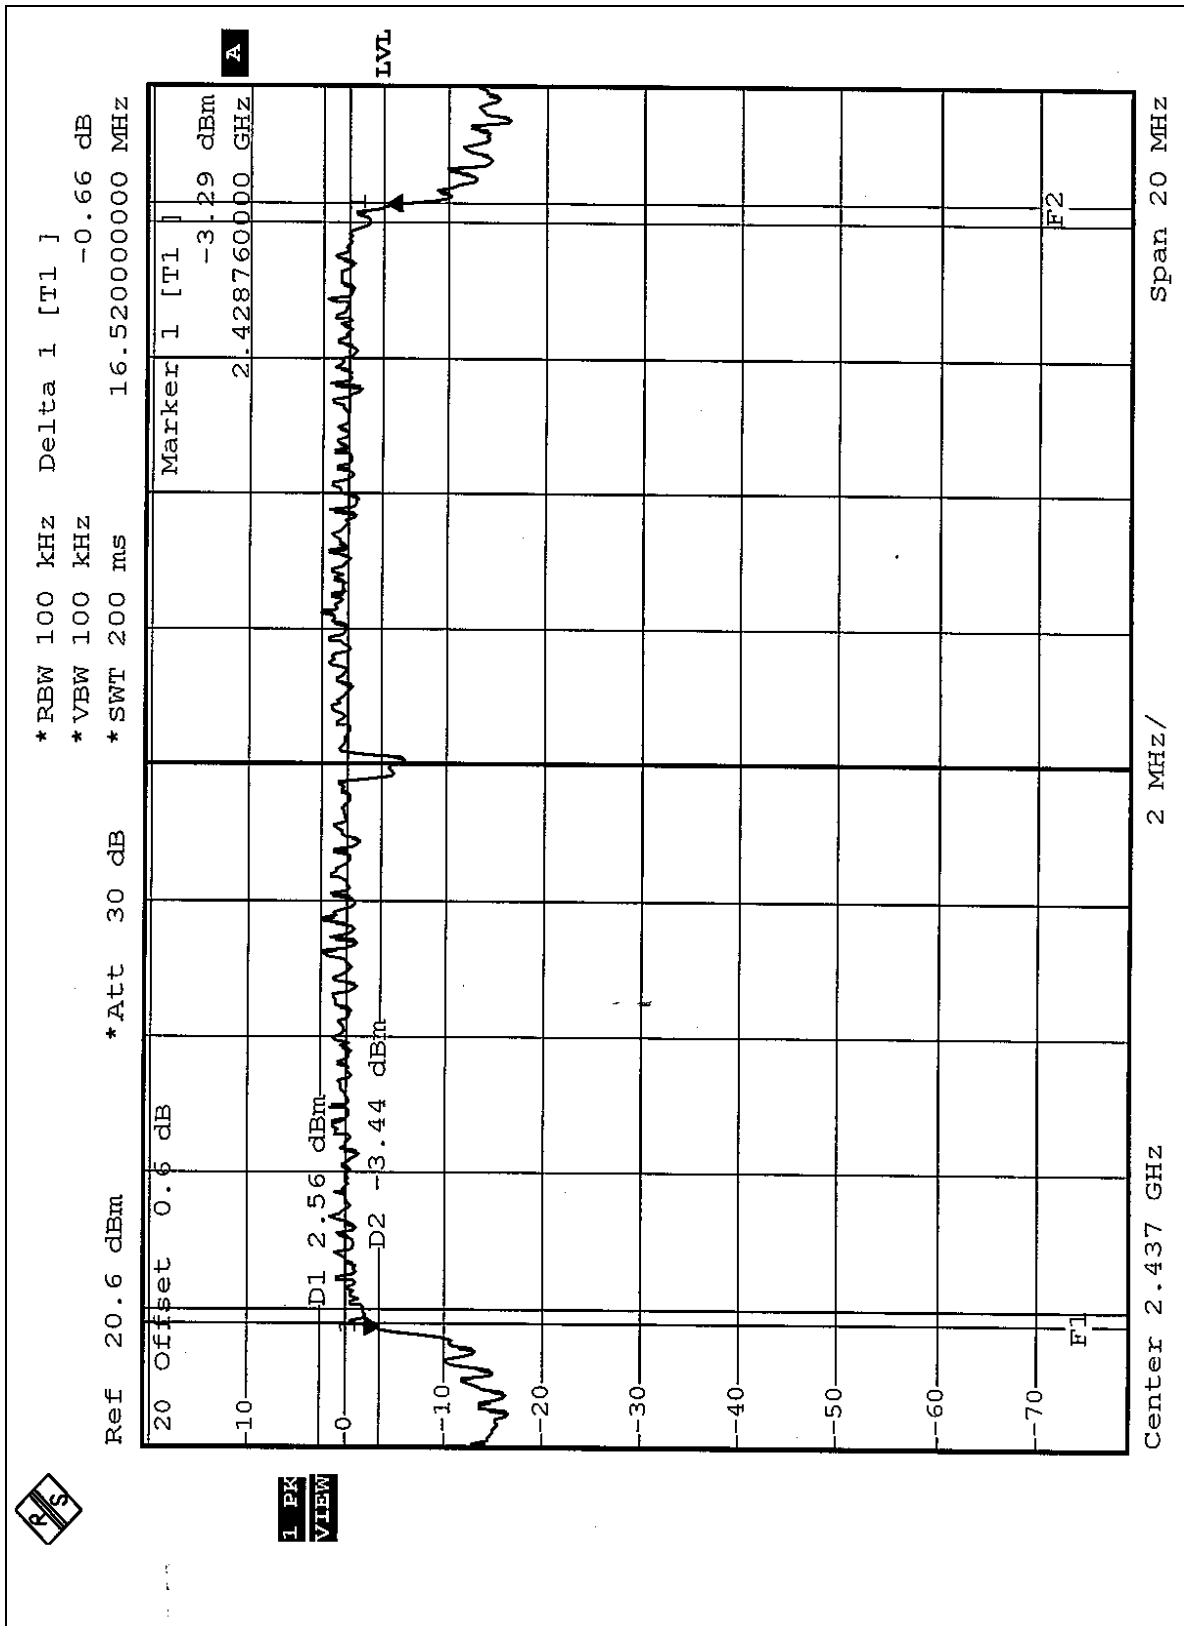

*RBW 100 kHz Delta 1 [T1] -0.43 dB
 *VBW 100 kHz
 *Att 20 dB SWT 5 ms
 Ref 10.6 dBm
 10 Offset 0.6 dB
 Marker 1 [T1]
 -7.92 dBm
 2.45376000 GHz
 D1 -1.91 dBm
 D2 -7.91 dBm
 F1
 F2
 LVL
 Center 2.462 GHz Span 20 MHz / 2 MHz /

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 1, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G. was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TEST MODE	CCK	TESTED BY	Steven Lu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.00	30	PASS
6	2437	18.00	30	PASS
11	2462	16.00	30	PASS

EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TEST MODE	OFDM	TESTED BY	Steven Lu

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	14.00	30	PASS
6	2437	18.00	30	PASS
11	2462	14.00	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS


Same as 4.3.6

4.5.7 TEST RESULTS


EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TEST MODE	CCK	TESTED BY	Steven Lu

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.34	8	PASS
6	2437	-5.82	8	PASS
11	2462	-8.05	8	PASS

CH1

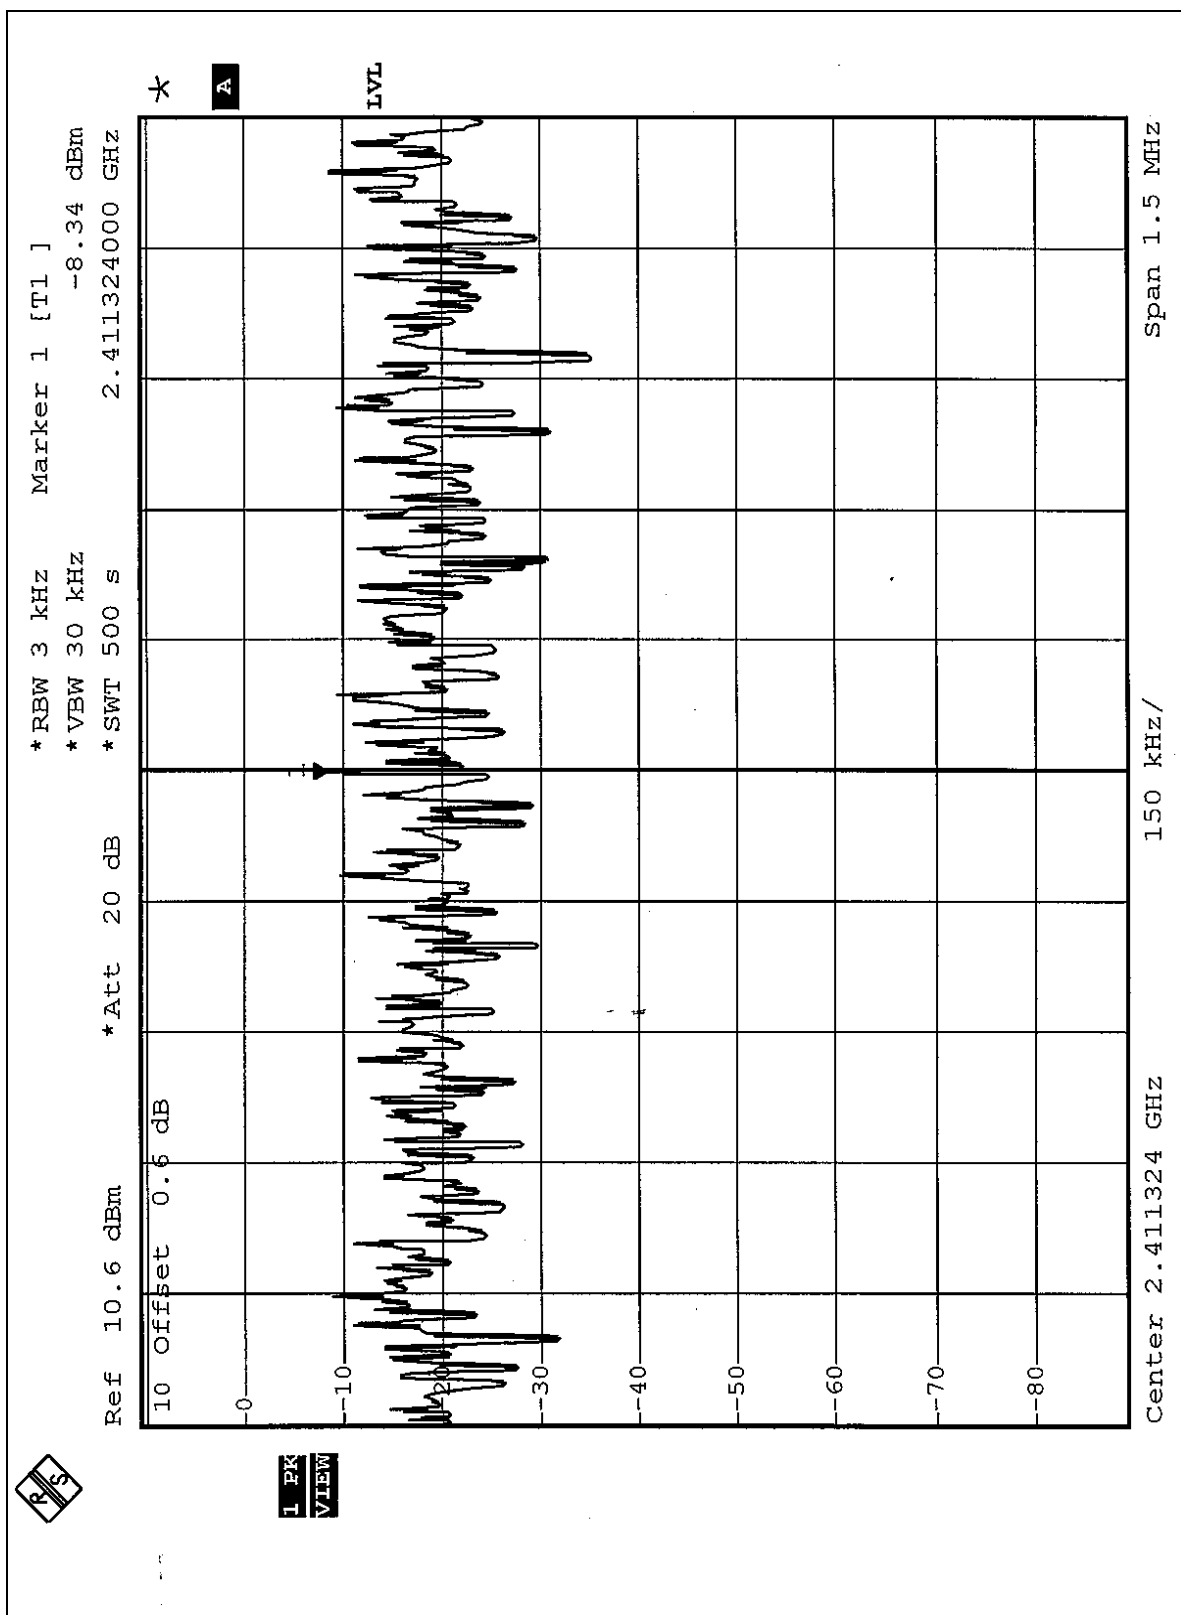


CH6

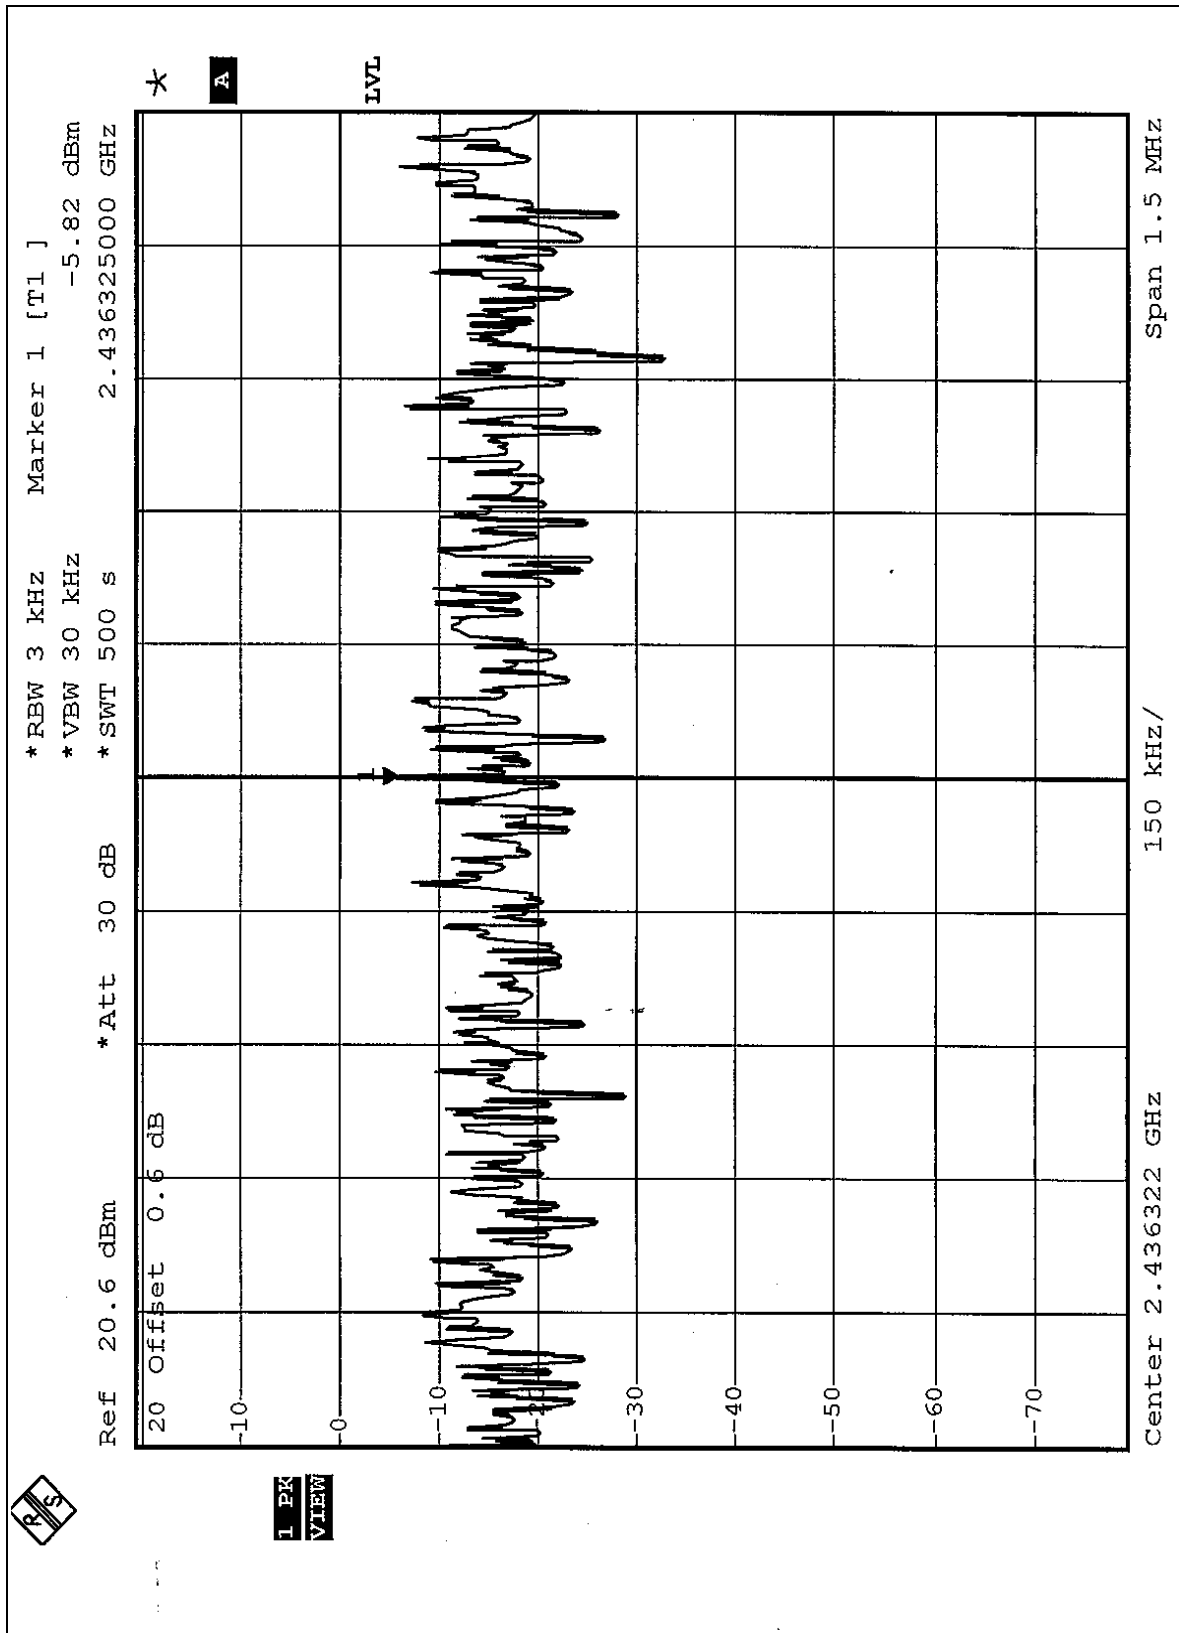



CH11

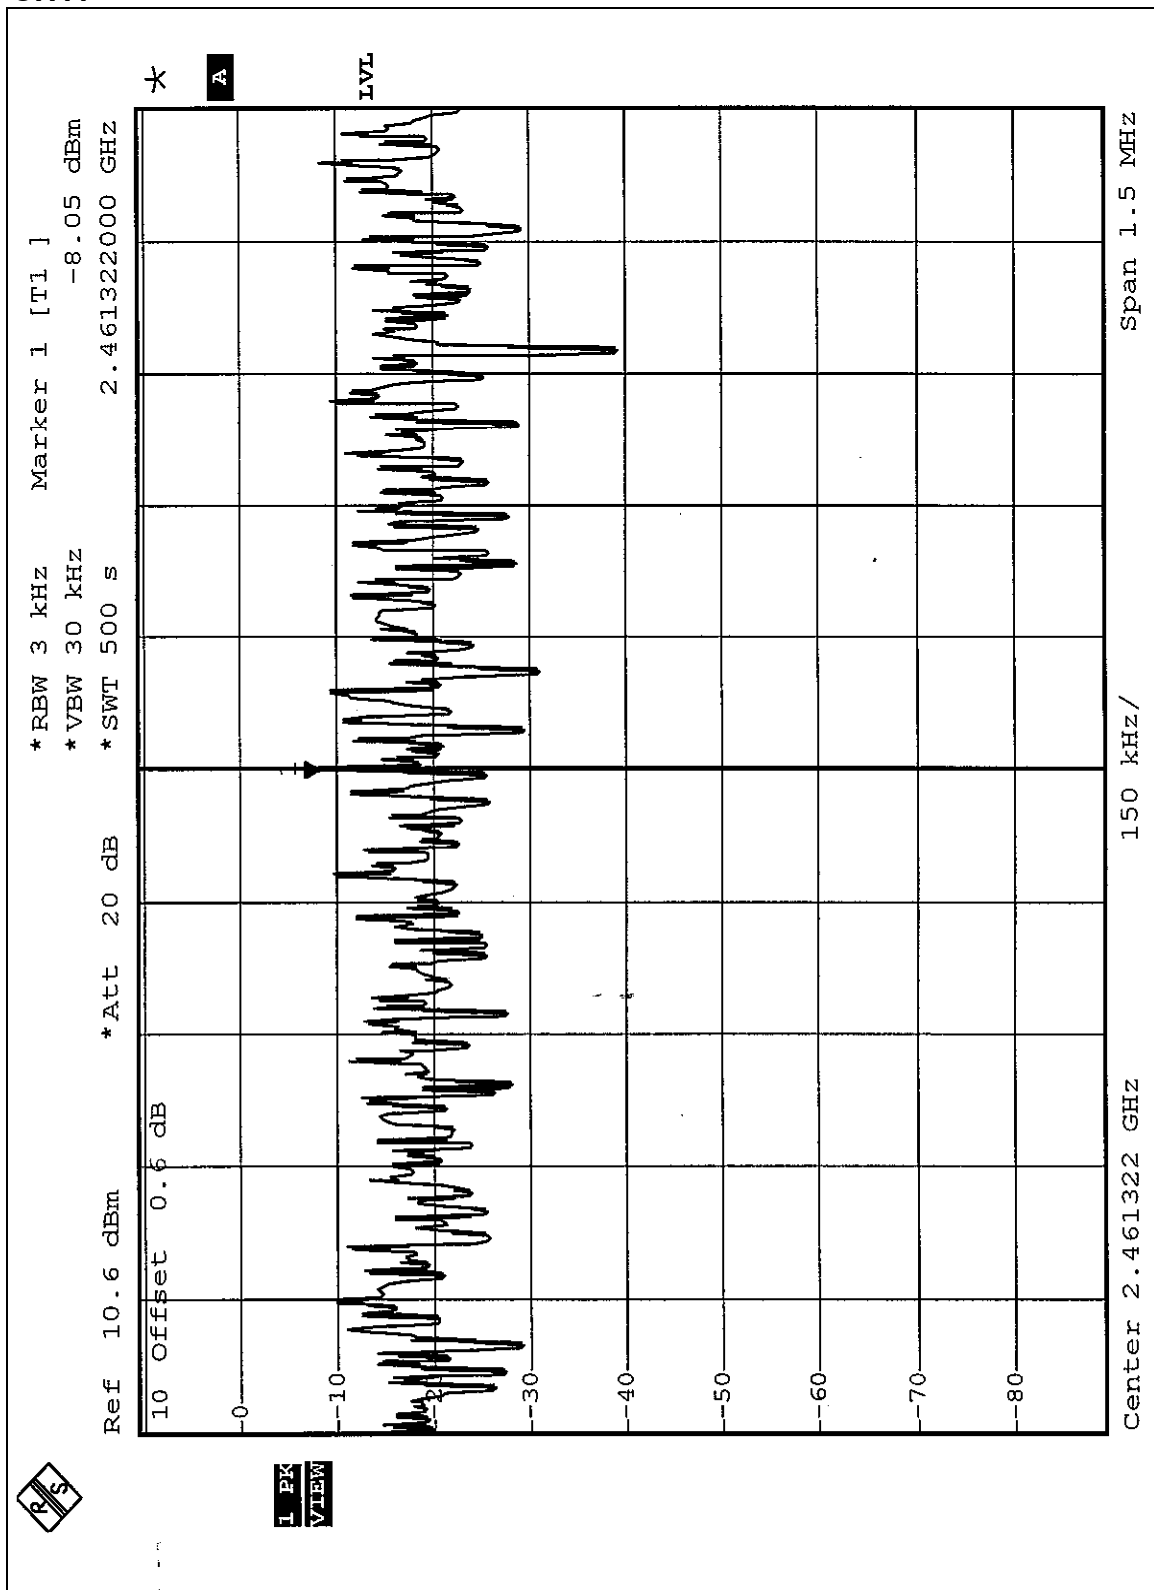




EUT	802.11g USB Adapter	MODEL	CG-WLUSB2GTST
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24 deg. C, 65% RH, 991 hPa
TEST MODE	OFDM	TESTED BY	Steven Lu


CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.82	8	PASS
6	2437	-12.47	8	PASS
11	2462	-16.21	8	PASS



CH1

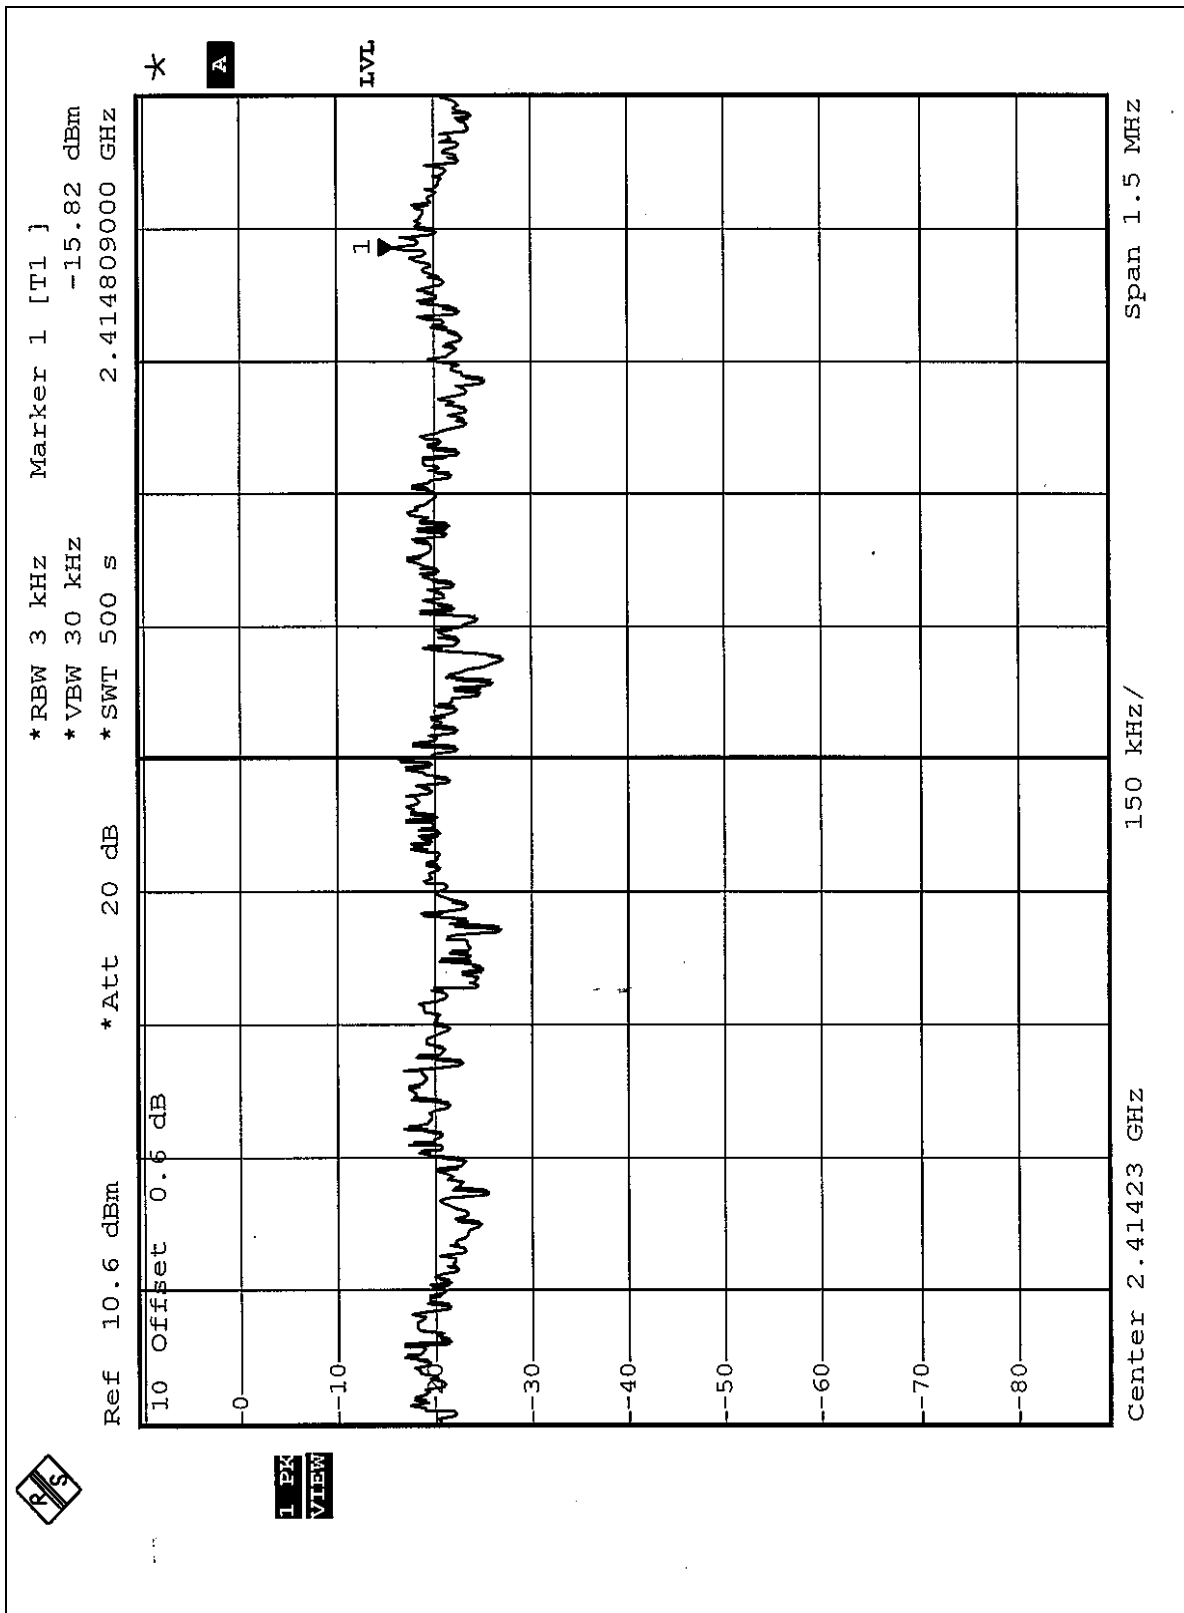


CH6

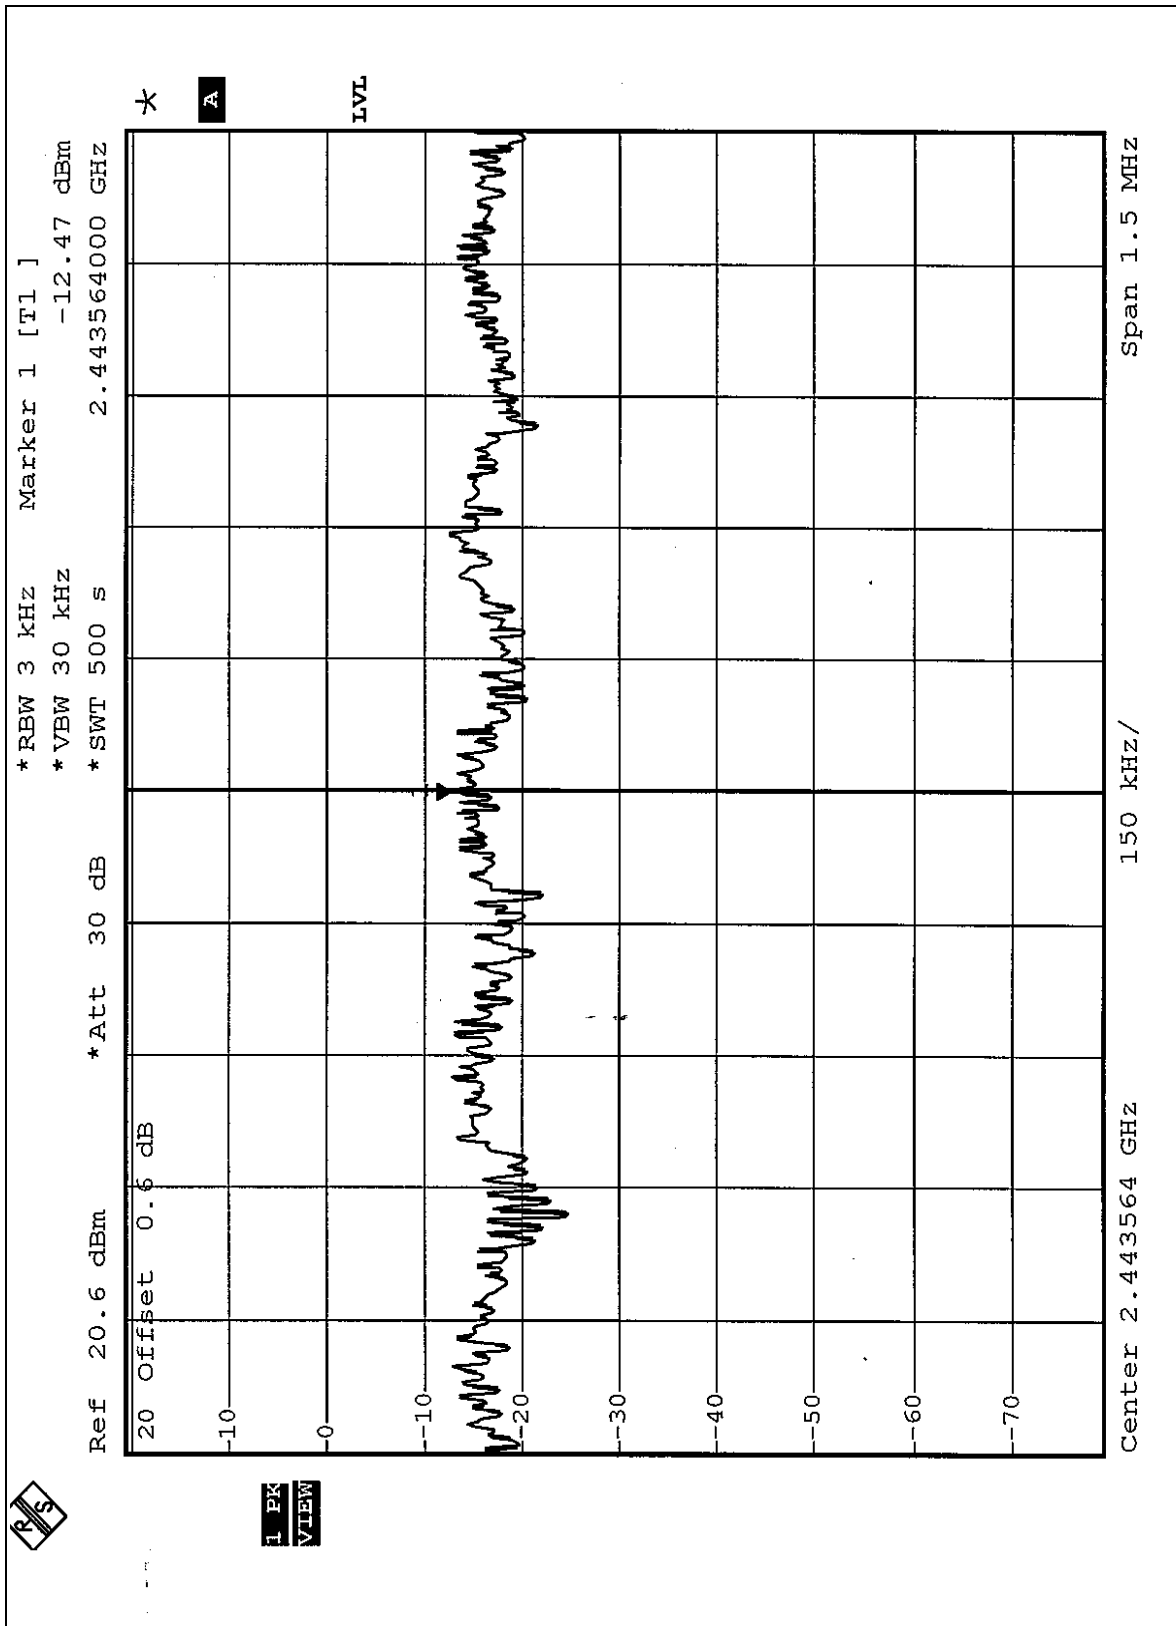



CH11

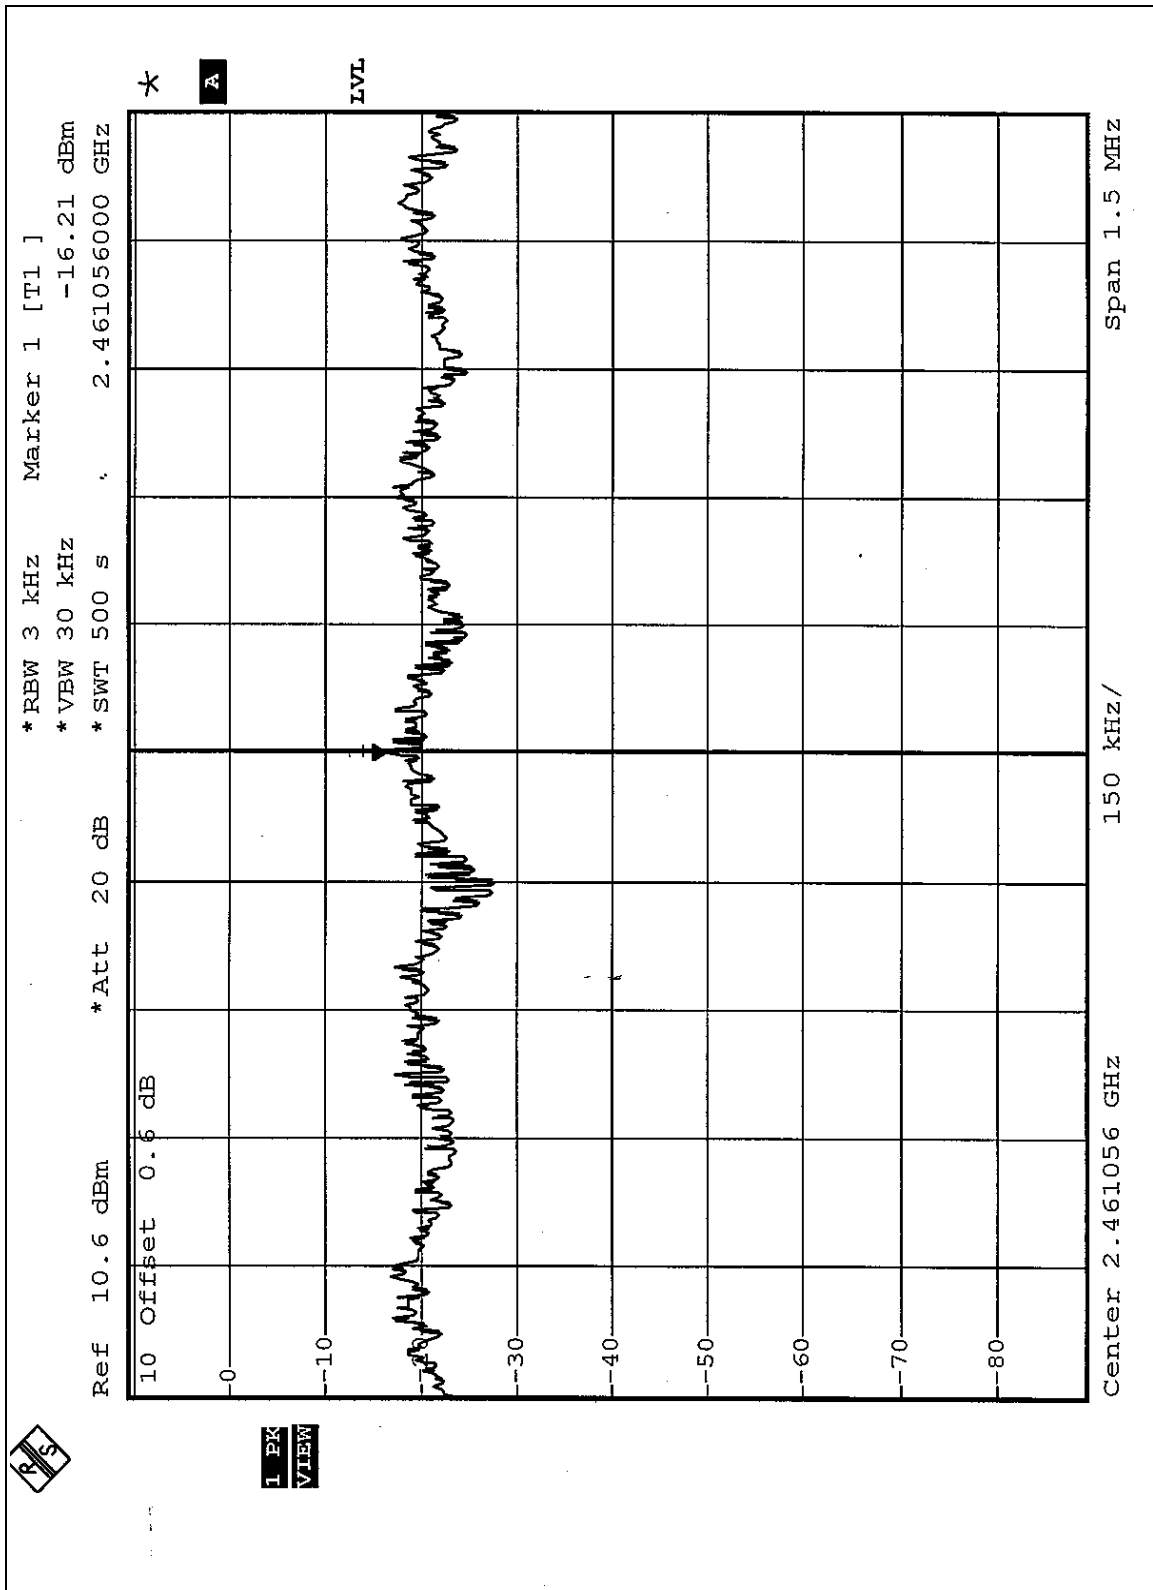

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 1MHz and 10Hz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 8 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE:


The band edge emission plot of CCK technique on the following 1~2 pages show 51.01dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.10 is 99.39dBuV/m, so the maximum field strength in restrict band is $99.39 - 51.01 = 48.38$ dBuV/m which is under 54dBuV/m limit.


The band edge emission plot of CCK technique on the following 3~4 pages show 50.99dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.10 is 98.71dBuV/m, so the maximum field strength in restrict band is $98.71 - 50.99 = 47.72$ dBuV/m which is under 54dBuV/m limit.


NOTE:


The band edge emission plot of OFDM technique on the following 5~6 pages show 41.35dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.10 is 92.05dBuV/m, so the maximum field strength in restrict band is $92.05 - 41.35 = 50.70$ dBuV/m which is under 54dBuV/m limit.


The band edge emission plot of OFDM technique on the following 7~8 pages show 40.71dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.10 is 92.49dBuV/m, so the maximum field strength in restrict band is $92.49 - 40.71 = 51.78$ dBuV/m which is under 54dBuV/m limit.

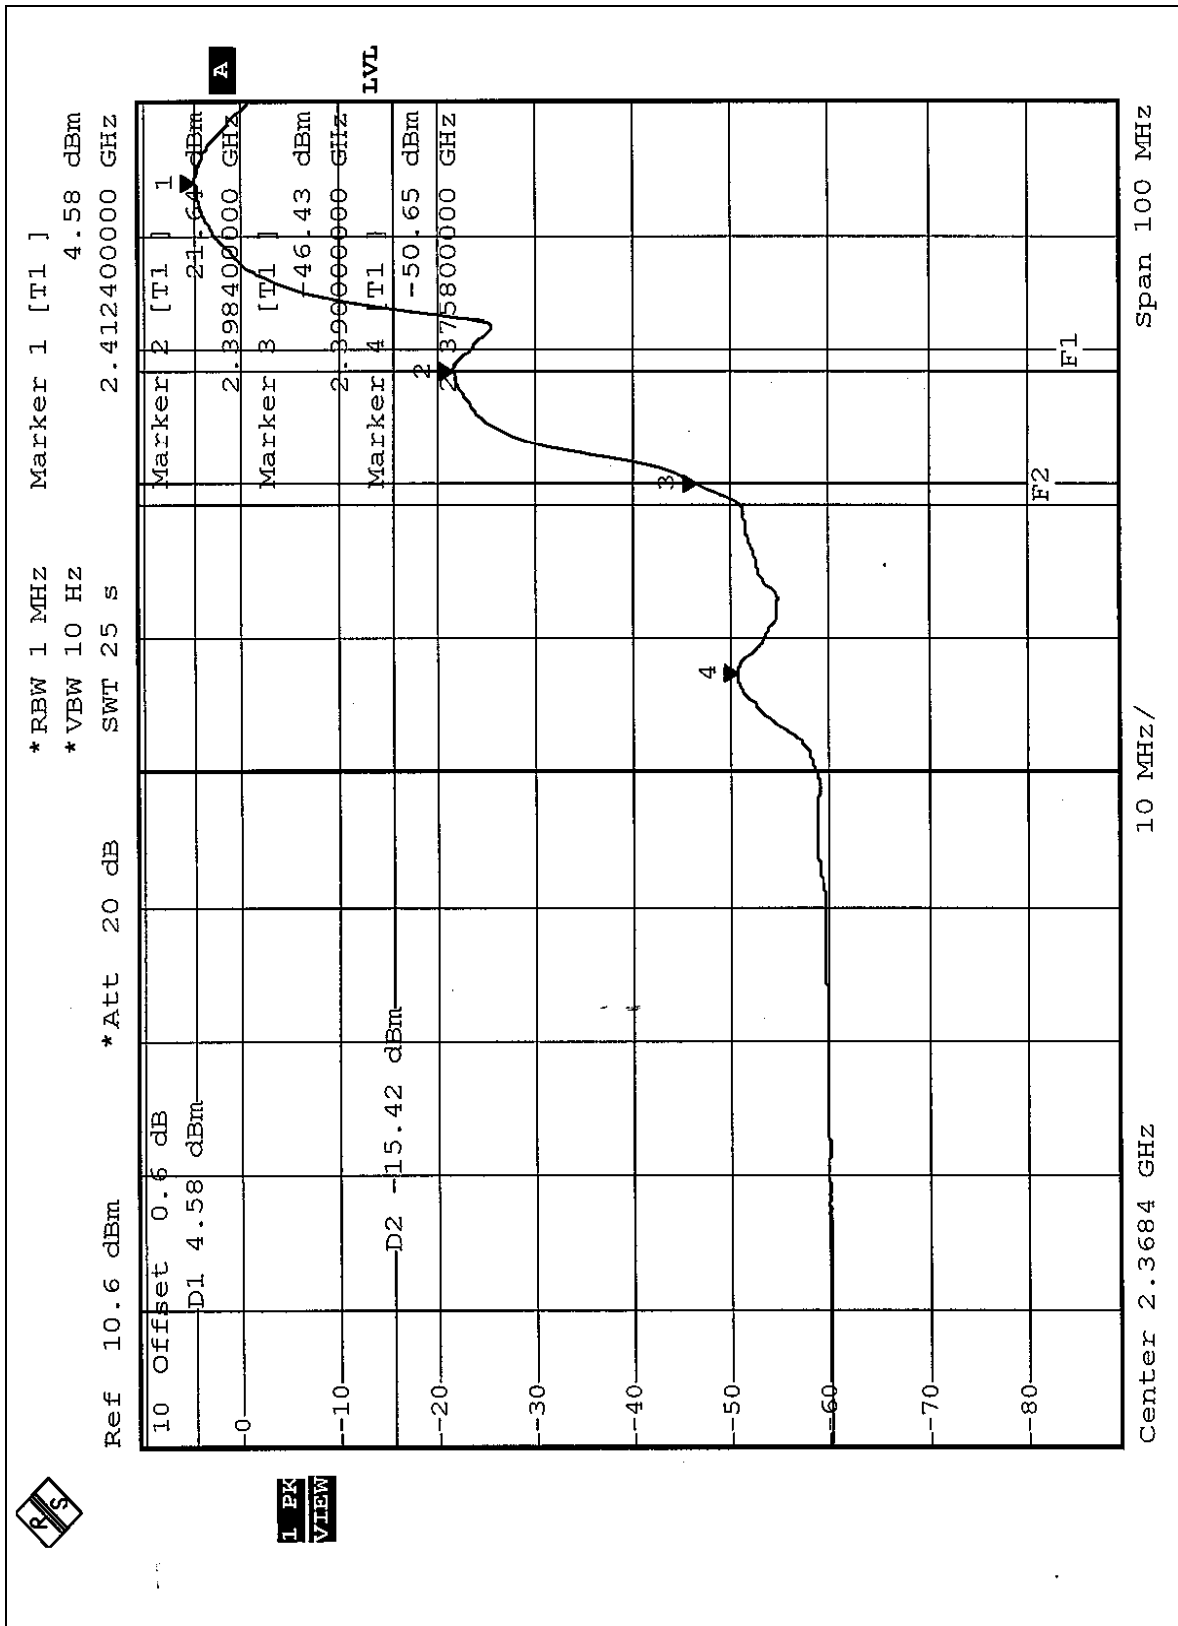


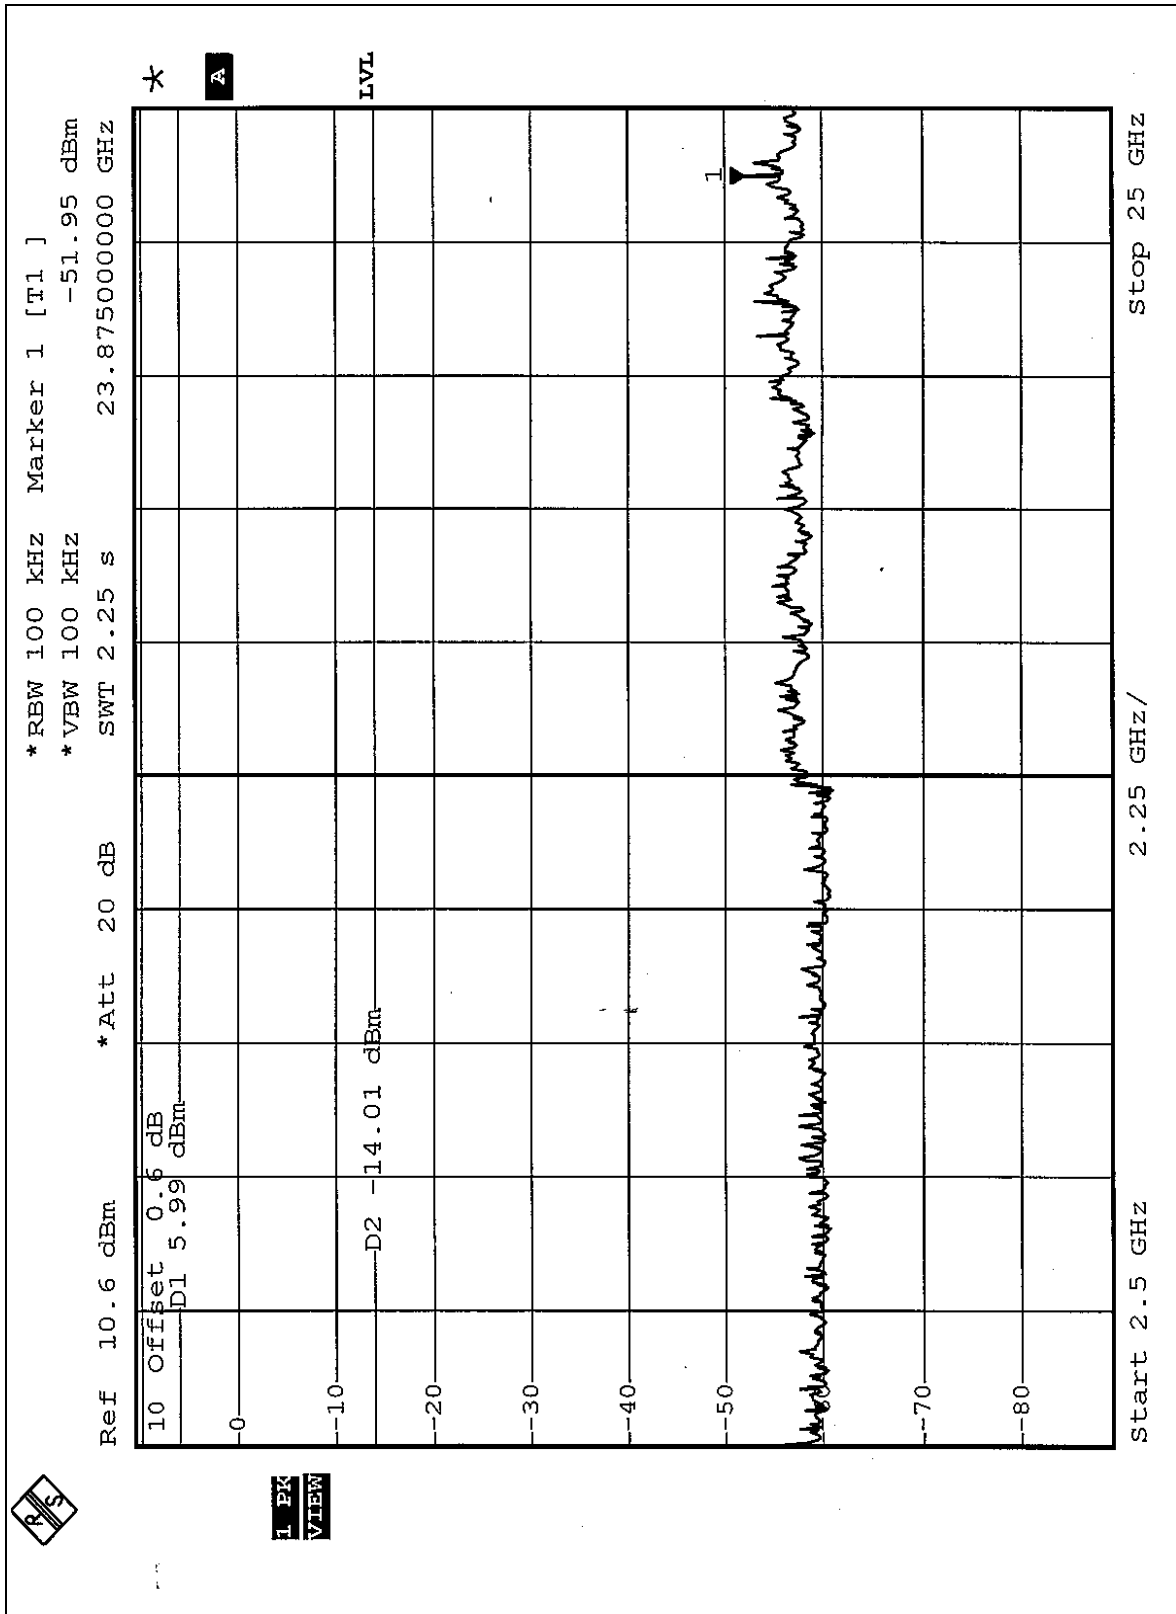


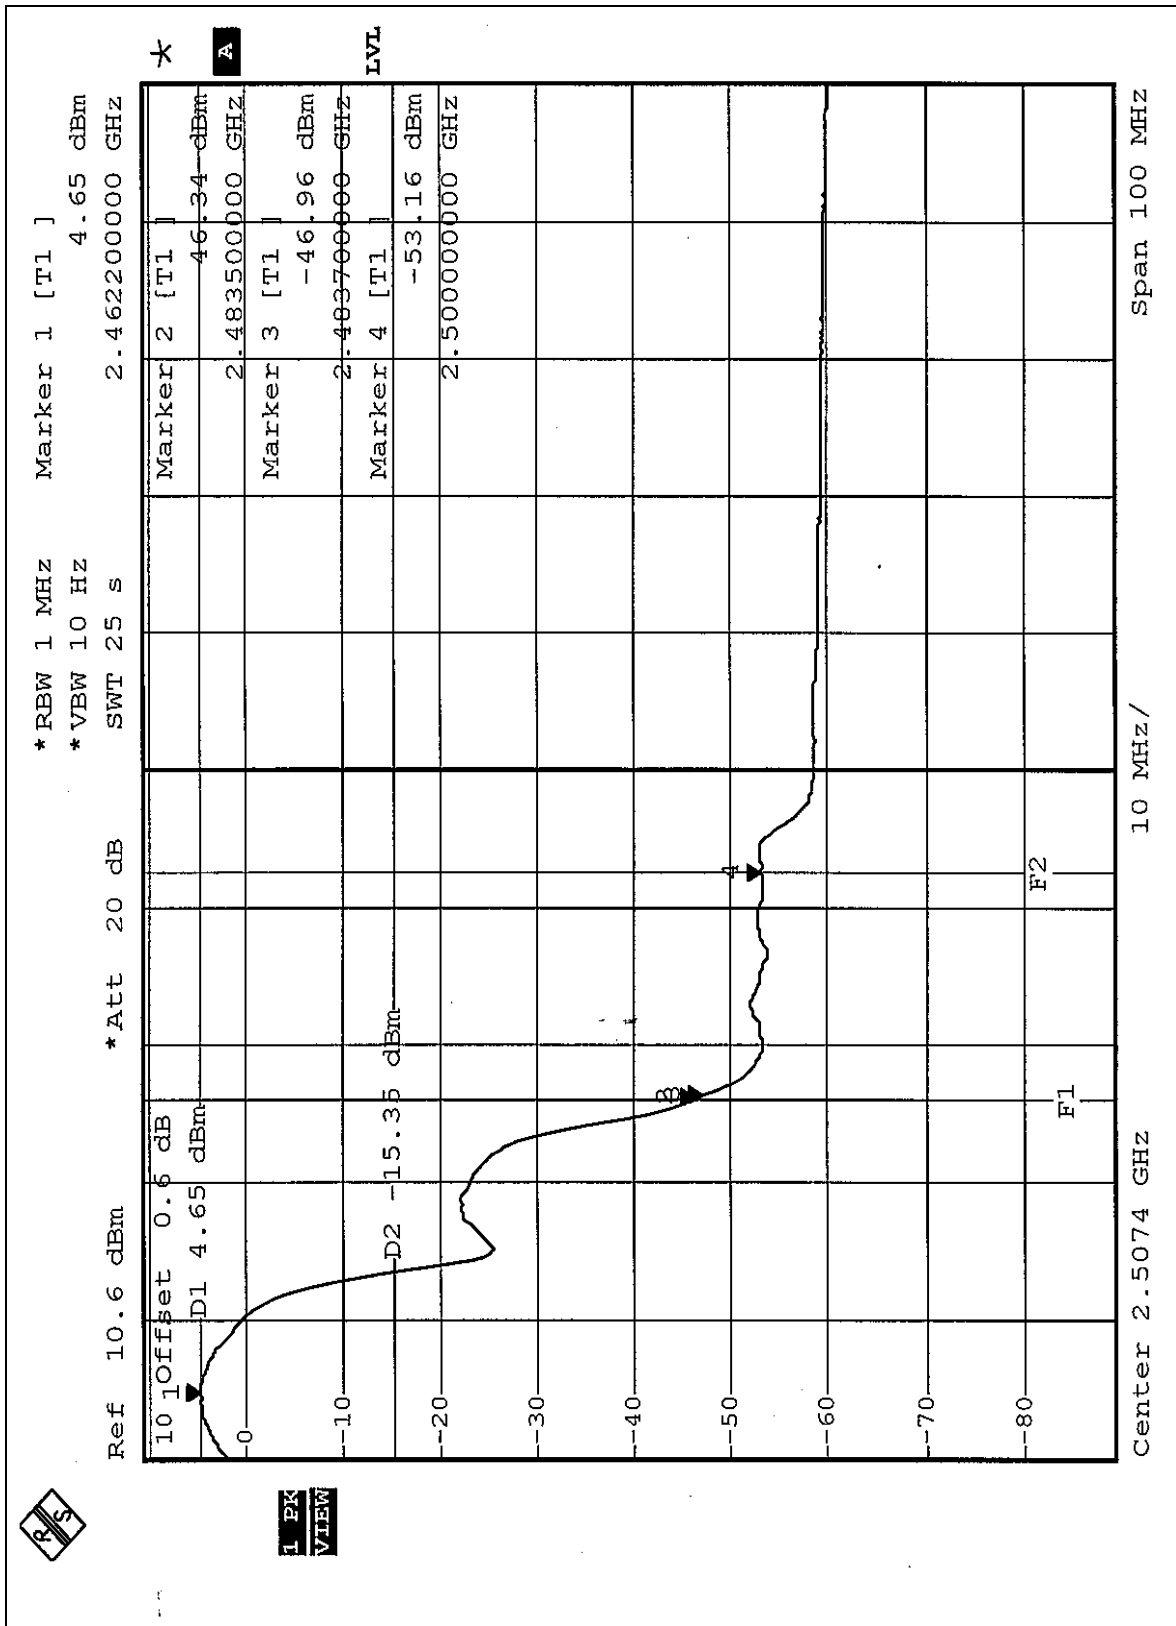


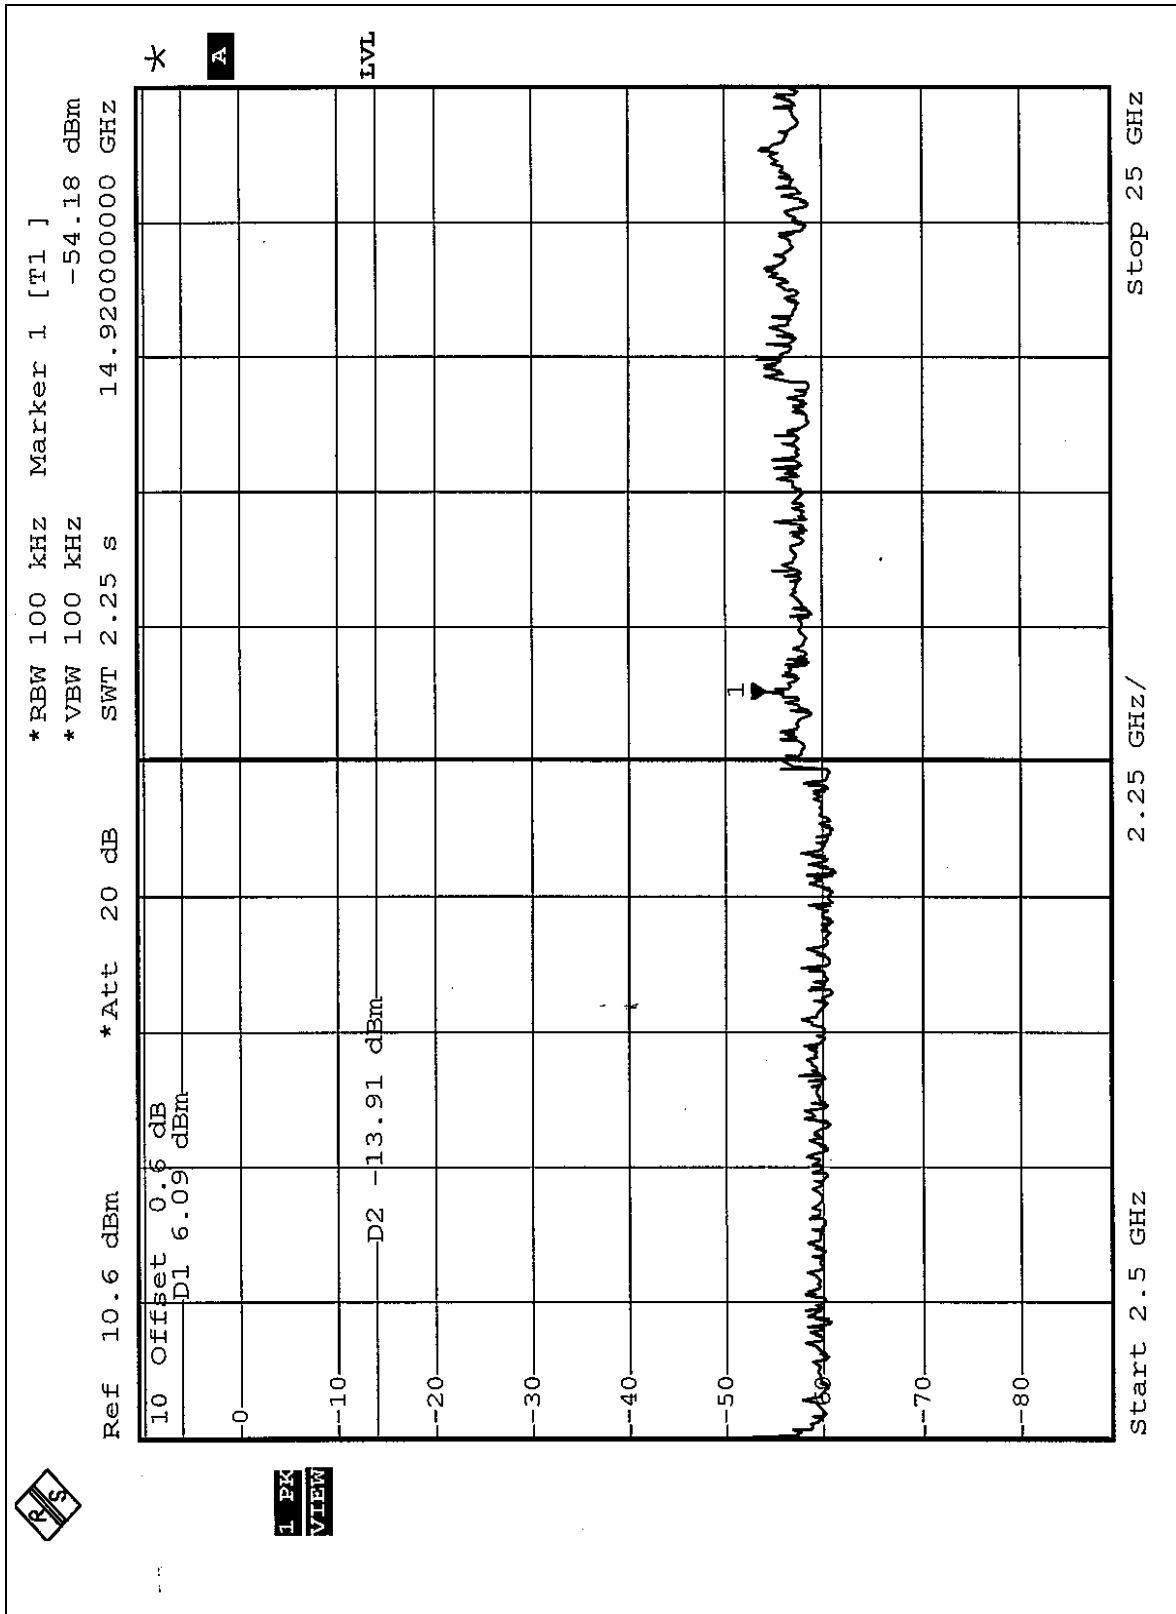

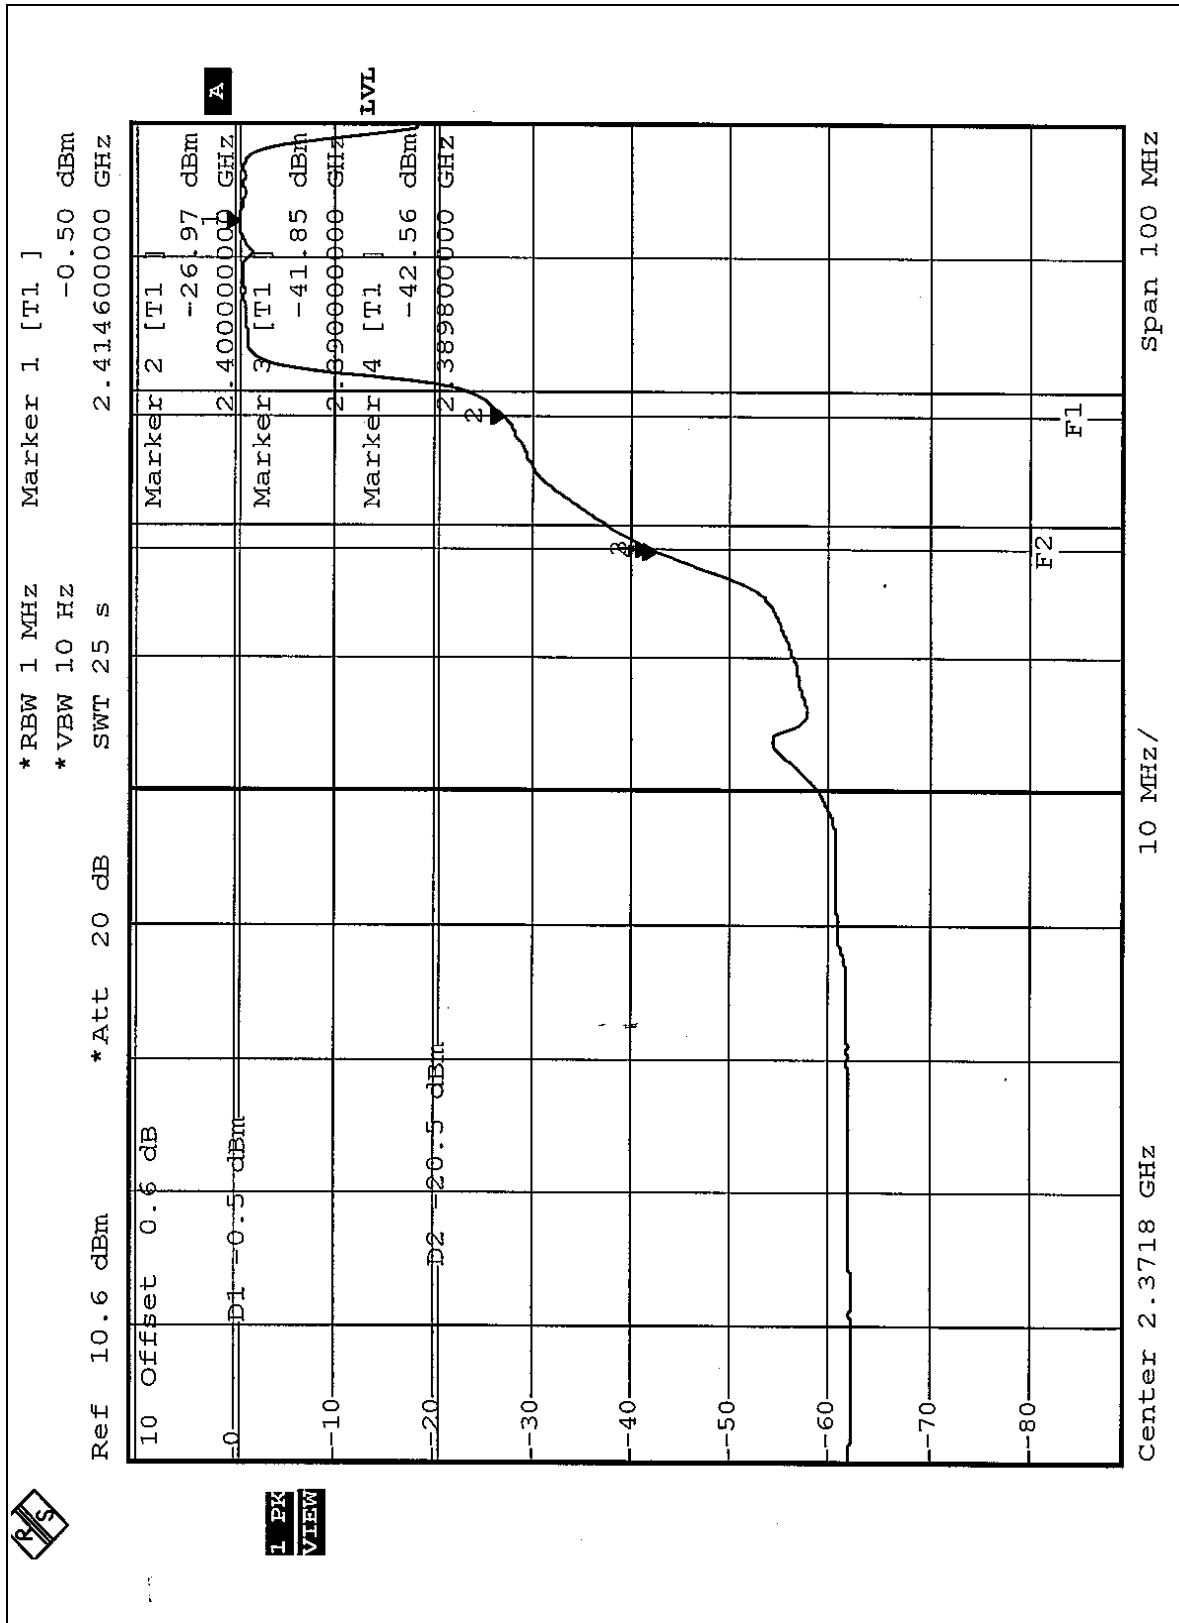

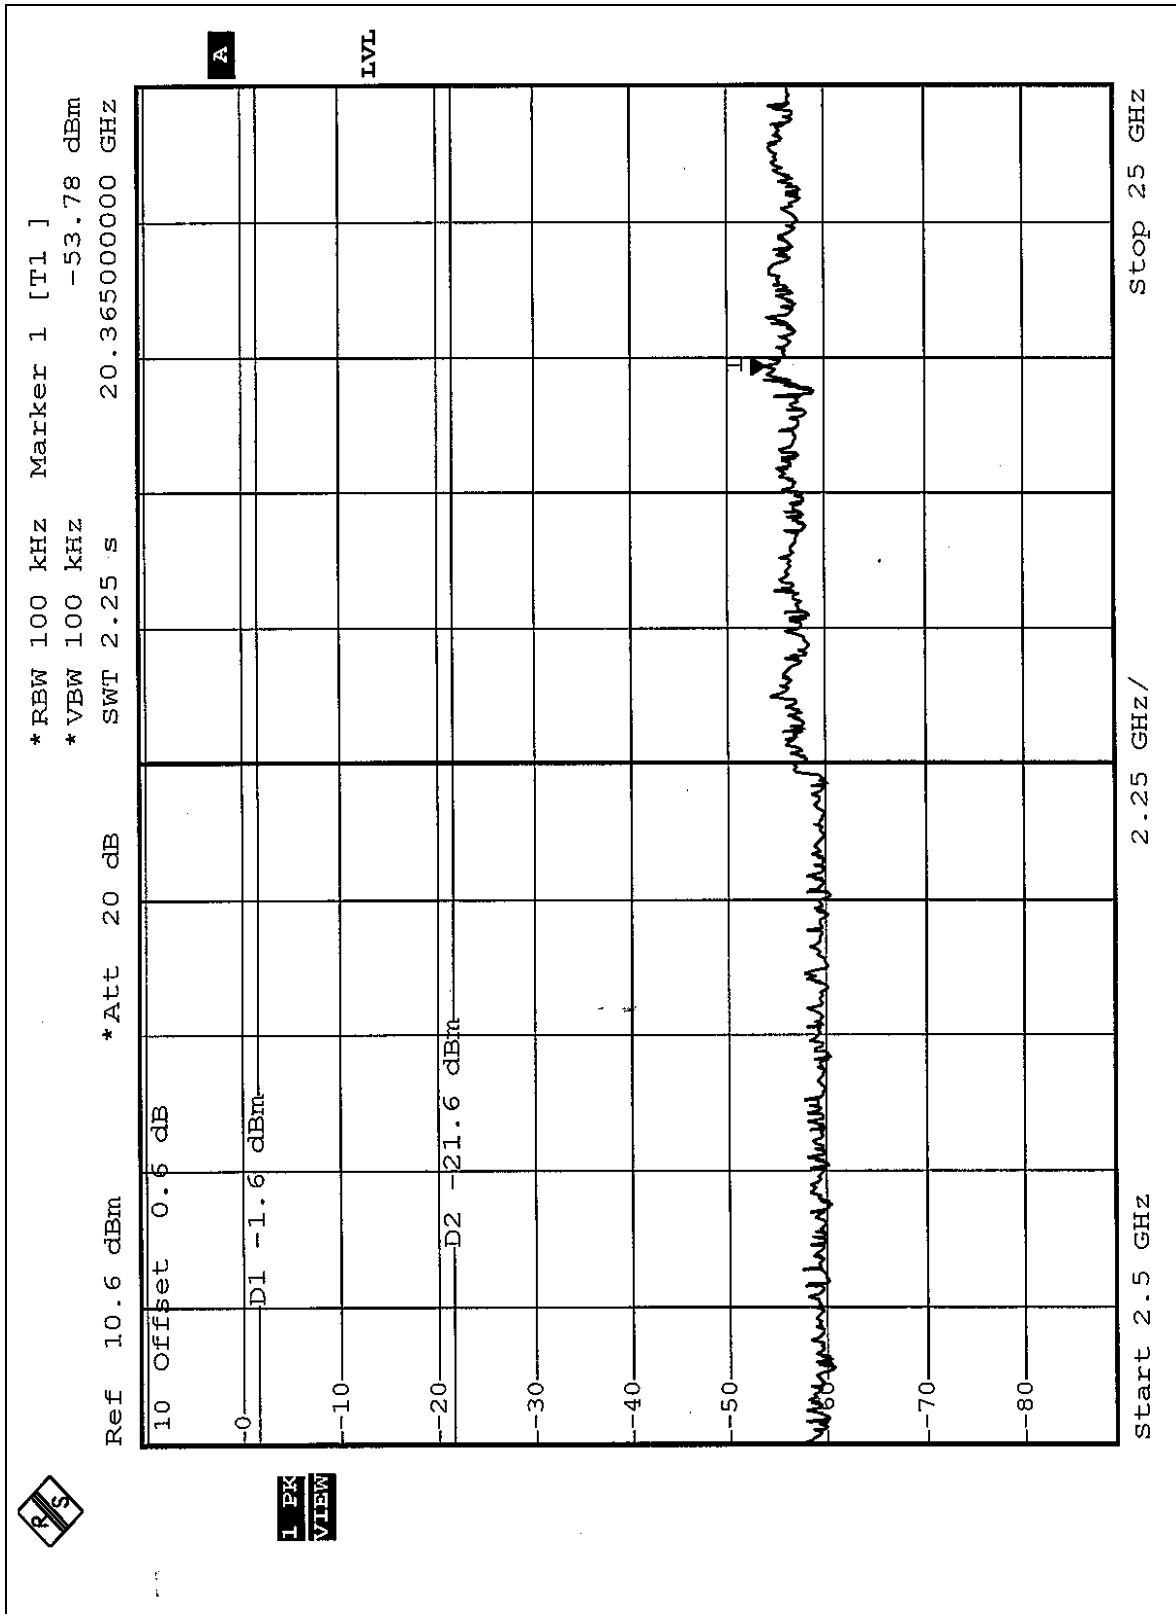

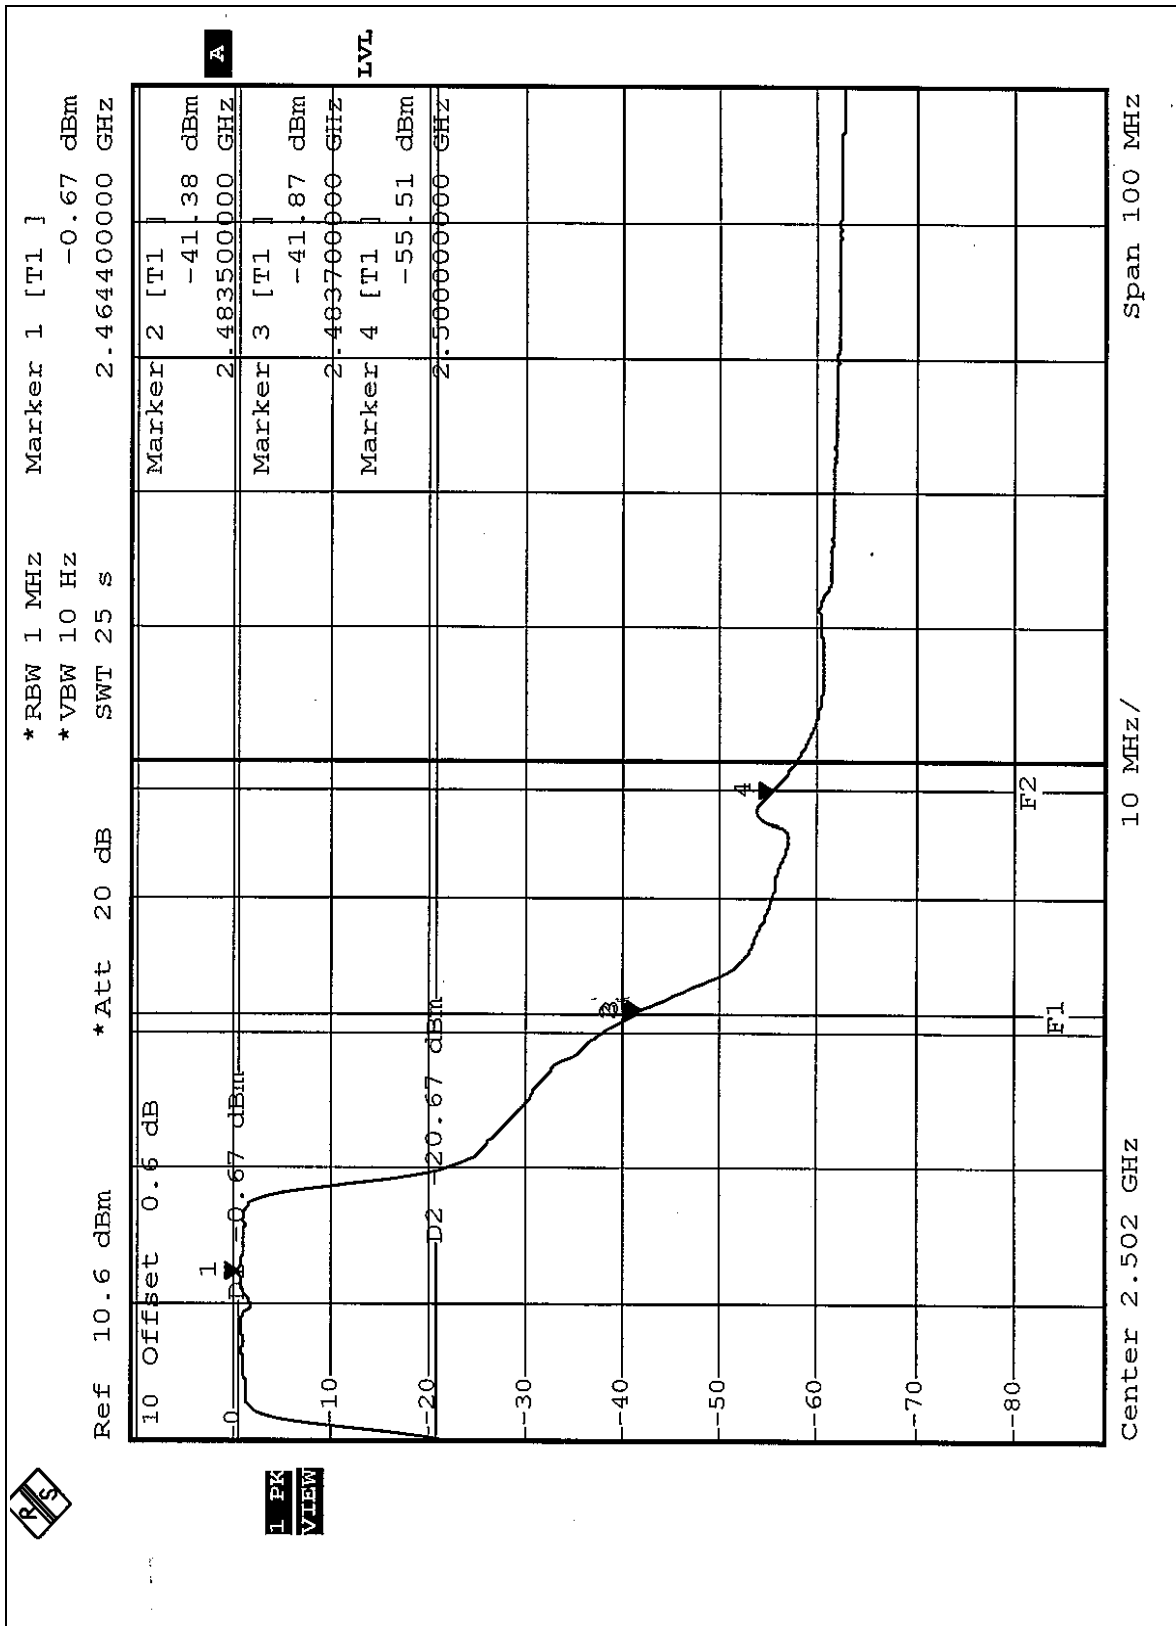

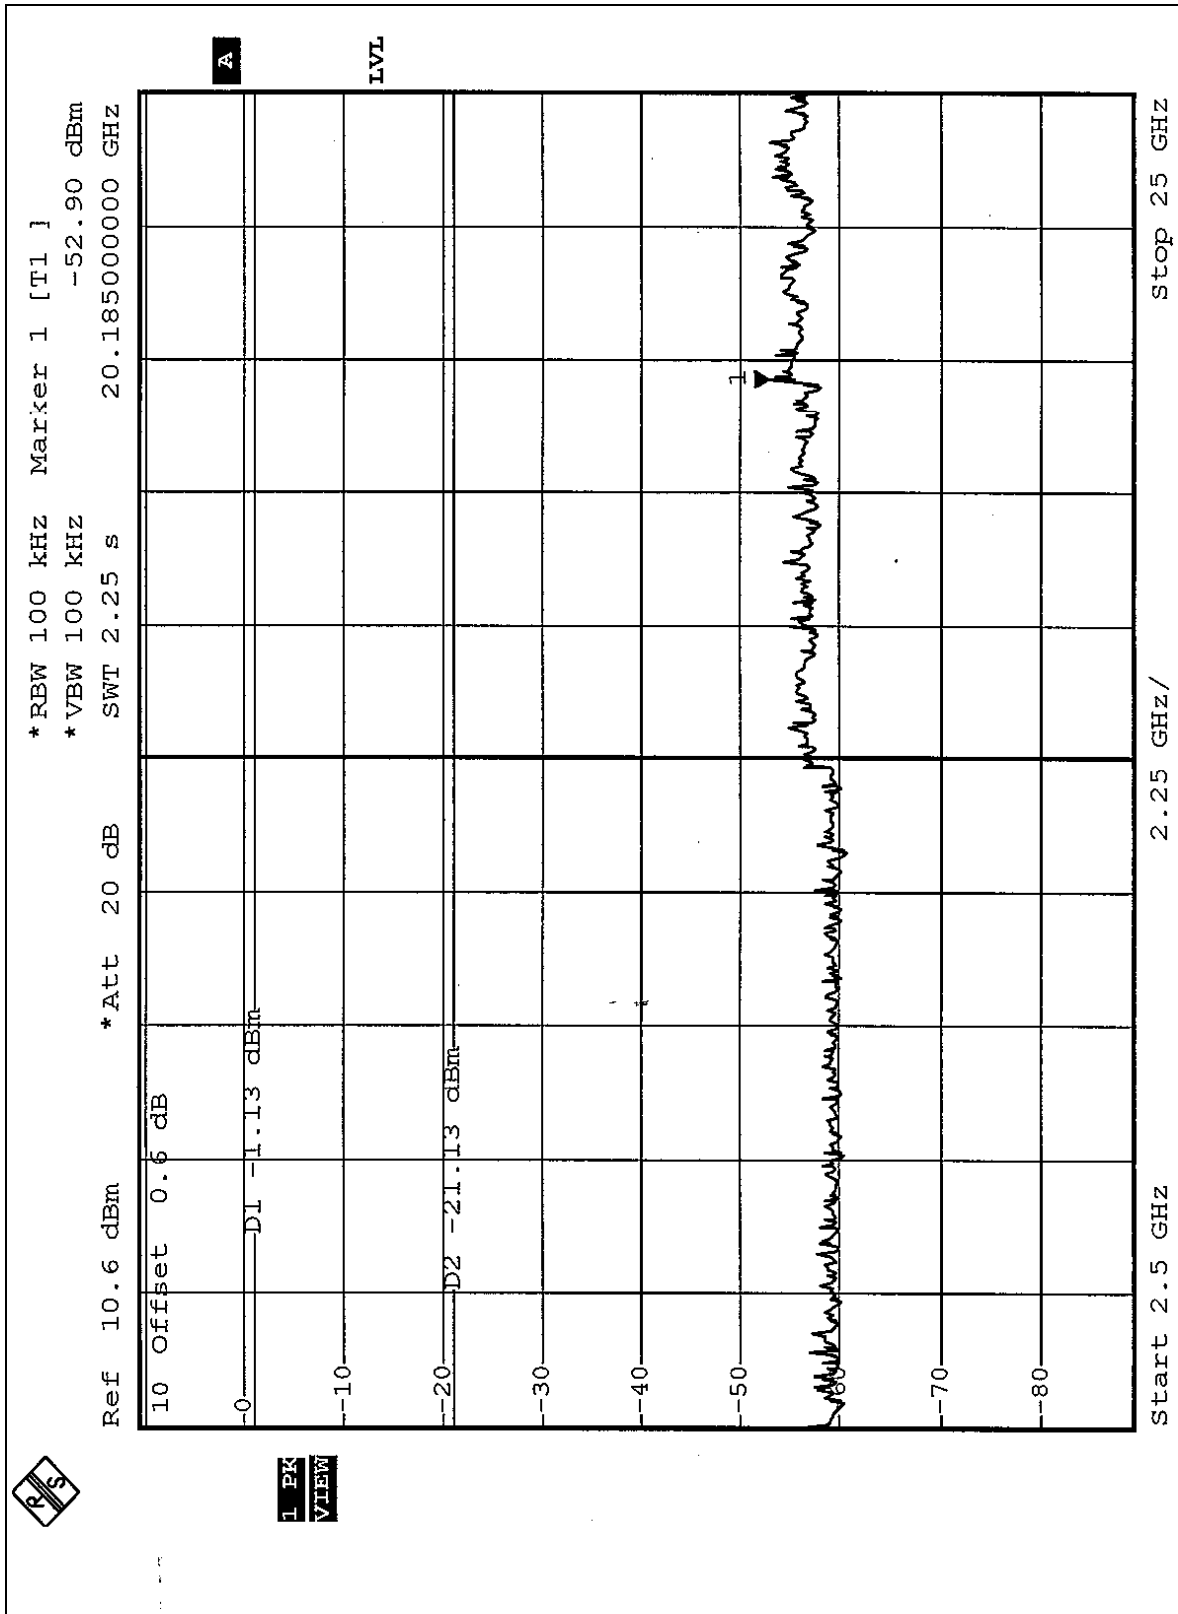



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Chip antenna without connector. And the maximum Gain of this antenna is 0dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST

(Mode A)




(Mode B)




(Mode C)




RADIATED EMISSION TEST (Mode A)

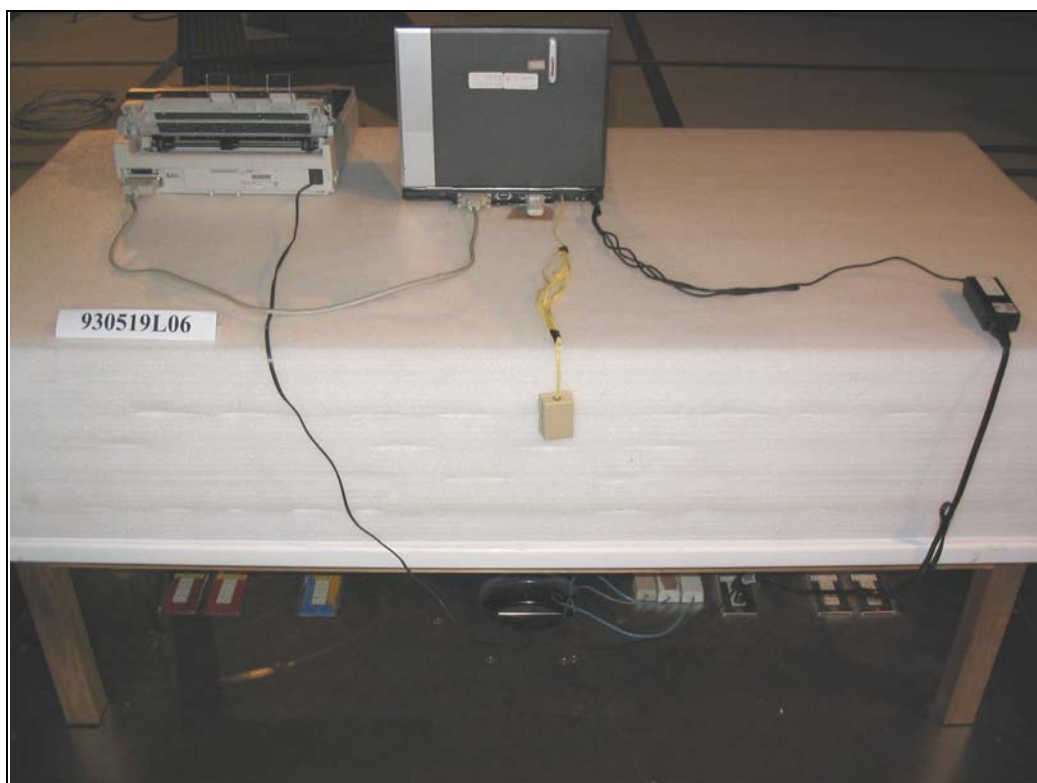

(Mode B)

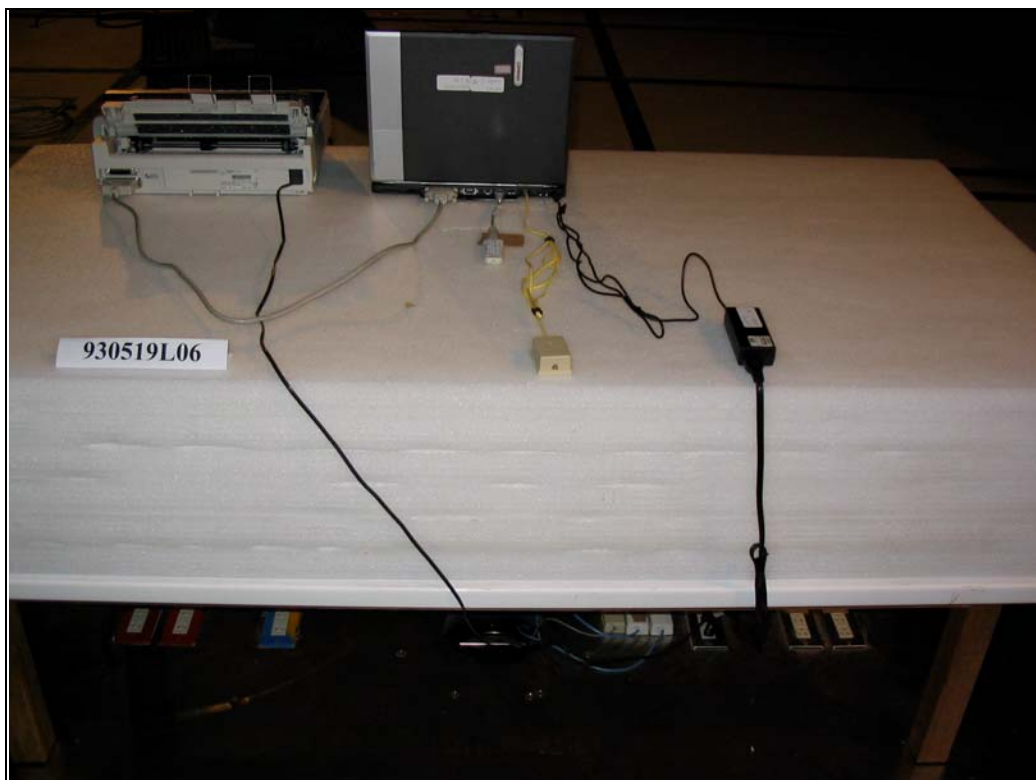

(Mode C)

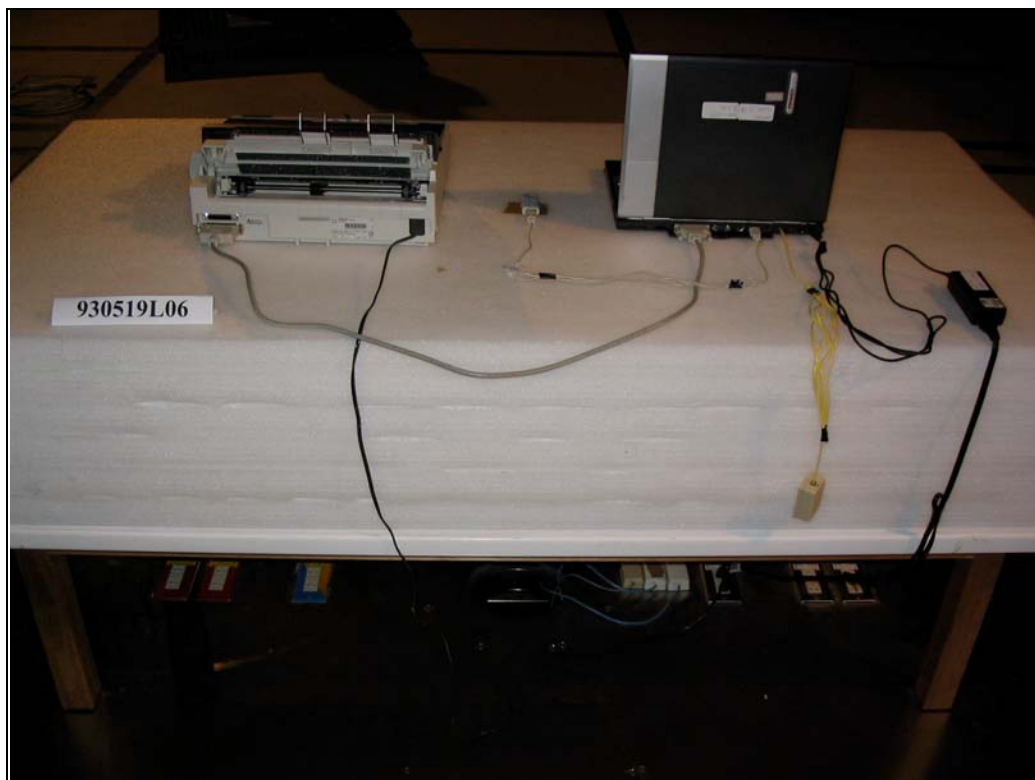



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.0