
TEST REPORT FOR WLAN TESTING

Report No.: SRTC2021-9004(F)-21011203(F)

Product Name: LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile

Product Model: ZTE Blade A31

Applicant: ZTE CORPORATION

Manufacturer: ZTE CORPORATION

Specification: FCC Part 15 Subpart C (2019)

FCC ID: SRQ-ZTEA31

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District,

Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION.....	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT'S DETAILS	2
1.4 MANUFACTURER'S DETAILS	2
1.5 TEST ENVIRONMENT	2
2 DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 FINAL EQUIPMENT BUILD STATUS	4
2.2 DESCRIPTION OF TEST MODES	5
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	5
2.3 DUTY CYCLE OF TEST SIGNAL	6
2.4 EUT OPERATING CONDITIONS	7
2.5 SUPPORT EQUIPMENT	7
3 REFERENCE SPECIFICATION	8
4 KEY TO NOTES AND RESULT CODES	8
5 RESULT SUMMARY	9
6 TEST RESULT	10
6.1 PEAK POWER OUTPUT	10
6.2 6dB BANDWIDTH	11
6.3 TRANSMITTER POWER SPECTRAL DENSITY	12
6.4 CONDUCTED OUT OF BAND EMISSION MEASUREMENT	13
6.5 BAND-EDGE MEASUREMENT	14
6.6 SPURIOUS RADIATED EMISSIONS	15
6.7 AC POWER LINE CONDUCTED EMISSION	20
7 MEASUREMENT UNCERTAINTIES	22
8 TEST EQUIPMENTS	23
APPENDIX A – TEST DATA OF CONDUCTED EMISSION	24
APPENDIX B – TEST DATA OF RADIATED EMISSION	35

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn

1.3 Applicant's details

Company:	ZTE CORPORATION
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District,Guangdong
City:	Shenzhen
Country or Region:	China
Contacted person:	Gong Yu
Tel:	+86-21-68895397
Fax:	---
Email:	gongyu@zte.com.cn

1.4 Manufacturer's details

Company:	ZTE CORPORATION
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District,Guangdong
City:	Shenzhen
Country or Region:	China
Contacted person:	Gong Yu
Tel:	+86-21-68895397
Fax:	---
Email:	gongyu@zte.com.cn

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2021-01-12
Testing Start Date:	2021-01-12
Testing End Date:	2021-01-27

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	40
Maximum Extreme	55	---
Minimum Extreme	-10	---

Normal Supply Voltage (V d.c.):	3.80
Maximum Extreme Supply Voltage (V d.c.):	4.35
Minimum Extreme Supply Voltage (V d.c.):	3.40

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Band	2.412GHz~2.462GHz
Number of Channel For 20MHz	11
Modulation Type	DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM
Duplex Mode	TDD
Channel Spacing	5MHz
Data Rate	802.11b:1Mbps-11Mbps 802.11g:6Mbps-54Mbps 802.11n HT20:MCS0-MCS7
Power Supply	Battery/Charger
Hardware Version	zf7A
Software Version	TEL_MX_ZTE_Blade_A31V1.0
IMEI	864210050002112
Antenna type	Refer to Note1
Antenna connector	Refer to Note1

Antenna requirement (FCC part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Note1: The antenna provide to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency range(GHz)	Antenna type	Connector Type
N/A	N/A	0.94dBi	2.412GHz~2.462GHz	Fixed Internal Antenna	N/A

Manufacturers ensure that their designs will not be modified by the user or third parties arbitrary antenna parameters and performance. The EUT complies with the requirement of §15.203.

2.2 Description of Test Modes

11 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	---	---

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	-
-	√	√	√	√	-

Where

RE $\geq$ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK/ BPSK	1,6,6.5

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK/ BPSK	1,6,6.5

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK	1

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1,3, 6,9, 11	DBPSK/ BPSK	1,6,6.5

2.3 Duty Cycle of Test Signal

Modulation Type	Data Rate	Duty Cycle	Correction factor
11b	1Mbps	99.51%	0.02dB
11g	6Mbps	96.78%	0.14dB
11n(HT20)	6.5Mbps	96.67%	0.15dB
Duty cycle of test signal is > 98 %, duty factor shall not be considered. Correction factor = 10* log (1/duty cycle)			

2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:

Equipment	Battery
Manufacturer	Guangdong Fenghua New Energy Co.,Ltd.
Model Number	Li3830T43P8h486375
Equipment	Charger1
Manufacturer	SHENZHEN RUIJING INDUSTRIAL CO.LTD
Model Number	STC-A51D-Z
Equipment	Charger2
Manufacturer	Jiangxi Jian Aohai Technology Co.,Ltd
Model Number	STC-A51D-Z
Equipment	Charger3
Manufacturer	HUIZHOU PUAN ELECTRONICS CO., LTD
Model Number	STC-A51D-Z
Equipment	Headset1
Manufacturer	JUWEI ELECTRONICS CO.,LTD
Model Number	JWEP1091-Z01
Equipment	Headset2
Manufacturer	ShenZhen FDC Electronic Co.,Ltd
Model Number	DEM-8A
Equipment	USB1
Manufacturer	Dongguan Guojun Plastic Electronic Co.,Ltd
Model Number	USB-MU5-B-70-M-L
Equipment	USB2
Manufacturer	Shenzhen Yihuaxing Electronic Co.,Ltd
Model Number	USB-MU5-B-70-M-L

3 REFERENCE SPECIFICATION


Specification	Version	Title
FCC part15 Subpart C	2019	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02r02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.

5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	Transmitter Output Power	15.247(b)(3)	Pass
2	6dB Bandwidth	15.247(a)(2)	Pass
3	Transmitter Power Spectral Density	15.247(e))	Pass
4	Conducted Out of band emission measurement	15.247(d)	Pass
5	Band Edge	15.247(d)	Pass
6	Spurious Radiated Emissions	15.205/15.209	Pass
7	AC Power line Conducted Emission	15.207	Pass
8	Antenna requirement	15.203	Pass(refer to section 2.1)

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. Tong Daocheng 	Issued date: 20210201

6 TEST RESULT

6.1 Peak Power Output

6.1.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.2.2 Test limit

Part15.247 (b) (3)

The maximum permissible conducted output power is 1 Watt.

6.2.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3

ANSI C63.10-2013 – Section 11.9.2.3.2

KDB 558074 D01 v05r02 – Section 8.3.1.3

6.2.4 Test Settings

Peak Power Measurement


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.2.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.2.6 Test result

The test results are shown in Appendix A.

6.2 6dB Bandwidth

6.2.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.1.2 Test limit

Part15.247 (a) (2)

The minimum permissible 6dB bandwidth is 500 kHz

6.1.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2


KDB 558074 D01 v05r02 – Section 8.2

6.1.4 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

6.1.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.1.6 Test result

The test results are shown in Appendix A.

6.3 Transmitter Power Spectral Density

6.3.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.3.2 Test limit

Part15.247 (e)

The maximum permissible power spectral density is 8.0dBm in any 3 kHz band.

6.3.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD


KDB 558074 D01 v05r02 – Section 8.4

6.3.4 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.3.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.3.7 Test result

The test results are shown in Appendix A.

6.4 Conducted Out of band emission measurement

6.4.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.4.2 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.4.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

KDB 558074 D01 v05r02 – Section 8.5

6.4.4 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 MHz
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

6.4.5 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.4.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.4.7 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.5 Band-edge measurement

6.5.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.5.2 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.5.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

KDB 558074 D01 v05r02 – Section 8.7.2

6.5.4 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 MHz
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

6.5.5 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.5.7 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.6 Spurious Radiated Emissions

6.6.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.6.2 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.6.3 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

6.6.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05r02r02 – Section 12.2.7

For Radiated emission below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

For Radiated emission above 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.6.5 Test Settings

Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)

Frequency	Detector
<1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.6 Test Setup


For Radiated emission below 30MHz

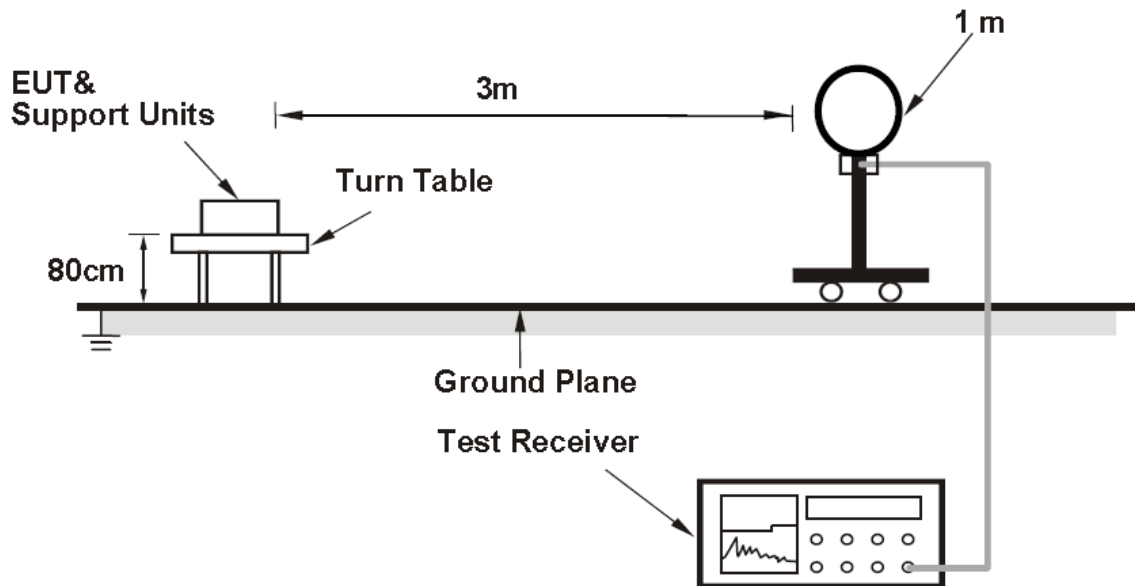

For Radiated emission 30MHz to 1GHz

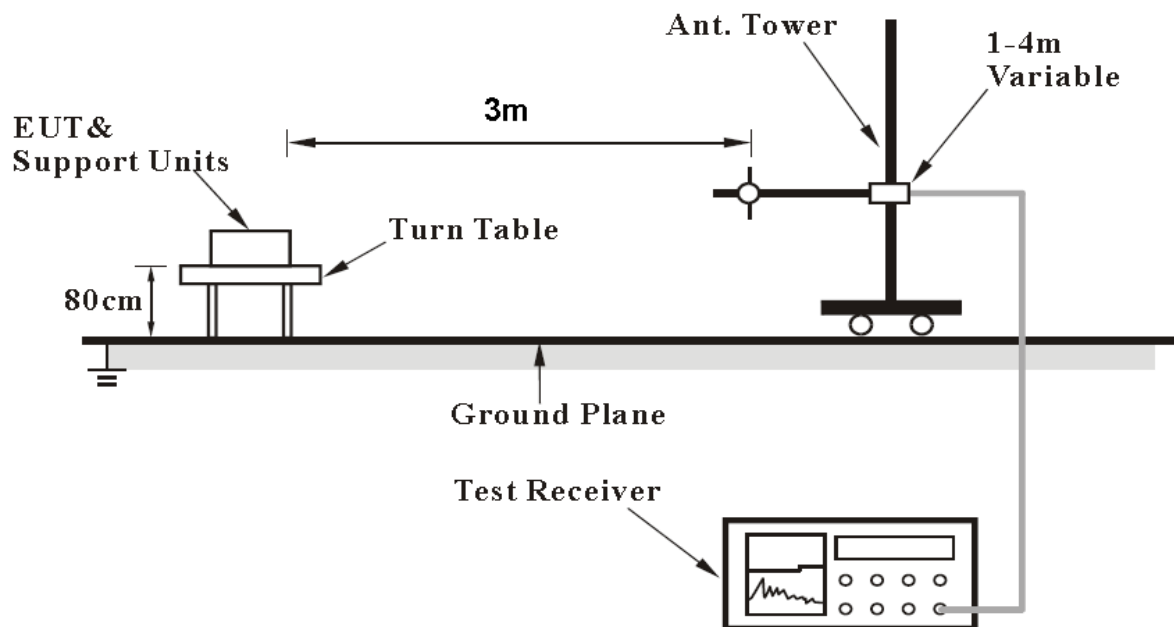

For Radiated emission above 1GHz

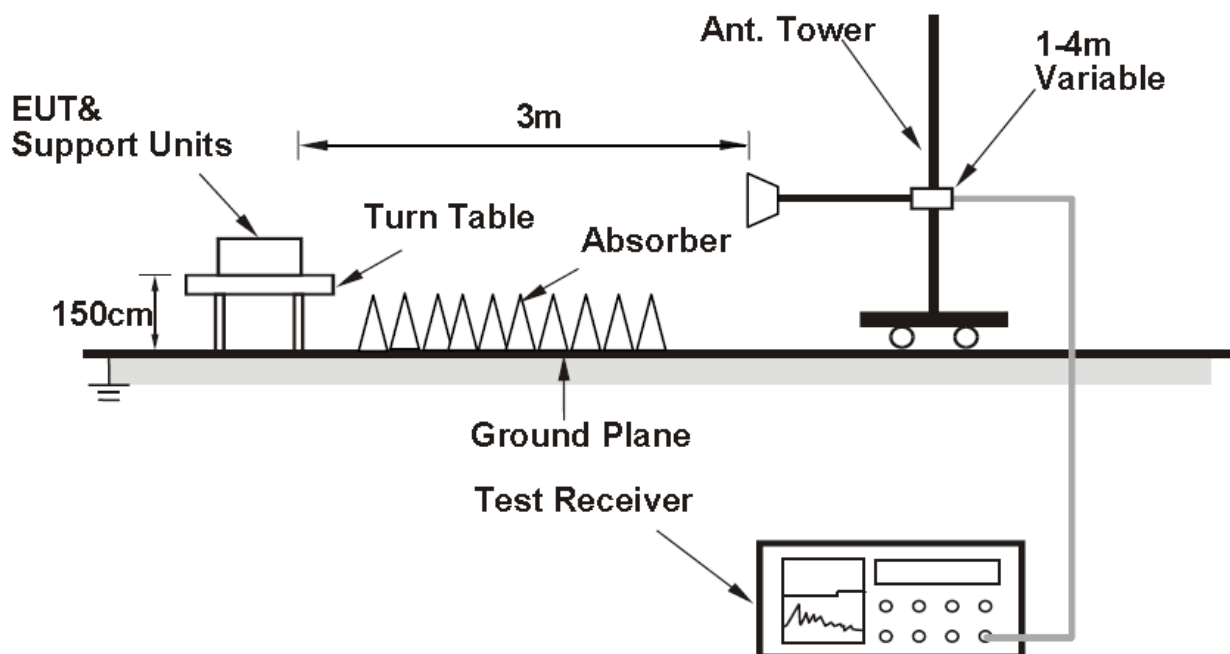

6.6.7 Test result

The test results are shown in Appendix B.

6.7 AC Power line Conducted Emission

6.7.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	40%	101.5kPa

6.7.2 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
0.15-0.5 0.5-5 5-30	Quasi-peak	Average
	66 to 56 *	56 to 46 *
	56	46
	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.7.3 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/60Hz.

6.7.4 Test Setup

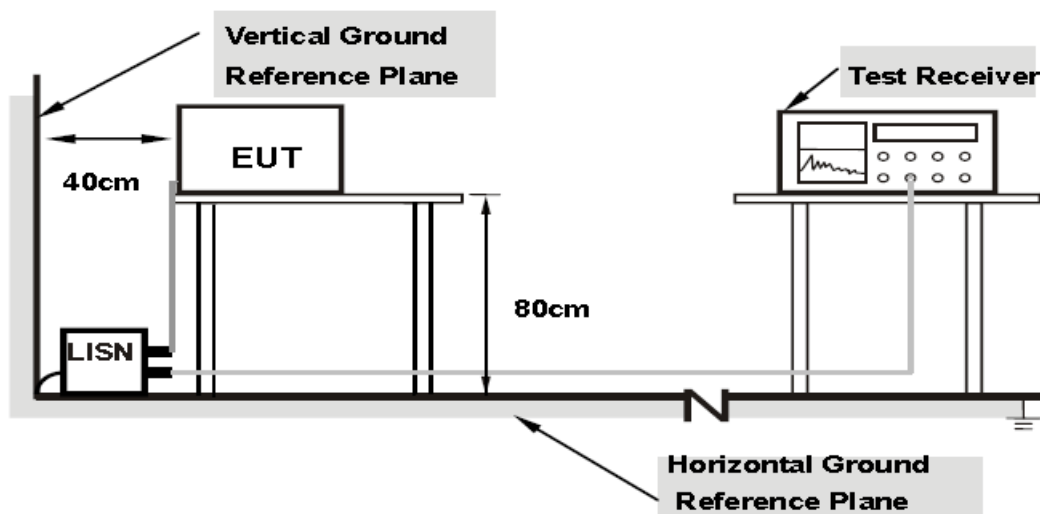

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.5 Test result

The test results are shown in Appendix B.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
Occupied Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Spurious emissions	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB

8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer FSV	ROHDE&SCHWARZ	101065	2020.08.20	2021.08.19
2.	Power Meter E4416A	Agilent	MY52370013	2020.04.13	2021.04.12
3.	Power Sensor E9327A	Agilent	MY52420006	2020.04.13	2021.04.12
4.	Attenuator 6810.17.B	HUBER+SUHNER	768710	2020.08.20	2021.08.19
5.	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	----	----
6.	Turn table Diameter:5m	FRANKONIA	----	----	----
7.	Antenna master SAC(MA4.0)	MATURO	----	----	----
8.	9.080m×5.255m×3.525m Shielding room	FRANKONIA	----	----	----
9.	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	2020.08.20	2021.08.19
10.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2020.08.20	2021.08.19
11.	ESI 40 EMI test receiver	R&S	100015	2020.08.20	2021.08.19
12.	ESCS30 EMI test receiver	R&S	100029	2020.08.20	2021.08.19
13.	HL562 Receive antenna	R&S	100167	2020.08.20	2021.08.19
14.	ENV216 AMN	R&S	3560.6550.12	2020.08.20	2021.08.19

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
802.11b	1Mbps
802.11g	6Mbps
802.11n HT20	MCS0(6.5 Mbps)

Conducted power

Modulation type	Peak power output (dBm)		
	2412MHz	2437MHz	2462MHz
802.11b	20.73	22.06	20.89
802.11g	24.04	25.89	24.32
11n HT20	23.24	24.93	23.78

Modulation type	Average power output (dBm)		
	2412MHz	2437MHz	2462MHz
802.11b	17.08	18.35	17.26
802.11g	18.02	19.61	18.45
11n HT20	15.86	17.65	16.06


6dB Bandwidth

Offset 11.2dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 1.0dB


Test Mode: 802.11b

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	9.08
2437	6	9.06
2462	11	9.10


CH1

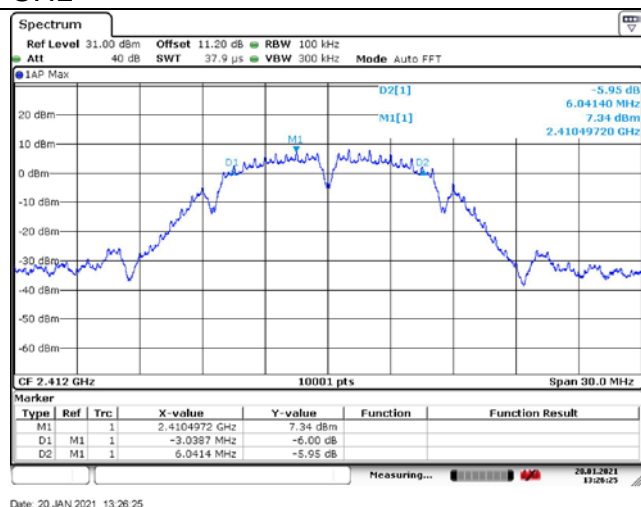

CH6

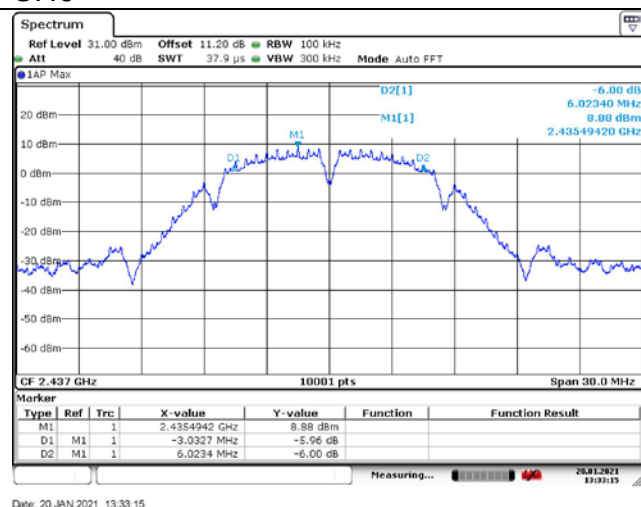


CH11

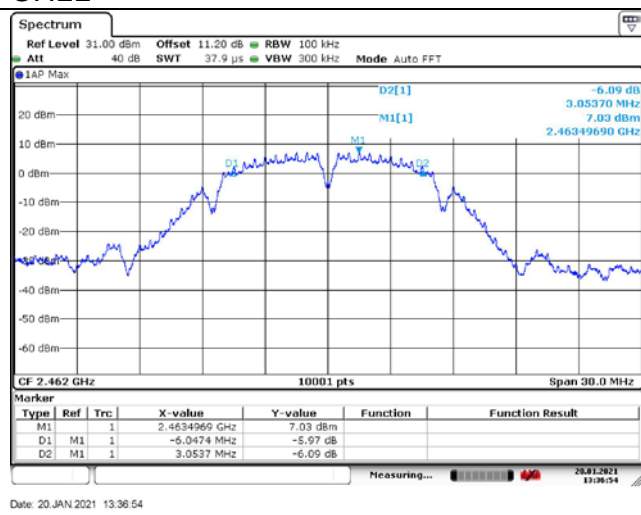


Test Mode: 802.11g

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	16.35
2437	6	16.32
2462	11	16.33


CH1

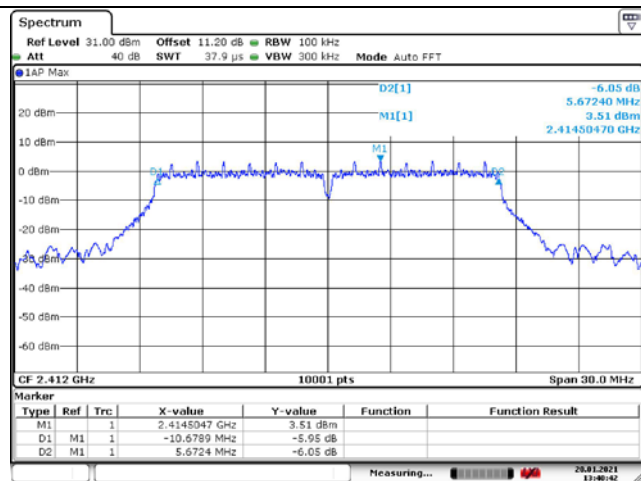

CH6

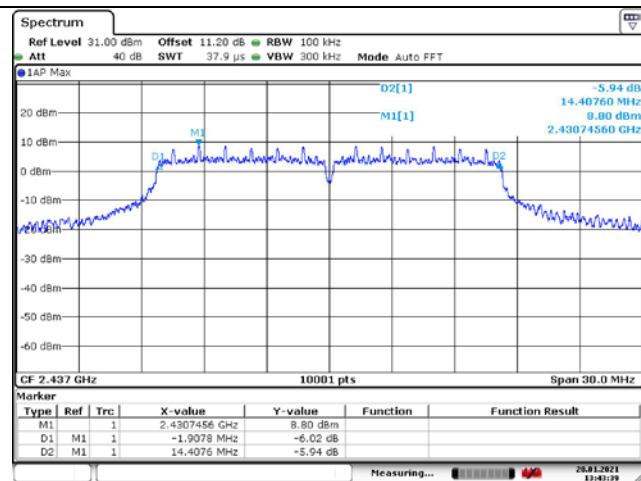


CH11

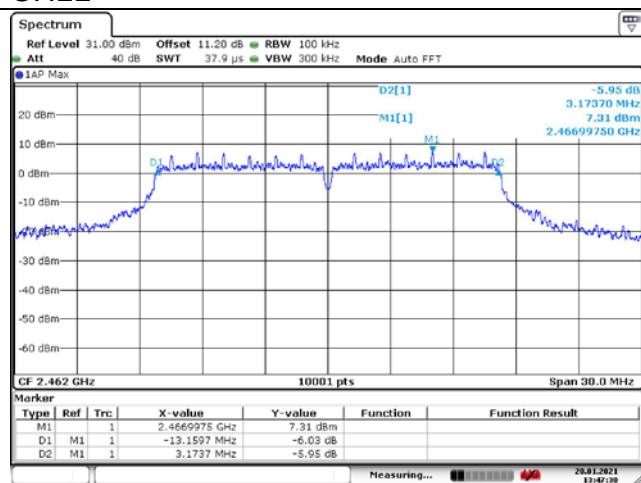


Test Mode: 802.11n (HT20)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	17.58
2437	6	17.56
2462	11	17.58


CH1

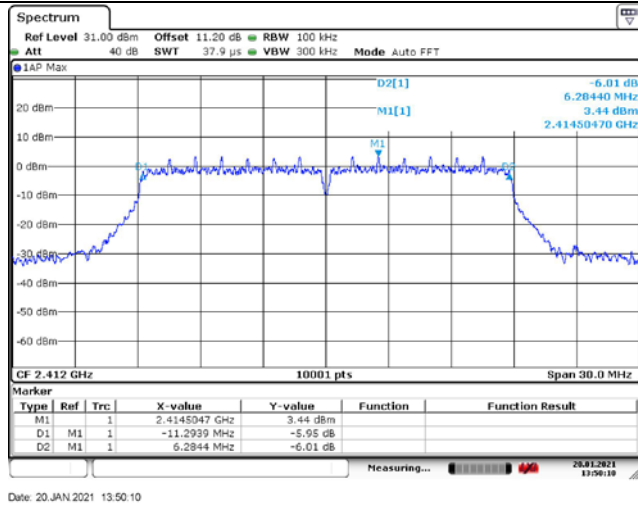

CH6

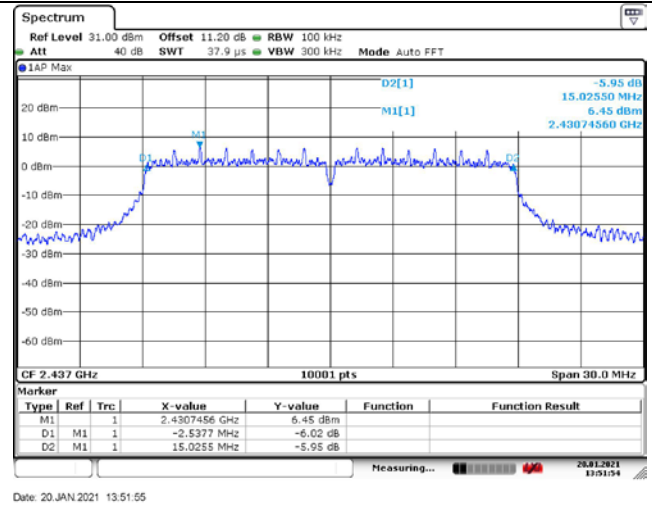

CH11

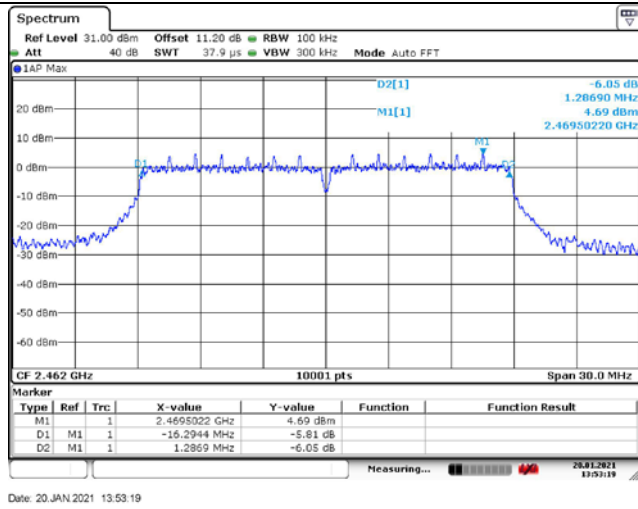


Transmitter Power Spectral Density

Offset 11.2dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 1.0dB

Test Mode: 802.11b


Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	7.16
2437	6	6.90
2462	11	5.92

CH1

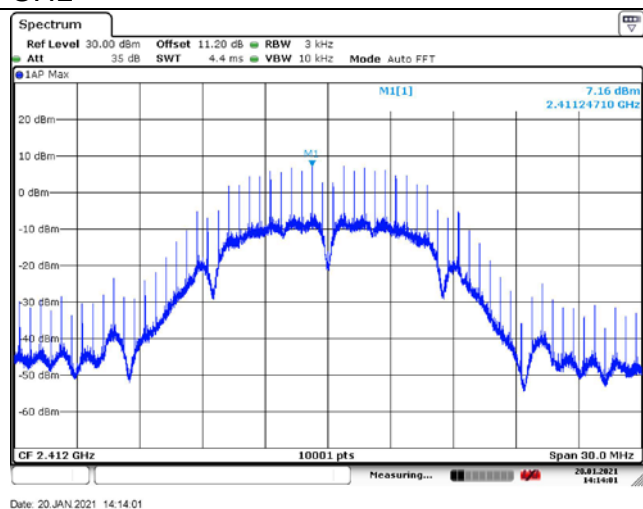


Date: 20 JAN 2021 14:14:01

CH6

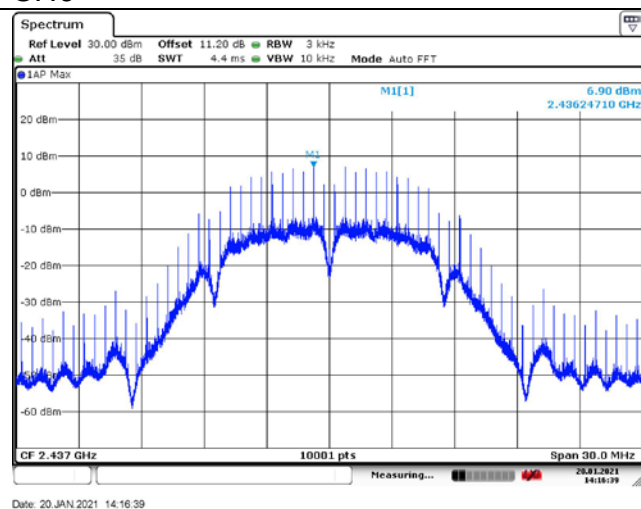

Date: 20 JAN 2021 14:16:39

CH11

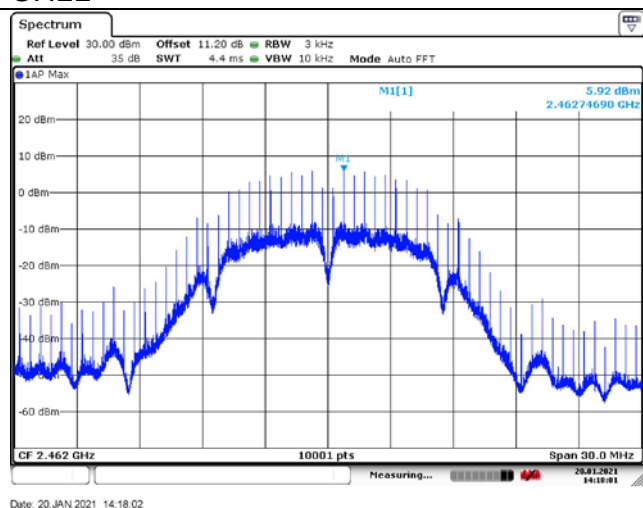


Date: 20 JAN 2021 14:18:02

Test Mode: 802.11g


Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-9.25
2442	6	-6.60
2472	11	-7.21

CH1

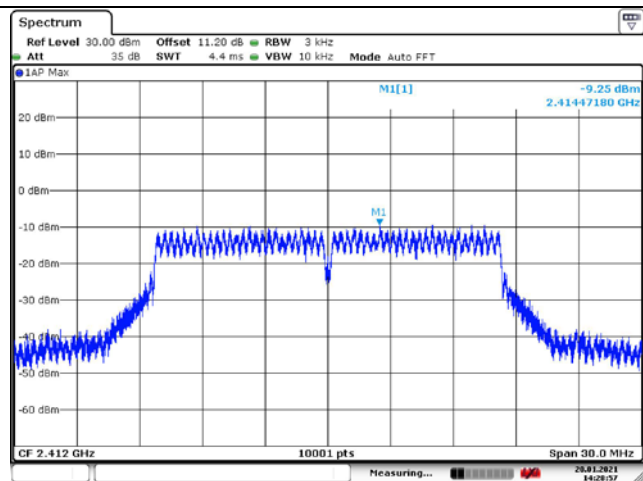


Date: 20 JAN 2021 14:28:57

CH6

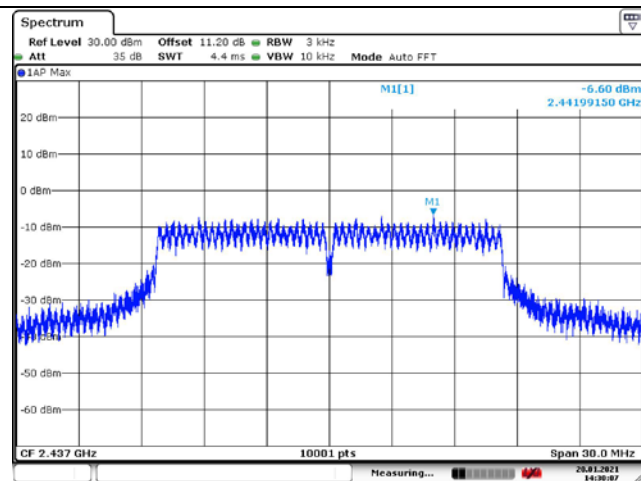

Date: 20 JAN 2021 14:30:07

CH11

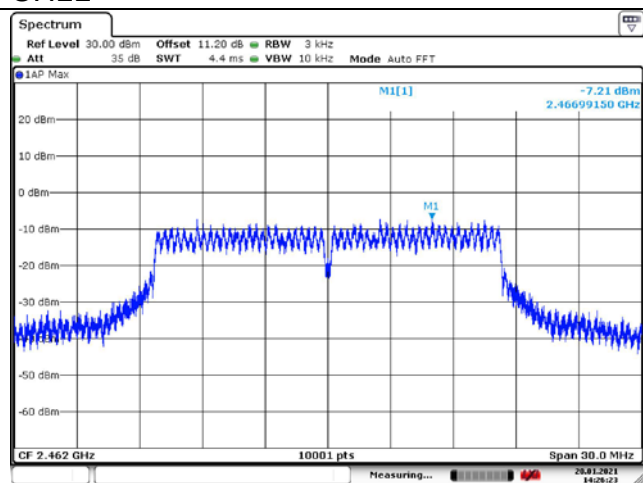


Date: 20 JAN 2021 14:26:23

Test Mode: 802.11n (HT20)


Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-11.53
2437	6	-8.01
2462	11	-9.52

CH1

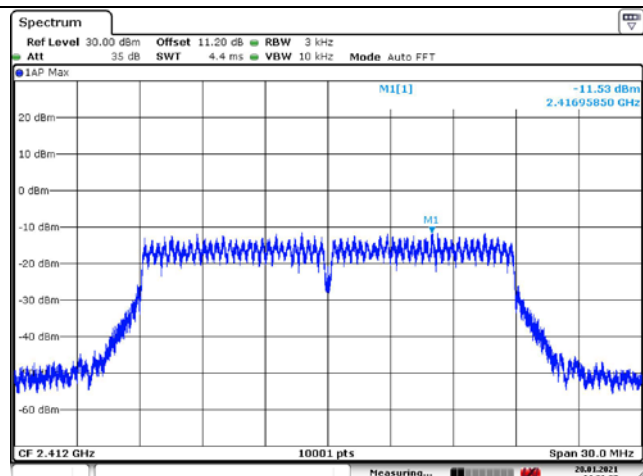


Date: 20 JAN 2021 14:31:38

CH6

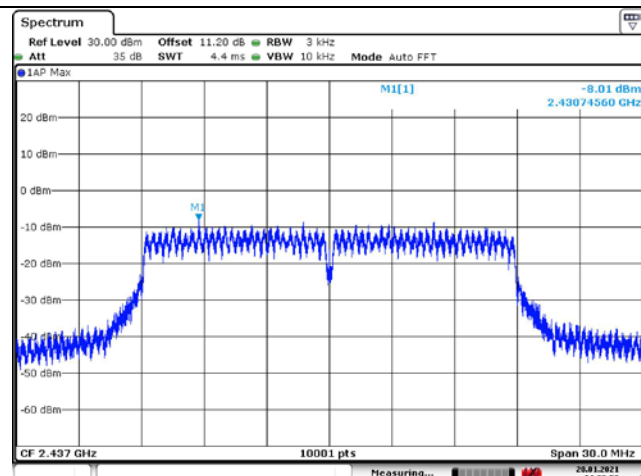

Date: 20 JAN 2021 14:32:50

CH11

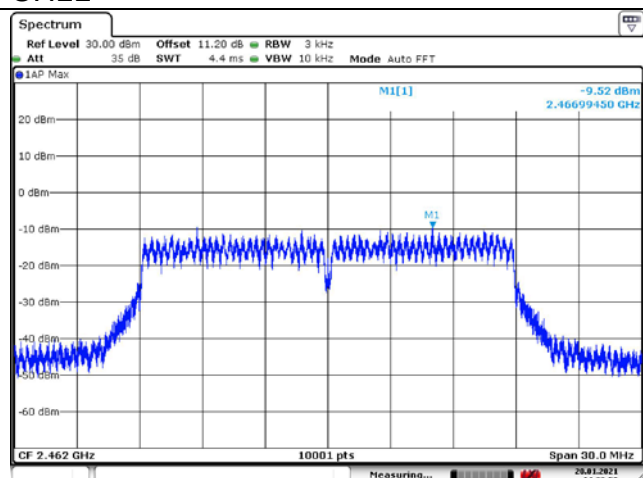


Date: 20 JAN 2021 14:33:59

Conducted Out of band emission measurement


Offset 11.2dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 1.0dB

Test Mode: 802.11b


CH1

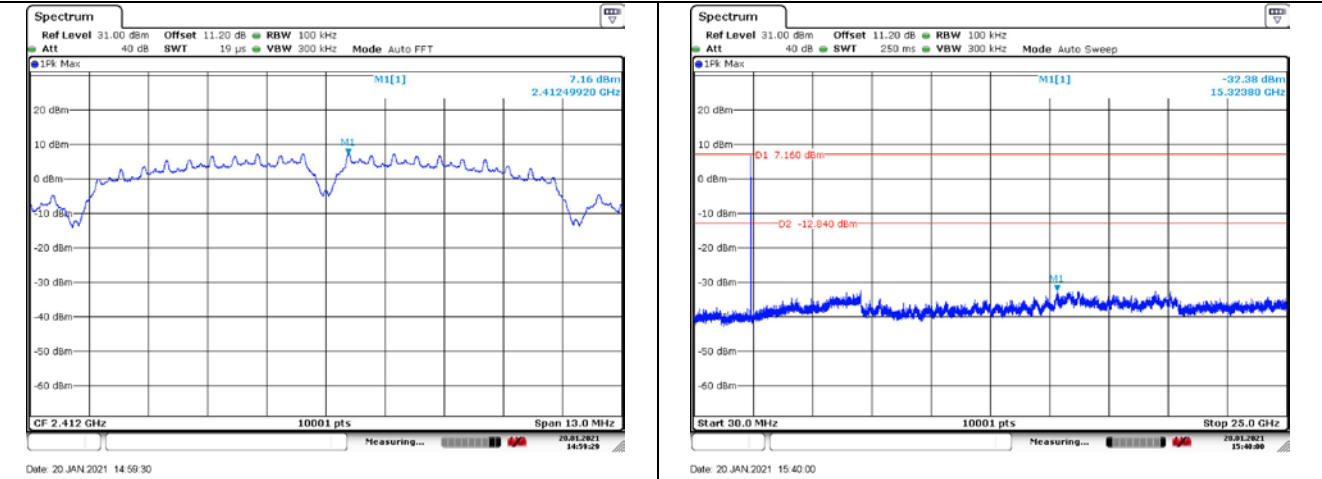

CH6

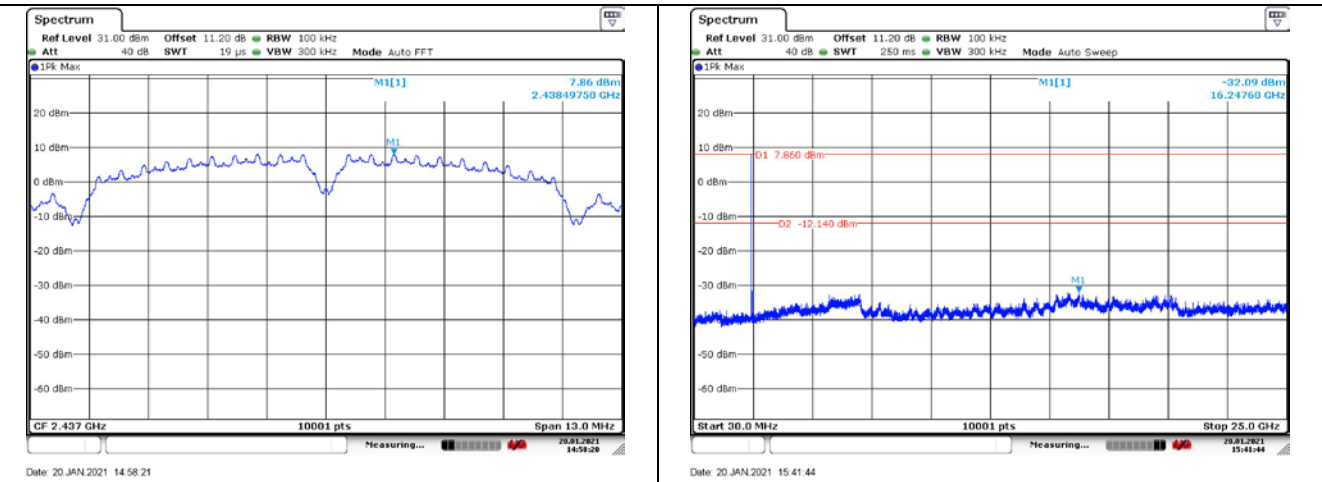


CH11

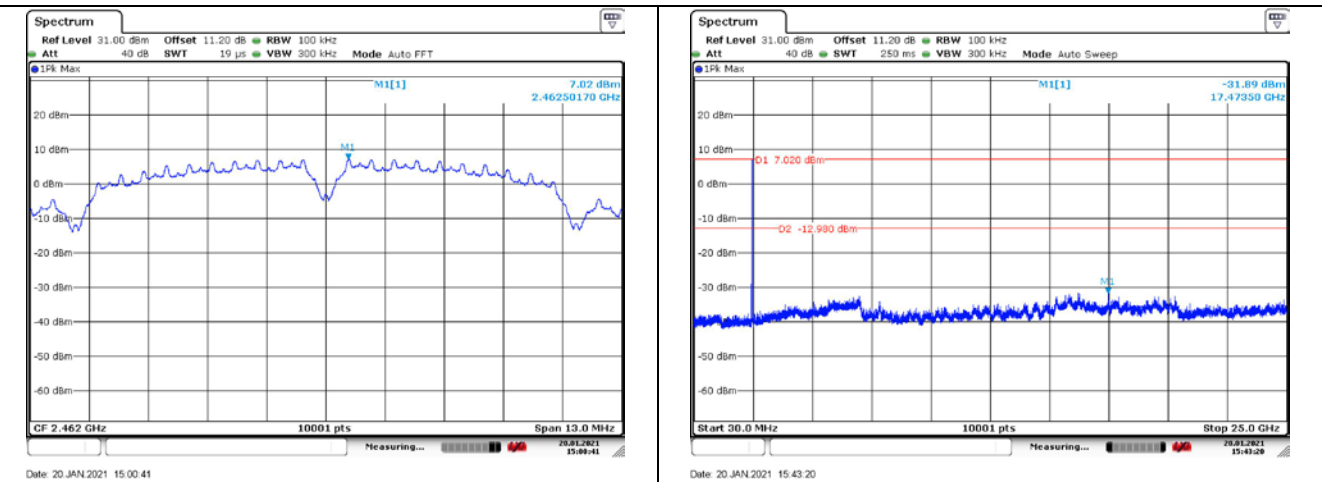


Test Mode: 802.11g

CH1

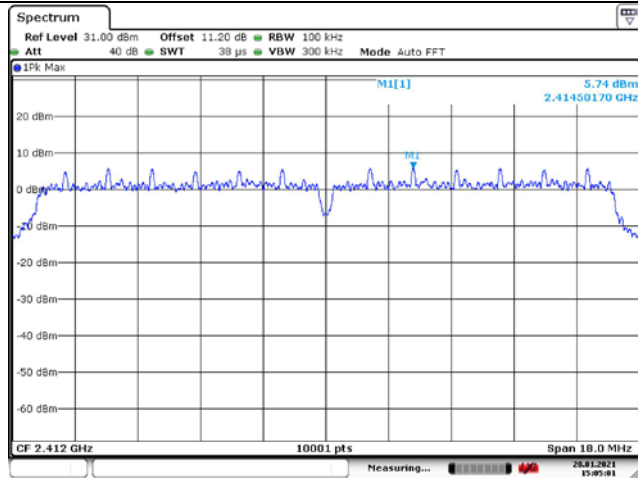


Date: 20 JAN 2021 15:05:01

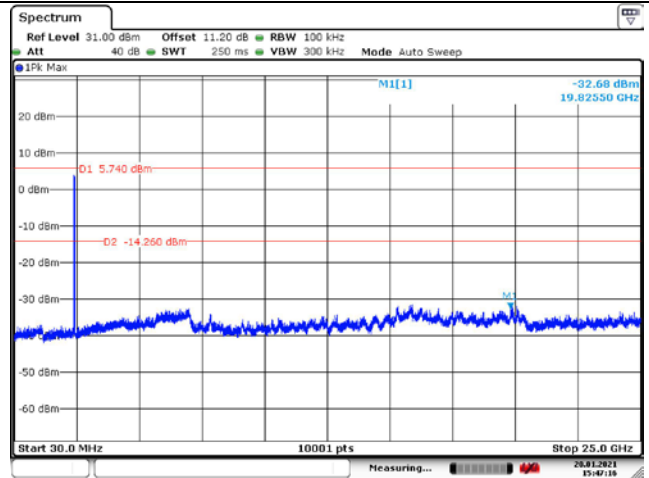


Date: 20 JAN 2021 15:47:16

CH6

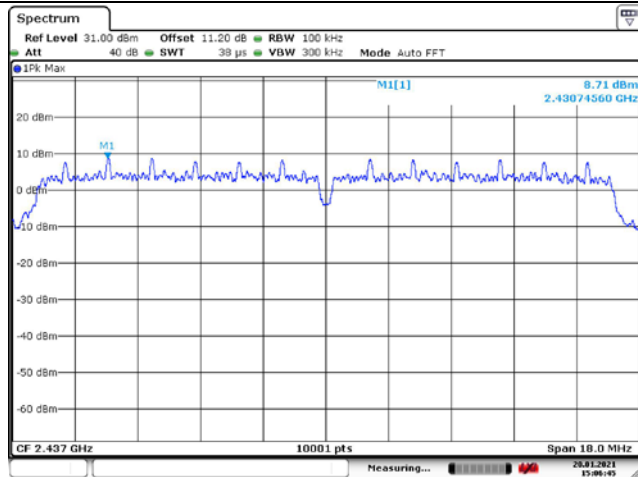


Date: 20 JAN 2021 15:06:45

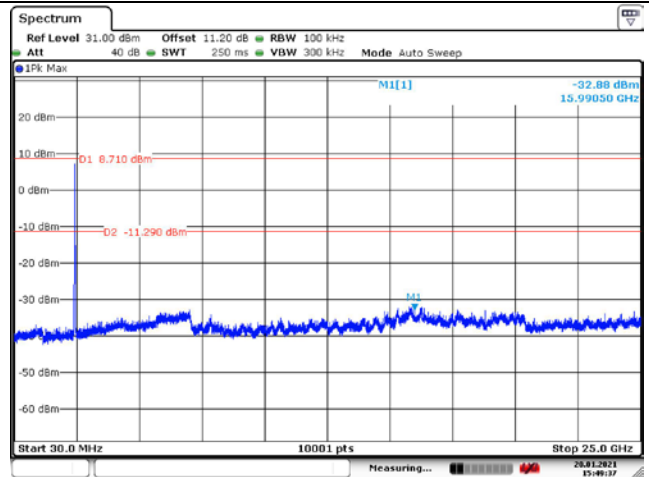


Date: 20 JAN 2021 15:49:37

CH11

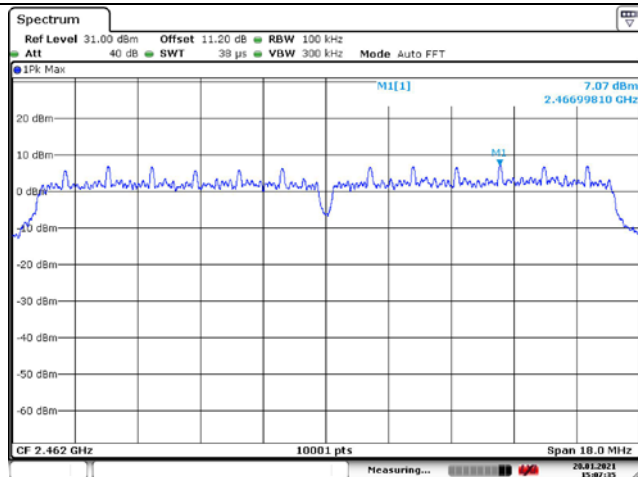



Date: 20 JAN 2021 15:07:35

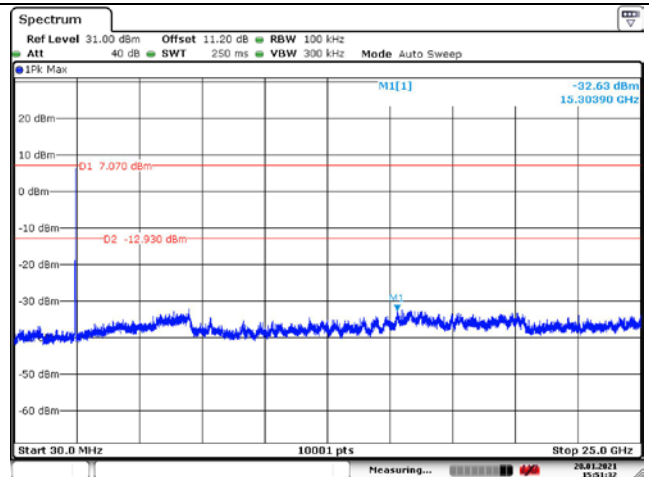



Date: 20 JAN 2021 15:51:31

Test Mode: 802.11n (HT20)



CH1

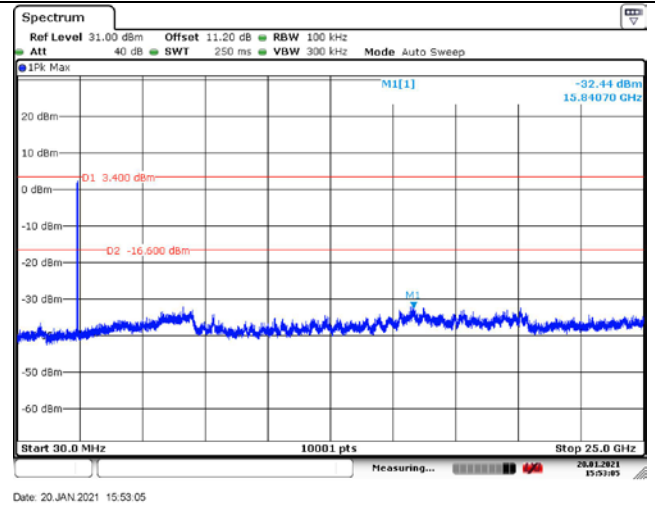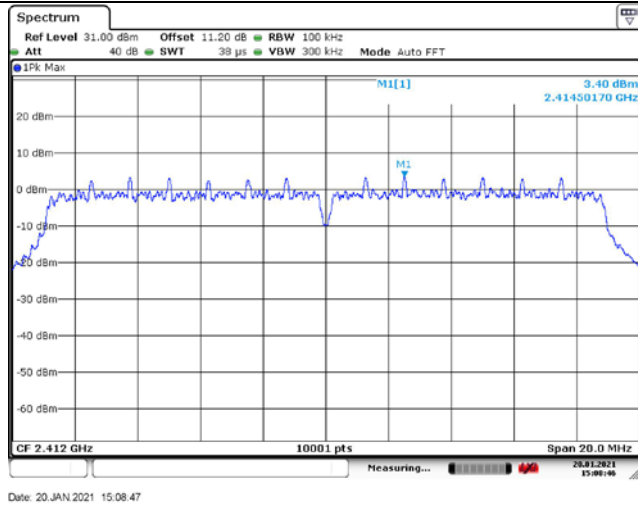

CH6

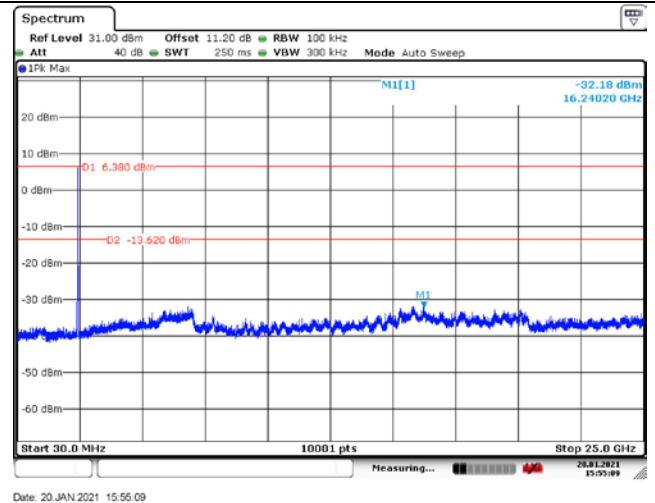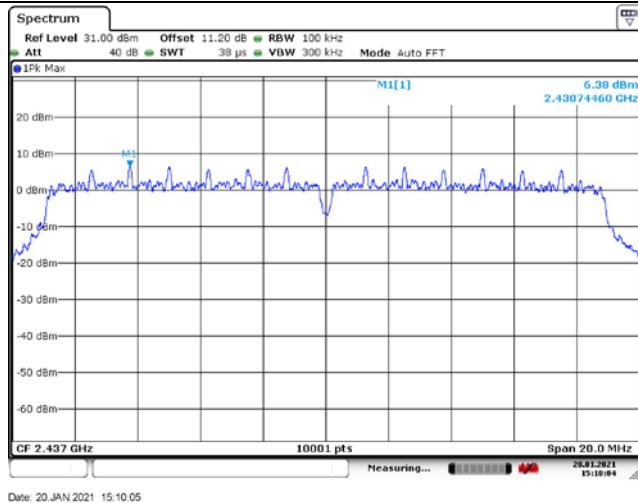

CH11

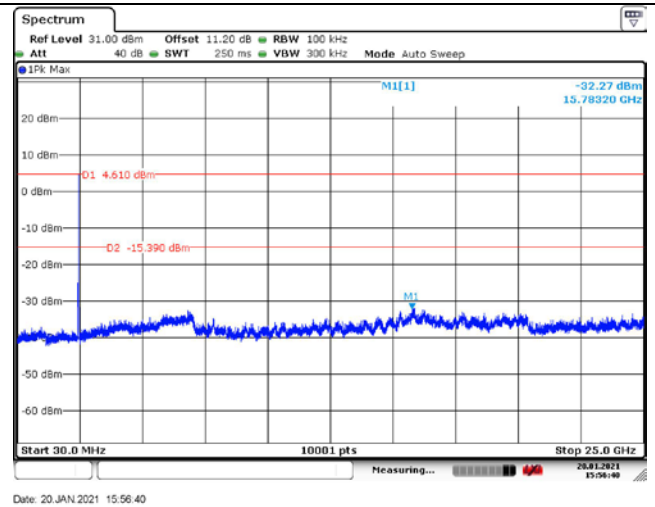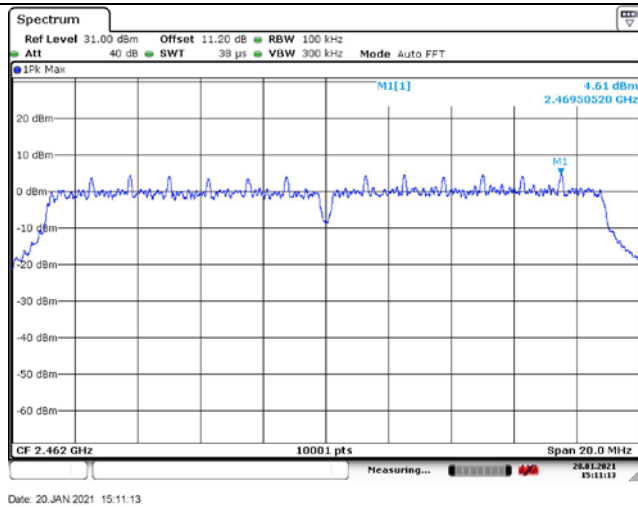


Band edge measurement (RF Conducted measurement)

Offset 11.2 dB = Attenuator 10dB+ Temporary antenna connector loss 0.2dB+ Cable loss 1.0dB


Test Mode: 802.11b

CH1

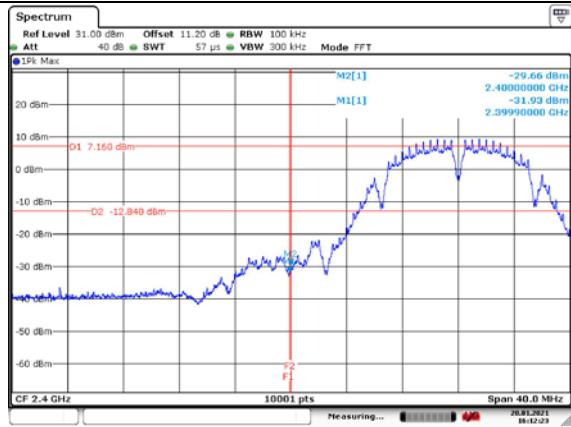

Date: 20 JAN 2021 16:12:23


CH11

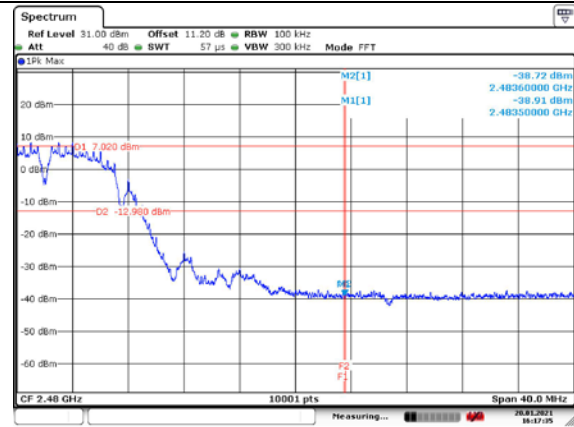

Date: 20 JAN 2021 16:17:36


Test Mode: 802.11g

CH1

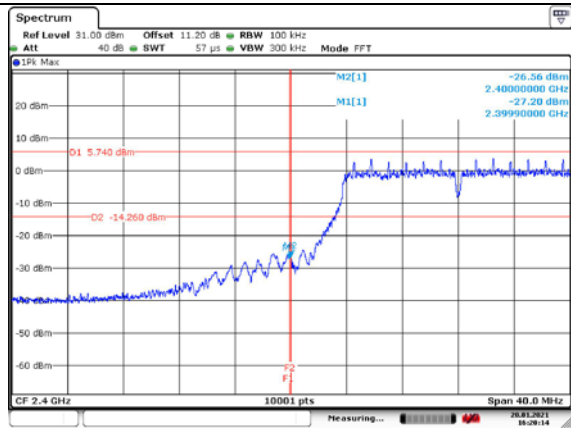

Date: 20 JAN 2021 16:20:14


CH11

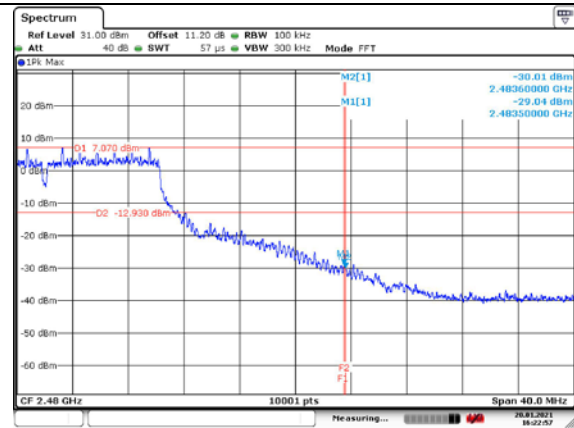

Date: 20 JAN 2021 16:22:56


Test Mode: 802.11n (HT20)

CH1

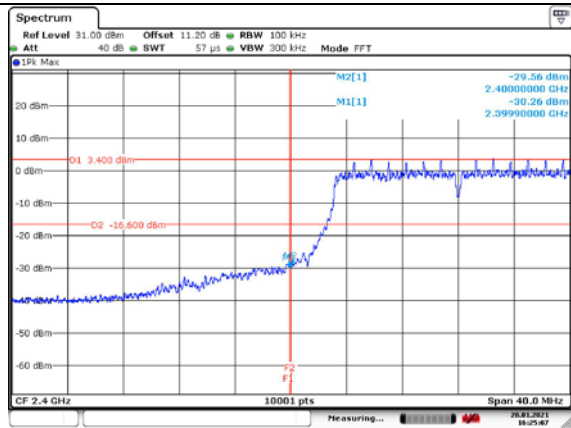

Date: 20 JAN 2021 16:25:08

CH11

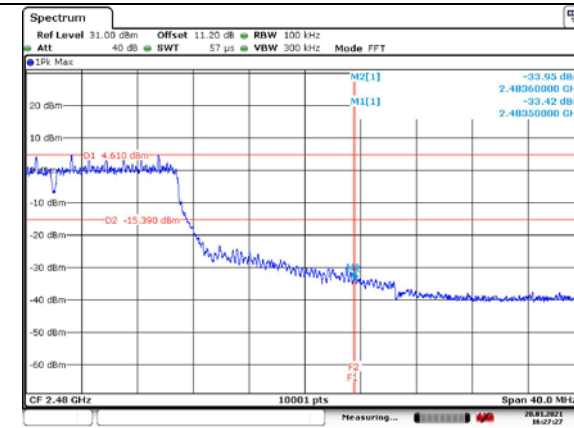

Date: 20 JAN 2021 16:27:28

6

APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (101.64 dBuV/m) = (67.64 dBμV) + (8.90 dB) + (25.10 dB/m), the corresponding frequency is 2412MHz.

The measurement results contain the correction factor of the duty cycle.

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	101.64	67.64	N/A	N/A	8.90	25.10
2	2390	46.03	12.03	-27.97	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	99.38	65.38	N/A	N/A	8.90	25.10
2	2390	44.87	10.87	-29.13	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	99.82	65.82	N/A	N/A	8.90	25.10
2	2390	36.05	2.05	-17.95	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	97.02	63.02	N/A	N/A	8.90	25.10
2	2390	35.21	1.21	-18.79	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	101.27	67.27	N/A	N/A	8.90	25.10
2	2483.5	45.02	11.02	-28.98	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	98.95	64.95	N/A	N/A	8.90	25.10
2	2483.5	42.92	8.92	-31.08	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	99.01	65.01	N/A	N/A	8.90	25.10
2	2483.5	35.68	1.68	-18.32	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	96.13	62.13	N/A	N/A	8.90	25.10
2	2483.5	35.10	1.10	-18.90	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	101.13	67.13	N/A	N/A	8.90	25.10
2	2390	45.39	11.39	-28.61	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	98.36	64.36	N/A	N/A	8.90	25.10
2	2390	43.27	9.27	-30.73	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	99.16	65.16	N/A	N/A	8.90	25.10
2	2390	35.15	1.15	-18.85	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	97.12	63.12	N/A	N/A	8.90	25.10
2	2390	34.41	0.41	-19.59	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	101.01	67.01	N/A	N/A	8.90	25.10
2	2483.5	46.56	12.56	-27.44	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	98.88	64.88	N/A	N/A	8.90	25.10
2	2483.5	45.08	11.08	-28.92	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	98.83	64.83	N/A	N/A	8.90	25.10
2	2483.5	35.30	1.30	-18.70	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	96.46	62.46	N/A	N/A	8.90	25.10
2	2483.5	34.75	0.75	-19.25	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	100.95	66.95	N/A	N/A	8.90	25.10
2	2390	45.68	11.68	-28.32	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	98.50	64.50	N/A	N/A	8.90	25.10
2	2390	44.56	10.56	-29.44	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	98.17	64.17	N/A	N/A	8.90	25.10
2	2390	35.20	1.20	-18.80	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2412	95.23	61.23	N/A	N/A	8.90	25.10
2	2390	33.27	-0.73	-20.73	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	100.71	66.71	N/A	N/A	8.90	25.10
2	2483.5	46.24	12.24	-27.76	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	97.88	63.88	N/A	N/A	8.90	25.10
2	2483.5	43.78	9.78	-30.22	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	98.05	64.05	N/A	N/A	8.90	25.10
2	2483.5	36.60	2.60	-17.40	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11


Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuv/m)	cable loss (dB)	antenna factor (dB/m)
1	2462	95.72	61.72	N/A	N/A	8.90	25.10
2	2483.5	34.91	0.91	-19.09	54.00	8.90	25.10

Full Spectrum

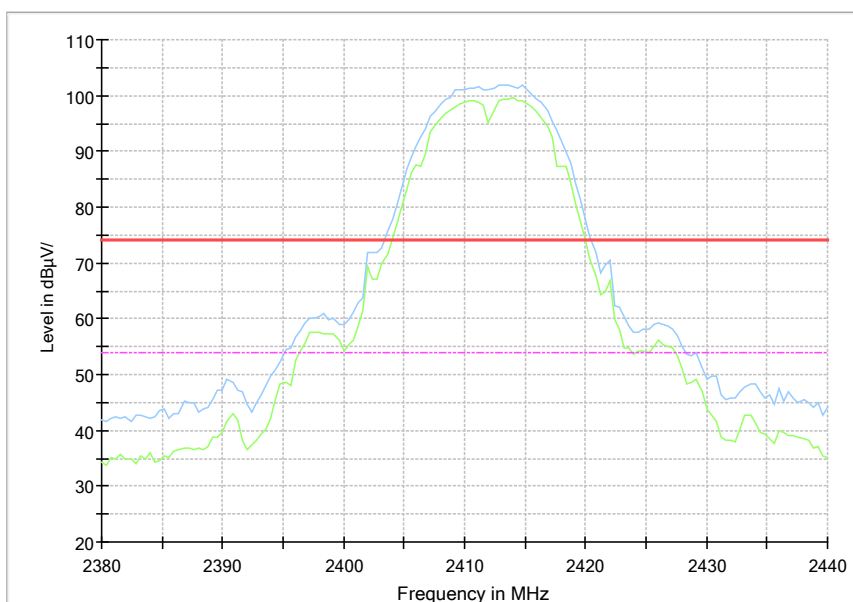

Radiated Emission Band Edge for 2412MHz

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: $(29.48 \text{ dB}\mu\text{V/m}) = (49.88 \text{ dB}\mu\text{V}) + (-20.4 \text{ dB/m})$, the corresponding frequency is 32.502000MHz.

The worst case attitude: The mobile lay down.

For 802.11b Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
32.502000	29.48	-20.4	49.88	Vertical	40.00
96.599500	22.76	-19.3	42.06	Vertical	43.50
98.097000	24.05	-19.0	43.05	Vertical	43.50
241.887500	15.89	-16.5	32.39	Vertical	46.00
556.333500	12.15	-7.8	19.95	Vertical	46.00
918.628500	17.02	-1.2	18.22	Vertical	46.00

For 802.11g Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
32.453500	29.21	-20.4	49.61	Vertical	40.00
96.357000	22.41	-19.3	41.71	Vertical	43.50
97.666500	21.92	-19.0	40.92	Vertical	43.50
240.935500	15.99	-16.5	32.49	Vertical	46.00
549.991000	12.10	-7.9	20.00	Vertical	46.00
949.837000	17.30	-0.9	18.20	Vertical	46.00

For 802.11n(HT20) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
32.493500	30.30	-20.4	50.70	Vertical	40.00
96.502500	20.68	-19.3	39.98	Vertical	43.50
98.185500	21.14	-18.9	40.04	Vertical	43.50
240.921000	13.18	-16.5	29.68	Vertical	46.00
540.542000	11.95	-8.2	20.15	Vertical	46.00
903.502500	16.93	-1.4	18.33	Vertical	46.00

For 802.11b Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
32.658500	25.36	-20.4	45.76	Vertical	40.00
96.656500	22.07	-19.3	41.37	Vertical	43.50
98.424500	24.89	-18.9	43.79	Vertical	43.50
243.819000	14.06	-16.5	30.56	Vertical	46.00
544.428000	11.97	-8.1	20.07	Vertical	46.00
959.334500	17.30	-0.8	18.10	Vertical	46.00

For 802.11g Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
32.576000	26.85	-20.4	47.25	Vertical	40.00
96.191000	20.97	-19.3	40.27	Vertical	43.50
98.057000	19.64	-19.0	38.64	Vertical	43.50
245.602500	14.42	-16.4	30.82	Vertical	46.00
515.507500	11.23	-8.9	20.13	Vertical	46.00
912.266500	16.92	-1.3	18.22	Vertical	46.00

For 802.11n(HT20) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
32.390500	29.75	-20.5	50.25	Vertical	40.00
71.784500	14.91	-22.0	36.91	Vertical	40.00
98.470500	22.86	-18.9	41.76	Vertical	43.50
246.370000	8.61	-16.4	25.01	Vertical	46.00
555.960000	12.08	-7.8	19.88	Vertical	46.00
899.913500	16.97	-1.5	18.47	Vertical	46.00

For 802.11b Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
32.413500	27.72	-20.5	48.22	Vertical	40.00
96.656500	21.44	-19.3	40.74	Vertical	43.50
98.297000	23.09	-18.9	41.99	Vertical	43.50
246.786000	16.29	-16.4	32.69	Vertical	46.00
507.699000	11.25	-9.1	20.35	Vertical	46.00
935.614500	17.16	-1.0	18.16	Vertical	46.00


For 802.11g Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
32.442500	29.18	-20.4	49.58	Vertical	40.00
96.576500	16.97	-19.3	36.27	Vertical	43.50
98.521500	23.02	-18.9	41.92	Vertical	43.50
246.946000	14.58	-16.4	30.98	Vertical	46.00
553.046500	11.84	-7.9	19.74	Vertical	46.00
928.739500	17.09	-1.1	18.19	Vertical	46.00

For 802.11n(HT20) Channel No.:11


Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
32.253500	27.45	-20.5	47.95	Vertical	40.00
96.842000	21.66	-19.2	40.86	Vertical	43.50
97.968500	18.64	-19.0	37.64	Vertical	43.50
248.946500	14.02	-16.3	30.32	Vertical	46.00
520.038500	11.42	-8.8	20.22	Vertical	46.00
915.875000	16.98	-1.2	18.18	Vertical	46.00

Carrier frequency (MHz): 2412
Channel No.:1

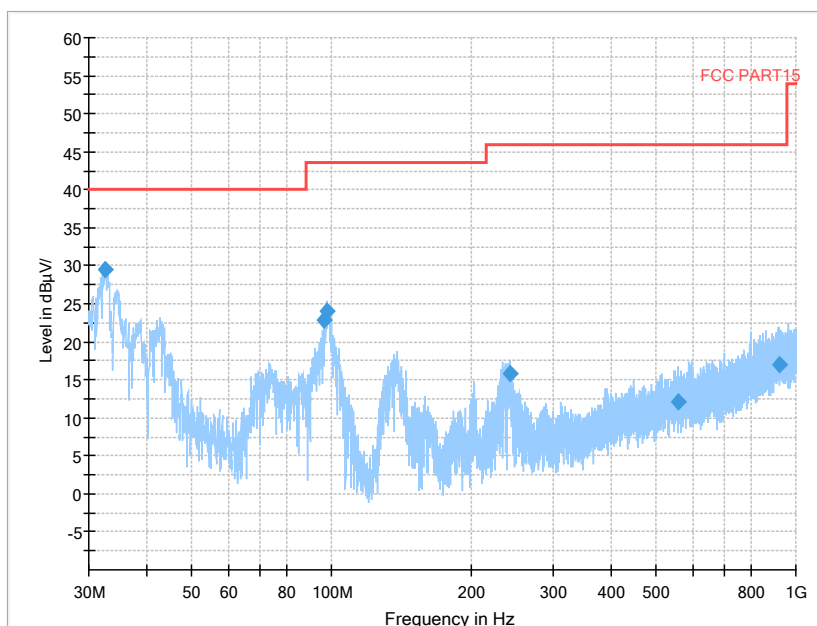


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

Full Spectrum

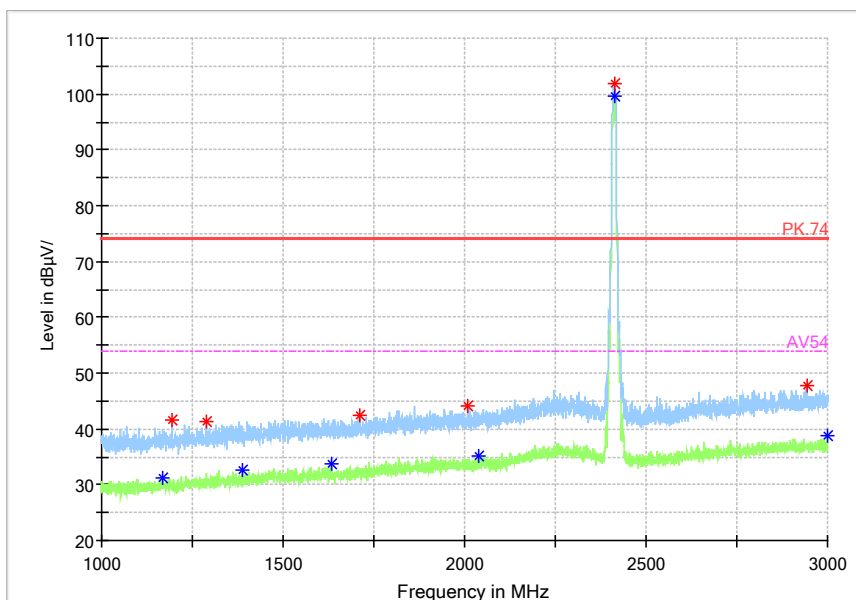


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

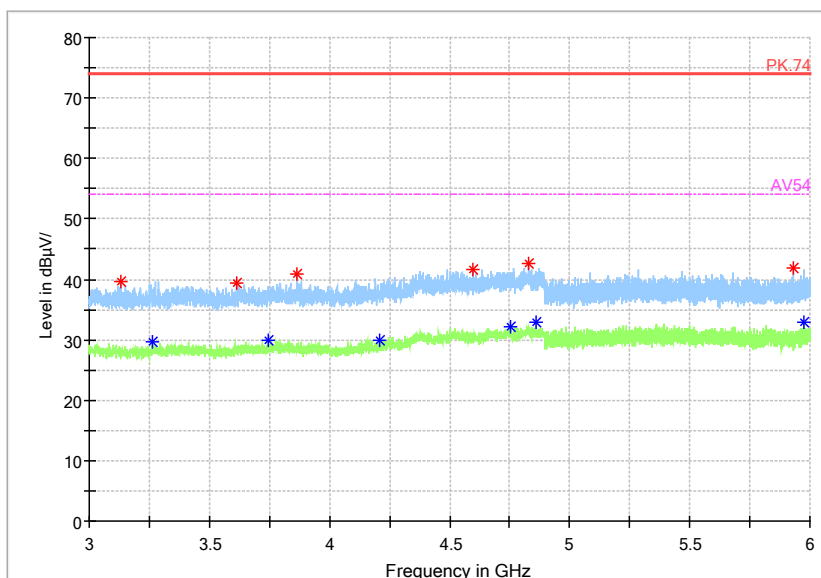

Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

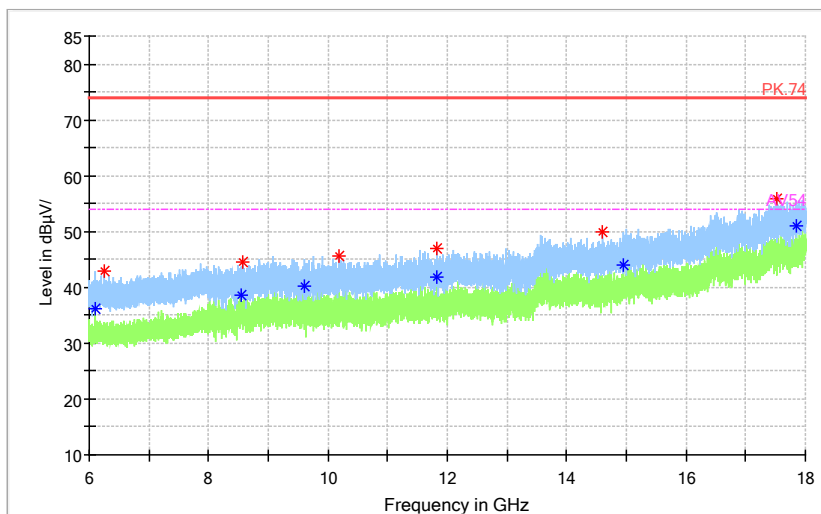


— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
♦ Final_Result PK+ ♦ Final_Result AVG

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum




Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

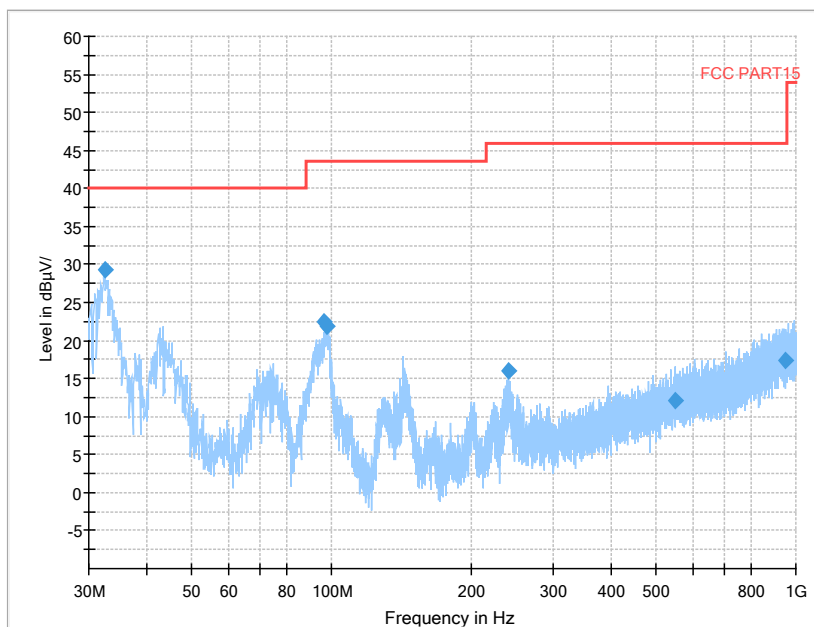


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g

Full Spectrum

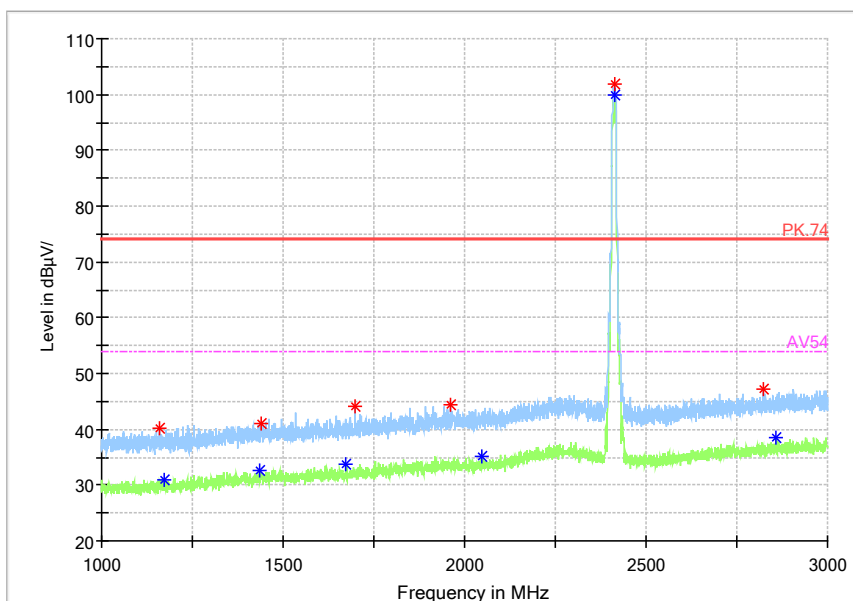


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

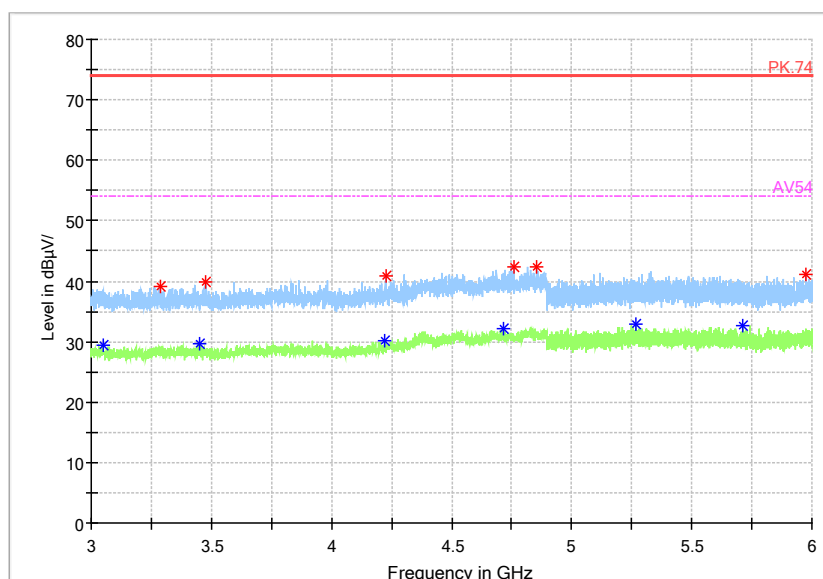



Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

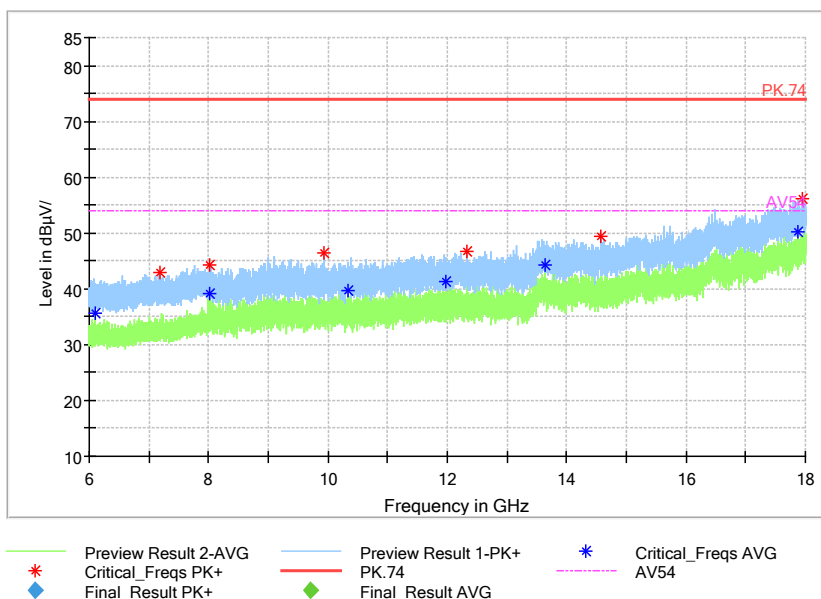

Full Spectrum

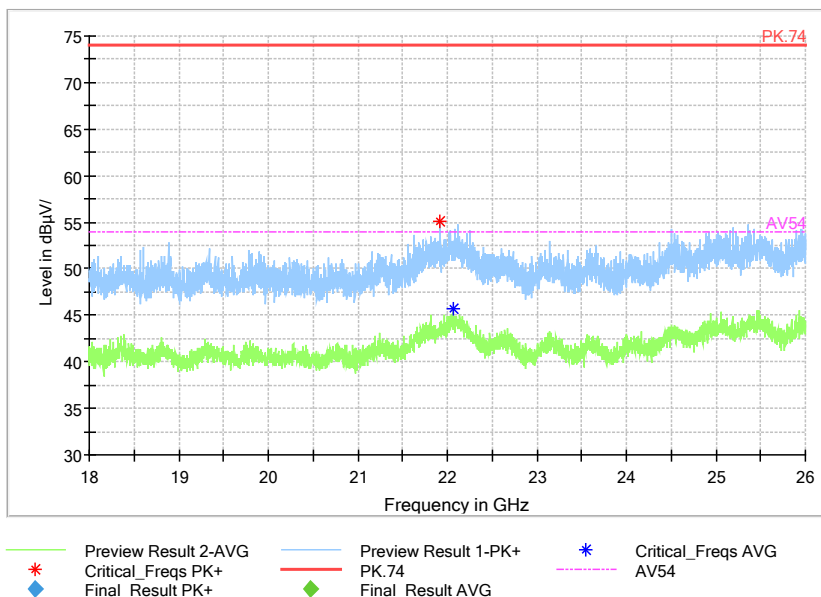

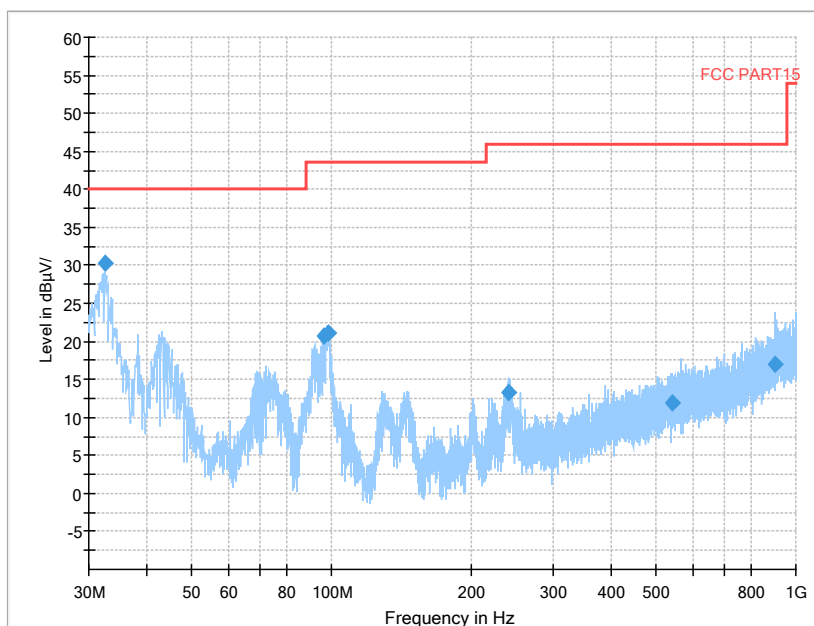


Frequency Range: 30MHz -1GHz

Detector: QP mode

Test Mode: 802.11n(HT20)

Full Spectrum

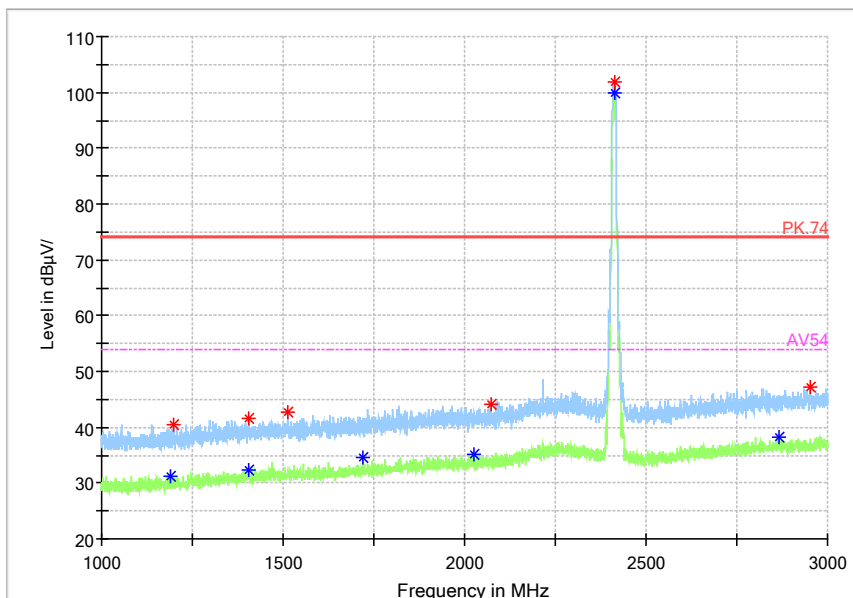


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT20)

Full Spectrum

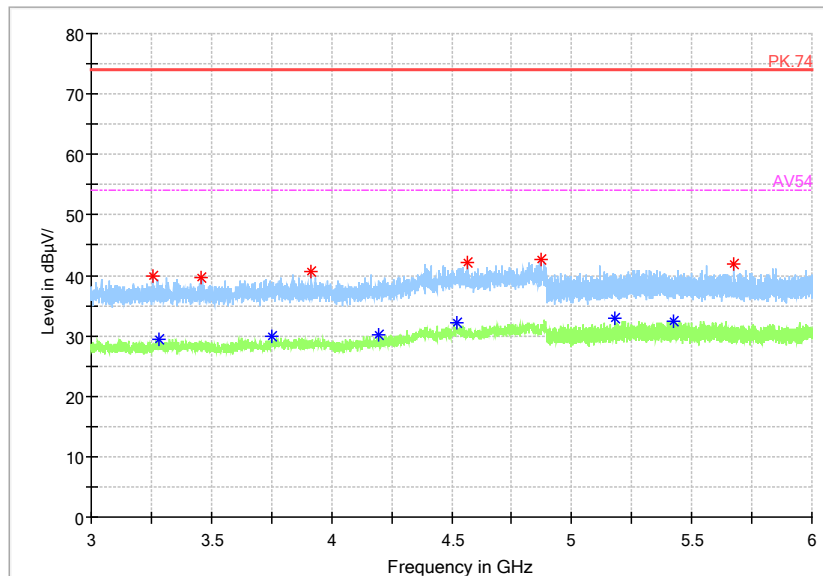


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

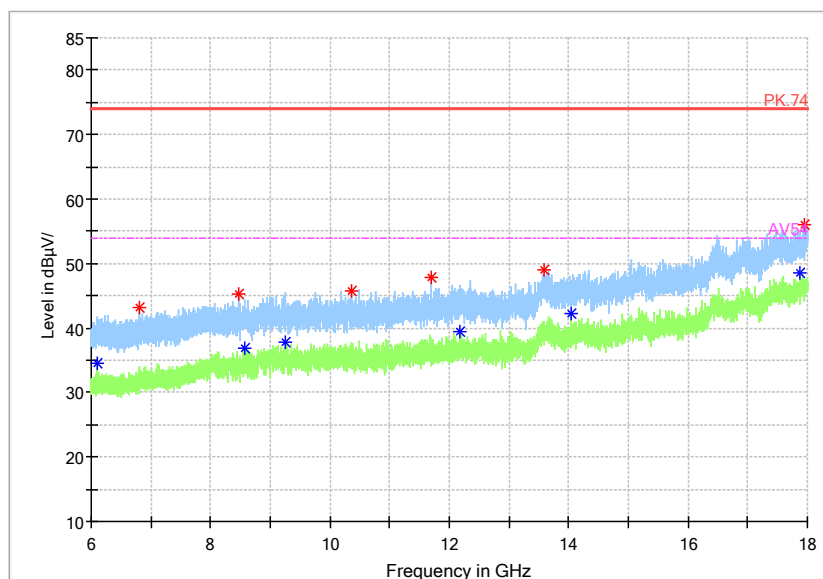


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

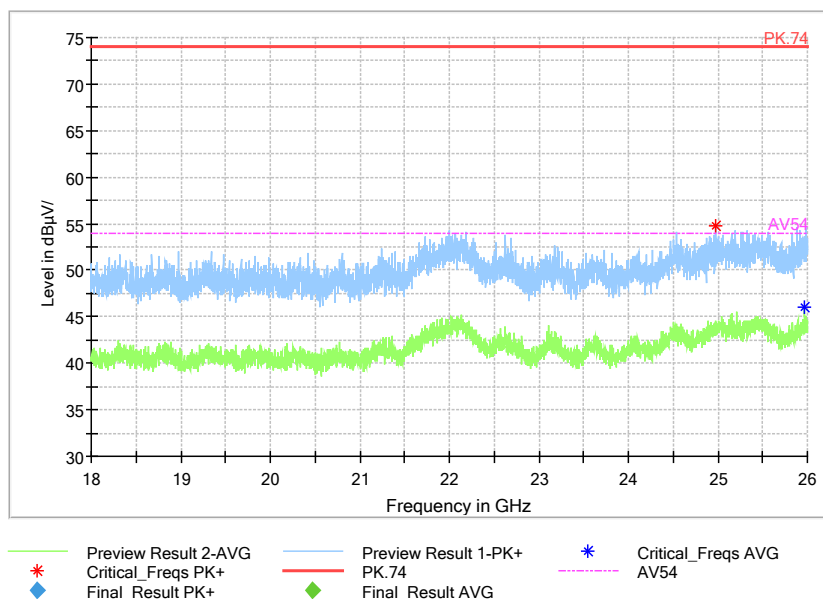


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2437
Channel No.:6

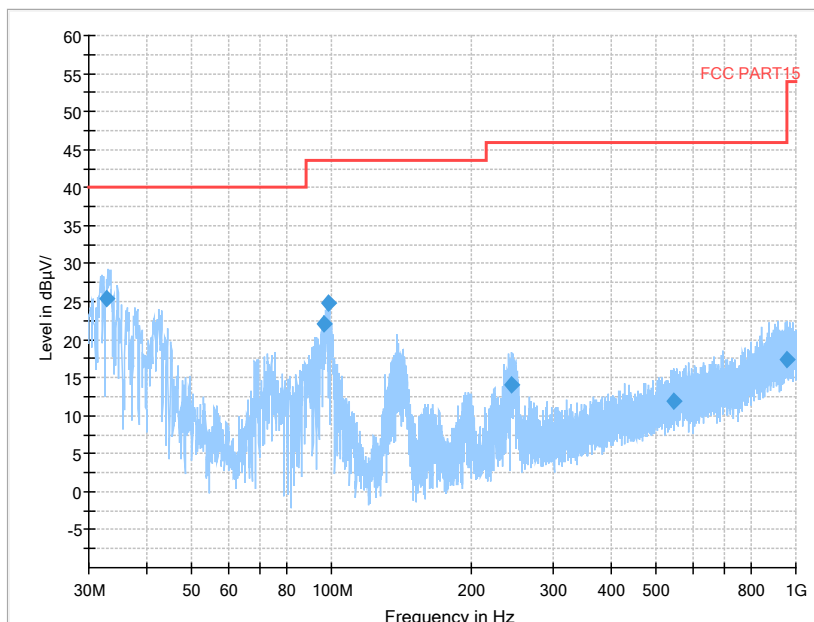


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

Full Spectrum

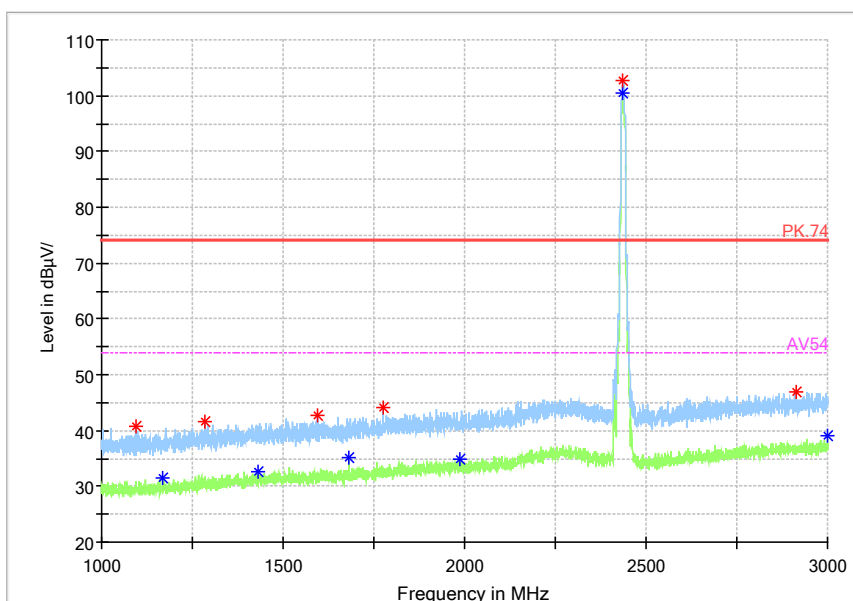


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode

Modulation type: 802.11b

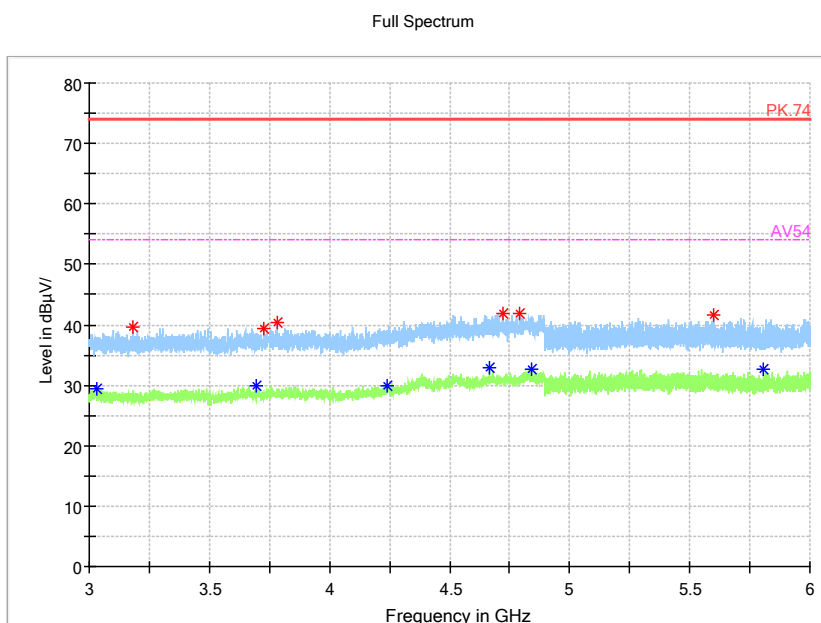


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

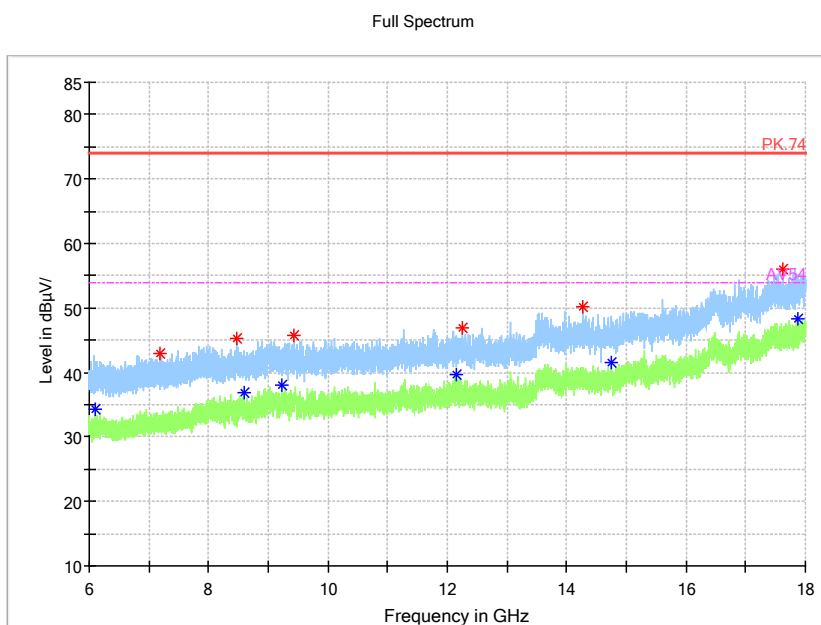


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

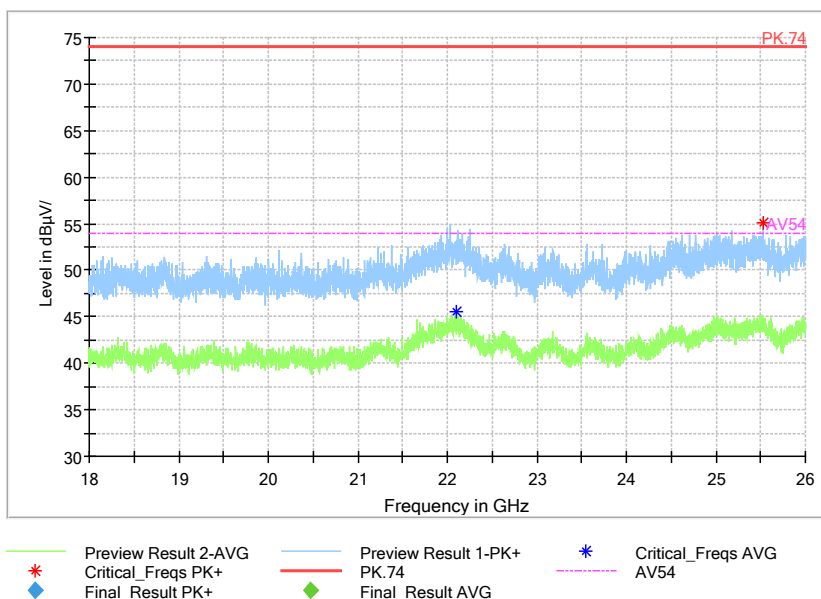


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

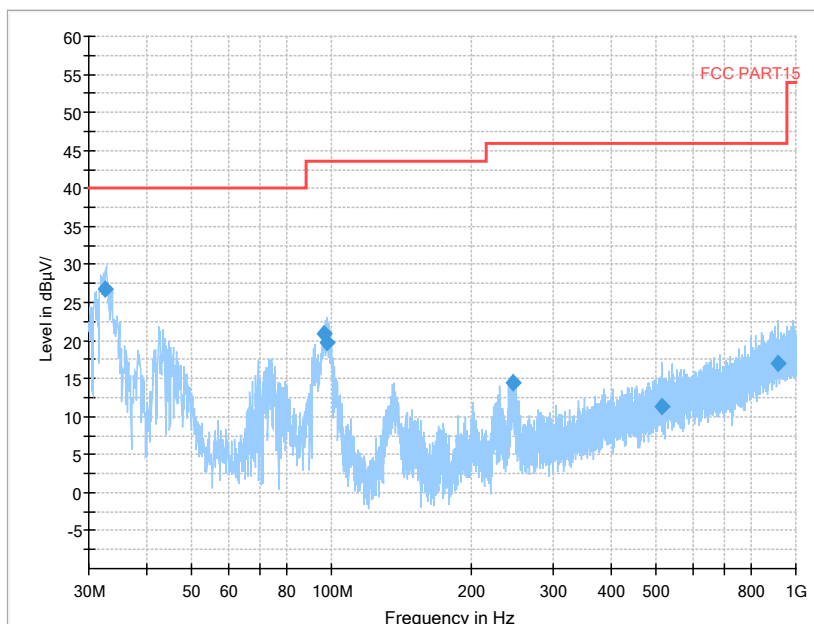


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g

Full Spectrum

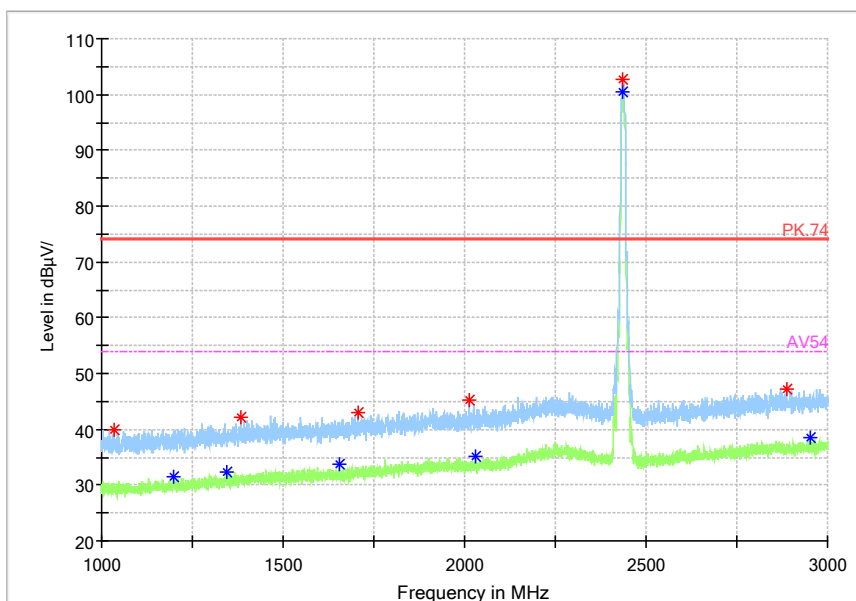


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

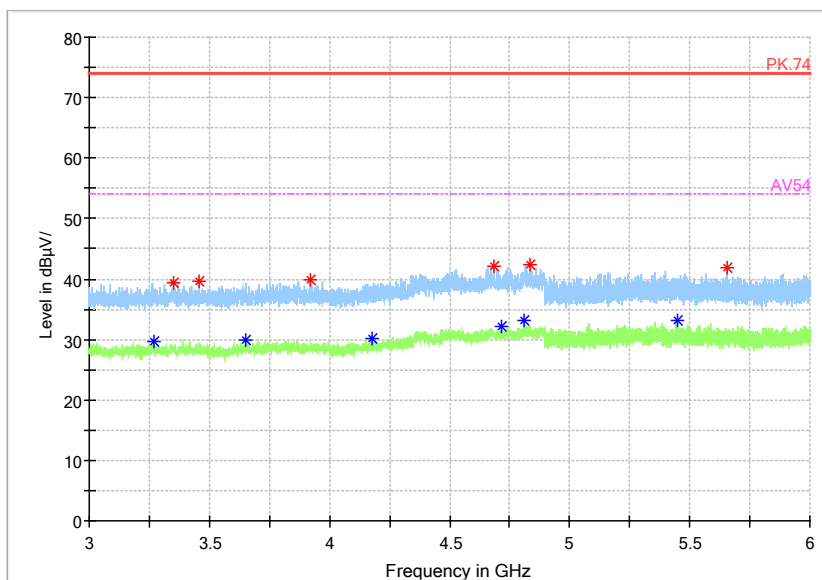


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

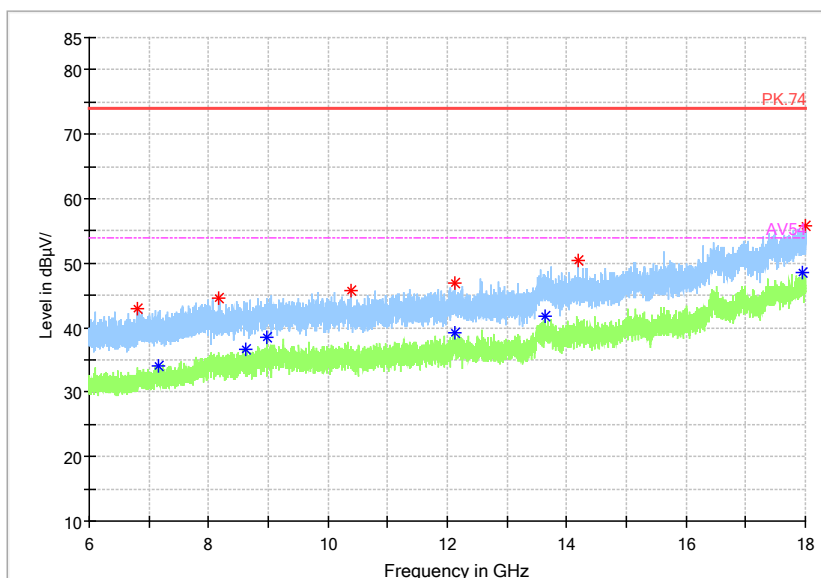


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

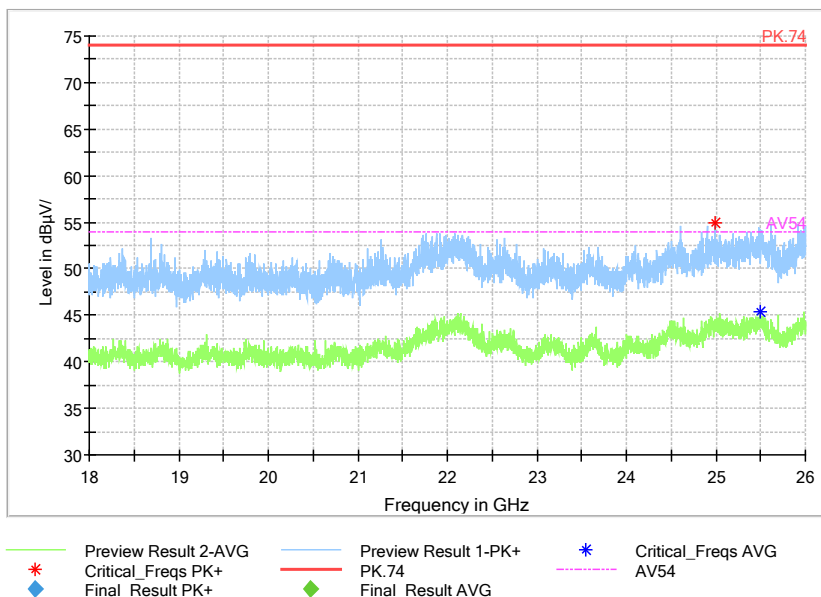

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

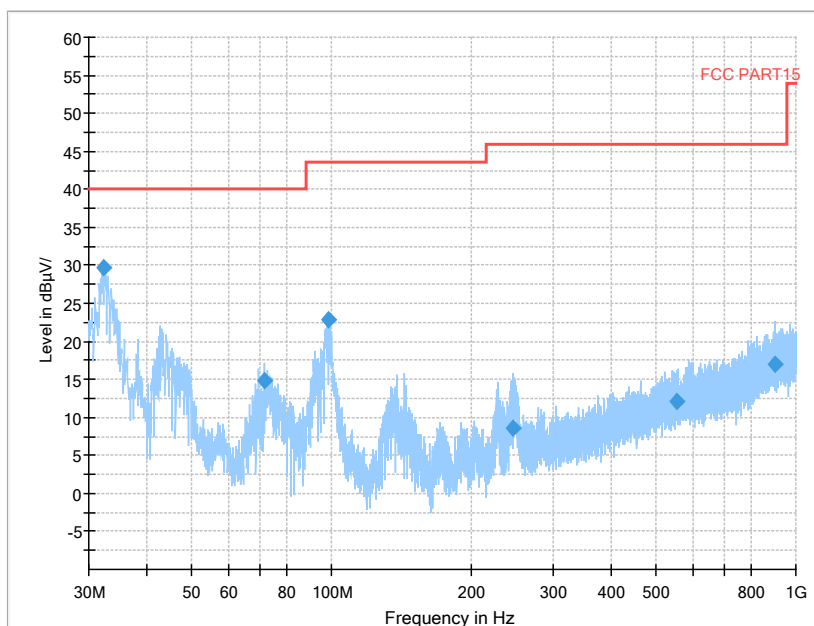


Frequency Range: 30MHz -1GHz

Detector: QP mode

Test Mode: 802.11n(HT20)

Full Spectrum

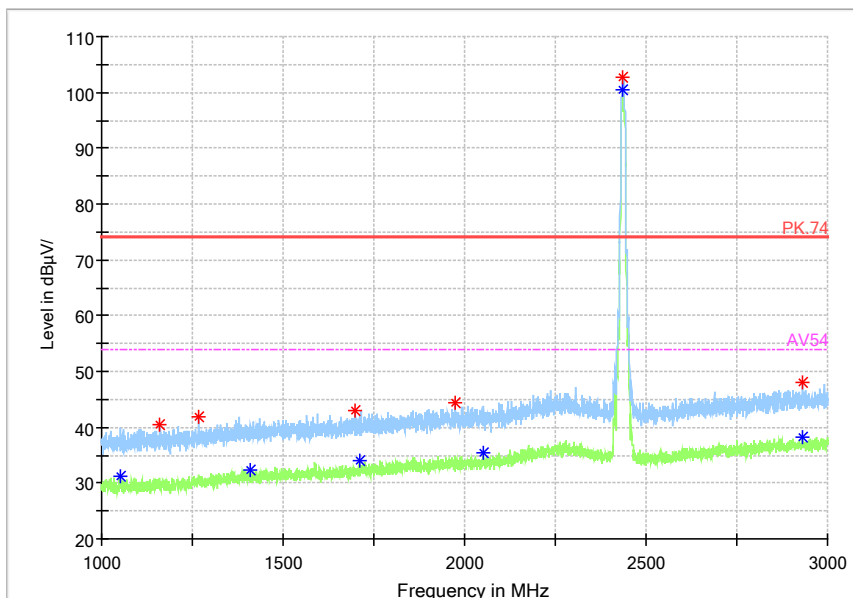


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT20)

Full Spectrum

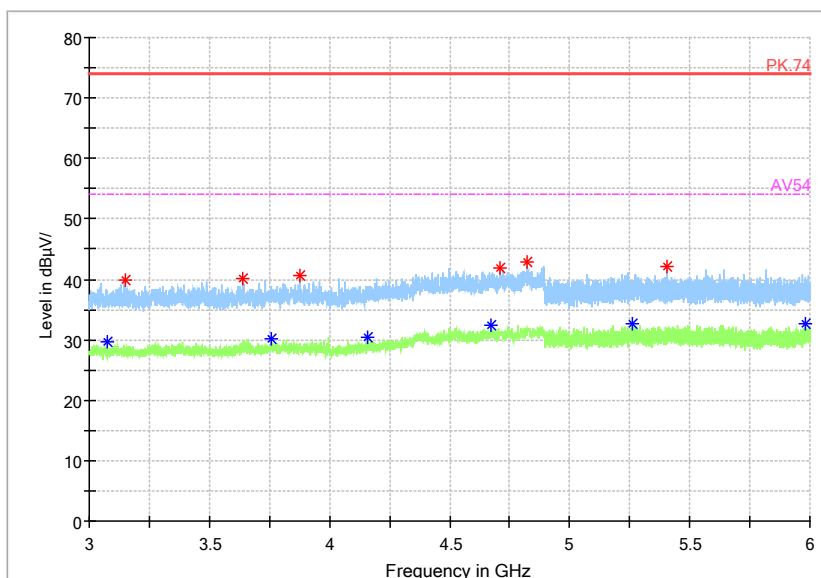


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

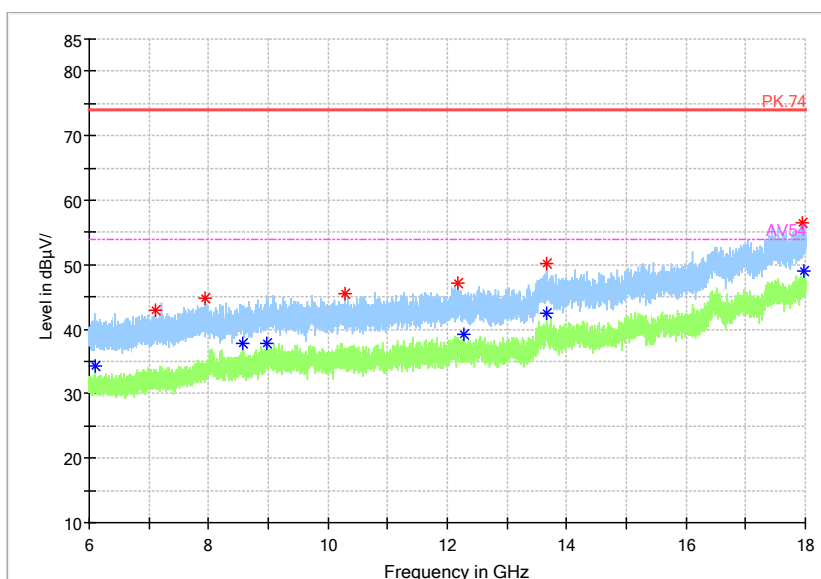


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

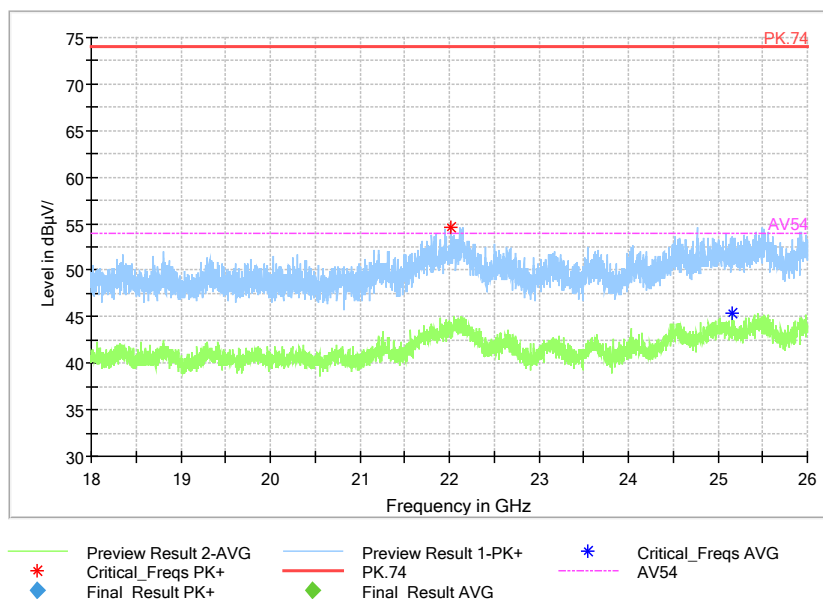


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2462
Channel No.:11

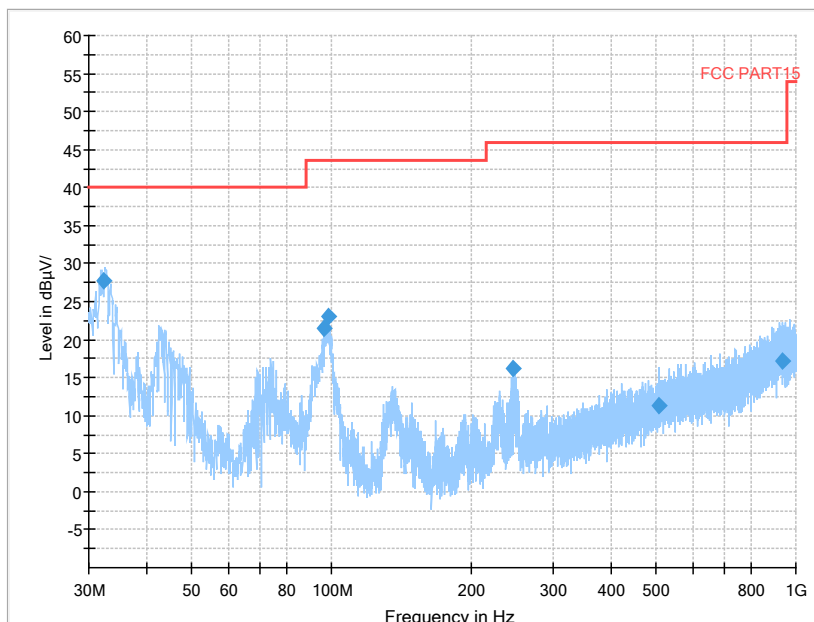


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

Full Spectrum

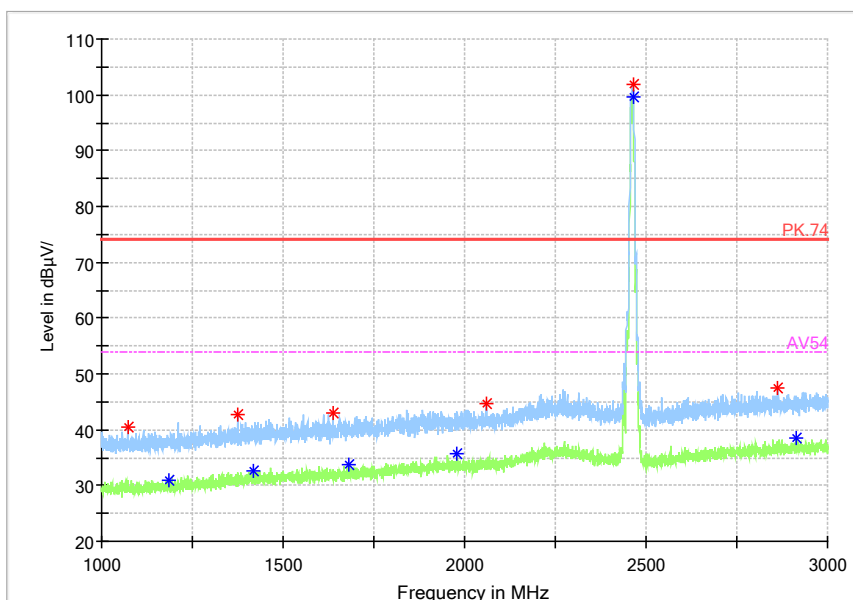


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

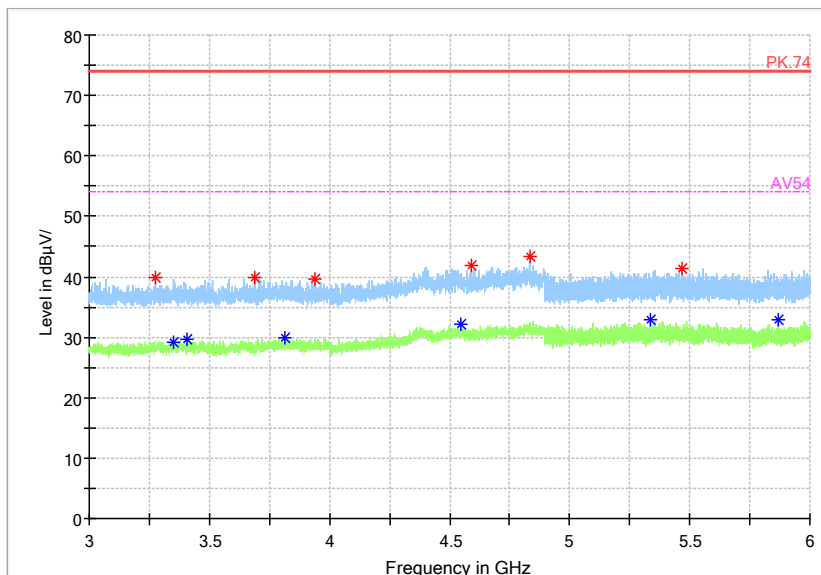


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

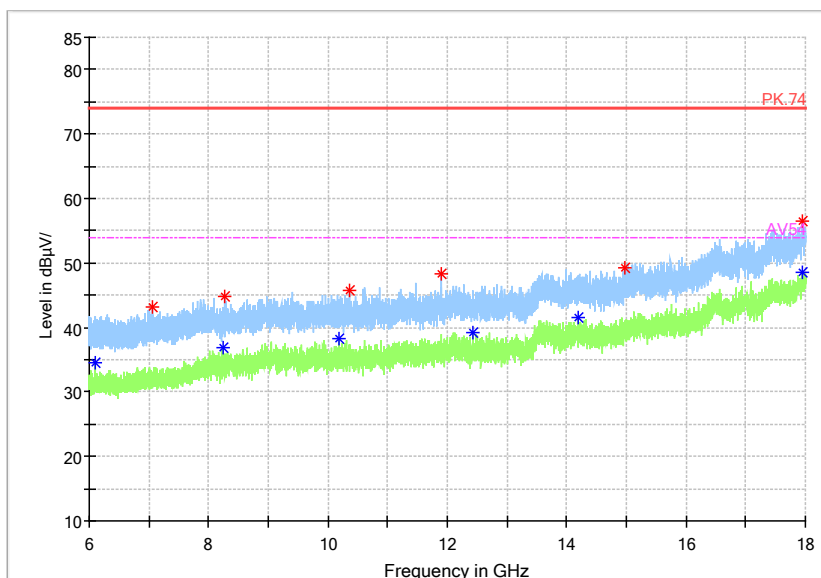


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

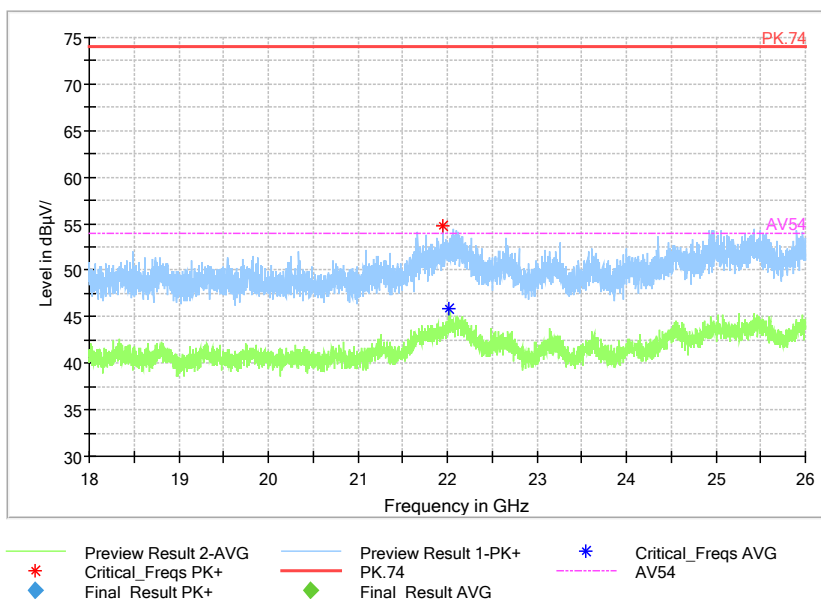


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

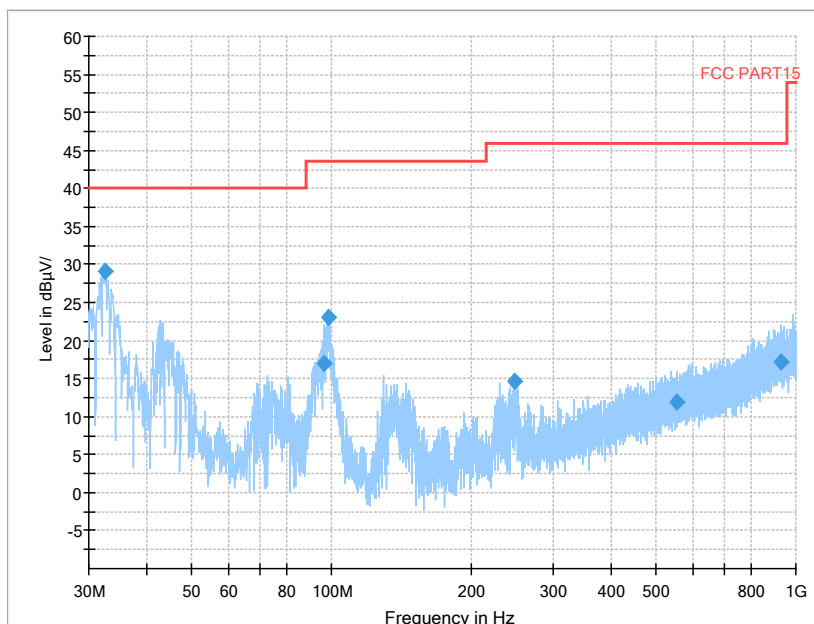


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g

Full Spectrum

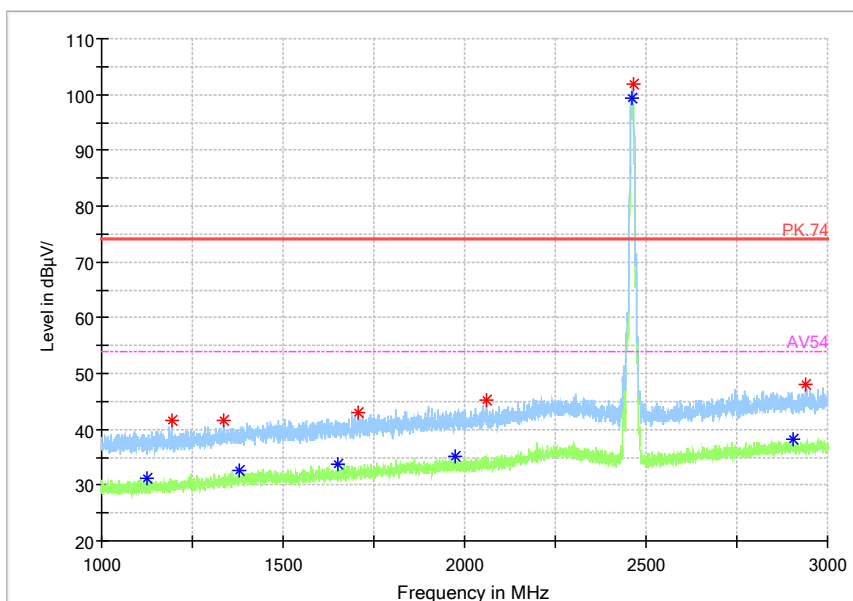


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

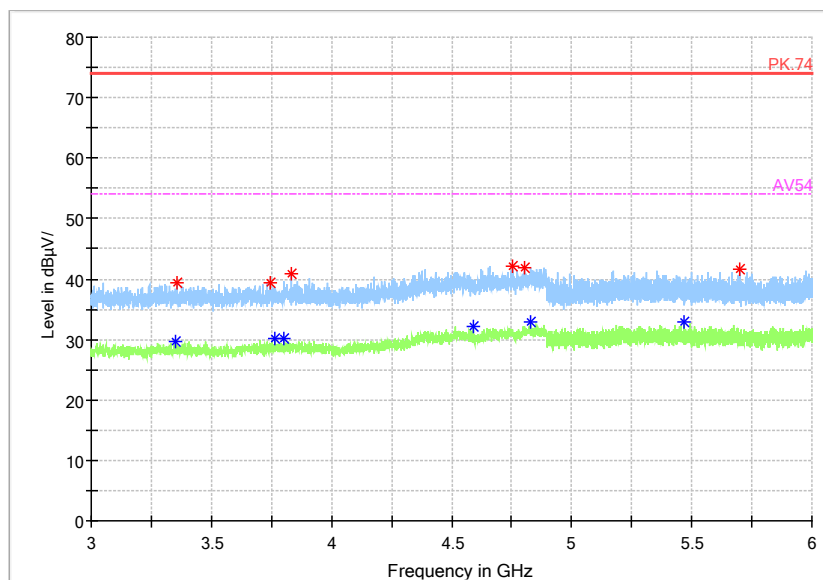


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

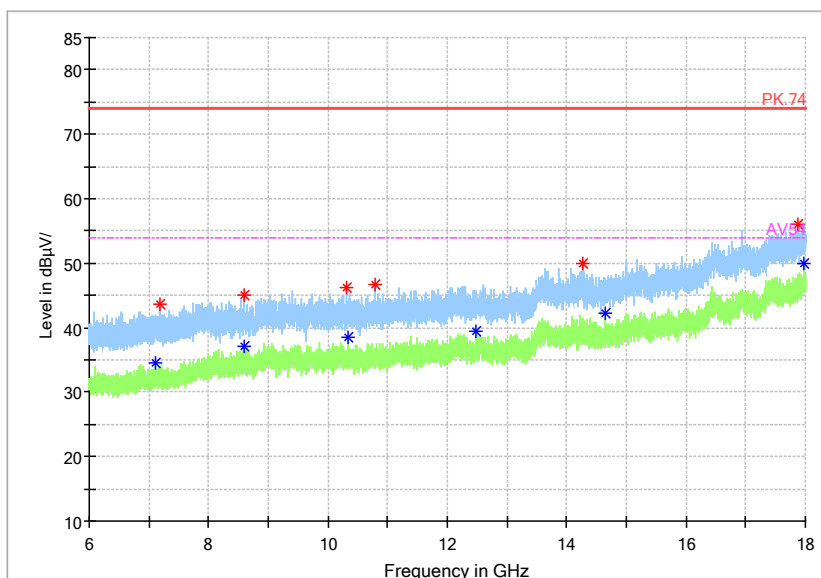


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

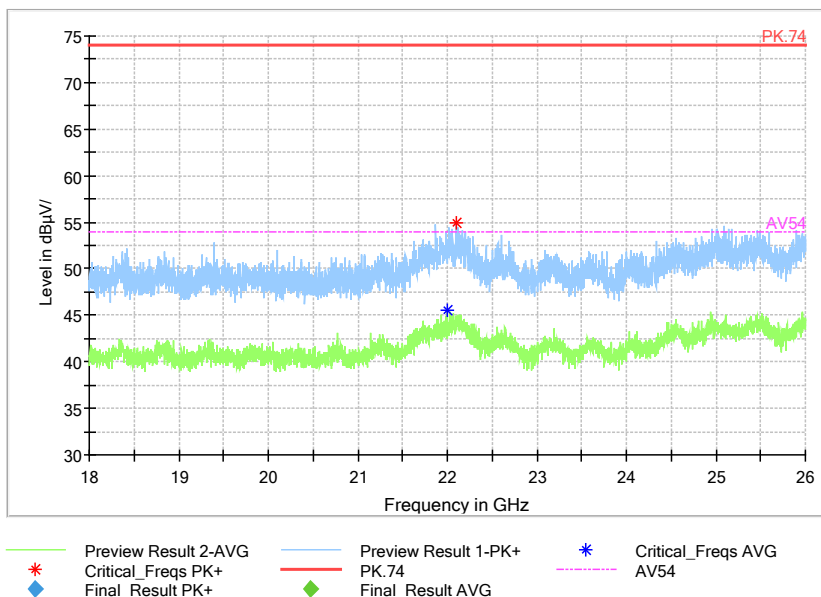

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

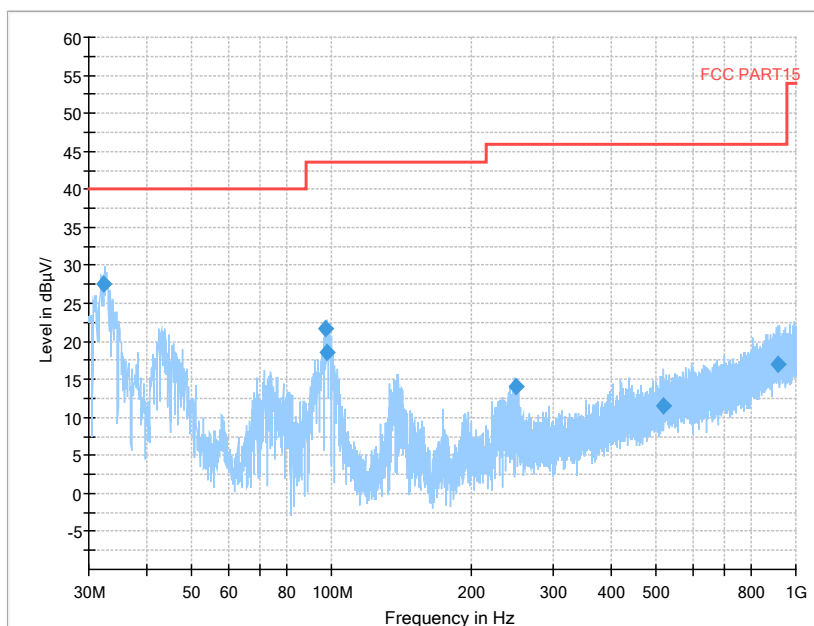


Frequency Range: 30MHz -1GHz

Detector: QP mode

Test Mode: 802.11n(HT20)

Full Spectrum

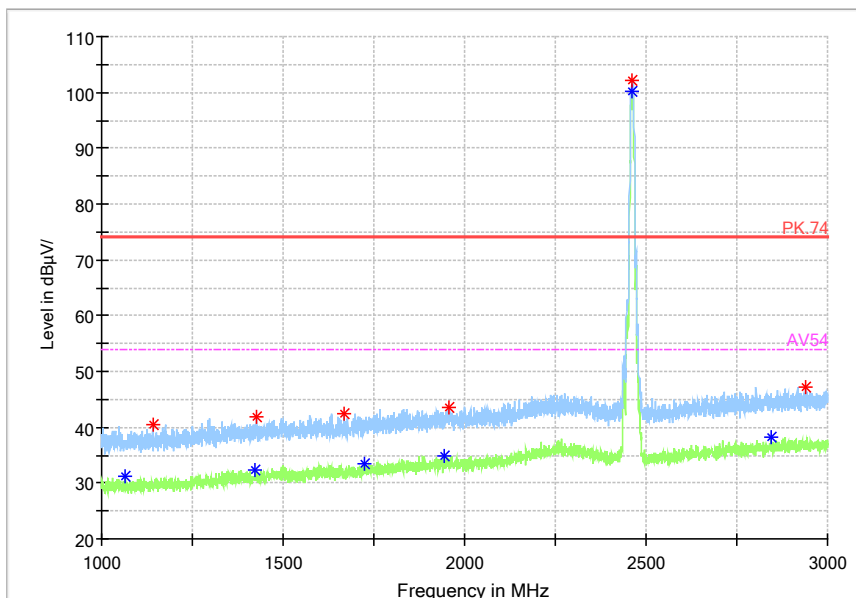


Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode


Modulation type: 802.11n(HT20)

Full Spectrum

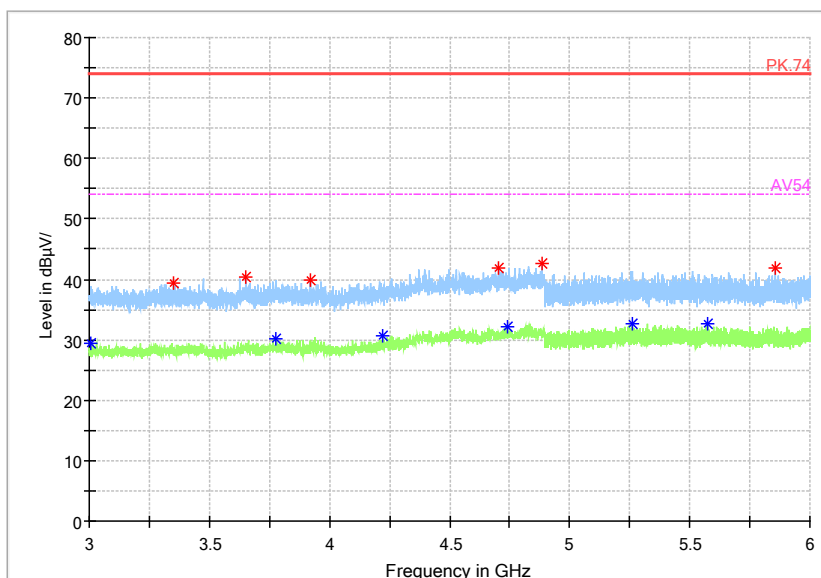


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

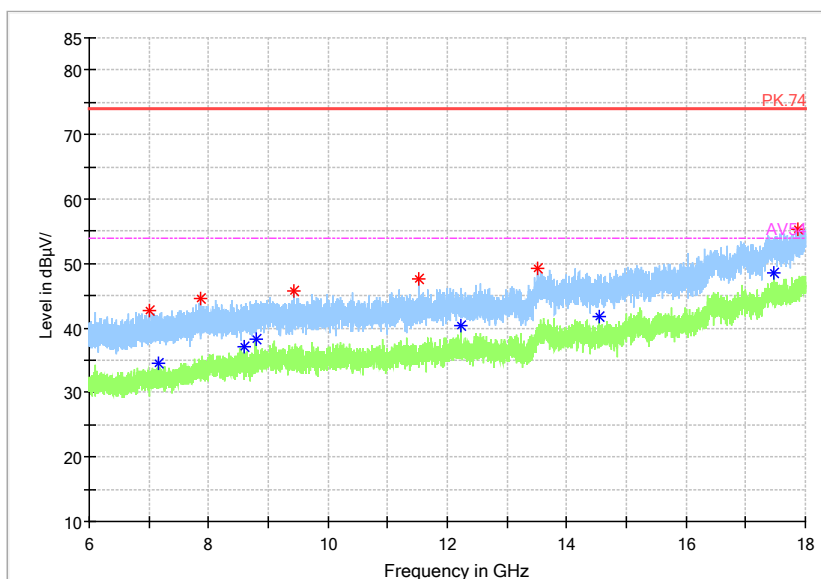

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Full Spectrum

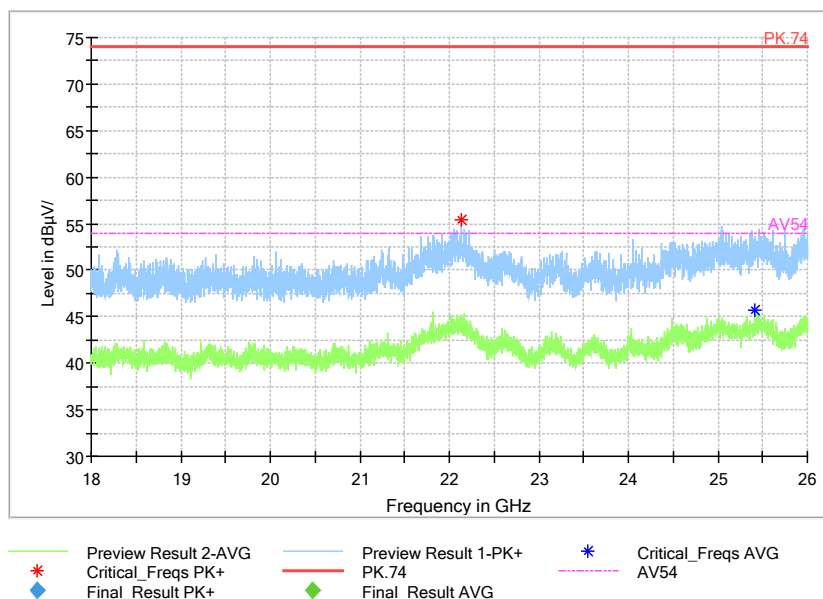

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)


AC Power line Conducted Emission

A "reference path loss" Corr.(dB) is established and the $L_{\text{cable}} + \text{ATT} + \text{VDF}$ is the attenuation of "reference path loss", and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{\text{result}} = P_{\text{mea}} + \text{Corr. (dB)}$$

Sample calculation: $(45.63 \text{ dB}\mu\text{V}) = (15.93 \text{ dB}\mu\text{V}) + (29.7 \text{ dB})$, the corresponding frequency is 0.158529MHz.

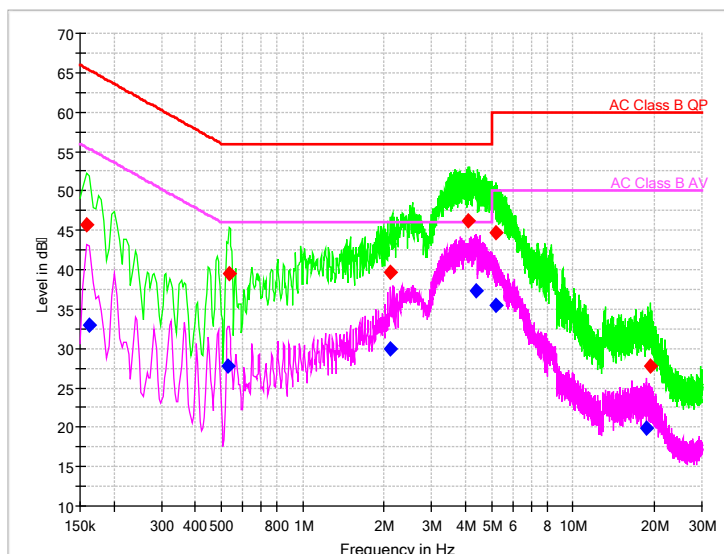

L+N Line

MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Corr (dB)	Pmea Quasi Peak (dB μ V)	Pmea Average (dB μ V)
0.158529	45.63	---	65.54	19.91	L1	29.7	15.93	---
0.162793	---	32.90	55.32	22.42	L1	29.7	---	3.2
0.529521	---	27.69	46.00	18.31	N	29.7	---	-2.01
0.533786	39.55	---	56.00	16.45	L1	29.7	9.85	---
2.103043	39.65	---	56.00	16.35	L1	29.8	9.85	---
2.107307	---	29.98	46.00	16.02	N	29.8	---	0.18
4.090200	46.19	---	56.00	9.81	L1	29.8	16.39	---
4.388700	---	37.37	46.00	8.63	L1	29.8	---	7.57
5.164800	44.65	---	60.00	15.35	L1	29.8	14.85	---
5.207443	---	35.52	50.00	14.48	L1	29.8	---	5.72
18.614357	---	19.89	50.00	30.11	L1	30.1	---	-10.21
19.386193	27.69	---	60.00	32.31	L1	30.2	-2.51	---

---End of Test Report---