

TEST REPORT

Report number : Z101C-14105

Issue date : November 28, 2014

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part15 Subpart C

The test results are traceable to the international or national standards.

Applicant : KYOCERA Corporation

Equipment under test (EUT) : Mobile Phone

Model number : KYY10

FCC ID : JOYKYY10

Date of test : November 7, 10, 14, 2014

Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
4149-7 Hachimanpara 5-chome
Yonezawa-shi Yamagata 992-1128 Japan
Phone: +81-238-28-2880 Fax: +81-238-28-2888

Test results : Complied

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.

This test report must not be used by client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Tested by : Taiki Watanabe
Taiki Watanabe

Tested by : Hikaru Shibata
Hikaru Shibata

Authorized by : Eiji Akiba
Deputy General Manager of EMC Technical Department

NVLAP[®]
NVLAP LAB CODE 200306-0

Table of contents

	Page
1. Summary of Test	4
1.1 Purpose of test	4
1.2 Standards	4
1.3 List of applied test to the EUT	4
1.4 Modification to the EUT by laboratory	4
2. Equipment Under Test	5
2.1 General Description of equipment	5
2.2 EUT information	5
2.3 Variation of the family model(s)	6
2.4 Operating channels and frequencies	6
2.5 Operating mode	7
2.6 Operating flow	7
3. Configuration of equipment	8
3.1 Equipment(s) used	8
3.2 System configuration	8
4. Carrier Frequency Separation	9
4.1 Measurement procedure	9
4.2 Limit	9
4.3 Measurement result	9
4.4 Trace data	10
5. Number of Hopping Frequencies	11
5.1 Measurement procedure	11
5.2 Limit	11
5.3 Measurement result	11
5.4 Trace data	12
6. Time of Occupancy (Dwell Time)	14
6.1 Measurement procedure	14
6.2 Limit	14
6.3 Measurement result	15
6.4 Trace data	16
7. Spurious Emissions - Radiated -	18
7.1 Measurement procedure	18
7.2 Calculation method	19
7.3 Limit	19
7.4 Test data	20
8. Restricted Band of Operation	22
8.1 Measurement procedure	22
8.2 Limit	22
8.3 Measurement Result	22
8.4 Test data	23
9. Antenna requirement	27
10. Uncertainty of measurement	28
11. Laboratory description	29



Zacta

Appendix A. Test equipment30

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart C.

1.2 Standards

CFR47 FCC Part 15 Subpart C

1.2.1 Test Methods

ANSI C63.4-2009

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

Test items Section	Test items	Condition	Result
15.247(a)(1)	20dB Bandwidth	Conducted	N/A Note1
15.247(a)(1)	Carrier Frequency Separation	Conducted	PASS Note2
15.247(a)(1)(iii)	Number of Hopping Frequencies	Conducted	PASS Note2
15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Conducted	PASS Note2
15.247(b)(1)	Maximum Peak Output Power	Conducted	N/A Note1
15.247(d)	Band Edge Compliance of RF Conducted Emissions	Conducted	N/A Note1
15.247(d) 15.205 15.209	Spurious Emissions	Conducted Radiated	N/A Note1 PASS
15.247(d) 15.205 15.209	Restricted Bands of Operation	Radiated	PASS
15.207	AC Power Line Conducted Emissions	Conducted	N/A Note1

Note1: Since there is no change in Module from FCC ID: JOYKYY06, only the Radiated test items were performed.

Note2: Add a test of Bluetooth AFH mode.

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Mobile Phone.

2.2 EUT information

Applicant	:	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku, Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment under test	:	Mobile Phone
Trade name	:	Kyocera
Model number	:	KYY10
Serial number	:	N/A
EUT condition	:	Pre-Production
Power ratings	:	Battery: DC 3.7V
Size	:	(W) 49.3 × (D) 17.7 × (H) 111.8 mm
Environment	:	Indoor and Outdoor use
Terminal limitation	:	-20°C to 60°C
RF Specification Protocol	:	Bluetooth 2.1 + EDR
Frequency range	:	2402MHz-2480MHz
Number of RF Channels	:	79 Channels
Modulation type/ Data rate	:	FHSS: GFSK (1Mbps), $\pi/4$ -DQPSK (2Mbps), 8-DPSK (3Mbps)
Channel separation	:	1MHz
Antenna type	:	Internal antenna
Antenna gain	:	0.7dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Operating channels and frequencies

Channel	Frequency [MHz]	Channel	Frequency [MHz]	Channel	Frequency [MHz]
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

2.5 Operating mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2402
Middle	2441
High	2480

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Technology	Modulation Type	Packet Type
Low, Middle, High	FHSS	GFSK	DH5
Low, Middle, High	FHSS	8-DPSK	3-DH5

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.
The worst emission was found in X axis and the worst case recorded.

2.6 Operating flow

[Tx mode]

- i) Bluetooth test program setup to the DM tool
- ii) Select a test mode
 - Operating frequency:
 - No hopping (Channel Low: 2402MHz, Channel Middle: 2441MHz, Channel High: 2480MHz)
 - Hopping
 - Packet type: DH5, 3-DH5
- iii) Start test mode

[Rx mode]

- i) Bluetooth test program setup to the DM tool
- ii) Select a test mode
 - Operating frequency: Channel Low: 2402MHz, Channel Middle: 2441MHz, Channel High: 2480MHz
- iii) Start test mode



Zacta

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Mobile Phone	KYOCERA	KYY10	N/A	JOYKYY10	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used".

4. Carrier Frequency Separation

4.1 Measurement procedure [FCC 15.247(a)(1)]

The adjacent channel interval is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=30kHz, VBW=30kHz, Span=3MHz, Sweep=auto, Detector=Peak, Trace mode=Max hold


The EUT was set to operate with following conditions.

- Hopping [Channel Middle]

The test mode of EUT is as follows.

- Tx mode

- Test configuration

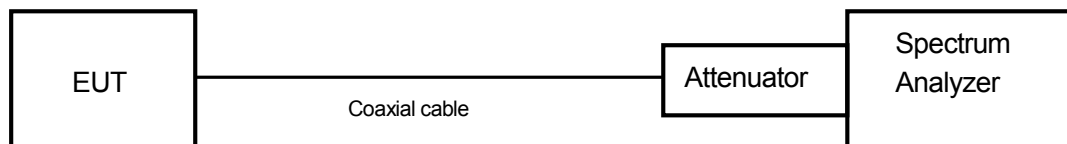

4.2 Limit

System shall have hopping channel carrier frequencies separated by a minimum of, 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

4.3 Measurement result

Date : November 14, 2014

Temperature : 23.6 [°C]

Humidity : 33.7 [%]

Test place : Shielded room No.4

Test engineer :


Hikaru Shibata

[AFH mode]


Packet type	Channel separation (MHz)	Limit (MHz)	Result
DH5	1.005	>two-thirds of the 20dB Bandwidth =639kHz	PASS
3-DH5	1.002	>two-thirds of the 20dB Bandwidth =871kHz	PASS

4.4 Trace data

[DH5(AFH)]

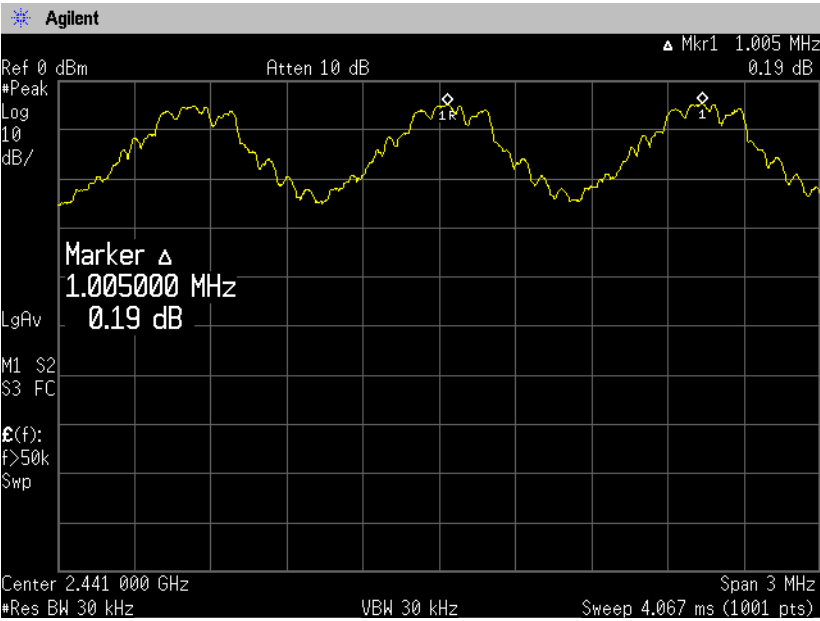

[3-DH5(AFH)]

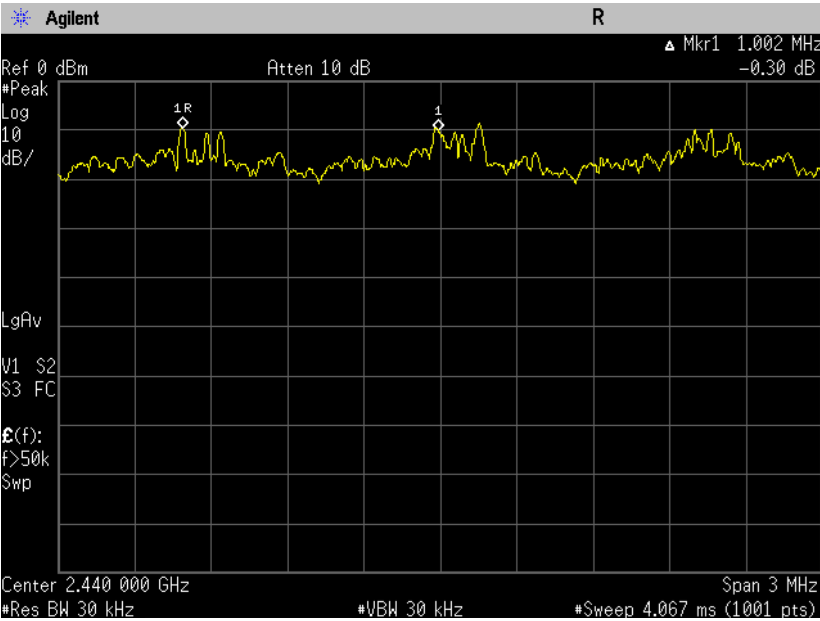

5. Number of Hopping Frequencies

5.1 Measurement procedure [FCC 15.247(a)(1)(iii)]

The number of hopping channels is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=510kHz, VBW=510kHz, Span=Arbitrary setting, Sweep=auto, Detector=Peak,
Trace mode=Max hold


The EUT was set to operate with following conditions.

- Hopping

The test mode of EUT is as follows.

- Tx mode

- Test configuration

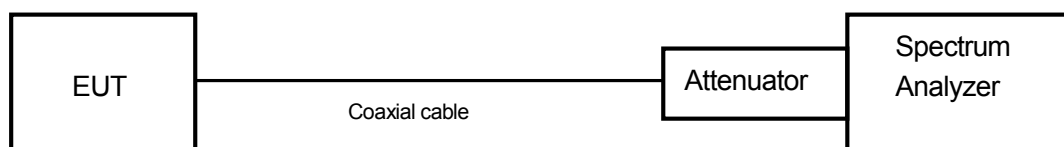

5.2 Limit

Shall have more than 15 channels.

5.3 Measurement result

Date : November 14, 2014

Temperature : 23.6 [°C]

Humidity : 33.7 [%]

Test place : Shielded room No.4

Test engineer :


Hikaru Shibata

[AFH mode]


channel	Number of channels	Limit	Result
Low	20	≥15 channel	PASS
Middle	20	≥15 channel	PASS
High	20	≥15 channel	PASS

5.4 Trace data


[DH5(AFH)]
Low

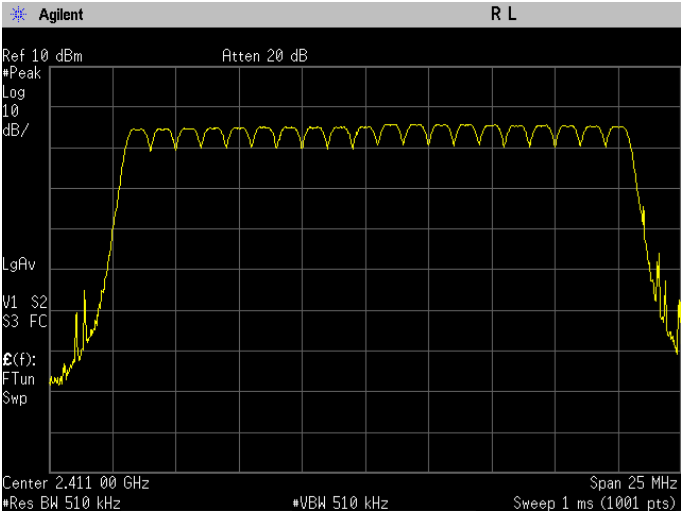


Middle

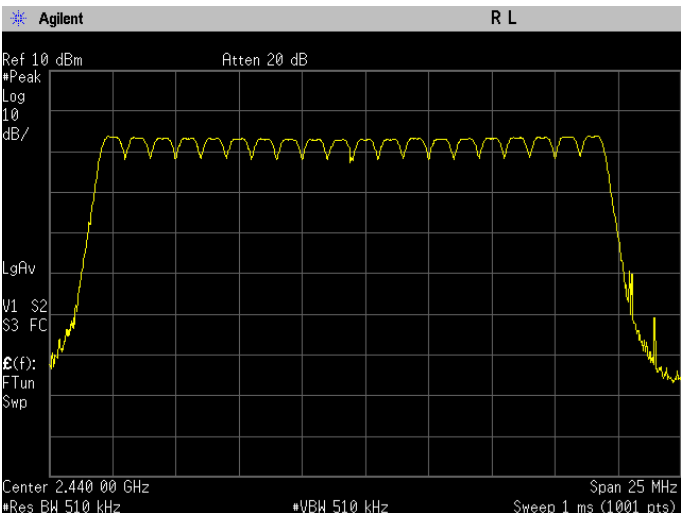


High

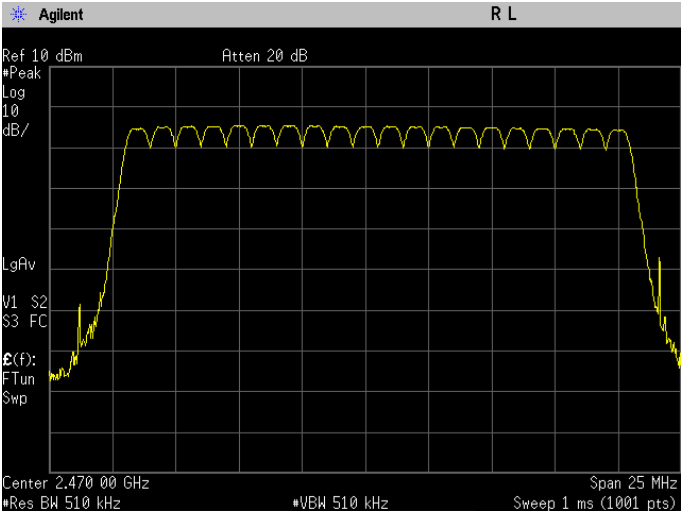


[3DH5(AFH)]
Low

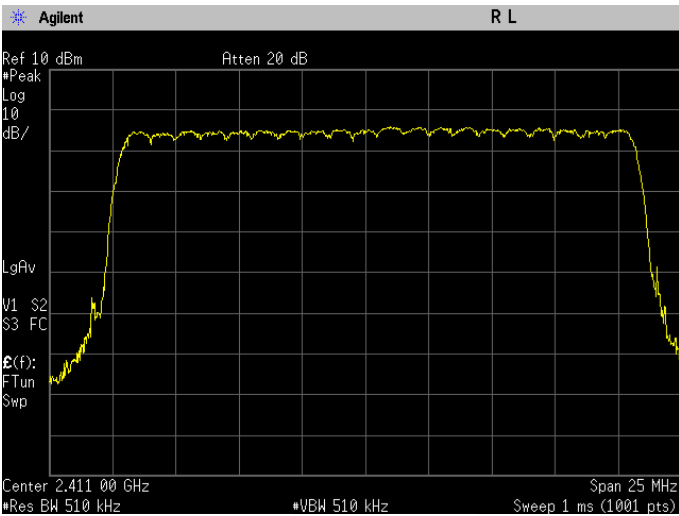

Middle

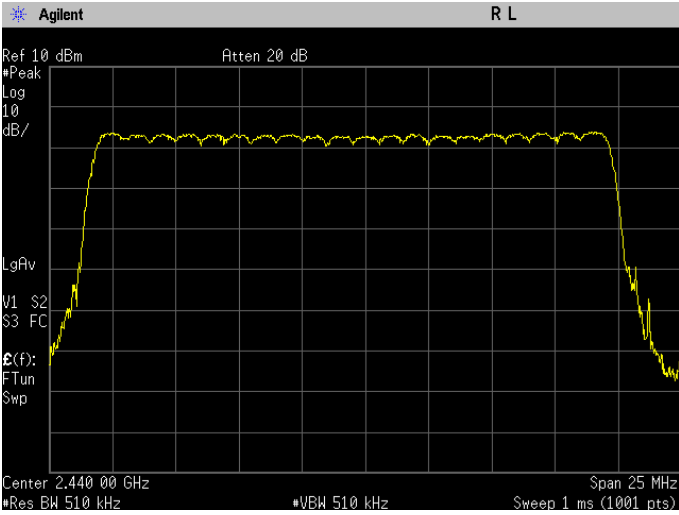

High

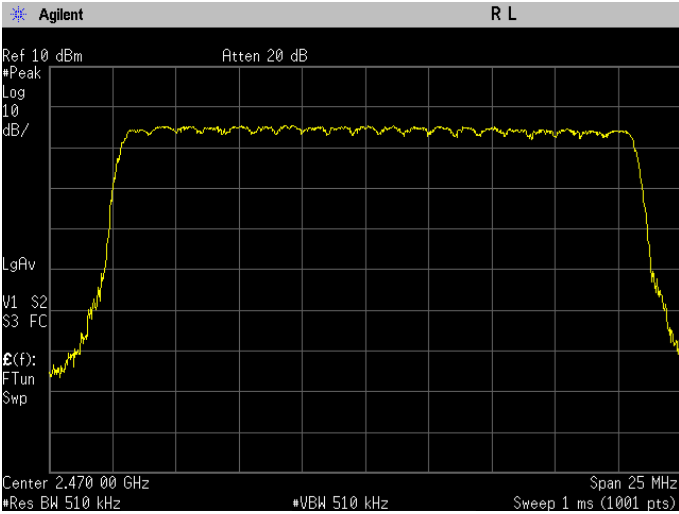

6. Time of Occupancy (Dwell Time)

6.1 Measurement procedure [FCC 15.247(a)(1)(iii)]

The time occupancy of hopping channel is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- RBW=1MHz, VBW=1MHz, Span=0Hz, Sweep=4ms, Detector=Peak, Trace mode=Single


The EUT was set to operate with following conditions.

- Hopping

The test mode of EUT is as follows.

- Tx mode

- Test configuration

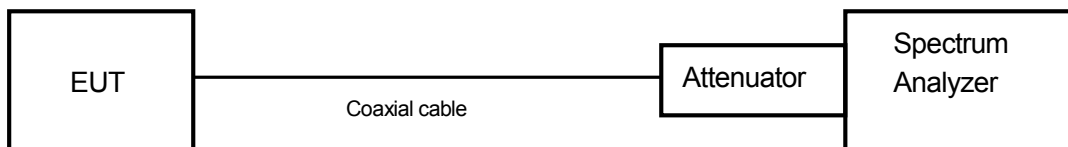

6.2 Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

6.3 Measurement result

Date : September 14, 2014
 Temperature : 23.6 [°C]
 Humidity : 33.7 [%]
 Test place : Shielded room No.4

Test engineer : Hikaru Shibata

[AFH mode]

Channel	Frequency (MHz)	Packet type	Dwell time (ms)	Occupancy time of 31.6 seconds (s)	Limit	Result
Low	2411	DH5	2.895	0.154	<0.4s	PASS
		3-DH5	2.895	0.154	<0.4s	PASS
Middle	2440	DH5	2.895	0.154	<0.4s	PASS
		3-DH5	2.895	0.154	<0.4s	PASS
High	2470	DH5	2.895	0.154	<0.4s	PASS
		3-DH5	2.895	0.154	<0.4s	PASS

AFH mode

$DH5/3-DH5 = \text{Dwell time (ms)} \times 800 / 6 / 20 \times 8$

The hopping rates of Bluetooth devices change with different types of payload. The longer the payload is, the slower the hopping rate. The hopping rate scenario is defined in Bluetooth core specification.

Calculation:


Occupancy time of 31.6 seconds* = time domain slot length x hop rate / number of hopper channel / 20 / x 31.6

Ex.) for AFH mode Channel Middle, DH5 = $2.895\text{ms} \times 1600 / 6 / 20 \times 31.6 = 154\text{ms}$


6.4 Trace data

AFH mode
[DH5]


Channel Low

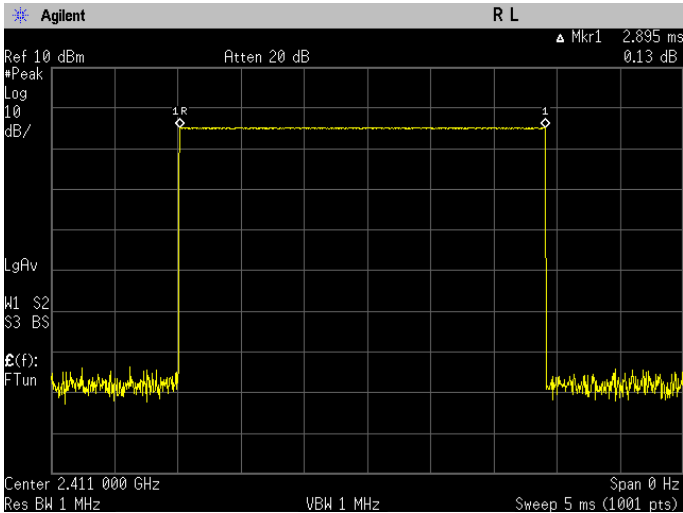

Channel Middle

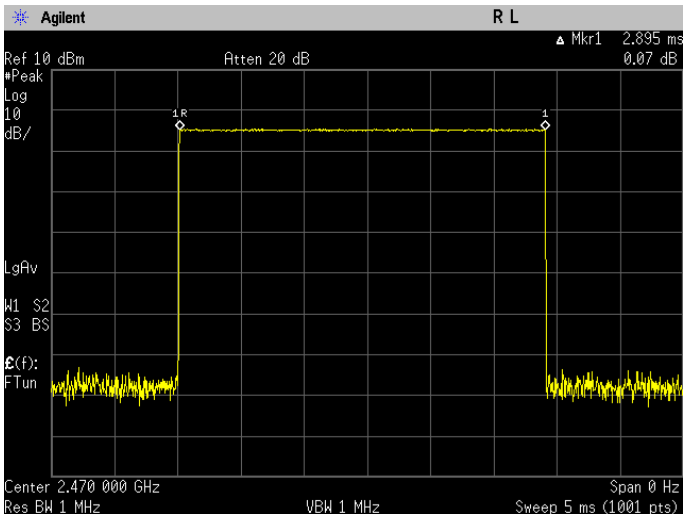


Channel High

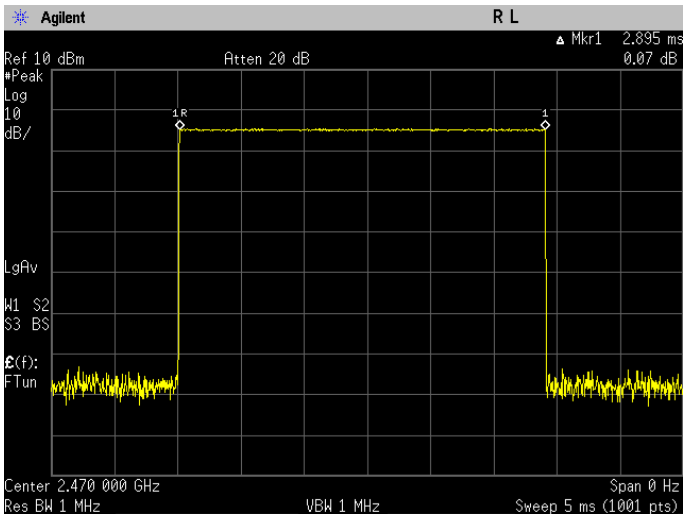


AFH mode
[3-DH5]


Channel Low

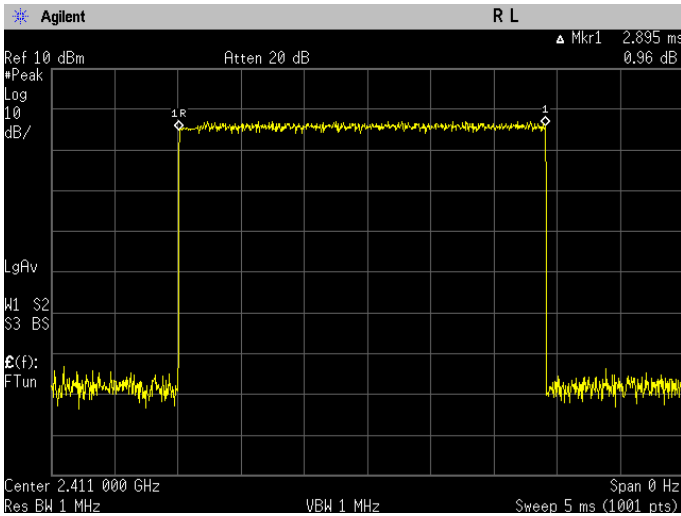

Channel Middle

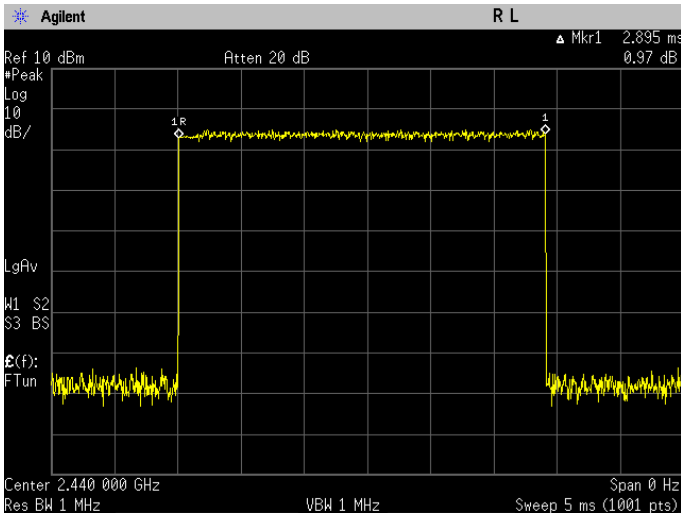

Channel High

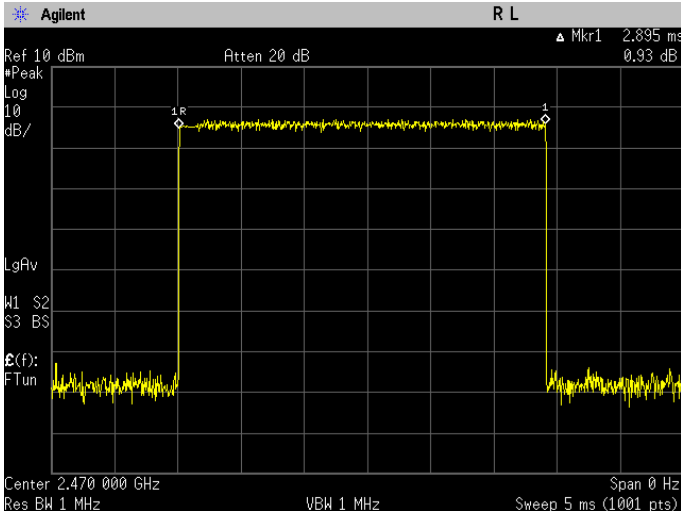

7. Spurious Emissions - Radiated -

7.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209]

Test was applied by following conditions.

Test method	: ANSI C63.4
Frequency range	: 9kHz to 25GHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: FRP table / (W)2.0m × (D)1.0m × (H)0.8m
Antenna distance	: 3m
Test receiver setting	Below 1GHz
- Detector	: Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	: 200Hz, 120kHz
Spectrum analyzer setting	Above 1GHz
- Peak	: RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto
- Average	: RBW=1MHz, VBW=10Hz, Span=0Hz, Sweep=auto
	Display mode=Linear

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, TRILOG antenna and Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.

The EUT is Placed on a turntable, which is 0.8m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.


The EUT was set to operate with following conditions.

- No hopping [Channel Low: 2402MHz, Channel Middle: 2441MHz, Channel High: 2480MHz]

The test mode of EUT is as follows.

- Tx mode, Rx mode

- Test configuration

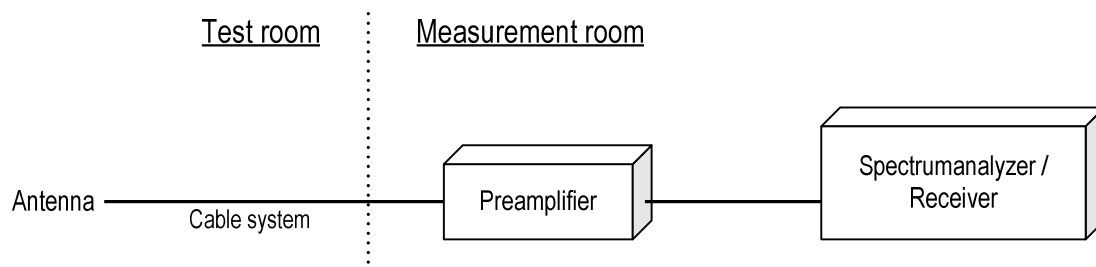

7.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant. factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant. factor + Cable system loss – Amp. Gain)

Margin = Limit – Emission level

7.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.

7.4 Test data

Date : November 7, 2014
 Temperature : 22.5 [°C]
 Humidity : 32.7 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer : Hikaru Shibata

[DH5]

Channel Low

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP [dB(μV)]		QP [dB(μV/m)]	QP [dB(μV/m)]	QP [dB]		
1	366.697	H	33.2	-7.8	25.4	46.0	20.6	100.0	177.0

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		PK [dB(μV)]	CAV [dB(μV)]		PK [dB(μV/m)]	CAV [dB(μV/m)]	PK [dB(μV/m)]	AV [dB(μV/m)]	PK [dB]	CAV [dB]	[cm]	[°]
1	4804.000	H	42.5	35.0	13.0	55.5	48.0	74.0	54.0	18.5	6.0	100.0	0.0
2	4804.000	V	42.1	35.1	13.0	55.1	48.1	74.0	54.0	18.9	5.9	100.0	0.0

Channel Middle

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP [dB(μV)]		QP [dB(μV/m)]	QP [dB(μV/m)]	QP [dB]		
1	387.810	H	30.3	-6.8	23.5	46.0	22.5	100.0	121.0

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		PK [dB(μV)]	CAV [dB(μV)]		PK [dB(μV/m)]	CAV [dB(μV/m)]	PK [dB(μV/m)]	AV [dB(μV/m)]	PK [dB]	CAV [dB]	[cm]	[°]
1	4882.000	H	42.6	35.2	13.4	56.0	48.6	74.0	54.0	18.0	5.4	100.0	0.0
2	4882.000	V	42.3	35.2	13.4	55.7	48.6	74.0	54.0	18.3	5.4	100.0	0.0

Channel High

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP [dB(μV)]		QP [dB(μV/m)]	QP [dB(μV/m)]	QP [dB]		
1	389.780	H	31.2	-6.8	24.4	46.0	21.6	100.0	237.0

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		PK [dB(μV)]	CAV [dB(μV)]		PK [dB(μV/m)]	CAV [dB(μV/m)]	PK [dB(μV/m)]	AV [dB(μV/m)]	PK [dB]	CAV [dB]	[cm]	[°]
1	4960.000	H	42.5	35.3	13.7	56.2	49.0	74.0	54.0	17.8	5.0	100.0	0.0
2	4960.000	V	42.9	35.2	13.7	56.6	48.9	74.0	54.0	17.4	5.1	100.0	0.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

[3-DH5]**Channel Low**

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP		QP	QP	QP		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	370.556	H	34.4	-7.6	26.8	46.0	19.2	100.0	81.0

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		PK	CAV		PK	CAV	PK	AV	PK	CAV		
			[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4804.000	H	42.3	35.1	13.0	55.3	48.1	74.0	54.0	18.7	5.9	100.0	0.0
2	4804.000	V	42.4	35.1	13.0	55.4	48.1	74.0	54.0	18.6	5.9	100.0	0.0

Channel Middle

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP		QP	QP	QP		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	366.720	H	33.5	-7.8	25.7	46.0	20.3	100.0	111.0

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		PK	CAV		PK	CAV	PK	AV	PK	CAV		
			[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4882.000	H	42.3	35.1	13.4	55.7	48.5	74.0	54.0	18.3	5.5	100.0	0.0
2	4882.000	V	42.2	35.0	13.4	55.6	48.4	74.0	54.0	18.4	5.6	100.0	0.0

Channel High

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP		QP	QP	QP		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	395.530	H	29.8	-6.6	23.2	46.0	22.8	100.0	75.0

No.	Frequency	(P)	Reading	Reading	c. f	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
	[MHz]		PK	CAV		PK	CAV	PK	AV	PK	CAV		
			[dB(μV)]	[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[dB]	[cm]	[°]
1	4960.000	H	42.4	35.2	13.7	56.1	48.9	74.0	54.0	17.9	5.1	100.0	0.0
2	4960.000	V	42.3	35.1	13.7	56.0	48.8	74.0	54.0	18.0	5.2	100.0	0.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]

[Receiver mode]

No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP		QP	QP	QP		
			[dB(μV)]	[dB(1/m)]	[dB(μV/m)]	[dB(μV/m)]	[dB]	[cm]	[°]
1	339.700	H	28.2	-8.6	19.6	46.0	26.4	100.0	104.0
2	364.790	H	34.3	-7.9	26.4	46.0	19.6	100.0	102.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range above 1000MHz at the 3 meters distance.

8. Restricted Band of Operation

8.1 Measurement procedure

[FCC 15.247(d), 15.205, 15.209]

Test was applied by following conditions.

Test method : ANSI C63.4
 Test place : 3m Semi-anechoic chamber
 EUT was placed on : FRP table / (W)2.0m × (D)1.0m × (H)0.8m
 Antenna distance : 3m

Spectrum analyzer setting

- Peak : RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto
 - Average : RBW=1MHz, VBW=10Hz, Span=Arbitrary setting, Sweep=auto
 Display mode=Linear

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.


The EUT was set to operate with following conditions.

- No hopping [Channel Low: 2402MHz, Channel High: 2480MHz]

The test mode of EUT is as follows.

- Tx mode

- Test configuration

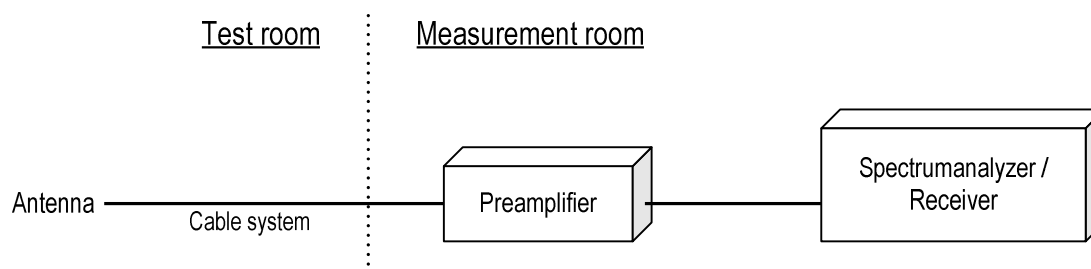

8.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

8.3 Measurement Result


Channel	Frequency [MHz]	Results Chart	Result
Low	2402	See the Trace Data	Pass
High	2480	See the Trace Data	Pass

8.4 Test data

Date : November 10, 2014
Temperature : 21.0 [°C]
Humidity : 40.5 [%]
Test place : 3m Semi-anechoic chamber


Test engineer : Taiki Watanabe

[DH5]
Channel Low
Horizontal
Peak

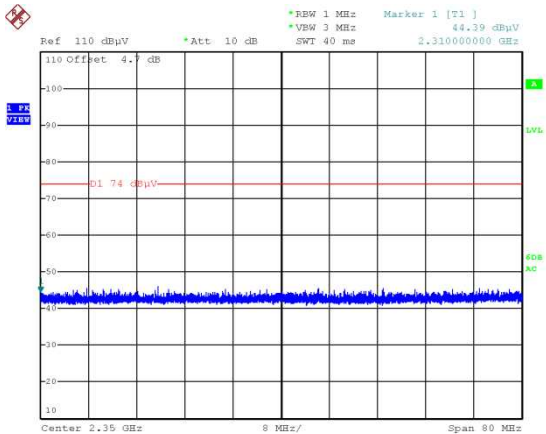


Date: 10.NOV.2014 23:03:11

Average

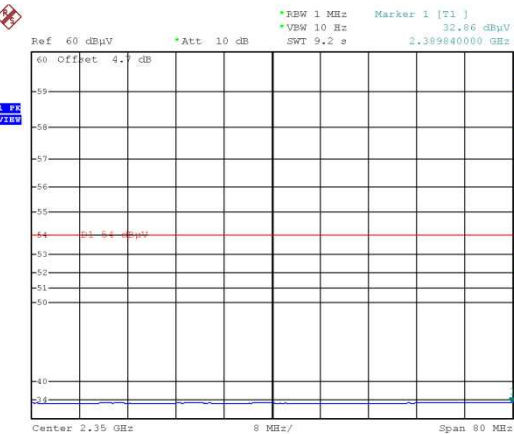


Date: 10.NOV.2014 23:04:18

Vertical
Peak

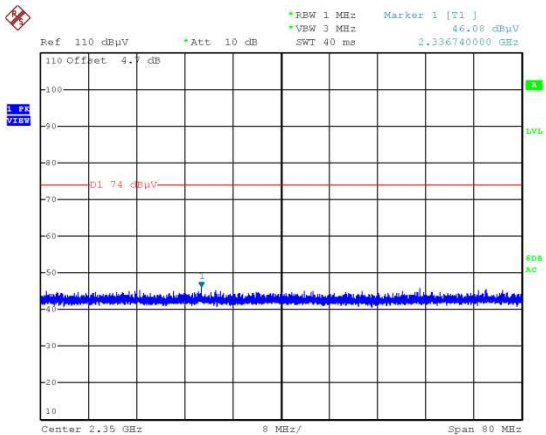


Date: 10.NOV.2014 23:07:44

Average

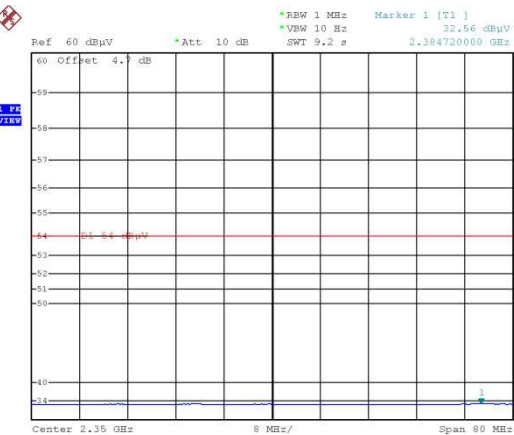


Date: 10.NOV.2014 23:08:36

**[DH5]
Channel High
Horizontal
Peak**

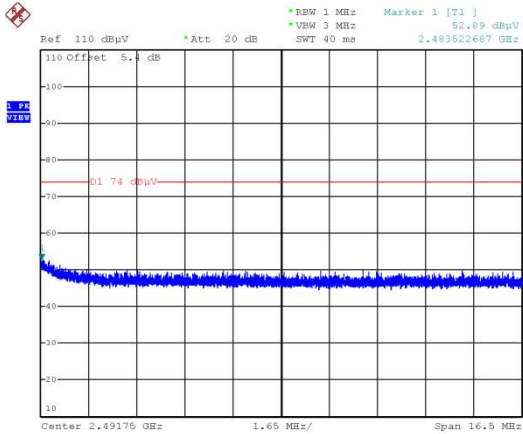


Date: 10.NOV.2014 23:40:55

Average

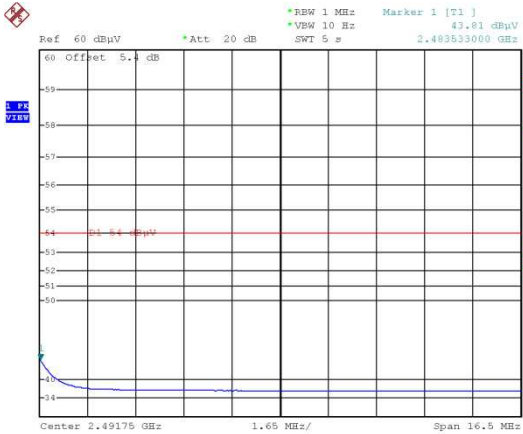


Date: 10.NOV.2014 23:41:33

**Vertical
Peak**

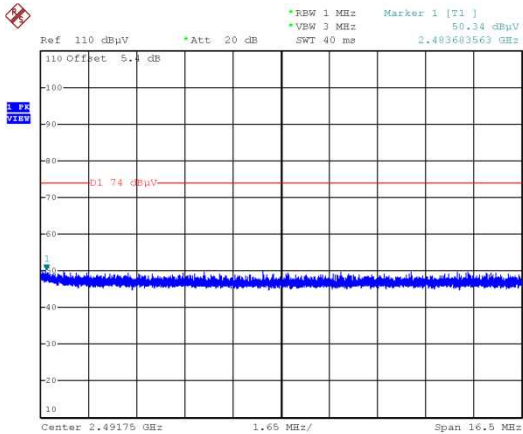


Date: 10.NOV.2014 23:45:18

Average

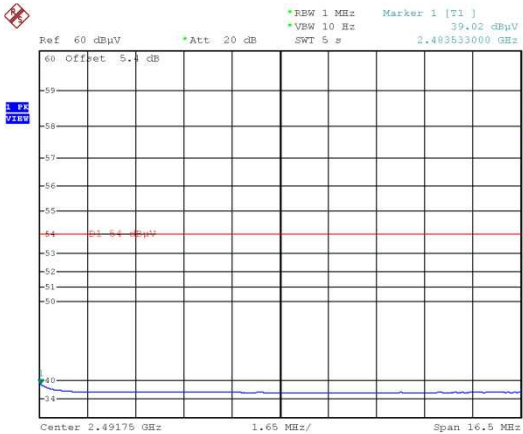


Date: 10.NOV.2014 23:44:30

[3-DH5]
Channel Low
Horizontal
Peak

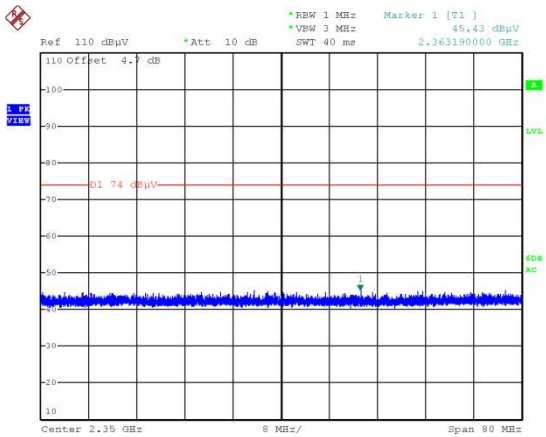


Date: 10.NOV.2014 23:24:26

Average

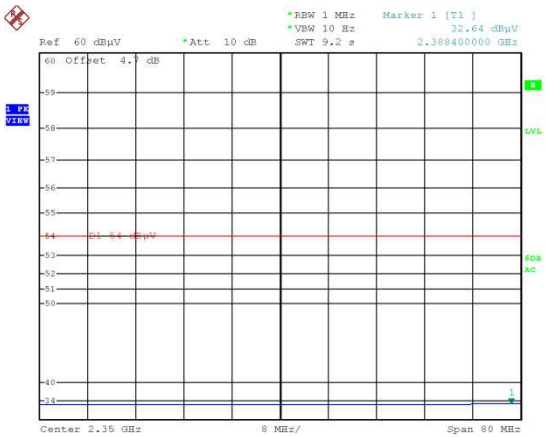


Date: 10.NOV.2014 23:25:35

Vertical
Peak

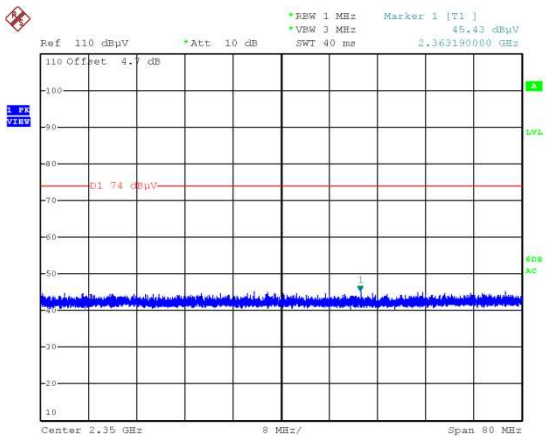


Date: 10.NOV.2014 23:24:26

Average

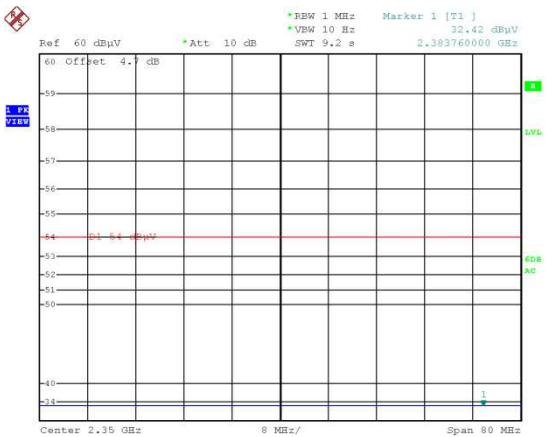


Date: 10.NOV.2014 23:20:37

Average

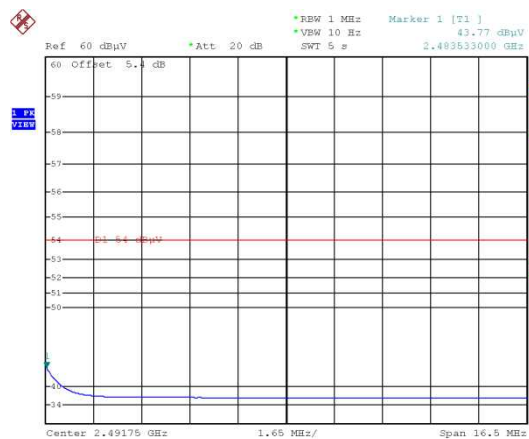

Date: 10.NOV.2014 23:55:05

Average

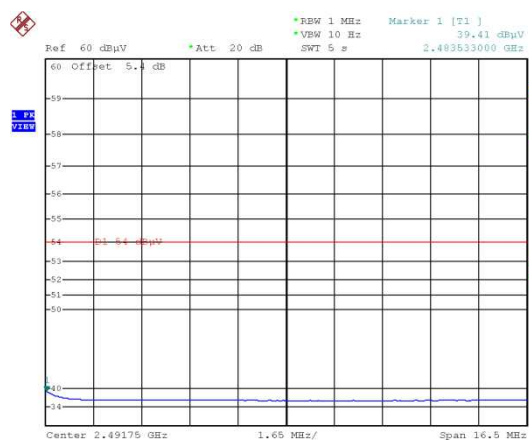

Date: 11.NOV.2014 00:01:06



Zacta

9. Antenna requirement

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

10. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission at mains port	$\pm 3.0\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 4.4\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.5\text{dB}$
Radiated emission (1000MHz – 26GHz)	$\pm 3.9\text{dB}$

11. Laboratory description

1. Location:

TÜV SÜD Zacta Ltd. Yonezawa Testing Center
4149-7 Hachimanpara 5-chome Yonezawa-shi Yamagata 992-1128 Japan
Phone: +81-238-28-2880 Fax: +81-238-28-2888

2. Facility filing information:

1) NVLAP accreditation: NVLAP Lab. code: 200306-0

2) VLAC accreditation: Lab. code: VLAC-013

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Radiated emission (CMAD)	Expiry Date
3m Semi-anechoic chamber	VLAC-013	VLAC-013	VLAC-013	-	Jul. 3, 2015
10m Semi-anechoic chamber No.1				VLAC-013	
10m Semi-anechoic chamber No.2				VLAC-013	
Shielded room No.1	-	VLAC-013	-	-	

3) FCC filing:

Site name	Registration Number	Expiry Date
Site 3	91065	Oct. 1, 2017
3m Semi-anechoic chamber	540072	Feb. 20, 2017
10m Semi-anechoic chamber No.1		
10m Semi-anechoic chamber No.2		
Shielded room No.1		

4) Industry Canada Oats site filing:

Site name	Sites on file: Oats 3m/10m	Expiry Date
Site 3	4224A-3	Jan. 23, 2015
3m Semi-anechoic chamber	4224A-4	
10m Semi-anechoic chamber No.1	4224A-5	
10m Semi-anechoic chamber No.2	4224A-6	Jan. 15, 2017

5) VCCI site filing:

Site name	Radiated emission	Conducted emission for mains port	Conducted emission for telecom port	Expiry Date
Site 3	R-138	C-134	T-1222	Nov. 16, 2017
3m Semi-anechoic chamber	A-0166	A-0166	A-0166	Jul. 3, 2015
10m Semi-anechoic chamber No.1				
10m Semi-anechoic chamber No.2				
Shielded room No.1	-	A-0166		

6) TÜV SÜD PS authorization:

Authorized as an EMC test laboratory

7) TÜV Rheinland authorization:

Authorized as an EMC test laboratory

Appendix A. Test equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. due	Cal. date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	May 31, 2015	May 30, 2014
Microwave cable	RS	YH_13S5	N/A (S403)	May 31, 2015	May 10, 2014
Attenuator	Weinschel	56-10	J4180	Nov. 30, 2014	Nov. 12, 2013

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100451	Nov. 30, 2014	Nov. 16, 2013
Preamplifier	ANRITSU	MH648A	M96057	Jun. 30, 2015	Jun. 12, 2014
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	891847/17	Mar. 31, 2015	Mar. 5, 2014
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2125	May 31, 2015	May 7, 2014
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	May 31, 2015	May 7, 2014
Attenuator	TME	CFA-01NPJ-6	N/A (S275)	Jun. 30, 2015	Jun. 9, 2014
Attenuator	TME	CFA-01NPJ-3	N/A (S272)	Jun. 30, 2015	Jun. 9, 2014
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	May 31, 2015	May 30, 2014
Preamplifier	Agilent Technologies	8449B	3008A1008	Dec. 31, 2014	Dec. 9, 2013
Double ridged guide antenna	EMCO	3115	5205	Dec. 31, 2014	Dec. 10, 2013
Attenuator	Agilent Technologies	8491B	MY39268633	Jan. 31, 2015	Jan. 15, 2013
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170189	May 31, 2015	May 2, 2013
Preamplifier	TSJ	MLA-1840-B03-35	1240332	May 31, 2015	May 2, 2013
Notch filter	Micro-Tronics	BRM50702	045	Nov. 30, 2014	Nov. 12, 2013
Microwave cable	SUHNER	SUCOFLEX104/9m	346316/4	Oct. 31, 2015	Oct. 22, 2014
		SUCOFLEX104/1m	322084/4	Oct. 31, 2015	Oct. 22, 2014
		SUCOFLEX104/1.5m	317226/4	Oct. 31, 2015	Oct. 22, 2014
		SUCOFLEX104/7m	41625/6	Oct. 31, 2015	Oct. 22, 2014
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.3.61	N/A	N/A
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-NSA)	May 31, 2015	May 6, 2014
3m Semi-anechoic chamber	TOKIN	N/A	N/A (9002-SVSWR)	May 31, 2015	May 6, 2014

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.