




# TEST REPORT

Report No. .... : CHTEW20120106 Report verification:   
Project No. .... : SHT2011066402EW  
FCC ID ..... : 2AX3H-FAUNAWEAR  
Applicant's name ..... : Fauna Audio GmbH  
Address ..... : Kratkyastraße 2, 8020 Graz, Steiermark, AUSTRIA  
Test item description ..... : Fauna Audio Glasses  
Trade Mark ..... : -  
Model/Type reference ..... : Levia Black  
Listed Model(s) ..... : Fabula Crystal Brown, Memor Havana, Spiro Transparent Brown  
Standard ..... : FCC 47 CFR Part2.1093  
IEEE Std C95.1, 1999 Edition  
IEEE 1528: 2013  
Date of receipt of test sample ..... : Nov.25, 2020  
Date of testing ..... : Nov.26, 2020- Dec.15, 2020  
Date of issue ..... : Dec.29, 2020  
Result ..... : PASS

Compiled by  
( position+printedname+signature).... : File administrators: Fanghui Zhu

*Fanghui Zhu*

Supervised by  
( position+printedname+signature).... : Test Engineer: Patrick Qiu

*Patrick Qiu*

Approved by  
( position+printedname+signature).... : Manager: Hans Hu

*Hans Hu*

Testing Laboratory Name ..... : Shenzhen Huatongwei International Inspection Co., Ltd

Address ..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely correspond to the test sample.*

## Contents

|            |   |           |
|------------|---|-----------|
| <u>1.</u>  | <u>Statement of Compliance</u>                                    | <u>3</u>  |
| <u>2.</u>  | <u>Test Standards and Report version</u>                          | <u>4</u>  |
| 2.1.       | Test Standards  | 4         |
| 2.2.       | Report version  | 4         |
| <u>3.</u>  | <u>Summary</u>  | <u>5</u>  |
| 3.1.       | Client Information  | 5         |
| 3.2.       | Product Description   | 5         |
| 3.3.       | RF Specification Description                                      | 5         |
| 3.4.       | Testing Laboratory Information                                    | 6         |
| 3.5.       | Environmental conditions  | 6         |
| <u>4.</u>  | <u>Equipments Used during the Test</u>                            | <u>7</u>  |
| <u>5.</u>  | <u>Measurement Uncertainty</u>                                    | <u>8</u>  |
| <u>6.</u>  | <u>SAR Measurements System Configuration</u>                      | <u>9</u>  |
| 6.1.       | SAR Measurement Set-up  | 9         |
| 6.2.       | DASY5 E-field Probe System  | 10        |
| 6.3.       | Phantoms  | 11        |
| 6.4.       | Device Holder   | 11        |
| <u>7.</u>  | <u>SAR Test Procedure</u>   | <u>12</u> |
| 7.1.       | Scanning Procedure  | 12        |
| 7.2.       | Data Storage and Evaluation                                       | 14        |
| <u>8.</u>  | <u>Position of the wireless device in relation to the phantom</u> | <u>16</u> |
| 8.1.       | Head Position   | 16        |
| 8.2.       | Body Position   | 17        |
| <u>9.</u>  | <u>Dielectric Property Measurements &amp; System Check</u>        | <u>18</u> |
| 9.1.       | Tissue Dielectric Parameters                                      | 18        |
| 9.2.       | System Check  | 19        |
| <u>10.</u> | <u>SAR Exposure Limits</u>  | <u>22</u> |
| <u>11.</u> | <u>Conducted Power Measurement Results</u>                        | <u>23</u> |
| 11.1.      | Bluetooth   | 23        |
| <u>12.</u> | <u>Maximum Tune-up Limit</u>                                      | <u>24</u> |
| <u>13.</u> | <u>Measured and Reported SAR Results</u>                          | <u>25</u> |
| 13.1.      | Head SAR  | 25        |
| 13.2.      | Body SAR  | 26        |
| <u>14.</u> | <u>SAR Measurement Variability</u>                                | <u>27</u> |

## 1. Statement of Compliance

| Maximum Reported SAR (W/kg @1g) |           |
|---------------------------------|-----------|
| RF Exposure Conditions          | Bluetooth |
| Head                            | 0.20      |
| Body(Dist.= 0mm)                | 0.04      |

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

## 2. Test Standards and Report version

### 2.1. Test Standards

The tests were performed according to following standards:

[FCC 47 Part 2.1093](#): Radiofrequency radiation exposure evaluation: portable devices.

[IEEE Std C95.1, 1999 Edition](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC published RF exposure KDB procedures:

[865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[648474 D04 Handset SAR v01r03](#): SAR Evaluation Considerations for Wireless Handsets

[TCB workshop](#) April, 2019; Page 19, Tissue Simulating Liquids (TSL)

### 2.2. Report version

| Revision No. | Date of issue | Description |
|--------------|---------------|-------------|
| N/A          | 2020-12-29    | Original    |
|              |               |             |
|              |               |             |
|              |               |             |
|              |               |             |

Remark: Model difference statement

All of models have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction, with Fauna Audio Glasses, The model is Levia Black . The difference lies only in the outlook/color of the different models.

### 3. Summary

#### 3.1. Client Information

|               |   |
|---------------|---|
| Applicant:    | Fauna Audio GmbH  |
| Address:      | Kratkystraße 2, 8020 Graz, Steiermark, AUSTRIA  |
| Manufacturer: | Shenzhen 3nod Digital Technology Co., Ltd   |
| Address:      | 401, ZONE 101A, WORKSHOP 15, ZHONGFU ROAD, TANGXIAYONG, COMMUNITY, YANLUOSTREET, BAOAN DISTRICT, SHENZHEN, PEOPLE'S REPUBLIC OF CHINA |

#### 3.2. Product Description

| Main unit                |  |
|--------------------------|--|
| Name of EUT:             | Fauna Audio Glasses  |
| Trade Mark:              | -  |
| Model No.:               | Levia Black  |
| Listed Model(s):         | Fabula Crystal Brown, Memor Havana, Spiro Transparent Brown              |
| Power supply:            | DC 3.7V  |
| Device Category:         | Portable   |
| Product stage:           | Production unit  |
| RF Exposure Environment: | General Population/Uncontrolled  |
| HTW test sample No.:     | YPHT20110664003  |
| Hardware version:        | Levia Black, Fabula Crystal Brown, Memor Havana, Spiro Transparent Brown |
| Software version:        | V2.29  |
| Device Dimension:        | Overall (Length x Width x Thickness): 80x10x7 mm                         |

#### 3.3. RF Specification Description

| Bluetooth  |                                |
|--|--------------------------------|
| Bluetooth version:   | V5.0                           |
| Support function:  | EDR                            |
| Operating Mode:  | GFSK<br>$\pi/4$ DQPSK<br>8DPSK |
| Antenna Type:  | PFC Antenna                    |
| Does this device support Bluetooth Tethering? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No        |                                |
| Bluetooth  |                                |
| Bluetooth version:   | V5.0                           |
| Support function:  | BLE                            |
| Operating Mode:  | GFSK                           |
| Antenna Type:  | PFC Antenna                    |
| Does this device support Bluetooth Tethering? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No        |                                |
| Remark:<br>1. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power. |                                |

### 3.4. Testing Laboratory Information

|                     |  |                      |
|---------------------|--|----------------------|
| Laboratory Name     | Shenzhen Huatongwei International Inspection Co., Ltd.                                       |                      |
| Laboratory Location | 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China |                      |
| Qualifications      | Type   | Accreditation Number |
|                     | CNAS   | L1225                |
|                     | A2LA   | 3902.01              |
|                     | FCC  | 762235               |
|                     | Canada   | 5377A                |

### 3.5. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                     |                |
|---------------------|----------------|
| Ambient temperature | 18 °C to 25 °C |
| Ambient humidity    | 30%RH to 70%RH |
| Air Pressure        | 950-1050mbar   |

#### 4. Equipments Used during the Test

| Used                                   | Test Equipment                       | Manufacturer  | Model No.     | Serial No. | Cal. date (YY-MM-DD) | Due date (YY-MM-DD) |
|--|--------------------------------------|---------------|---------------|------------|----------------------|---------------------|
| ●                                      | Data Acquisition Electronics DAEx    | SPEAG         | DAE4          | 1549       | 2020/04/04           | 2021/04/03          |
| ●                                      | E-field Probe                        | SPEAG         | EX3DV4        | 7494       | 2020/04/01           | 2021/03/31          |
| ○                                      | Universal Radio Communication Tester | R&S           | CMW500        | 137681     | 2020/06/18           | 2021/06/17          |
| ● Tissue-equivalent liquids Validation |                                      |               |               |            |                      |                     |
| ●                                      | Dielectric Assessment Kit            | SPEAG         | DAK-3.5       | 1267       | N/A                  | N/A                 |
| ○                                      | Dielectric Assessment Kit            | SPEAG         | DAK-12        | 1130       | N/A                  | N/A                 |
| ●                                      | Network analyzer                     | Keysight      | E5071C        | MY46733048 | 2020/10/15           | 2021/10/14          |
| ● System Validation                    |                                      |               |               |            |                      |                     |
| ○                                      | System Validation Antenna            | SPEAG         | CLA-150       | 4024       | 2018/02/21           | 2021/02/20          |
| ○                                      | System Validation Dipole             | SPEAG         | D450V3        | 1102       | 2018/02/23           | 2021/02/22          |
| ○                                      | System Validation Dipole             | SPEAG         | D750V3        | 1180       | 2018/02/07           | 2021/02/06          |
| ○                                      | System Validation Dipole             | SPEAG         | D835V2        | 4d238      | 2018/02/19           | 2021/02/18          |
| ○                                      | System Validation Dipole             | SPEAG         | D1750V2       | 1164       | 2018/02/06           | 2021/02/05          |
| ○                                      | System Validation Dipole             | SPEAG         | D1900V2       | 5d226      | 2018/02/22           | 2021/02/21          |
| ●                                      | System Validation Dipole             | SPEAG         | D2450V2       | 1009       | 2018/02/05           | 2021/02/04          |
| ○                                      | System Validation Dipole             | SPEAG         | D2600V2       | 1150       | 2018/02/05           | 2021/02/04          |
| ○                                      | System Validation Dipole             | SPEAG         | D5GHzV2       | 1273       | 2018/02/21           | 2021/02/20          |
| ●                                      | Signal Generator                     | R&S           | SMB100A       | 114360     | 2020/08/11           | 2021/08/10          |
| ●                                      | Power Viewer for Windows             | R&S           | N/A           | N/A        | N/A                  | N/A                 |
| ●                                      | Power sensor                         | R&S           | NRP18A        | 101010     | 2020/08/11           | 2021/08/10          |
| ●                                      | Power sensor                         | R&S           | NRP18A        | 101386     | 2020/06/08           | 2021/06/07          |
| ●                                      | Power Amplifier                      | BONN          | BLWA 0160-2M  | 1811887    | 2020/11/12           | 2021/11/11          |
| ●                                      | Dual Directional Coupler             | Mini-Circuits | ZHDC-10-62-S+ | F975001814 | 2020/11/12           | 2021/11/11          |
| ●                                      | Attenuator                           | Mini-Circuits | VAT-3W2+      | 1819       | 2020/11/12           | 2021/11/11          |
| ●                                      | Attenuator                           | Mini-Circuits | VAT-10W2+     | 1741       | 2020/11/12           | 2021/11/11          |

Note:

1. The Probe, Dipole and DAE calibration reference to the Appendix B and C.
2. Referring to KDB865664 D01, the dipole calibration interval can be extended to 3 years with justification. The dipole are also not physically damaged or repaired during the interval.

## 5. **Measurement Uncertainty**

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.



## 6. SAR Measurements System Configuration

### 6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

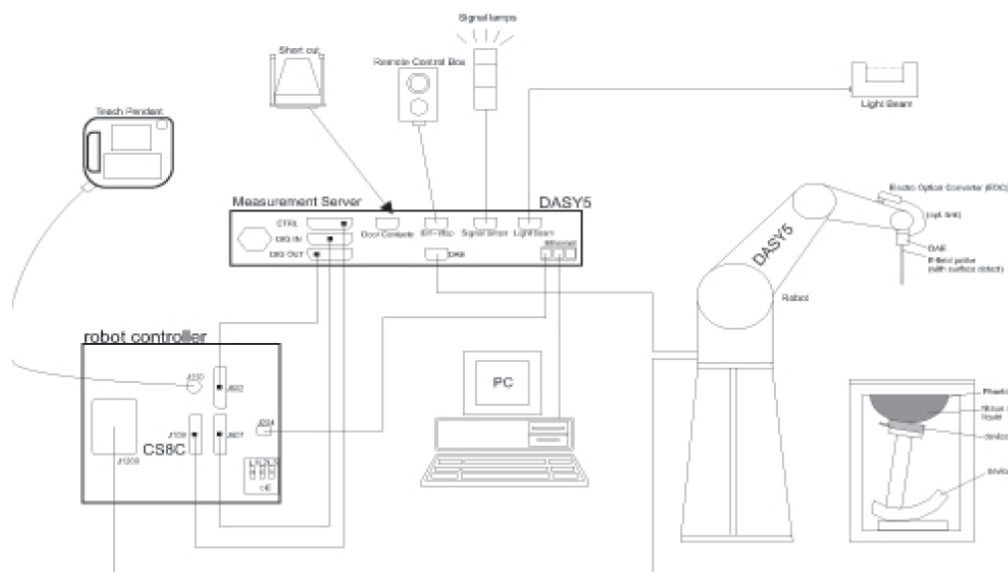

## 6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### ● Probe Specification


|               |  |
|---------------|--|
| Construction  | Symmetrical design with triangular core<br>Interleaved sensors<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |
| Calibration   | ISO/IEC 17025 calibration service available.   |
| Frequency     | 4 MHz to 10 GHz;<br>Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)  |
| Directivity   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)  |
| Dynamic Range | 10 $\mu$ W/g to > 100 W/kg;<br>Linearity: $\pm 0.2$ dB   |
| Dimensions    | Overall length: 337 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 1.0 mm   |
| Application   | General dosimetry up to 6 GHz<br>Dosimetry in strong gradient fields<br>Compliance tests of Mobile Phones  |
| Compatibility | DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI   |



### ◆ Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

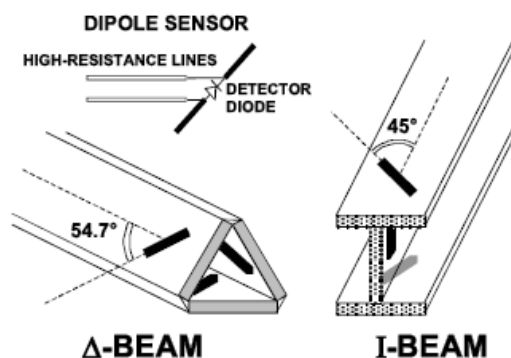

### 6.3. Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM-Twin Phantom

### 6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

## 7. SAR Test Procedure

### 7.1. Scanning Procedure

#### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. Measure the local SAR at a test point within 8 mm of the phantom inner surface that is closest to the DUT. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

#### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

#### Area Scan Resolutions per FCC KDB Publication 865664 D01v04

|  | ≤ 3 GHz   | > 3 GHz   |
|--|---|---|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface | 5 mm ± 1 mm   | $\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location              | 30° ± 1°  | 20° ± 1°  |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                            | $\leq 2$ GHz: ≤ 15 mm<br>2 – 3 GHz: ≤ 12 mm   | 3 – 4 GHz: ≤ 12 mm<br>4 – 6 GHz: ≤ 10 mm            |
|  | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |   |

**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1g and 10g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

**Zoom Scan Resolutions per FCC KDB Publication 865664 D01v04**

|  |   |   |   |   |
|--|---|---|---|---|
| Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$ |   |   | $\leq 2 \text{ GHz}: \leq 8 \text{ mm}$<br>$2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$ | $3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$<br>$4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$  |
| Maximum zoom scan spatial resolution, normal to phantom surface                        | uniform grid: $\Delta z_{\text{Zoom}}(n)$ |   | $\leq 5 \text{ mm}$   | $3 - 4 \text{ GHz}: \leq 4 \text{ mm}$<br>$4 - 5 \text{ GHz}: \leq 3 \text{ mm}$<br>$5 - 6 \text{ GHz}: \leq 2 \text{ mm}$    |
|  | graded grid                               | $\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | $\leq 4 \text{ mm}$   | $3 - 4 \text{ GHz}: \leq 3 \text{ mm}$<br>$4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$<br>$5 - 6 \text{ GHz}: \leq 2 \text{ mm}$  |
|  |   | $\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$                             |   |
| Minimum zoom scan volume   | x, y, z                                   |   | $\geq 30 \text{ mm}$  | $3 - 4 \text{ GHz}: \geq 28 \text{ mm}$<br>$4 - 5 \text{ GHz}: \geq 25 \text{ mm}$<br>$5 - 6 \text{ GHz}: \geq 22 \text{ mm}$ |

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

\* When zoom scan is required and the reported SAR from the *area scan based 1-g SAR estimation* procedures of KDB Publication 447498 is  $\leq 1.4 \text{ W/kg}$ ,  $\leq 8 \text{ mm}$ ,  $\leq 7 \text{ mm}$  and  $\leq 5 \text{ mm}$  zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1. The SAR drift shall be kept within  $\pm 5 \%$ .

## 7.2. Data Storage and Evaluation

### Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors),s together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

|                    |                          |                      |
|--------------------|--------------------------|----------------------|
| Probe parameters:  | Sensitivity:             | Normi, ai0, ai1, ai2 |
|                    | Conversion factor:       | ConvFi               |
|                    | Diode compression point: | Dcpi                 |
| Device parameters: | Frequency:               | f                    |
|                    | Crest factor:            | cf                   |
| Media parameters:  | Conductivity:            | σ                    |
|                    | Density:                 | ρ                    |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

|                    |   |
|--------------------|---|
| Vi:                | compensated signal of channel ( i = x, y, z )   |
| Ui:                | input signal of channel ( i = x, y, z )         |
| cf:                | crest factor of exciting field (DASY parameter) |
| dcp <sub>i</sub> : | diode compression point (DASY parameter)        |

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

|        |  |
|--------|--|
| Vi:    | compensated signal of channel ( i = x, y, z )                                    |
| Normi: | sensor sensitivity of channel ( i = x, y, z ),<br>[mV/(V/m)²] for E-field Probes |
| ConvF: | sensitivity enhancement in solution  |
| aij:   | sensor sensitivity factors for H-field probes                                    |
| f:     | carrier frequency [GHz]  |
| Ei:    | electric field strength of channel i in V/m                                      |
| Hi:    | magnetic field strength of channel i in A/m                                      |

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR: local specific absorption rate in W/kg  
Etot: total field strength in V/m  
 $\sigma$ : conductivity in [mho/m] or [Siemens/m]  
 $\rho$ : equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.



## 8. Position of the wireless device in relation to the phantom


### 8.1. Head Position

The wireless device define two imaginary lines on the handset, the vertical centreline and the horizontal line, for the handset in vertical orientation as shown in Figures 5a and 5b.


**The vertical centreline** passes through two points on the front side of the handset: the midpoint of the width  $W_t$  of the handset at the level of the acoustic output (point A in Figures 5a and 5b), and the midpoint of the width  $W_b$  of the bottom of the handset (point B).

**The horizontal line** is perpendicular to the vertical centreline and passes through the centre of the acoustic output (see Figures 5a and 5b). The two lines intersect at point A.

Note that for many handsets, point A coincides with the centre of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset (see Figure 5b), especially for clam-shell handsets, handsets with flip cover pieces, and other irregularly shaped handsets.

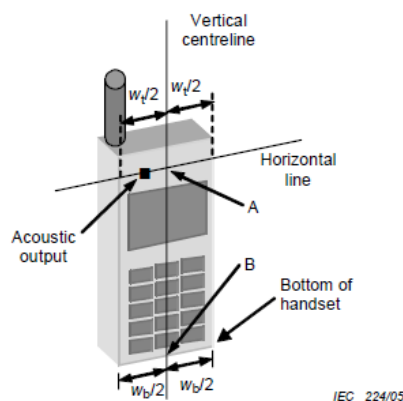


Figures 5a

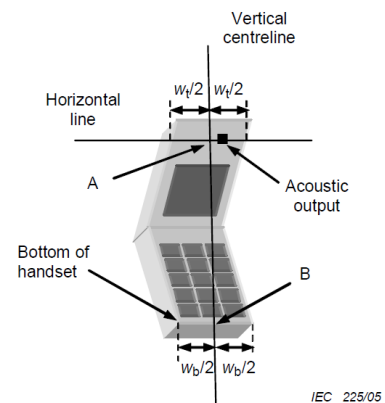

Figures 5b


|       |  |
|-------|--|
| $W_t$ | Width of the handset at the level of the acoustic                              |
| $W_b$ | Width of the bottom of the handset   |
| A     | Midpoint of the width $w_t$ of the handset at the level of the acoustic output |
| B     | Midpoint of the width $w_b$ of the bottom of the handset                       |

### Cheek position

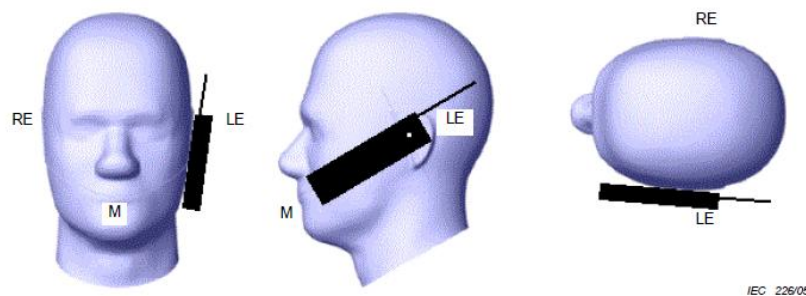

Picture 2 Cheek position of the wireless device on the left side of SAM

### Tilt position

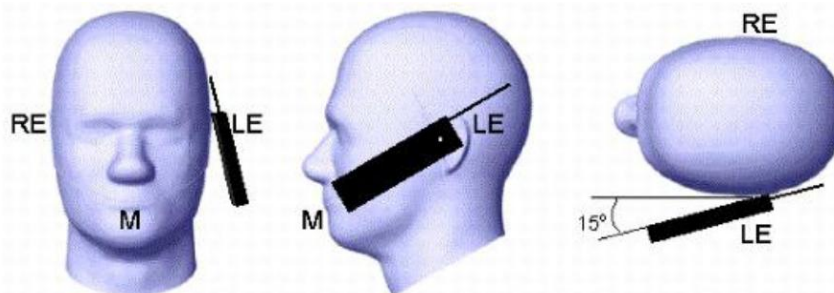


Picture 3 Tilt position of the wireless device on the left side of SAM



## 8.2. Body Position

Devices that support transmission while used with body-worn accessories must be tested for body-worn accessory SAR compliance, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics.

Devices that are designed to operate on the body of users using lanyards and straps or without requiring additional body-worn accessories must be tested for SAR compliance using a conservative minimum test separation distance  $\leq 5\text{mm}$  to support compliance.

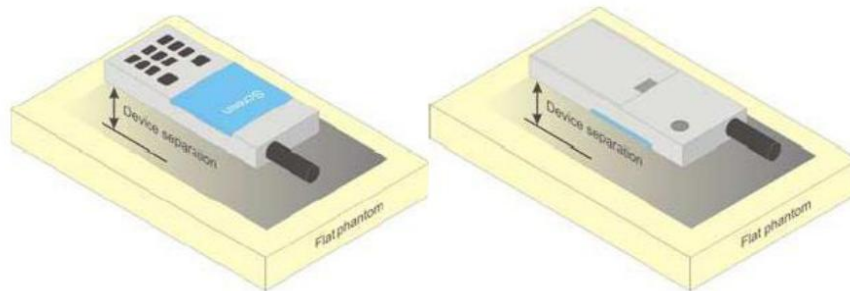

Picture 4 Test positions for body-worn devices

## 9. Dielectric Property Measurements & System Check

### 9.1. Tissue Dielectric Parameters

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3-4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

The dielectric constant ( $\epsilon_r$ ) and conductivity ( $\sigma$ ) of typical tissue-equivalent media recipes are expected to be within  $\pm 5\%$  of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for  $\epsilon_r$  and  $\sigma$  may be relaxed to  $\pm 10\%$ . This is limited to frequencies  $\leq 3$  GHz.

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

| Tissue dielectric parameters for Head and Body |              |                      |              |                      |
|--|--------------|----------------------|--------------|----------------------|
| Target Frequency<br>(MHz)                      | Head         |                      | Body         |                      |
|  | $\epsilon_r$ | $\sigma(\text{S/m})$ | $\epsilon_r$ | $\sigma(\text{S/m})$ |
| 2450   | 39.2         | 1.80                 | 52.7         | 1.95                 |

#### IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

#### Dielectric Property Measurements Results:

| Dielectric performance of Head tissue simulating liquid |              |          |                      |          |                           |                       |           |              |            |
|---|--------------|----------|----------------------|----------|---------------------------|-----------------------|-----------|--------------|------------|
| Frequency<br>(MHz)                                      | $\epsilon_r$ |          | $\sigma(\text{S/m})$ |          | Delta<br>( $\epsilon_r$ ) | Delta<br>( $\sigma$ ) | Limit     | Temp<br>(°C) | Date       |
|   | Target       | Measured | Target               | Measured |                           |                       |           |              |            |
| 2450  | 39.20        | 40.34    | 1.800                | 1.796    | 2.91%                     | -0.22%                | $\pm 5\%$ | 22.3         | 2020-12-15 |



**System Check Result:**

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within  $\pm 10\%$  of the manufacturer calibrated dipole SAR target.

| Head               |              |                    |                   |              |                    |                      |               |                |            |              |            |
|--------------------|--------------|--------------------|-------------------|--------------|--------------------|----------------------|---------------|----------------|------------|--------------|------------|
| Frequency<br>(MHz) | 1g SAR       |                    |                   | 10g SAR      |                    |                      | Delta<br>(1g) | Delta<br>(10g) | Limit      | Temp<br>(°C) | Date       |
|                    | Target<br>1W | Normalize<br>to 1W | Measured<br>250mW | Target<br>1W | Normalize<br>to 1W | Measur<br>ed<br>250m |               |                |            |              |            |
| 2450               | 51.50        | 54.00              | 13.50             | 24.10        | 25.24              | 6.31                 | 4.85%         | 4.73%          | $\pm 10\%$ | 22.1         | 2020-12-15 |

## Plots of System Performance Check

### SystemPerformanceCheck-Head 2450MHz

DUT: D2450V2; Type: D2450V2; Serial: 1009

Date: 2020-12-15

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2450$  MHz;  $\sigma = 1.796$  S/m;  $\epsilon_r = 40.338$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4 °C; Liquid Temperature: 22.2 °C;

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7494; ConvF(7.91, 7.91, 7.91) @ 2450 MHz; Calibrated: 4/1/2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1549; Calibrated: 4/4/2020
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

**Head/d=10mm, Pin=250mW/Area Scan (41x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 23.0 W/kg


**Head/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 117.7 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 27.9 W/kg

**SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.31 W/kg**

Maximum value of SAR (measured) = 22.3 W/kg

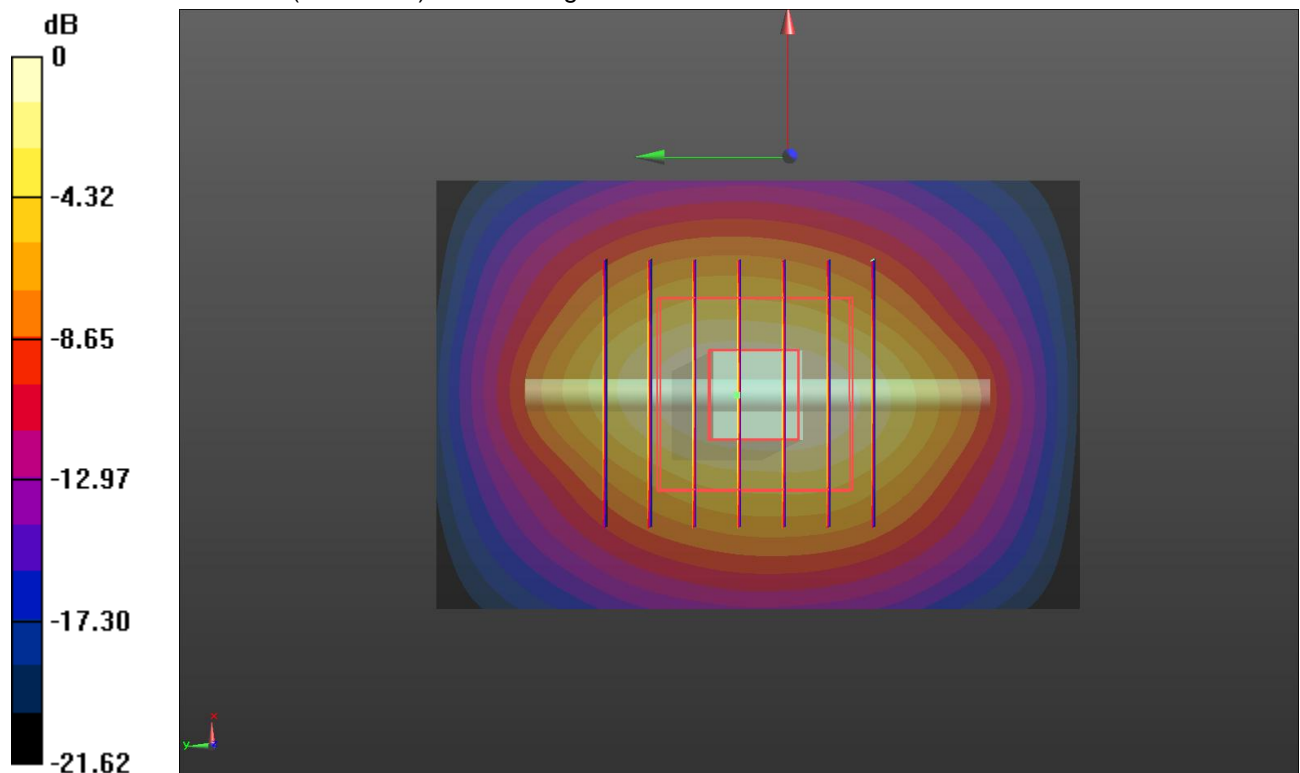

0 dB = 22.3 W/kg = 13.48 dBW/kg

## 10. SAR Exposure Limits

SAR assessments have been made in line with the requirements of FCC 47 CFR § 2.1093.

| Type Exposure   | Limit (W/kg)   |  |
|---|--|--|
|   | General Population/<br>Uncontrolled Exposure Environment | Occupational/<br>Controlled Exposure Environment |
| Spatial Average SAR<br>(whole body)                     | 0.08   | 0.4  |
| Spatial Peak SAR<br>(1g cube tissue for head and trunk) | 1.6  | 8.0  |
| Spatial Peak SAR<br>(10g for limb)                      | 4.0  | 20.0   |

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

## 11. Conducted Power Measurement Results

### 11.1. Bluetooth

#### Left

| Bluetooth    |         |                 |                               |
|--------------|---------|-----------------|-------------------------------|
| Mode         | Channel | Frequency (MHz) | Conducted Average Power (dBm) |
| GFSK         | 0       | 2402            | 5.10                          |
|              | 39      | 2441            | 4.99                          |
|              | 78      | 2480            | 4.79                          |
| $\pi/4$ QPSK | 0       | 2402            | 5.07                          |
|              | 39      | 2441            | 4.96                          |
|              | 78      | 2480            | 4.77                          |
| 8DPSK        | 0       | 2402            | 5.05                          |
|              | 39      | 2441            | 4.93                          |
|              | 78      | 2480            | 4.75                          |
| BLE          | 0       | 2402            | 3.36                          |
|              | 19      | 2440            | 3.65                          |
|              | 39      | 2480            | 3.78                          |

#### Right

| Bluetooth    |         |                 |                               |
|--------------|---------|-----------------|-------------------------------|
| Mode         | Channel | Frequency (MHz) | Conducted Average Power (dBm) |
| GFSK         | 0       | 2402            | 8.87                          |
|              | 39      | 2441            | 8.85                          |
|              | 78      | 2480            | 9.21                          |
| $\pi/4$ QPSK | 0       | 2402            | 8.88                          |
|              | 39      | 2441            | 8.86                          |
|              | 78      | 2480            | 9.21                          |
| 8DPSK        | 0       | 2402            | 8.88                          |
|              | 39      | 2441            | 8.86                          |
|              | 78      | 2480            | 9.22                          |
| BLE          | 0       | 2402            | 7.42                          |
|              | 19      | 2440            | 7.86                          |
|              | 39      | 2480            | 7.98                          |

## 12. Maximum Tune-up Limit

Left

| Bluetooth    |         |  |
|--------------|---------|--|
| Mode         | Channel | Maximum Tune-up (dBm)<br>Conducted Average Power |
| GFSK         | 0       | 5.50   |
|              | 39      | 5.00   |
|              | 78      | 5.00   |
| $\pi/4$ QPSK | 0       | 5.50   |
|              | 39      | 5.00   |
|              | 78      | 5.00   |
| 8DPSK        | 0       | 5.50   |
|              | 39      | 5.00   |
|              | 78      | 5.00   |
| BLE          | 0       | 3.50   |
|              | 19      | 4.00   |
|              | 39      | 4.00   |

Right

| Bluetooth    |         |  |
|--------------|---------|--|
| Mode         | Channel | Maximum Tune-up (dBm)<br>Conducted Average Power |
| GFSK         | 0       | 9.00   |
|              | 39      | 9.00   |
|              | 78      | 9.50   |
| $\pi/4$ QPSK | 0       | 9.00   |
|              | 39      | 9.00   |
|              | 78      | 9.50   |
| 8DPSK        | 0       | 9.00   |
|              | 39      | 9.00   |
|              | 78      | 9.50   |
| BLE          | 0       | 7.50   |
|              | 19      | 8.00   |
|              | 39      | 8.00   |



### 13. Measured and Reported SAR Results

#### SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR \* Tune-up scaling factor \* Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

#### KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

Refer to **KDB 248227** for reduced testing and select only the maximum power mode for testing in all Bluetooth specifications

#### 13.1. Head SAR

##### Left

| Bluetooth |               |           |      |                        |                      |                         |            |                           |                  |                          |                        |          |
|-----------|---------------|-----------|------|------------------------|----------------------|-------------------------|------------|---------------------------|------------------|--------------------------|------------------------|----------|
| Mode      | Test Position | Frequency |      | Conduct ed Power (dBm) | Tune up limit (dBm ) | Tune up scalin g factor | Duty Cycle | Duty Cycle Scaling Factor | Power Drift(d B) | Measure d SAR(1g) (W/kg) | Report SAR(1g ) (W/kg) | Plot No. |
|           |               | CH        | MHz  |                        |                      |                         |            |                           |                  |                          |                        |          |
| GFSK      | Intside       | 0         | 2402 | 5.10                   | 5.50                 | 1.096                   | 59.00%     | 1.69                      | -0.14            | 0.054                    | 0.10                   | 1        |
|           |               | 39        | 2441 | 4.99                   | 5.00                 | 1.002                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           |               | 78        | 2480 | 4.79                   | 5.00                 | 1.050                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |

##### Right

| Bluetooth |               |           |      |                        |                      |                         |            |                           |                  |                          |                        |          |
|-----------|---------------|-----------|------|------------------------|----------------------|-------------------------|------------|---------------------------|------------------|--------------------------|------------------------|----------|
| Mode      | Test Position | Frequency |      | Conduct ed Power (dBm) | Tune up limit (dBm ) | Tune up scalin g factor | Duty Cycle | Duty Cycle Scaling Factor | Power Drift(d B) | Measure d SAR(1g) (W/kg) | Report SAR(1g ) (W/kg) | Plot No. |
|           |               | CH        | MHz  |                        |                      |                         |            |                           |                  |                          |                        |          |
| GFSK      | Intside       | 0         | 2402 | 8.87                   | 9.00                 | 1.030                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           |               | 39        | 2441 | 8.85                   | 9.00                 | 1.035                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           |               | 78        | 2480 | 9.21                   | 9.50                 | 1.069                   | 59.00%     | 1.69                      | -0.12            | 0.109                    | 0.20                   | 2        |

## 13.2. Body SAR

### Left

| Bluetooth |               |           |      |                        |                      |                         |            |                           |                  |                          |                        |          |
|-----------|---------------|-----------|------|------------------------|----------------------|-------------------------|------------|---------------------------|------------------|--------------------------|------------------------|----------|
| Mode      | Test Position | Frequency |      | Conduct ed Power (dBm) | Tune up limit (dBm ) | Tune up scalin g factor | Duty Cycle | Duty Cycle Scaling Factor | Power Drift(d B) | Measure d SAR(1g) (W/kg) | Report SAR(1g ) (W/kg) | Plot No. |
|           |               | CH        | MHz  |                        |                      |                         |            |                           |                  |                          |                        |          |
| GFSK      | Outsid e      | 0         | 2402 | 5.10                   | 5.50                 | 1.096                   | 59.00%     | 1.69                      | -0.12            | 0.012                    | 0.02                   | 3        |
|           |               | 39        | 2441 | 4.99                   | 5.00                 | 1.002                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           |               | 78        | 2480 | 4.79                   | 5.00                 | 1.050                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           | Top           | 0         | 2402 | 5.10                   | 5.50                 | 1.096                   | 59.00%     | 1.69                      | 0.06             | 0.007                    | 0.01                   | -        |
|           |               | 39        | 2441 | 4.99                   | 5.00                 | 1.002                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           |               | 78        | 2480 | 4.79                   | 5.00                 | 1.050                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           | Bottom        | 0         | 2402 | 5.10                   | 5.50                 | 1.096                   | 59.00%     | 1.69                      | -0.14            | 0.010                    | 0.02                   | -        |
|           |               | 39        | 2441 | 4.99                   | 5.00                 | 1.002                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           |               | 78        | 2480 | 4.79                   | 5.00                 | 1.050                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |

### Right

| Bluetooth |               |           |      |                        |                      |                         |            |                           |                  |                          |                        |          |
|-----------|---------------|-----------|------|------------------------|----------------------|-------------------------|------------|---------------------------|------------------|--------------------------|------------------------|----------|
| Mode      | Test Position | Frequency |      | Conduct ed Power (dBm) | Tune up limit (dBm ) | Tune up scalin g factor | Duty Cycle | Duty Cycle Scaling Factor | Power Drift(d B) | Measure d SAR(1g) (W/kg) | Report SAR(1g ) (W/kg) | Plot No. |
|           |               | CH        | MHz  |                        |                      |                         |            |                           |                  |                          |                        |          |
| GFSK      | Outsid e      | 0         | 2402 | 8.87                   | 9.00                 | 1.030                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           |               | 39        | 2441 | 8.85                   | 9.00                 | 1.035                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           |               | 78        | 2480 | 9.21                   | 9.50                 | 1.069                   | 59.00%     | 1.69                      | 0.17             | 0.024                    | 0.04                   | 4        |
|           | Top           | 0         | 2402 | 8.87                   | 9.00                 | 1.030                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           |               | 39        | 2441 | 8.85                   | 9.00                 | 1.035                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           |               | 78        | 2480 | 9.21                   | 9.50                 | 1.069                   | 59.00%     | 1.69                      | -0.05            | 0.010                    | 0.02                   | -        |
|           | Bottom        | 0         | 2402 | 8.87                   | 9.00                 | 1.030                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           |               | 39        | 2441 | 8.85                   | 9.00                 | 1.035                   | 59.00%     | 1.69                      | -                | -                        | -                      | -        |
|           |               | 78        | 2480 | 9.21                   | 9.50                 | 1.069                   | 59.00%     | 1.69                      | -0.09            | 0.020                    | 0.04                   | -        |

SAR Test Data Plots to the Appendix A.

## 14. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $<0.8$  or  $2$  W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.8$  or  $2$  W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  or  $3.6$  W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is  $\geq 1.5$  or  $3.75$  W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

| Band | Test Position | Frequency |     | Highest Measured SAR (W/kg) | First Repeated     |                               | Second Repeated    |                               |
|------|---------------|-----------|-----|-----------------------------|--------------------|-------------------------------|--------------------|-------------------------------|
|      |               | CH        | MHz |                             | Measured SAR(W/kg) | Largest to Smallest SAR Ratio | Measured SAR(W/kg) | Largest to Smallest SAR Ratio |
| NA   | NA            | NA        | NA  | NA                          | NA                 | NA                            | NA                 | NA                            |

-----End of Report-----