

FCC RF Test Report

For

Shenzhen Hangshi Technology Co.,Ltd

Test Standards:	<u>Part 15C Subpart C §15.247</u>
Product Description:	<u>Bluetooth Keyboard</u>
Tested Model:	<u>HB220B</u>
Additional Model No.:	<u>HB220</u>
Brand Name:	<u>N/A</u>
FCC ID:	2AKHJ-HB220B
Classification	Digital Spread Spectrum (DSS)
Report No.:	<u>EC1908013RF01</u>
Tested Date:	<u>2019-08-20 to 2019-08-29</u>
Issued Date:	<u>2019-08-29</u>
Prepared By:	<u>Victorique . Gao</u> Victorique Gao/ Engineer
Approved By:	<u>Bacon Wu</u> Bacon Wu / RF Manager

Hunan Ecloud Testing Technology Co., Ltd.

Building A1, Changsha E Center, No. 18 Xiangtai Avenue, Liuyang Economic and
Technological Development Zone, Hunan, P.R.C

Tel.: +86-731-89634887 Fax.: +86-731-89634887

www.hn-ecloud.com

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Hunan Ecloud Testing Technology Co., Ltd., the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2019.08.29	Valid	Original Report

TABLE OF CONTENTS

1	TEST LABORATORY	5
1.1	Test facility	5
2	GENERAL DESCRIPTION.....	6
2.1	Applicant	6
2.2	Manufacturer	6
2.3	General Description Of EUT	6
2.4	Modification of EUT	7
2.5	Applicable Standards	7
3	TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
3.1	Descriptions of Test Mode	8
3.2	Test Mode	9
3.3	Support Equipment	10
3.4	Test Setup	10
3.5	Measurement Results Explanation Example	13
4	TEST RESULT	14
4.1	20dB and 99% Bandwidth Measurement	14
4.2	Hopping Channel Separation Measurement	19
4.3	Number of Channel Measurement	22
4.4	Average Time of Occupancy Measurement	24
4.5	Peak Output Power Measurement	31
4.6	Conducted Band Edges Measurement.....	34
4.7	Conducted Spurious Emission Measurement	38
4.8	Radiated Band Edges and Spurious Emission Measurement	42
4.9	AC Conducted Emission Measurement.....	72
4.10	Antenna Requirements	75
5	LIST OF MEASURING EQUIPMENT.....	76
6	UNCERTAINTY OF EVALUATION.....	77

Summary of Test Result

FCC Rule	Description	Limit	Result	Remark
15.247(a)(1)	20dB Bandwidth	NA	Pass	-
-	99% Bandwidth	-	Pass	-
15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
15.247(a)(1)	Number of Channels	≥ 15 Chs	Pass	-
15.247(a)(1)	Average Time of Occupancy	≤ 0.4 sec in 31.6sec period	Pass	-
15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
15.247(d)	Conducted Band Edges	≤ 20 dBc	Pass	-
15.247(d)	Conducted Spurious Emission	≤ 20 dBc	Pass	-
15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.06 dB at 203.63 MHz
15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 24.56 dB at 19.122 MHz
15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 Test Laboratory

1.1 Test facility

CNAS (accreditation number: L11138)

Hunan Ecloud Testing Technology Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1244 , Test Firm Registration Number: 793308)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

ISED(CAB identifier: CN0012, ISED# :24347)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the Wireless Device Testing Laboratories list of innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

A2LA (Certificate Code : 4895.01)

Hunan Ecloud Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

2 General Description

2.1 Applicant

Shenzhen Hangshi Technology Co.,Ltd

Hangshi Technology Park, Democracy West Industry Area, Shajing Town, Bao'an District, Shenzhen, China.

2.2 Manufacturer

Shenzhen Hangshi Technology Co.,Ltd

Hangshi Technology Park, Democracy West Industry Area, Shajing Town, Bao'an District, Shenzhen, China.

2.3 General Description Of EUT

Product	Bluetooth Keyboard
Model No.	HB220B
Additional No.	HB220
Difference Description	HB220B have backlight , HB220 doesn't have backlight , and does not have any effect on any other RF functions.
FCC ID	2AKHJ-HB220B
Power Supply	5Vdc (adapter or host equipment) 3.7Vdc (Li-ion, polymer)
Modulation Technology	FHSS
Modulation Type	GFSK
Operating Frequency	2402MHz~2480MHz
Number Of Channel	79
Max. Output Power	Bluetooth BR(1Mbps) : -2.610 dBm (0.0005 W)
Antenna Type	PCB Antenna type with 1.87dBi gain
HW Version	V1.0
SW Version	V1.0
I/O Ports	Refer to user's manual
Cable Supplied	USB cable: Unshielded, detachable, 1.0m

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

2.4 Modification of EUT

No modifications are made to the EUT during all test items.

2.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ KDB 558074 D01 15.247 Meas Guidance v05r02

Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

3 Test Configuration of Equipment Under Test

3.1 Descriptions of Test Mode

The transmitter has a maximum peak conducted output power as follows:

Channel	Frequency	Mode	Bluetooth RF Output Power
Ch00	2402MHz	GFSK	-2.610
Ch39	2441MHz	GFSK	-3.494
Ch78	2480MHz	GFSK	-5.620

Remark:

- 1.All the test data for each data rate were verified, but only the worst case was reported.
- 2.The data rate was set in 1Mbps for all the test items due to the highest RF output power.

3.2 Test Mode

3.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth BR 1Mbps GFSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz

3.2.2 Radiated Emission Test (Below 1GHz)

Radiated Test Cases	Bluetooth BR 1Mbps GFSK
	Mode 1: CH00_2402 MHz

- Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.
2. Following channel(s) was (were) selected for the final test as listed above

3.2.3 Radiated Emission Test (Above 1GHz)

Radiated Test Cases	Bluetooth BR 1Mbps GFSK
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz

- Note : 1. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.
2. Following channel(s) was (were) selected for the final test as listed above
3. For frequency above 18GHz, the measured value is much lower than the limit, therefore, it is not reflected in the report.

3.2.4 Power Line Conducted Emission Test:

AC Conducted Emission	Mode 1 : Bluetooth Link + USB Cable (Charging from Adapter)
-----------------------------	---

3.3 Support Equipment


Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	Tongxingrui	TX-0501000-AD001	DOC	N/A	N/A
2.	USB Cable	N/A	N/A	N/A	N/A	unshielded 0.8m
3.	Notebook	Lenovo	E470C	FCC DoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable1.2 m

3.4 Test Setup


The EUT is continuously communicating to the Bluetooth tester during the tests.

EUT was set in the Hidden menu mode to enable BT communications.


Setup diagram for Conducted Test

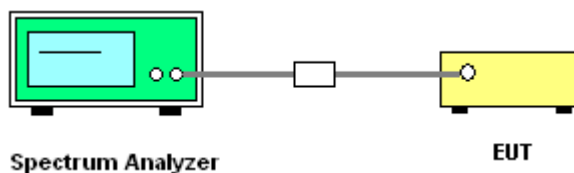


Setup diagram for Raidation(9KHz~30MHz) Test

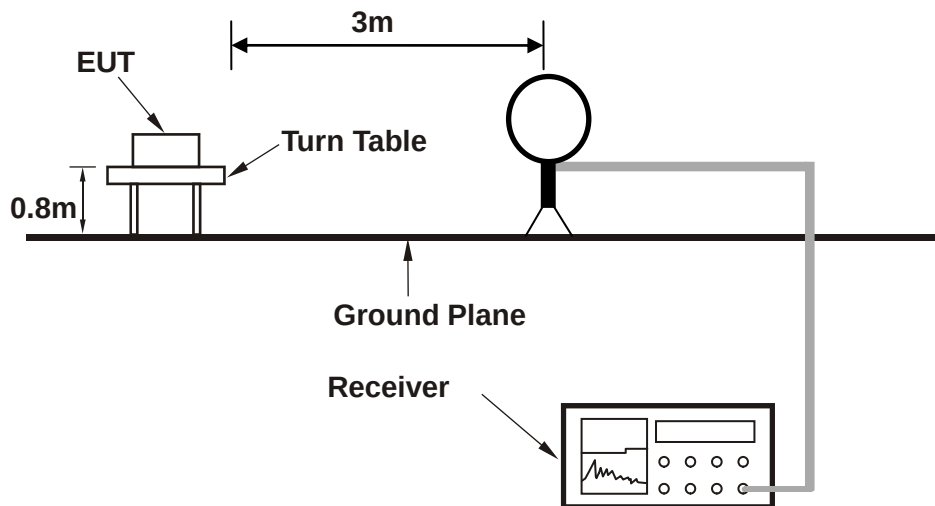


Setup diagram for Raidation(Below 1G) Test

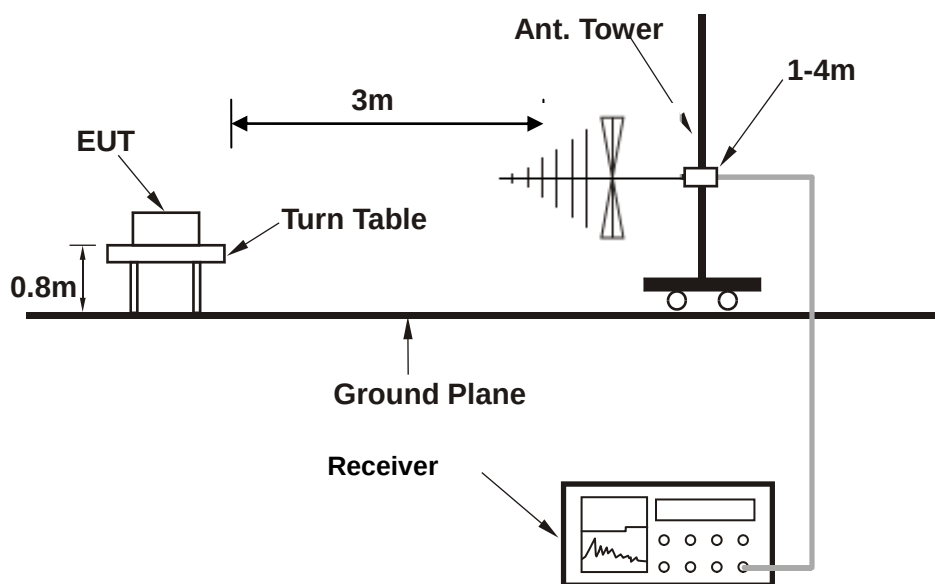

Setup diagram for Raidation(Above1G) Test

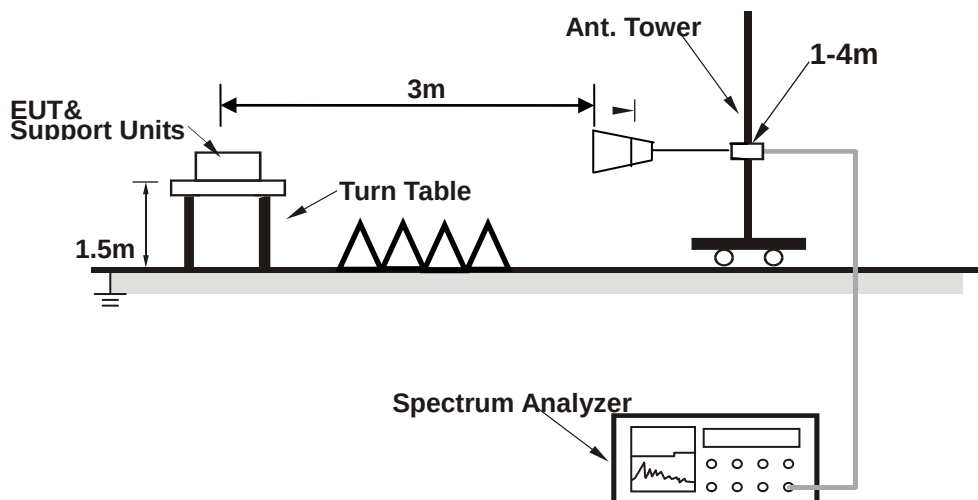

Setup diagram for AC Conducted Emission Test

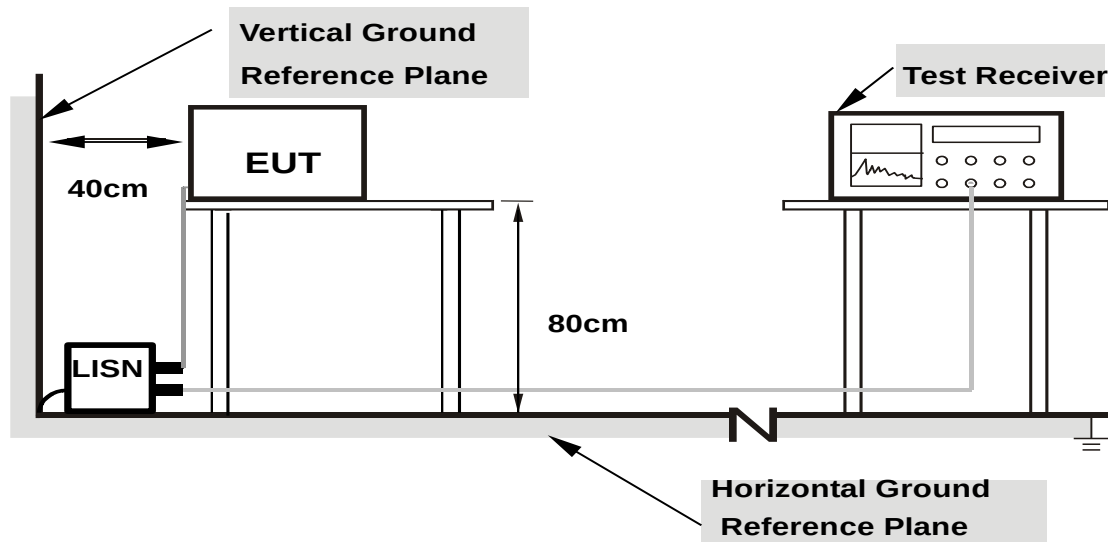

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$

For all radiated test items:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4 Test Result

4.1 20dB and 99% Bandwidth Measurement

4.1.1 Limit of 20dB and 99% Bandwidth

None; for reporting purposes only.


4.1.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
4. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 99% bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = sample;
Trace = max hold.


4.1.3 Test Result of 20dB Bandwidth and 99% Bandwidth

Test Mode :		Transmitting	Temperature :	24~26℃	
Test Engineer :		Victorique Gao	Relative Humidity :	50~53%	
Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]		Verdict
GFSK	LCH	1.031	0.96335		PASS
GFSK	MCH	1.028	0.96479		PASS
GFSK	HCH	1.028	0.96296		PASS


99% Bandwidth Plot

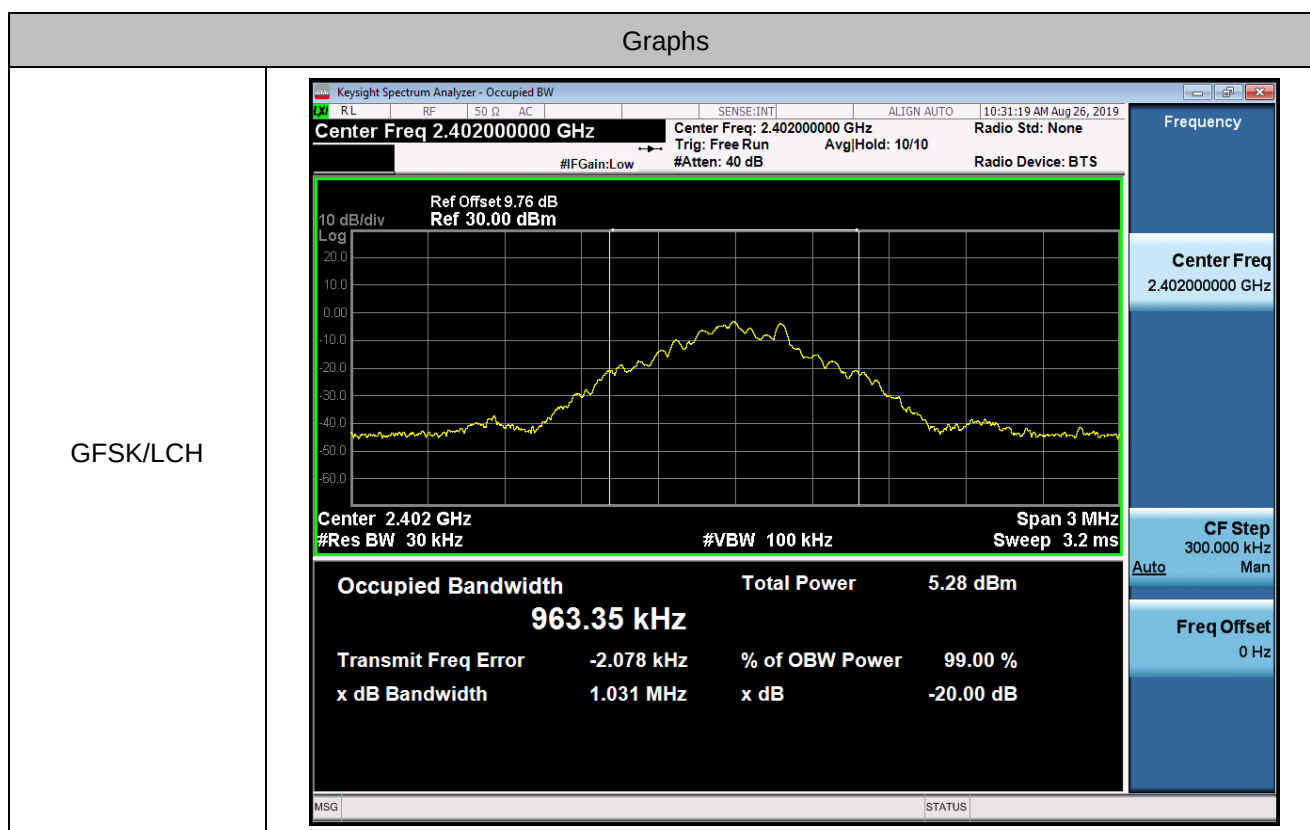


GFSK/MCH

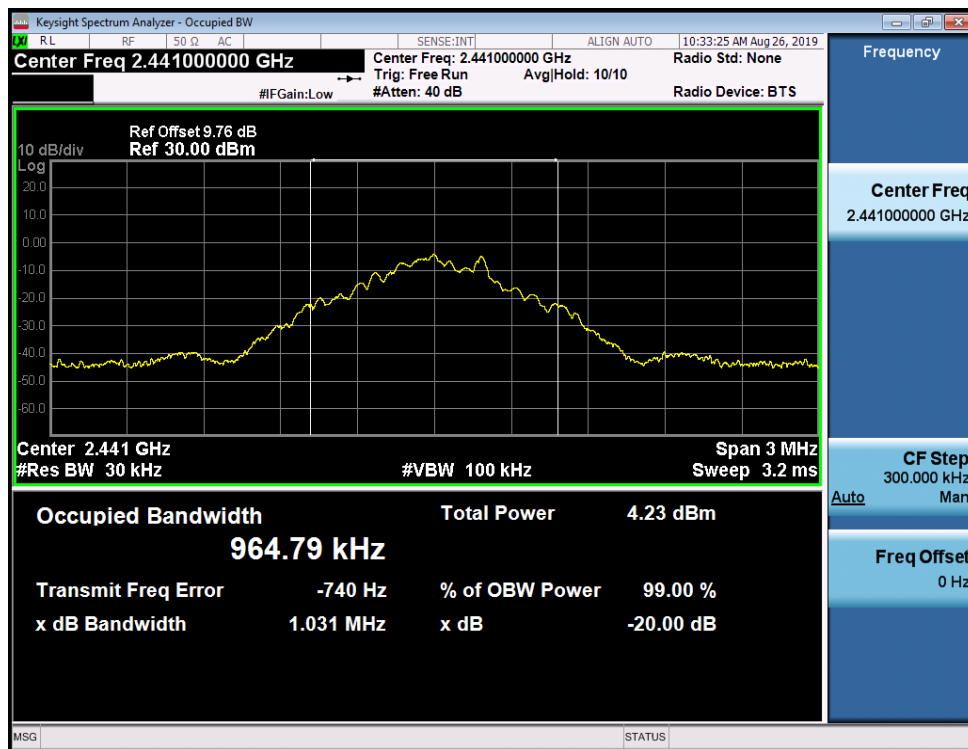


GFSK/HCH

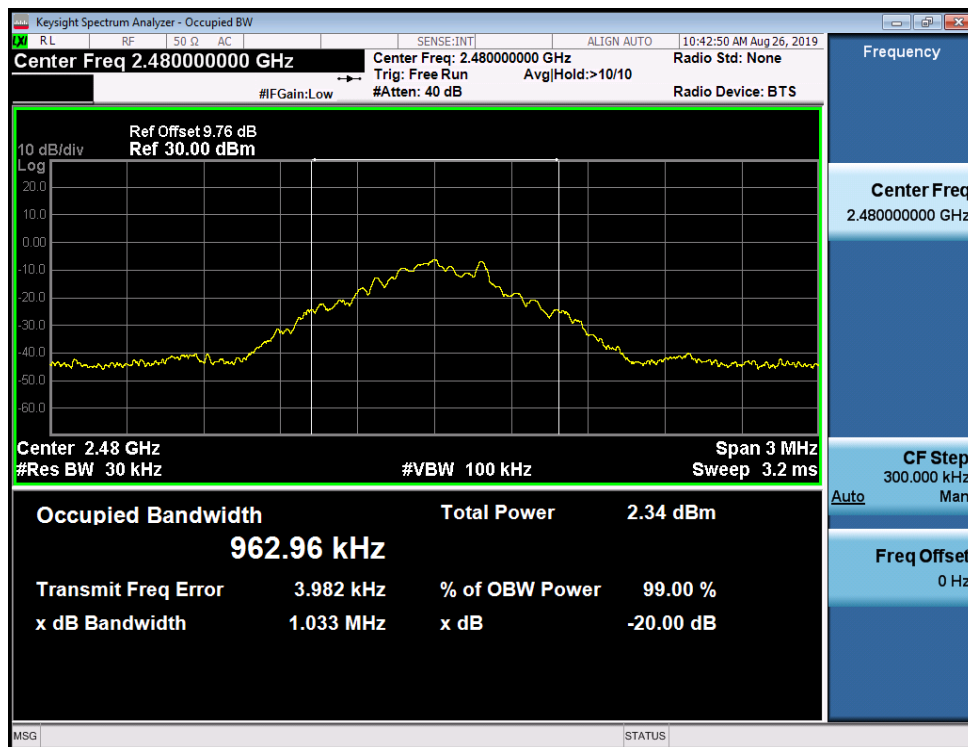

20dB Bandwidth Plot

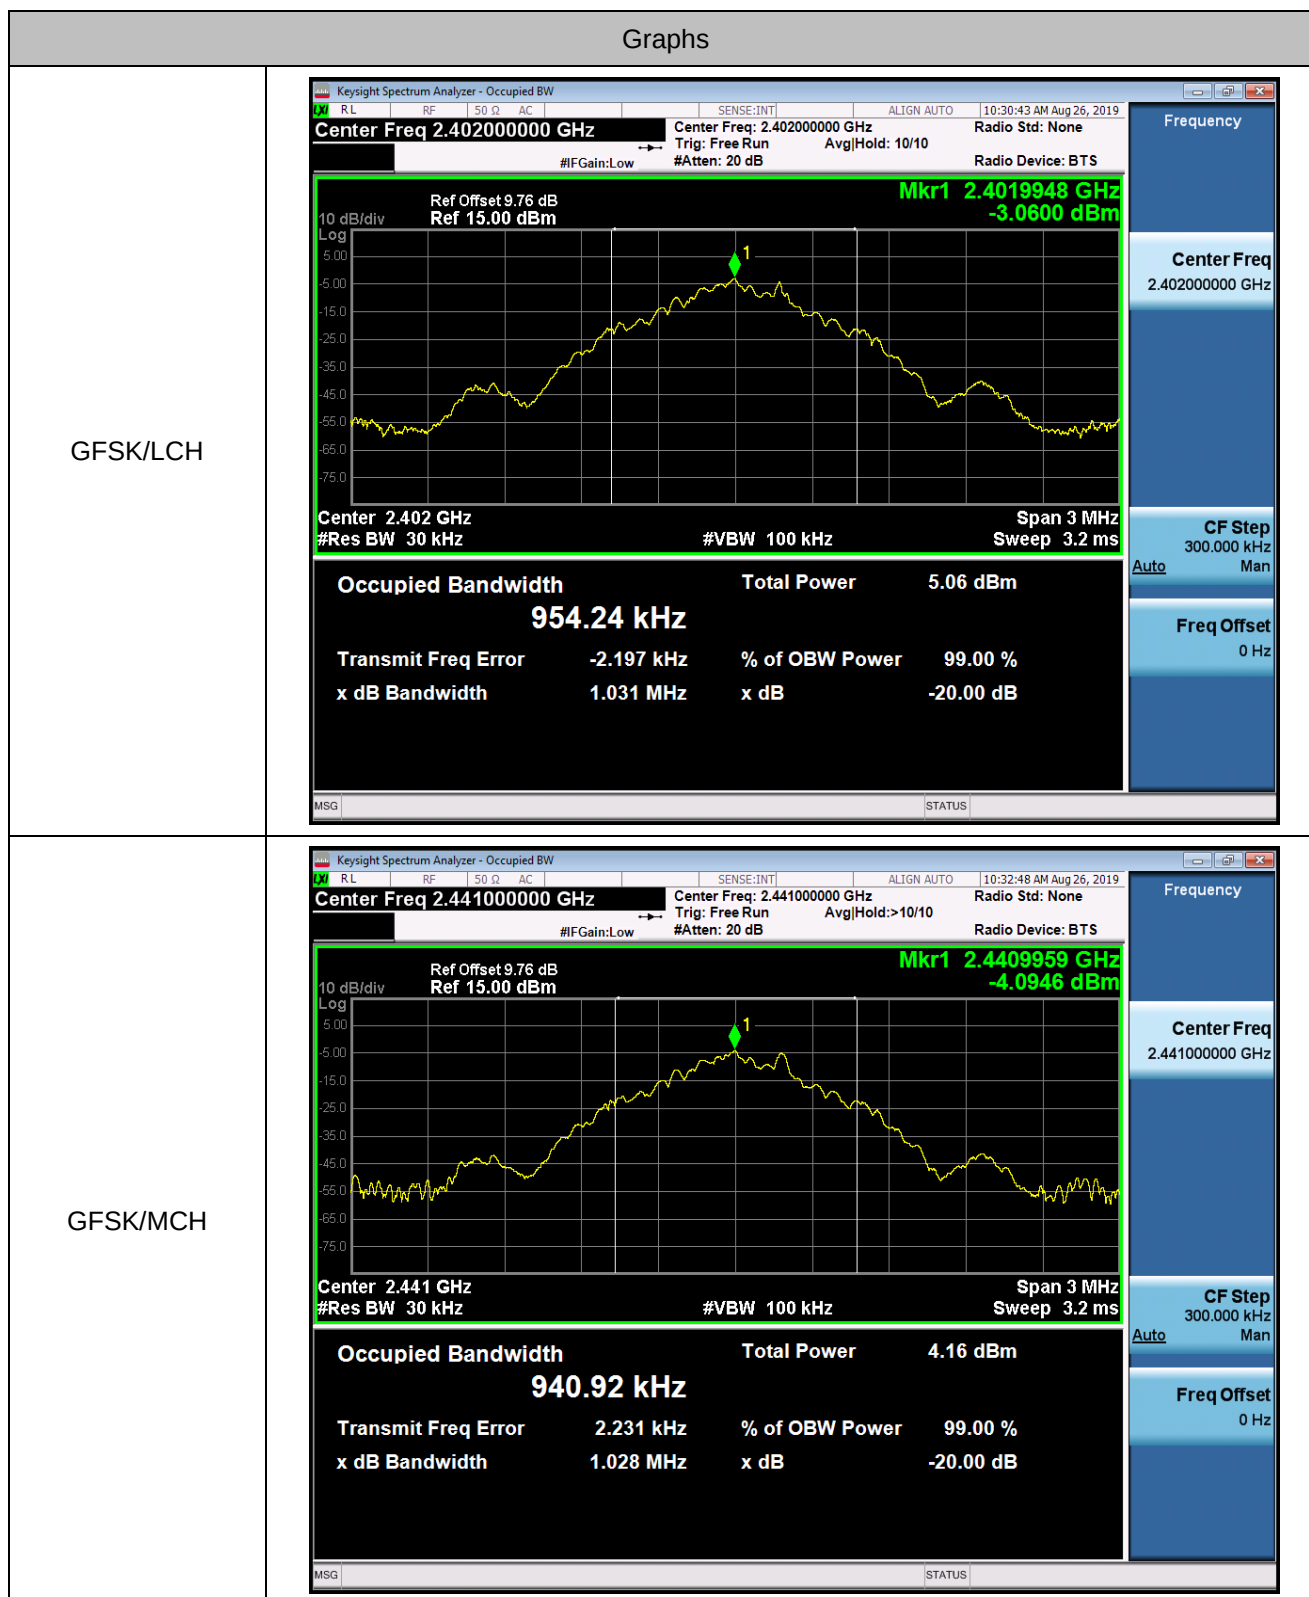

GFSK/HCH

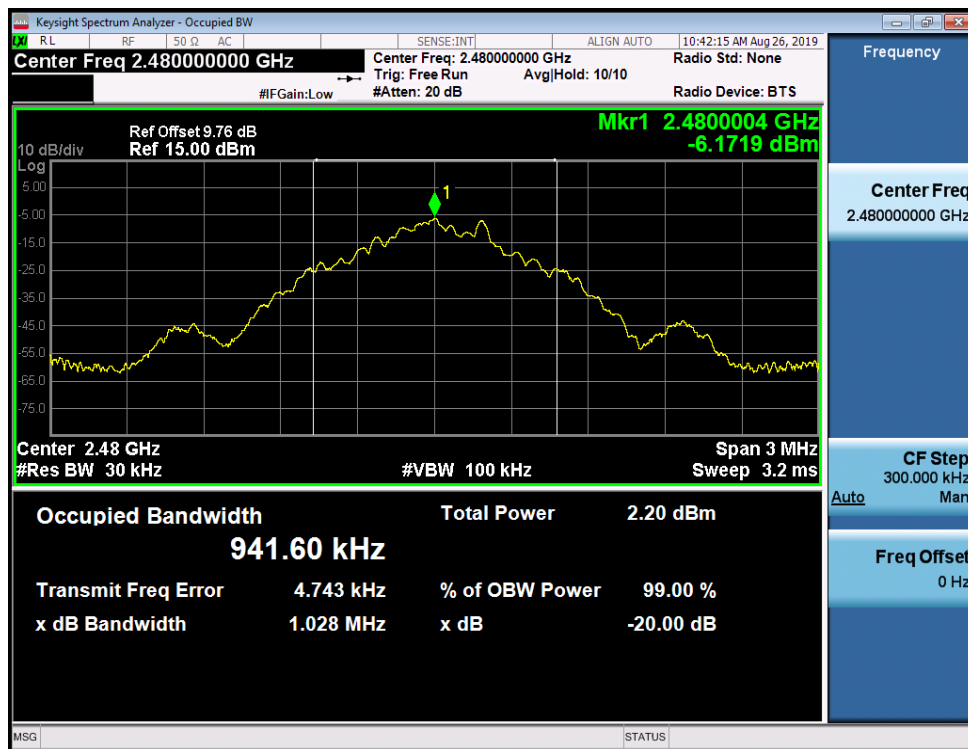

4.2 Hopping Channel Separation Measurement

4.2.1 Limit of Hopping Channel Separation

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


4.2.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


4.2.3 Test Result of Hopping Channel Separation

Test Mode :		Transmitting	Temperature :	24~26°C
Test Engineer :		Victorique Gao	Relative Humidity :	50~53%
Mode	Channel.	Carrier Frequency Separation [MHz]		Verdict
GFSK_DH5	LCH	1.173		PASS
GFSK_DH5	MCH	1.000		PASS
GFSK_DH5	HCH	1.345		PASS

Hopping Frequency Separation Plot

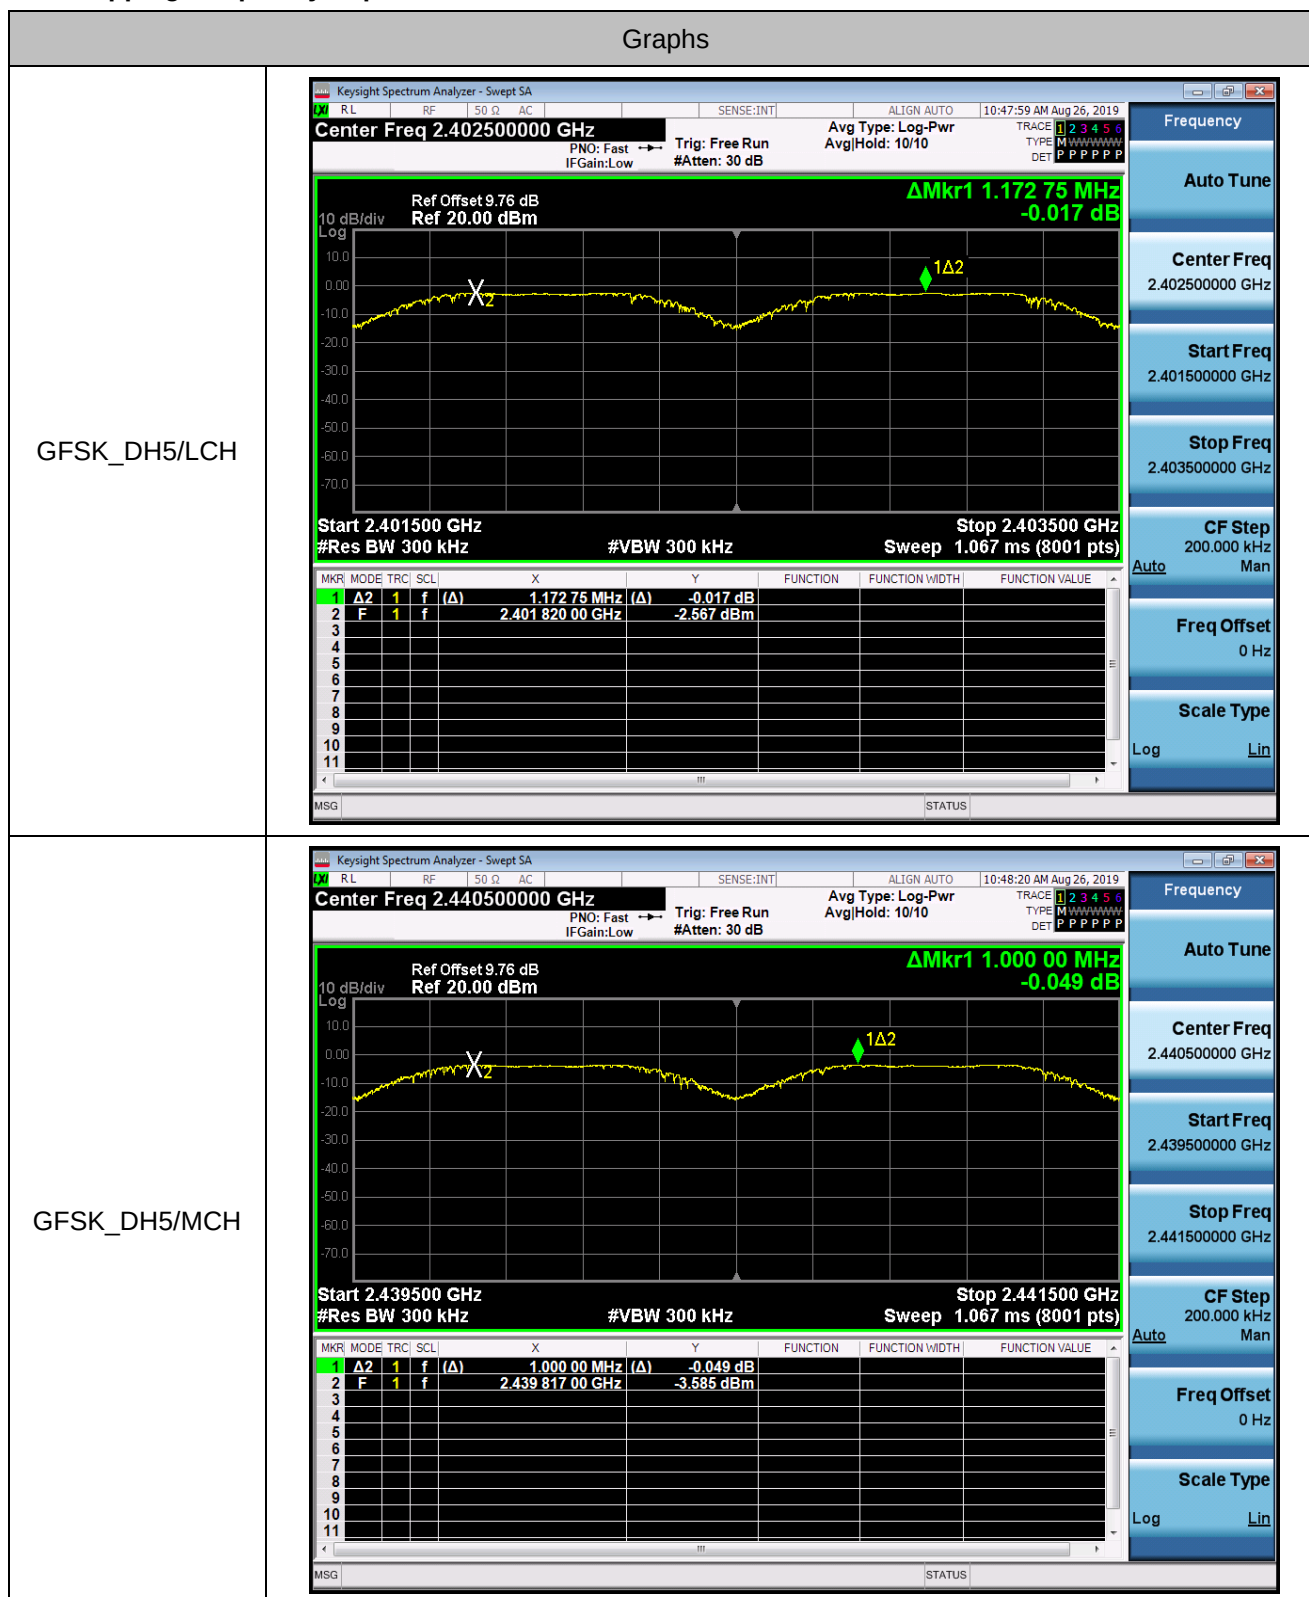

GFSK_DH5/HCH

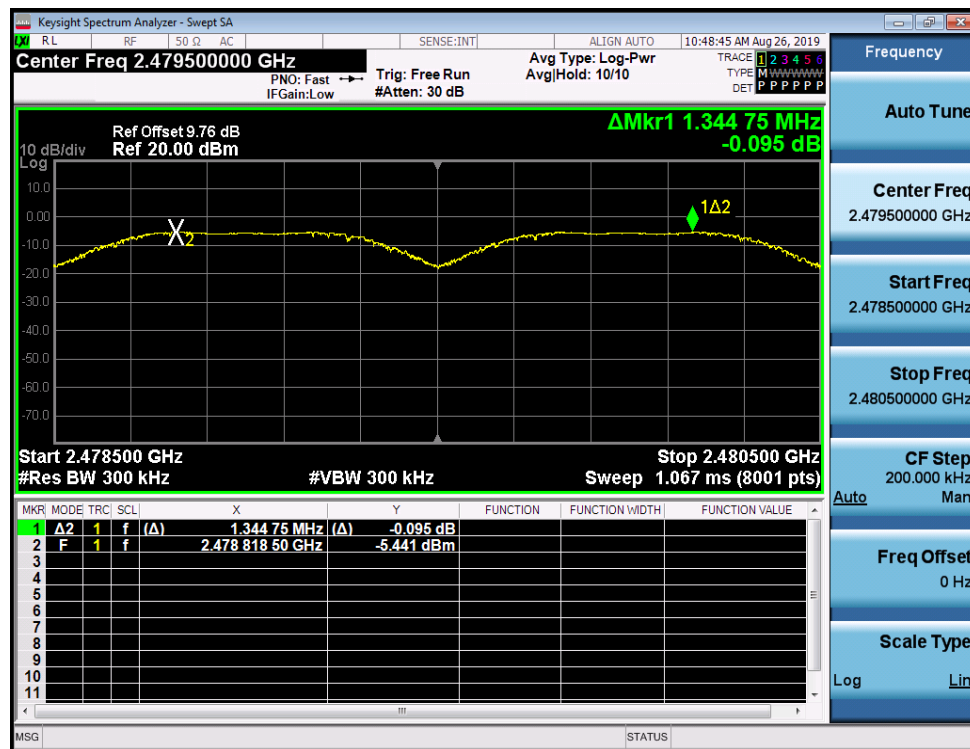

4.3 Number of Channel Measurement

4.3.1 Limits of Number of Hopping Frequency

FCC§15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

4.3.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


4.3.3 Test Result of Number of Hopping Frequency

Test Mode :		Transmitting		Temperature :	24~26℃
Test Engineer :		Victorique Gao		Relative Humidity :	50~53%
Mode	Channel.	Number of Hopping Channel			Verdict
GFSK	Hop	79			PASS

Number of Hopping Channels

Graphs

GFSK/Hop

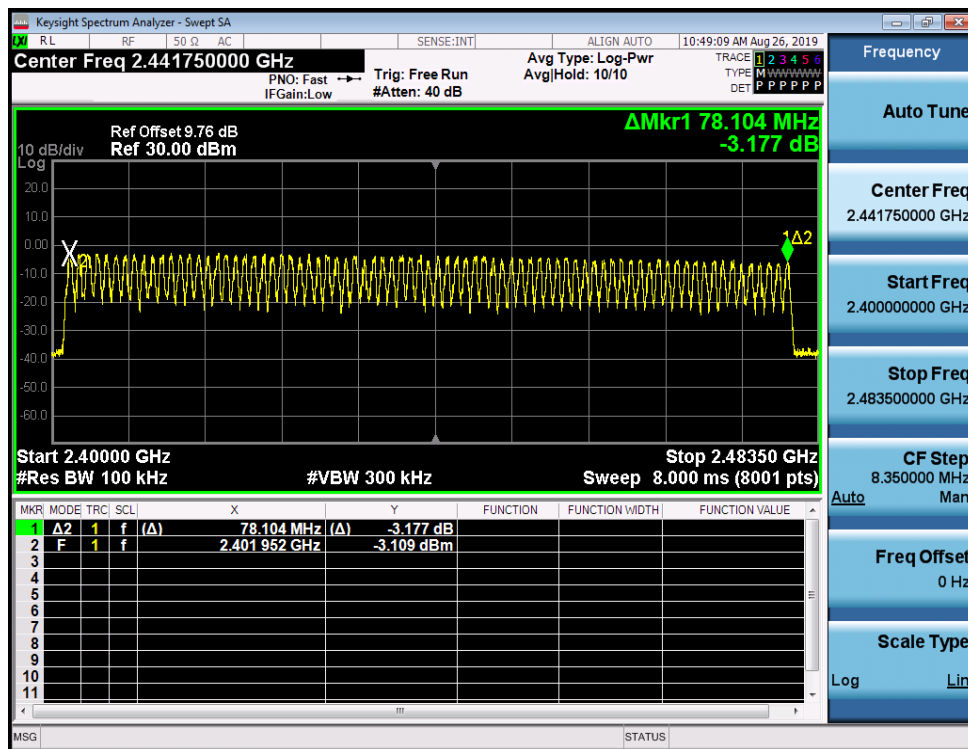

4.4 Average Time of Occupancy Measurement

4.4.1 Limit of Average Time of Occupancy

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.
4. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2441MHz as blow:

DH1 time slot= Burst Width (ms)*(1600/ (2*79))*31.6

DH3 time slot= Burst Width (ms)*(1600/ (4*79))*31.6

DH5 time slot= Burst Width (ms)*(1600/ (6*79))*31.6


4.4.3 Test Result of Dwell Time

Test Mode :		Transmitting		Temperature :		24~26°C
Test Engineer :		Victorique Gao		Relative Humidity :		50~53%
Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Verdict
GFSK	DH1	LCH	0.43	320	0.138	PASS
GFSK	DH1	MCH	0.43	320	0.138	PASS
GFSK	DH1	HCH	0.43	320	0.138	PASS
GFSK	DH3	LCH	1.67	160	0.267	PASS
GFSK	DH3	MCH	1.67	160	0.267	PASS
GFSK	DH3	HCH	1.67	160	0.267	PASS
GFSK	DH5	LCH	2.91	106.67	0.31	PASS
GFSK	DH5	MCH	2.91	106.67	0.31	PASS
GFSK	DH5	HCH	2.91	106.67	0.31	PASS


The Average Time of Occupancy Plot

Graphs


GFSK_DH1/LCH

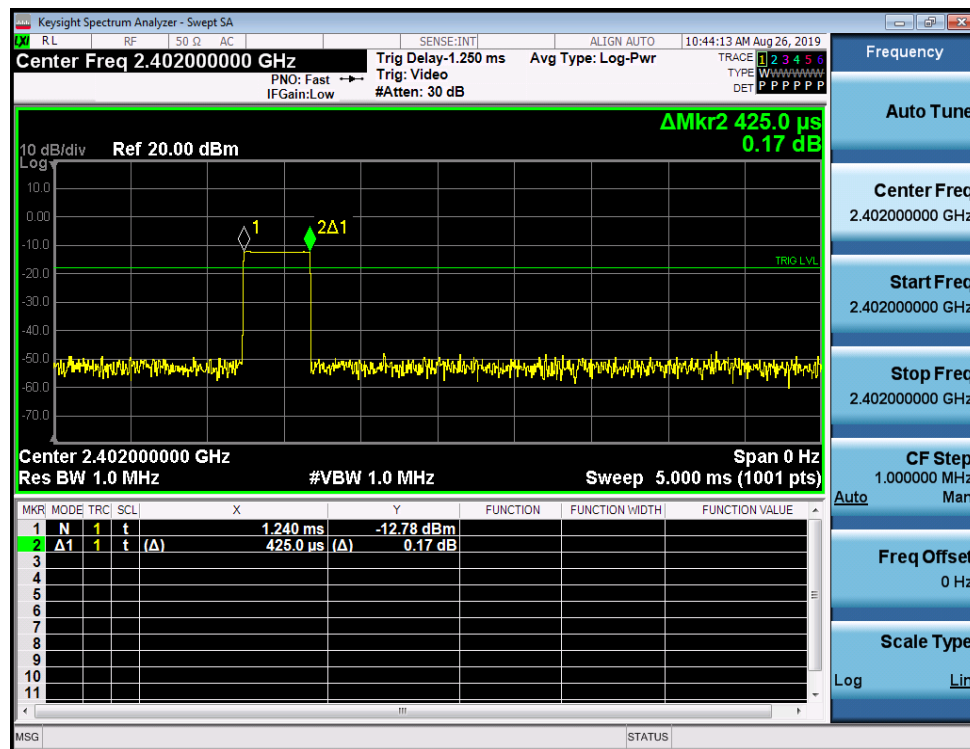


GFSK_DH1/MCH

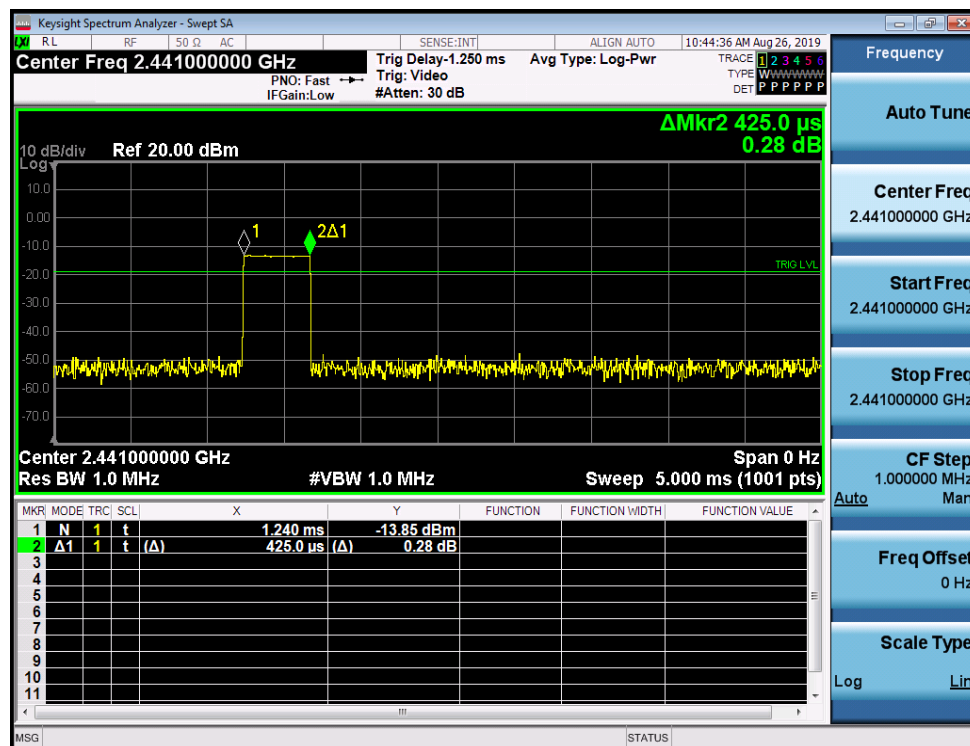


GFSK_DH1/HCH

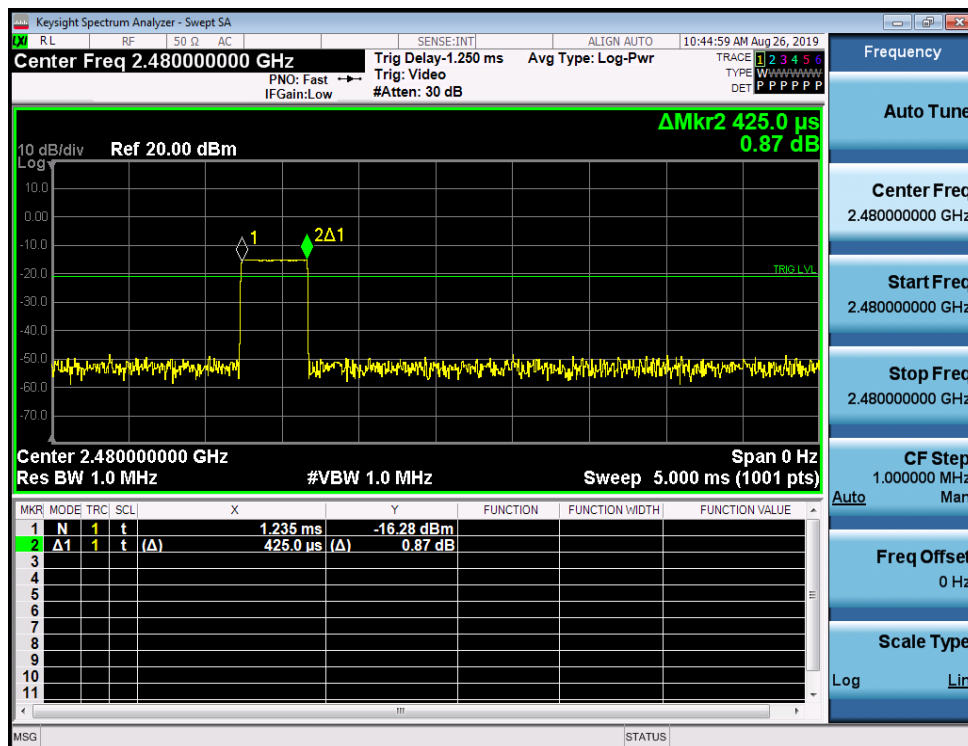


GFSK_DH3/LCH

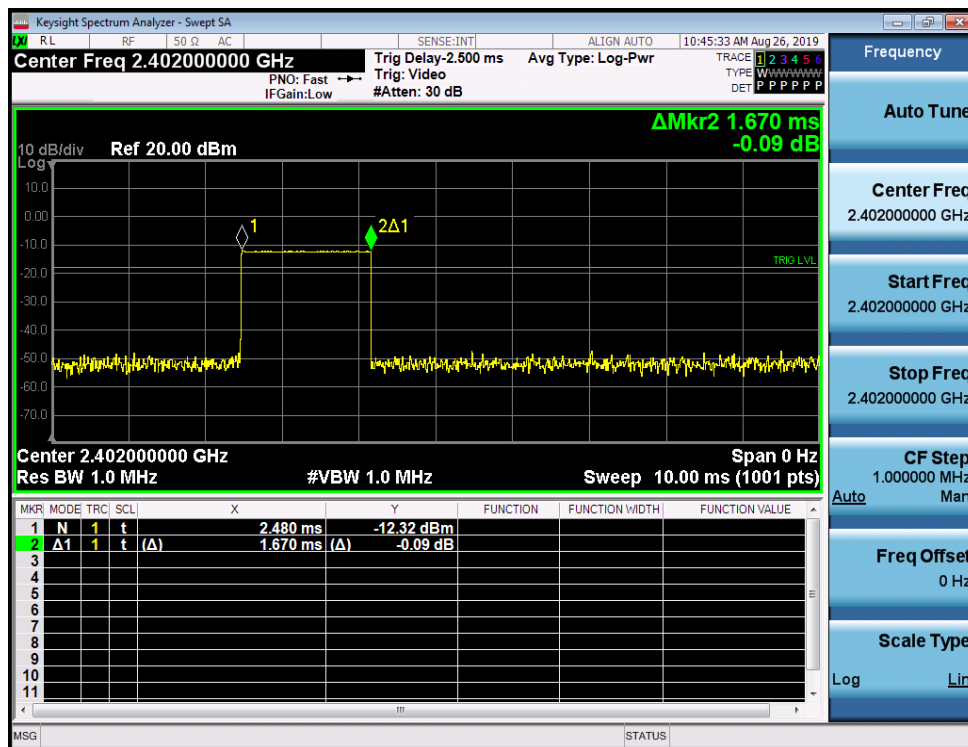


GFSK_DH3/MCH

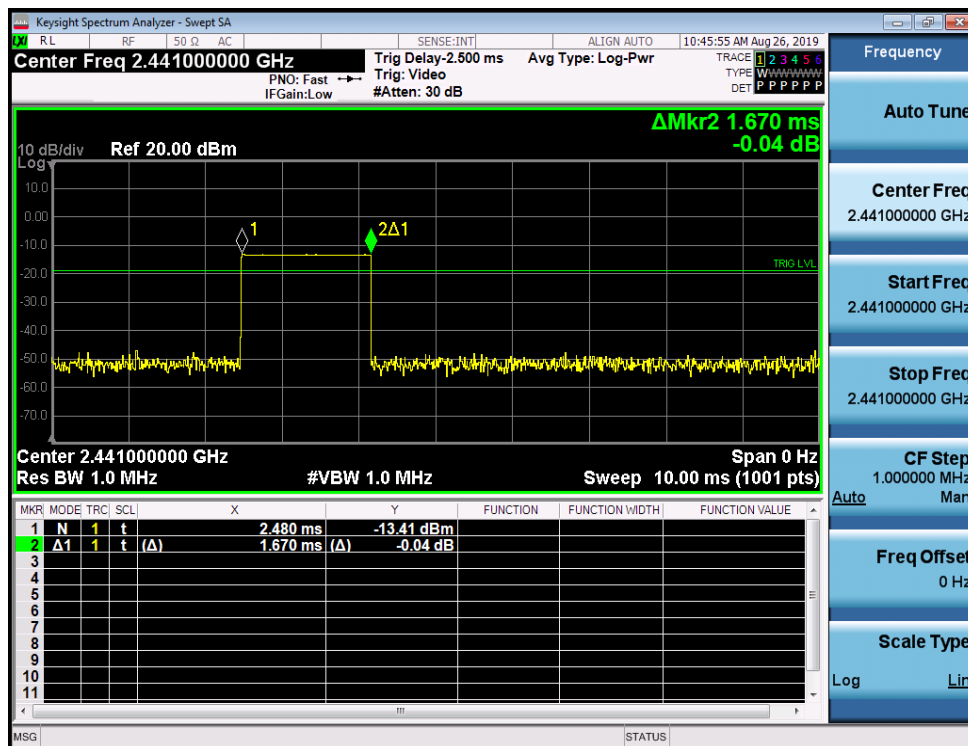


GFSK_DH3/HCH

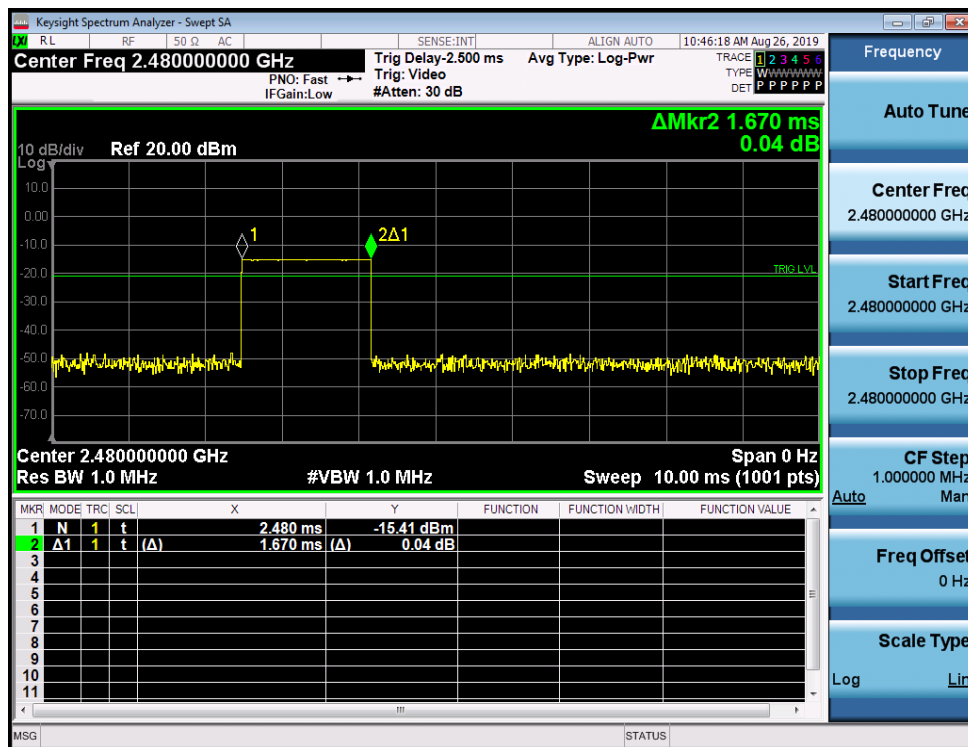


GFSK_DH5/LCH

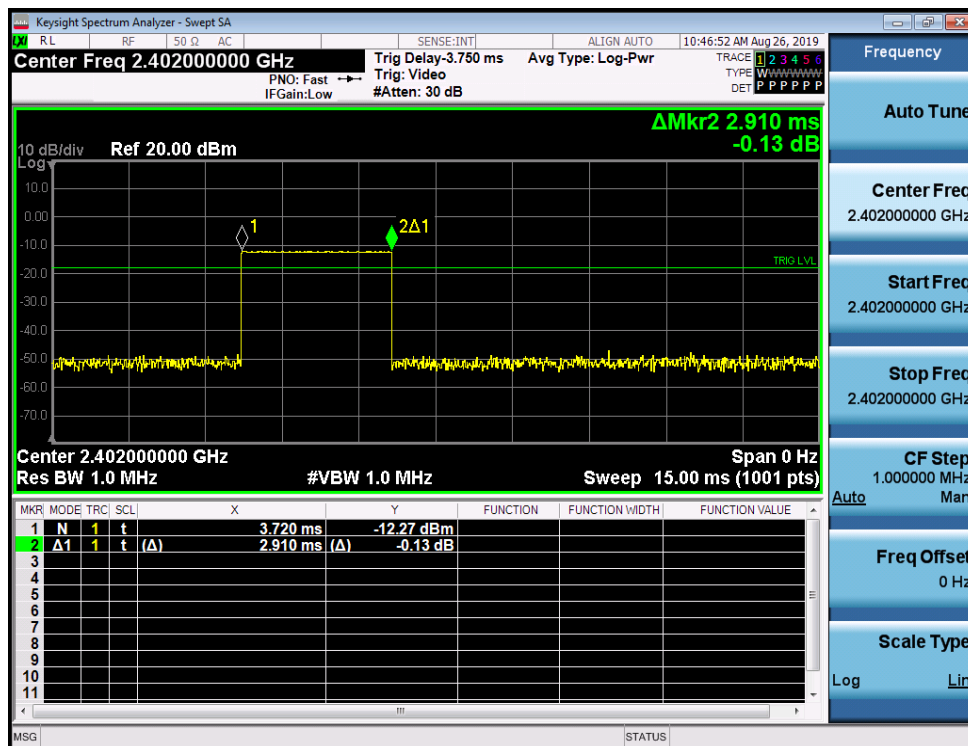

GFSK_DH5/MCH

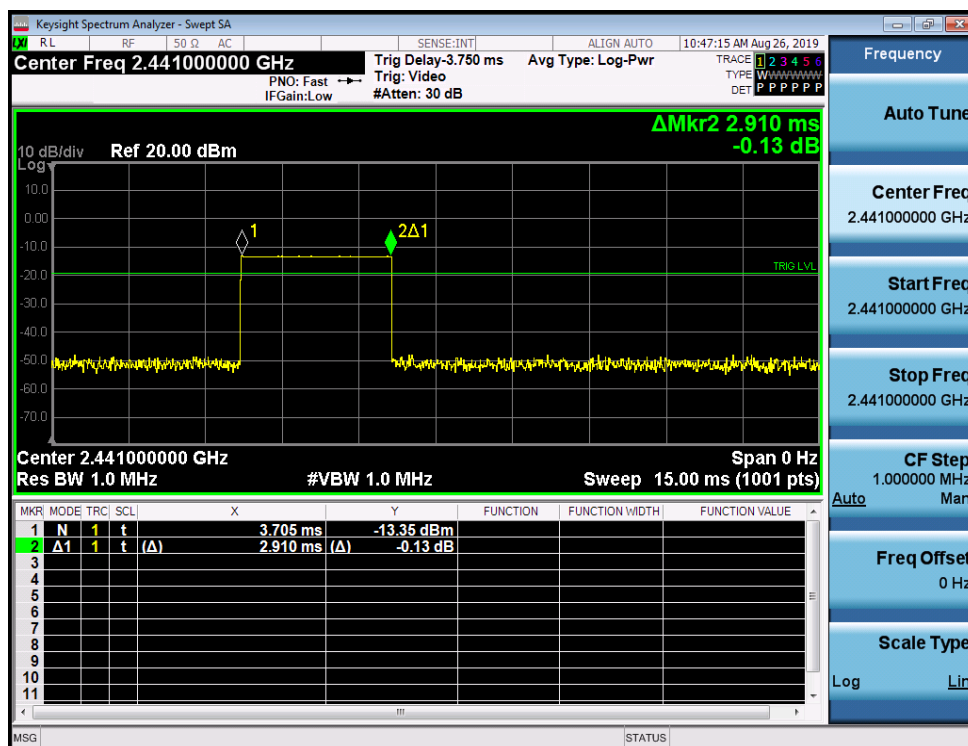

GFSK_DH5/HCH

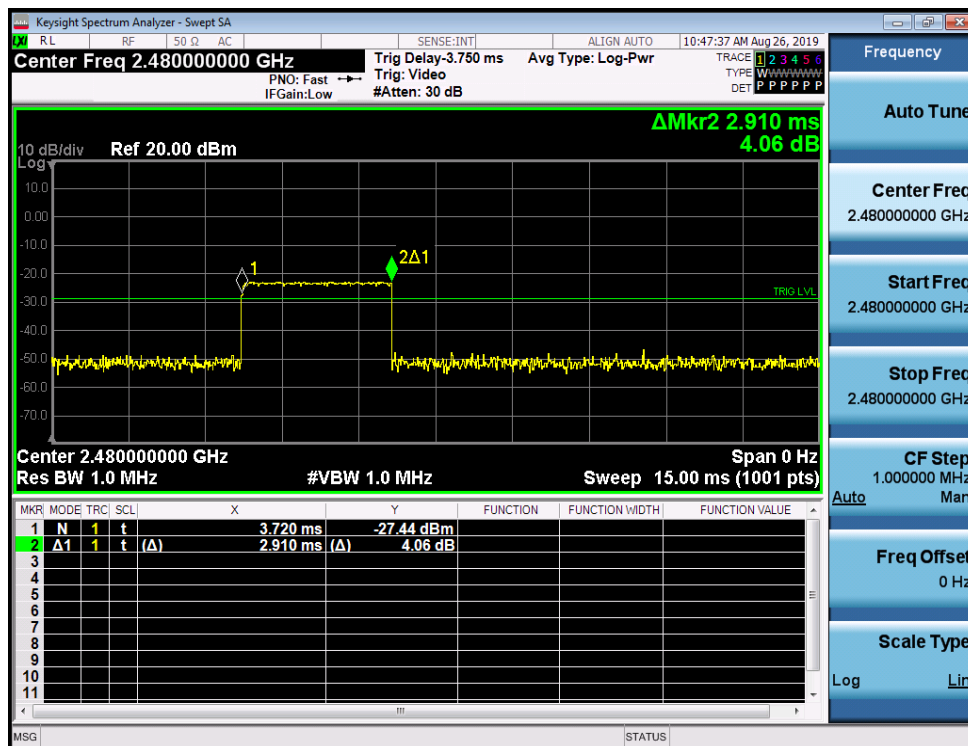

4.5 Peak Output Power Measurement

4.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


4.5.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


4.5.3 Test Result of Peak Output Power

Test Mode :		Transmitting	Temperature :	24~26°C
Test Engineer :		Victorique Gao	Relative Humidity :	50~53%
Mode	Channel.	Maximum Peak Output Power [dBm]		Verdict
GFSK	LCH	-2.610		PASS
GFSK	MCH	-3.494		PASS
GFSK	HCH	-5.620		PASS

Peak Output Power Polt

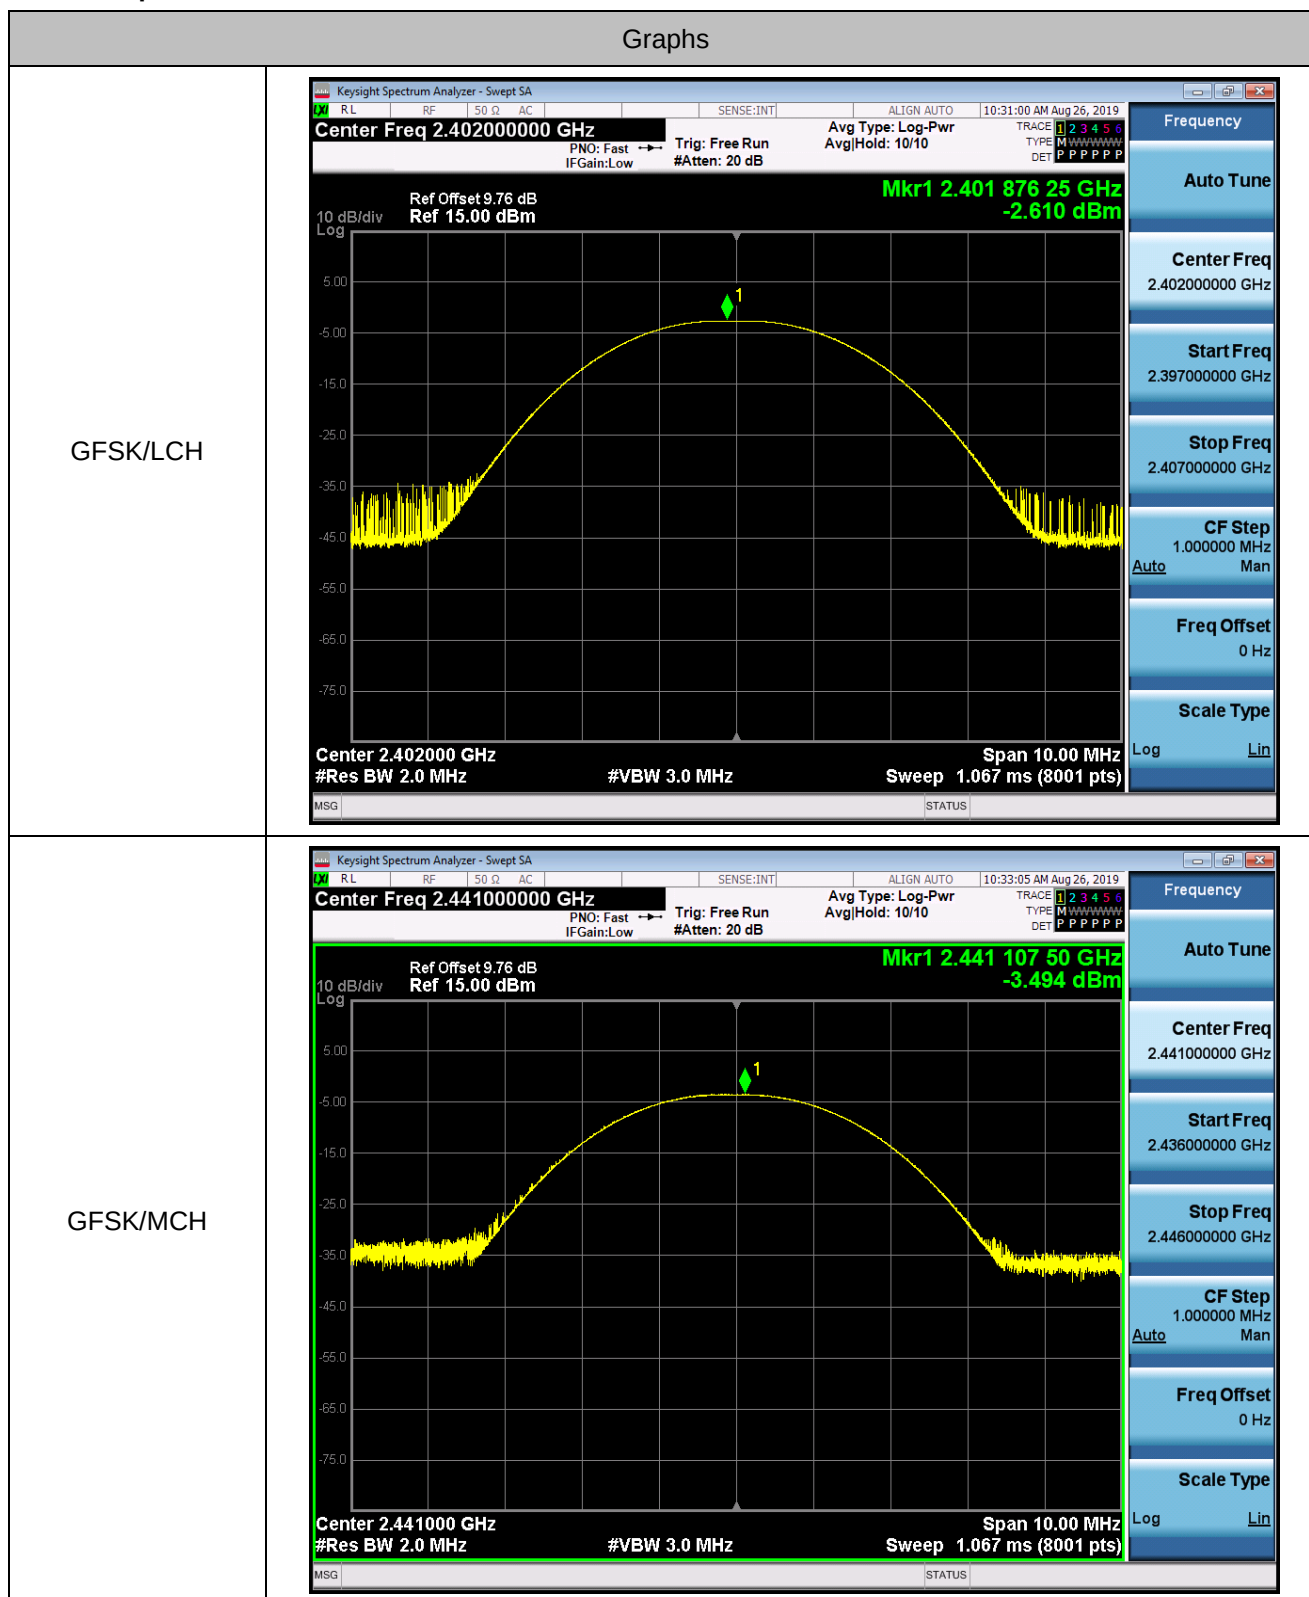

GFSK/HCH

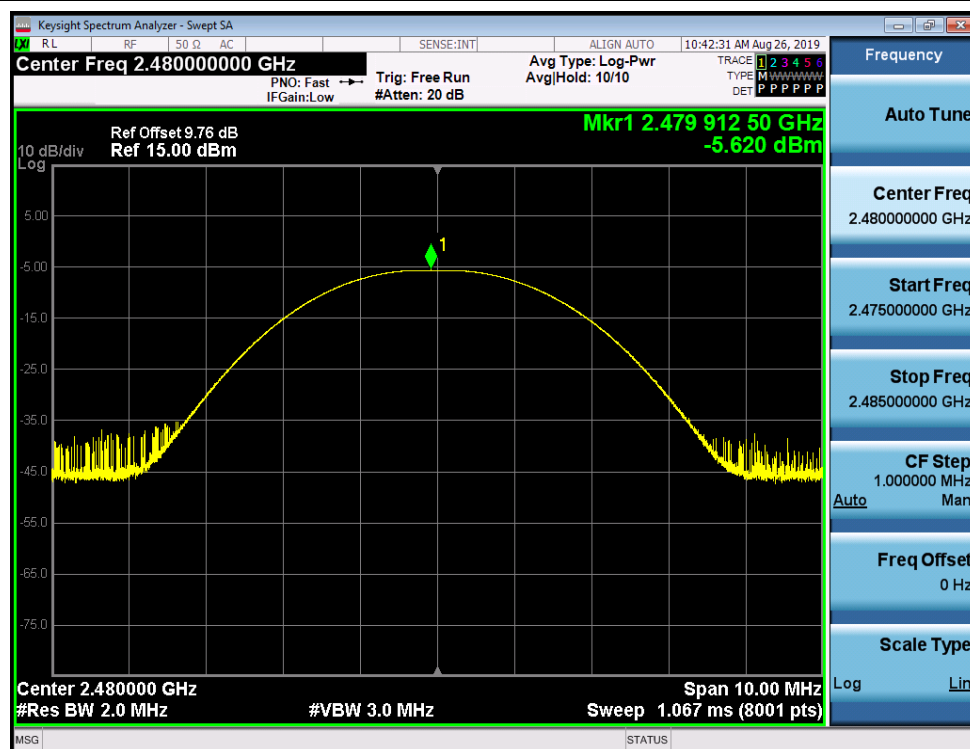

4.6 Conducted Band Edges Measurement

4.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


4.6.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 1~3.



4.6.3 Test Result of Conducted Band Edges

Test Mode :		Transmitting		Temperature :		24~26°C	
Test Engineer :		Victorique Gao		Relative Humidity :		50~53%	
Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK_DH5	LCH	2402	-2.714	Off	-55.083	-22.71	PASS
			-3.222	On	-60.476	-23.22	PASS
GFSK_DH5	HCH	2480	-5.738	Off	-56.314	-25.74	PASS
			-5.660	On	-62.558	-25.66	PASS


Conducted Band Edge Polt

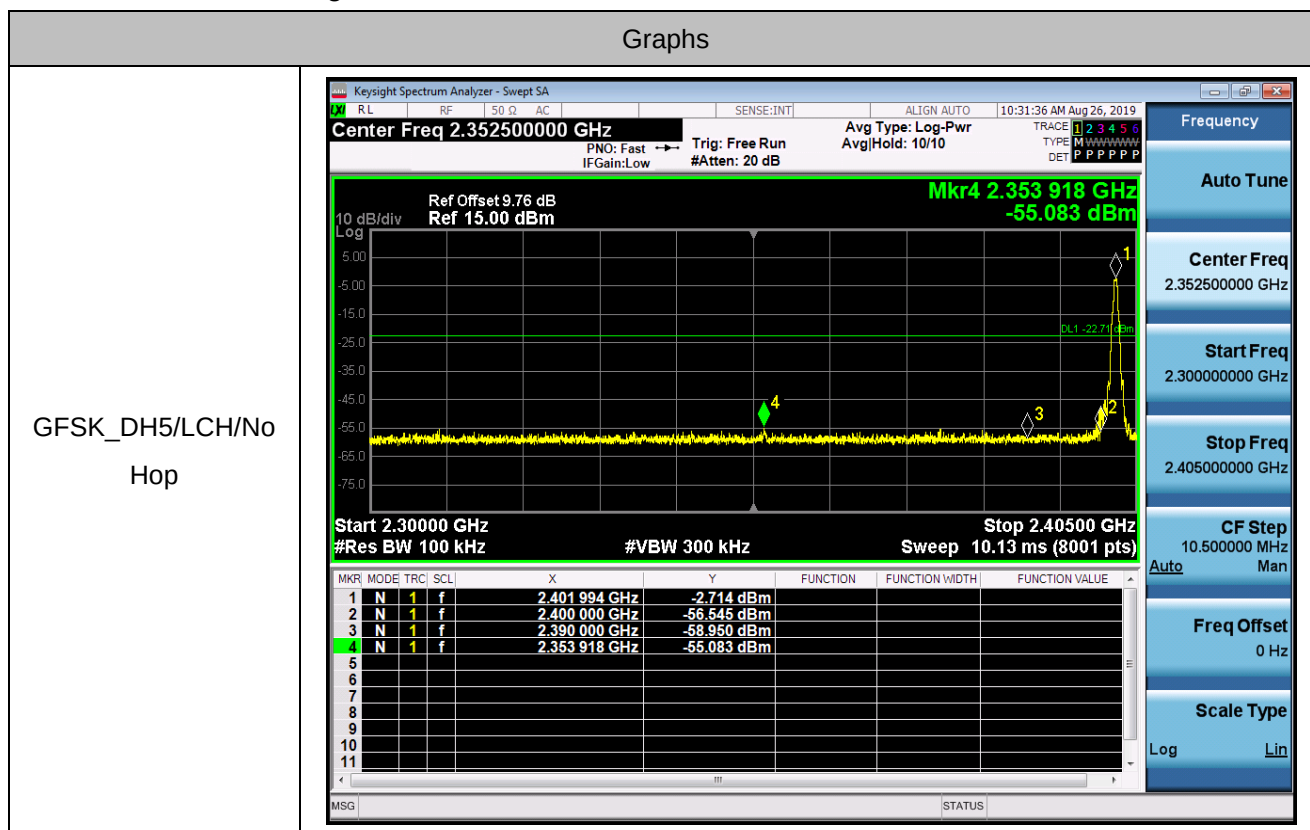

GFSK_DH5/LCH/Hop

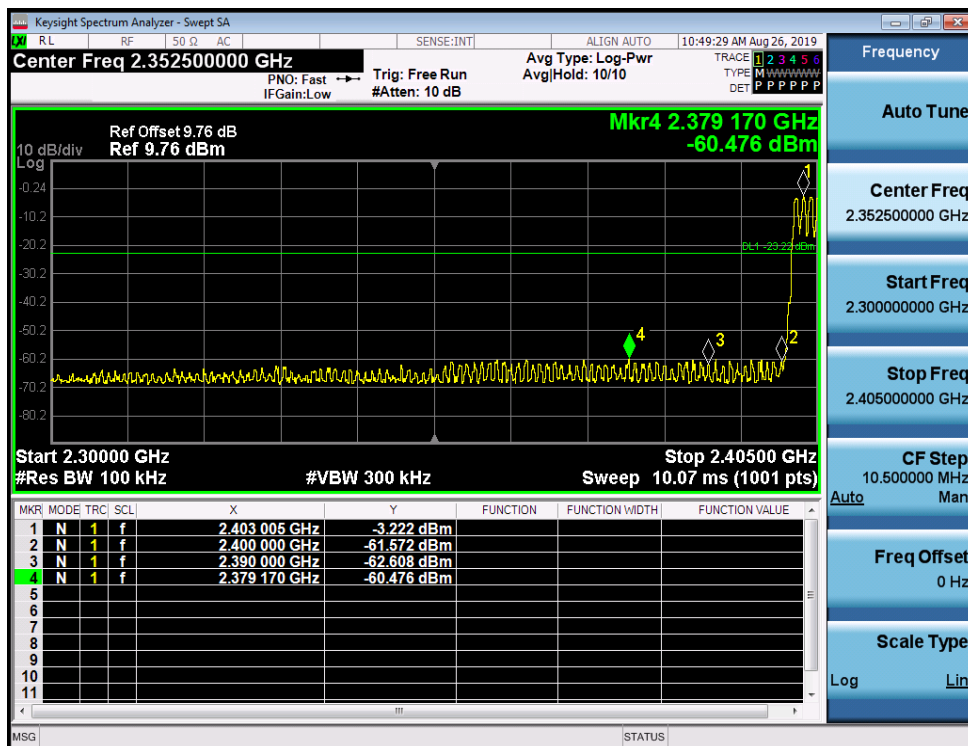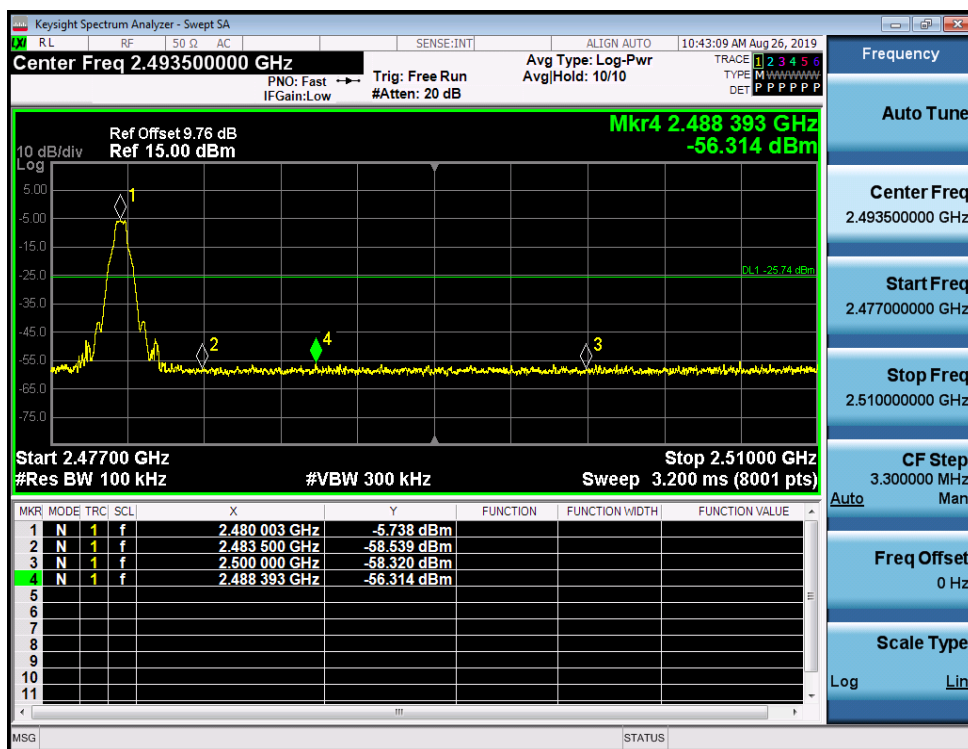
GFSK_DH5/HCH/No
Hop


GFSK_DH5/HCH/Hop

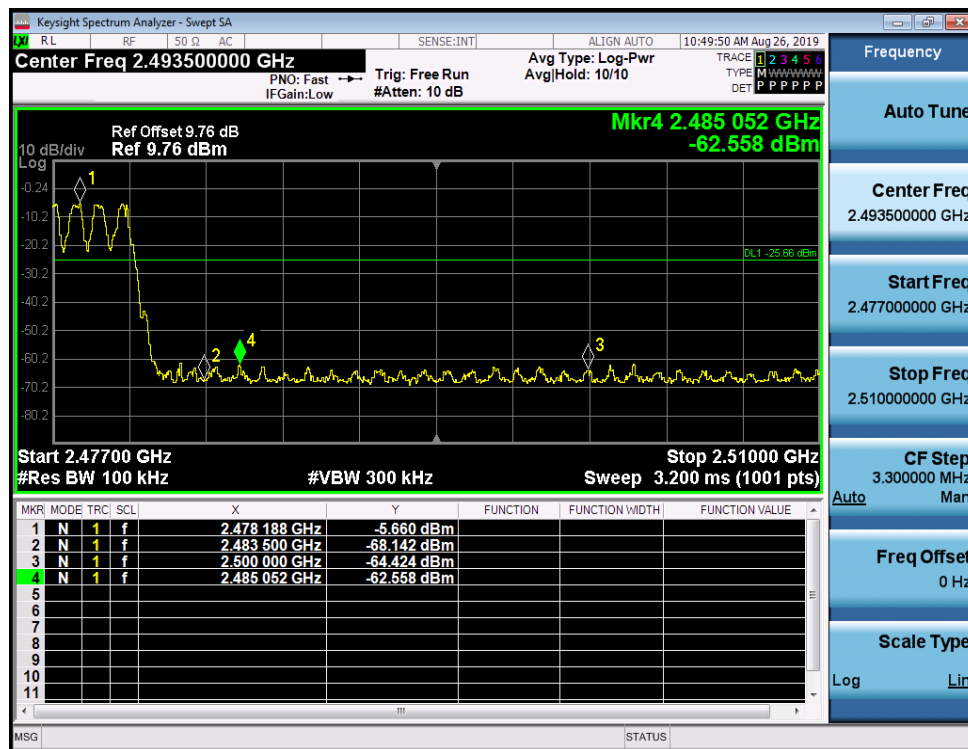

4.7 Conducted Spurious Emission Measurement

4.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

4.7.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


4.7.3 Test Result of Conducted Spurious Emission

Test Mode :		Transmitting		Temperature :	24~26°C
Test Engineer :		Victorique Gao		Relative Humidity :	50~53%
Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict	
GFSK	LCH	-2.688	<Limit	PASS	
GFSK	MCH	-3.722	<Limit	PASS	
GFSK	HCH	-5.741	<Limit	PASS	

Conducted Spurious Emission Polt

GFSK_DH5_LCH_Graphs

Pref

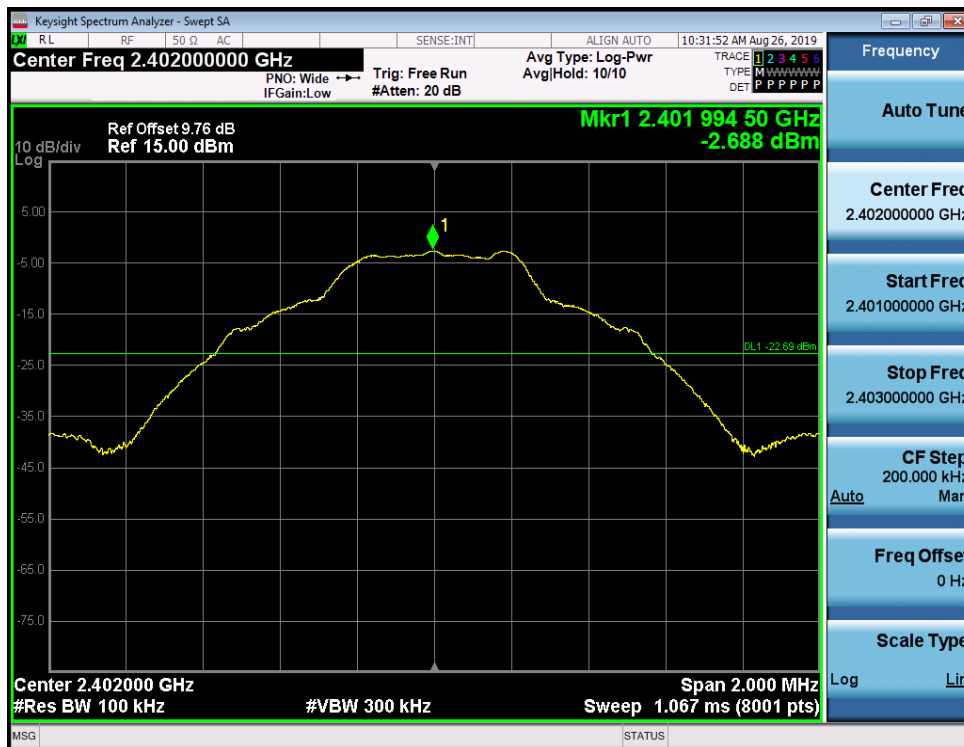


Puw



GFSK_DH5_MCH_Graphs

Pref

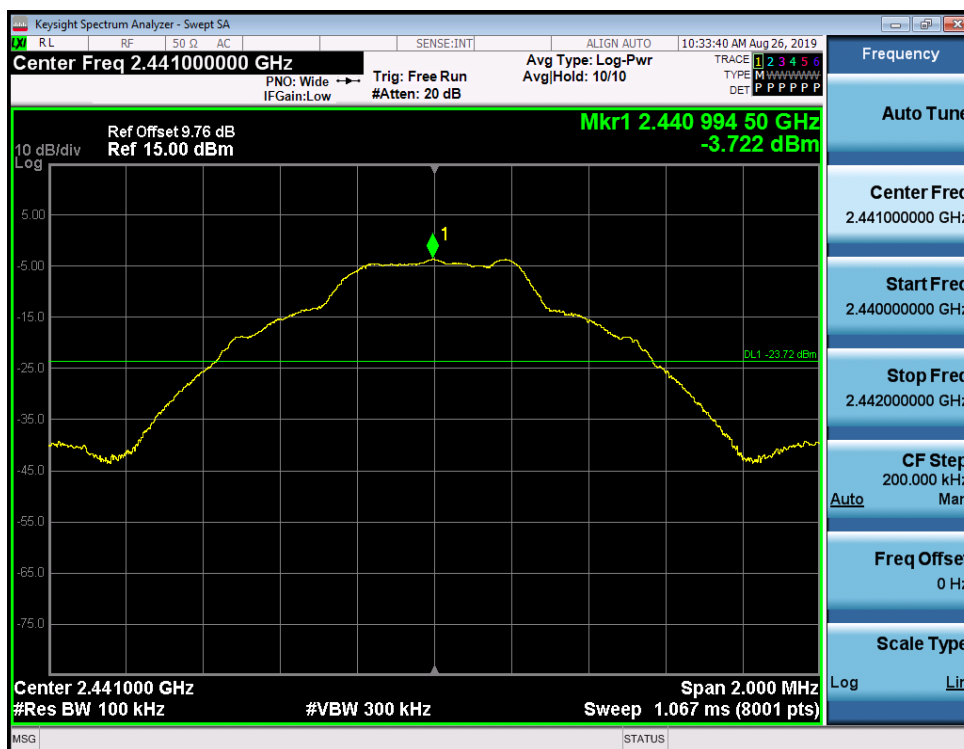


Puw



GFSK_DH5_HCH_Graphs

Pref

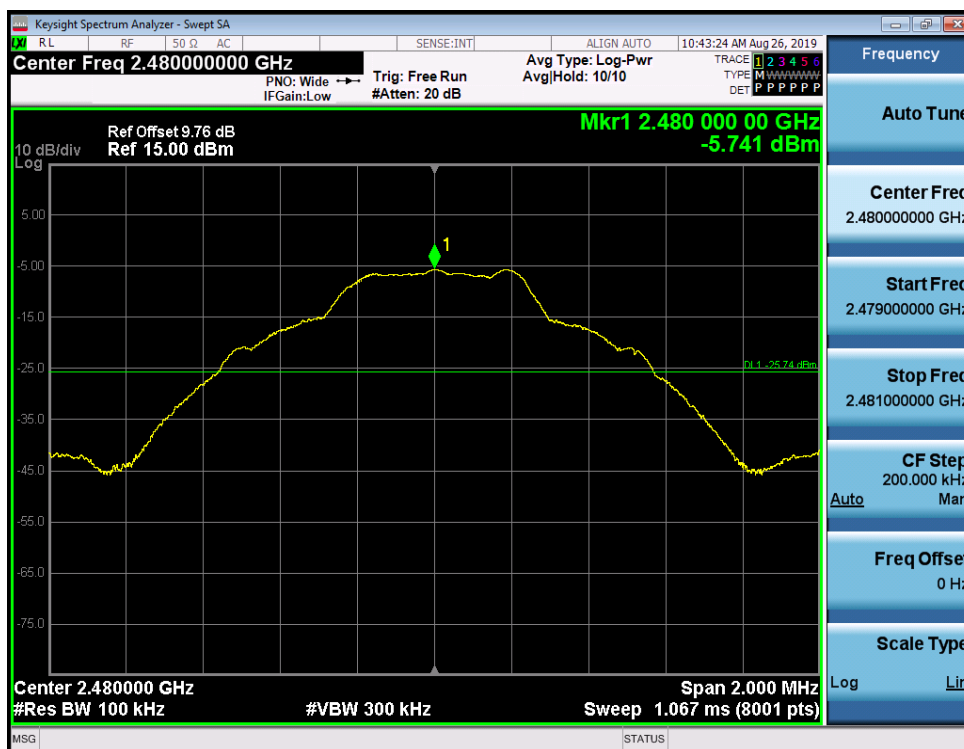

Puw



4.8 Radiated Band Edges and Spurious Emission Measurement


4.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

4.8.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The measurement distance is 3 meter.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement:
 VBW = 10 Hz, when duty cycle is no less than 98 percent.
 VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

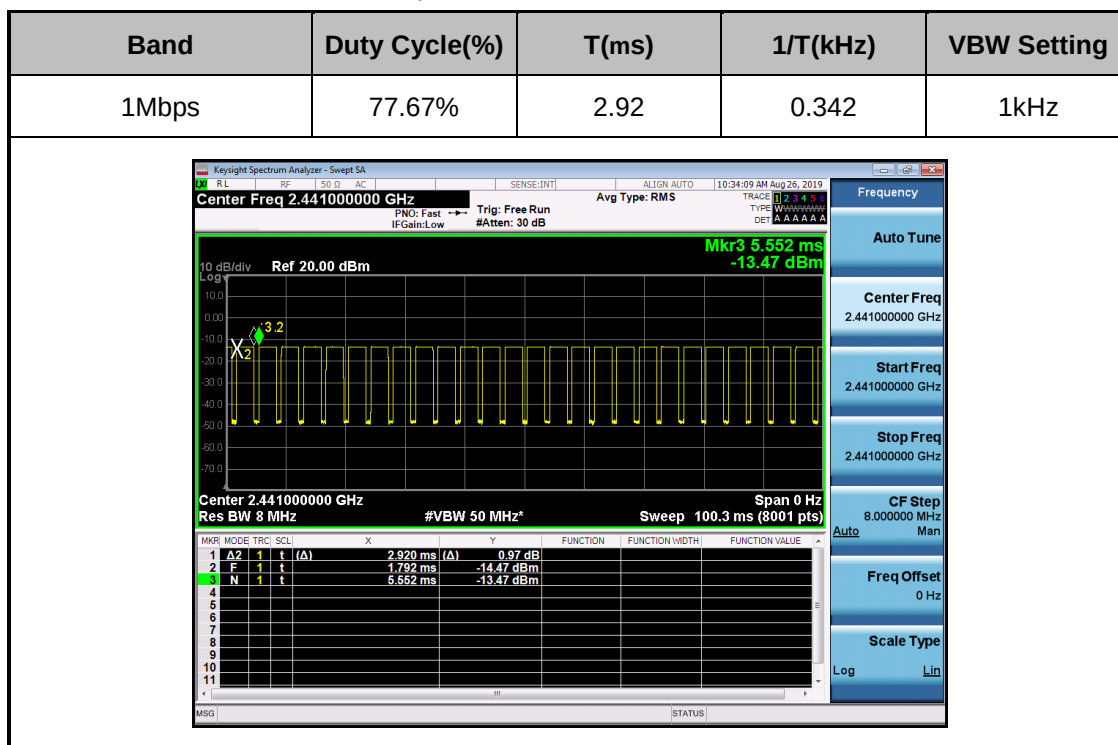


6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


4.8.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

4.8.4 Test Result of Radiated Spurious at Band Edges

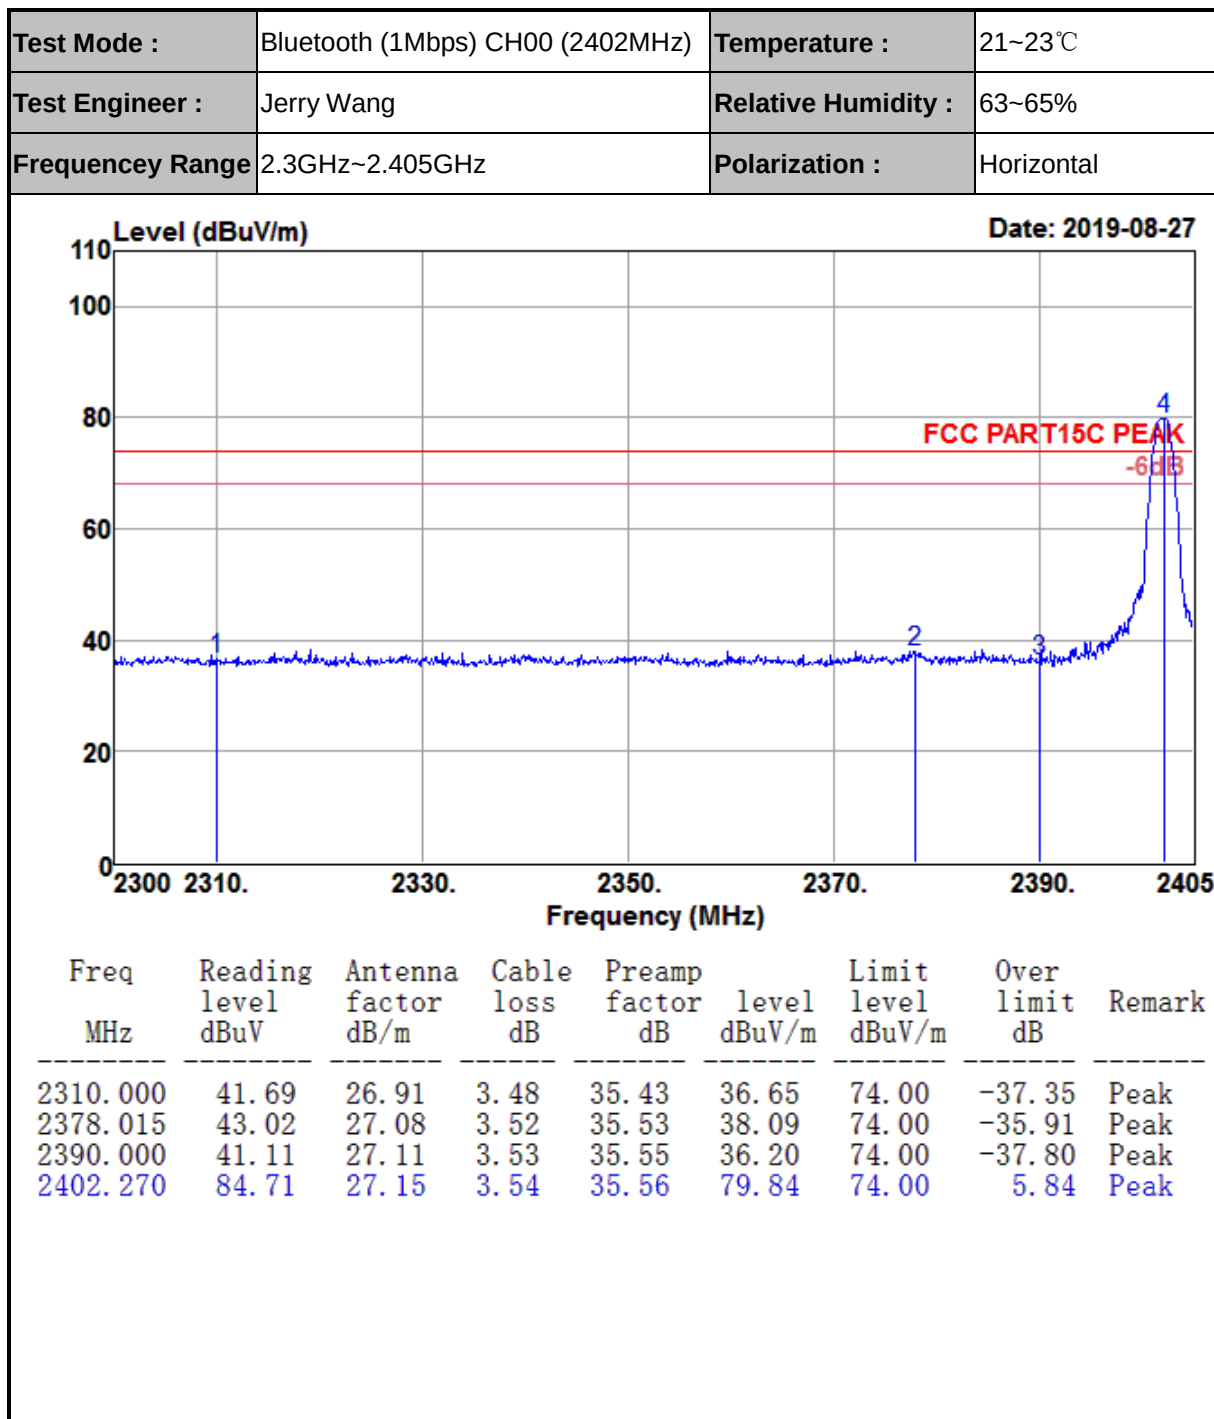


Test Mode :	Bluetooth (1Mbps) CH00 (2402MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.405GHz	Polarization :	Horizontal

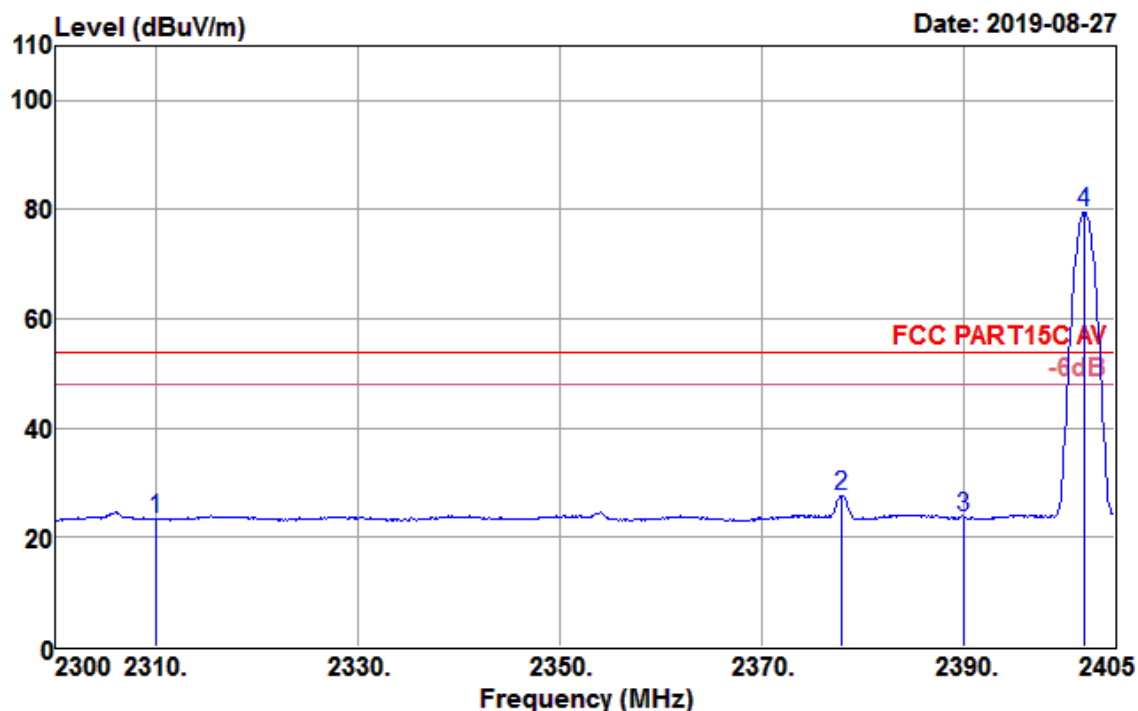


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	28.34	26.91	3.48	35.43	23.30	54.00	-30.70	Average
2378.015	32.68	27.08	3.52	35.53	27.75	54.00	-26.25	Average
2390.000	28.76	27.11	3.53	35.55	23.85	54.00	-30.15	Average
2401.955	84.41	27.15	3.54	35.56	79.54	54.00	25.54	Average

Test Mode :	Bluetooth (1Mbps) CH00 (2402MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.405GHz	Polarization :	Vertical

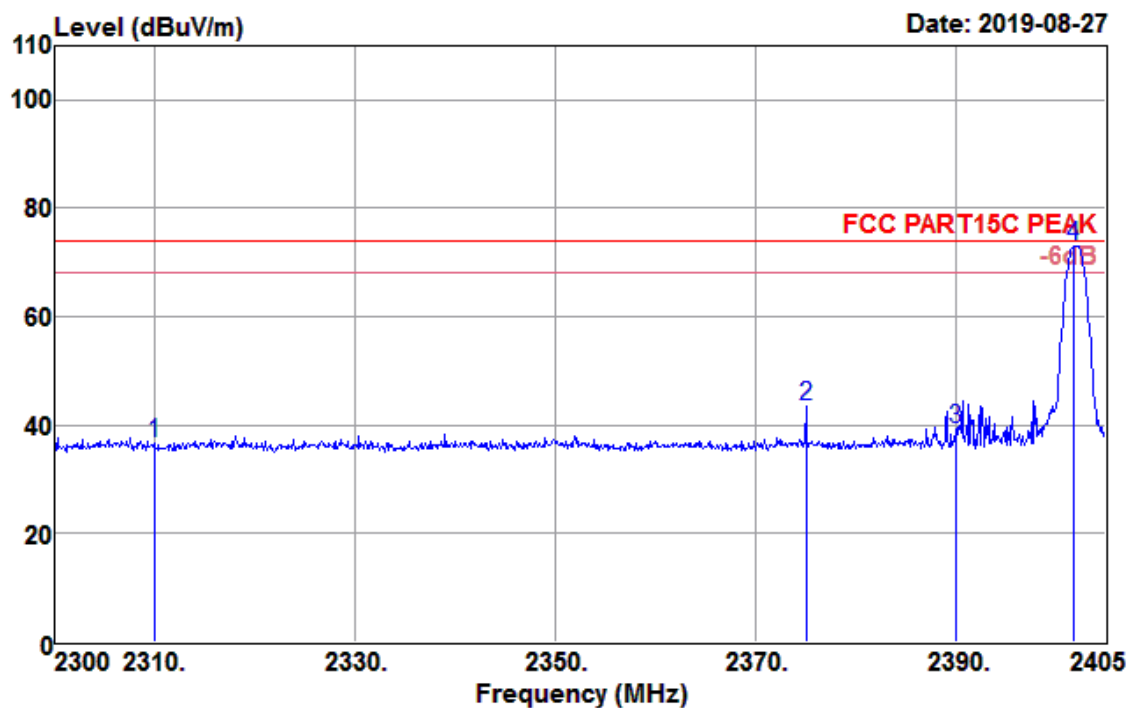


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	41.65	26.91	3.48	35.43	36.61	74.00	-37.39	Peak
2375.075	48.40	27.08	3.52	35.53	43.47	74.00	-30.53	Peak
2390.000	44.21	27.11	3.53	35.55	39.30	74.00	-34.70	Peak
2401.850	77.98	27.14	3.54	35.56	73.10	74.00	-0.90	Peak

Test Mode :	Bluetooth (1Mbps) CH00 (2402MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	2.3GHz~2.405GHz	Polarization :	Vertical

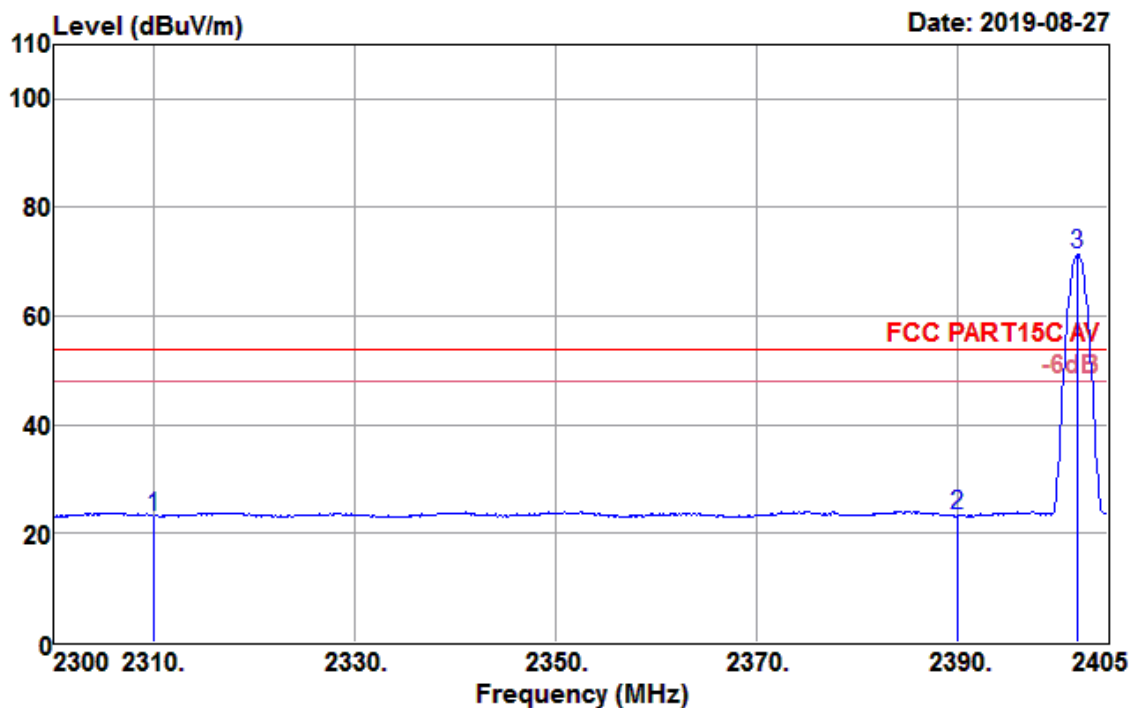


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	28.21	26.91	3.48	35.43	23.17	54.00	-30.83	Average
2390.000	28.13	27.11	3.53	35.55	23.22	54.00	-30.78	Average
2402.060	76.20	27.15	3.54	35.56	71.33	54.00	17.33	Average

Test Mode :	Bluetooth (1Mbps) CH78 (2480MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	2.477GHz~2.510GHz	Polarization :	Horizontal

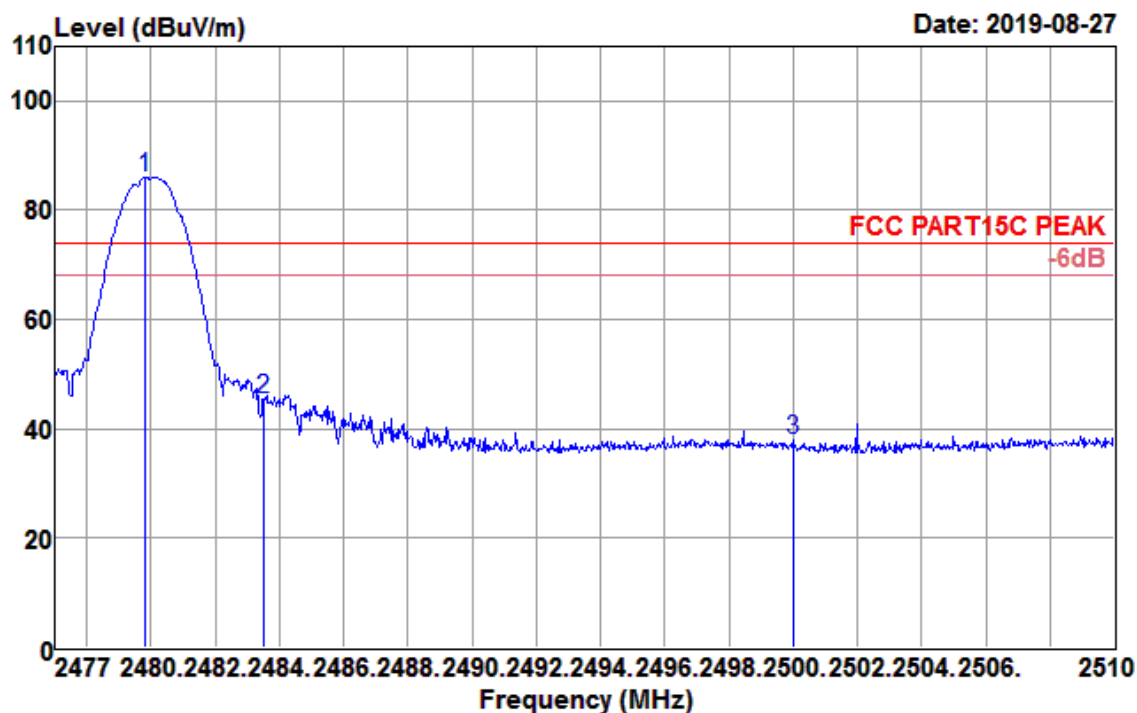


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.805	90.62	27.35	3.59	35.67	85.89	74.00	11.89	Peak
2483.501	50.10	27.36	3.59	35.68	45.37	74.00	-28.63	Peak
2500.000	42.56	27.40	3.60	35.70	37.86	74.00	-36.14	Peak

Test Mode :	Bluetooth (1Mbps) CH78 (2480MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	2.477GHz~2.510GHz	Polarization :	Horizontal

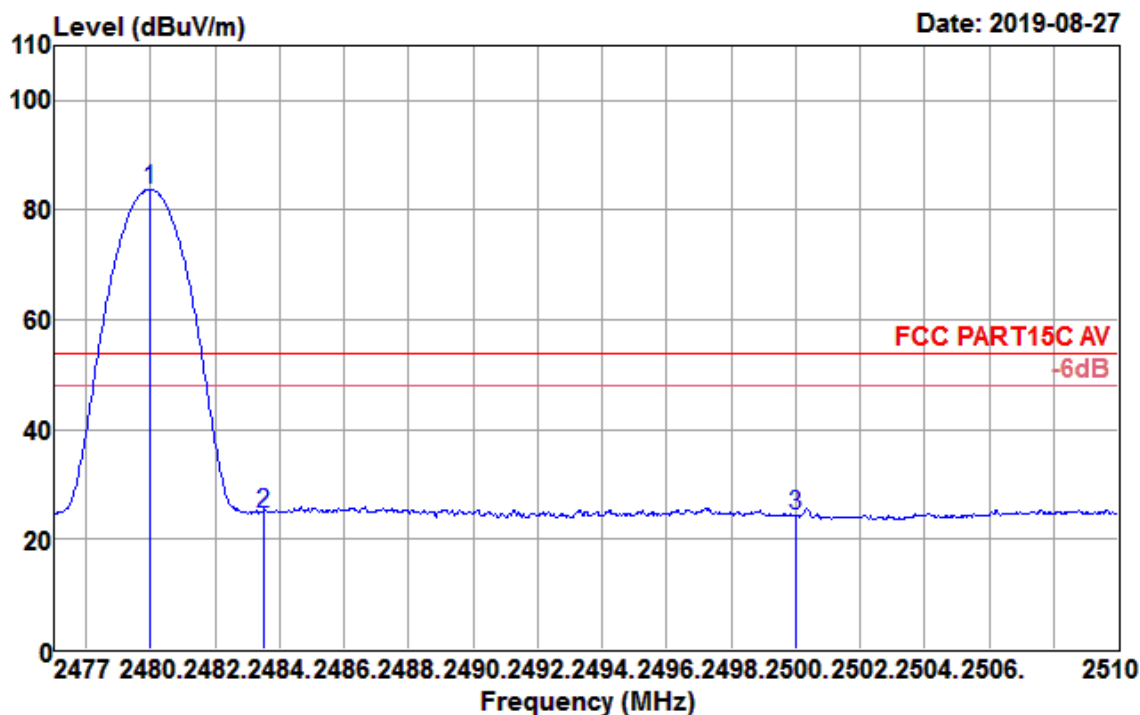


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.970	88.52	27.35	3.59	35.67	83.79	54.00	29.79	Average
2483.500	29.55	27.36	3.59	35.68	24.82	54.00	-29.18	Average
2500.000	29.12	27.40	3.60	35.70	24.42	54.00	-29.58	Average

Test Mode :	Bluetooth (1Mbps) CH78 (2480MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	2.477GHz~2.510GHz	Polarization :	Vertical

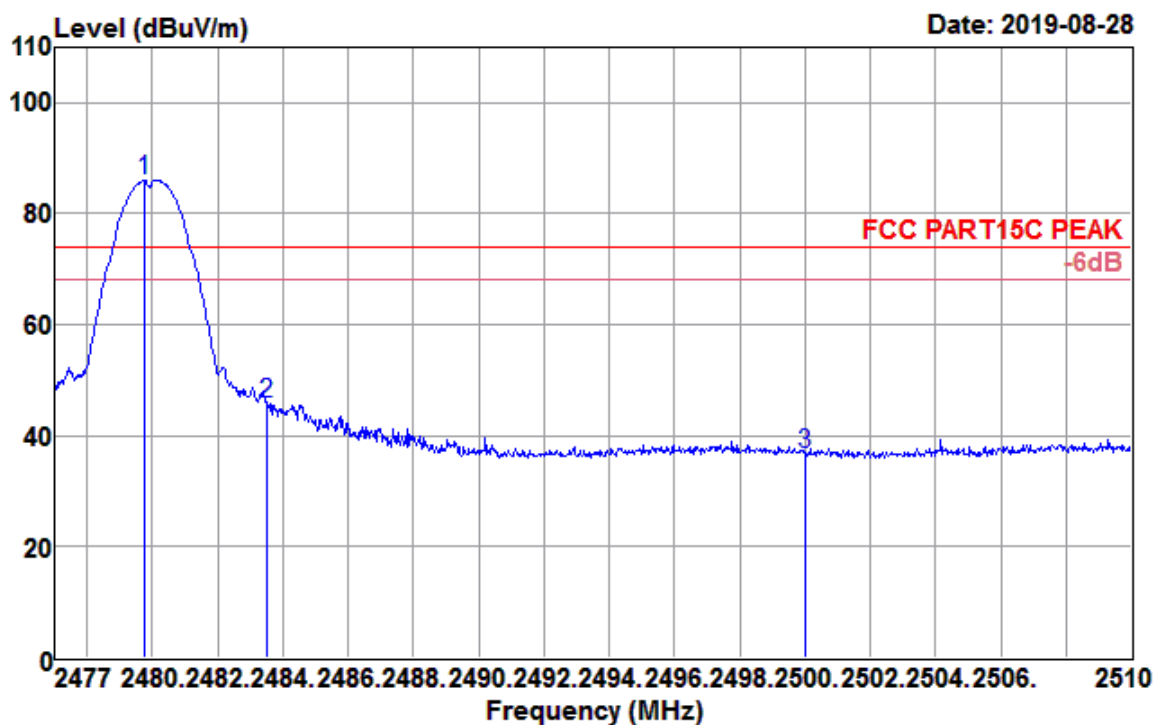

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.772	90.68	27.35	3.59	35.67	85.95	74.00	11.95	Peak
2483.500	50.62	27.36	3.59	35.68	45.89	74.00	-28.11	Peak
2500.000	41.48	27.40	3.60	35.70	36.78	74.00	-37.22	Peak


Test Mode :	Bluetooth (1Mbps) CH78 (2480MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	2.477GHz~2.510GHz	Polarization :	Vertical

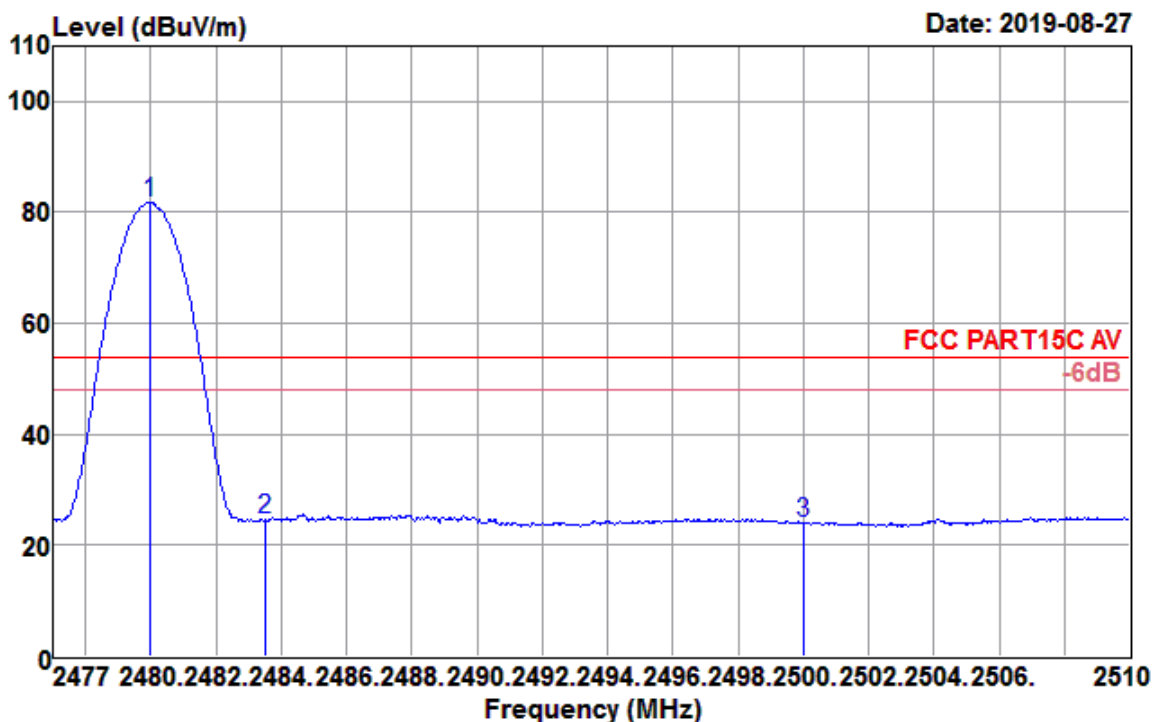

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.970	86.46	27.35	3.59	35.67	81.73	54.00	27.73	Average
2483.500	29.40	27.36	3.59	35.68	24.67	54.00	-29.33	Average
2500.000	28.71	27.40	3.60	35.70	24.01	54.00	-29.99	Average


4.8.5 Test Result of Radiated Spurious Emission (1GHz ~ 10th Harmonic)


Test Mode :	Bluetooth (1Mbps) CH00 (2402MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal

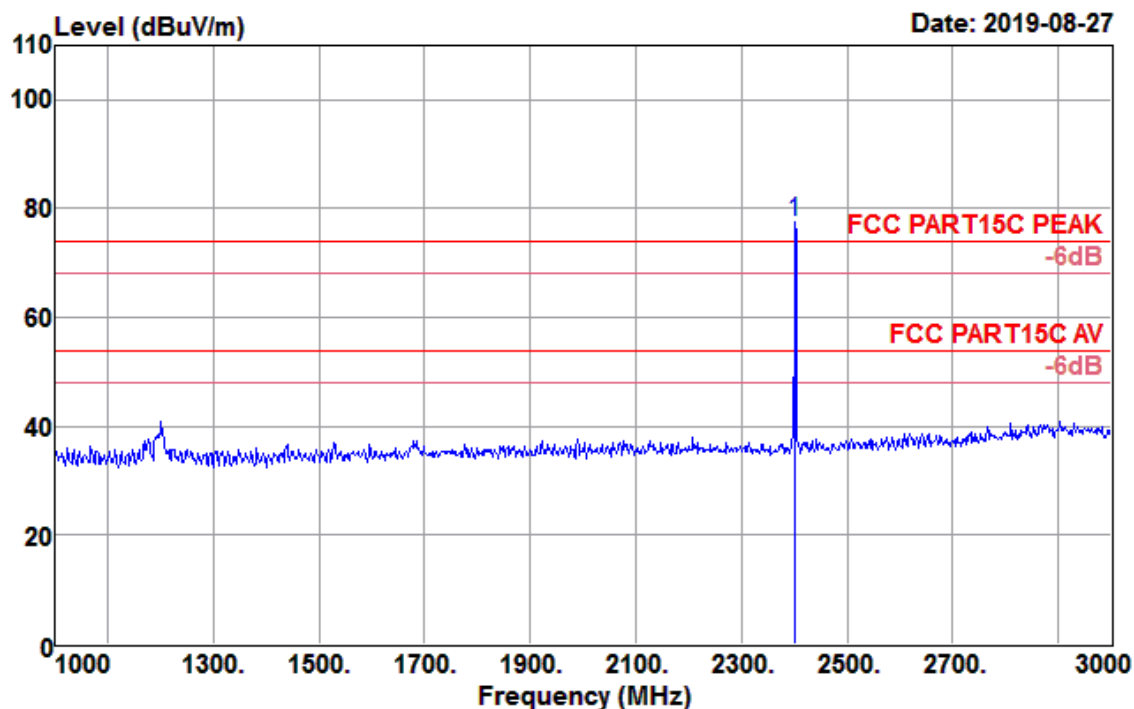

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2402.000	82.38	27.15	3.54	35.56	77.51	74.00	3.51	Peak


Test Mode :	Bluetooth (1Mbps) CH00 (2402MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

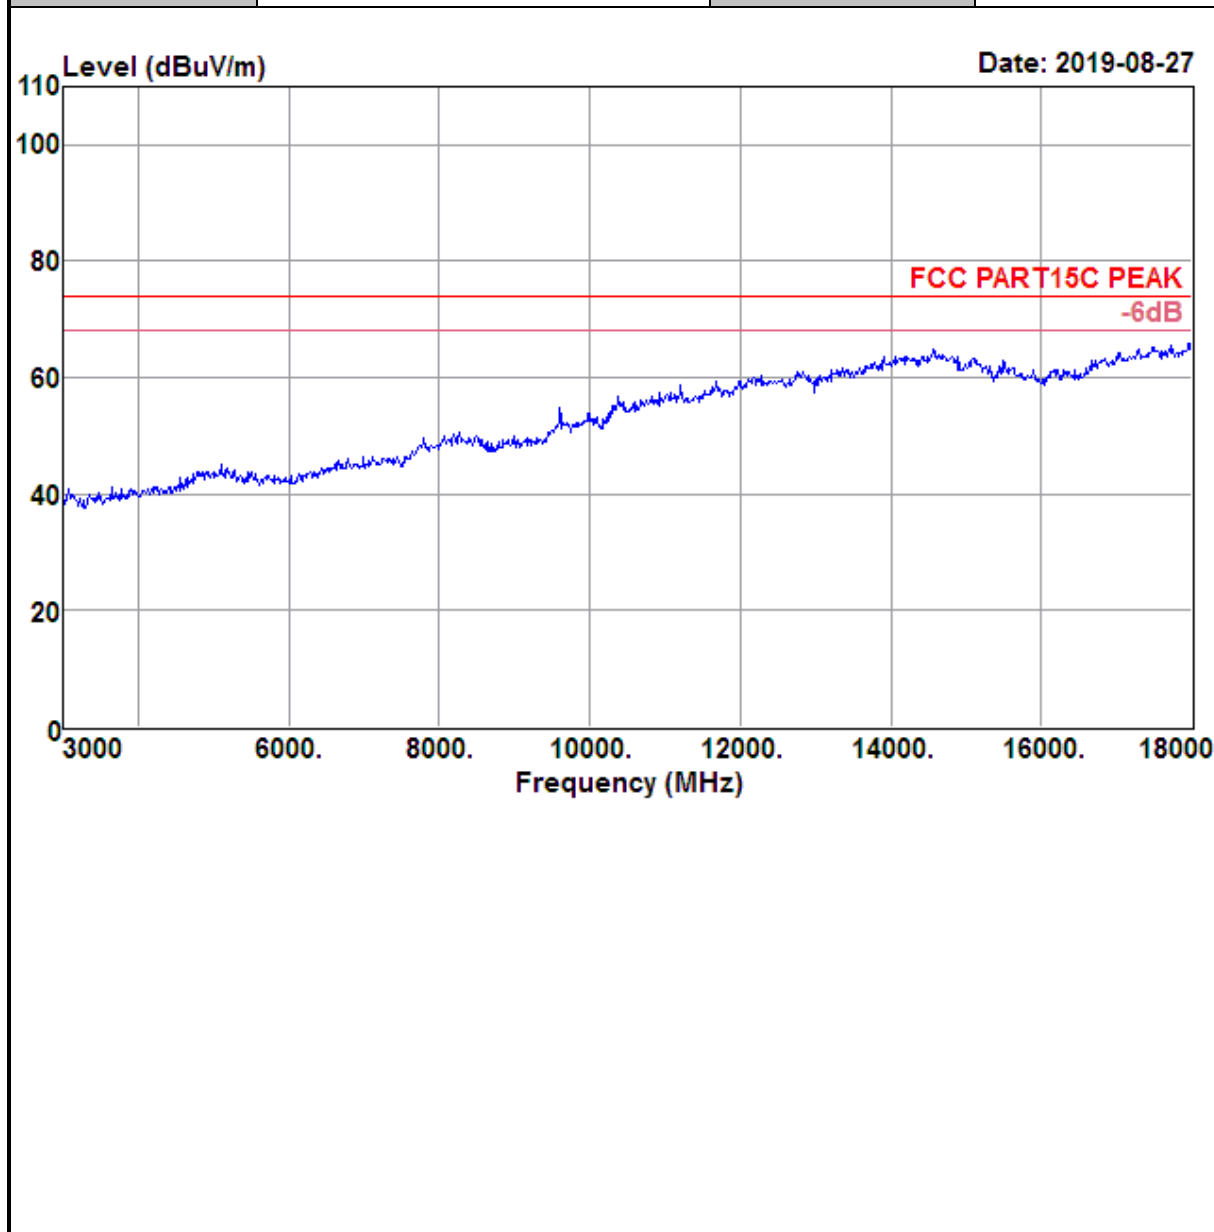

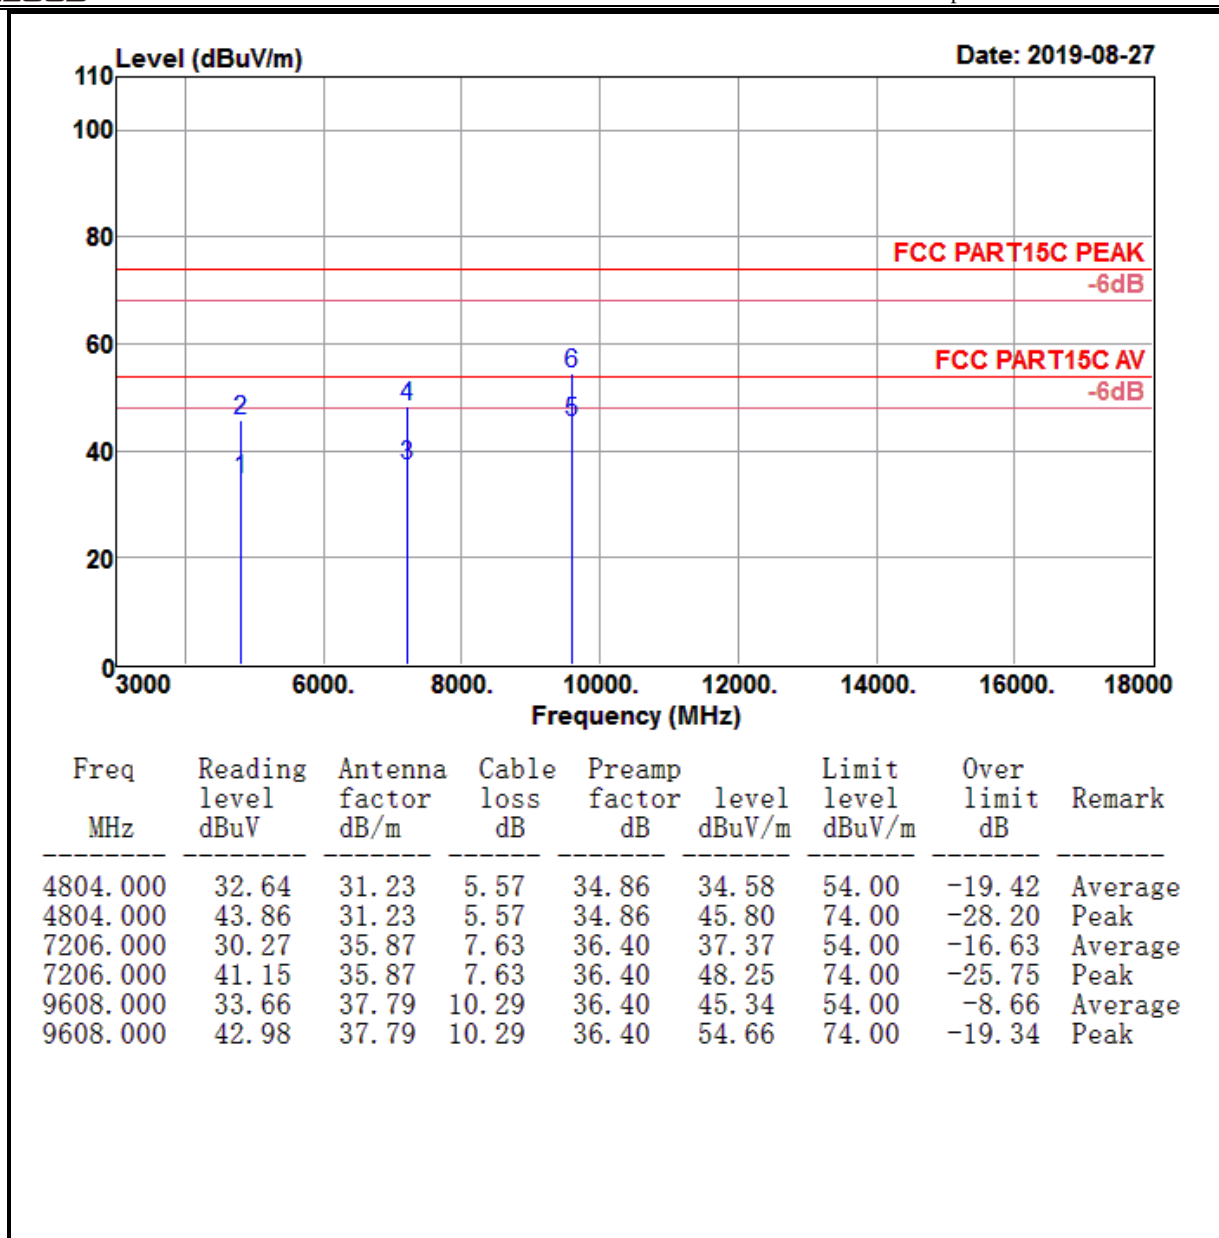


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	Bluetooth (1Mbps) CH00 (2402MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical

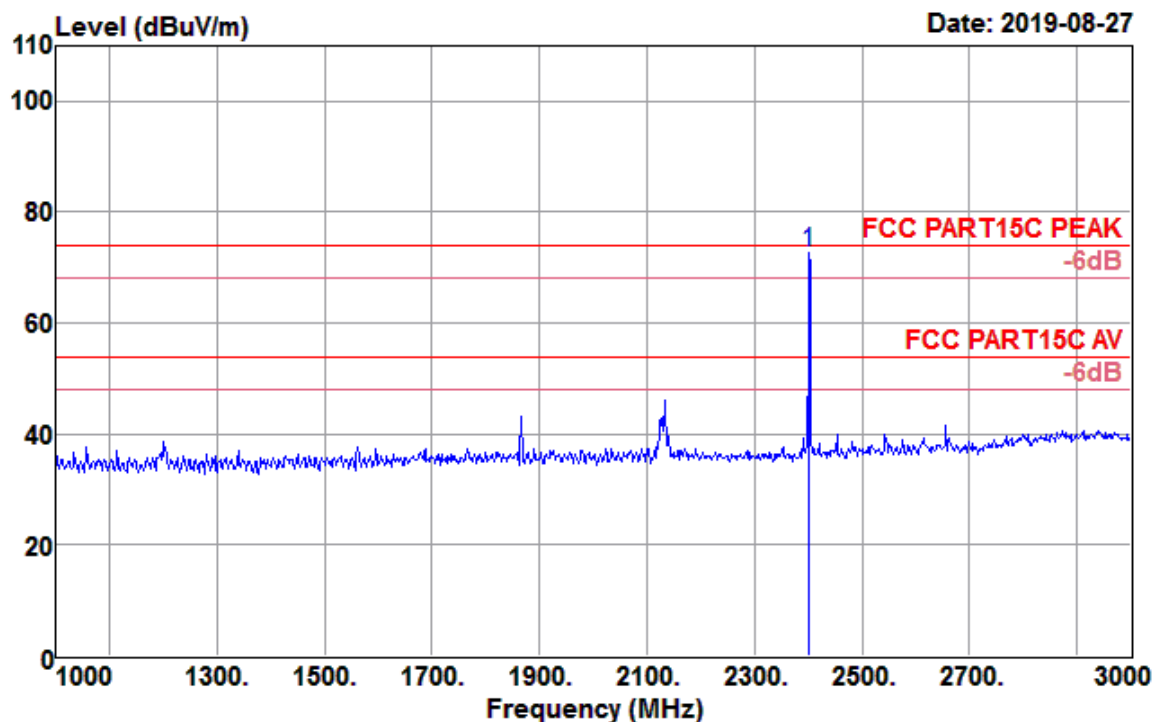

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2402.000	77.47	27.15	3.54	35.56	72.60	74.00	-1.40	Peak


Test Mode :	Bluetooth (1Mbps) CH00 (2402MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

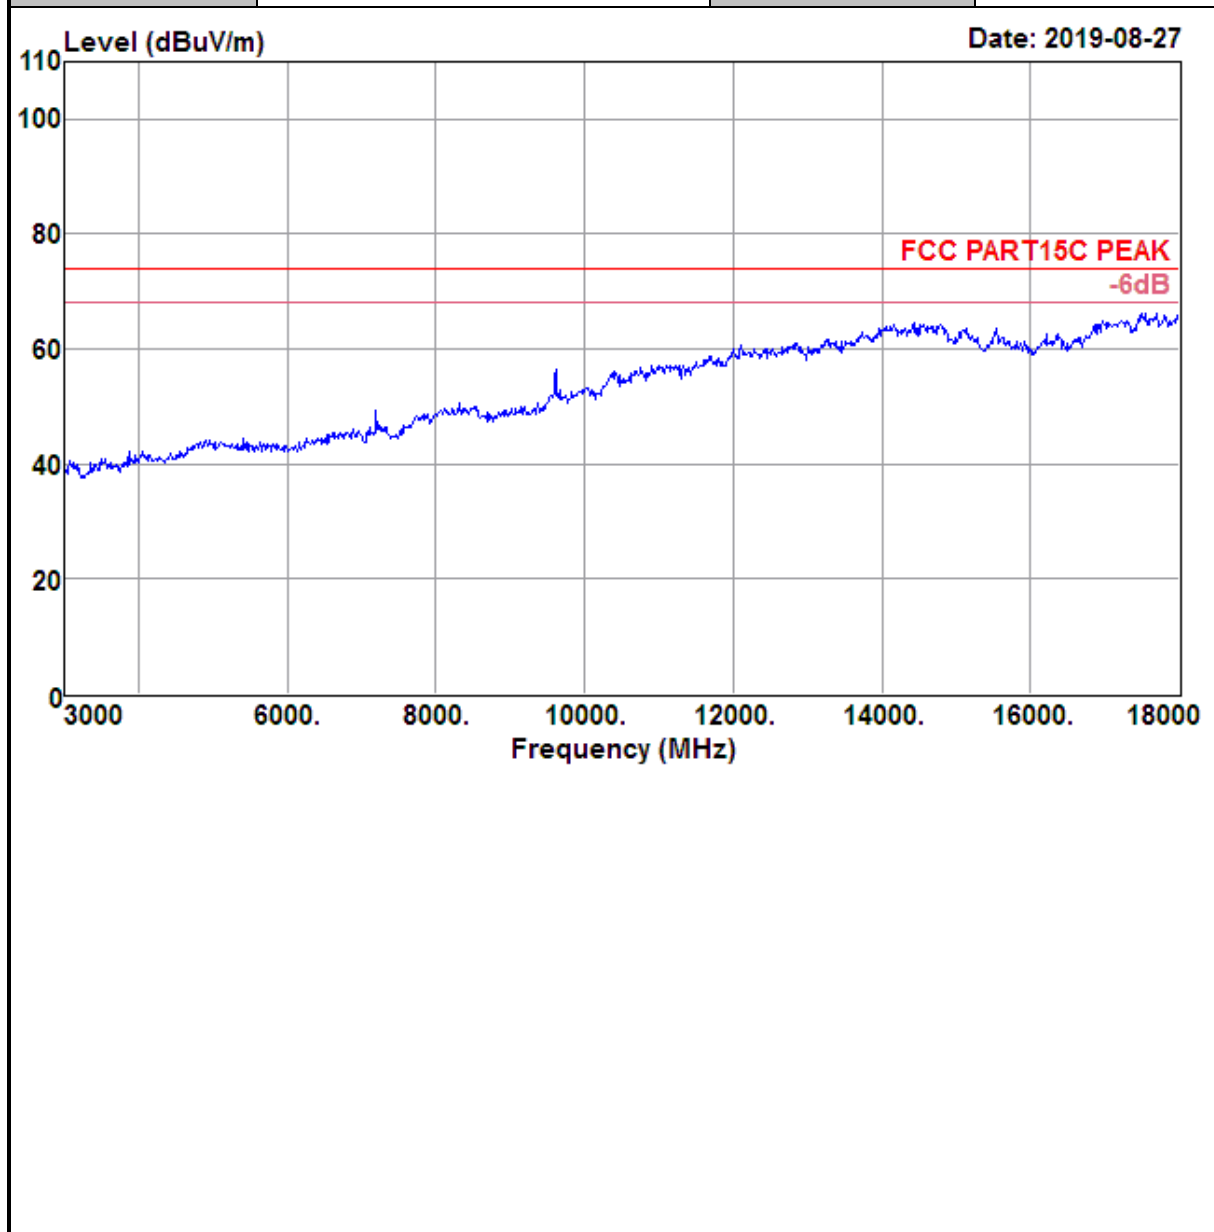

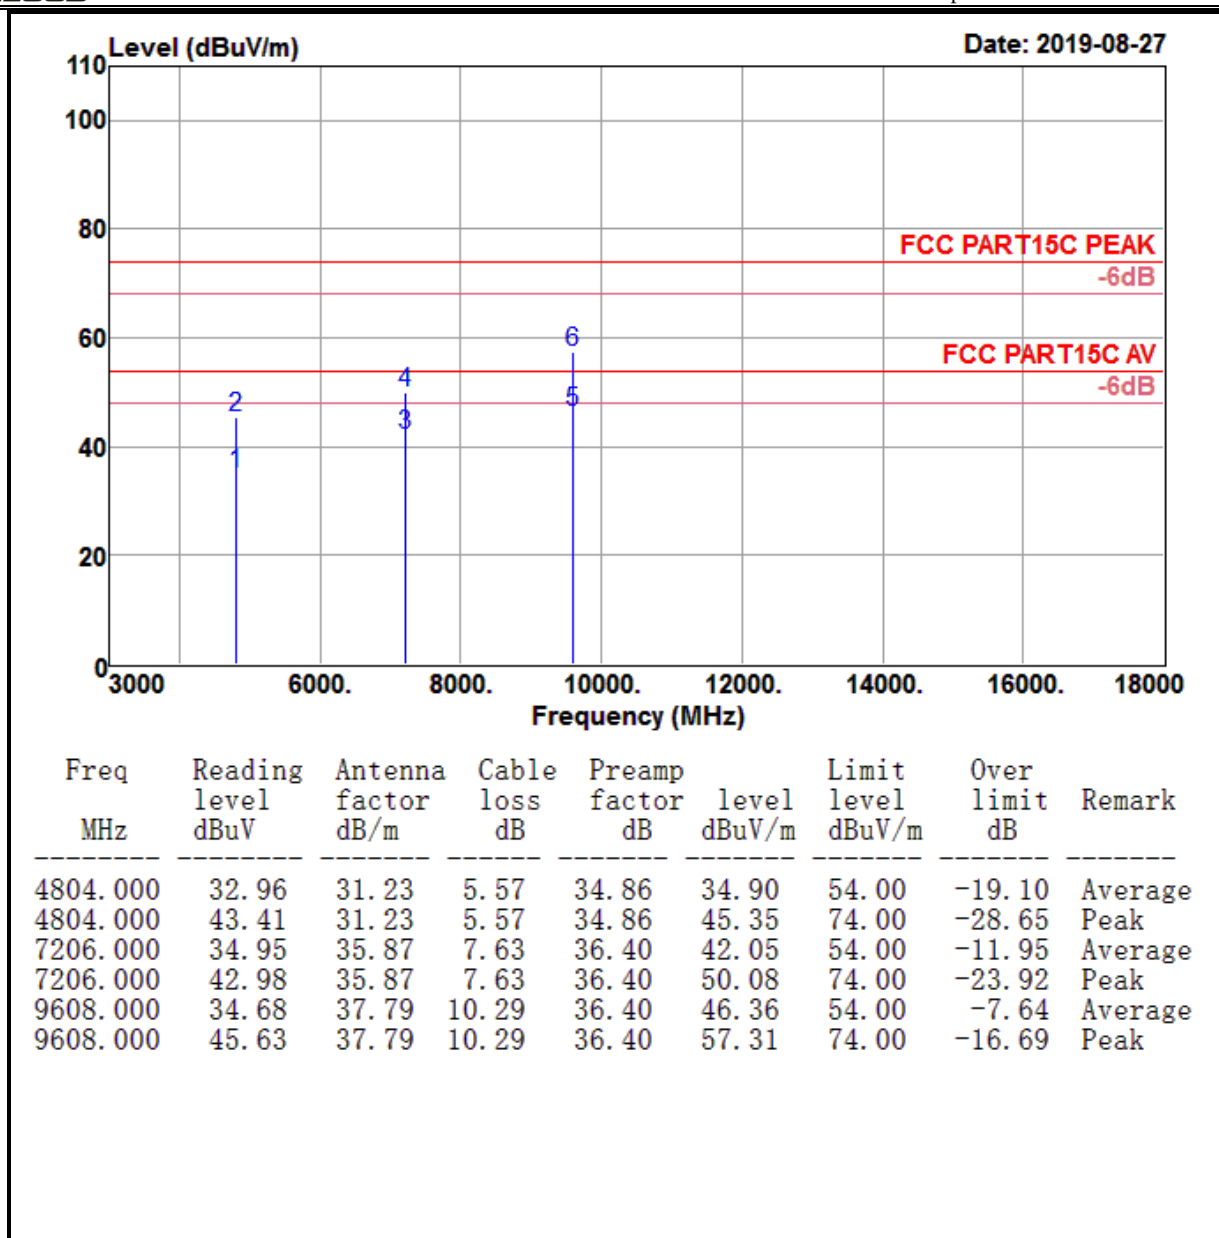



Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	Bluetooth (1Mbps) CH39 (2441MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal

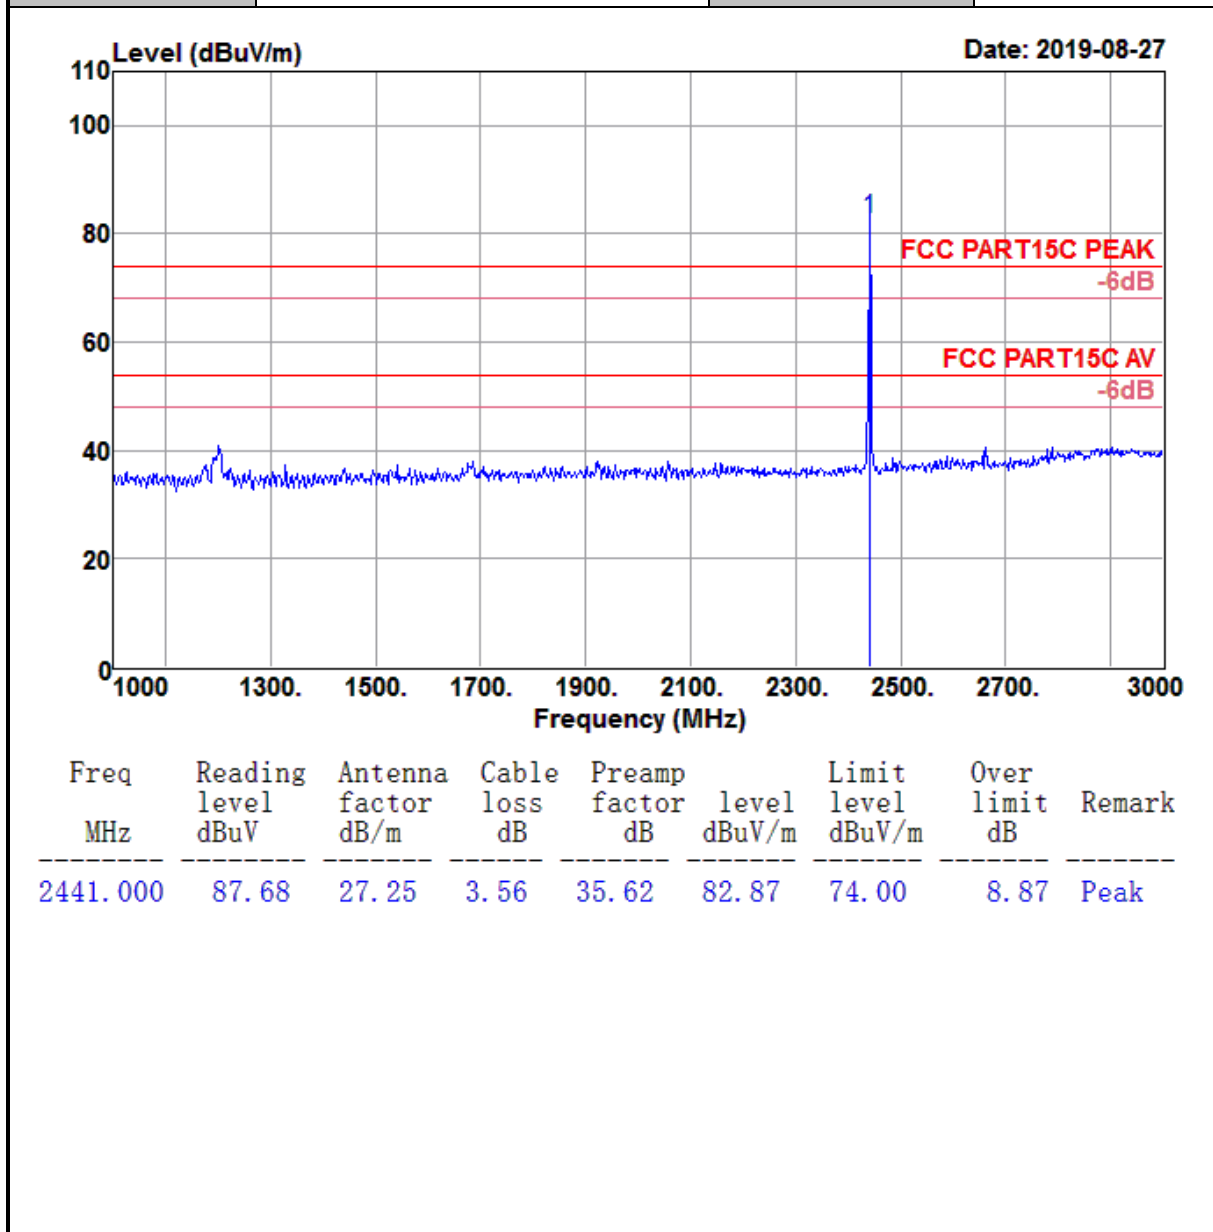


Test Mode :	Bluetooth (1Mbps) CH39 (2441MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

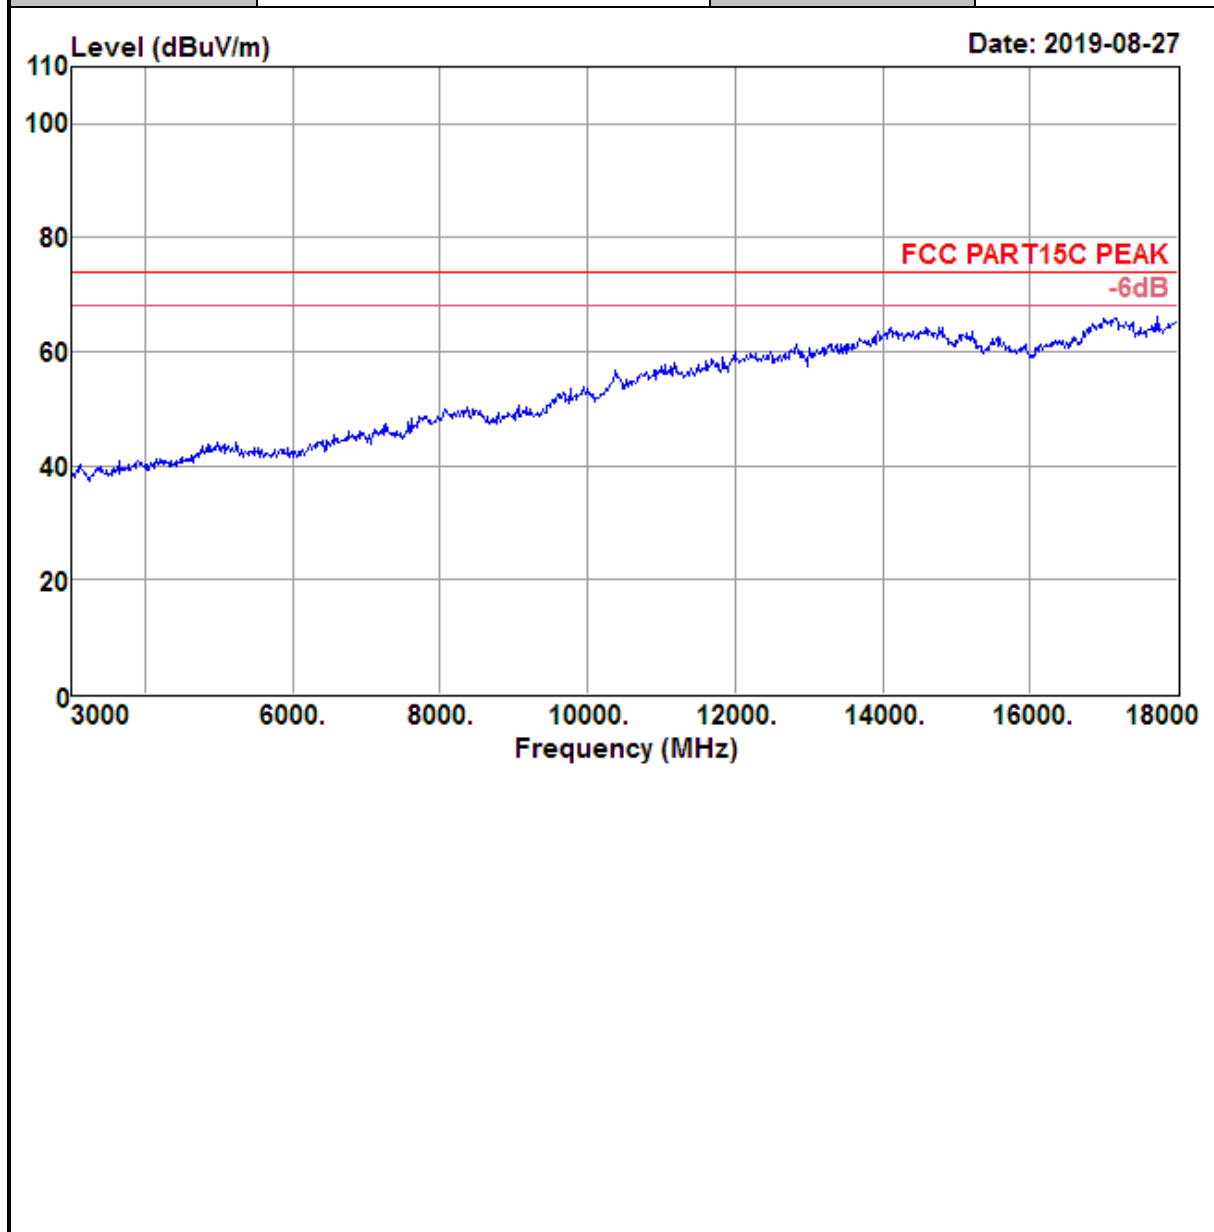

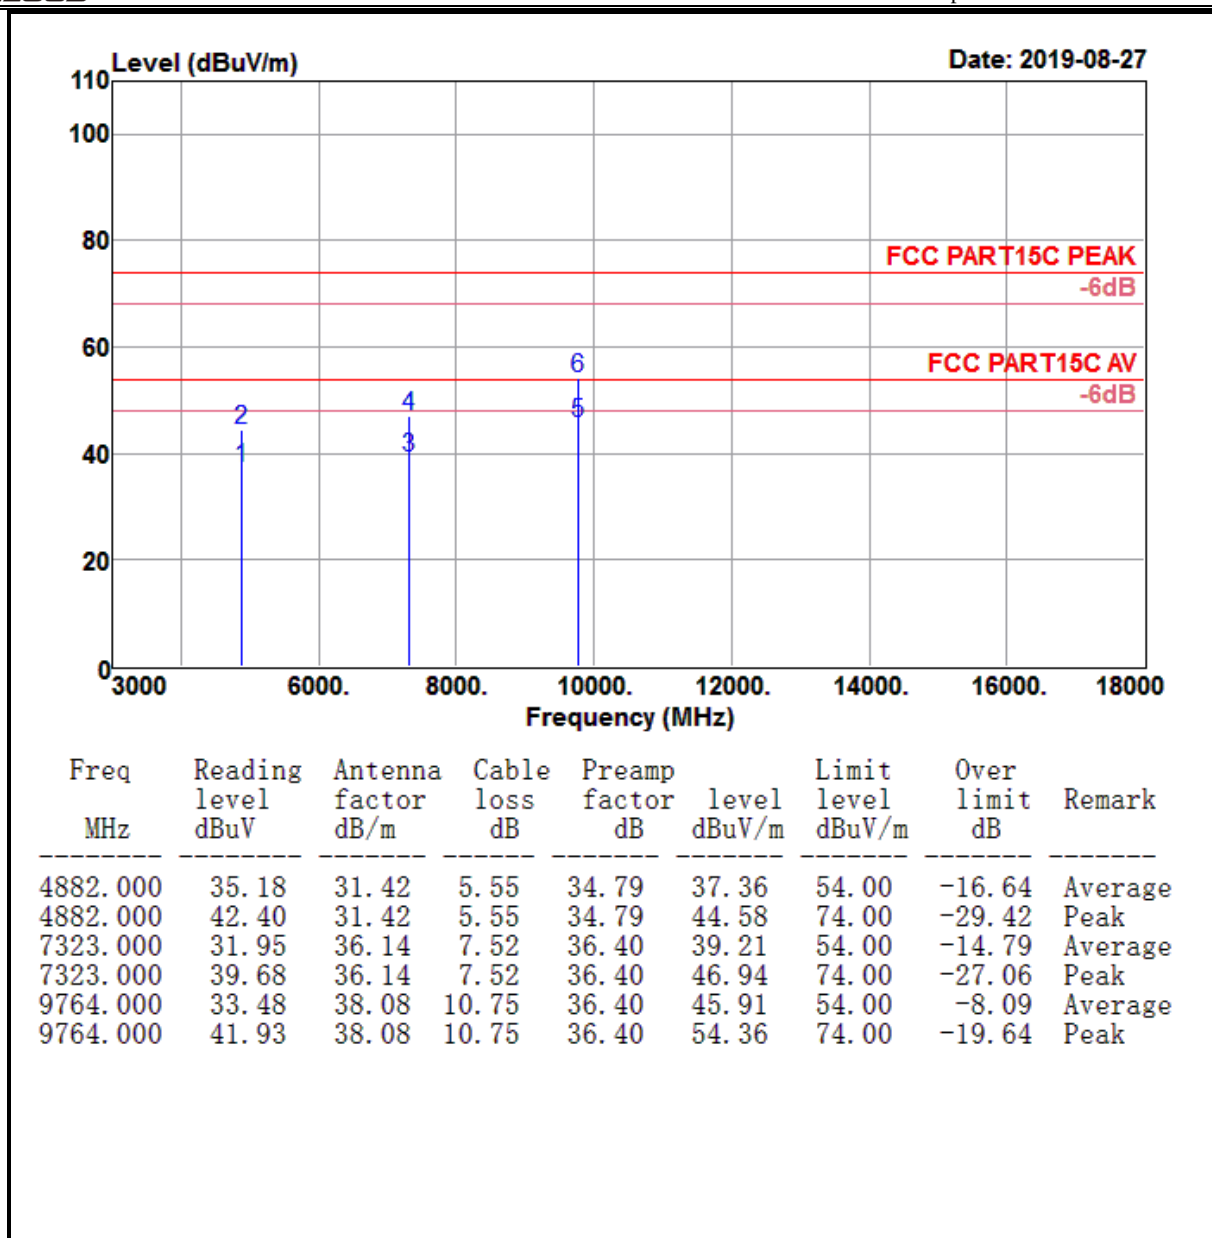


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	Bluetooth (1Mbps) CH39 (2441MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical

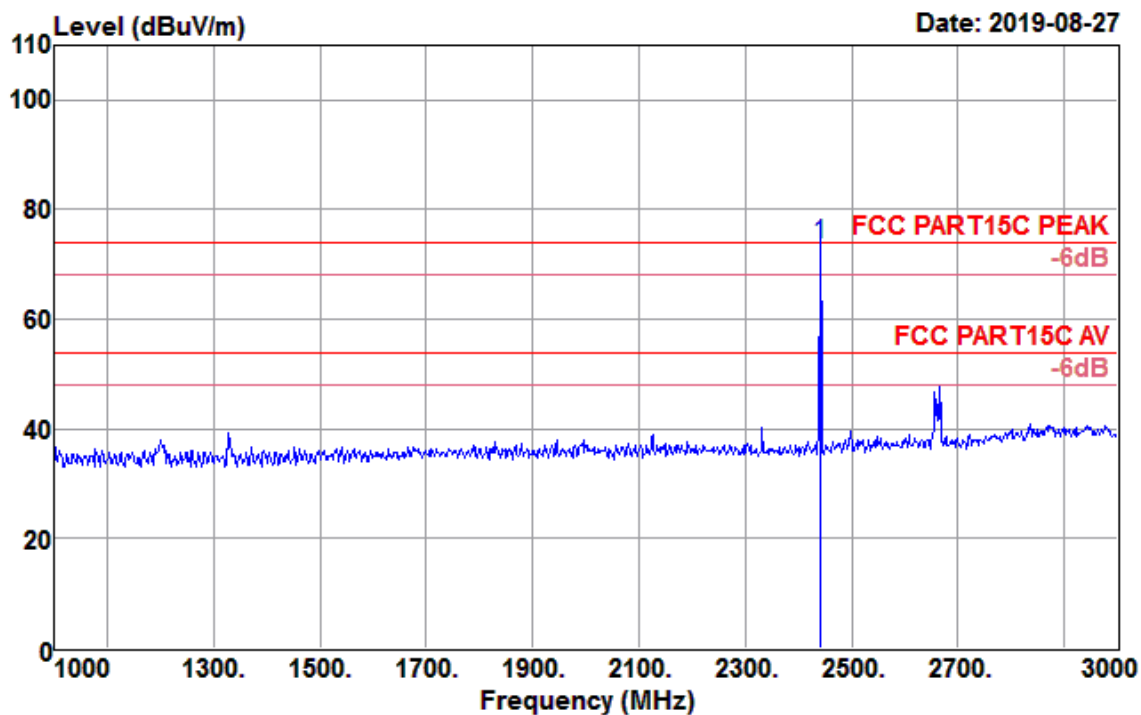

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2441.000	78.50	27.25	3.56	35.62	73.69	74.00	-0.31	Peak


Test Mode :	Bluetooth (1Mbps) CH39 (2441MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

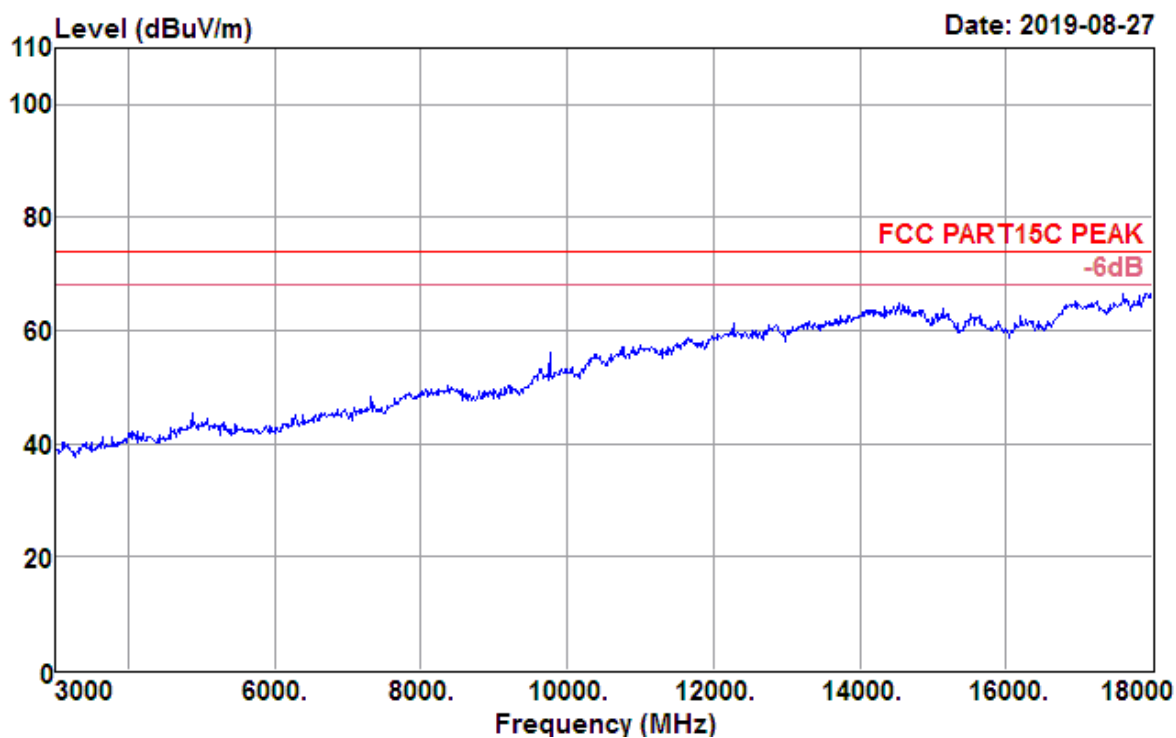

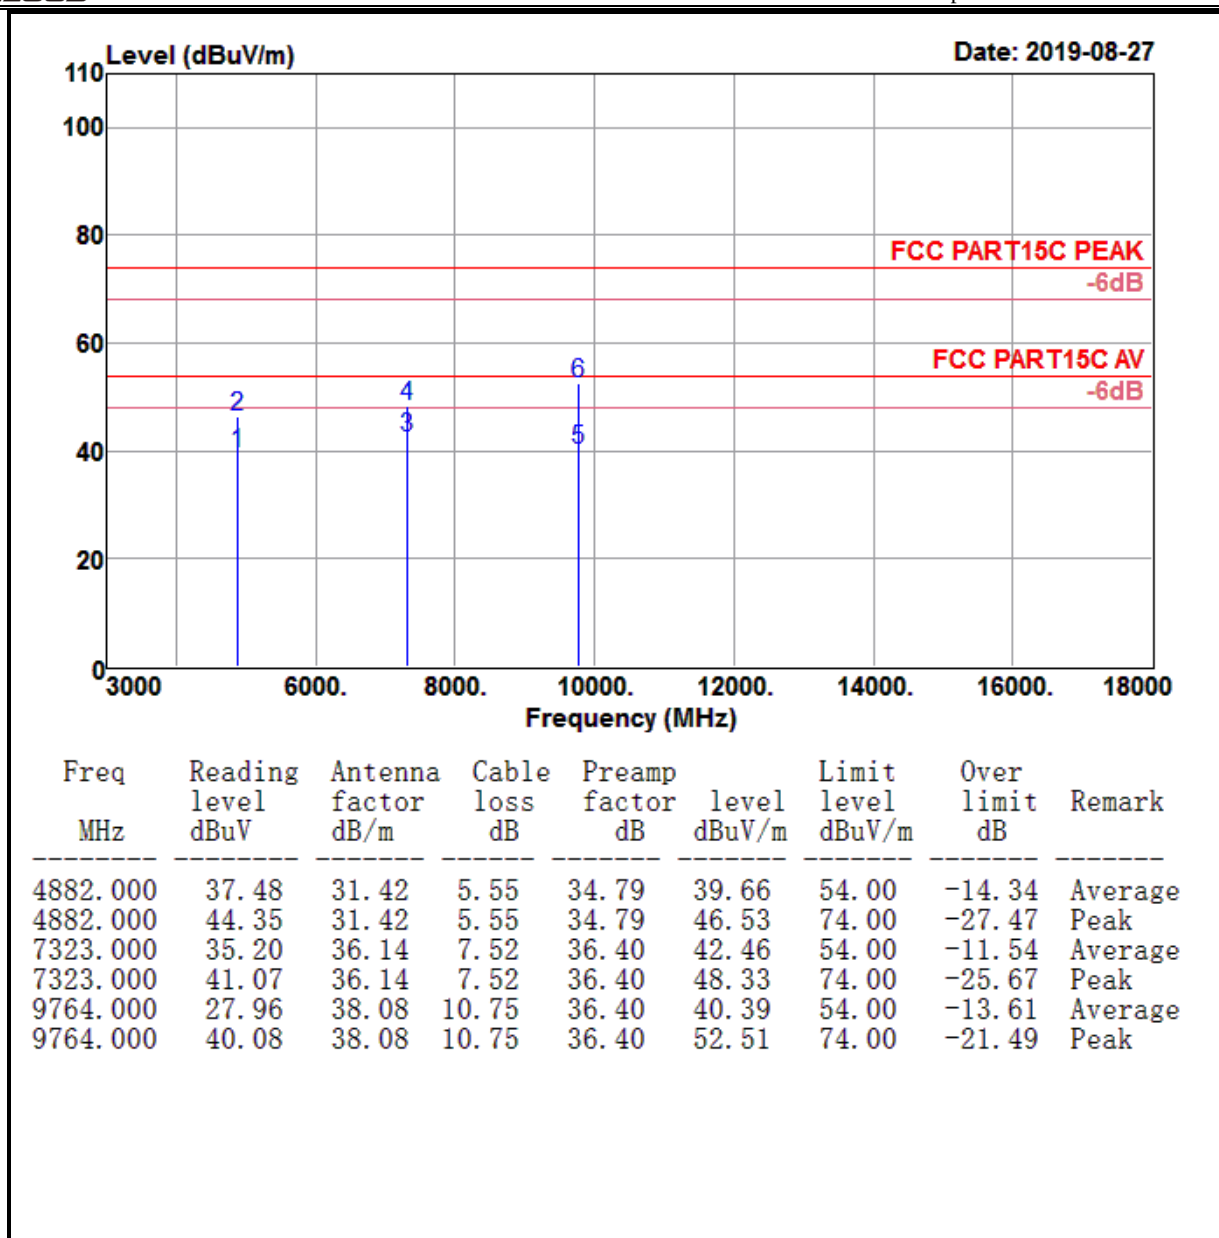


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	Bluetooth (1Mbps) CH78 (2480MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal

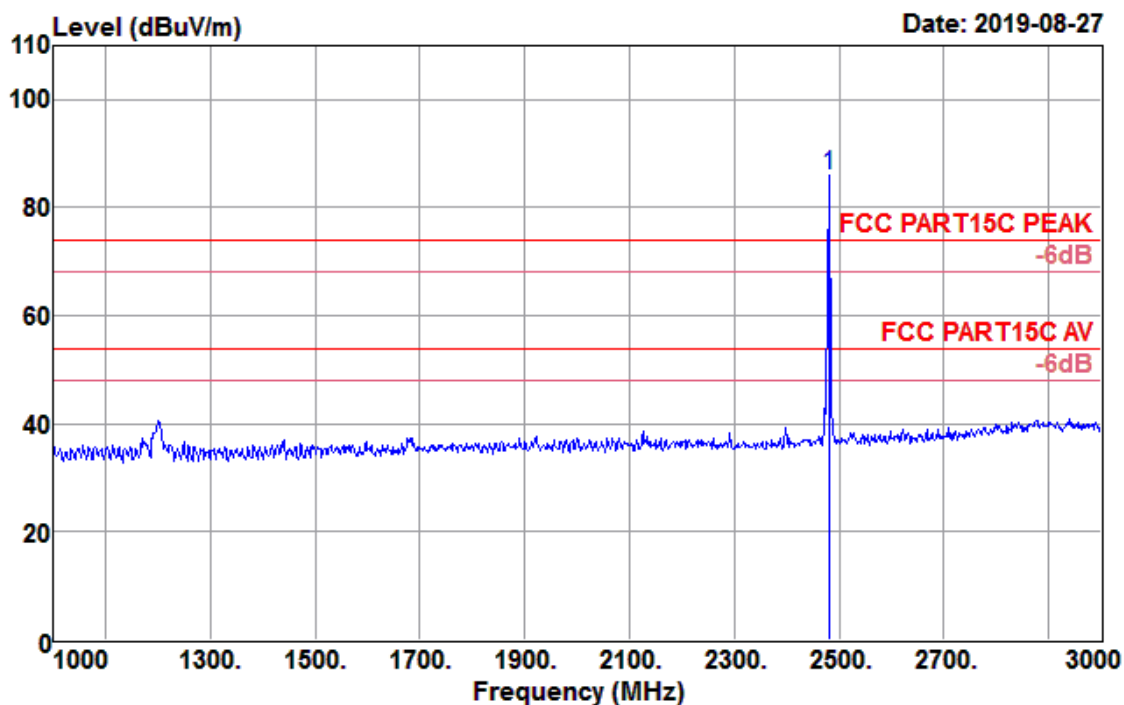

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.000	90.62	27.35	3.59	35.67	85.89	74.00	11.89	Peak


Test Mode :	Bluetooth (1Mbps) CH78 (2480MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

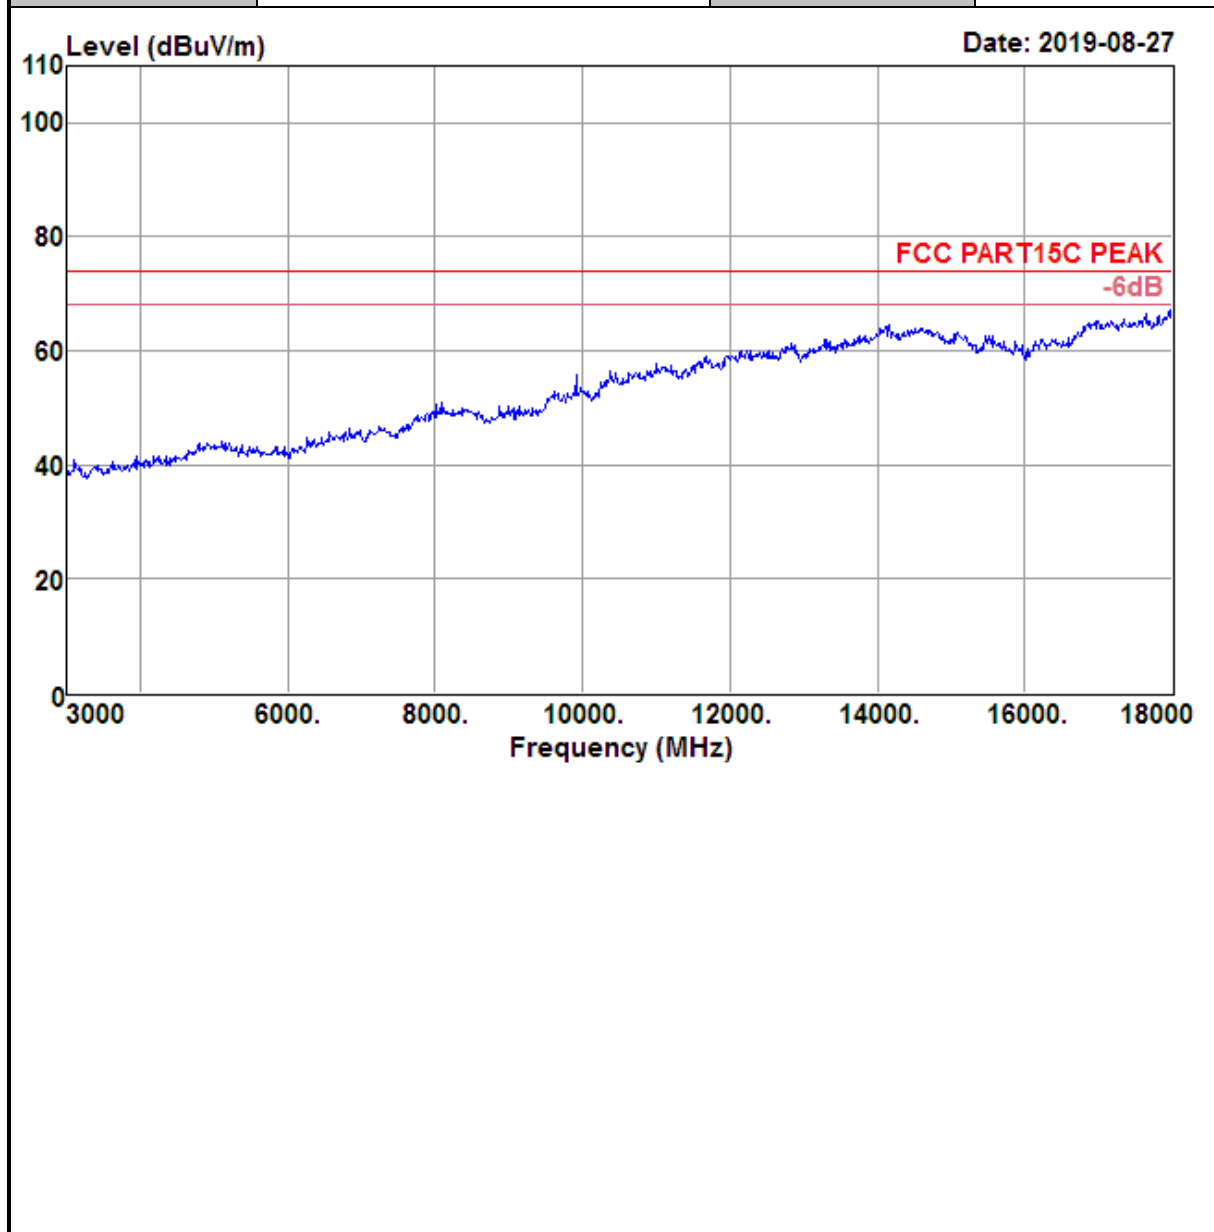

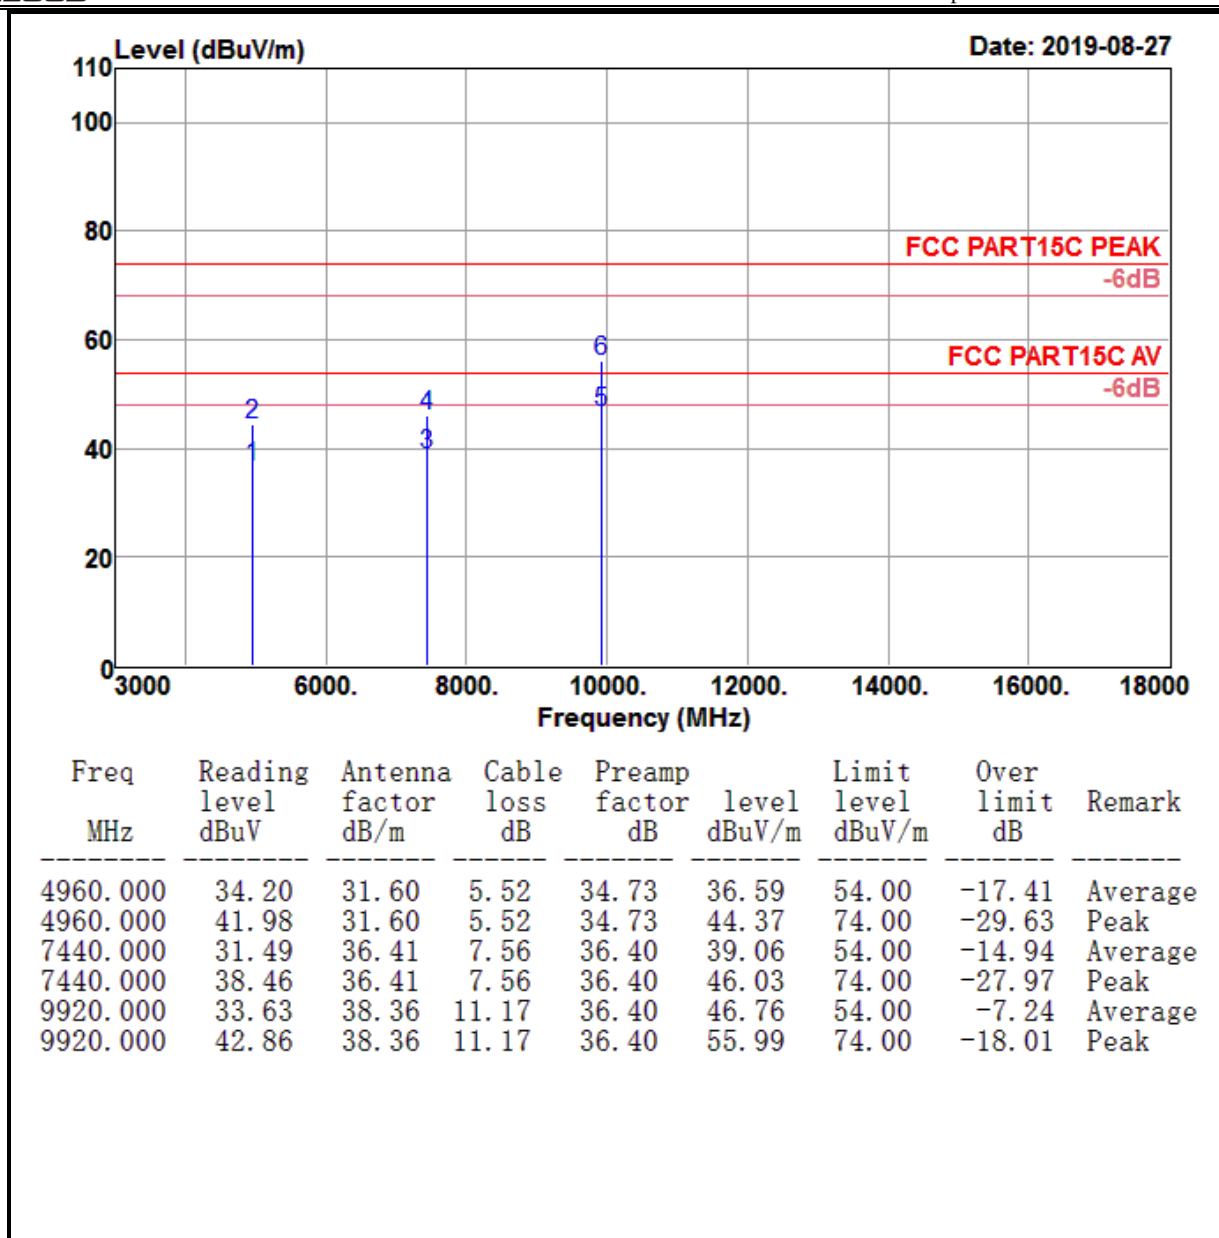


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


Test Mode :	Bluetooth (1Mbps) CH78 (2480MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	1GHz~3GHz	Polarization :	Vertical

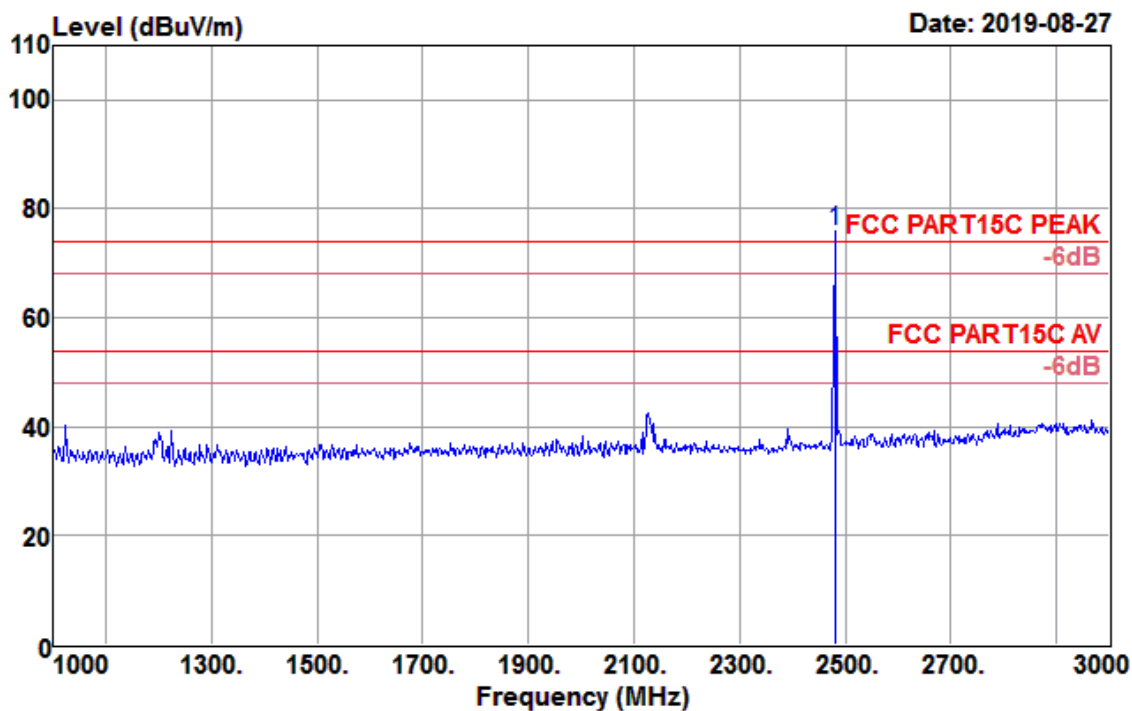

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.000	80.68	27.35	3.59	35.67	75.95	74.00	1.95	Peak


Test Mode :	Bluetooth (1Mbps) CH78 (2480MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

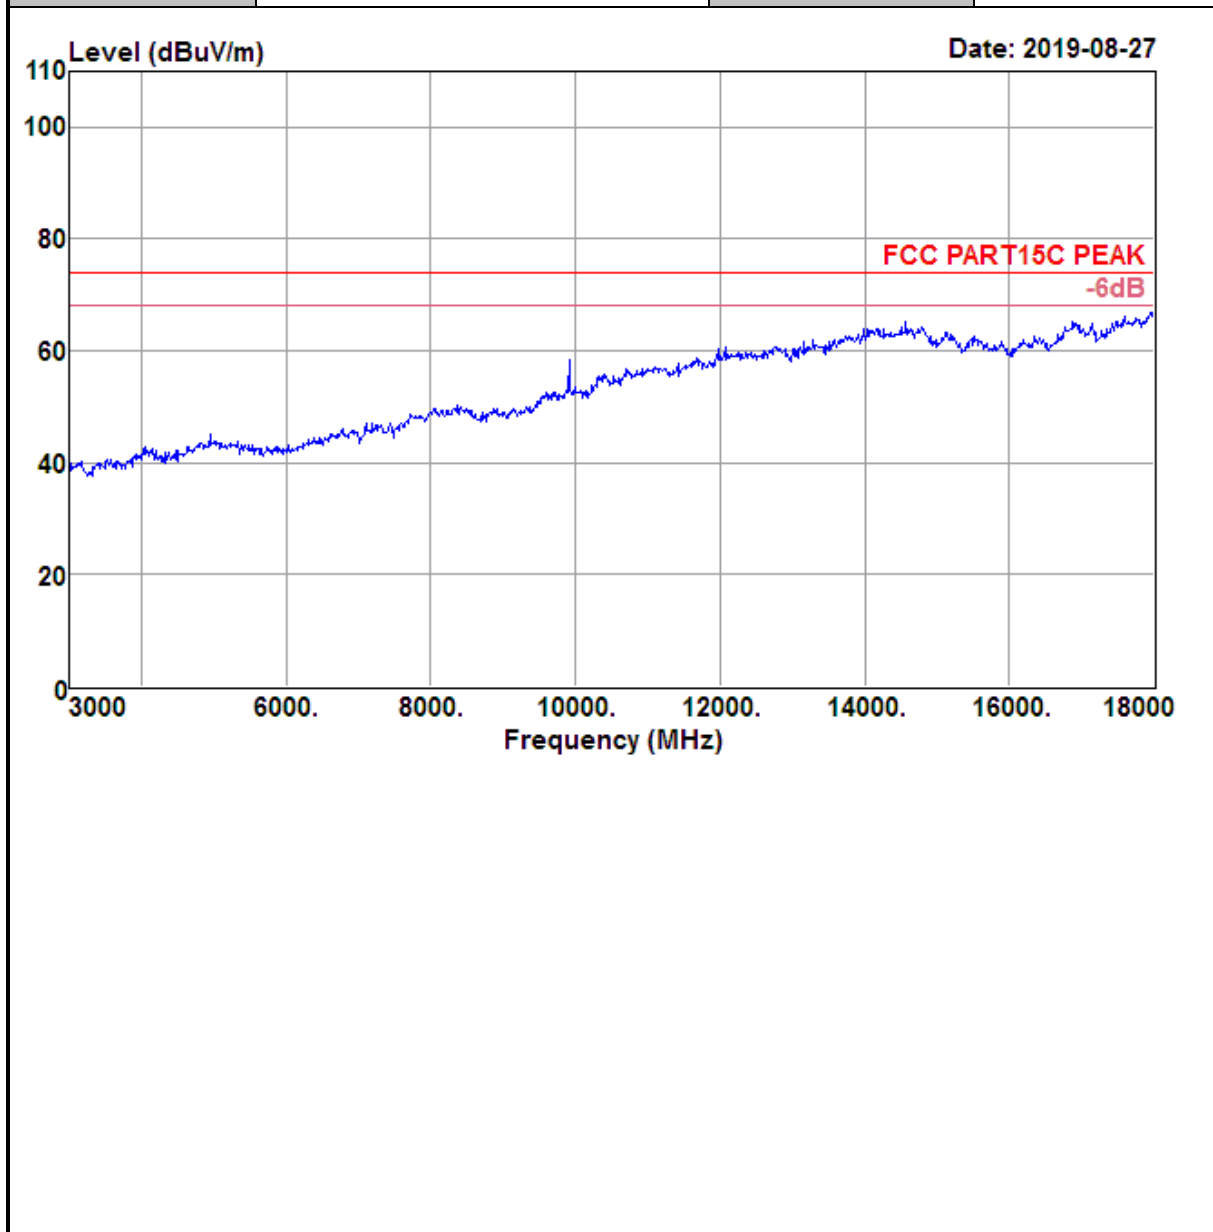

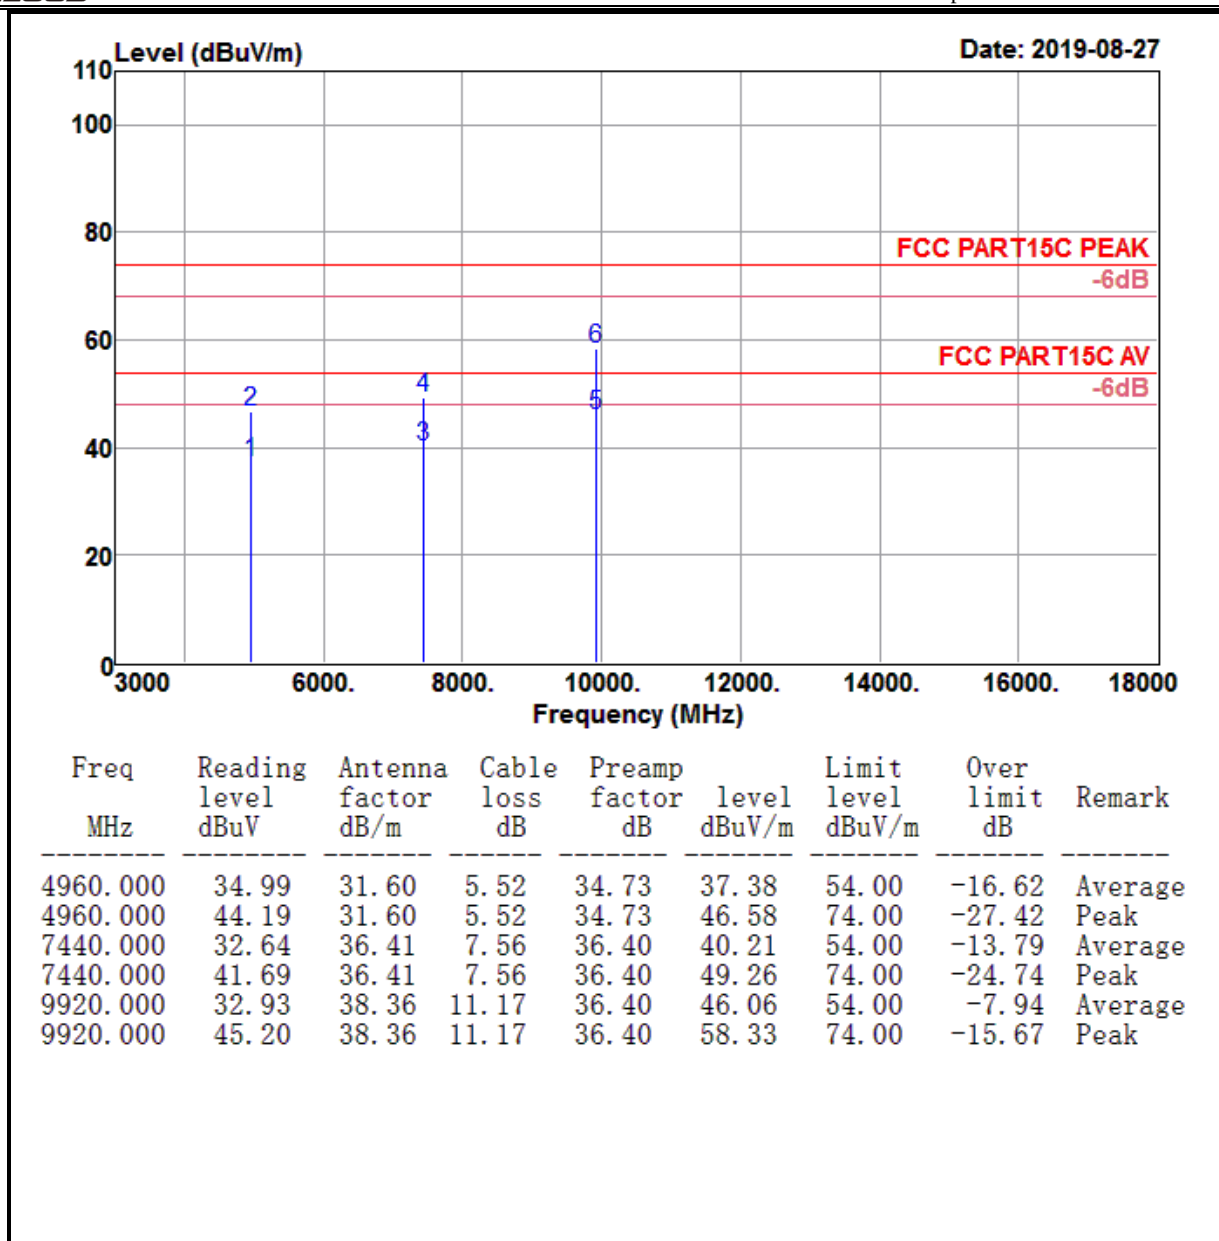


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

4.8.6 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)

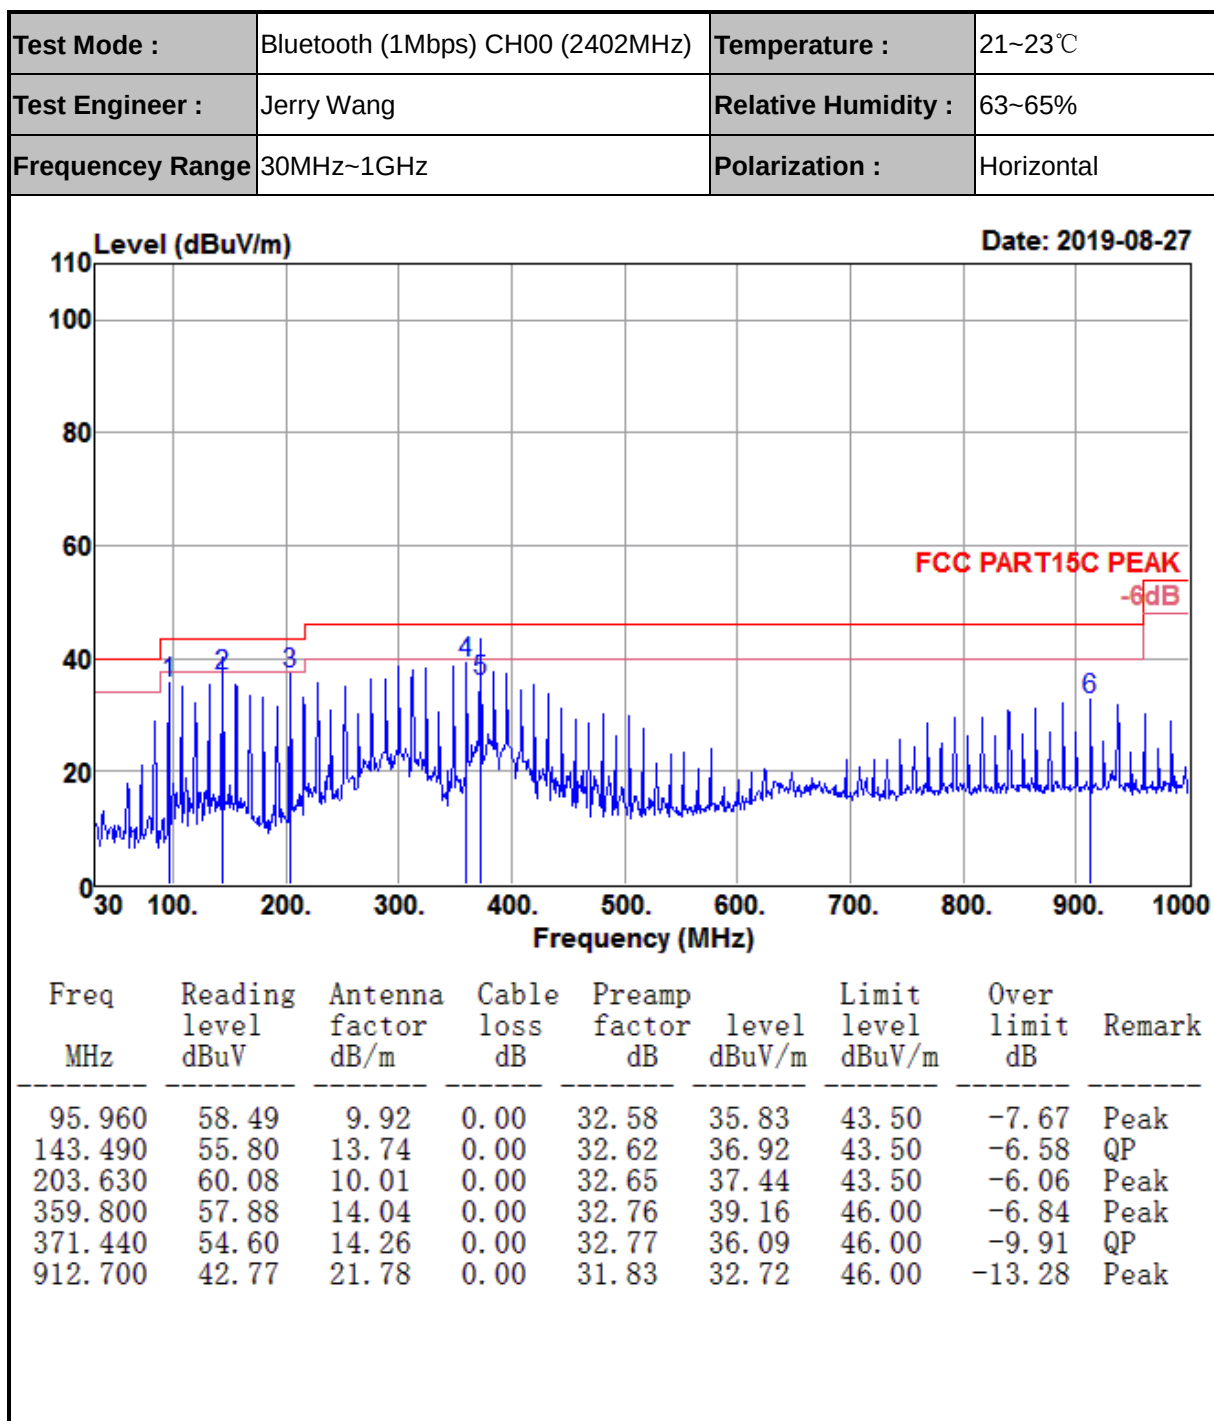

Test Mode :	Bluetooth (1Mbps) CH00 (2402MHz)	Temperature :	21~23℃
Test Engineer :	Jerry Wang	Relative Humidity :	63~65%
Frequency Range	30MHz~1GHz	Polarization :	Vertical

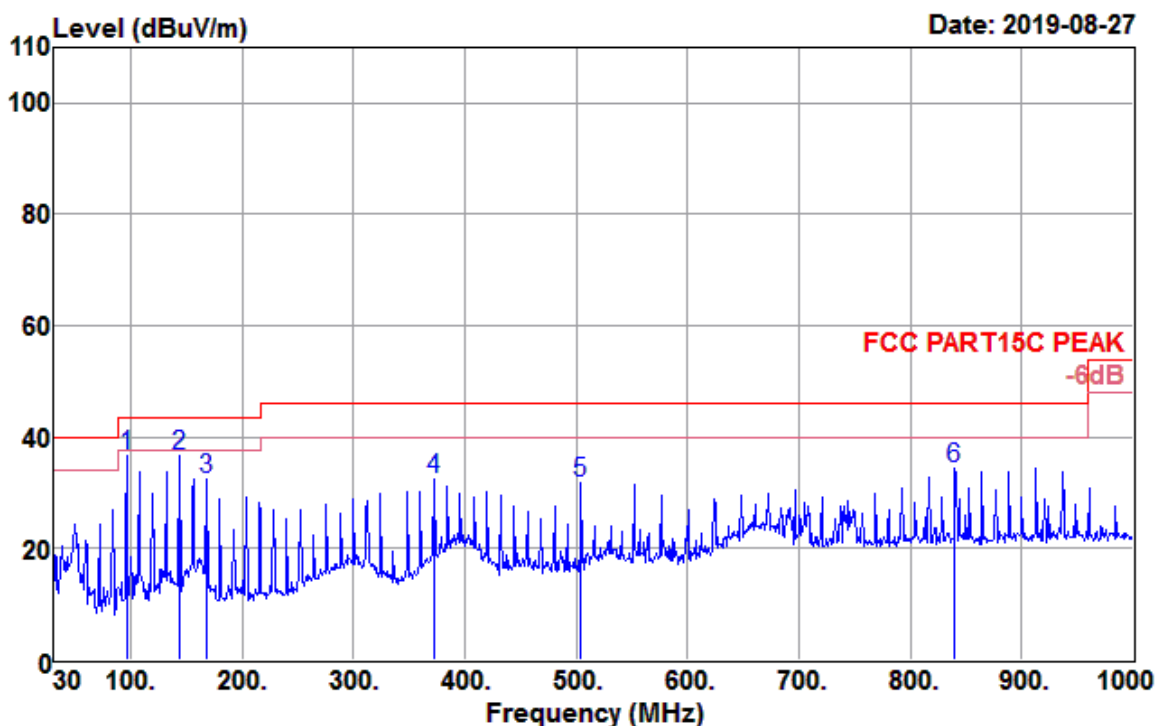

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
95.960	57.57	9.92	1.90	32.58	36.81	43.50	-6.69	Peak
143.490	53.47	13.74	2.13	32.62	36.72	43.50	-6.78	Peak
167.740	49.55	13.43	2.23	32.63	32.58	43.50	-10.92	Peak
371.440	47.89	14.26	3.16	32.77	32.54	46.00	-13.46	Peak
504.330	44.50	16.58	3.65	32.89	31.84	46.00	-14.16	Peak
839.950	40.36	21.16	4.74	31.94	34.32	46.00	-11.68	Peak

4.9 AC Conducted Emission Measurement

4.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.


Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


4.9.2 Test Procedures

7. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
8. Connect EUT to the power mains through a line impedance stabilization network (LISN).
9. All the support units are connecting to the other LISN.
10. The LISN provides 50 ohm coupling impedance for the measuring instrument.
11. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
12. Both sides of AC line were checked for maximum conducted interference.
13. The frequency range from 150 kHz to 30 MHz was searched.
14. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

4.9.3 Test Result of AC Conducted Emission

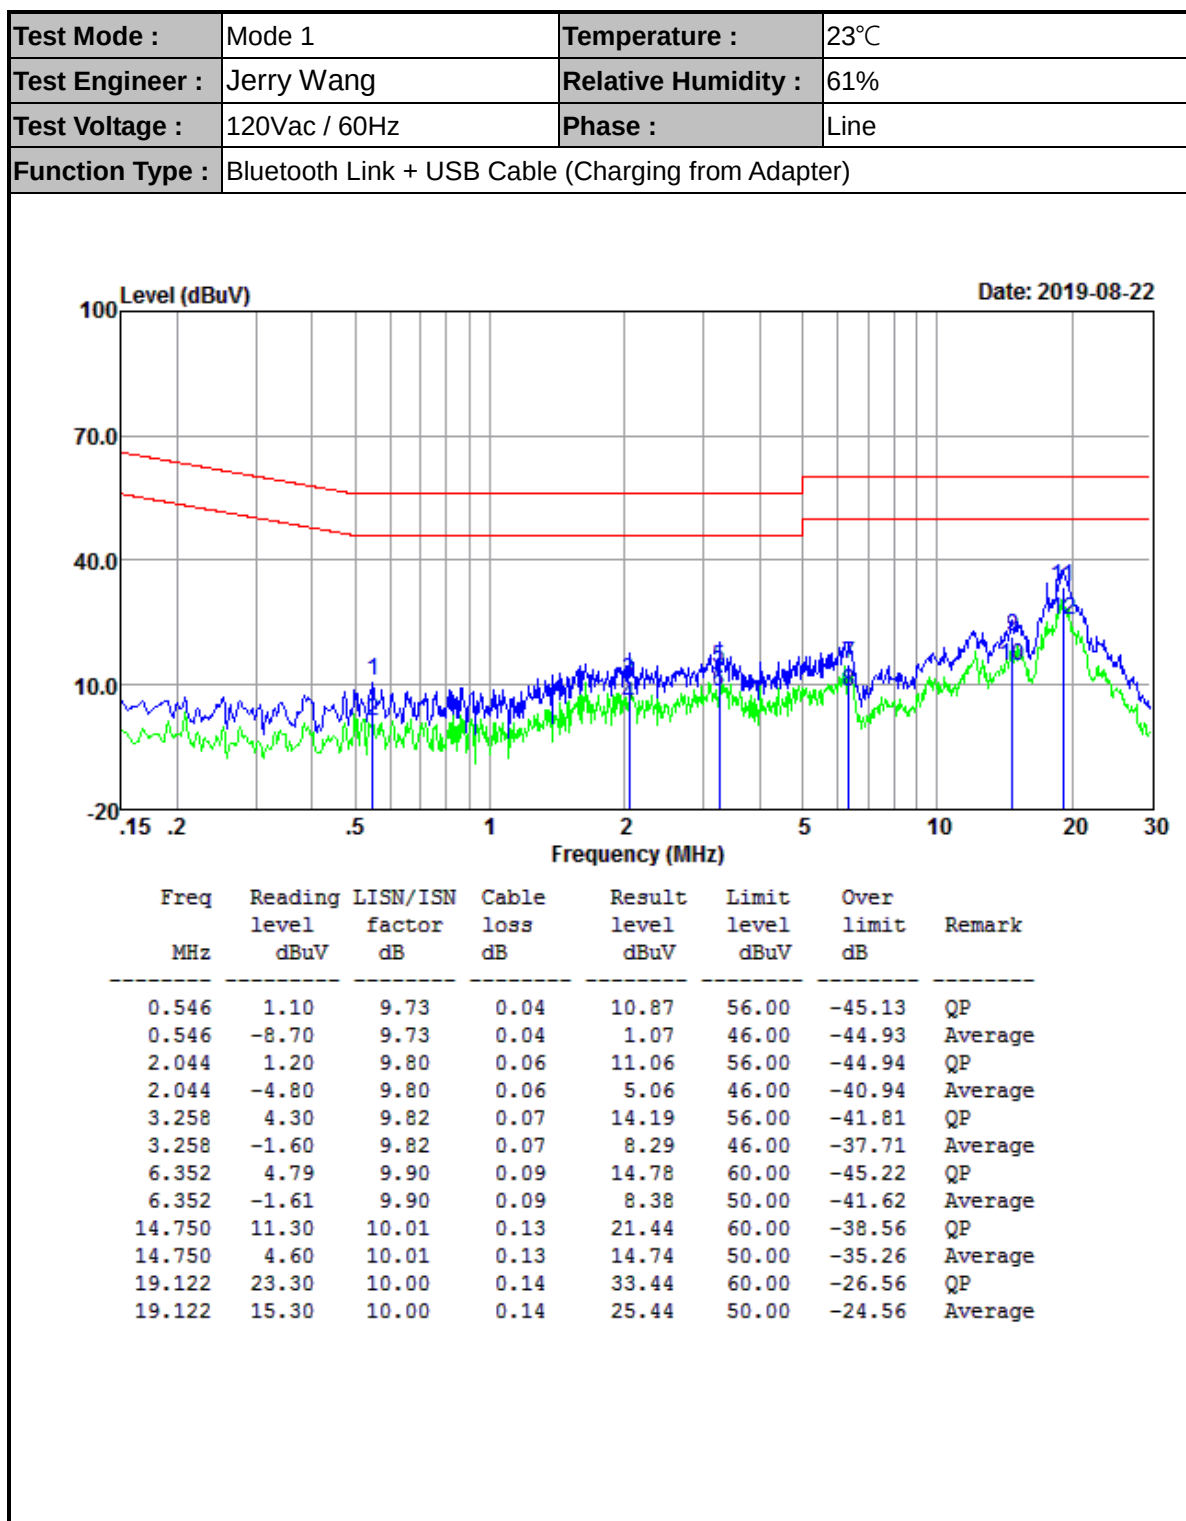

Test Mode :	Mode 1	Temperature :	23°C
Test Engineer :	Jerry Wang	Relative Humidity :	61%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + USB Cable (Charging from Adapter)		

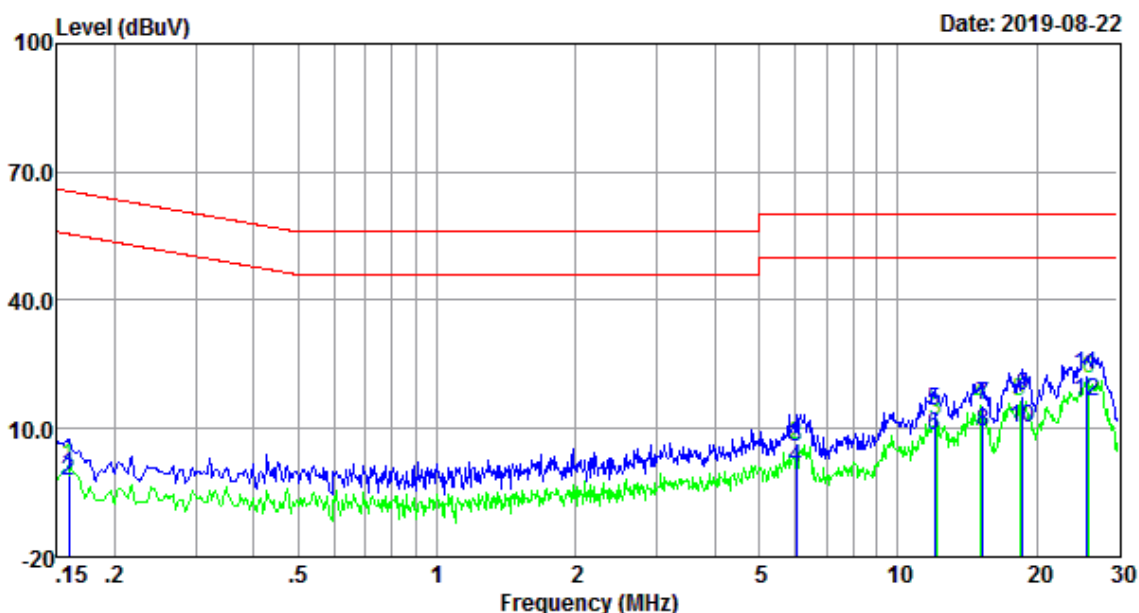

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	Result level dBuV	Limit level dBuV	Over limit dB	Remark
0.159	-10.50	9.59	0.04	-0.87	65.52	-66.39	QP
0.159	-11.80	9.59	0.04	-2.17	55.52	-57.69	Average
6.024	-4.10	9.79	0.09	5.78	60.00	-54.22	QP
6.024	-9.00	9.79	0.09	0.88	50.00	-49.12	Average
11.996	4.20	9.88	0.11	14.19	60.00	-45.81	QP
11.996	-1.60	9.88	0.11	8.39	50.00	-41.61	Average
15.307	5.40	9.90	0.13	15.43	60.00	-44.57	QP
15.307	-0.80	9.90	0.13	9.23	50.00	-40.77	Average
18.622	7.40	9.96	0.14	17.50	60.00	-42.50	QP
18.622	0.20	9.96	0.14	10.30	50.00	-39.70	Average
25.591	12.40	10.01	0.13	22.54	60.00	-37.46	QP
25.591	6.30	10.01	0.13	16.44	50.00	-33.56	Average

4.10 Antenna Requirements

4.10.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded..

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

4.10.2 Antenna Connected Construction

An embedded-in antenna design is used.

4.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY56070788	2019/1/23	2020/1/22	Conducted
Power Sensor	Keysight	U2021XA	MY56510025	2019/1/23	2020/1/22	Conducted
Power Sensor	Keysight	U2021XA	MY57030005	2019/1/23	2020/1/22	Conducted
Power Sensor	Keysight	U2021XA	MY56510018	2019/1/23	2020/1/22	Conducted
Power Sensor	Keysight	U2021XA	MY56480002	2019/1/23	2020/1/22	Conducted
Thermal Chamber	Sanmtest	SMC-408-CD	2435	2019/05/09	2020/05/08	Conducted
Base Station	R&S	CMW 270	101231	2019/1/23	2020/1/22	Conducted
Signal Generator (Blocker)	Keysight	N5171B	MY56200661	2019/1/23	2020/1/22	Conducted

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV 40	101433	2019/2/18	2020/2/17	Radiation
Amplifier	Sonoma	310	363917	2019/1/22	2020/1/21	Radiation
Amplifier	Schwarzbeck	BBV 9718	327	2019/1/22	2020/1/21	Radiation
Amplifier	Narda	TTA1840-35-HG	2034380	2019/05/15	2020/05/14	Radiation
Broadband Antenna	Schwarzbeck	VULB 9168	9168-757	2017-03-03	2020-03-02	Radiation
Horn Antenna	Schwarzbeck	BBHA 9120 D	1677	2017-03-03	2020-03-02	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2018-06-20	2021-06-19	Radiation
Test Software	Auidx	E3	6.111221a	N/A	N/A	Radiation
Filter	Micro-Tronics	BRM 50702	G266	N/A	N/A	Radiation

N/A: No Calibration Required

6 Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.60dB
Radiated emission	30MHz ~ 1GMHz	5.05dB
	1GHz ~ 18GHz	5.06 dB
	18GHz ~ 40GHz	3.65dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

-----End of the report-----