


Test Report

Applicant : PEAG, LLC dba JLab Audio
Address : 5927 LANDAU CT, Carlsbad, CA 92008, United States
Product Name : Wireless Headset
Brand Mark :  JLAB®
Model : Epic Lux Lab Edition
FCC ID : 2AHYV-ELUXLB
Report Number : BLA-EMC-202502-A2202
Date of Receipt : Feb. 12, 2025
Date of Test : Feb. 17, 2025 to Mar. 21, 2025
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Compiled by:



Review by:



Approved by:



Issued Date: Mar. 21, 2025

BlueAsia of Technical Services(Shenzhen) Co., Ltd.Address: Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China

The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

Table of Contents

1	General information	5
1.1	General information	5
1.2	General description of EUT	5
2	Test summary	6
3	Test Configuration	7
3.1	Test mode	7
3.2	Operation Frequency each of channel	8
3.3	Test channel	8
3.4	Auxiliary equipment	8
3.5	Test environment	8
4	Laboratory information	9
4.1	Laboratory and accreditations	9
4.2	Measurement uncertainty	9
5	Test equipment	10
6	Test result	12
6.1	Antenna requirement	12
6.2	Conducted emissions at AC power line (150 kHz-30 MHz)	13
6.3	Conducted peak output Power	17
6.4	Minimum 6dB bandwidth	18
6.5	Power spectrum density	19
6.6	Conducted Band Edges Measurement	20
6.7	Conducted spurious emissions	22
6.8	Radiated spurious emissions	24
6.9	Radiated emissions which fall in the restricted bands	35
7	Appendix A	42
7.1	Duty Cycle	错误! 未定义书签。
7.2	Maximum Conducted Output Power	42
7.3	-6dB Bandwidth	46
7.4	Occupied Channel Bandwidth	50
7.5	Maximum Power Spectral Density Level	54

7.6	Band Edge	58
7.7	Conducted RF Spurious Emission	63
Appendix B: photographs of test setup		70
Appendix C: photographs of EUT		72

BlueAsia

Revise Record

Version No.	Date	Description
01	Mar. 21, 2025	Original

1 General information

1.1 General information

Applicant	PEAG, LLC dba JLab Audio
Address	5927 LANDAU CT, Carlsbad, CA 92008, United States
Manufacturer	GuangDong Simpreal Intelligent Technology Co., Ltd
Address	Room 2408, JiaHong ZhenXing DaSha, DongGuan Avenue #13, DongCheng District, DongGuan City, GuangDong Province, P.R. China
Factory	GuangDong Simpreal Intelligent Technology Co., Ltd
Address	Room 2408, JiaHong ZhenXing DaSha, DongGuan Avenue #13, DongCheng District, DongGuan City, GuangDong Province, P.R. China

1.2 General description of EUT

Product name	Wireless Headset
Model no.	Epic Lux Lab Edition
Series model	N/A
Engineer test sample no	BLA-EMC-202502-A22- Headset
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Rate data:	1Mbps; 2Mbps
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	Internal antenna
Antenna Gain:	4.12dBi(Provided by customer)
Power supply or adapter information	DC3.7V by battery
Hardware Version	V1.2
Software Version	V1.0.36

Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2 Test summary

No.	Test item	FCC standard	Test Method(Clause)	Result
1	Antenna Requirement	§15.203	N/A	Pass
2	Conducted Emissions at AC Power Line (150kHz-30MHz)	§15.207	ANSI C63.10-2013 Clause 6.2	Pass
3	Conducted Peak Output Power	§15.247(b)(3)	ANSI C63.10-2013 Cluase 7.8.5	Pass
4	Minimum 6dB Bandwidth	§15.247a(2)	ANSI C63.10-2013 Cluase 11.8.1	Pass
5	Power Spectrum Density	§15.247(d)	ANSI C63.10-2013 Cluase 11.10.2	Pass
6	Conducted Band Edges Measurement	§15.247(d)	ANSI C63.10-2013 Cluase 11.13	Pass
7	Conducted Spurious Emissions	§15.247(d)	ANSI C63.10-2013 Cluase 11.11	Pass
8	Radiated Spurious Emissions	§15.209 §15.247(d)	ANSI C63.10-2013 Cluase 6.4,6.5,6.6	Pass
9	Radiated Emissions which fall in the restricted bands	§15.209 §15.247(d)	ANSI C63.10-2013 Cluase 11.12	Pass

N/A: Not Applicable

3 Test Configuration

3.1 Test mode


Test Mode ^{Note 1}	Description
TX	Keep the EUT in continuously transmitting with modulation mode.
RX	Keep the EUT in receiving mode
TX Low channel	Keep the EUT in continuously transmitting mode in low channel
TX middle channel	Keep the EUT in continuously transmitting mode in middle channel
TX high channel	Keep the EUT in continuously transmitting mode in high channel

Note 1: The EUT was configured to measure its highest possible emission and/or immunity level. The test modes were adapted according to the operation manual for use; the EUT was operated in the engineering mode ^{Note 2} to fix the TX or Rx frequency that was for the purpose of the measurements.

Note 2: Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

Power level setup in software			
Test Software Name	Non Signaling Test Tool		
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH00	2402	TX level: 0
	CH20	2442	
	CH40	2480	

Run Software

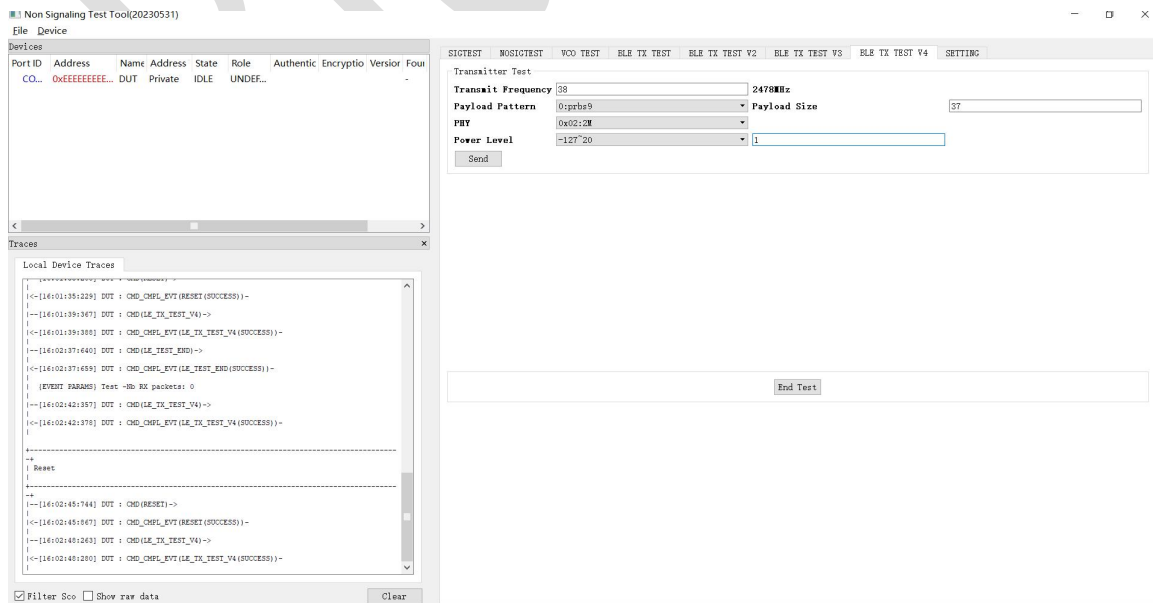

3.2 Operation Frequency each of channel

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	31	2462
1	2404	11	2424	21	2444	32	2464
2	2406	12	2426	22	2446	33	2466
3	2408	13	2428	23	2448	34	2468
4	2410	14	2430	23	2450	35	2470
5	2412	15	2432	24	2452	36	2472
6	2414	16	2434	25	2454	37	2474
7	2416	17	2436	26	2456	38	2476
8	2418	18	2438	29	2458	39	2478
9	2420	19	2440	30	2460	40	2480

3.3 Test channel

Channel	Frequency (MHz)
The lowest channel	2402
The middle channel	2442
The Highest channel	2480

3.4 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	Lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)

Note:
 “--” mean no any auxiliary device during testing.

3.5 Test environment

Environment	Temperature	Voltage
Normal	25°C	DC 3.7V

4 Laboratory information

4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

Company name:	BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Address:	Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
CNAS accredited No.:	L9788
A2LA Cert. No.:	5071.01
FCC Designation No.:	CN1252
ISED CAB identifier No.:	CN0028
Telephone:	+86-755-28682673
FAX:	+86-755-28682673

4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	$\pm 4.34\text{dB}$
Radiated Emission(30Mz-1000MHz)	$\pm 4.24\text{dB}$
Radiated Emission(1GHz-18GHz)	$\pm 4.68\text{dB}$
AC Power Line Conducted Emission(150kHz-30MHz)	$\pm 3.45\text{dB}$
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 1.5\text{ dB}$
Power Spectral Density, conducted	$\pm 3.0\text{ dB}$
Unwanted Emissions, conducted	$\pm 3.0\text{ dB}$
Temperature	$\pm 3\text{ }^{\circ}\text{C}$
Supply voltages	$\pm 3\%$
Time	$\pm 5\%$

5 Test equipment

Radiated Spurious Emissions (Below 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-002-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-002-02	Control room	966 control room	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2024/08/08	2025/08/07
BLA-EMC-043	Loop antenna	FMZB1519B	Schwarzbeck	00102	2024/06/29	2026/06/28
BLA-EMC-065	Broadband antenna	VULB9168	Schwarzbeck	01065P	2024/06/29	2026/06/27
BLA-XC-01	Coaxial Cable	N/A	BlueAsia	V01	N/A	N/A
BLA-XC-02	Coaxial Cable	N/A	BlueAsia	V02	N/A	N/A

Radiated Spurious Emissions (Above 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-001-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-001-02	Control Room	966 control room	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2024/08/08	2025/08/07
BLA-EMC-012	Broadband antenna	VULB9168	Schwarzbeck	00836 P:00227	2022/10/12	2025/10/11
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarzbeck	01892	2024/06/29	2026/06/28
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA201804 3003	2024/08/08	2025/08/07
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2024/06/28	2025/06/27
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2024/06/28	2025/06/27
BLA-EMC-066	Amplifier	LNPA_30M01 G-30	SKET	SK202106 0801	2024/06/28	2025/06/27
BLA-EMC-086	Amplifier	LNPA_18G40 G-50dB	SKET	SK202207 1301	2024/06/28	2025/06/27
BLA-EMC-087	Horn Antenna	BBHA 9170	Schwarzbeck	1106	2024/06/29	2026/06/28
BLA-XC-03	Coaxial Cable	N/A	BlueAsia	V03	N/A	N/A
BLA-XC-04	Coaxial Cable	N/A	BlueAsia	V04	N/A	N/A

Conducted Emissions

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-001	Shield room	8*3*3	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2024/08/08	2025/08/07
BLA-EMC-011	LISN	ENV216	R&S	101372	2024/08/08	2025/08/07
BLA-EMC-033	Impedance transformer	DC-2GHz	DFXP	N/A	2024/06/28	2025/06/27
BLA-EMC-041	LISN	AT166-2	ATTEN	AKK180600003	2024/08/08	2025/08/07
BLA-EMC-045	Impedance stable network	ISNT8-cat 6	TESEQ	53580	2024/08/08	2025/08/07
BLA-EMC-095	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01045	2024/06/28	2025/06/27
BLA-EMC-096	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01075	2024/06/28	2025/06/27
BLA-XC-05	Coaxial Cable	N/A	BlueAsia	V05	N/A	N/A

RF conducted

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-003	Shield room	5*3*3	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-016	Signal Generator	N5182A	Agilent	MY52420567	2024/06/28	2025/06/27
BLA-EMC-038	Spectrum	N9020A	Agilent	MY49100060	2024/08/08	2025/08/07
BLA-EMC-042	Power sensor	RPR3006W	DARE	14I00889SN042	2024/08/08	2025/08/07
BLA-EMC-044	Radio communication tester	CMW500	R&S	132429	2024/08/08	2025/08/07
BLA-EMC-064	Signal Generator	N5182B	KEYSIGHT	MY58108892	2024/06/28	2025/06/27
BLA-EMC-079	Spectrum	N9020A	Agilent	MY54420161	2024/08/08	2025/08/07
BLA-EMC-088	Audio Analyzer	ATS-1	Audio Precision	ATS141094	2024/06/28	2025/06/27

Test software

Software No.	Software Name	Manufacture	Software version	Test site
BLA-EMC-S001	EZ-EMC	EZ	EEMC-3A1+	RE(Below 1GHz)
BLA-EMC-S002	EZ-EMC	EZ	EEMC-3A1+	RE(Above 1GHz)
BLA-EMC-S003	EZ-EMC	EZ	EEMC-3A1+	CE
BLA-EMC-S010	MTS 8310	MW	2.0.0.0	RF

6 Test result

6.1 Antenna requirement

Test Standard	47 CFR Part 15, Subpart C 15.203
Test Method	N/A

6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of a so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 4.12 dBi.

6.2 Conducted emissions at AC power line (150 kHz-30 MHz)


Test Standard	47 CFR Part 15, Subpart C 15.207
Test Method	ANSI C63.10-2013 Cluase 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.2.1 Limit

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

6.2.2 Test setup

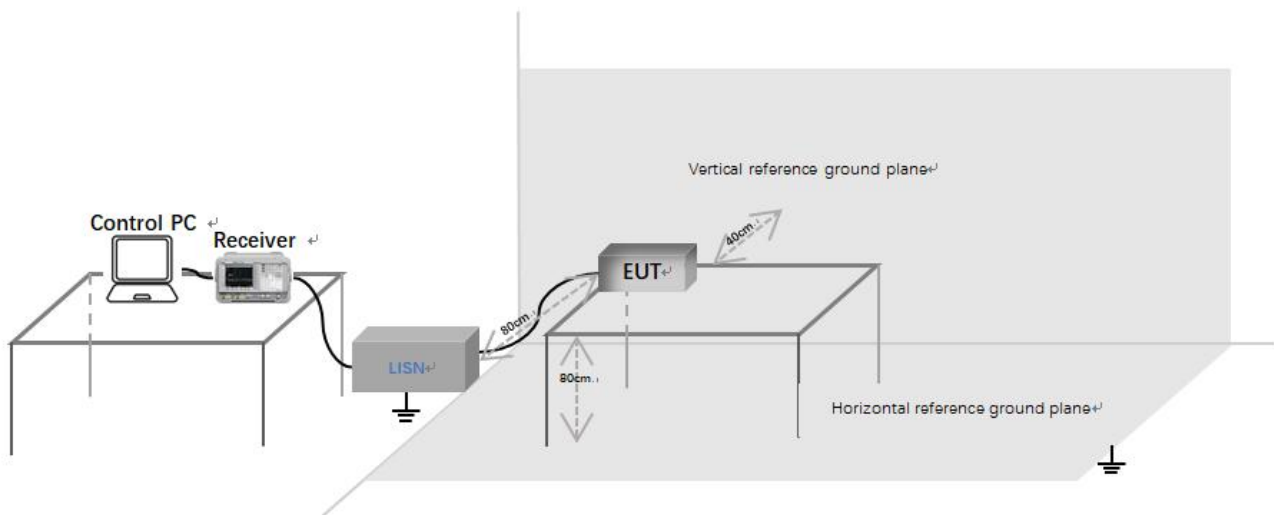

Description of test setup connection:

- Connect the control PC to the receiver through a USB to GPIB cable;
- The receiver is connected to the LISN through a coaxial line;
- Connect the power port of LISN to the EUT.


6.2.3 Procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

LISN=Read Level+ Cable Loss+ LISN Factor

6.2.4 Test data

[Test mode: TX]; [Line: Line];[Power:AC120V/60Hz]

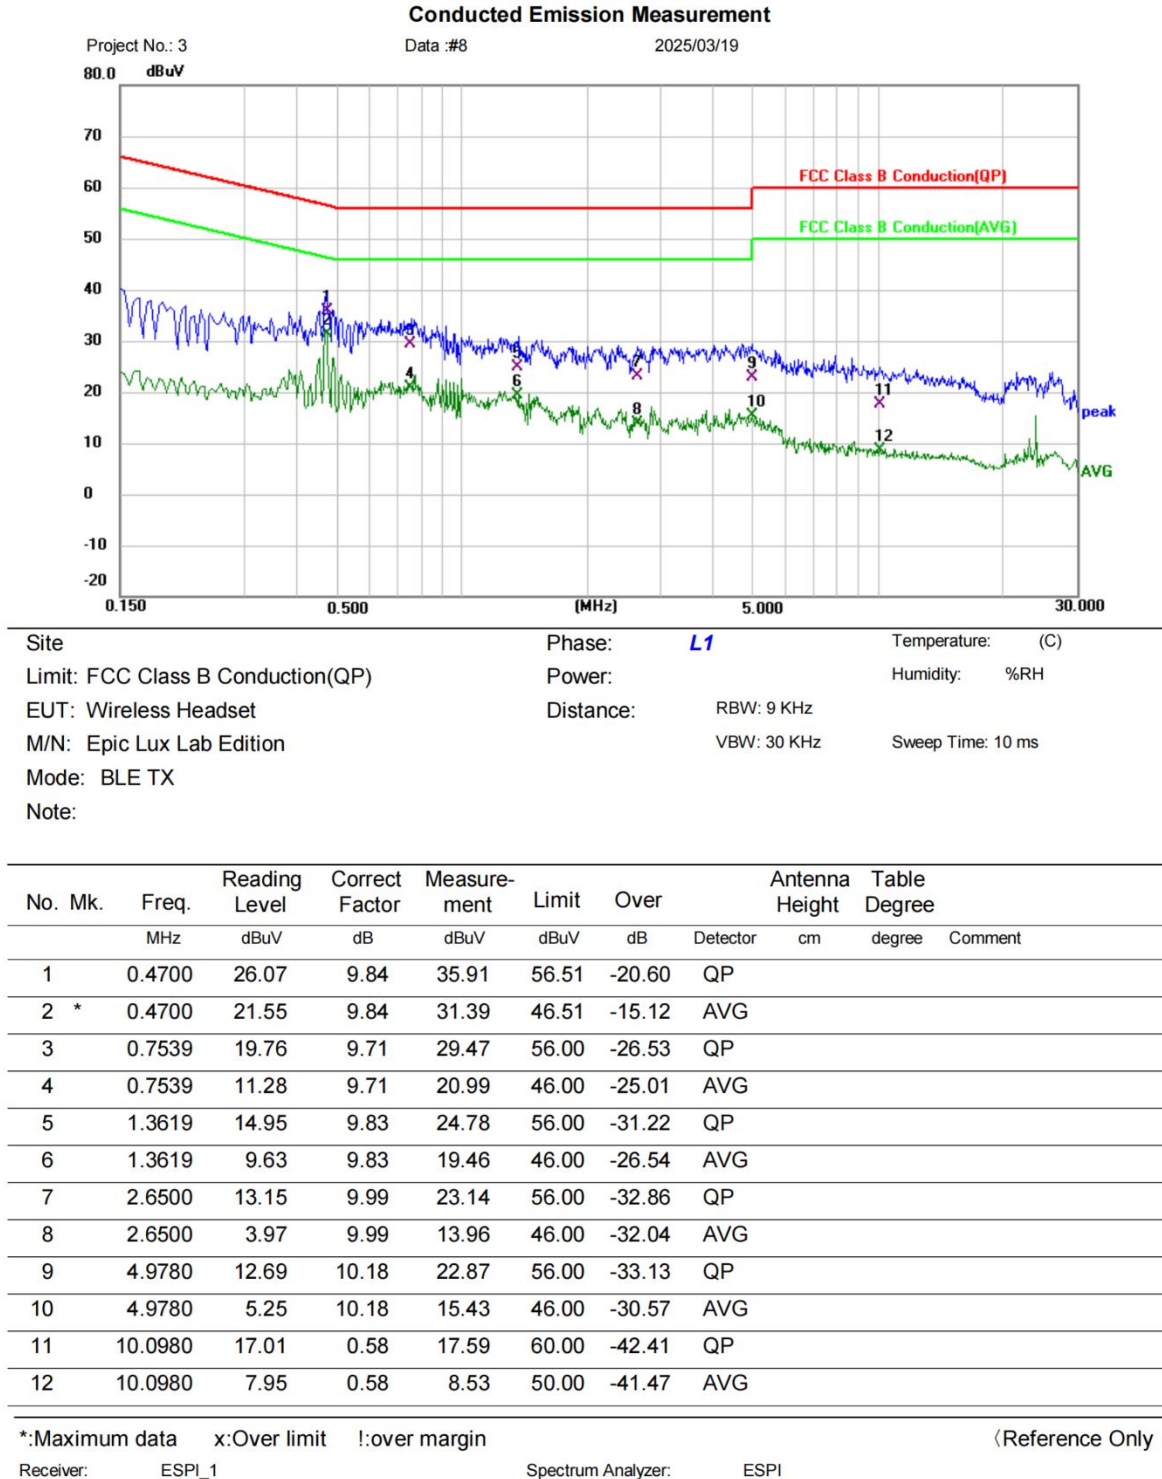

Test Result: Pass

[Test mode: TX]; [Line: Neutral];[Power:AC120V/60Hz]


Conducted Emission Measurement

Project No.: 3

Data :#7

2025/03/19

80.0 dBuV

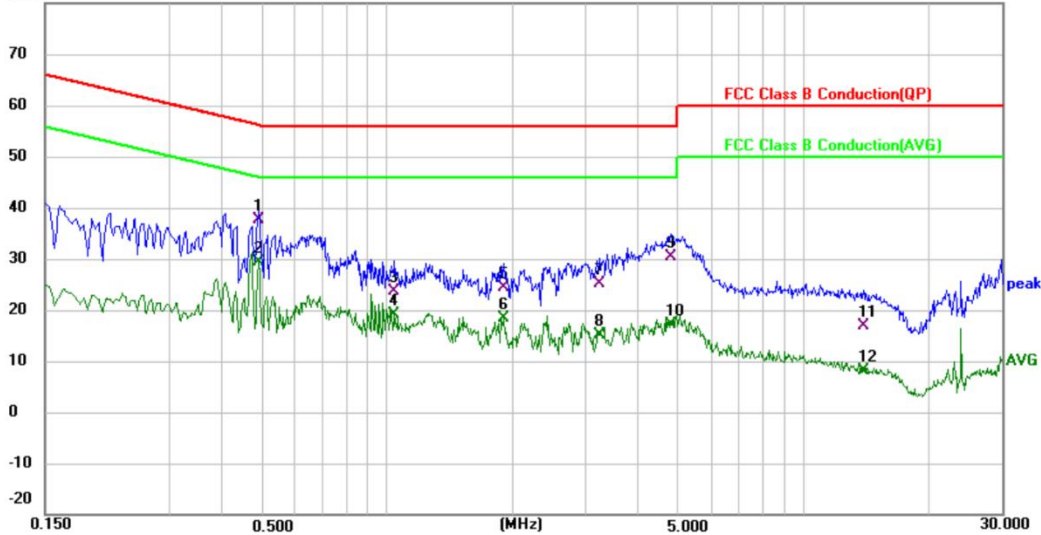

Site

Phase: **N**

Temperature: (C)

Limit: FCC Class B Conduction(QP)

Power:

Humidity: %RH

EUT: Wireless Headset

Distance:

RBW: 9 KHz

Sweep Time: 10 ms

M/N: Epic Lux Lab Edition

VBW: 30 KHz

Mode: BLE TX

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		0.4900	27.91	9.80	37.71	56.17	-18.46	QP		
2	*	0.4900	19.54	9.80	29.34	46.17	-16.83	AVG		
3		1.0420	13.99	9.72	23.71	56.00	-32.29	QP		
4		1.0420	9.52	9.72	19.24	46.00	-26.76	AVG		
5		1.8980	14.52	9.82	24.34	56.00	-31.66	QP		
6		1.8980	8.47	9.82	18.29	46.00	-27.71	AVG		
7		3.2340	15.06	9.96	25.02	56.00	-30.98	QP		
8		3.2340	5.27	9.96	15.23	46.00	-30.77	AVG		
9		4.7980	20.36	10.11	30.47	56.00	-25.53	QP		
10		4.7980	7.08	10.11	17.19	46.00	-28.81	AVG		
11		13.9260	5.43	11.57	17.00	60.00	-43.00	QP		
12		13.9260	-3.52	11.57	8.05	50.00	-41.95	AVG		

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Receiver: ESPI_1

Spectrum Analyzer: ESPI

Test Result: Pass


6.3 Conducted peak output Power

Test Standard	47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method	ANSI C63.10-2013 Clause 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.3.1 Limit

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

6.3.2 Test setup

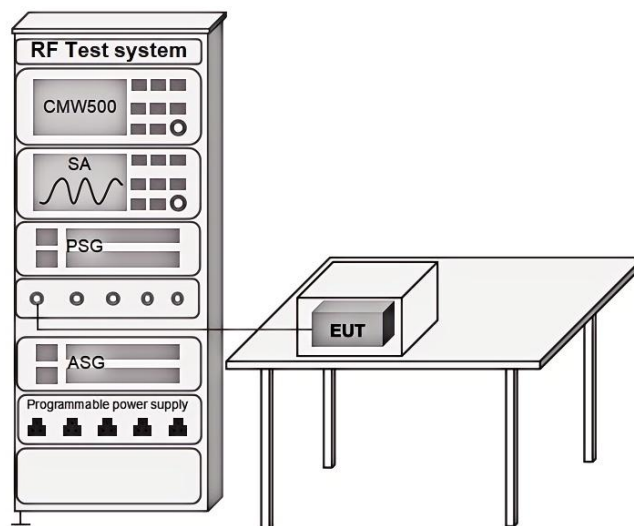

6.3.3 Test data

Pass: Please refer to appendix A for details

BlueAsia of Technical Services (Shenzhen) Co., Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version: v1.3


6.4 Minimum 6dB bandwidth

Test Standard	47 CFR Part 15, Subpart C 15.247a(2)
Test Method	ANSI C63.10-2013 Cluase 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.4.1 Limit

≥500 kHz

6.4.2 Test setup

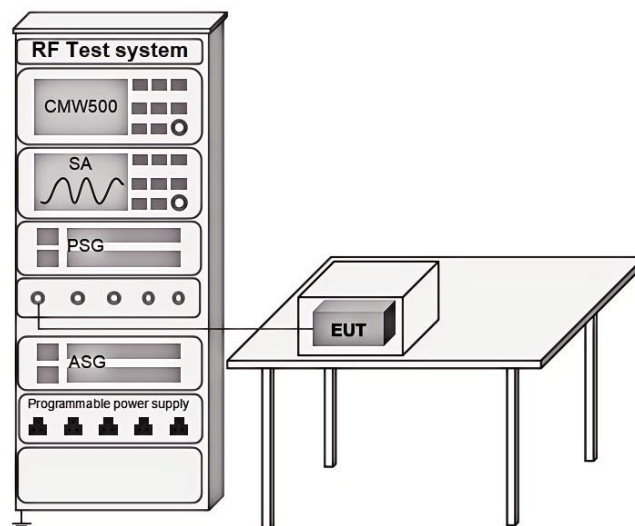

6.4.3 Test data

Pass: Please refer to appendix A for details


6.5 Power spectrum density

Test Standard	47 CFR Part 15, Subpart C 15.247(d)
Test Method	ANSI C63.10-2013 Clause 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.5.1 Limit

≤8dBm in any 3 kHz band during any time interval of continuous transmission

6.5.2 Test setup

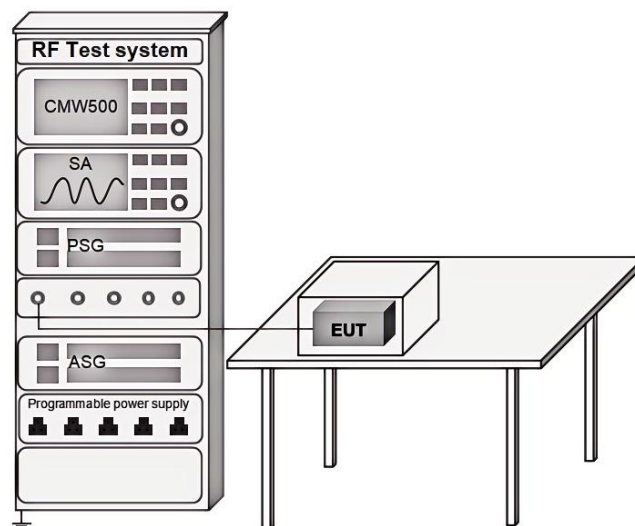

6.5.3 Test data

Pass: Please refer to appendix A for details

6.6 Conducted Band Edges Measurement

Test Standard	47 CFR Part 15, Subpart C 15.247(d)
Test Method	ANSI C63.10-2013 Cluase 11.13
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.6.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.6.2 Test setup

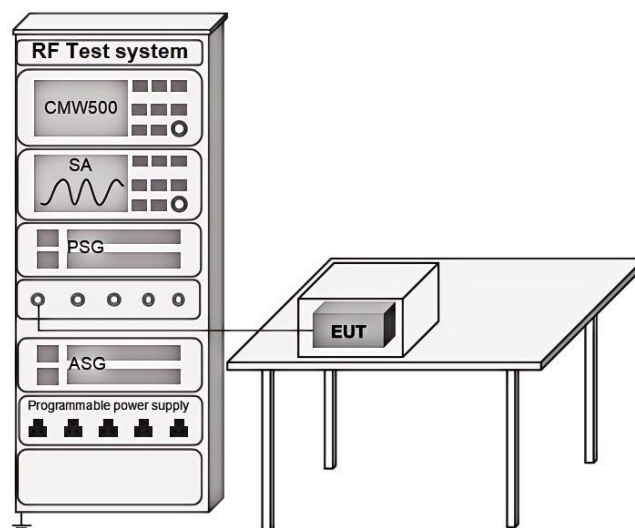

6.6.3 Test data

Pass: Please refer to appendix A for details

BlueAsia

6.7 Conducted spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247(d)
Test Method	ANSI C63.10-2013 Clause 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.7.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.7.2 Test setup

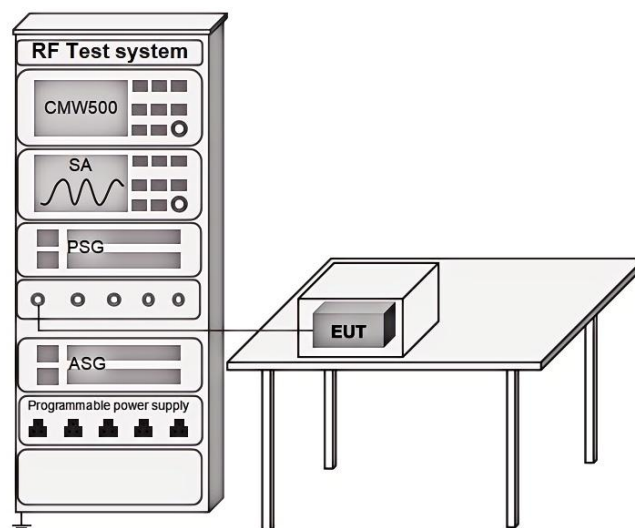

6.7.3 Test data

Pass: Please refer to appendix A for details

BlueAsia

6.8 Radiated spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247(d)
Test Method	ANSI C63.10-2013 Cluase 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.8.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.8.2 Test setup


Below 1GHz:

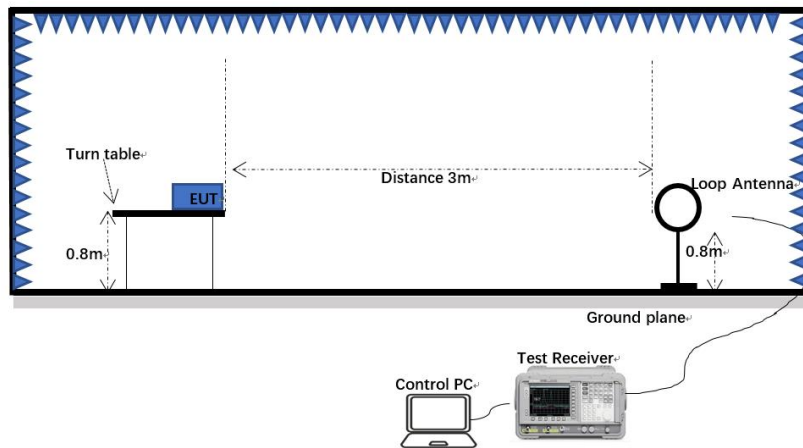

30MHz-1GHz:

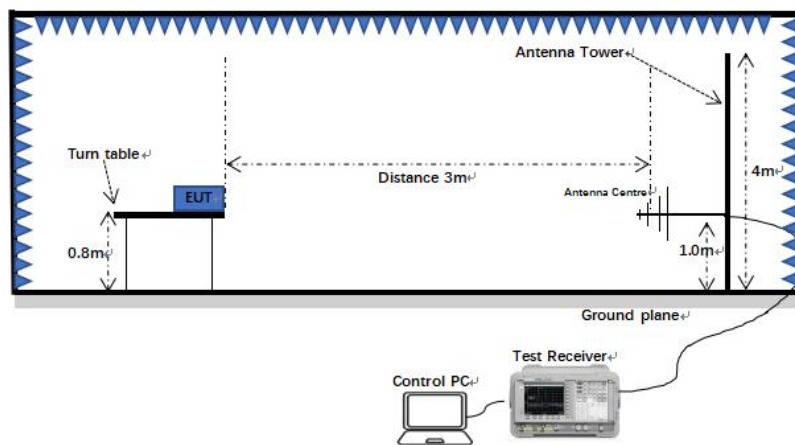

Above 1GHz:

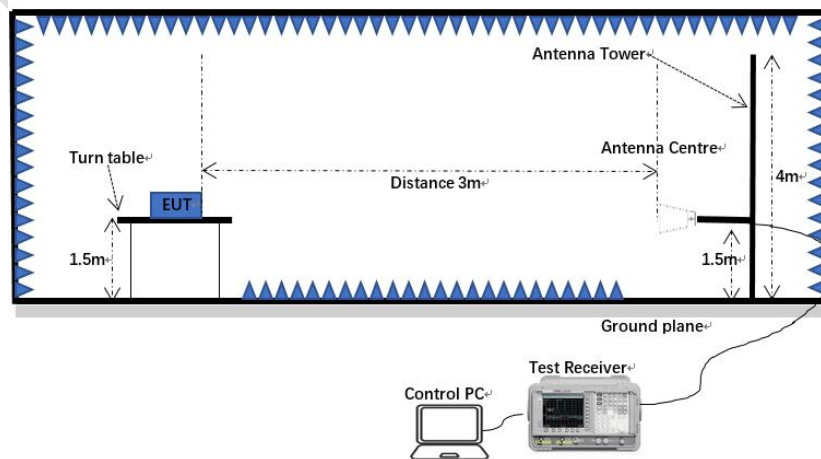

6.8.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Scan from 9 kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Note 3: The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Level (dBuV)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

6.8.4 Test data

Below 1GHz

[Test mode: TX]; [Polarity: Horizontal]

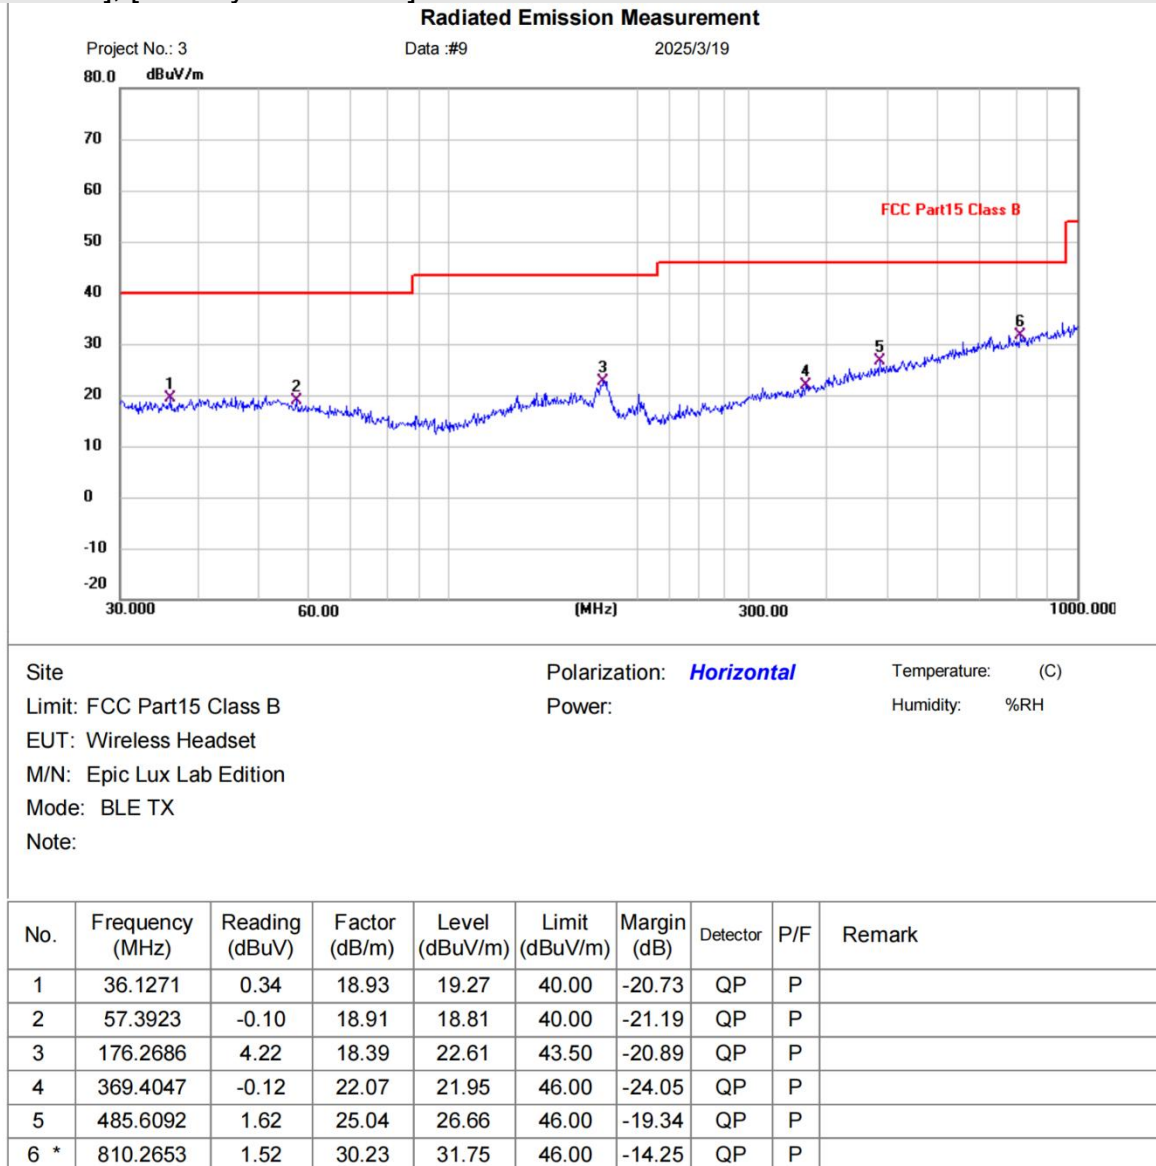

Test Result: Pass


BlueAsia of Technical Services (Shenzhen) Co., Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

[Test mode: TX]; [Polarity: Vertical]

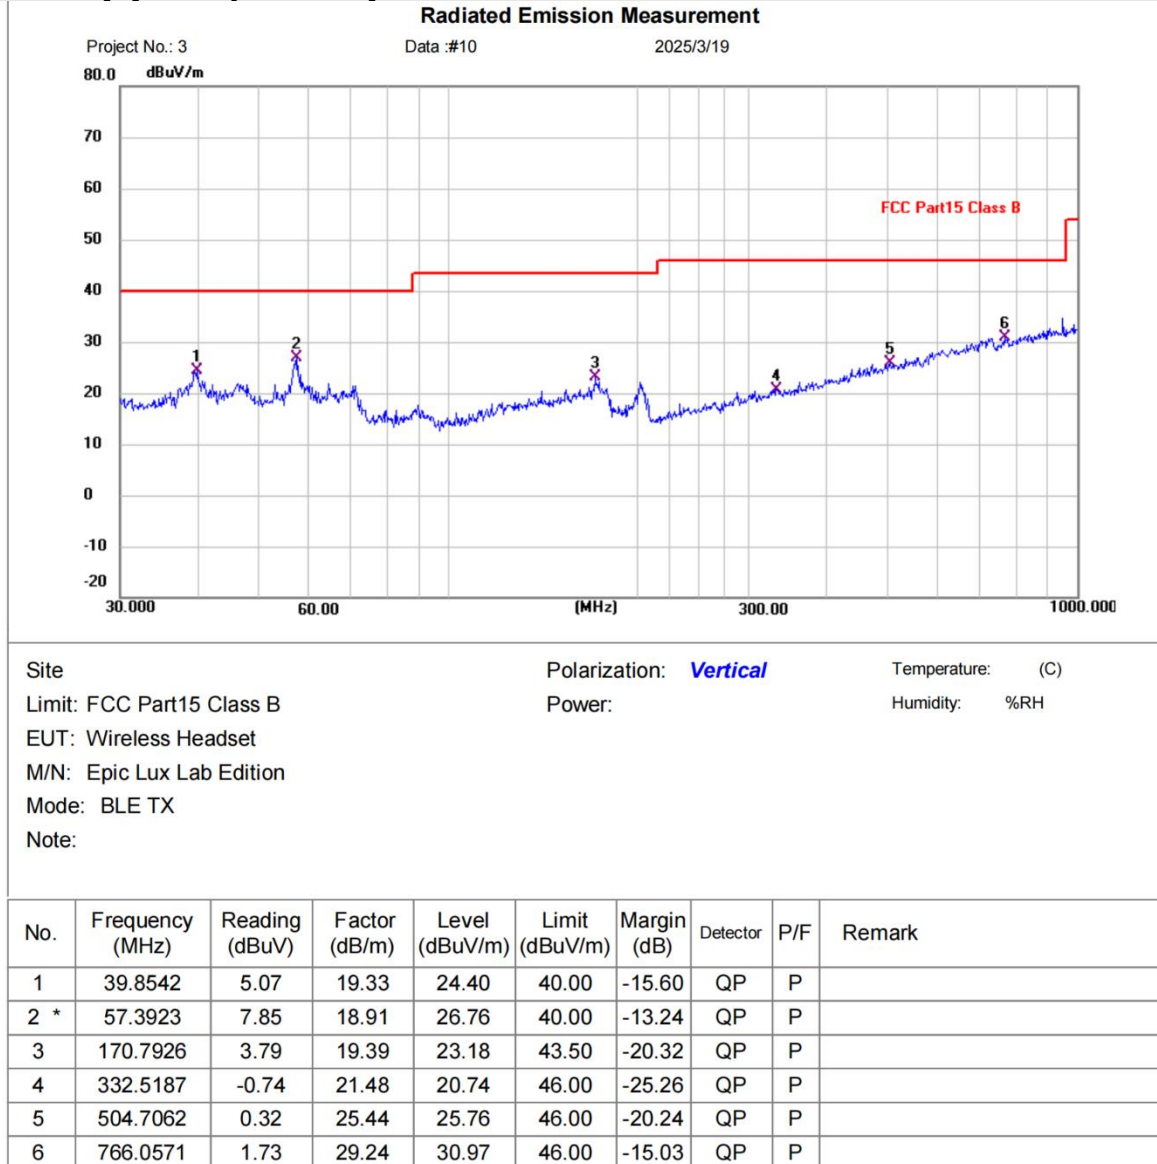


*Maximum data *Over limit *Lower margin

Test Result: Pass

Above 1GHz:

Remark: During the test, pre-scan the BLE1M/BLE2M mode, and found the BLE1M mode which it is worse case.

[Test mode: TX low channel]; [Polarity: Horizontal]

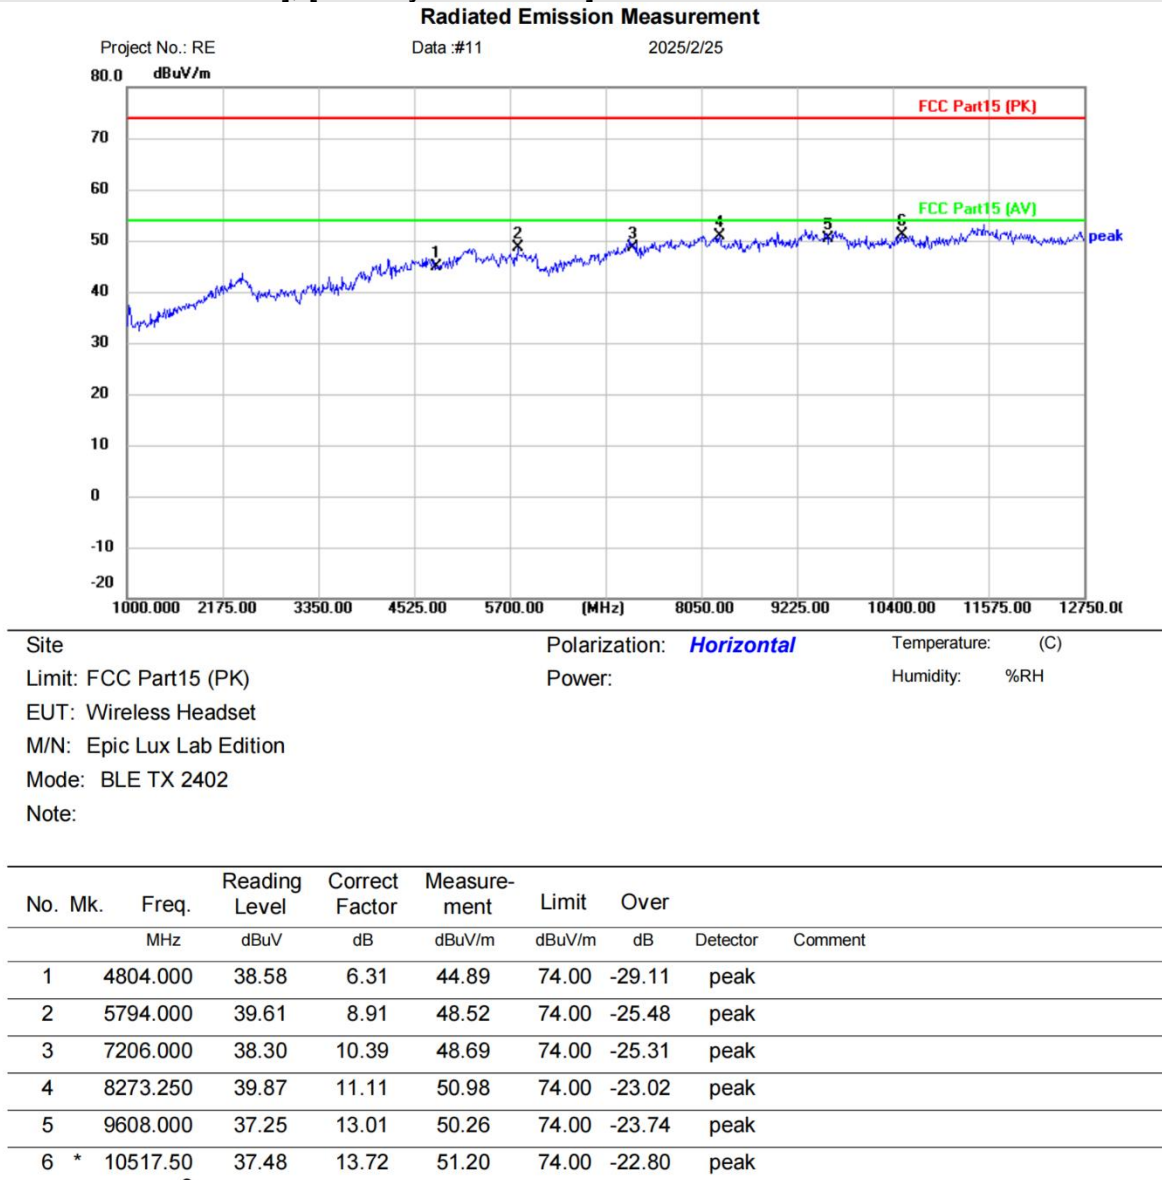

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass


BlueAsia of Technical Services (Shenzhen) Co., Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

[Test mode: TX low channel]; [Polarity: Vertical]

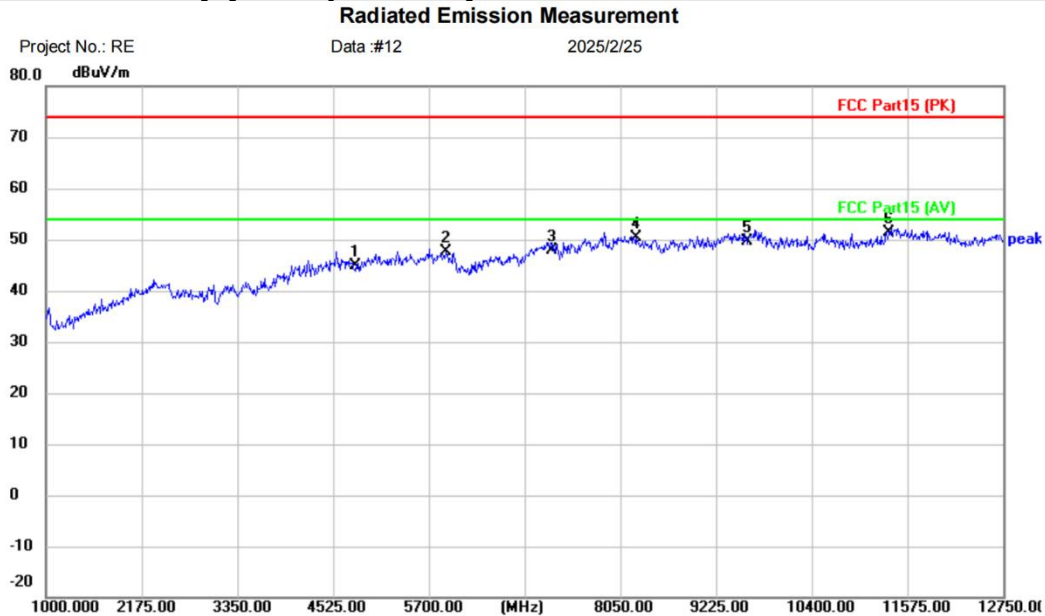

Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Wireless Headset
M/N: Epic Lux Lab Edition
Mode: BLE TX 2402
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4804.000	38.63	6.31	44.94	74.00	-29.06	peak	
2		5911.500	38.65	9.08	47.73	74.00	-26.27	peak	
3		7206.000	37.38	10.39	47.77	74.00	-26.23	peak	
4		8249.750	39.30	11.20	50.50	74.00	-23.50	peak	
5		9608.000	36.52	13.01	49.53	74.00	-24.47	peak	
6	*	11340.00	37.69	13.61	51.30	74.00	-22.70	peak	

*:Maximum data x:Over limit !:over margin


(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Horizontal]

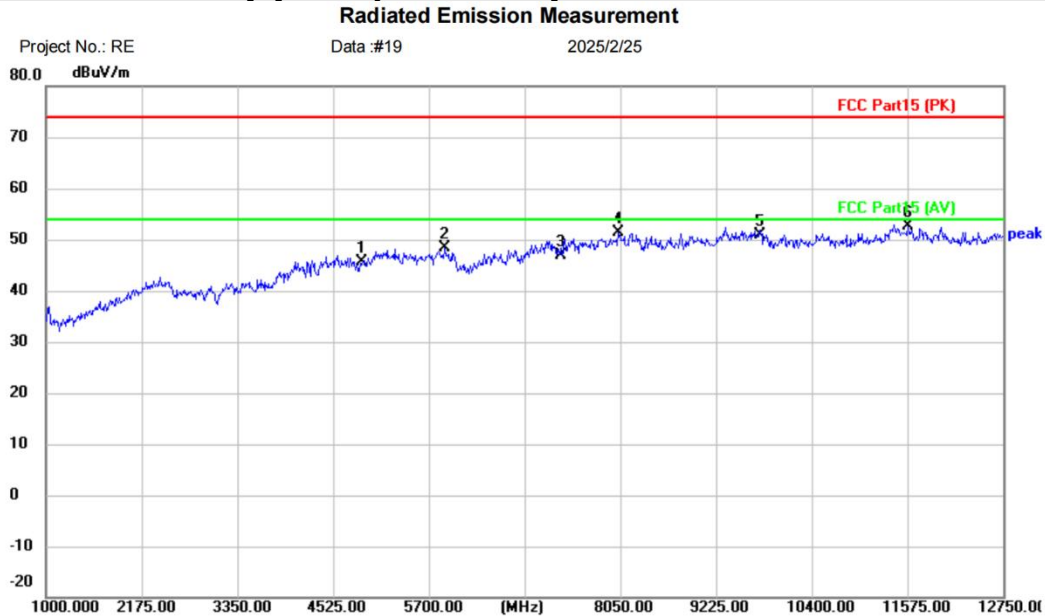

Site: Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Wireless Headset

M/N: Epic Lux Lab Edition

Mode: BLE TX 2442

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4884.000	39.22	6.45	45.67	74.00	-28.33	peak	
2		5899.750	39.25	9.10	48.35	74.00	-25.65	peak	
3		7326.000	36.67	10.21	46.88	74.00	-27.12	peak	
4		8026.500	39.70	11.65	51.35	74.00	-22.65	peak	
5		9768.000	37.02	13.75	50.77	74.00	-23.23	peak	
6	*	11586.75	37.79	14.79	52.58	74.00	-21.42	peak	

*:Maximum data x:Over limit !:over margin


(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Vertical]

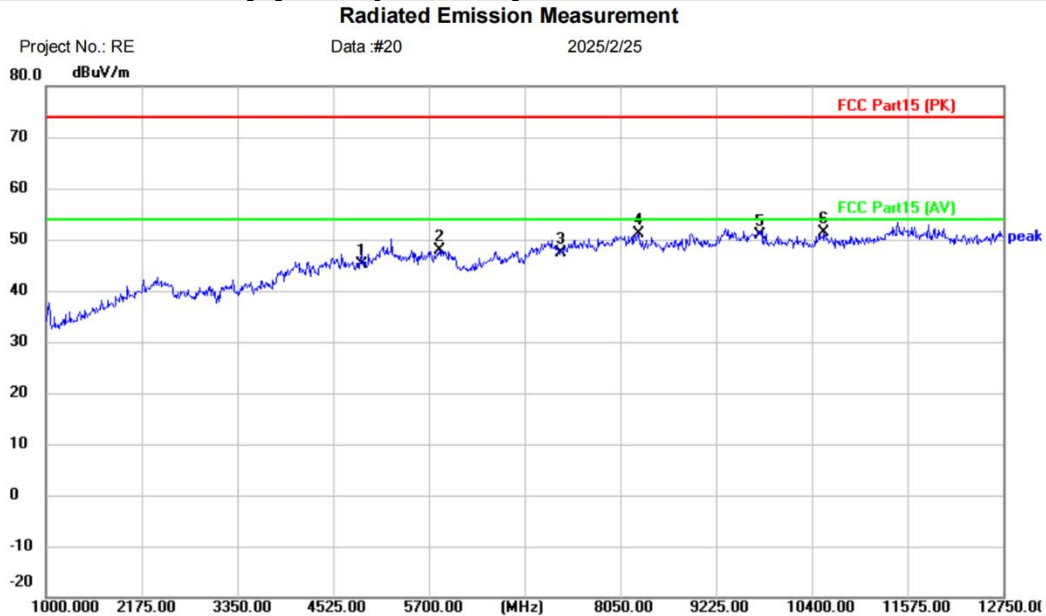

Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Wireless Headset
M/N: Epic Lux Lab Edition
Mode: BLE TX 2442
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4884.000	38.68	6.45	45.13	74.00	-28.87	peak	
2		5829.250	39.03	8.93	47.96	74.00	-26.04	peak	
3		7326.000	37.22	10.21	47.43	74.00	-26.57	peak	
4		8273.250	39.92	11.11	51.03	74.00	-22.97	peak	
5		9768.000	37.04	13.75	50.79	74.00	-23.21	peak	
6	*	10552.75	37.62	13.67	51.29	74.00	-22.71	peak	

*:Maximum data x:Over limit !:over margin


(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

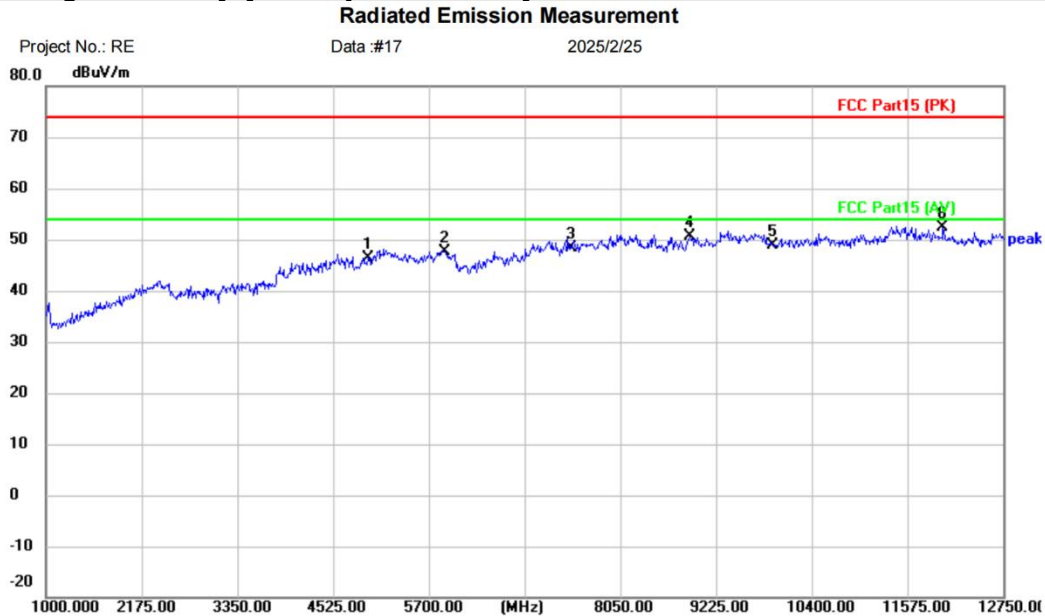

Site: Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Wireless Headset

M/N: Epic Lux Lab Edition

Mode: BLE TX 2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4960.000	39.04	7.41	46.45	74.00	-27.55	peak	
2		5888.000	38.65	9.05	47.70	74.00	-26.30	peak	
3		7440.000	37.43	11.03	48.46	74.00	-25.54	peak	
4		8907.750	37.98	12.57	50.55	74.00	-23.45	peak	
5		9920.000	35.72	13.16	48.88	74.00	-25.12	peak	
6	*	12009.75	38.16	14.22	52.38	74.00	-21.62	peak	

*:Maximum data x:Over limit !:over margin


(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Vertical]

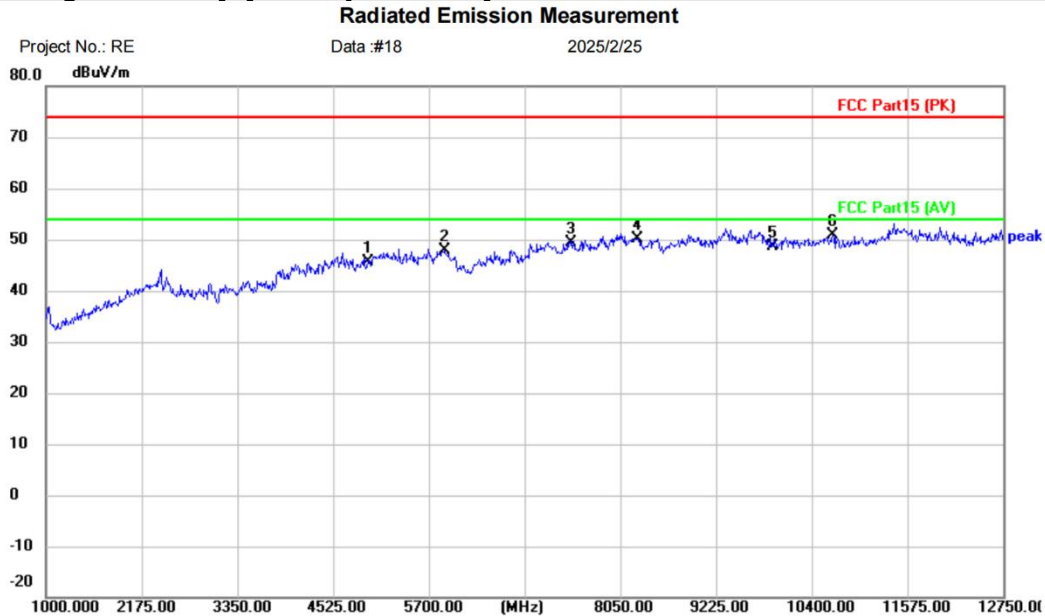

Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Wireless Headset
M/N: Epic Lux Lab Edition
Mode: BLE TX 2480
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	38.13	7.41	45.54	74.00	-28.46	peak	
2		5888.000	38.86	9.05	47.91	74.00	-26.09	peak	
3		7440.000	38.42	11.03	49.45	74.00	-24.55	peak	
4		8261.500	39.01	11.15	50.16	74.00	-23.84	peak	
5		9920.000	35.35	13.16	48.51	74.00	-25.49	peak	
6	*	10658.50	37.74	13.15	50.89	74.00	-23.11	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

6.9 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart C 15.247(d)
Test Method	ANSI C63.10-2013 Clause 6.12
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.9.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.9.2 Test setup


Below 1GHz:

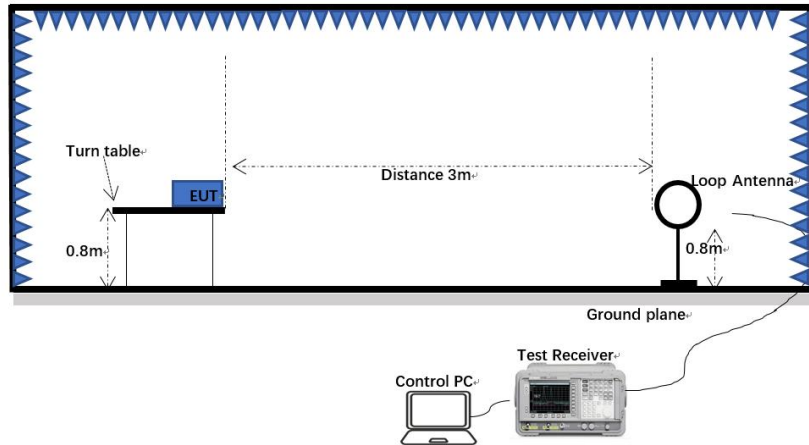

30MHz-1GHz:

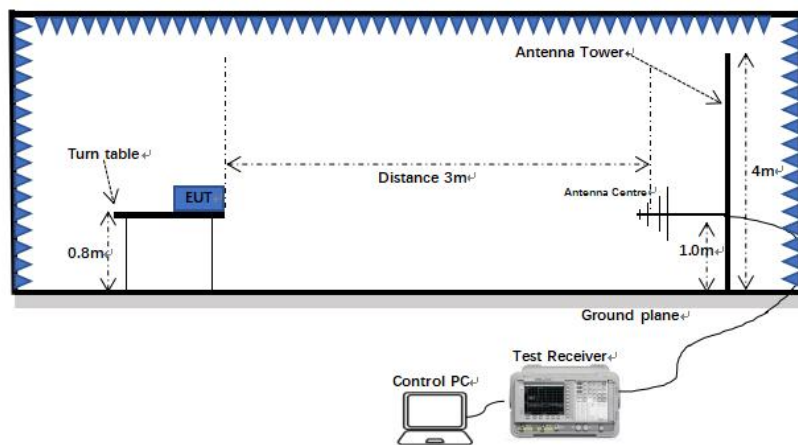

Above 1GHz:

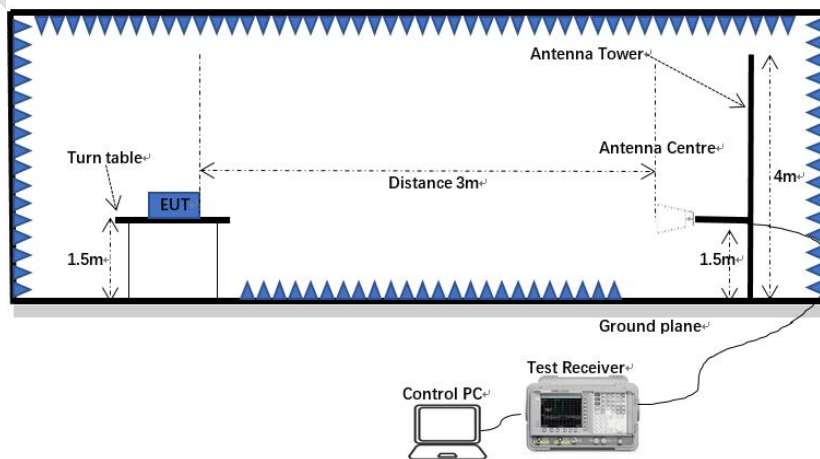

6.9.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.


Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.9.4 Test data

Remark: During the test, pre-scan the BLE1M/BLE2M mode, and found the BLE1M mode which it is worse case.

[Test mode: TX low channel]; [Polarity: Horizontal]

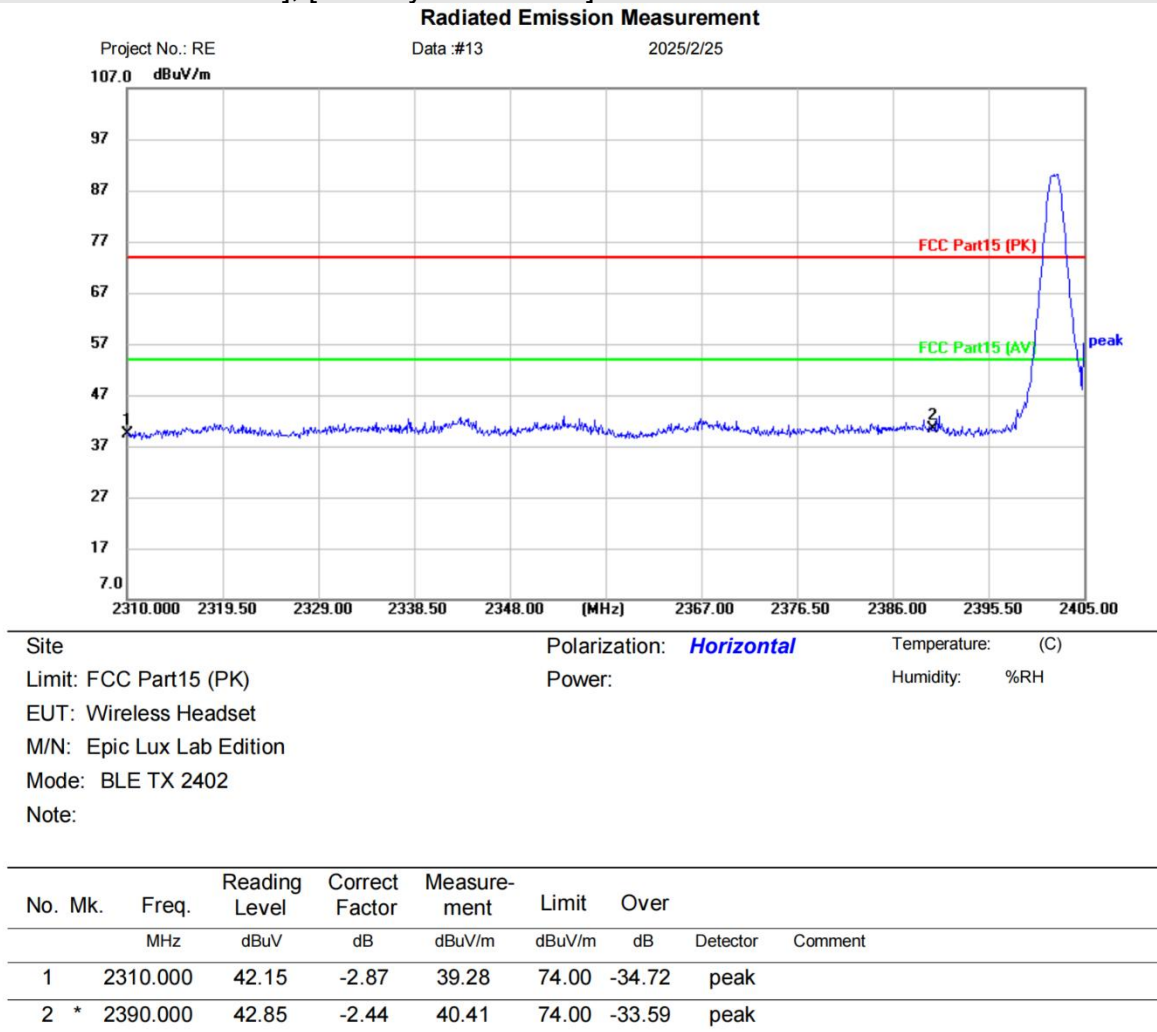

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer:

FSP40

Test Result: Pass


BlueAsia of Technical Services (Shenzhen) Co., Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Version:v1.3

[Test mode:TX low channel]; [Polarity: Vertical]

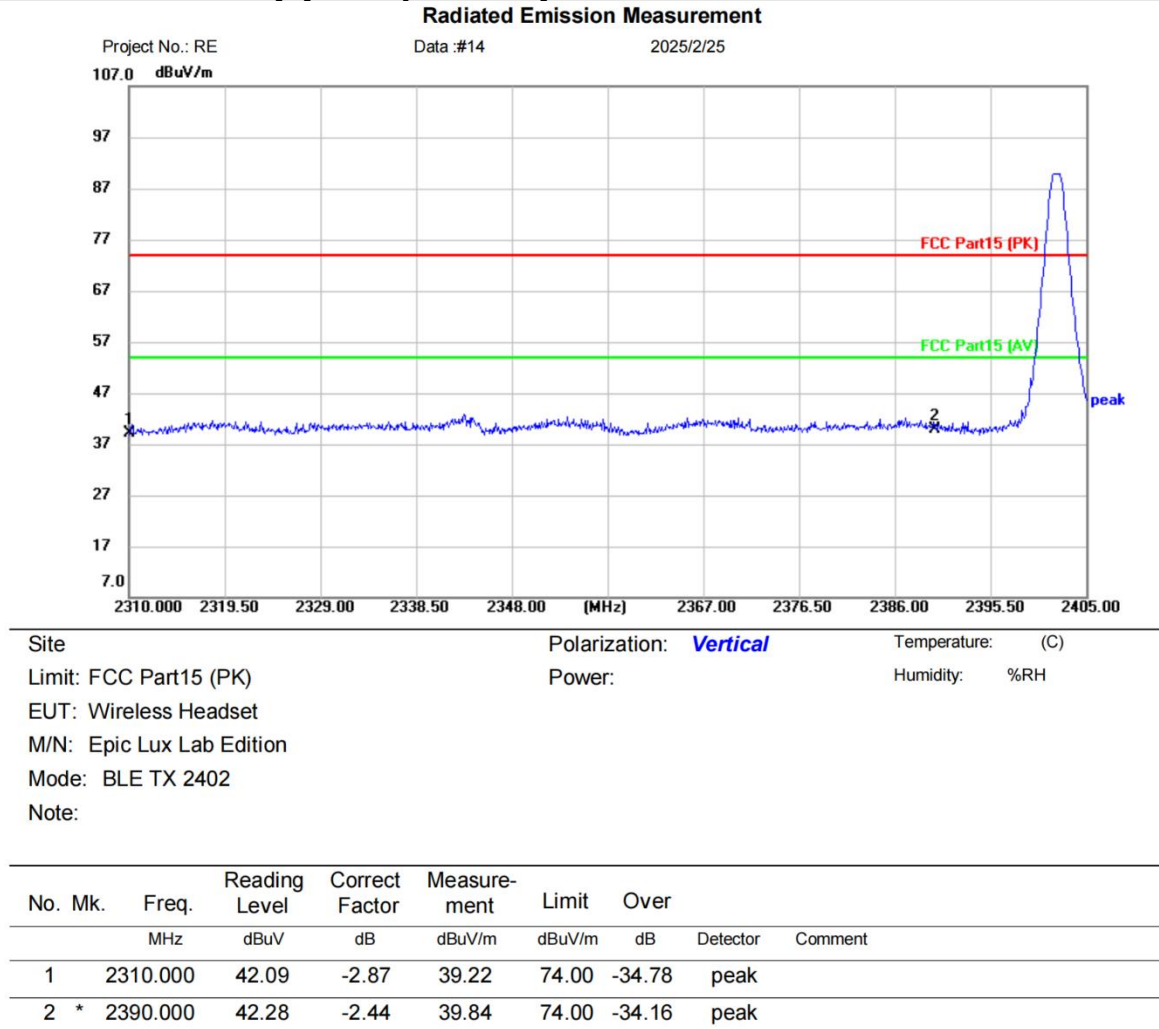

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1


Spectrum Analyzer:

FSP40

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

Radiated Emission Measurement

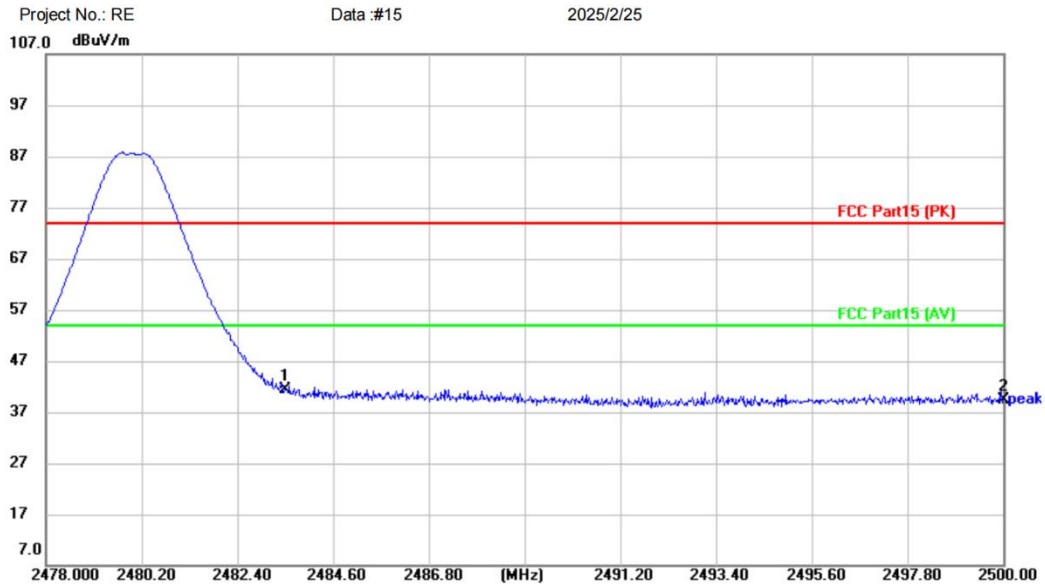

Site Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headset
 M/N: Epic Lux Lab Edition
 Mode: BLE TX 2480
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2483.500	44.35	-2.91	41.44	74.00	-32.56	peak	
2		2500.000	42.29	-3.00	39.29	74.00	-34.71	peak	

*:Maximum data x:Over limit !:over margin


(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40

Test Result: Pass

[Test mode:TX High channel]; [Polarity: Vertical]

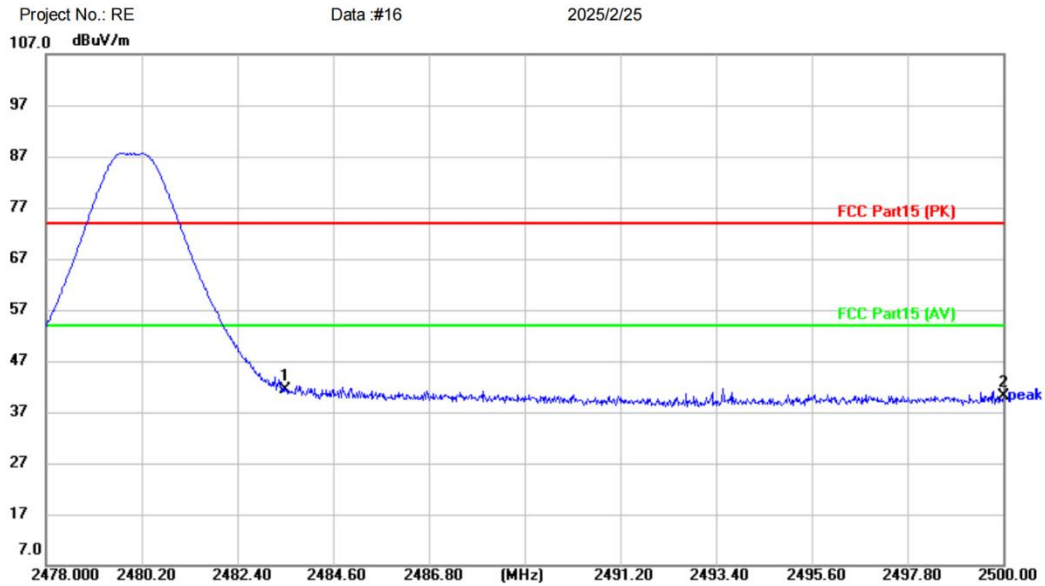Radiated Emission Measurement


Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Wireless Headset
M/N: Epic Lux Lab Edition
Mode: BLE TX 2480
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	44.35	-2.91	41.44	74.00	-32.56	peak	
2		2500.000	43.08	-3.00	40.08	74.00	-33.92	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Receiver: ESR_1

Spectrum Analyzer: FSP40


Test Result: Pass

7 Appendix A


7.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-1.636	30	Pass
NVNT	BLE 1M	2442	Ant1	-1.442	30	Pass
NVNT	BLE 1M	2480	Ant1	-1.725	30	Pass
NVNT	BLE 2M	2402	Ant1	-1.648	30	Pass
NVNT	BLE 2M	2442	Ant1	-2.079	30	Pass
NVNT	BLE 2M	2480	Ant1	-1.634	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

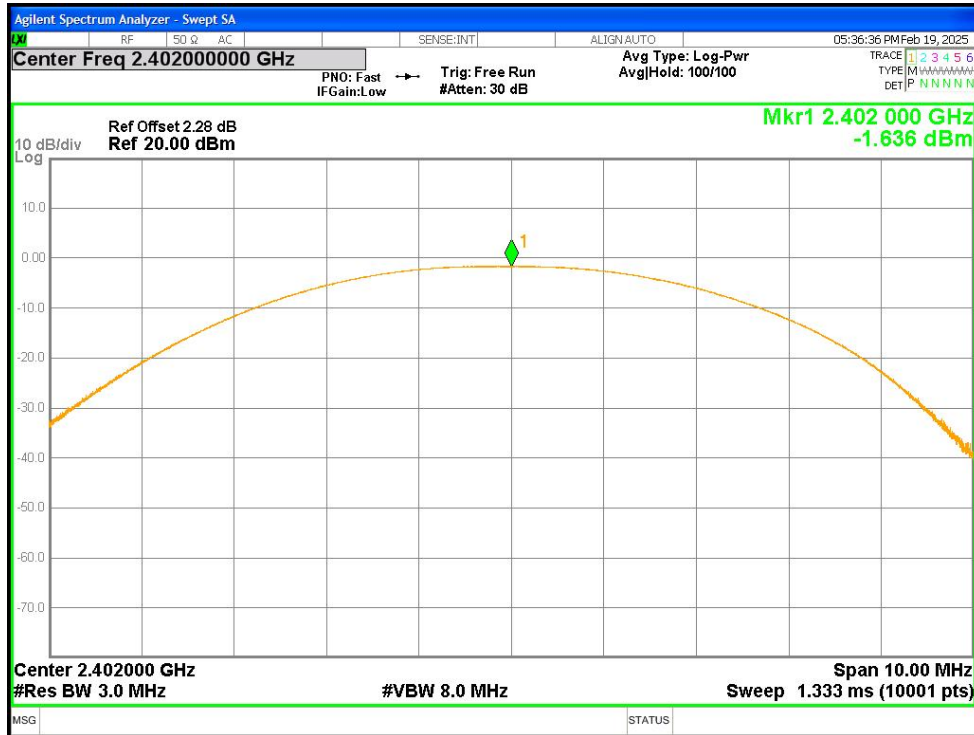


Power NVNT BLE 1M 2442MHz Ant1

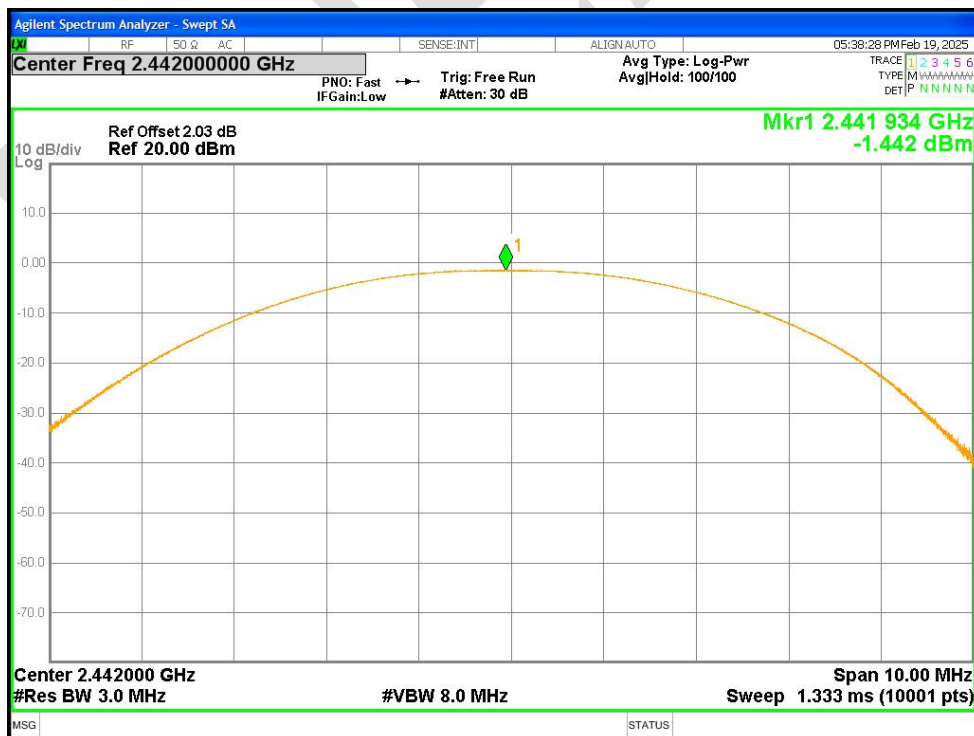


Power NVNT BLE 1M 2480MHz Ant1

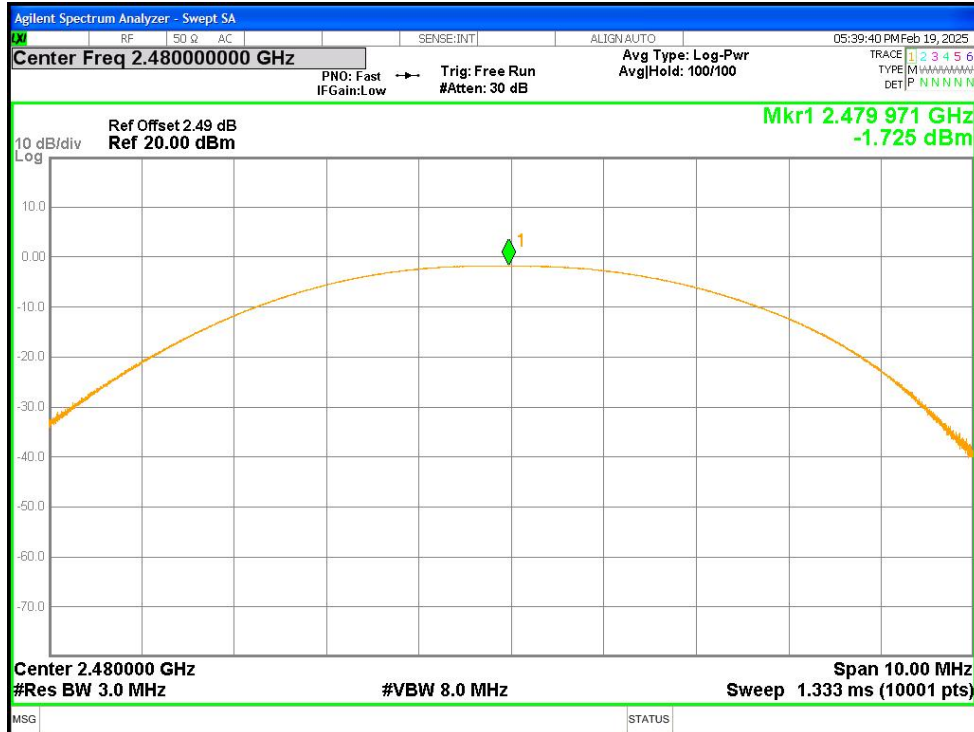


Power NVNT BLE 2M 2402MHz Ant1

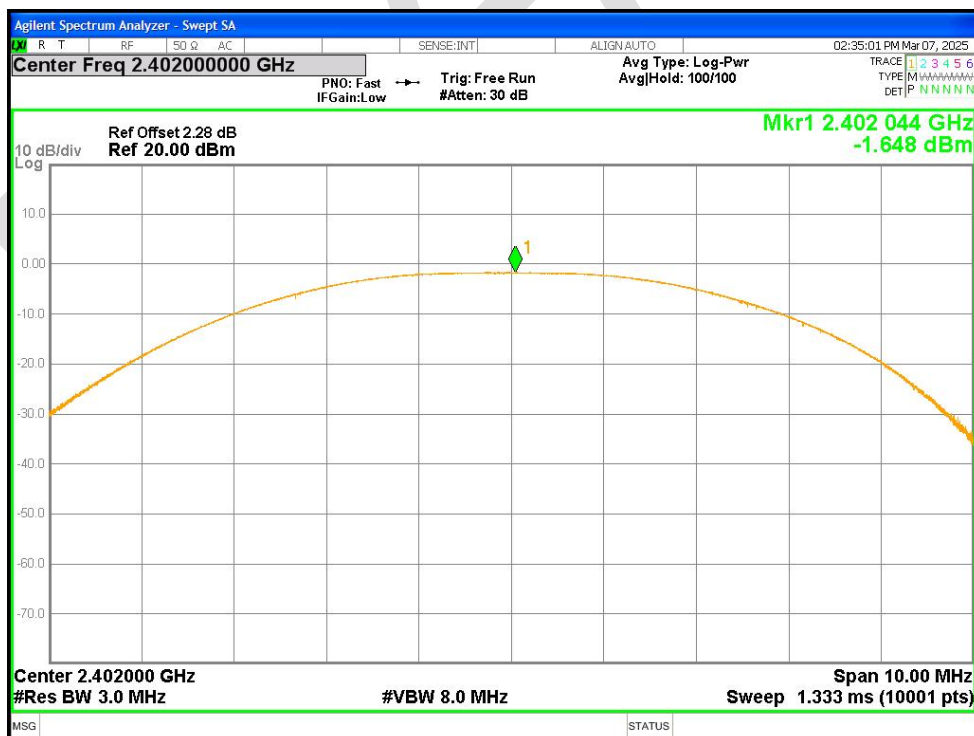

Power NVNT BLE 2M 2442MHz Ant1

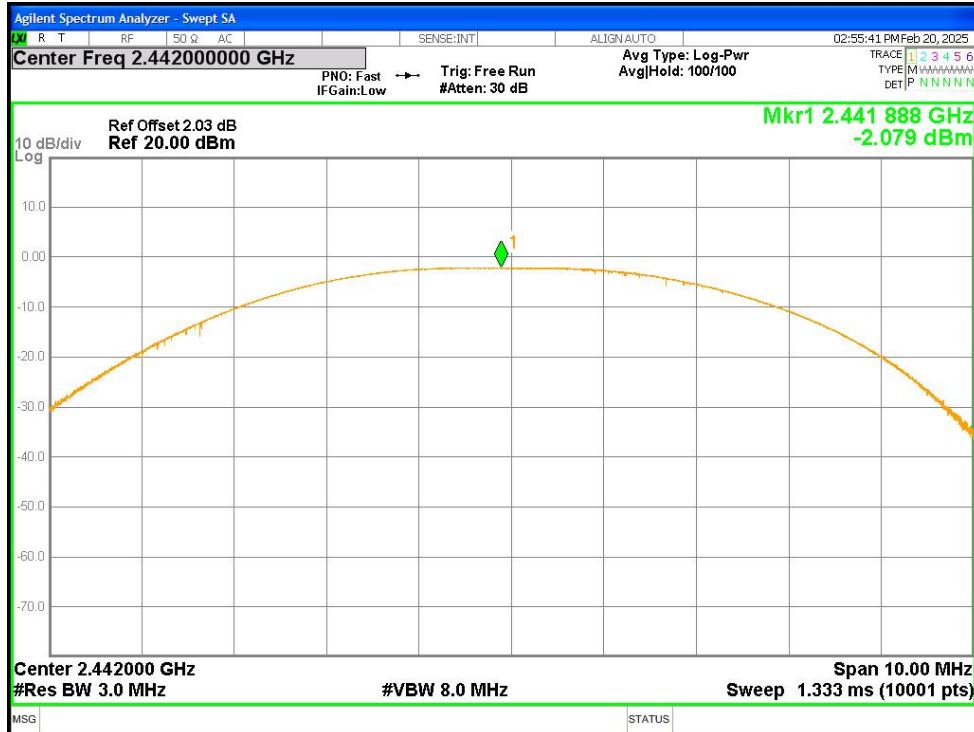


Power NVNT BLE 2M 2480MHz Ant1

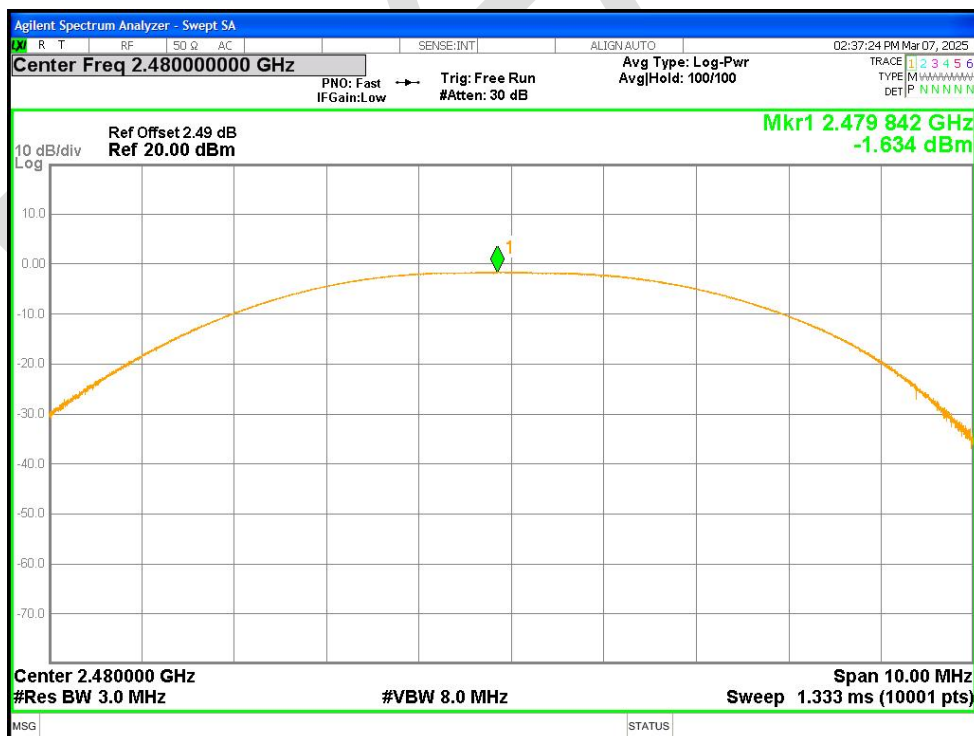


7.2 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.651	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.661	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.651	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.097	0.5	Pass
NVNT	BLE 2M	2442	Ant1	1.133	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.088	0.5	Pass


-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

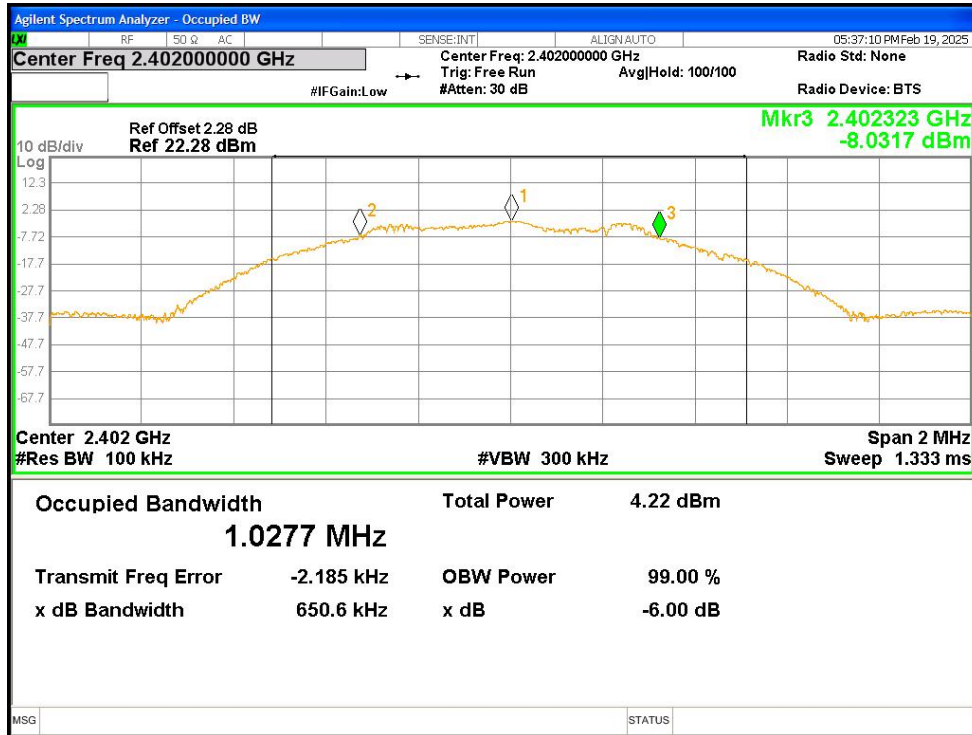


-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

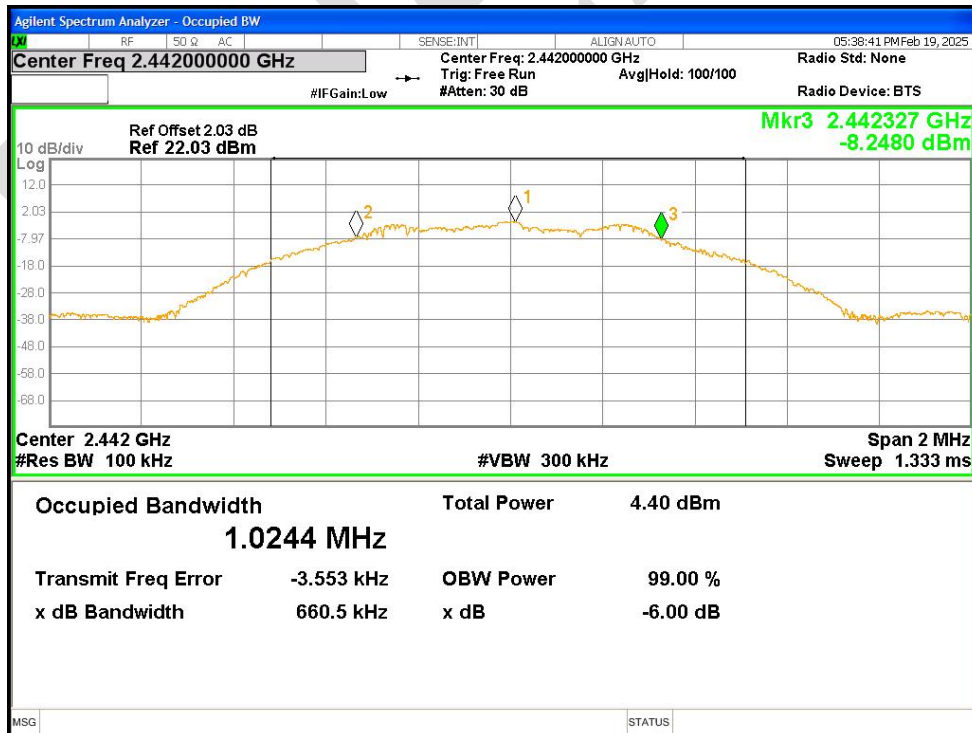


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

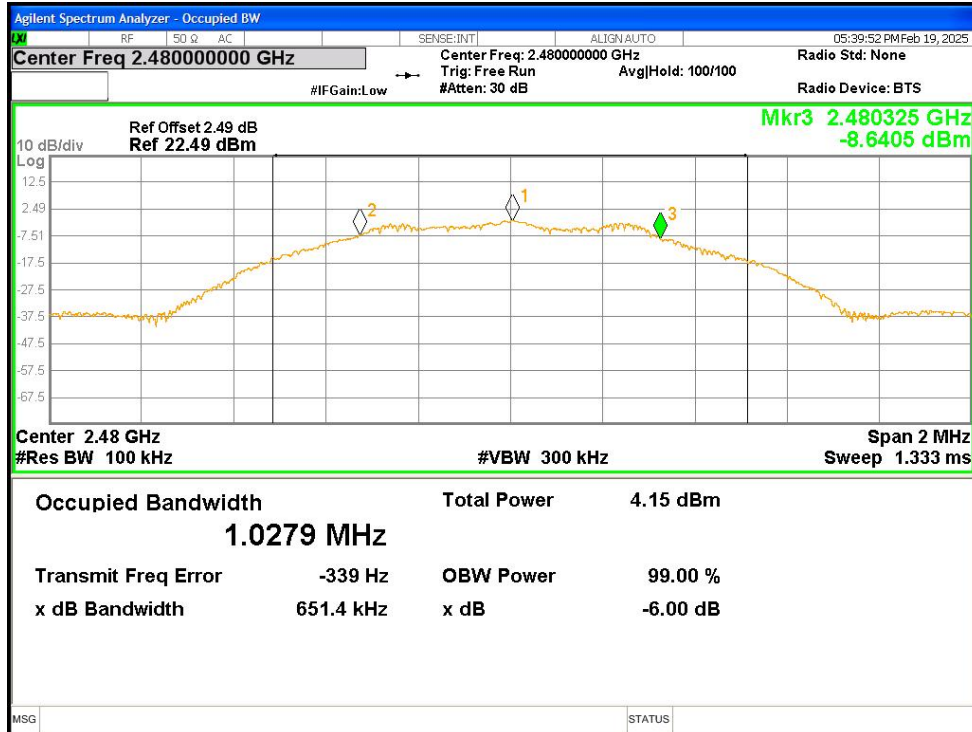


-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

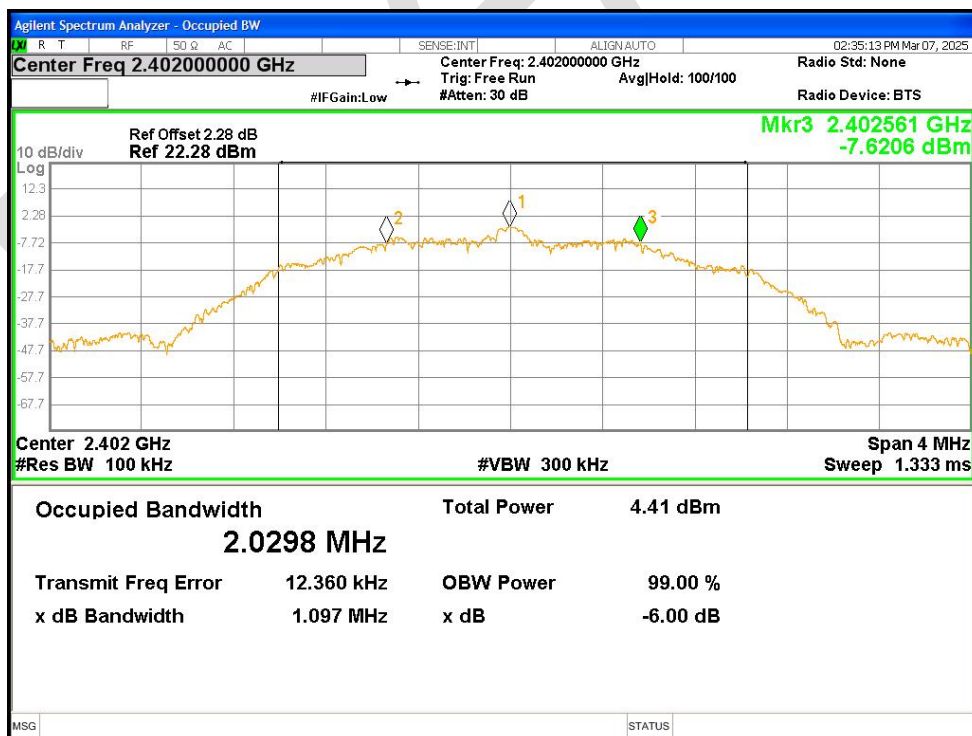

-6dB Bandwidth NVNT BLE 2M 2442MHz Ant1

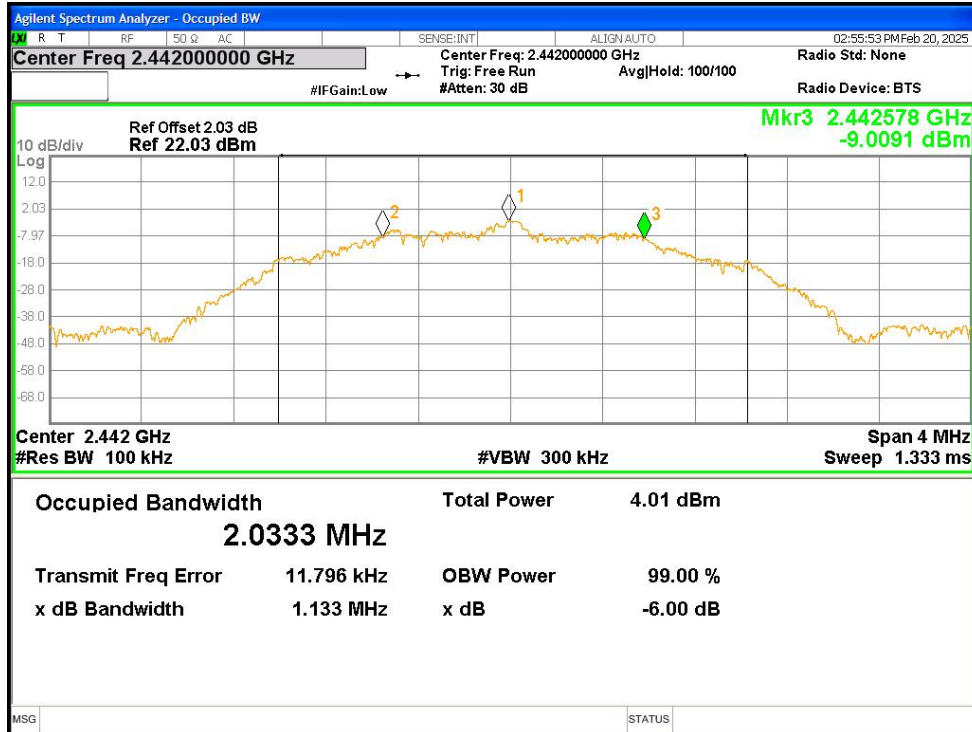


-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

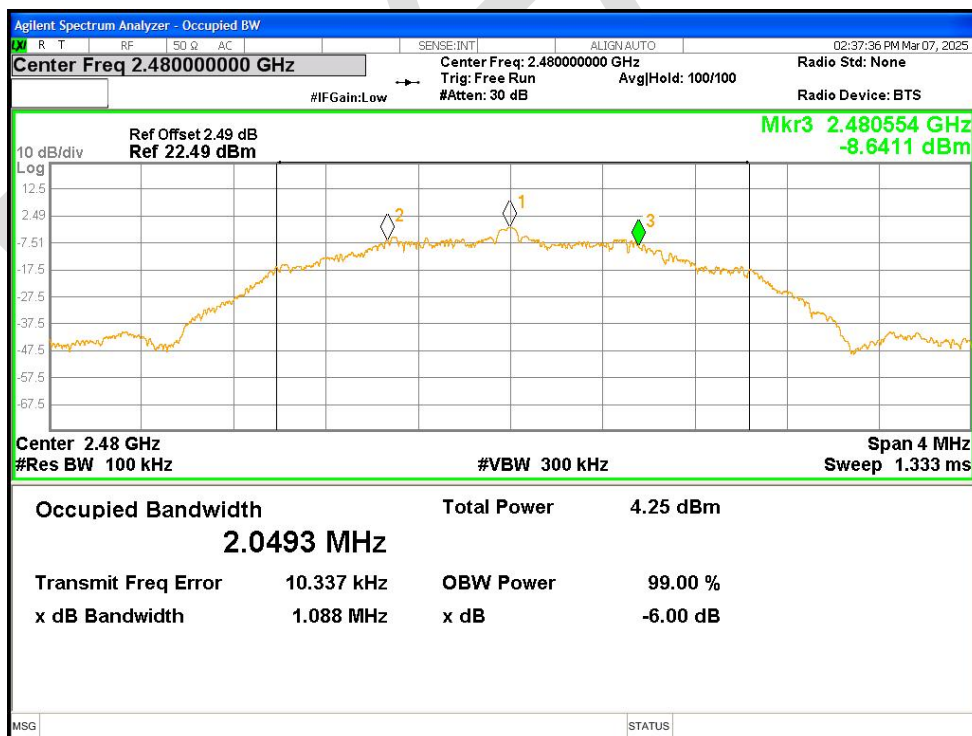


7.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.0217
NVNT	BLE 1M	2442	Ant1	1.0197
NVNT	BLE 1M	2480	Ant1	1.0188
NVNT	BLE 2M	2402	Ant1	2.0226
NVNT	BLE 2M	2442	Ant1	2.0283
NVNT	BLE 2M	2480	Ant1	2.0077


OBW NVNT BLE 1M 2402MHz Ant1

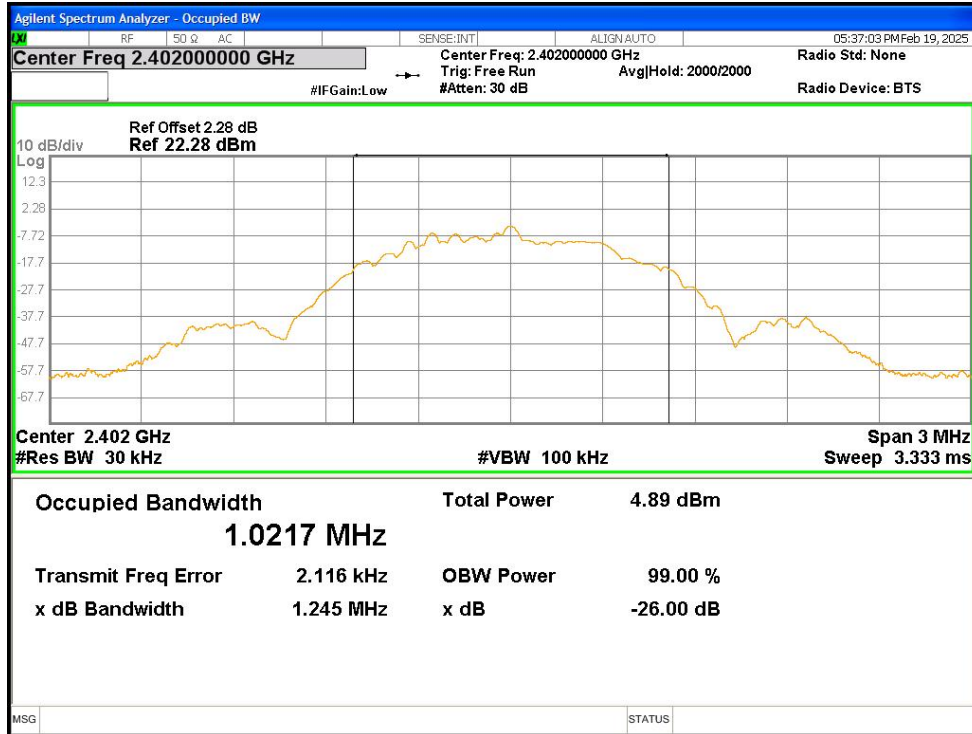


OBW NVNT BLE 1M 2442MHz Ant1

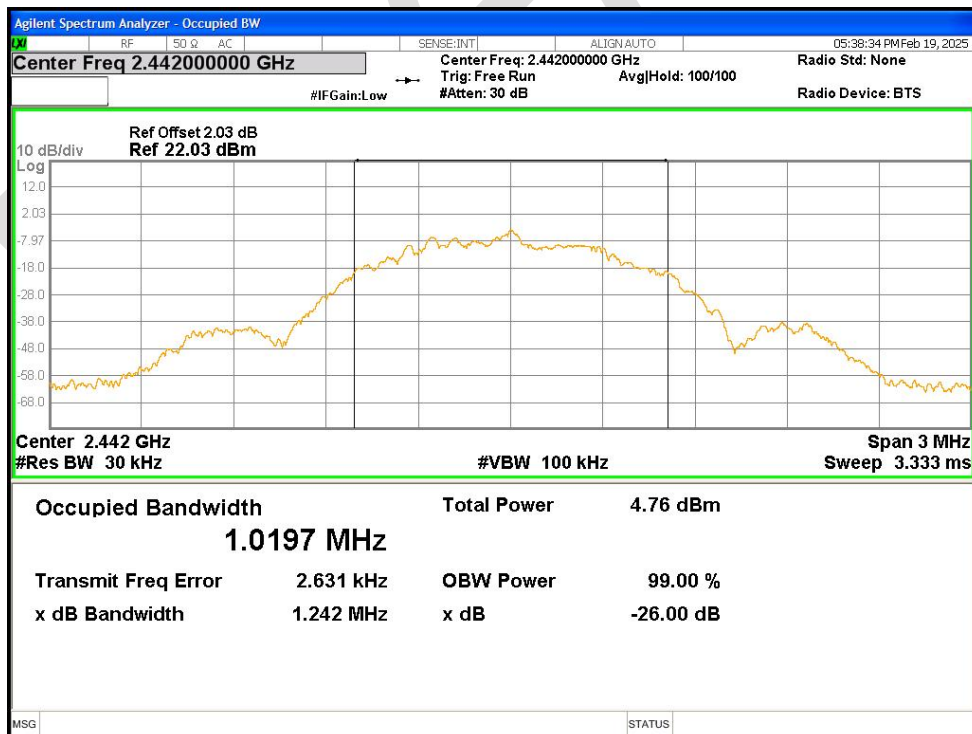


OBW NVNT BLE 1M 2480MHz Ant1

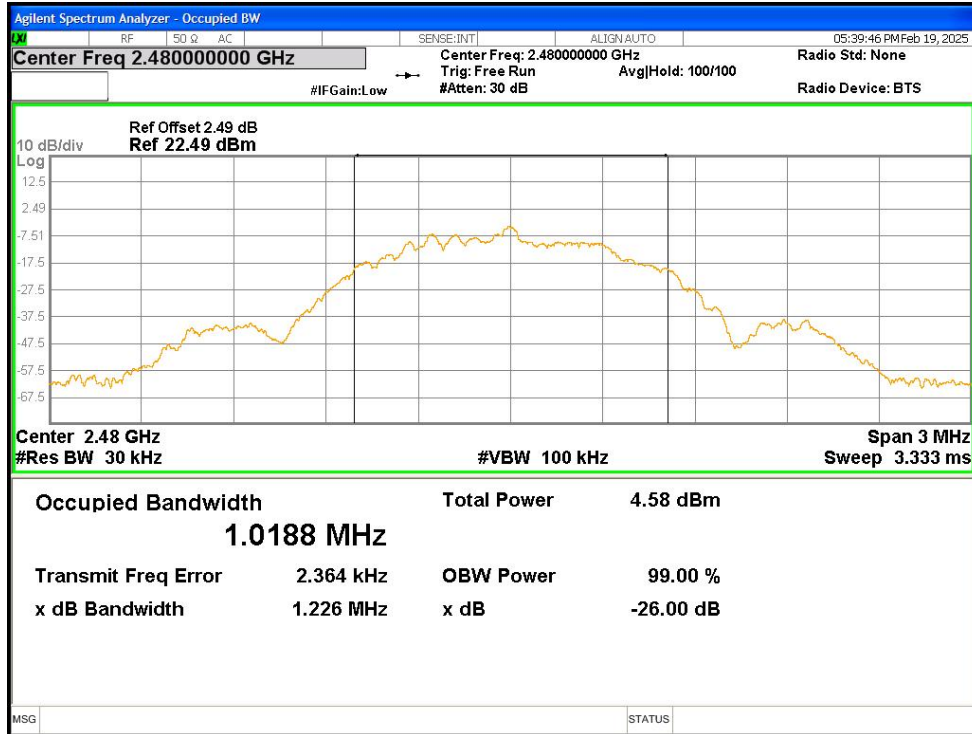


OBW NVNT BLE 2M 2402MHz Ant1

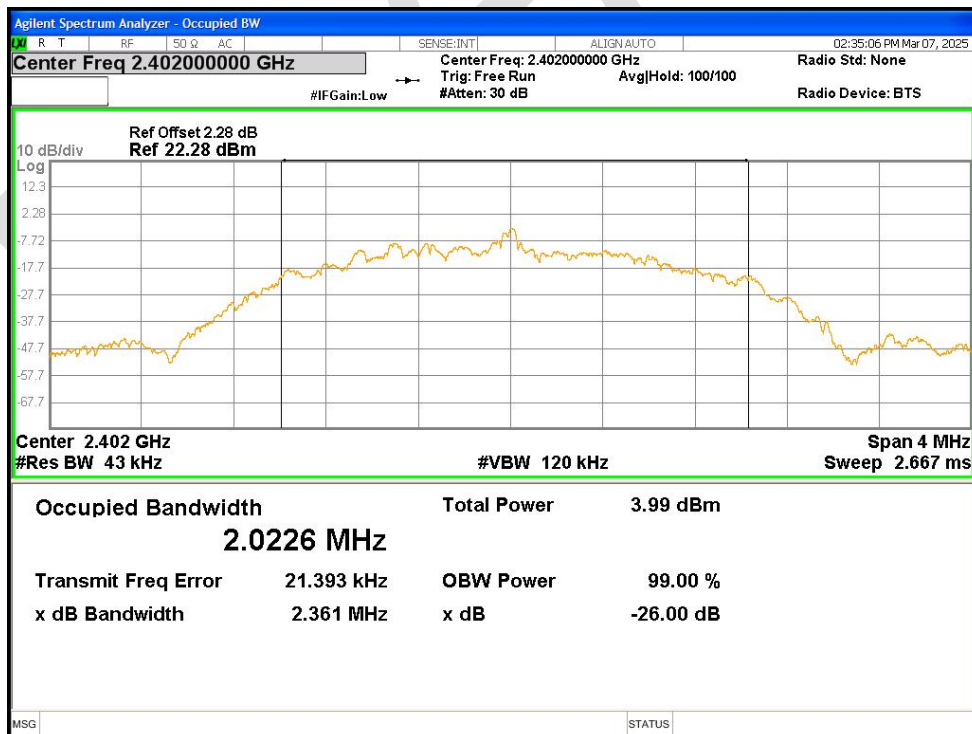

OBW NVNT BLE 2M 2442MHz Ant1

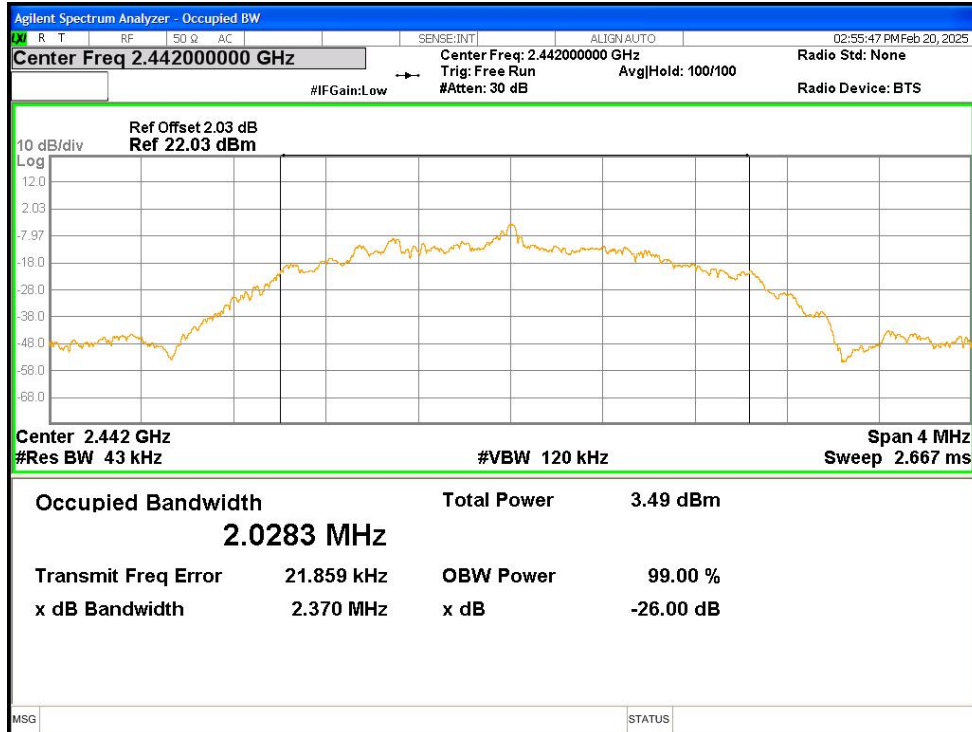


OBW NVNT BLE 2M 2480MHz Ant1

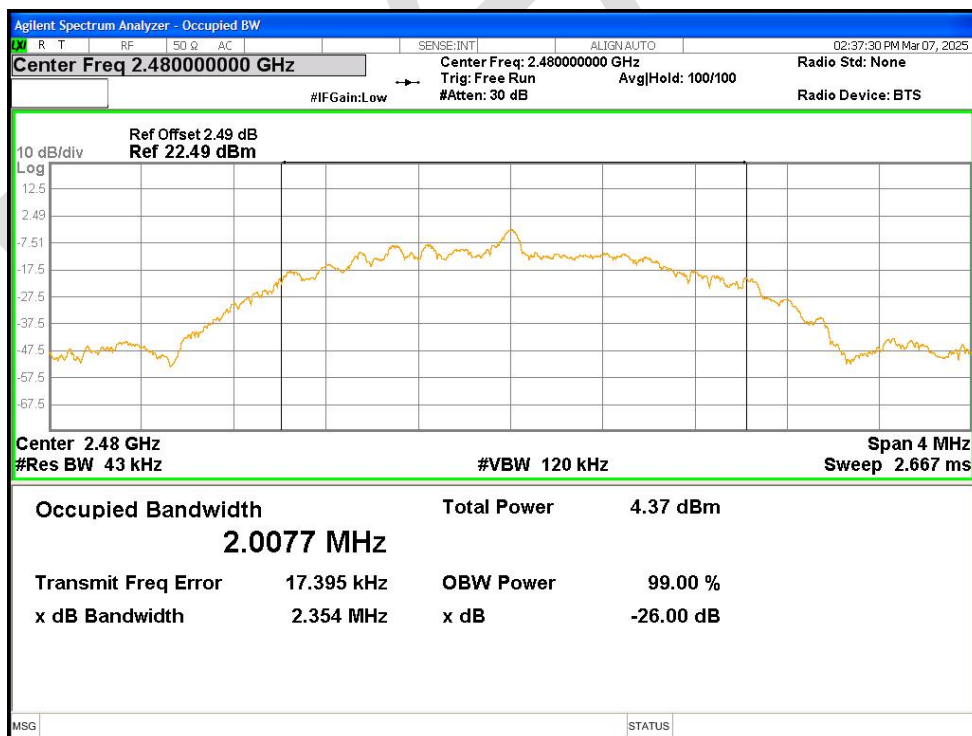

7.4 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-17.122	8	Pass
NVNT	BLE 1M	2442	Ant1	-16.701	8	Pass
NVNT	BLE 1M	2480	Ant1	-17.236	8	Pass
NVNT	BLE 2M	2402	Ant1	-19.581	8	Pass
NVNT	BLE 2M	2442	Ant1	-20.148	8	Pass
NVNT	BLE 2M	2480	Ant1	-19.239	8	Pass

PSD NVNT BLE 1M 2402MHz Ant1

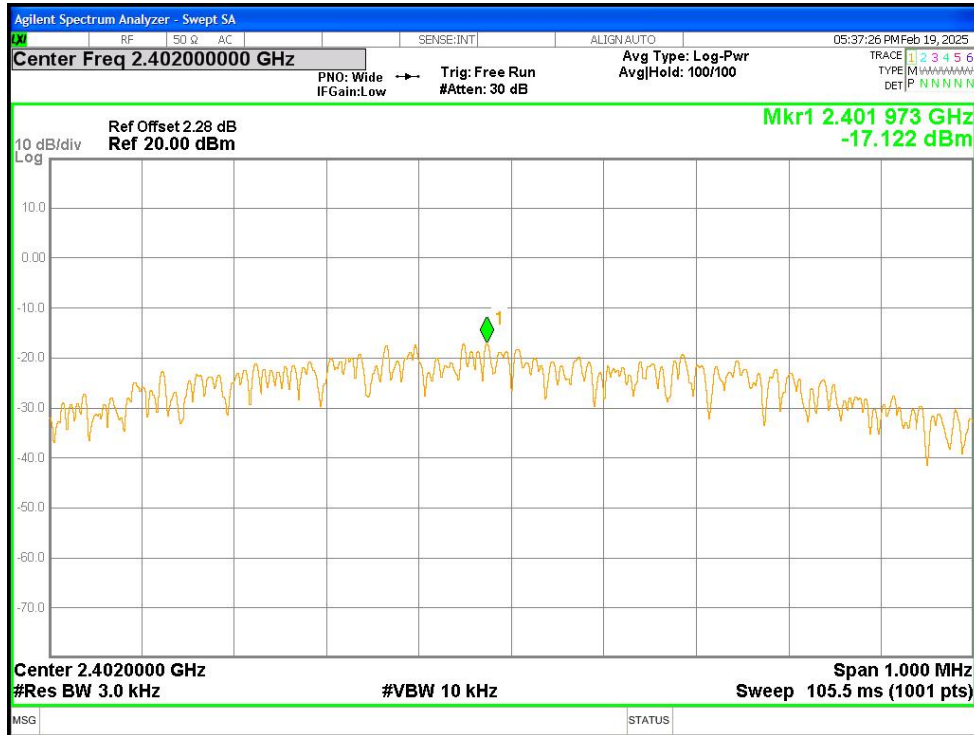

PSD NVNT BLE 1M 2442MHz Ant1

