

FCC PART 15, CLASS B
MEASUREMENT AND TEST REPORT

For

Yealink (Xiamen) Network Technology Co., Ltd.

4th-5th Floor, South Building, NO.63 WangHai Road, 2nd Software Park, Xiamen, China

FCC ID: T2C-T61P

Report Type: Original Report	Product Type: IP Phone
Test Engineer: Webb Liu	<i>Webb Liu</i>
Report Number: RSZ141014015-00	
Report Date: 2014-11-12	
Reviewed By: Dick Zhang EMC Leader	<i>Dick Zhang</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	4
SYSTEM TEST CONFIGURATION (FCC §15.27).....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS.....	7
FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....	8
APPLICABLE STANDARD	8
MEASUREMENT UNCERTAINTY	8
EUT SETUP	8
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE	9
TEST EQUIPMENT LIST AND DETAILS.....	9
CORRECTED FACTOR & MARGIN CALCULATION	10
TEST RESULTS SUMMARY	10
TEST DATA	10
FCC§15.109 - RADIATED EMISSIONS	17
APPLICABLE STANDARD	17
MEASUREMENT UNCERTAINTY.....	17
EUT SETUP	17
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST RESULTS SUMMARY	19
TEST DATA	19
PRODUCT SIMILARITY DECLARATION LETTER.....	26

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Yealink (Xiamen) Network Technology Co., Ltd.'s product, model number: SIP-T61P (FCC ID: T2C-T61P) or the "EUT" in this report is an IP Phone, which was measured approximately: 19.0 cm (L) x 19.0 cm (W) x 12.0 cm (H), rated with input voltage: DC 5.0V from adapter. The highest operation frequency is 133 MHz.

Adapter 1 Information:

Model: NSA6EU-050060

Input: AC 100-240V~50/60Hz, 0.2A

Output: DC 5.0V, 0.6A

Adapter 2 Information:

Model: OH-1006B0500600U-UL

Input: AC 100-240V~50/60Hz, 250mA

Output: DC 5.0V, 0.6A

Note: The product, series model SIP-T61P, SIP-T61 and SIP-T61G have the same PCB layout and schematic inside, the differences between them are the POE circuit and Model Name. Model SIP-T61P was selected for fully testing, which was explained in the declaration letter that provided and guaranteed by applicant.

** All measurement and test data in this report was gathered from production sample serial number: 1410102 (Assigned by the BACL, Shenzhen). The EUT supplied by the applicant was received on 2014-10-14.*

Objective

This report is prepared on behalf of Yealink (Xiamen) Network Technology Co., Ltd. in accordance with Part 2-Subpart J, and Part 15-Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15, Class B.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

“BurnIn test v5.3” exercise software was used.

Special Accessories

No special accessory was used.

Equipment Modifications


No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
BULL	Socket	GN-415K	5503290068073
DELL	PC	DCSCSF	LE513565
DELL	Monitor	E178FPc	070072
DELL	Keyboard	SK-8115	CN-0DJ313-71616-0CE-0ATX
A4TECH	Mouse	D-300	N/A
Sagem	Router	N/A	N/A
Yealink	IP phone	SIP-T61P	N/A

External I/O Cable

Cable Description		Length (m)	From / Port	To
1	Un-shielding un-detachable AC cable	1.2	Mains	Socket
2	Un-shielding un-detachable DC cable	1.2	EUT	Adapter
3	Un-shielding detachable RJ45 cable	1.5	EUT	PC
4	Shielding Un-detachable USB cable	1.2	PC	Mouse
5	Shielding Un-detachable USB cable	1.2	PC	Keyboard
6	Shielding detachable VGA cable	1.0	Monitor	PC
7	Un-shielding un-detachable AC cable	1.2	Mains	Monitor
8	Un-shielding detachable RJ45 cable	1.5	EUT	Router
9	Un-shielding detachable AC cable	1.2	Mains	PC
10	Un-shielding detachable RJ45 cable	1.5	IP phone	Router

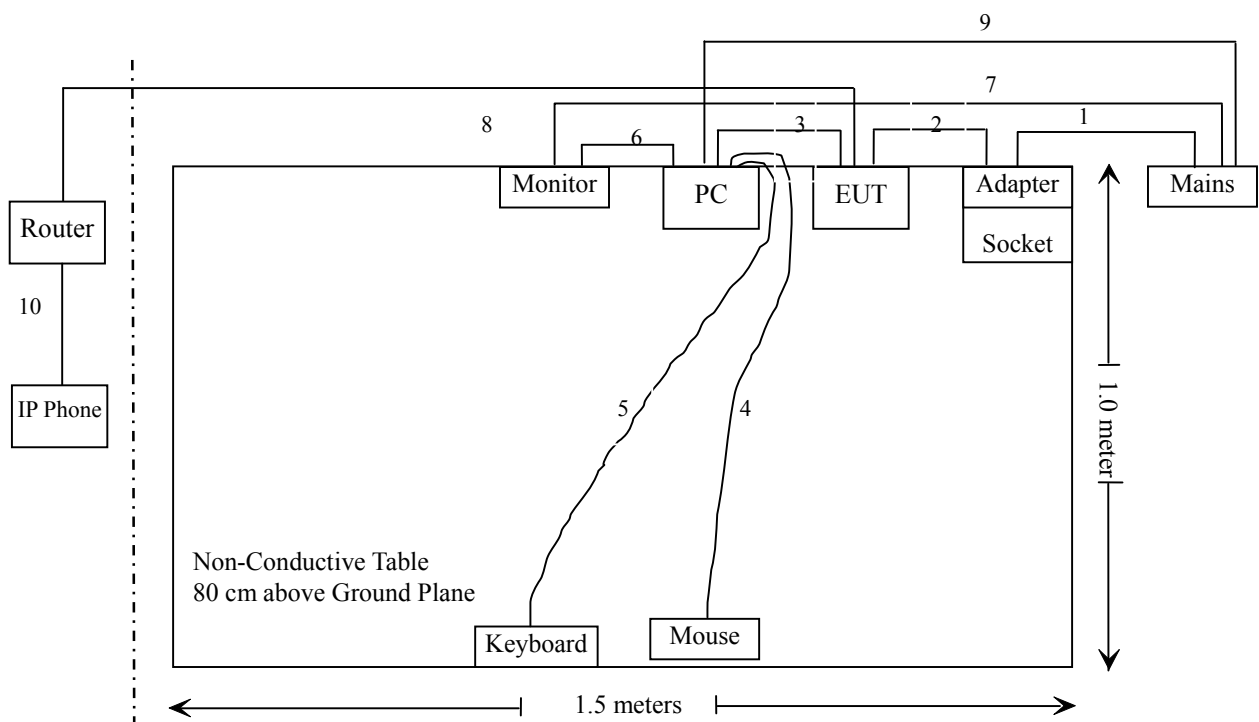Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC§15.107


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, A LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

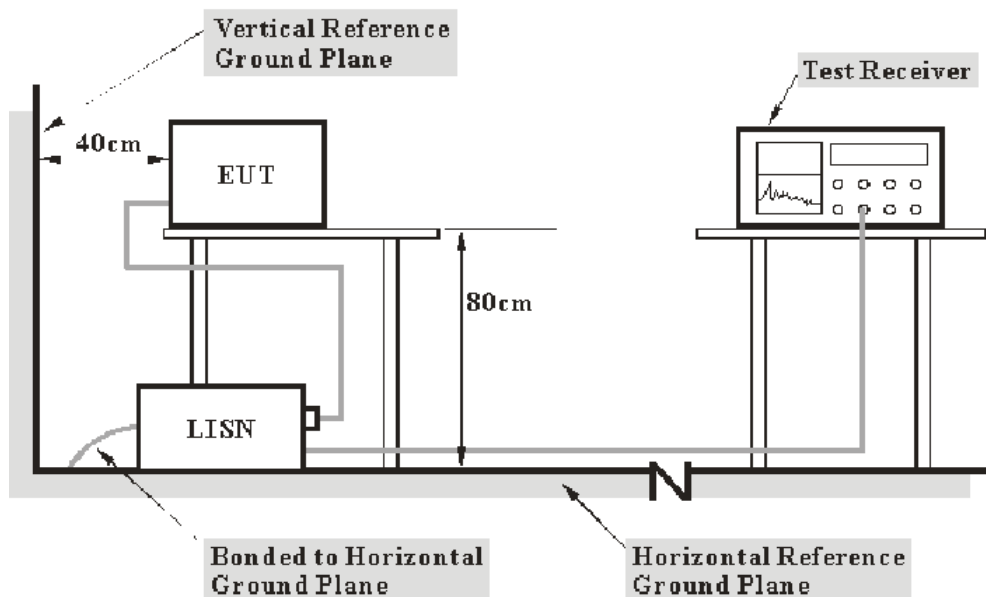

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2009. The related limit was specified in FCC Part 15.107 Class B.

The socket was connected to an AC 120V/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the socket was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2014-06-03	2015-06-03
Rohde & Schwarz	LISN	ESH3-Z5	100113	NCR	NCR
Rohde & Schwarz	LISN	ENV216	3560.6650.12-10 1613-Yb	2014-06-09	2015-06-09
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2014-05-14	2015-05-14
Rohde & Schwarz	CE Test software	EMC 32	V8.53	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the worst margin reading as below:

5.8 dB at 4.820830 MHz in the **Line** conducted mode for POE

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m \pm U_{(L_m)} \leq L_{\text{lim}} \pm U_{\text{cispr}}$$

In BACL., $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	24.8
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Webb Liu on 2014-11-02.


EUT operation mode: Charging & Talking (for adapter 1)

AC 120V/60 Hz, Line

EMI Auto Test L

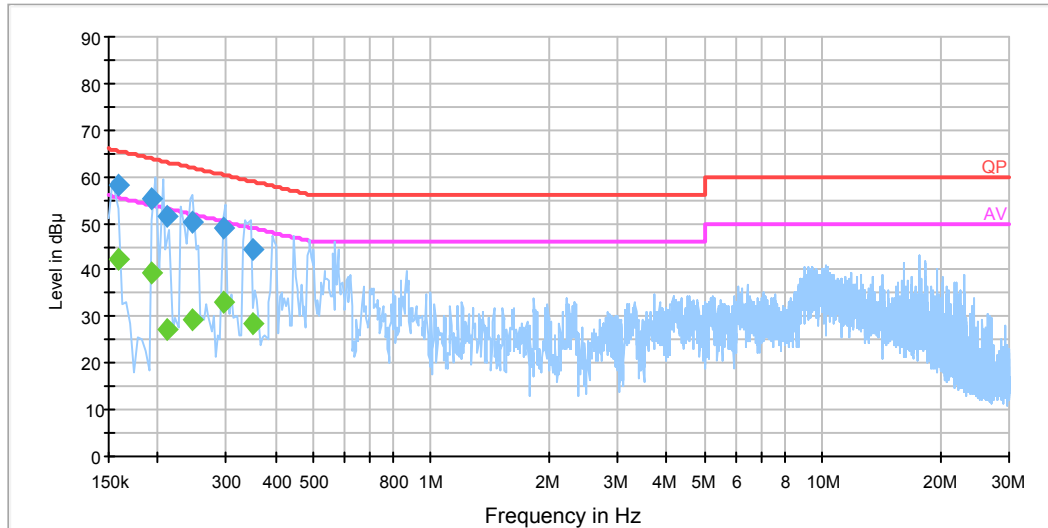

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.158500	58.2	19.2	65.5	7.3	QP
0.158500	42.3	19.2	55.5	13.2	Ave.
0.193500	55.1	19.3	63.9	8.8	QP
0.193500	39.5	19.3	53.9	14.4	Ave.
0.210500	51.4	19.3	63.2	11.8	QP
0.210500	27.1	19.3	53.2	26.1	Ave.
0.245500	50.3	19.3	61.9	11.6	QP
0.245500	29.4	19.3	51.9	22.5	Ave.
0.293500	48.9	19.2	60.4	11.5	QP
0.293500	33.0	19.2	50.4	17.5	Ave.
0.351190	44.2	19.3	58.9	14.8	QP
0.351190	28.3	19.3	48.9	20.6	Ave.

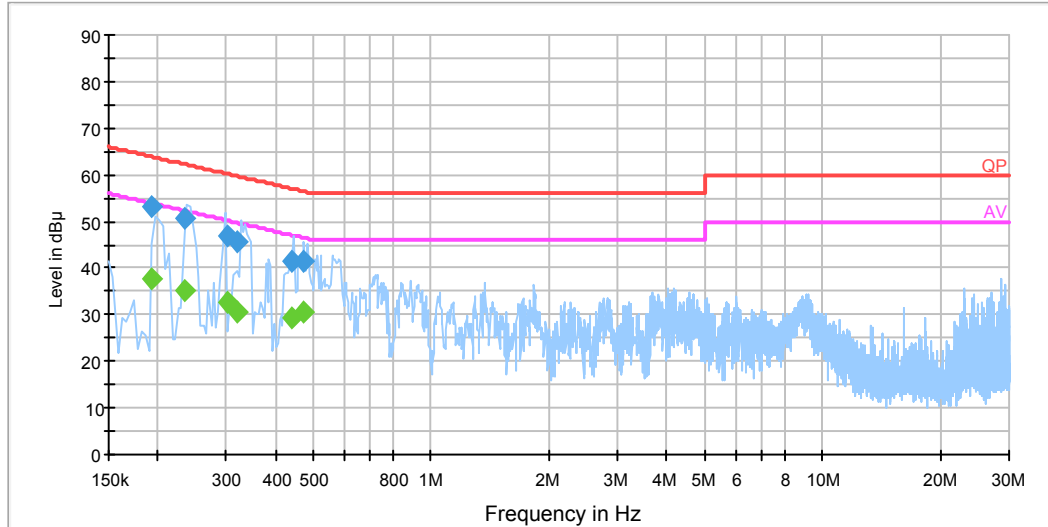
AC 120V/60 Hz, Neutral**EMI Auto Test N**

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.193500	53.0	19.2	63.9	10.9	QP
0.193500	37.9	19.2	53.9	16.0	Ave.
0.233500	50.7	19.2	62.3	11.6	QP
0.233500	35.1	19.2	52.3	17.2	Ave.
0.301500	47.0	19.2	60.2	13.2	QP
0.301500	32.5	19.2	50.2	17.7	Ave.
0.321110	45.7	19.2	59.7	14.0	QP
0.321110	30.7	19.2	49.7	19.0	Ave.
0.439310	41.3	19.2	57.1	15.8	QP
0.439310	29.3	19.2	47.1	17.8	Ave.
0.474770	41.3	19.2	56.4	15.1	QP
0.474770	30.4	19.2	46.4	16.1	Ave.


EUT operation mode: Charging & Talking (for adapter 2)

AC 120V/60 Hz, Line

EMI Auto Test L

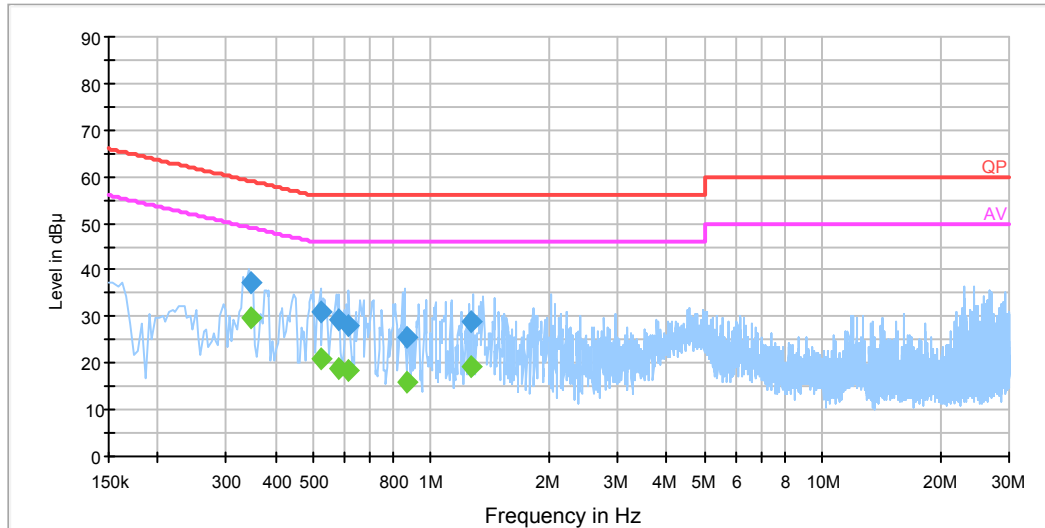

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.347130	37.2	19.2	59.0	21.8	QP
0.347130	29.7	19.2	49.0	19.3	Ave.
0.522170	31.0	19.3	56.0	25.0	QP
0.522170	21.1	19.3	46.0	24.9	Ave.
0.581270	29.1	19.3	56.0	26.9	QP
0.581270	19.0	19.3	46.0	27.0	Ave.
0.612730	28.1	19.3	56.0	27.9	QP
0.612730	18.4	19.3	46.0	27.6	Ave.
0.865190	25.7	19.4	56.0	30.3	QP
0.865190	15.7	19.4	46.0	30.3	Ave.
1.266770	28.8	19.5	56.0	27.2	QP
1.266770	19.4	19.5	46.0	26.6	Ave.

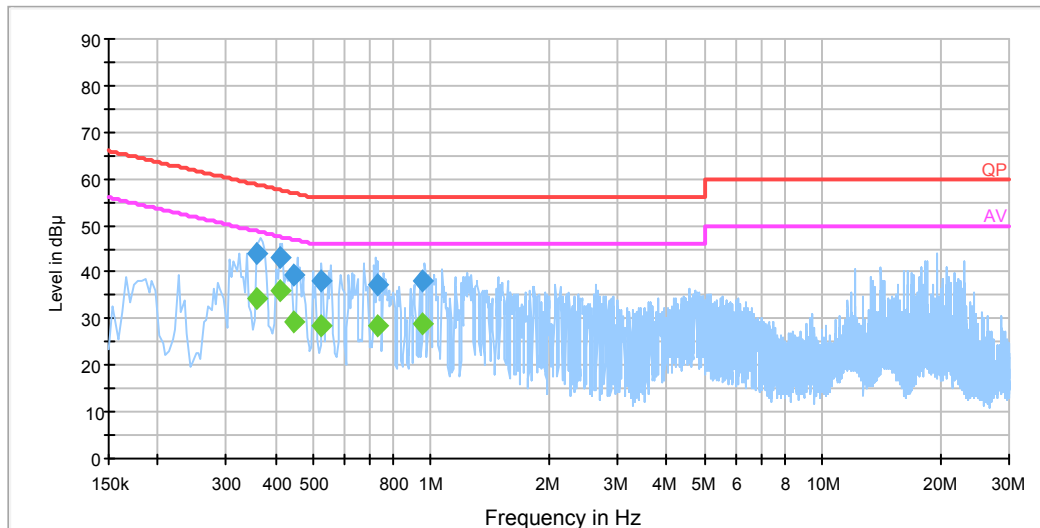
AC 120V/60 Hz, Neutral**EMI Auto Test N**

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.360510	44.0	19.2	58.7	14.8	QP
0.360510	34.2	19.2	48.7	14.6	Ave.
0.411730	43.3	19.2	57.6	14.3	QP
0.411730	36.2	19.2	47.6	11.4	Ave.
0.447190	39.2	19.2	56.9	17.7	QP
0.447190	29.4	19.2	46.9	17.5	Ave.
0.522110	38.2	19.2	56.0	17.8	QP
0.522110	28.6	19.2	46.0	17.4	Ave.
0.731170	37.2	19.3	56.0	18.8	QP
0.731170	28.4	19.3	46.0	17.6	Ave.
0.955510	38.0	19.4	56.0	18.0	QP
0.955510	28.9	19.4	46.0	17.1	Ave.


EUT operation mode: Charging & Talking (for POE)

AC 120V/60 Hz, Line

EMI Auto Test L

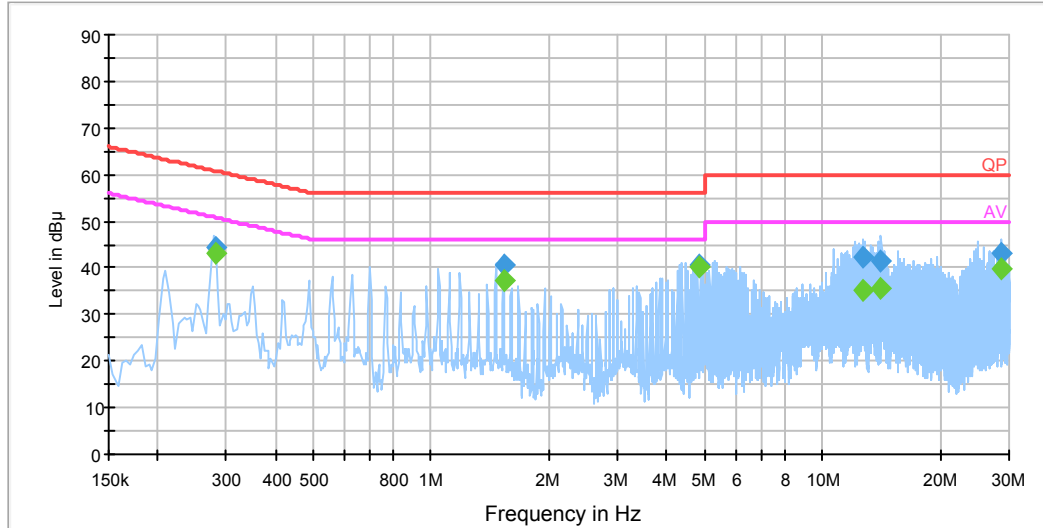

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.281500	44.4	19.2	60.8	16.3	QP
0.281500	43.2	19.2	50.8	7.5	Ave.
1.538990	40.8	19.5	56.0	15.2	QP
1.538990	37.3	19.5	46.0	8.7	Ave.
4.820830	40.5	19.6	56.0	15.5	QP
4.820830	40.2	19.6	46.0	5.8	Ave.
12.650690	42.1	19.8	60.0	17.9	QP
12.650690	35.2	19.8	50.0	14.8	Ave.
14.121690	41.3	19.8	60.0	18.7	QP
14.121690	35.7	19.8	50.0	14.3	Ave.
28.683710	43.1	20.2	60.0	16.9	QP
28.683710	39.7	20.2	50.0	10.3	Ave.

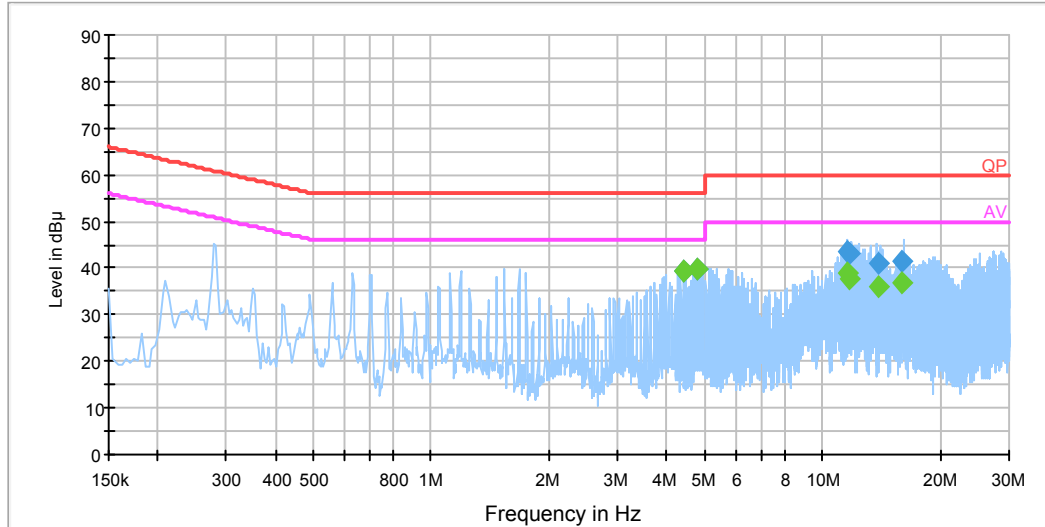AC 120V/60 Hz, Neutral**EMI Auto Test N**

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
4.411850	39.2	19.4	56.0	16.8	QP
4.411850	39.3	19.4	46.0	6.7	Ave.
4.762570	39.8	19.4	56.0	16.2	QP
4.762570	39.6	19.4	46.0	6.4	Ave.
11.557830	43.4	19.6	60.0	16.6	QP
11.557830	39.1	19.6	50.0	10.9	Ave.
11.767670	43.0	19.6	60.0	17.0	QP
11.767670	37.7	19.6	50.0	12.3	Ave.
13.875150	41.2	19.6	60.0	18.8	QP
13.875150	36.0	19.6	50.0	14.0	Ave.
16.043450	41.3	19.6	60.0	18.7	QP
16.043450	36.7	19.6	50.0	13.3	Ave.

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 3) Margin = Limit – Corrected Amplitude

FCC§15.109 - RADIATED EMISSIONS

Applicable Standard

FCC §15.109


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report

Frequency	Polarity	Expanded Measurement uncertainty
30MHz~200MHz	Horizontal	4.62 dB (k=2, 95% level of confidence)
	Vertical	4.54 dB (k=2, 95% level of confidence)
200MHz~1GHz	Horizontal	4.84 dB (k=2, 95% level of confidence)
	Vertical	5.91 dB (k=2, 95% level of confidence)
1 GHz~6 GHz	Horizontal/Vertical	4.68 dB (k=2, 95% level of confidence)
Above 6 GHz	Horizontal/Vertical	4.92 dB (k=2, 95% level of confidence)

EUT Setup

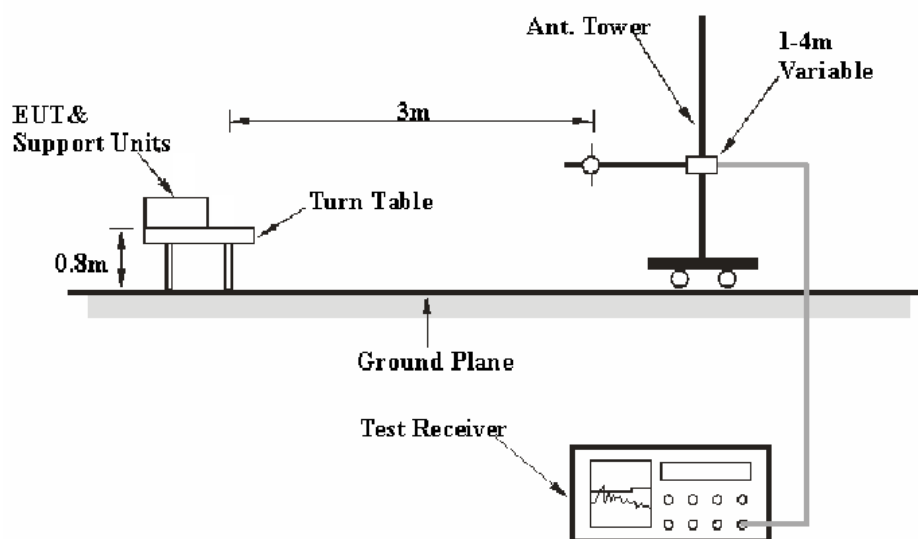

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The related limit was specified in FCC Part 15.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

According to FCC 15.33 requirements, the EUT system was measured from 30 MHz to 2 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	-	Peak
	1 MHz	10 Hz	-	Average

Test Procedure

During the radiated emission test, the socket was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in the Quasi-peak detection mode for below 1 GHz, and Peak and Average for above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
TDK	Chamber	Chamber A	2#	2012-10-15	2015-10-15
TDK	Chamber	Chamber B	1#	2012-11-12	2015-11-12
HP	Amplifier	HP8447E	1937A01046	2015-05-06	2015-05-06
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2014-11-03	2015-11-03
Mini	Pre-Amplifier	ZVA-183-S+	5969001149	2014-04-03	2015-04-03
A.H.System	Horn Antenna	SAS-200/571	135	2012-02-11	2015-02-10
R&S	Auto test Software	EMC32	V9.10	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109, the worst margin reading as below:

2.29 dB at 914.739125 MHz in the **30 MHz~1 GHz Talking & POE charging** mode at **Horizontal** polarization for POE

Test Data


Environmental Conditions

Temperature:	26
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Webb Liu on 2014-11-02.

For adapter 1*EUT operation mode: Charging & Talking***30 MHz ~ 1000 MHz**

Full Spectrum

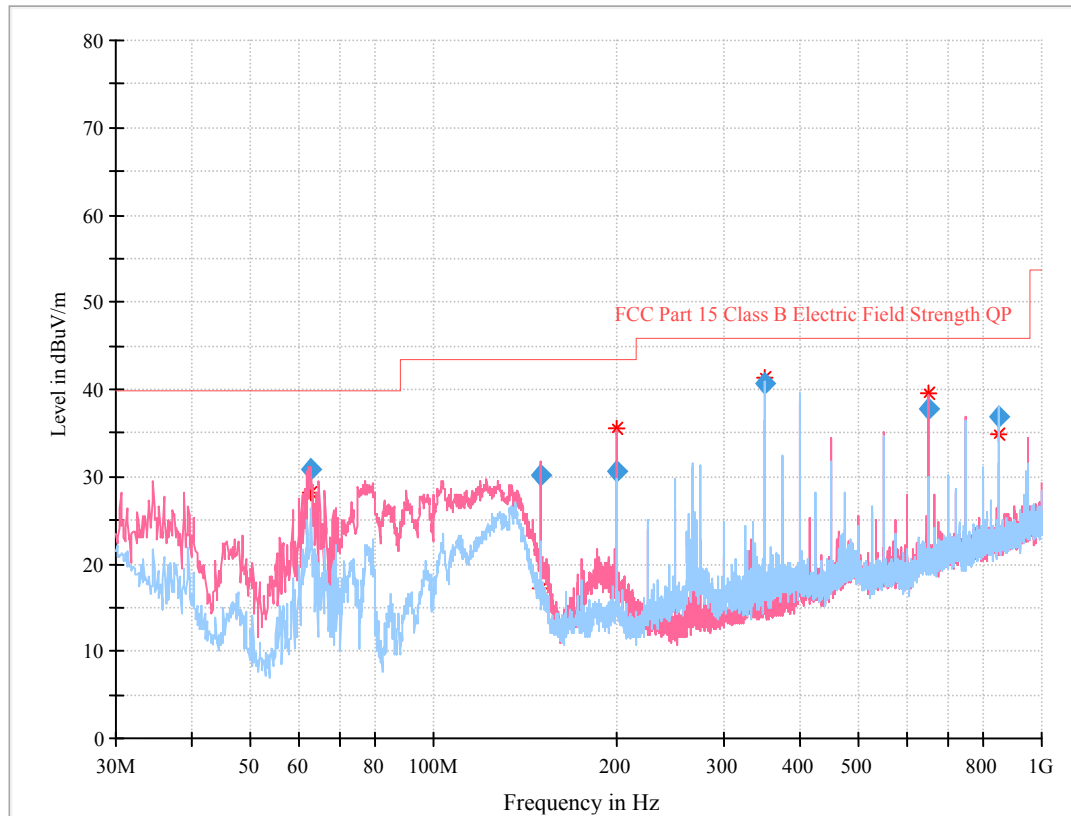


Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (deg)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
62.991000	30.73	102.0	V	116.0	-19.8	40.00	9.27
149.971875	30.15	102.0	V	351.0	-13.8	43.50	13.35
199.989500	30.70	108.0	V	185.0	-14.3	43.50	12.80
350.004625	40.72	108.0	H	77.0	-12.0	47.00	6.28
650.013875	37.87	103.0	V	88.0	-6.1	47.00	9.13
850.001750	36.82	108.0	H	237.0	-3.8	47.00	10.18

1 GHz ~ 2 GHz

Frequency (MHz)	Reading (dBμV)	Detector (PK/QP/Ave.)	Turntable Degree	Height (m)	Polar (H/V)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1397.80	38.20	PK	51	1.3	H	0.68	38.88	74	35.12
1397.80	25.80	Ave.	51	1.3	H	0.68	26.48	54	27.52
1743.52	45.15	PK	282	1.5	H	2.24	47.39	74	26.61
1743.52	27.55	Ave.	282	1.5	H	2.24	29.79	54	24.21
1397.80	36.34	PK	149	1.9	V	0.68	37.02	74	36.98
1397.80	24.85	Ave.	149	1.9	V	0.68	25.53	54	28.47
1743.52	42.16	PK	226	2.3	V	2.24	44.4	74	29.60
1743.52	26.37	Ave.	226	2.3	V	2.24	28.61	54	25.39

For adapter 2*EUT operation mode: Charging & Talking***30 MHz ~ 1000 MHz**

Full Spectrum

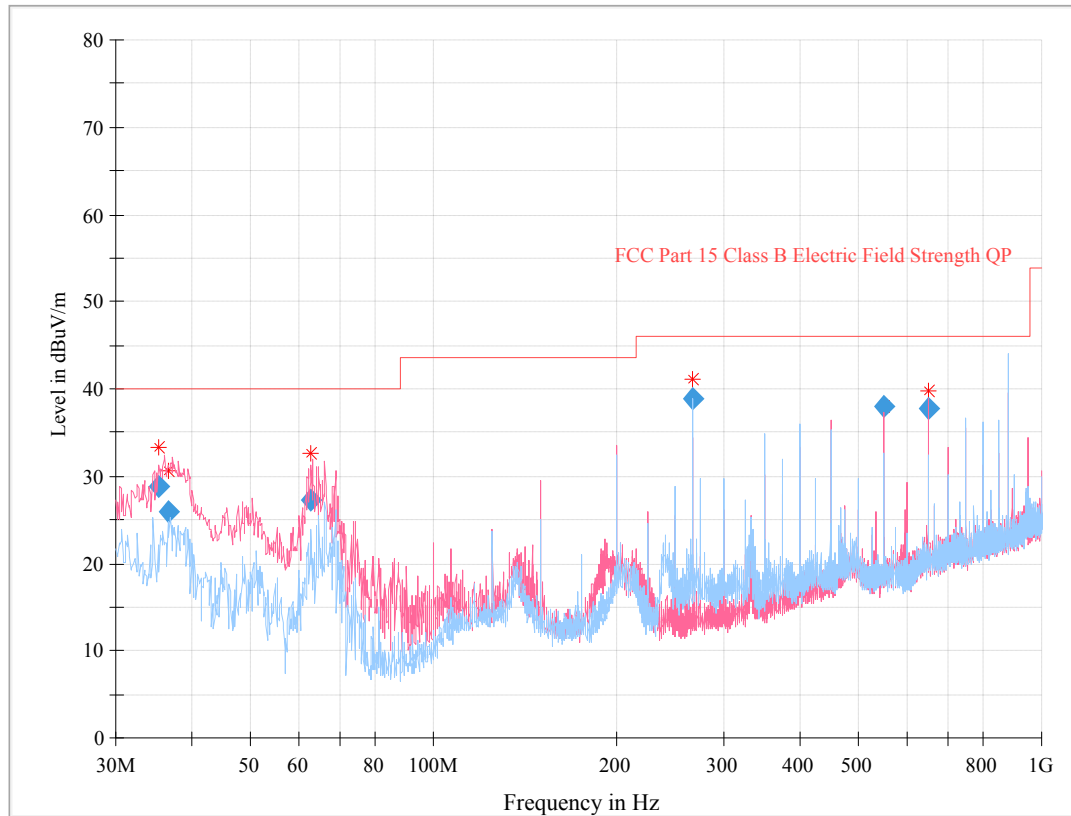


Frequency (MHz)	Corrected Amplitude (dBuV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (deg)	Correction Factor (dB/m)	Limit (dBuV/m)	Margin (dB)
35.360625	28.74	102.0	V	293.0	-10.4	40.00	11.26
36.540000	25.97	108.0	V	357.0	-11.2	40.00	14.03
62.988750	27.33	102.0	V	138.0	-19.8	40.00	12.67
266.671000	38.89	135.0	H	243.0	-13.3	46.00	7.11
550.009375	38.08	118.0	V	89.0	-8.0	46.00	7.92
649.989875	37.74	109.0	V	90.0	-6.1	46.00	8.26

1 GHz ~ 2 GHz

Frequency (MHz)	Reading (dBμV)	Detector (PK/QP/Ave.)	Turntable Degree	Height (m)	Polar (H/V)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1419.57	37.28	PK	339	2.3	H	0.68	37.96	74	36.04
1419.57	24.75	Ave.	339	2.3	H	0.68	25.43	54	28.57
1962.48	44.40	PK	85	1.7	H	3.07	47.47	74	26.53
1962.48	29.97	Ave.	85	1.7	H	3.07	33.04	54	20.96
1419.57	38.36	PK	98	2.2	V	0.68	39.04	74	34.96
1419.57	25.16	Ave.	98	2.2	V	0.68	25.84	54	28.16
1962.48	40.71	PK	298	2.1	V	3.07	43.78	74	30.22
1962.48	25.43	Ave.	298	2.1	V	3.07	28.5	54	25.50

For POE*EUT operation mode: Talking & POE charging***30 MHz ~ 1000 MHz**

Full Spectrum

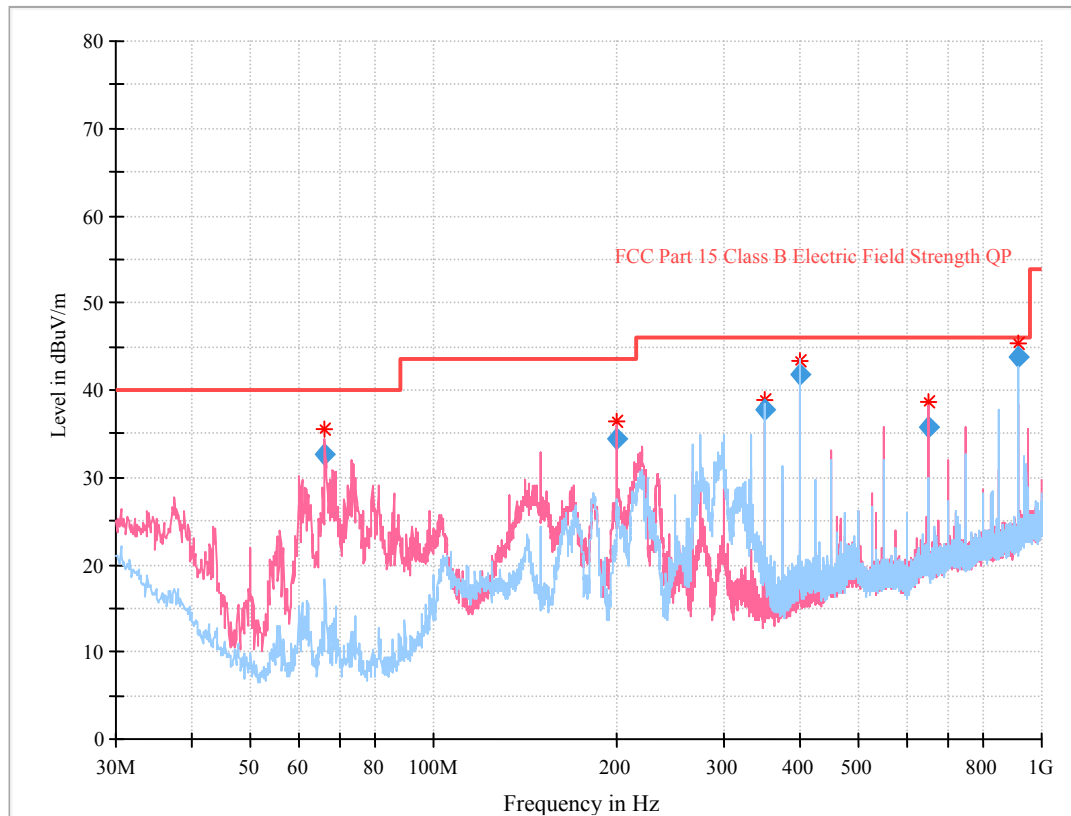

Frequency (MHz)	Corrected Amplitude (dBuV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (deg)	Correction Factor (dB/m)	Limit (dBuV/m)	Margin (dB)
66.278250	32.64	108.0	V	187.0	-19.6	40.00	7.36
200.002000	34.50	102.0	V	218.0	-14.4	43.50	9.00
349.991625	37.71	108.0	H	90.0	-12.0	46.00	8.29
399.989875	41.72	108.0	H	62.0	-10.4	46.00	4.28
649.994750	35.83	118.0	V	0.0	-6.1	46.00	10.17
914.739125	43.71	147.0	H	210.0	-3.0	46.00	2.29

1 GHz ~ 2 GHz

Frequency (MHz)	Reading (dBμV)	Detector (PK/QP/Ave.)	Turntable Degree	Height (m)	Polar (H/V)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1386.84	37.18	PK	256	2.4	H	0.68	37.86	74	36.14
1386.84	23.43	Ave.	256	2.4	H	0.68	24.11	54	29.89
1832.59	44.02	PK	39	1.0	H	2.63	46.65	74	27.35
1832.59	27.84	Ave.	39	1.0	H	2.63	30.47	54	23.53
1386.84	36.07	PK	203	2.2	V	0.68	36.75	74	37.25
1386.84	22.04	Ave.	203	2.2	V	0.68	22.72	54	31.28
1832.59	42.97	PK	20	1.8	V	2.63	45.6	74	28.40
1832.59	25.28	Ave.	20	1.8	V	2.63	27.91	54	26.09

Note:

- 1) Correction Factor = Antenna Factor + Cable Loss - Amplifier Gain
- 2) Corrected Amplitude = Meter Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

PRODUCT SIMILARITY DECLARATION LETTER



Yealink (Xiamen) Network Technology Co., LTD

4th-5th Floor, South Building, NO.63 WangHai Road, 2nd Software Park, Xiamen, China

Tel: 86-592-5702000 Fax: 86-592-5702455

2014-10-16

Product Similarity Declaration Letter

To Whom It May Concern,

We, Yealink (Xiamen) Network Technology Co., LTD. hereby declare that our product IP Phone, the model SIP-T61P SIP-T61G and SIP-T61 are electrically identical, they have the same PCB layout and schematic, the only differences are the models T61P and T61G with POE circuit, the model T61 without POE circuit. SIP-T61P was tested by BACL.

Please contact me if you have any question.

Signature:

A handwritten signature in black ink that reads "Stone Lu".

Stone Lu

Vice General Manager

******END OF REPORT******