



FCC RF Test Report

APPLICANT : PAX Technology Limited
EQUIPMENT : POS Terminal
BRAND NAME : PAX
MODEL NAME : A35
FCC ID : V5PA35BW
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Mar. 31, 2021 ~ Apr. 29, 2021

We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



Sporton International (ShenZhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	30
3.6 AC Conducted Emission Measurement.....	34
3.7 Antenna Requirements.....	36
4 LIST OF MEASURING EQUIPMENT	37
5 UNCERTAINTY OF EVALUATION	38
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR132308C	Rev. 01	Initial issue of report	Jul. 27, 2021

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	N/A	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.63 dB at 4824.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.91 dB at 0.330 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	N/A	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

PAX Technology Limited

Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Road, Wanchai, Hong Kong

1.2 Manufacturer

PAX Computer Technology (Shenzhen) Co., Ltd.

4/F, No.3 Building, Software Park, Second Central Science-Tech Road, High-Tech industrial Park, Shenzhen, Guangdong, P.R.C.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	POS Terminal
Brand Name	PAX
Model Name	A35
FCC ID	V5PA35BW
HW Version	N/A
SW Version	N/A
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 18.11 dBm (0.0647 W) 802.11g : 22.90 dBm (0.1950 W) 802.11n HT20 : 23.11 dBm (0.2046 W) 802.11n HT40 : 22.97 dBm (0.1982 W)
99% Occupied Bandwidth	802.11b : 12.94MHz 802.11g : 16.93MHz 802.11n HT20 : 17.83MHz 802.11n HT40 : 36.96MHz
Antenna Type / Gain	FPC antenna type with gain 1.0 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International (Shenzhen) Inc.		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN Link (2.4G) + USB load(with NB) + RS-232 Cable load(with NB) + RJ-45(LAN) load(with AP) + Earphone + Powered By Adapter
Remark: For Radiated Test Cases, The tests were performed with Adapter and Earphone.	

2.3 Connection Diagram of Test System

For Radiated Emission

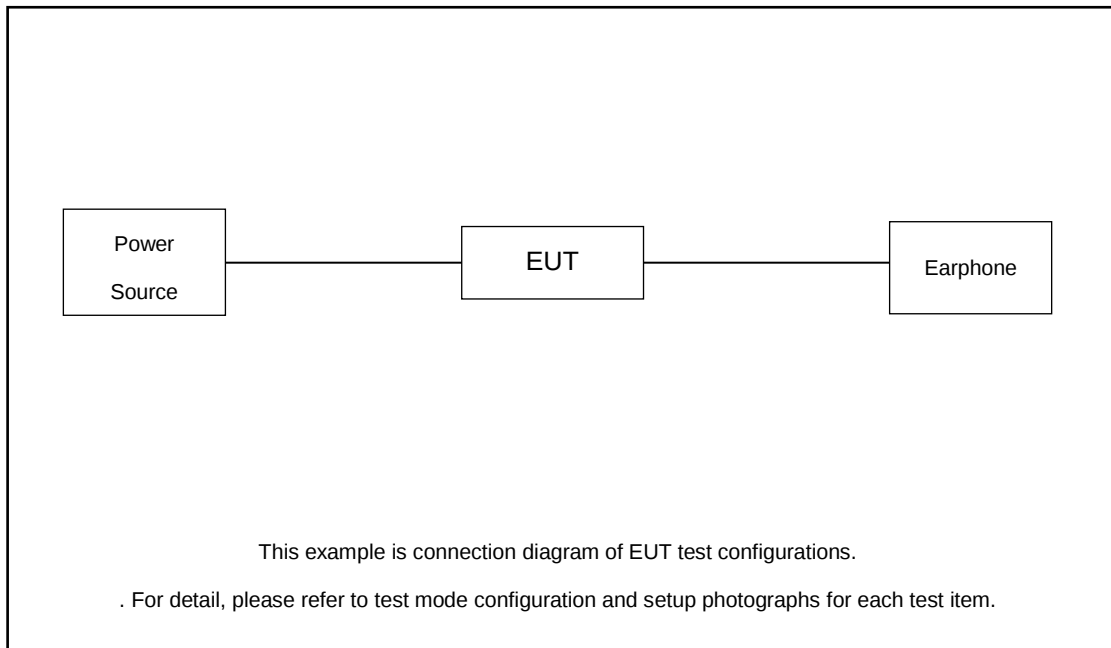

For Conducted Emission

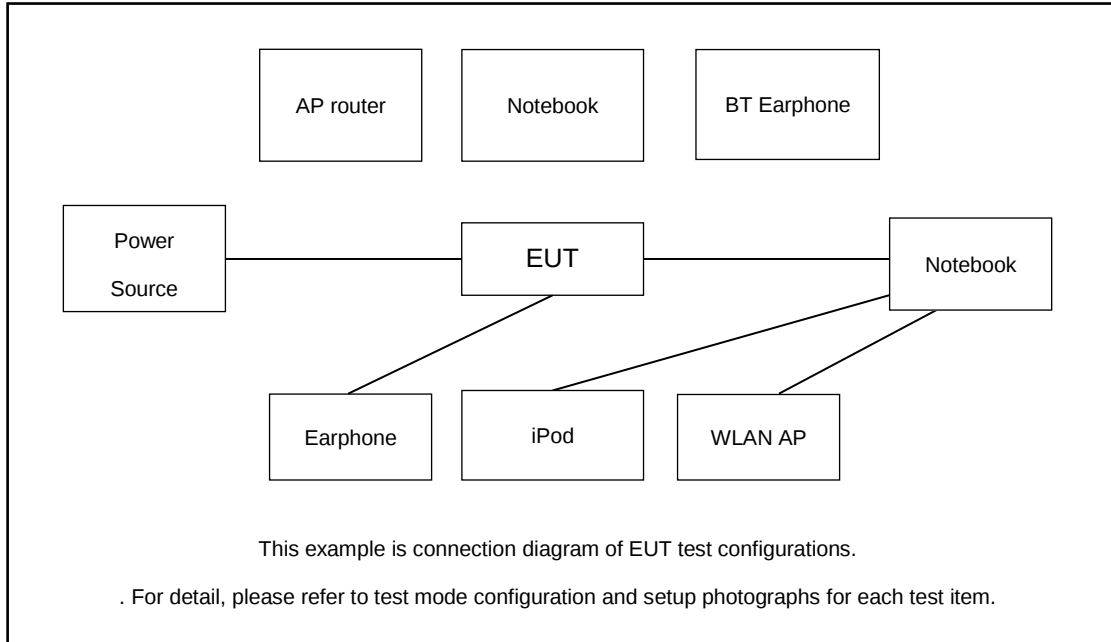

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P: Shielded, 1.8m
3.	Ipod	apple	MC69029/A	N/A	N/A	N/A
4.	Earphone	N/A	N/A	N/A	Unshielded,1.2m	N/A
5.	Bluetooth Earphone	Samsung	EO-MG900	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.2dB and 20dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 1.2 + 20 = 21.2 \text{ (dB)}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

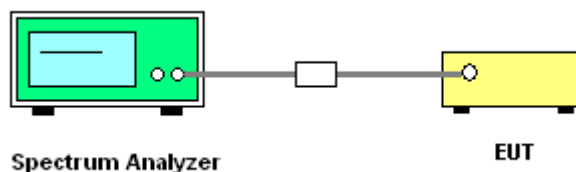



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

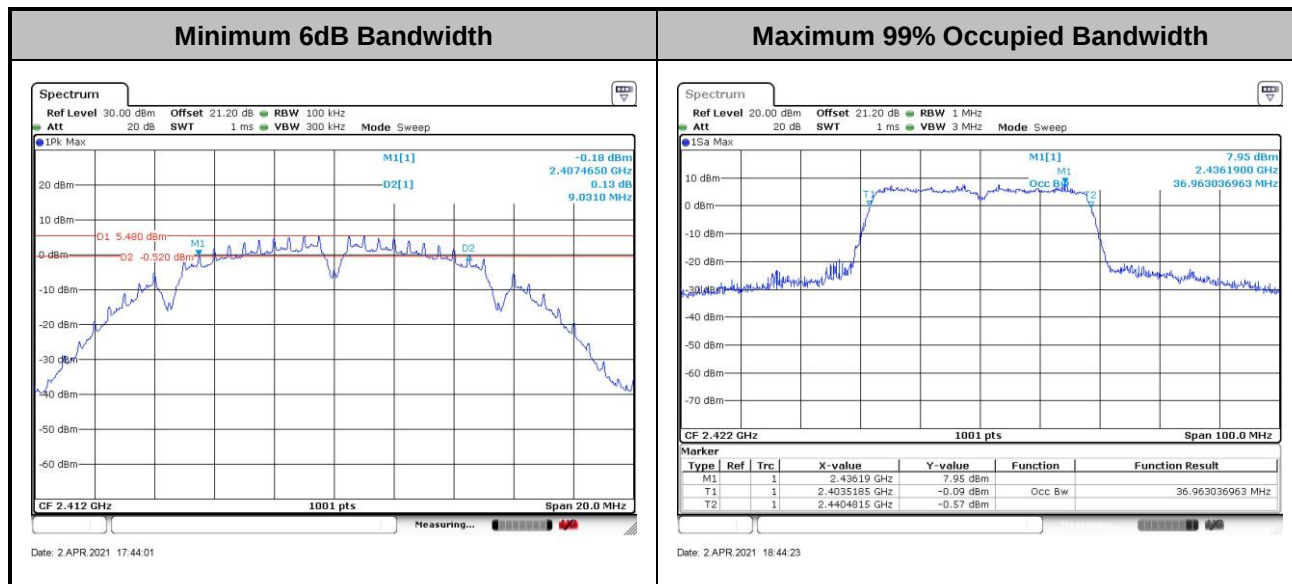

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

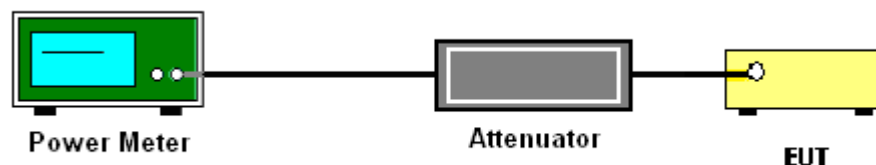

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

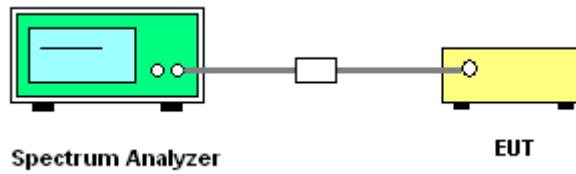

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

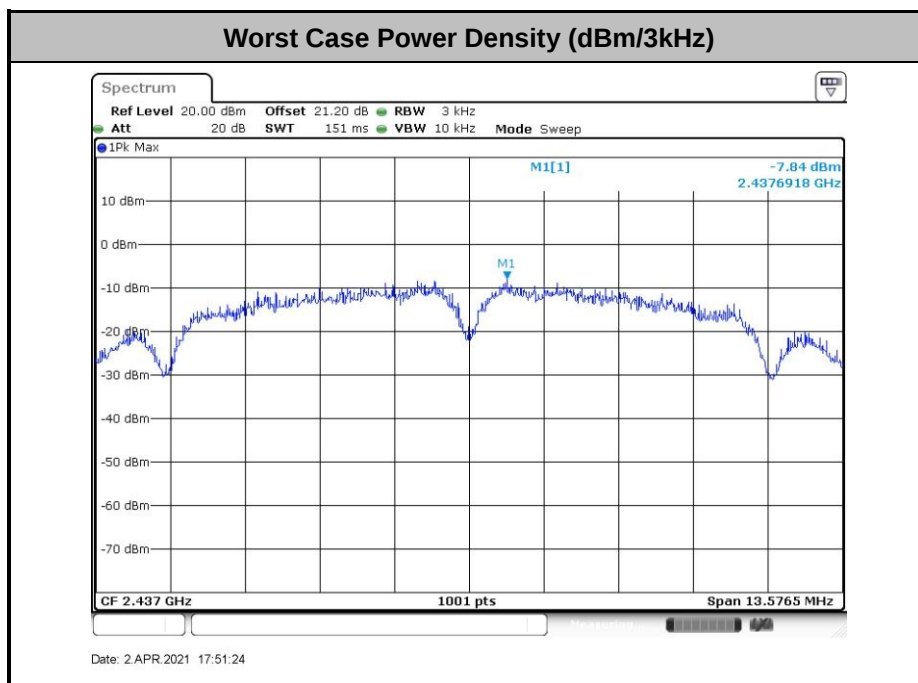

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

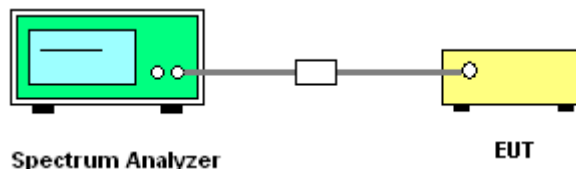




3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	Zhang Xue Yi	Temperature :	21~25°C
		Relative Humidity :	51~54%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

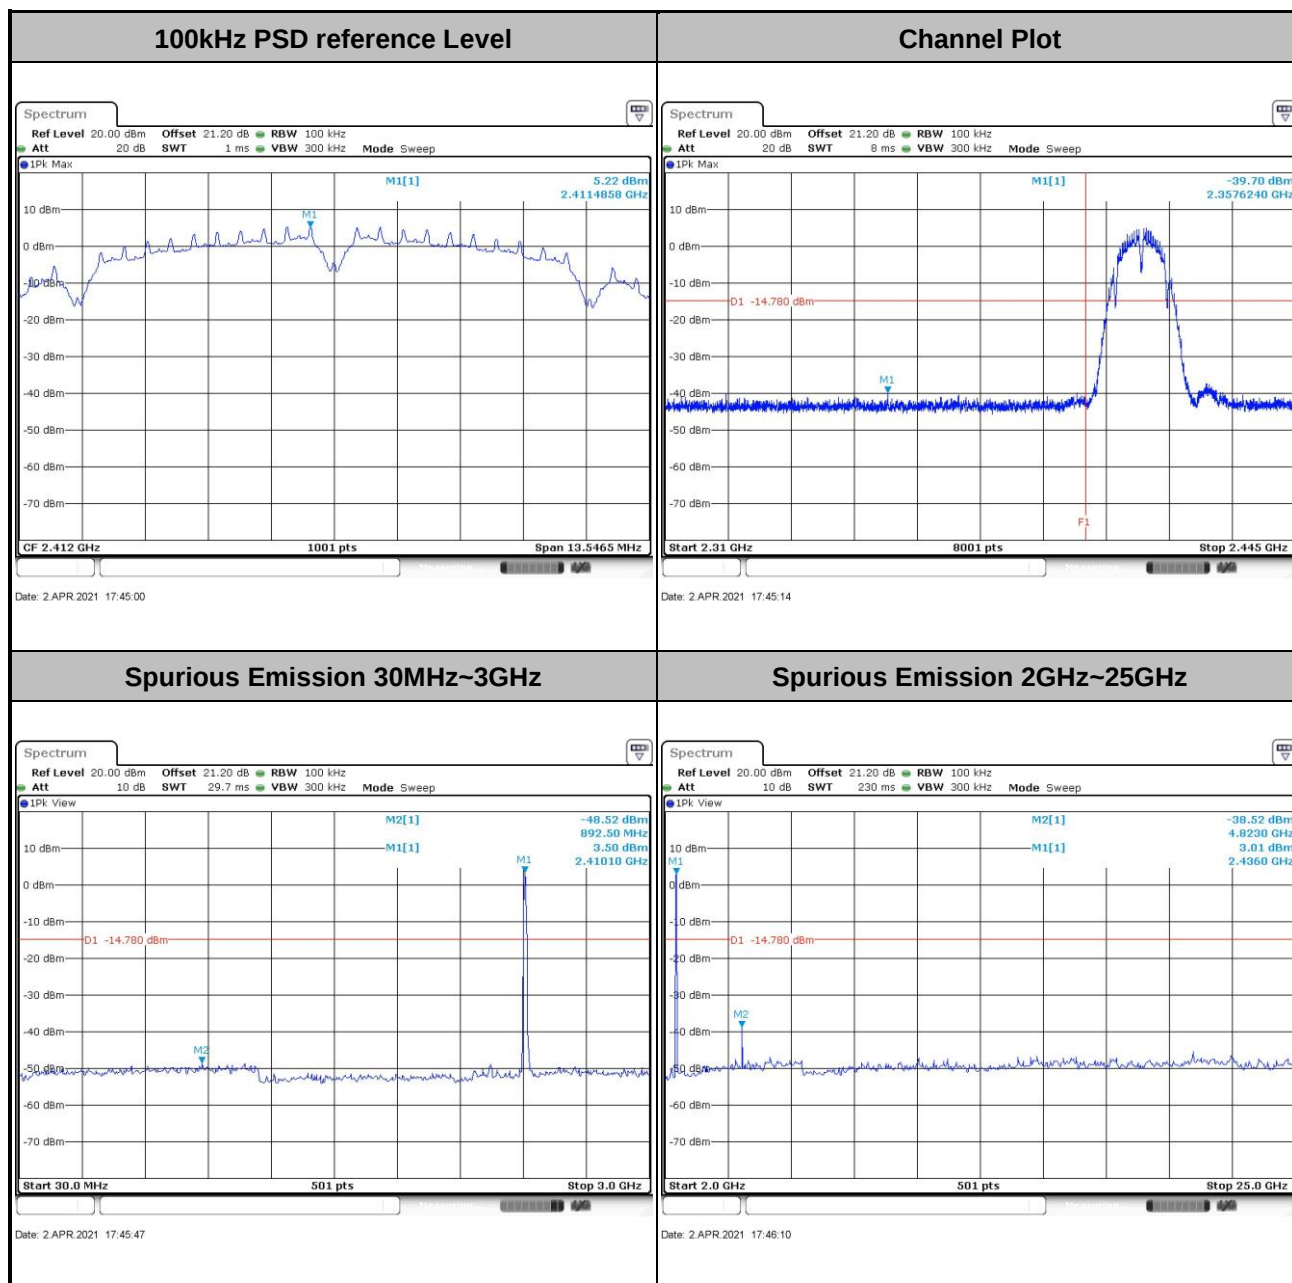




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

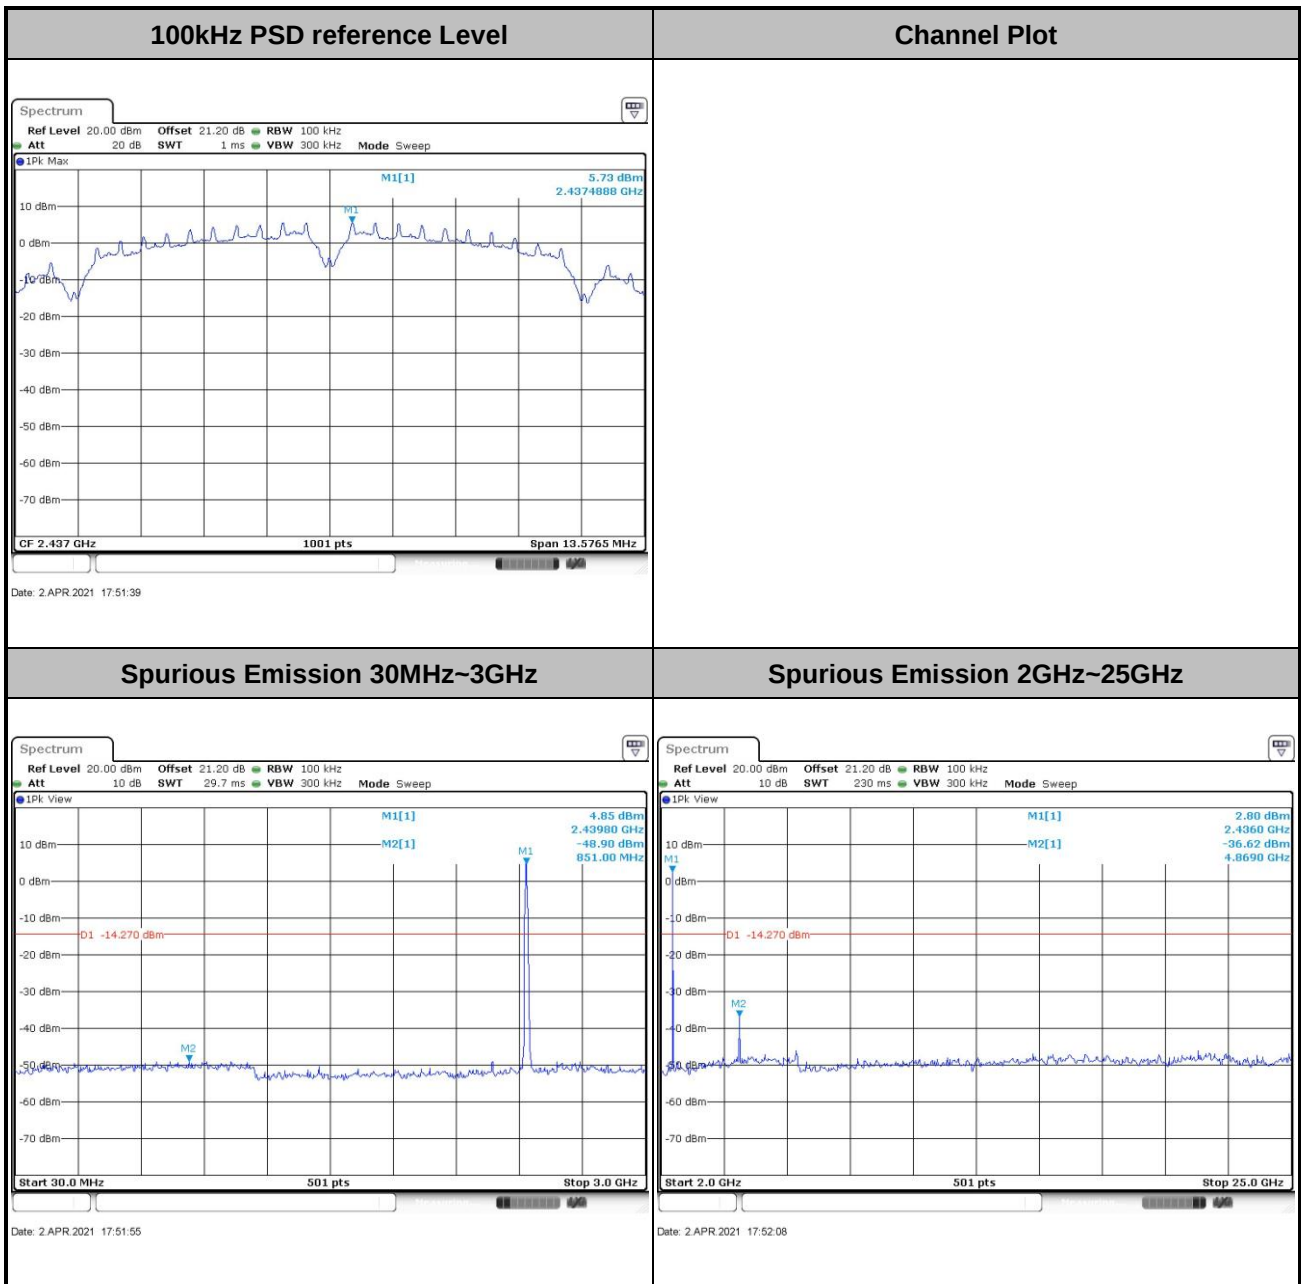




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

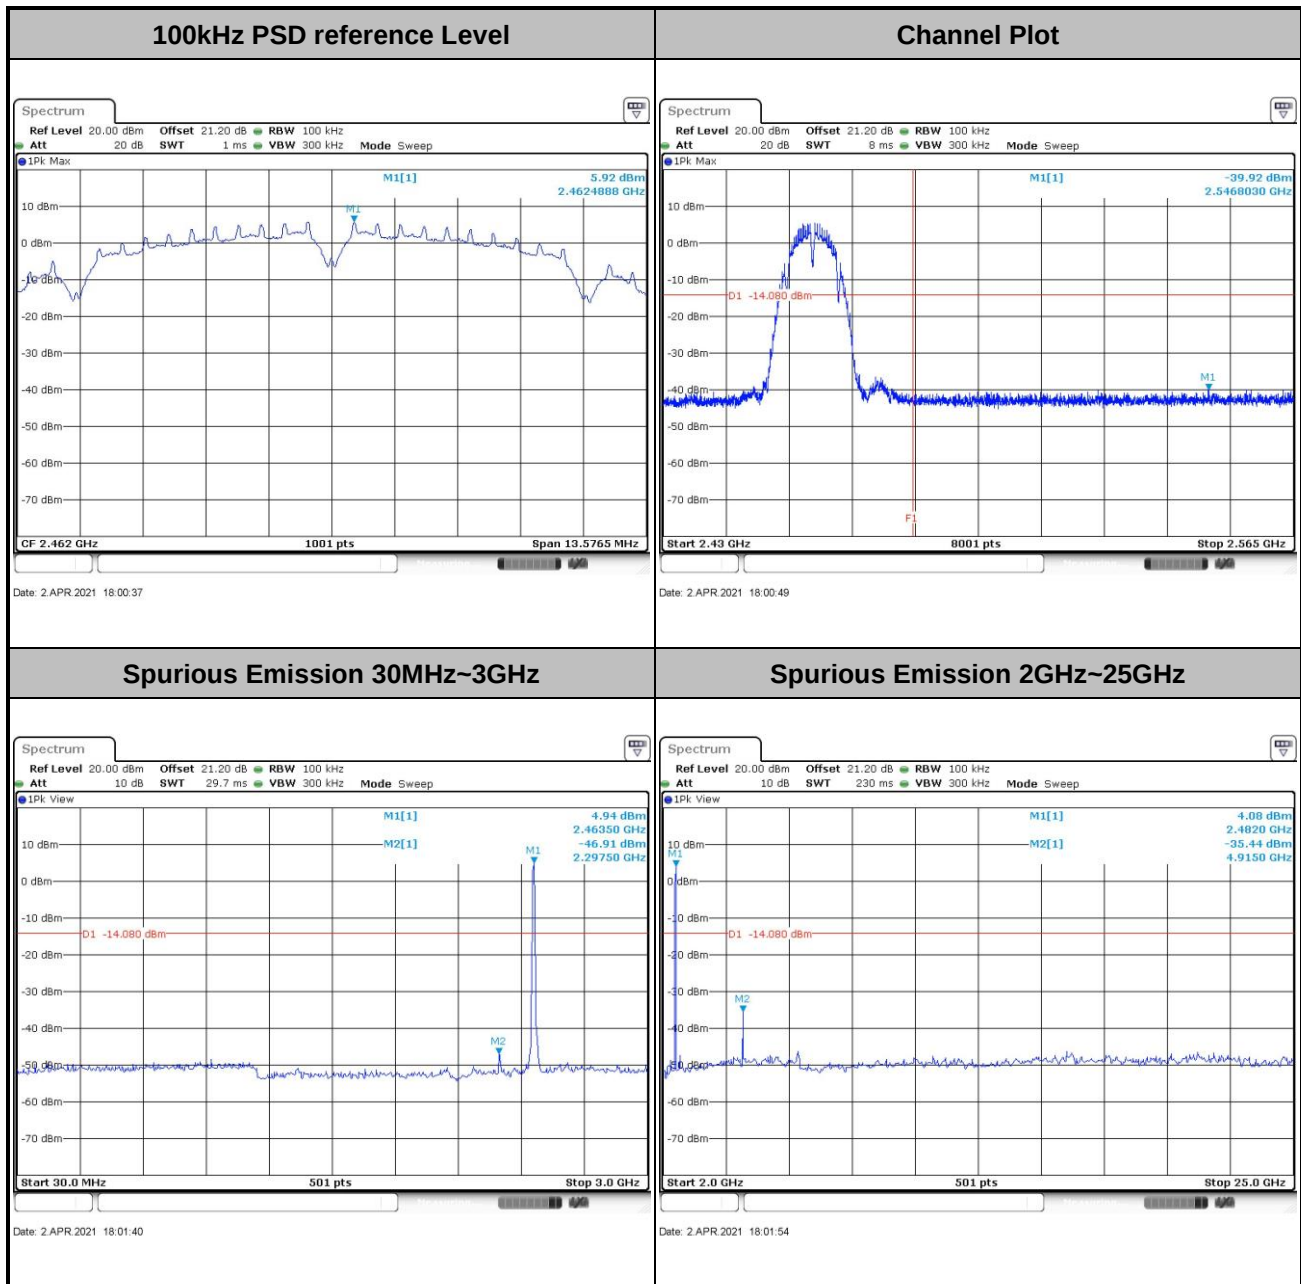




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

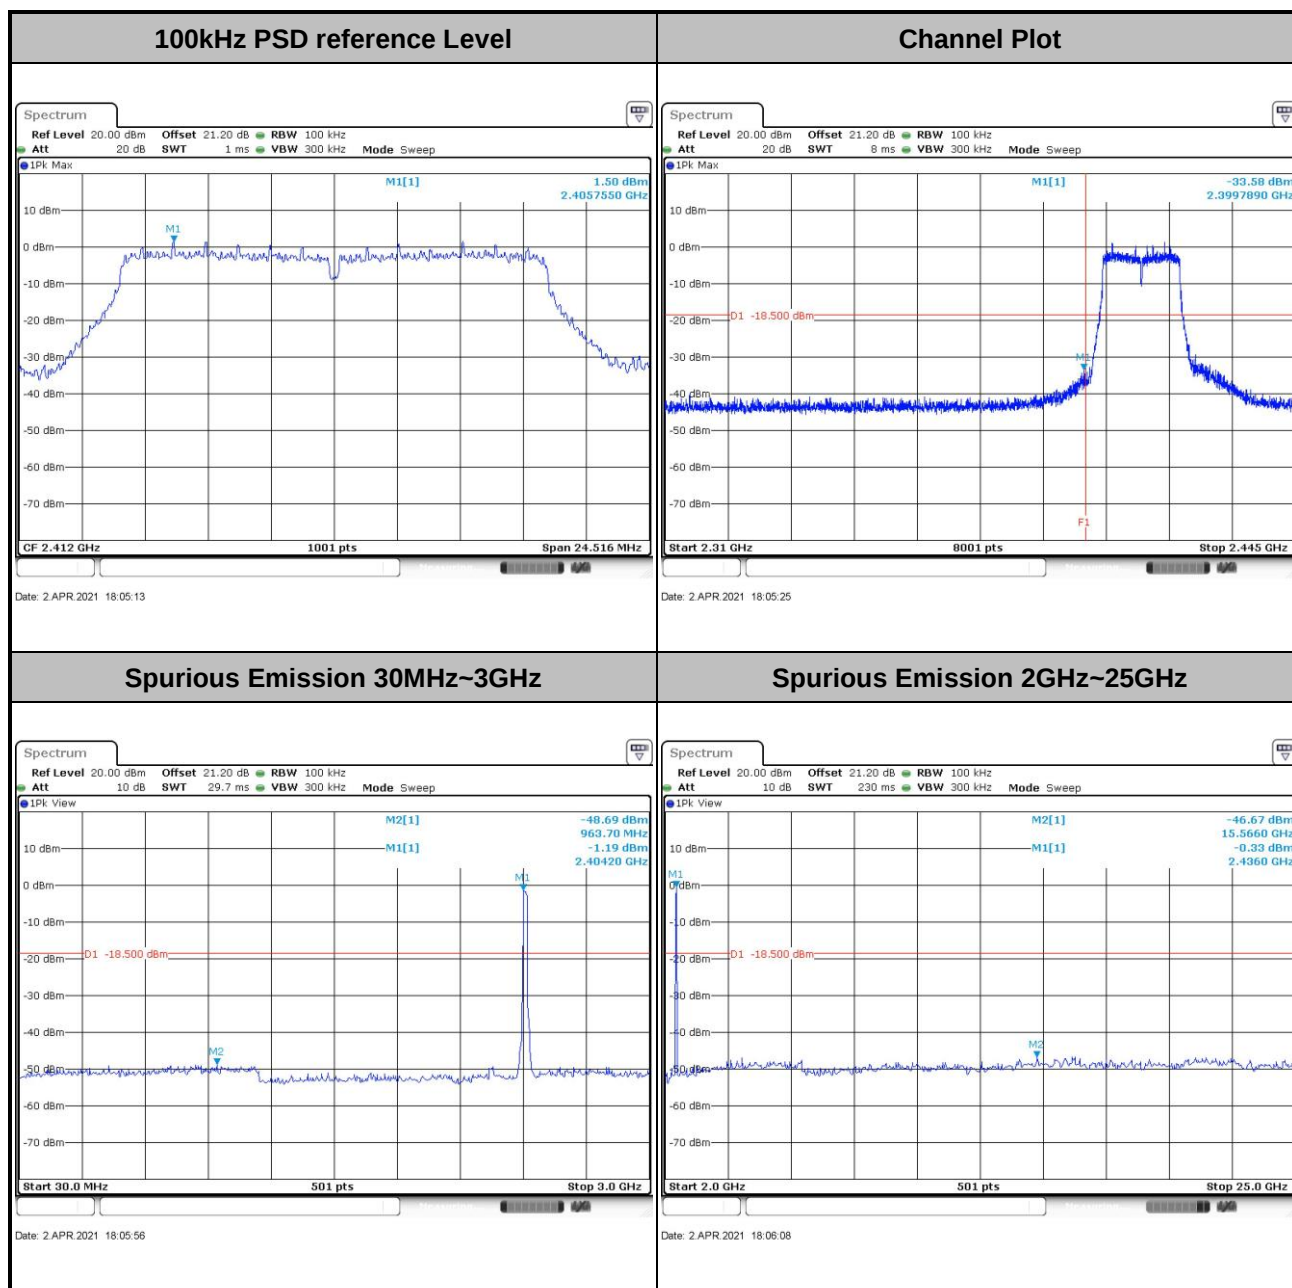




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

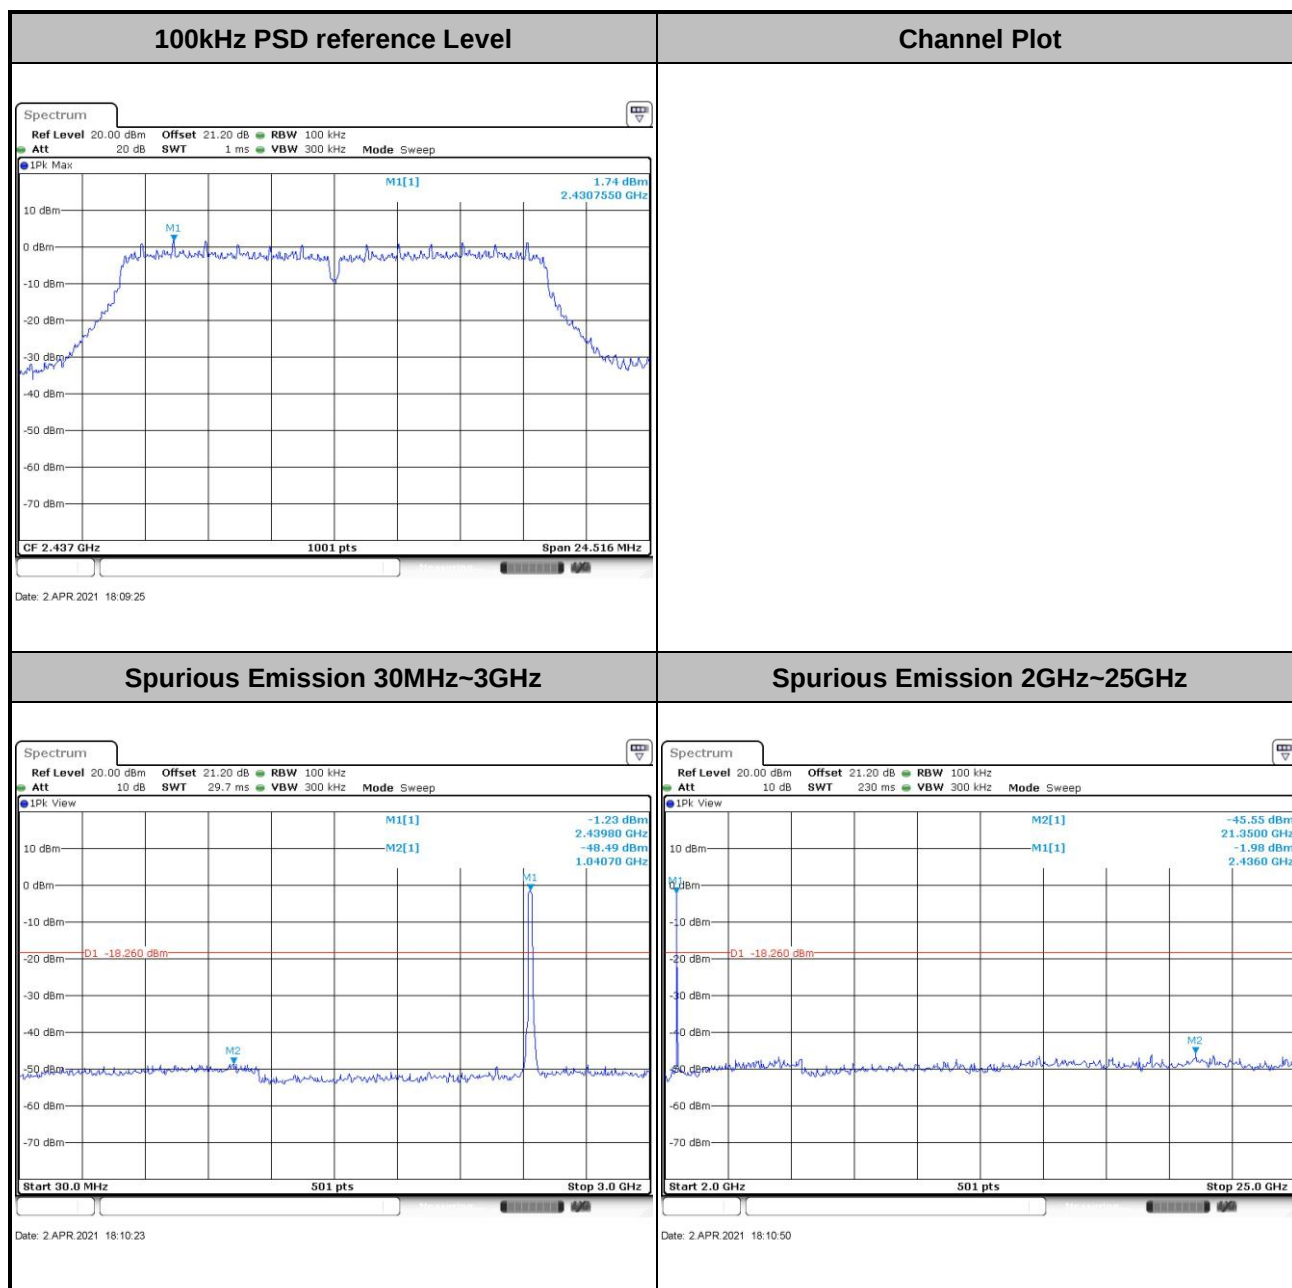




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

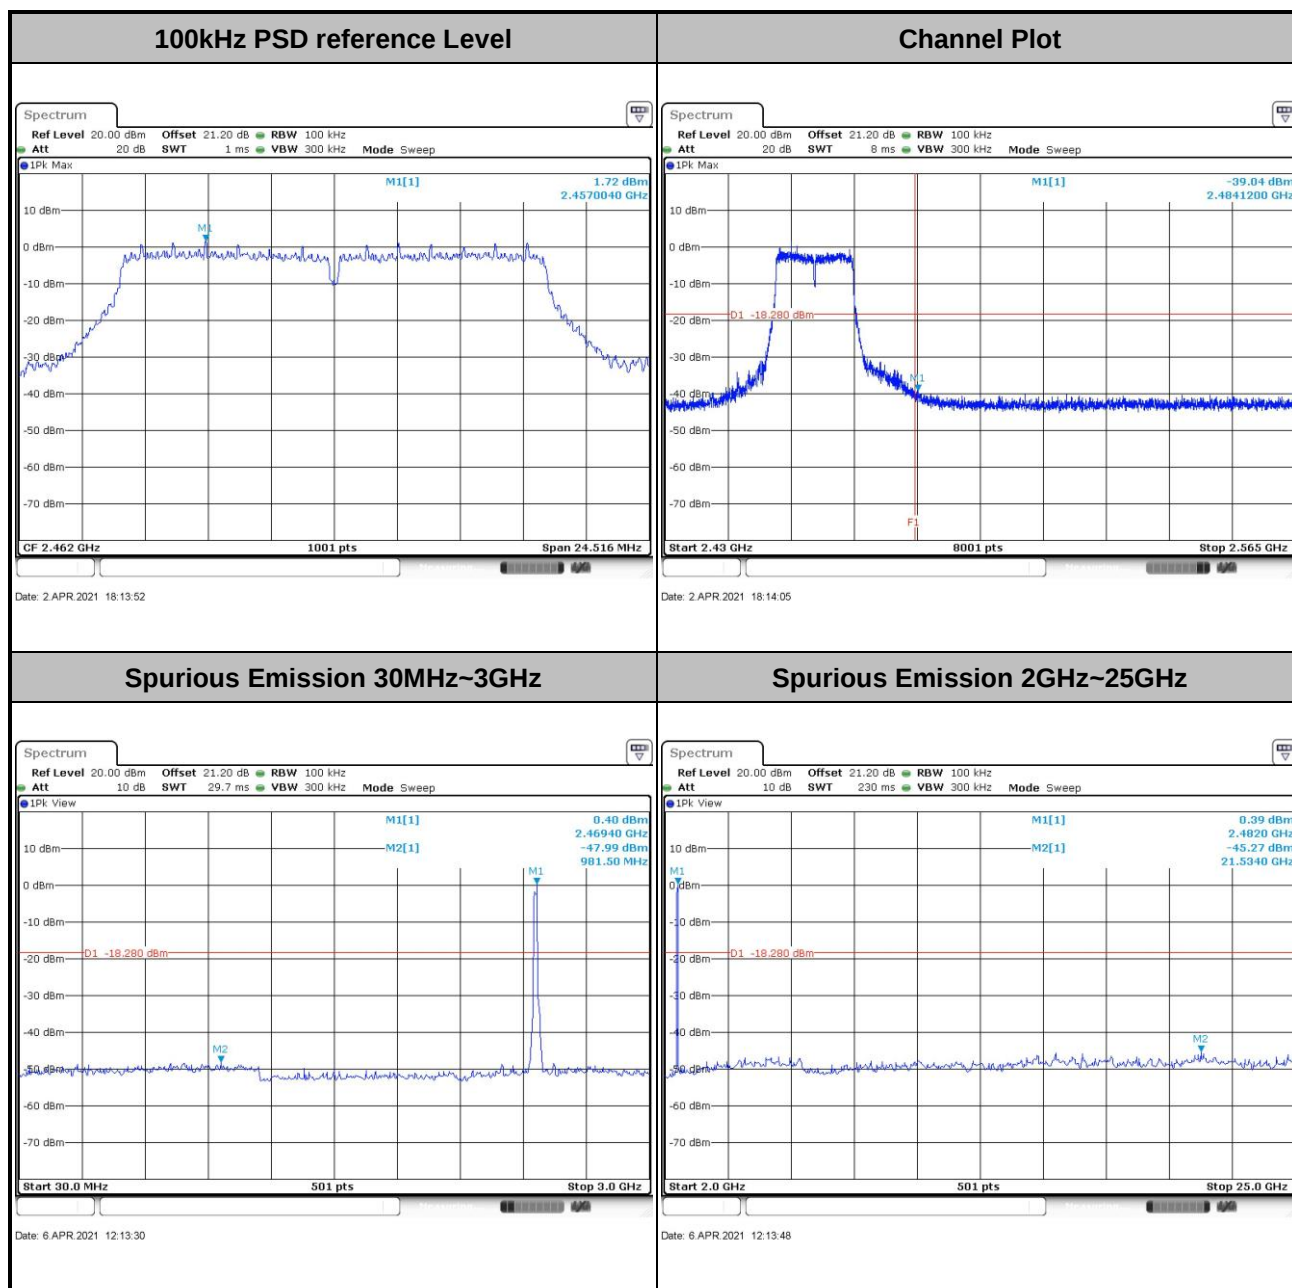




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----


100kHz PSD reference Level

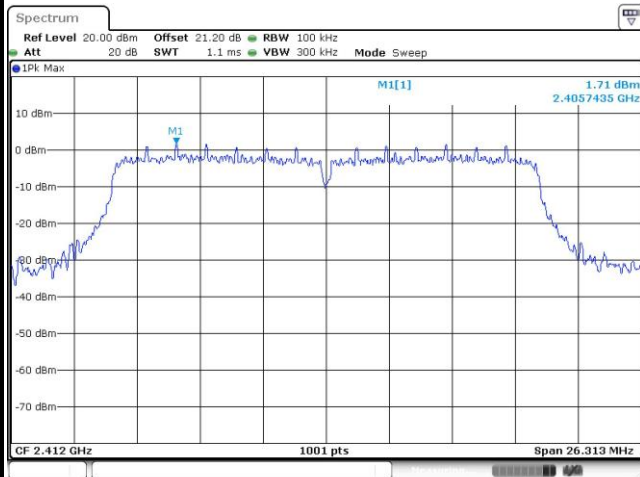


Channel Plot

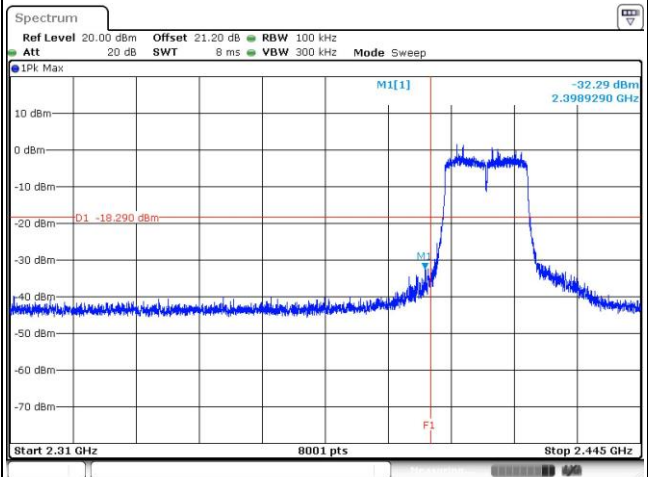

Spurious Emission 30MHz~3GHz

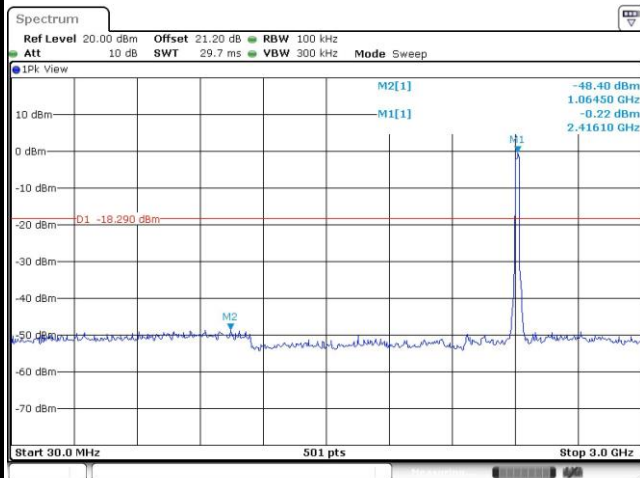


Spurious Emission 2GHz~25GHz

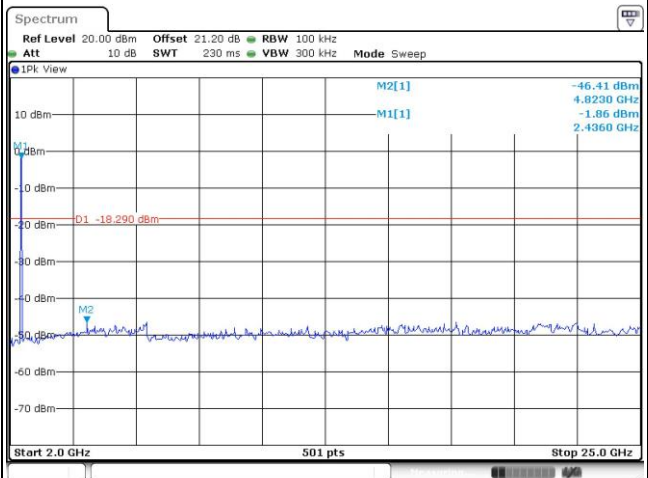




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

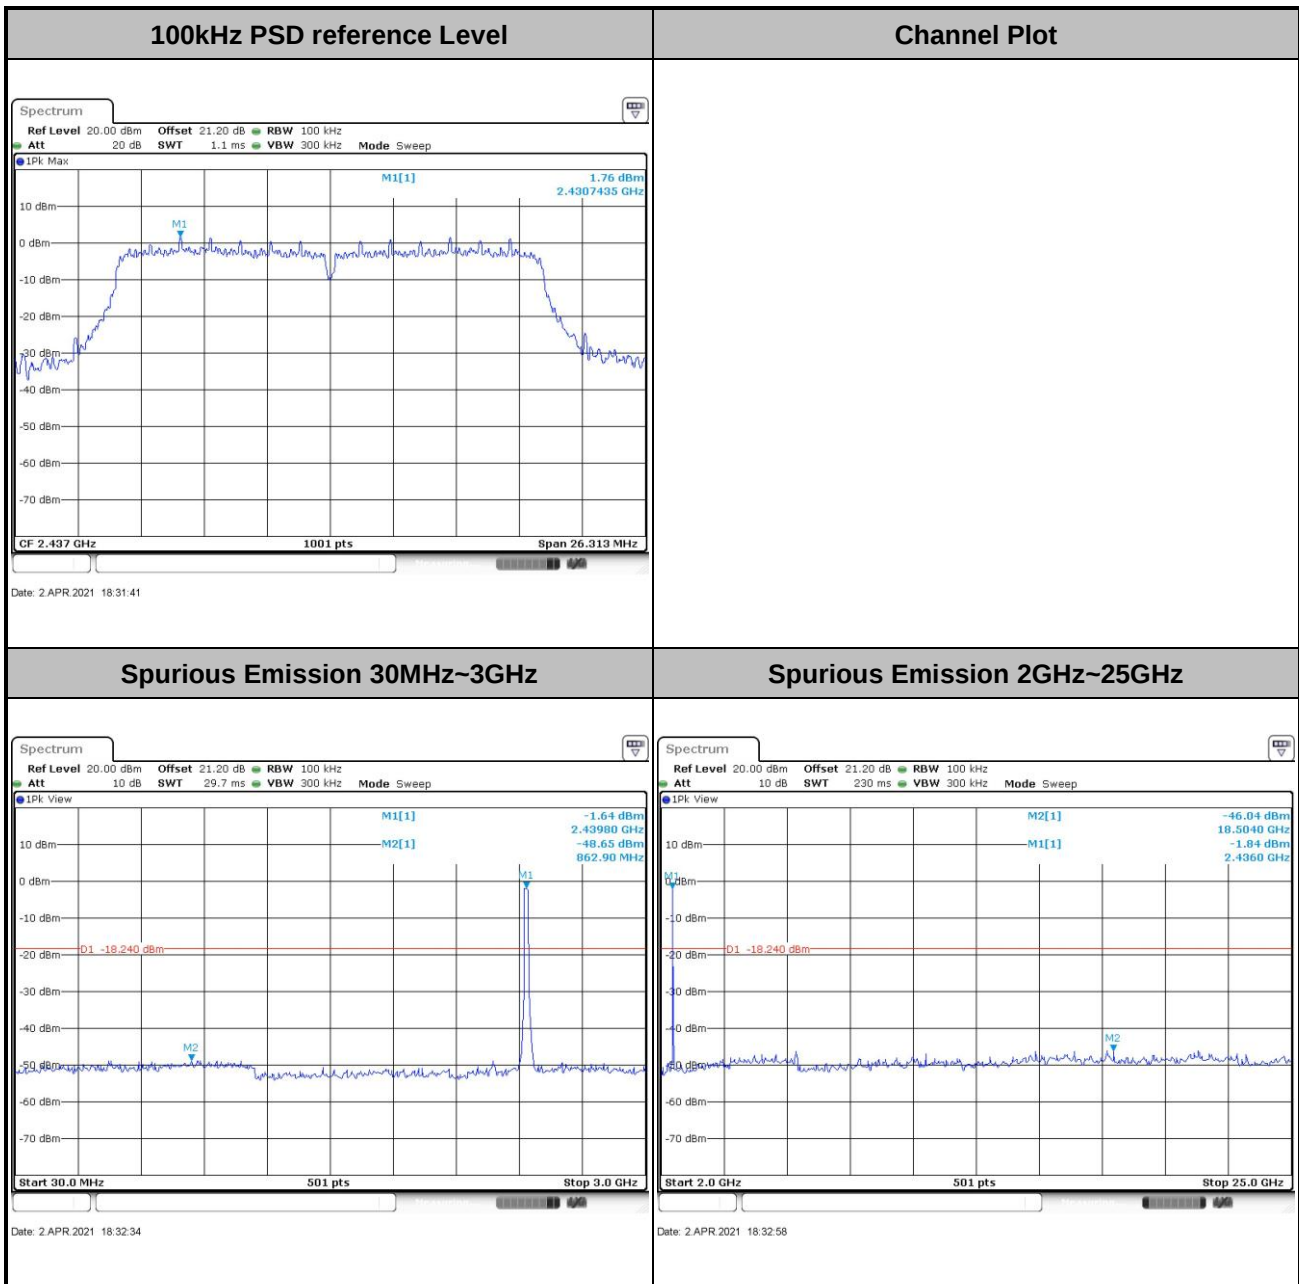



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

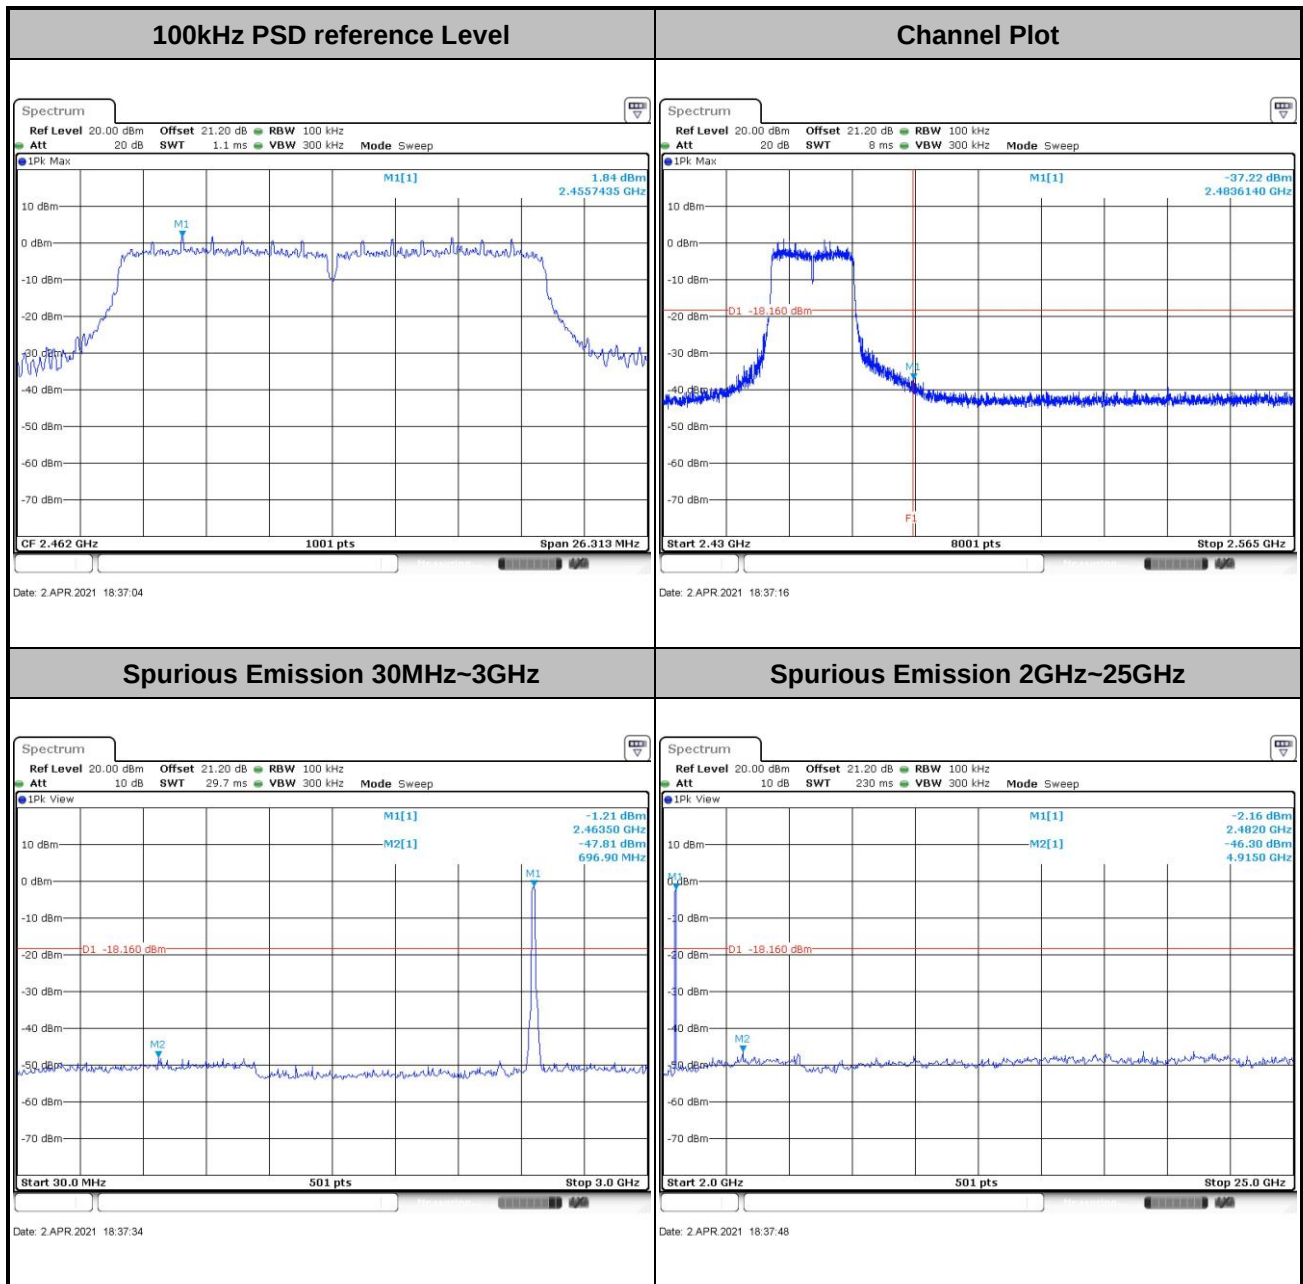




Test Mode : 802.11n HT40


Test Channel : 03

100kHz PSD reference Level

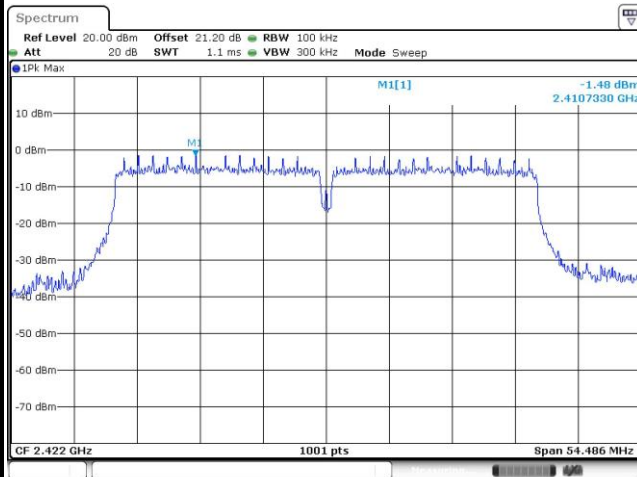


Date: 2 APR 2021 18:42:31

Channel Plot

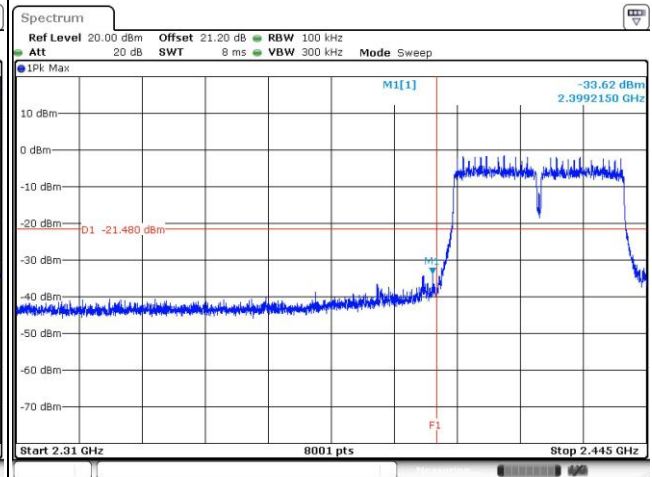


Date: 2 APR 2021 18:42:43

Spurious Emission 30MHz~3GHz

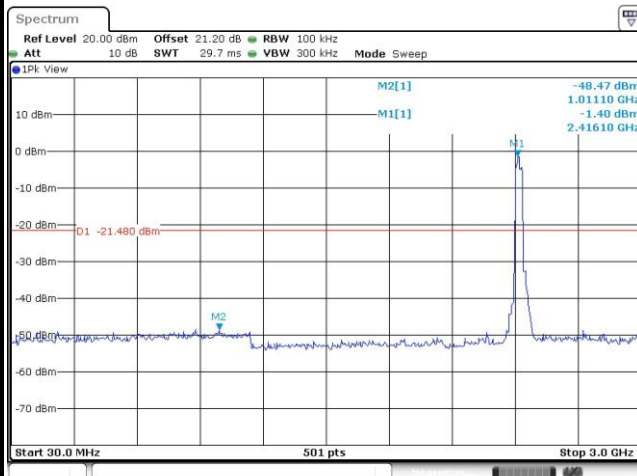

Date: 2 APR 2021 18:43:33

Spurious Emission 2GHz~25GHz

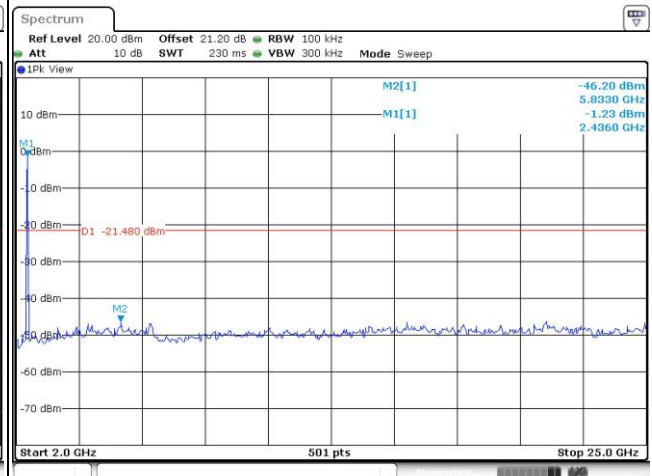


Date: 2 APR 2021 18:44:02




Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

100kHz PSD reference Level

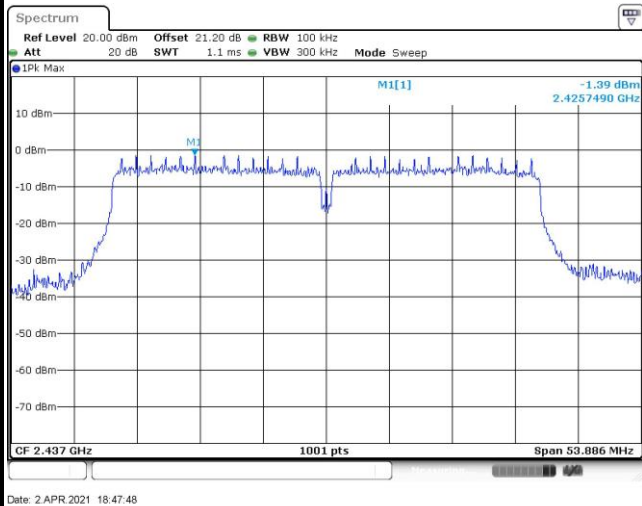


Channel Plot

Spurious Emission 30MHz~3GHz

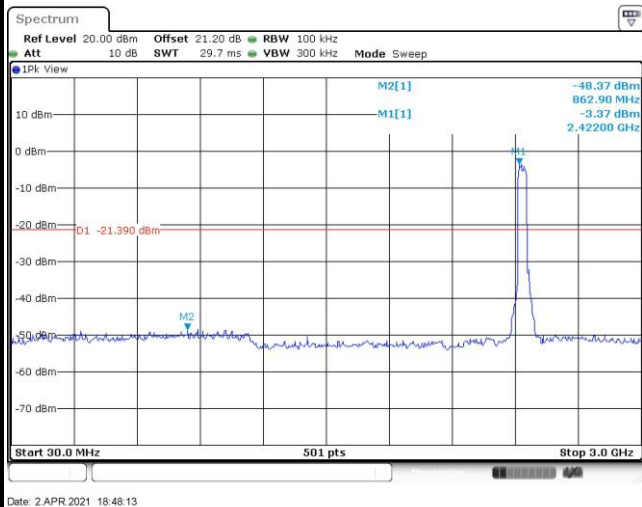


Spurious Emission 2GHz~25GHz

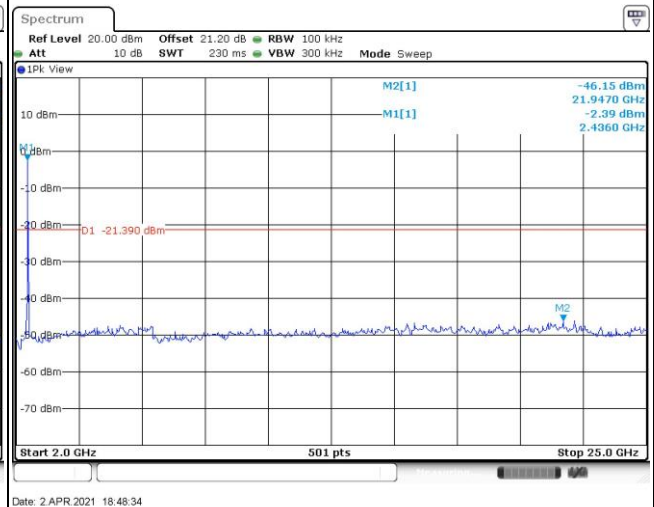



Test Mode :	802.11n HT40	Test Channel :	09
-------------	--------------	----------------	----

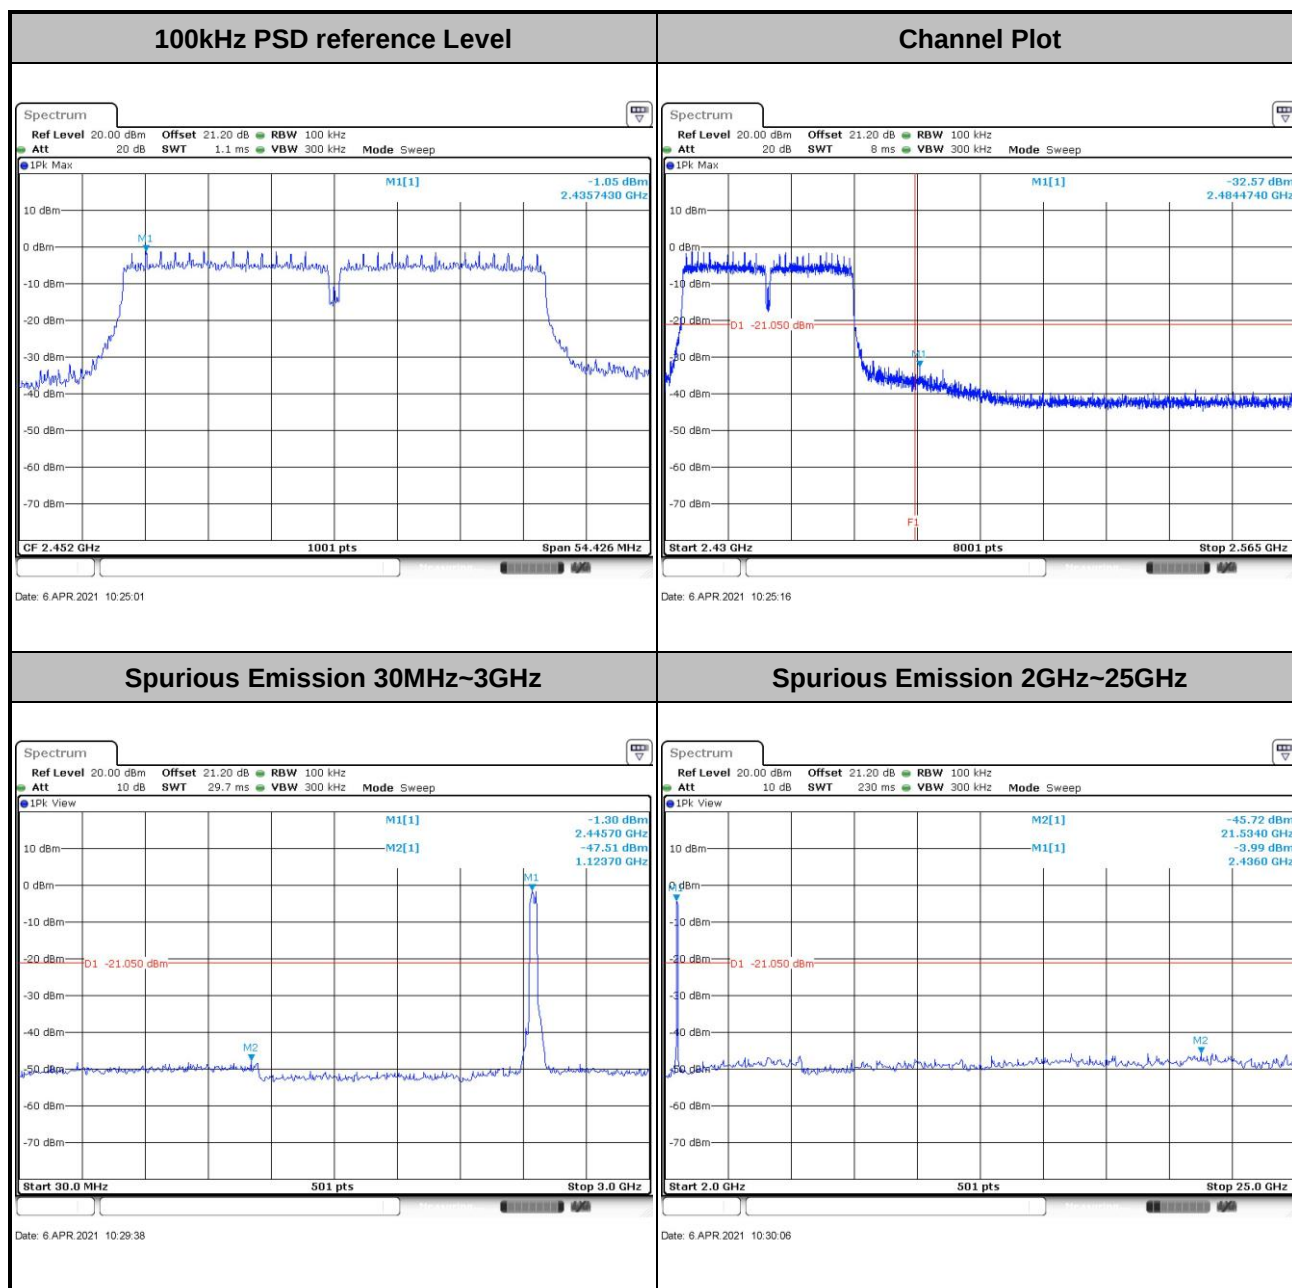

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

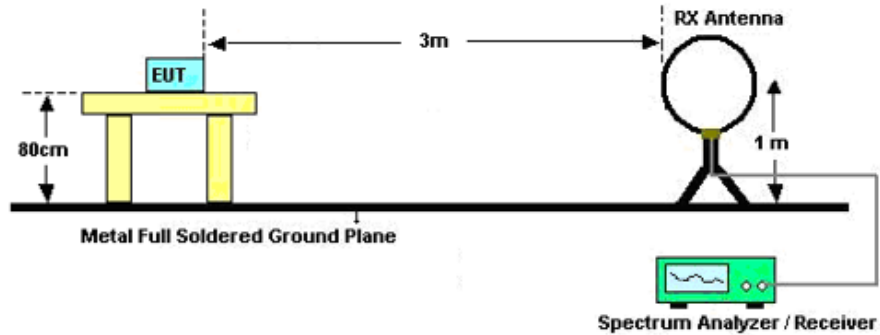

For radiated emissions from 30MHz to 1GHz

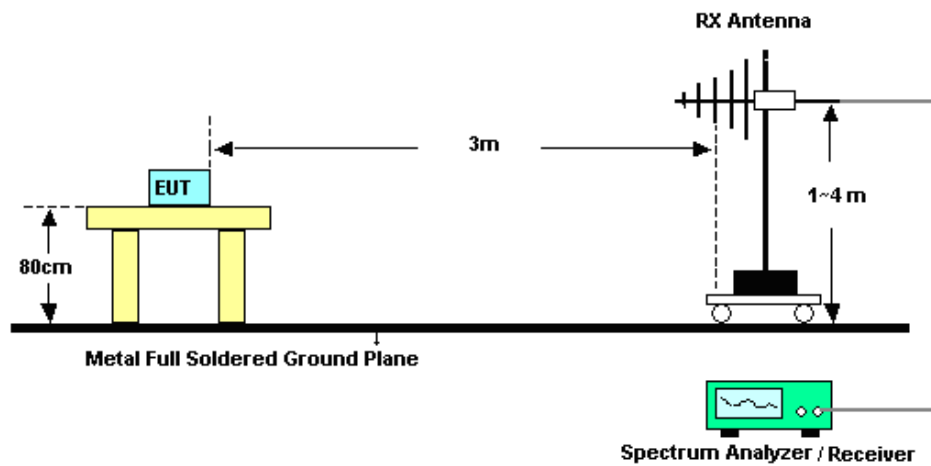

For radiated emissions above 1GHz

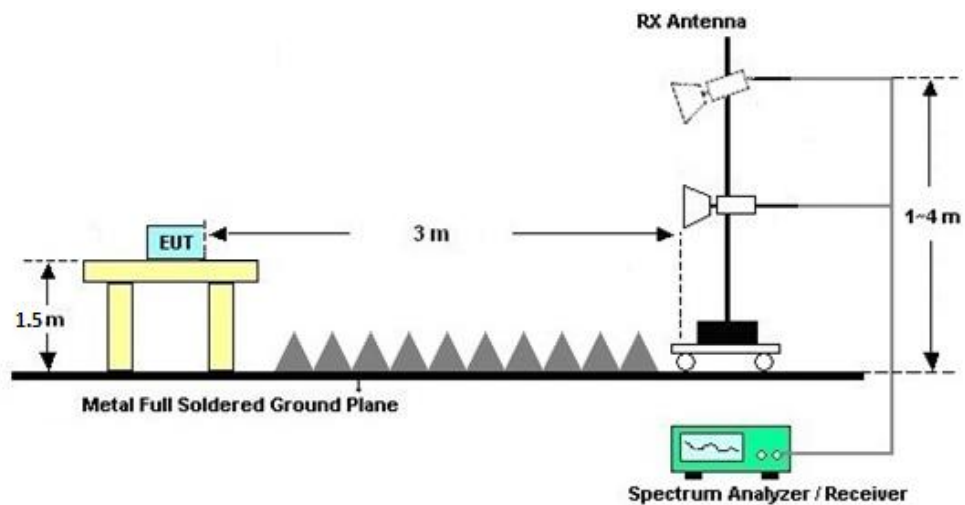

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

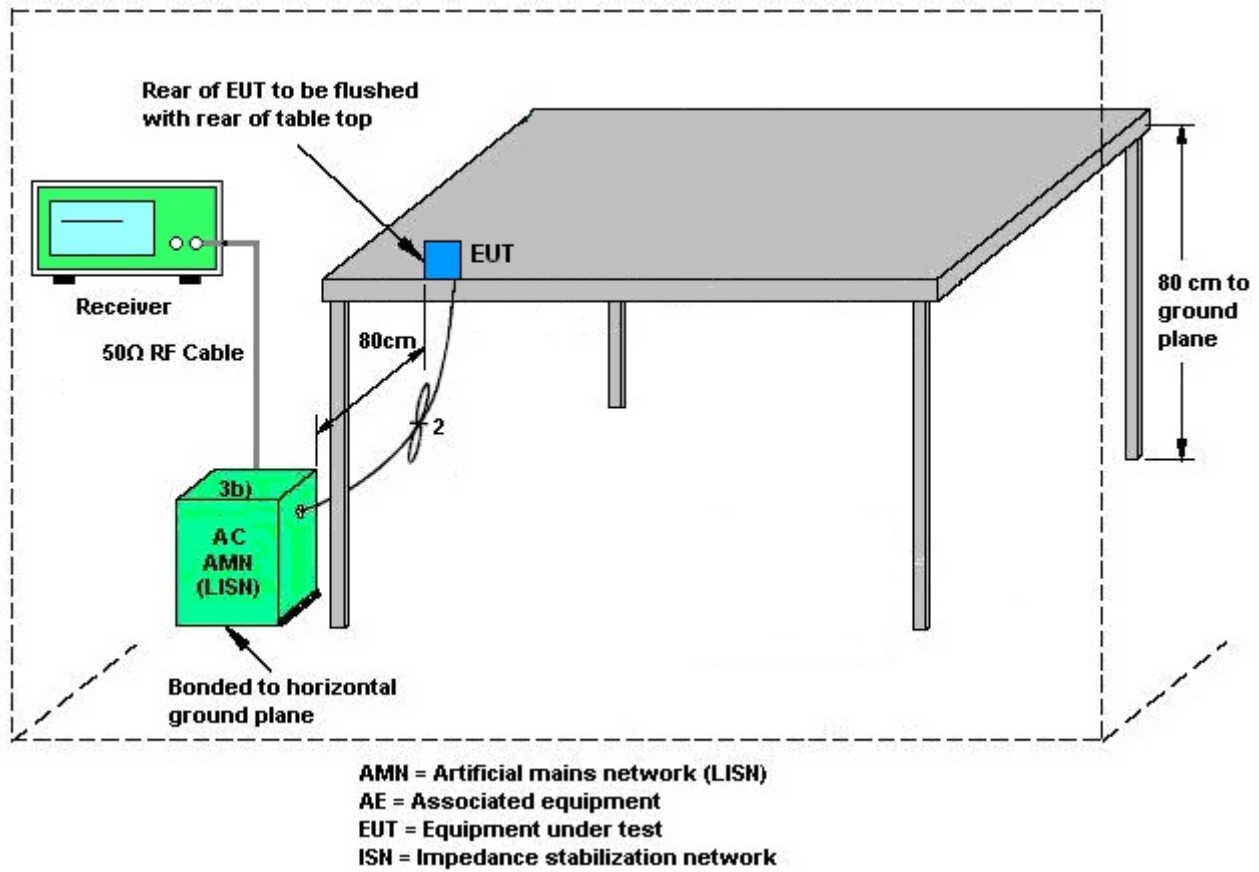

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2020	Apr. 02, 2021~ Apr. 06, 2021	Apr. 08, 2021	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 25, 2020	Apr. 02, 2021~ Apr. 06, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 25, 2020	Apr. 02, 2021~ Apr. 06, 2021	Dec. 24, 2021	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 21, 2020	Apr. 29, 2021	Jul. 20, 2021	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	Apr. 29, 2021	Jun. 21, 2021	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Jul. 15, 2020	Apr. 29, 2021	Jul. 14, 2021	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-2206	1GHz~18GHz	Apr. 21, 2021	Apr. 29, 2021	Apr. 20, 2022	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 21, 2020	Apr. 29, 2021	Jul. 20, 2021	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 23, 2021	Apr. 29, 2021	Apr. 22, 2022	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000MHz	Oct. 16, 2020	Apr. 29, 2021	Oct. 15, 2021	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 17, 2020	Apr. 29, 2021	Oct. 16, 2021	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 16, 2020	Apr. 29, 2021	Oct. 15, 2021	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Apr. 29, 2021	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Apr. 29, 2021	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Apr. 29, 2021	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Mar. 07, 2021	Mar. 31, 2021	Mar. 06, 2022	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2 LISN	00103912	9kHz~30MHz	Dec. 25, 2020	Mar. 31, 2021	Dec. 24, 2021	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 15, 2020	Mar. 31, 2021	Oct. 14, 2021	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 21, 2020	Mar. 31, 2021	Jul. 20, 2021	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.2dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Zhang Xue Yi	Temperature:	21~25	°C
Test Date:	2021/4/2~2021/4/6	Relative Humidity:	51~54	%

TEST RESULTS DATA
Peak Output Power

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	17.85	30.00	1.00	18.85	36.00	Pass
11b	1Mbps	1	6	2437	18.11	30.00	1.00	19.11	36.00	Pass
11b	1Mbps	1	11	2462	18.09	30.00	1.00	19.09	36.00	Pass
11g	6Mbps	1	1	2412	22.83	30.00	1.00	23.83	36.00	Pass
11g	6Mbps	1	6	2437	22.90	30.00	1.00	23.90	36.00	Pass
11g	6Mbps	1	11	2462	22.85	30.00	1.00	23.85	36.00	Pass
HT20	MCS0	1	1	2412	23.03	30.00	1.00	24.03	36.00	Pass
HT20	MCS0	1	6	2437	23.11	30.00	1.00	24.11	36.00	Pass
HT20	MCS0	1	11	2462	23.08	30.00	1.00	24.08	36.00	Pass
HT40	MCS0	1	3	2422	22.95	30.00	1.00	23.95	36.00	Pass
HT40	MCS0	1	6	2437	22.97	30.00	1.00	23.97	36.00	Pass
HT40	MCS0	1	9	2452	22.53	30.00	1.00	23.53	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band					
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
					Ant 1
11b	1Mbps	1	1	2412	15.30
11b	1Mbps	1	6	2437	15.80
11b	1Mbps	1	11	2462	15.70
11g	6Mbps	1	1	2412	14.60
11g	6Mbps	1	6	2437	14.80
11g	6Mbps	1	11	2462	14.70
HT20	MCS0	1	1	2412	14.50
HT20	MCS0	1	6	2437	14.80
HT20	MCS0	1	11	2462	14.60
HT40	MCS0	1	3	2422	14.70
HT40	MCS0	1	6	2437	14.70
HT40	MCS0	1	9	2452	14.20

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 1		
11b	1Mbps	1	1	2412	12.94	9.03	0.50	Pass
11b	1Mbps	1	6	2437	12.89	9.05	0.50	Pass
11b	1Mbps	1	11	2462	12.89	9.05	0.50	Pass
11g	6Mbps	1	1	2412	16.93	16.34	0.50	Pass
11g	6Mbps	1	6	2437	16.93	16.34	0.50	Pass
11g	6Mbps	1	11	2462	16.88	16.34	0.50	Pass
HT20	MCS0	1	1	2412	17.78	17.54	0.50	Pass
HT20	MCS0	1	6	2437	17.78	17.54	0.50	Pass
HT20	MCS0	1	11	2462	17.83	17.54	0.50	Pass
HT40	MCS0	1	3	2422	36.96	36.32	0.50	Pass
HT40	MCS0	1	6	2437	36.96	35.92	0.50	Pass
HT40	MCS0	1	9	2452	36.86	36.28	0.50	Pass


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	-8.32	1.00	8.00	Pass
11b	1Mbps	1	6	2437	-7.84	1.00	8.00	Pass
11b	1Mbps	1	11	2462	-8.13	1.00	8.00	Pass
11g	6Mbps	1	1	2412	-12.66	1.00	8.00	Pass
11g	6Mbps	1	6	2437	-9.78	1.00	8.00	Pass
11g	6Mbps	1	11	2462	-12.07	1.00	8.00	Pass
HT20	MCS0	1	1	2412	-12.16	1.00	8.00	Pass
HT20	MCS0	1	6	2437	-12.61	1.00	8.00	Pass
HT20	MCS0	1	11	2462	-12.30	1.00	8.00	Pass
HT40	MCS0	1	3	2422	-15.43	1.00	8.00	Pass
HT40	MCS0	1	6	2437	-15.45	1.00	8.00	Pass
HT40	MCS0	1	9	2452	-14.94	1.00	8.00	Pass

Measured power density (dBm) has offset with cable loss.




Appendix B. AC Conducted Emission Test Results

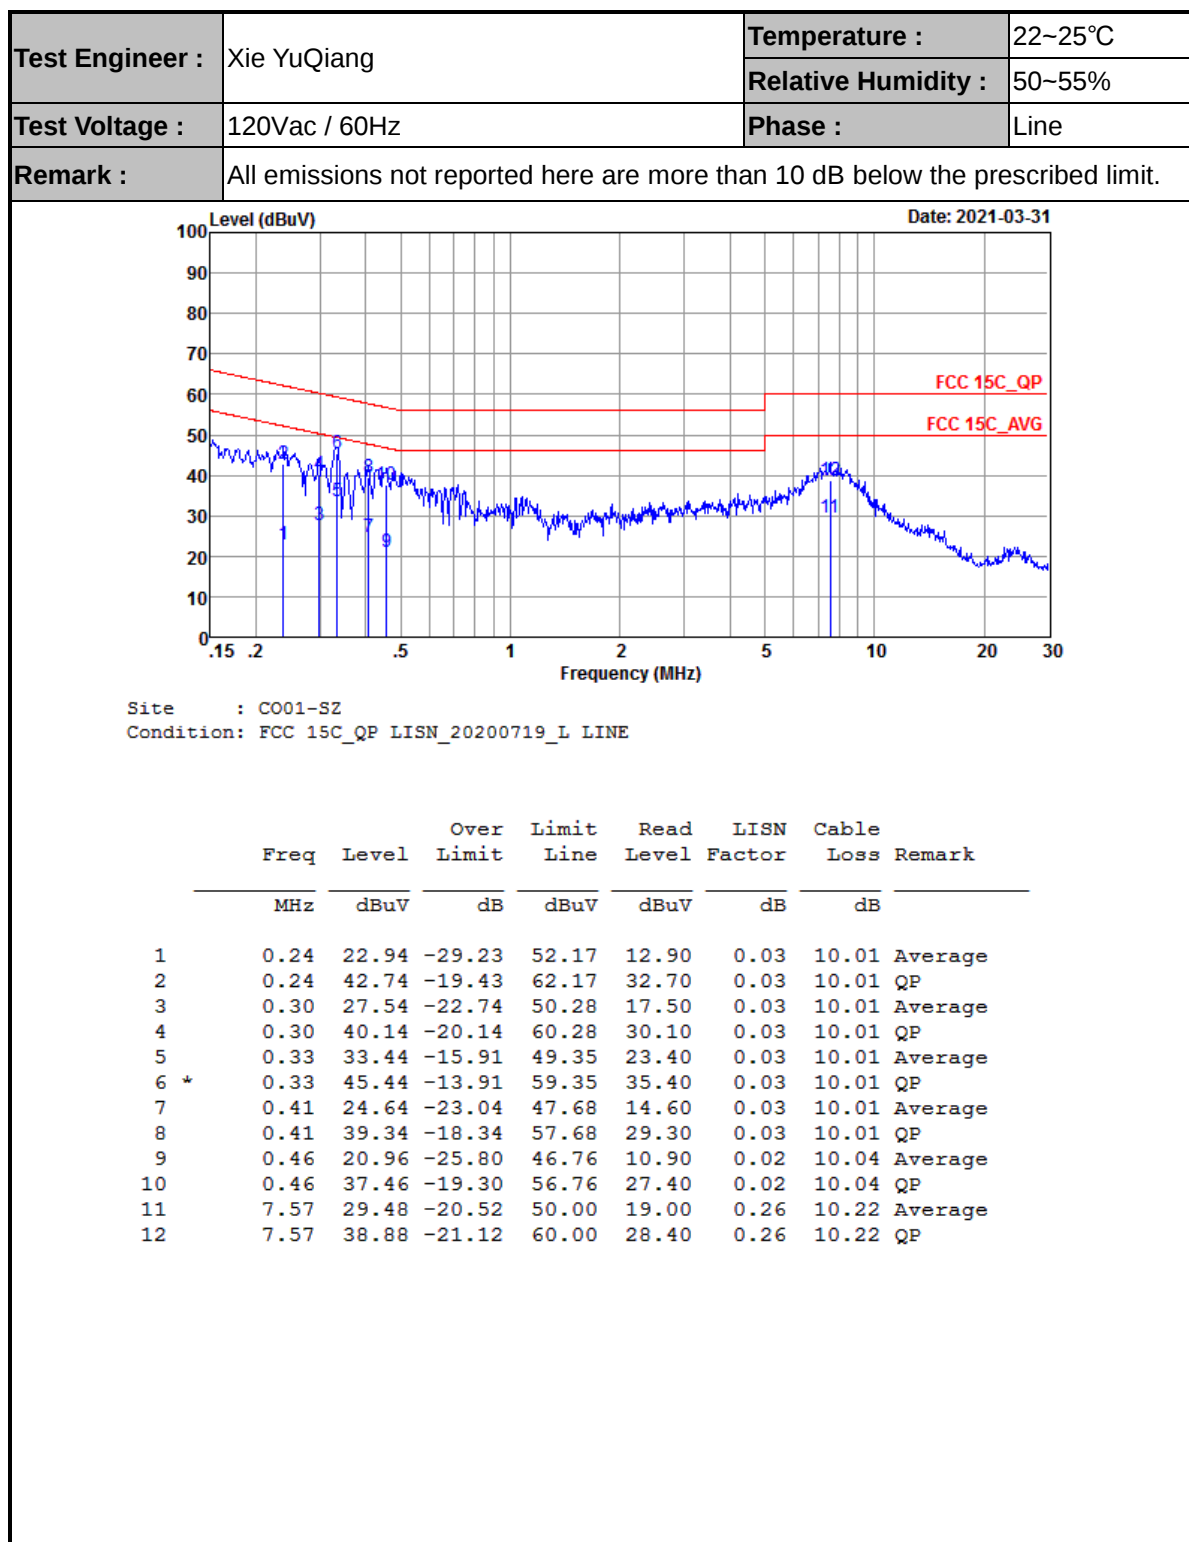



Test Engineer :	Xie YuQiang	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

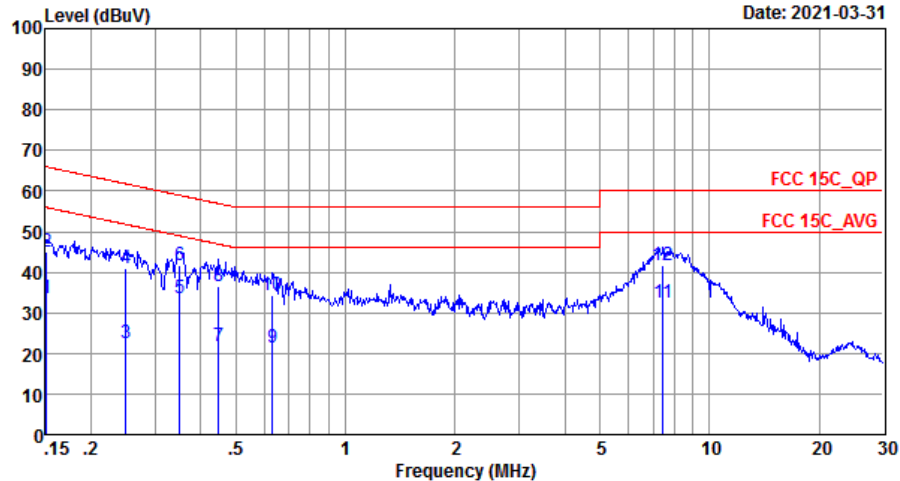

Site : C001-SZ
Condition: FCC 15C QP LISN_20200719_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	33.74	-22.22	55.96	23.70	0.03	10.01	Average
2	0.15	44.94	-21.02	65.96	34.90	0.03	10.01	QP
3	0.25	22.64	-29.14	51.78	12.60	0.03	10.01	Average
4	0.25	40.94	-20.84	61.78	30.90	0.03	10.01	QP
5 *	0.35	33.43	-15.53	48.96	23.40	0.02	10.01	Average
6	0.35	41.73	-17.23	58.96	31.70	0.02	10.01	QP
7	0.45	21.76	-25.13	46.89	11.70	0.02	10.04	Average
8	0.45	36.66	-20.23	56.89	26.60	0.02	10.04	QP
9	0.63	21.39	-24.61	46.00	11.30	0.02	10.07	Average
10	0.63	34.49	-21.51	56.00	24.40	0.02	10.07	QP
11	7.45	32.50	-17.50	50.00	22.20	0.08	10.22	Average
12	7.45	41.80	-18.20	60.00	31.50	0.08	10.22	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz	*	2346.225	50.29	-23.71	74	46.61	27.88	7.75	31.95	356	347	P	H
		2390	39.29	-14.71	54	35.59	27.81	7.8	31.91	356	347	A	H
	*	2412	103.1	-	-	99.37	27.79	7.83	31.89	356	347	P	H
	*	2412	99.88	-	-	96.15	27.79	7.83	31.89	356	347	A	H
	*	2389.485	54.74	-19.26	74	51.03	27.82	7.8	31.91	116	256	P	V
		2390	39.38	-14.62	54	35.68	27.81	7.8	31.91	116	256	A	V
	*	2412	103.78	-	-	100.05	27.79	7.83	31.89	116	256	P	V
	*	2412	100.61	-	-	96.88	27.79	7.83	31.89	116	256	A	V
802.11b CH 06 2437MHz	*	2314.9	50.27	-23.73	74	46.62	27.93	7.71	31.99	398	342	P	H
		2385.04	39.13	-14.87	54	35.43	27.82	7.79	31.91	398	342	A	H
	*	2437	94.03	-	-	90.25	27.78	7.86	31.86	398	342	P	H
	*	2437	91.1	-	-	87.32	27.78	7.86	31.86	398	342	A	H
	*	2485.86	49.57	-24.43	74	45.71	27.76	7.91	31.81	398	342	P	H
		2493.77	39.31	-14.69	54	35.45	27.75	7.92	31.81	398	342	A	H
	*	2337.44	50.6	-23.4	74	46.93	27.89	7.74	31.96	106	254	P	V
		2363.9	39.28	-14.72	54	35.6	27.85	7.77	31.94	106	254	A	V
	*	2437	94.79	-	-	91.01	27.78	7.86	31.86	106	254	P	V
	*	2437	91.87	-	-	88.09	27.78	7.86	31.86	106	254	A	V
	*	2498.81	49.68	-24.32	74	45.8	27.75	7.93	31.8	106	254	P	V
		2490.13	39.5	-14.5	54	35.64	27.75	7.92	31.81	106	254	A	V



802.11b CH 11 2462MHz	*	2462	90.2	-	-	86.38	27.77	7.89	31.84	390	342	P	H
	*	2462	87.06	-	-	83.24	27.77	7.89	31.84	390	342	A	H
	*	2487	50.05	-23.95	74	46.19	27.76	7.91	31.81	390	342	P	H
		2494.8	39.33	-14.67	54	35.47	27.75	7.92	31.81	390	342	A	H
	*	2462	91.82	-	-	88	27.77	7.89	31.84	127	257	P	V
	*	2462	88.66	-	-	84.84	27.77	7.89	31.84	127	257	A	V
	*	2494.04	49.96	-24.04	74	46.1	27.75	7.92	31.81	127	257	P	V
		2488.12	39.45	-14.55	54	35.58	27.76	7.92	31.81	127	257	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	52.11	-1.89	54	59.94	31.32	10.39	49.54	100	247	A	H
	*	4824	53.29	-20.71	74	61.12	31.32	10.39	49.54	100	247	P	H
		4824	53.37	-0.63	54	61.2	31.32	10.39	49.54	127	53	A	V
	*	4824	55.46	-18.54	74	63.29	31.32	10.39	49.54	127	53	P	V
802.11b CH 06 2437MHz		4874	47.42	-6.58	54	55.15	31.37	10.43	49.53	122	136	A	H
	*	4874	49.35	-24.65	74	57.08	31.37	10.43	49.53	122	136	P	H
		7311	47.82	-26.18	74	49.9	36.21	12.1	50.39	112	298	P	H
		4874	48.45	-5.55	54	56.18	31.37	10.43	49.53	133	20	A	V
	*	4874	50.89	-23.11	74	58.62	31.37	10.43	49.53	133	20	P	V
		7311	47.94	-26.06	74	50.02	36.21	12.1	50.39	185	32	P	V
802.11b CH 11 2462MHz		4924	47.13	-6.87	54	54.75	31.42	10.48	49.52	142	56	A	H
	*	4924	49.13	-24.87	74	56.75	31.42	10.48	49.52	142	56	P	H
		7386	47.14	-26.86	74	49.11	36.29	12.17	50.43	172	214	P	H
		4924	47.13	-6.87	54	54.75	31.42	10.48	49.52	142	56	A	V
	*	4924	49.13	-24.87	74	56.75	31.42	10.48	49.52	142	56	P	V
		7386	47.14	-26.86	74	49.11	36.29	12.17	50.43	172	214	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz	*	2390	57.4	-16.6	74	53.7	27.81	7.8	31.91	364	348	P	H
		2390	44.46	-9.54	54	40.76	27.81	7.8	31.91	364	348	A	H
	*	2412	103.83	-	-	100.1	27.79	7.83	31.89	364	348	P	H
	*	2412	95.83	-	-	92.1	27.79	7.83	31.89	364	348	A	H
	*	2389.8	57.83	-16.17	74	54.12	27.82	7.8	31.91	154	261	P	V
		2390	44.65	-9.35	54	40.95	27.81	7.8	31.91	154	261	A	V
	*	2412	104.65	-	-	100.92	27.79	7.83	31.89	154	261	P	V
	*	2412	96.78	-	-	93.05	27.79	7.83	31.89	154	261	A	V
802.11g CH 06 2437MHz	*	2358.02	50.35	-23.65	74	46.67	27.86	7.76	31.94	358	351	P	H
		2368.52	39.63	-14.37	54	35.94	27.85	7.77	31.93	358	351	A	H
	*	2437	101.28	-	-	97.5	27.78	7.86	31.86	358	351	P	H
	*	2437	93.36	-	-	89.58	27.78	7.86	31.86	358	351	A	H
	*	2483.69	50.53	-23.47	74	46.68	27.76	7.91	31.82	358	351	P	H
		2493.28	39.81	-14.19	54	35.95	27.75	7.92	31.81	358	351	A	H
	*	2321.34	49.9	-24.1	74	46.24	27.92	7.72	31.98	118	265	P	V
		2384.06	39.61	-14.39	54	35.92	27.82	7.79	31.92	118	265	A	V
	*	2437	102.04	-	-	98.26	27.78	7.86	31.86	118	265	P	V
	*	2437	94.12	-	-	90.34	27.78	7.86	31.86	118	265	A	V
	*	2499.51	50.72	-23.28	74	46.84	27.75	7.93	31.8	118	265	P	V
		2488.66	39.94	-14.06	54	36.07	27.76	7.92	31.81	118	265	A	V



802.11g CH 11 2462MHz	*	2462	91.99	-	-	88.17	27.77	7.89	31.84	308	336	P	H
	*	2462	84.05	-	-	80.23	27.77	7.89	31.84	308	336	A	H
	*	2483.56	59.4	-14.6	74	55.55	27.76	7.91	31.82	308	336	P	H
		2483.56	45.57	-8.43	54	41.72	27.76	7.91	31.82	308	336	A	H
	*	2462	92.58	-	-	88.76	27.77	7.89	31.84	111	351	P	V
	*	2462	84.56	-	-	80.74	27.77	7.89	31.84	111	351	A	V
	*	2483.52	61.9	-12.1	74	58.05	27.76	7.91	31.82	111	351	P	V
		2483.52	46.91	-7.09	54	43.06	27.76	7.91	31.82	111	351	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	40.25	-13.75	54	48.08	31.32	10.39	49.54	107	242	A	H
	*	4824	51.35	-22.65	74	59.18	31.32	10.39	49.54	107	242	P	H
		4824	40.42	-13.58	54	48.25	31.32	10.39	49.54	137	58	A	V
	*	4824	50.81	-23.19	74	58.64	31.32	10.39	49.54	137	58	P	V
802.11g CH 06 2437MHz		4874	39.29	-14.71	54	47.02	31.37	10.43	49.53	109	231	A	H
	*	4874	49.81	-24.19	74	57.54	31.37	10.43	49.53	109	231	P	H
		7311	46.59	-27.41	74	48.67	36.21	12.1	50.39	112	298	P	H
		4874	40.36	-13.64	54	48.09	31.37	10.43	49.53	141	59	A	V
	*	4874	49.86	-24.14	74	57.59	31.37	10.43	49.53	141	59	P	V
		7311	46.94	-27.06	74	49.02	36.21	12.1	50.39	185	32	P	V
802.11g CH 11 2462MHz		4924	46.65	-27.35	74	54.27	31.42	10.48	49.52	102	203	P	H
	*	7386	47.43	-26.57	74	49.4	36.29	12.17	50.43	172	214	P	H
		4924	46.78	-27.22	74	54.4	31.42	10.48	49.52	102	203	P	V
	*	7386	48.03	-25.97	74	50	36.29	12.17	50.43	172	214	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz	*	2390	56.69	-17.31	74	52.99	27.81	7.8	31.91	362	345	P	H
		2390	45.09	-8.91	54	41.39	27.81	7.8	31.91	362	345	A	H
	*	2412	103.44	-	-	99.71	27.79	7.83	31.89	362	345	P	H
	*	2412	95.49	-	-	91.76	27.79	7.83	31.89	362	345	A	H
	*	2389.8	56.18	-17.82	74	52.47	27.82	7.8	31.91	100	257	P	V
		2390	45.1	-8.9	54	41.4	27.81	7.8	31.91	100	257	A	V
	*	2412	103.71	-	-	99.98	27.79	7.83	31.89	100	257	P	V
	*	2412	95.9	-	-	92.17	27.79	7.83	31.89	100	257	A	V
802.11n HT20 CH 06 2437MHz	*	2376.78	50.04	-23.96	74	46.35	27.83	7.78	31.92	400	343	P	H
		2371.74	39.33	-14.67	54	35.64	27.84	7.78	31.93	400	343	A	H
	*	2437	100.71	-	-	96.93	27.78	7.86	31.86	400	343	P	H
	*	2437	92.87	-	-	89.09	27.78	7.86	31.86	400	343	A	H
	*	2485.44	50.01	-23.99	74	46.15	27.76	7.91	31.81	400	343	P	H
		2486.91	39.48	-14.52	54	35.62	27.76	7.91	31.81	400	343	A	H
	*	2363.2	50.14	-23.86	74	46.45	27.86	7.77	31.94	100	70	P	V
		2368.66	39.43	-14.57	54	35.73	27.85	7.78	31.93	100	70	A	V
	*	2437	102.35	-	-	98.57	27.78	7.86	31.86	100	70	P	V
	*	2437	94.55	-	-	90.77	27.78	7.86	31.86	100	70	A	V
	*	2487.89	50.03	-23.97	74	46.16	27.76	7.92	31.81	100	70	P	V
		2486.14	39.71	-14.29	54	35.85	27.76	7.91	31.81	100	70	A	V



802.11n HT20 CH 11 2462MHz	*	2462	91.72	-	-	87.9	27.77	7.89	31.84	389	343	P	H
	*	2462	83.46	-	-	79.64	27.77	7.89	31.84	389	343	A	H
	*	2484.8	60.46	-13.54	74	56.61	27.76	7.91	31.82	389	343	P	H
		2484.12	47.24	-6.76	54	43.39	27.76	7.91	31.82	389	343	A	H
	*	2462	93.45	-	-	89.63	27.77	7.89	31.84	134	257	P	V
	*	2462	85.21	-	-	81.39	27.77	7.89	31.84	134	257	A	V
	*	2484.48	62.53	-11.47	74	58.68	27.76	7.91	31.82	134	257	P	V
		2484.08	49.69	-4.31	54	45.84	27.76	7.91	31.82	134	257	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4824	39.21	-14.79	54	47.04	31.32	10.39	49.54	107	247	A	H
HT20	*	4824	49.36	-24.64	74	57.19	31.32	10.39	49.54	107	247	P	H
CH 01		4824	40.26	-13.74	54	48.09	31.32	10.39	49.54	148	69	A	V
2412MHz	*	4824	50.87	-23.13	74	58.7	31.32	10.39	49.54	148	69	P	V
802.11n		4874	40.93	-13.07	54	48.66	31.37	10.43	49.53	117	225	A	H
HT20	*	4874	50.5	-23.5	74	58.23	31.37	10.43	49.53	117	225	P	H
CH 06		7311	46.43	-27.57	74	48.51	36.21	12.1	50.39	112	298	P	H
2437MHz	*	4874	39.44	-14.56	54	47.17	31.37	10.43	49.53	162	54	A	V
	*	4874	48.7	-25.3	74	56.43	31.37	10.43	49.53	162	54	P	V
		7311	47.5	-26.5	74	49.58	36.21	12.1	50.39	185	32	P	V
802.11n		4924	47.04	-26.96	74	54.66	31.42	10.48	49.52	102	203	P	H
HT20	*	7386	47.56	-26.44	74	49.53	36.29	12.17	50.43	172	214	P	H
CH 11		4924	46.33	-27.67	74	53.95	31.42	10.48	49.52	102	203	P	V
2462MHz	*	7386	46.75	-27.25	74	48.72	36.29	12.17	50.43	172	214	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz	*	2389.8	59.98	-14.02	74	56.27	27.82	7.8	31.91	308	62	P	H
		2389.94	49.47	-4.53	54	45.76	27.82	7.8	31.91	308	62	A	H
	*	2422	99.78	-	-	96.03	27.79	7.84	31.88	308	62	P	H
	*	2422	91.71	-	-	87.96	27.79	7.84	31.88	308	62	A	H
	*	2486.56	53.28	-20.72	74	49.42	27.76	7.91	31.81	308	62	P	H
		2486.91	41.17	-12.83	54	37.31	27.76	7.91	31.81	308	62	A	H
	*	2387.98	57.55	-16.45	74	53.84	27.82	7.8	31.91	106	118	P	V
		2389.94	47.27	-6.73	54	43.56	27.82	7.8	31.91	106	118	A	V
	*	2422	98.12	-	-	94.37	27.79	7.84	31.88	106	118	P	V
	*	2422	90.37	-	-	86.62	27.79	7.84	31.88	106	118	A	V
	*	2487.75	52.02	-21.98	74	48.15	27.76	7.92	31.81	106	118	P	V
		2488.17	41.18	-12.82	54	37.31	27.76	7.92	31.81	106	118	A	V
802.11n HT40 CH 06 2437MHz	*	2389.1	52.69	-21.31	74	48.98	27.82	7.8	31.91	307	48	P	H
		2389.94	42.75	-11.25	54	39.04	27.82	7.8	31.91	307	48	A	H
	*	2437	99.9	-	-	96.12	27.78	7.86	31.86	307	48	P	H
	*	2437	91.99	-	-	88.21	27.78	7.86	31.86	307	48	A	H
	*	2483.9	60.57	-13.43	74	56.72	27.76	7.91	31.82	307	48	P	H
		2483.5	49.19	-4.81	54	45.34	27.76	7.91	31.82	307	48	A	H
	*	2389.24	51.11	-22.89	74	47.4	27.82	7.8	31.91	110	115	P	V
		2389.94	41.66	-12.34	54	37.95	27.82	7.8	31.91	110	115	A	V
	*	2437	96.66	-	-	92.88	27.78	7.86	31.86	110	115	P	V
	*	2437	88.81	-	-	85.03	27.78	7.86	31.86	110	115	A	V
	*	2484.39	57.43	-16.57	74	53.58	27.76	7.91	31.82	110	115	P	V
		2484.32	46.01	-7.99	54	42.16	27.76	7.91	31.82	110	115	A	V



802.11n HT40 CH 09 2452MHz	*	2361.38	49.97	-24.03	74	46.28	27.86	7.77	31.94	332	31	P	H
		2382.8	40.03	-13.97	54	36.33	27.83	7.79	31.92	332	31	A	H
	*	2452	88.56	-	-	84.77	27.77	7.87	31.85	332	31	P	H
	*	2452	80.78	-	-	76.99	27.77	7.87	31.85	332	31	A	H
	*	2487.19	63.34	-10.66	74	59.48	27.76	7.91	31.81	332	31	P	H
		2486.56	50.18	-3.82	54	46.32	27.76	7.91	31.81	332	31	A	H
	*	2350.32	50.17	-23.83	74	46.5	27.87	7.75	31.95	107	129	P	V
		2362.78	39.83	-14.17	54	36.14	27.86	7.77	31.94	107	129	A	V
	*	2452	86.49	-	-	82.7	27.77	7.87	31.85	107	129	P	V
	*	2452	79.05	-	-	75.26	27.77	7.87	31.85	107	129	A	V
	*	2487.26	60.71	-13.29	74	56.85	27.76	7.91	31.81	107	129	P	V
		2486.42	47.36	-6.64	54	43.5	27.76	7.91	31.81	107	129	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4844	47.18	-26.82	74	54.96	31.34	10.41	49.53	114	148	P	H
HT40	*	7266	47.78	-26.22	74	49.92	36.17	12.05	50.36	189	238	P	H
CH 03	*	4844	47.71	-26.29	74	55.49	31.34	10.41	49.53	114	148	P	V
2422MHz		7266	46.44	-27.56	74	48.58	36.17	12.05	50.36	189	238	P	V
802.11n		4874	44.1	-29.9	74	51.83	31.37	10.43	49.53	122	136	P	H
HT40	*	7311	47.11	-26.89	74	49.19	36.21	12.1	50.39	112	298	P	H
CH 06		4874	42.87	-31.13	74	50.6	31.37	10.43	49.53	233	102	P	V
2437MHz	*	7311	46.85	-27.15	74	48.93	36.21	12.1	50.39	185	32	P	V
802.11n		4904	42.92	-31.08	74	50.58	31.4	10.46	49.52	152	149	P	H
HT40	*	7356	47.2	-26.8	74	49.21	36.26	12.14	50.41	180	225	P	H
CH 09		4904	43.14	-30.86	74	50.8	31.4	10.46	49.52	152	149	P	V
2452MHz	*	7356	47.78	-26.22	74	49.79	36.26	12.14	50.41	180	225	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		46.49	18.98	-21.02	40	31.63	20.26	2.15	35.06	-	-	P	H
		92.08	29.38	-14.12	43.5	48.2	13.95	2.41	35.18	100	12	P	H
		159.01	26.01	-17.49	43.5	39.21	19.31	2.59	35.1	-	-	P	H
		287.05	25.73	-20.27	46	38.05	19.51	3.1	34.93	-	-	P	H
		330.7	29.1	-16.9	46	40.2	20.59	3.21	34.9	-	-	P	H
		46.49	18.98	-21.02	40	31.63	20.26	2.15	35.06	-	-	P	H
		49.4	23.53	-16.47	40	36.11	20.29	2.22	35.09	-	-	P	V
		91.11	36.3	-7.2	43.5	55.16	13.94	2.38	35.18	100	72	P	V
		159.98	30.94	-12.56	43.5	44.13	19.32	2.59	35.1	-	-	P	V
		292.87	26.34	-19.66	46	38.5	19.61	3.14	34.91	-	-	P	V
		399.57	26.89	-19.11	46	36.29	22.09	3.31	34.8	-	-	P	V
		585.81	27.97	-18.03	46	33.16	25.52	3.82	34.53	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	94.70	5.442	0.184	300Hz
802.11n HT20	94.29	5.029	0.199	300Hz
802.11n HT40	89.95	2.464	0.406	1KHz

802.11b






802.11g

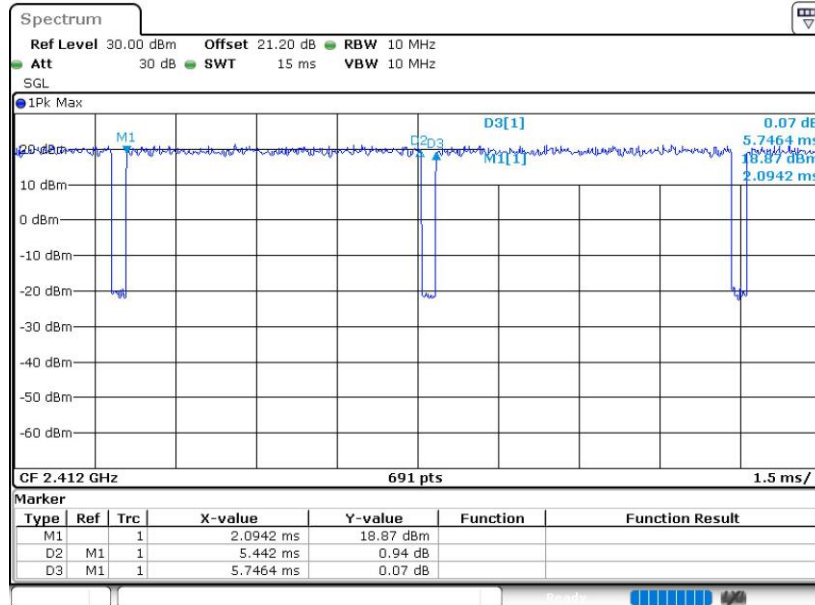

802.11n HT20

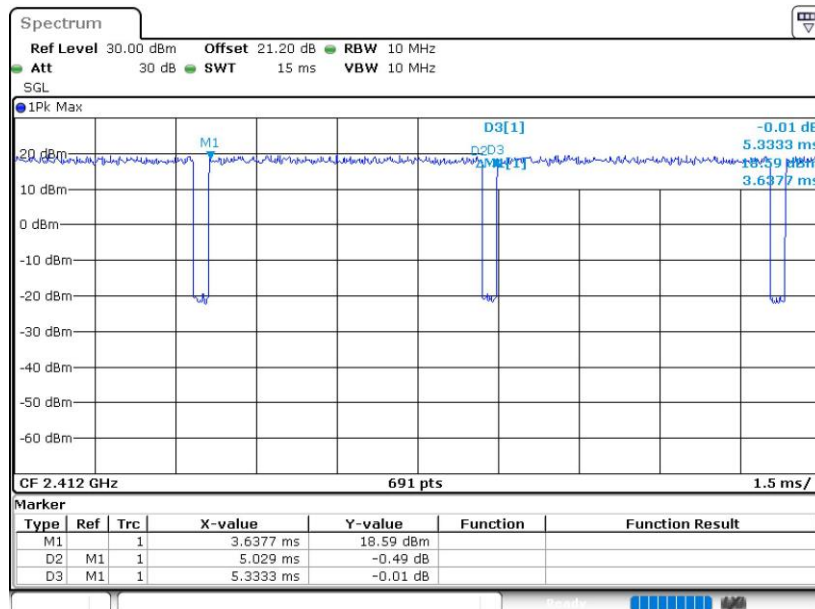

802.11n HT40

