



FCC PART 15.247 TEST REPORT

For

SWAGTEK

10205 NW 19th Street, STE101, Miami, Florida, United States, 33172

FCC ID: O55554516

Report Type: Original Report	Product Name: 5.5 inch LTE Smart Phone
Test Engineer: <u>Tom Tang</u>	<i>Tom Tang</i>
Report Number: <u>RDG161209003A</u>	
Report Date: <u>2017-01-09</u>	
Reviewed By: <u>Henry Ding</u> EMC Leader	<i>Henry Ding</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Chengdu) 5040, HuiLongWan Plaza, No. 1, ShaWan Road, JinNiu District, ChengDu, China Tel: 028-65523123, Fax: 028-65525125 www.baclcorp.com

Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE.....	6
EQUIPMENT MODIFICATIONS	6
EXTERNAL CABLE	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	8
APPLICABLE STANDARD.....	8
FCC §15.203 - ANTENNA REQUIREMENT	9
APPLICABLE STANDARD.....	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....	10
APPLICABLE STANDARD.....	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP.....	10
EMI TEST RECEIVER SETUP	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	15
APPLICABLE STANDARD.....	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP.....	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST DATA	18
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	22
APPLICABLE STANDARD.....	22
TEST EQUIPMENT LIST AND DETAILS	22
TEST PROCEDURE	22
TEST DATA	22
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	28
APPLICABLE STANDARD.....	28
TEST PROCEDURE	28

TEST EQUIPMENT LIST AND DETAILS	28
TEST DATA	28
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS	34
TEST DATA	34
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST EQUIPMENT LIST AND DETAILS	38
TEST DATA	38
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	54
APPLICABLE STANDARD	54
TEST PROCEDURE	54
TEST EQUIPMENT LIST AND DETAILS	54
TEST DATA	54
FCC §15.247(d) - BAND EDGES TESTING	60
APPLICABLE STANDARD	60
TEST PROCEDURE	60
TEST EQUIPMENT LIST AND DETAILS	60
TEST DATA	61

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The **SWAGTEK**'s product, model number: **L5.5 (FCC ID: O55554516)** (the "EUT") in this report was a **5.5 inch LTE Smart Phone**, which was measured approximately: 15.6 cm (L) × 7.8 cm (W) × 0.8 cm (H), rated input voltage: DC3.8V Li-polymer or DC5V from adapter.

Adapter Information:

Input: AC100-240V 50/60 Hz 0.2A

Output: DC5V/1.0A

Note: The series product, model L5.5, LOGIC L5.5, iSWAG MEGA, UNONU UL551 are electrically identical, the differences between them are the model name and color, we selected L5.5 for fully testing, the details was explained in the declaration letter.

**All measurement and test data in this report was gathered from final production sample, serial number: 161209003 (assigned by the BACL, Chengdu). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2016-12-29, and EUT conformed to test requirement.*

Objective

This report is prepared on behalf of **SWAGTEK** in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: O55554516.

FCC Part 22H, 24E, 27 PCE submissions with FCC ID: O55554516.

FCC Part 15C DTS submissions with FCC ID: O55554516.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The uncertainty of any RF tests which use conducted method measurement is ± 3.17 dB, the uncertainty of any radiation on emissions measurement is:

30M~200MHz: ± 4.7 dB;
200M~1GHz: ± 6.0 dB;
1G~6GHz: ± 5.13 dB;
6G~25GHz: ± 5.47 dB;

And the uncertainty will not be taken into consideration for all test data recorded in the report.

Test Facility

The test site used by BACL to collect test data is located in the 5040, HuiLongWan Plaza, No. 1, ShaWan Road, JinNiu District, ChengDu, China.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on April 24, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

The engineering mode configured the maximum power as default setting.


Equipment Modifications

No modification was made to the EUT.

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Adapter Cable	No	No	1.0	Adater	EUT
Earphone Cable	No	No	1.3	Audio Port of EUT	Earphone

Block Diagram of Test Setup

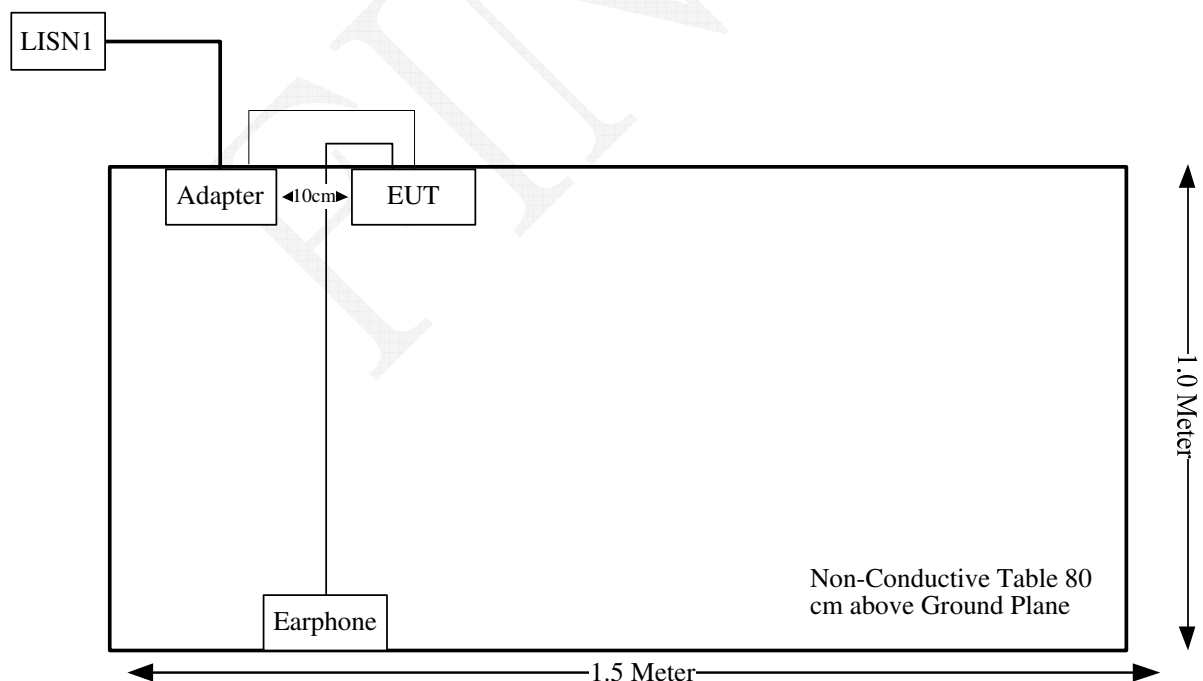

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

For bluetooth mode

The max tune-up conducted power is 5.5 dBm (3.55 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 3.55/5 \cdot (\sqrt{2.48}) = 1.1 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement for Wifi/BT, and the antenna gain is 1.9 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

–compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
 –non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


–compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
 –non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2:2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Chengdu) is ± 3.17 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

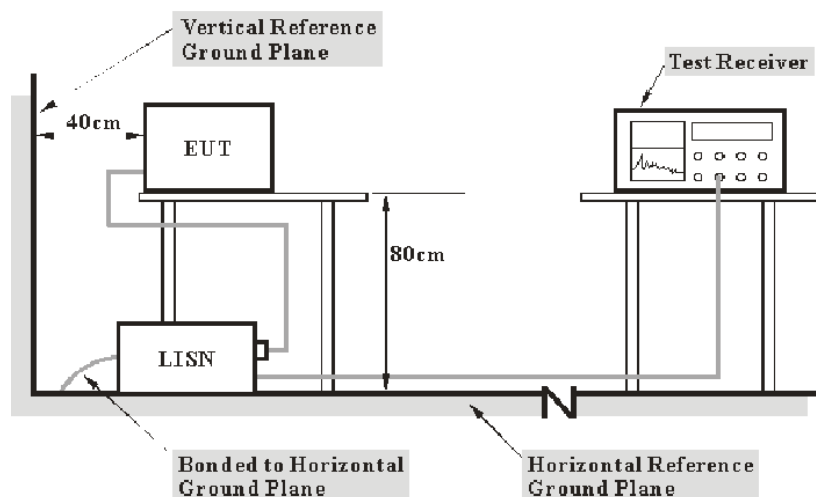

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS 30	836858/0016	2016-12-02	2017-12-01
Rohde & Schwarz	L.I.S.N.	ENV216	3560.6550.06	2016-12-02	2017-12-01
Rohde & Schwarz	PULSE LIMITER	ESH3Z2	357.8810.52	2016-10-31	2017-10-30
N/A	Conducted Cable	NO.5	N/A	2016-11-10	2017-11-09
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	24.7 °C
Relative Humidity:	30 %
ATM Pressure:	102.1 kPa

The testing was performed by Tom Tang on 2016-12-16.

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

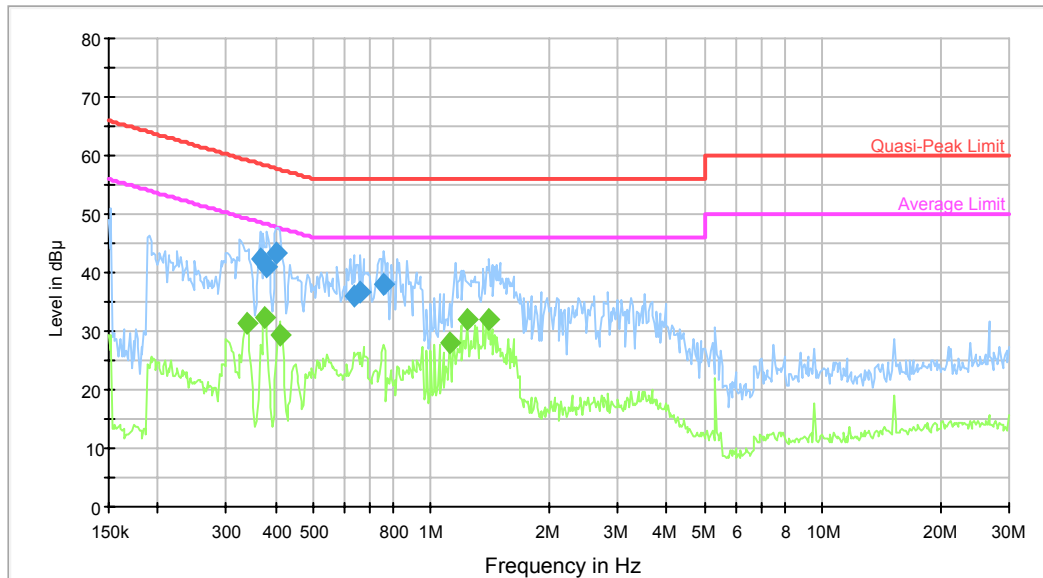

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.366160	42.4	9.000	L1	19.7	16.2	58.6	Compliance
0.381043	41.1	9.000	L1	19.8	17.2	58.3	Compliance
0.402900	43.5	9.000	L1	19.8	14.3	57.8	Compliance
0.634524	36.1	9.000	L1	19.7	19.9	56.0	Compliance
0.660314	36.5	9.000	L1	19.7	19.5	56.0	Compliance
0.756101	37.8	9.000	L1	19.7	18.2	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.338116	31.4	9.000	L1	19.7	17.8	49.2	Compliance
0.375019	32.3	9.000	L1	19.8	16.1	48.4	Compliance
0.409372	29.2	9.000	L1	19.8	18.5	47.7	Compliance
1.117238	28.0	9.000	L1	19.7	18.0	46.0	Compliance
1.239175	31.9	9.000	L1	19.7	14.1	46.0	Compliance
1.407671	32.0	9.000	L1	19.7	14.0	46.0	Compliance

AC120 V, 60 Hz, Neutral:

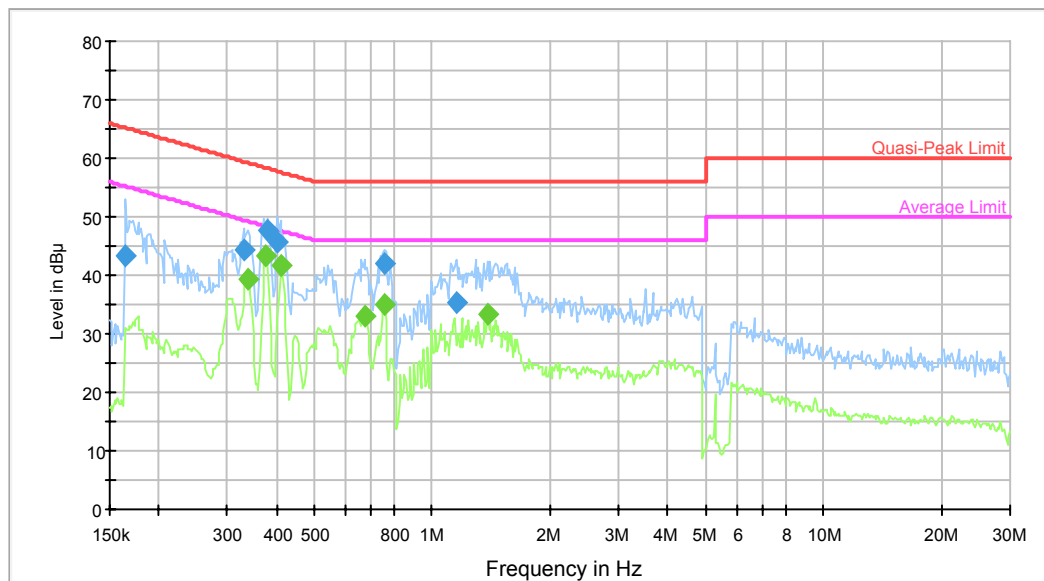

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.165051	43.5	9.000	N	19.7	21.7	65.2	Compliance
0.330129	44.3	9.000	N	19.6	15.1	59.4	Compliance
0.381043	47.5	9.000	N	19.6	10.8	58.3	Compliance
0.402900	45.7	9.000	N	19.6	12.1	57.8	Compliance
0.756101	42.0	9.000	N	19.6	14.0	56.0	Compliance
1.153421	35.4	9.000	N	19.6	20.6	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.338116	39.2	9.000	N	19.6	10.0	49.2	Compliance
0.375019	43.3	9.000	N	19.6	5.1	48.4	Compliance
0.412647	41.5	9.000	N	19.6	6.1	47.6	Compliance
0.676289	33.0	9.000	N	19.6	13.0	46.0	Compliance
0.756101	34.9	9.000	N	19.6	11.1	46.0	Compliance
1.385415	33.3	9.000	N	19.7	12.7	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

–compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

–non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:

–compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;

–non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Chengdu) is:

30M~200MHz: ±4.7 dB ;

200M~1GHz: ±6.0 dB ;

1G~6GHz: ±5.13dB;


6G~25GHz: ±5.47 dB;

Table 1 – Values of U_{cisp}


Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

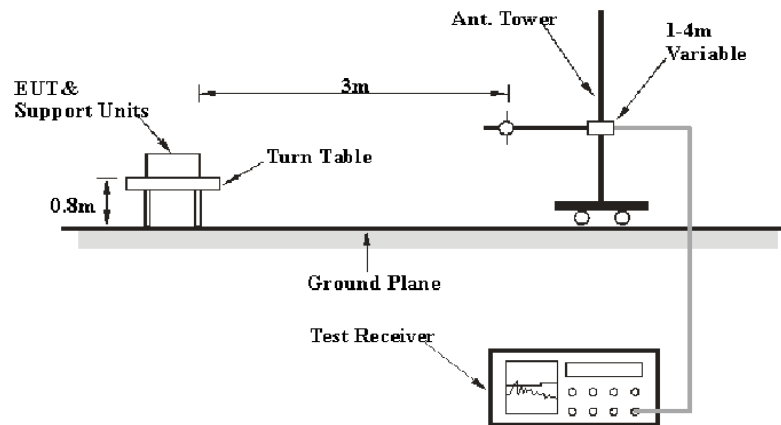

Above 1GHz:

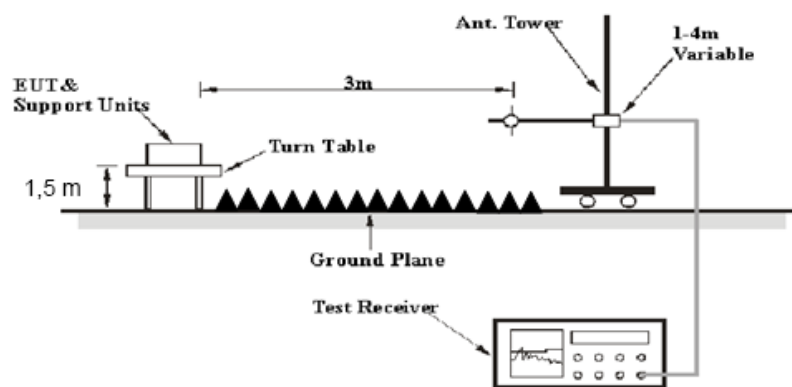

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Amplifier	8447D	2944A10442	2016-12-02	2017-12-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Sunol Sciences	Broadband Antenna	JB3	A101808	2016-04-10	2019-04-09
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
ETS	Horn Antenna	3115	003-6076	2016-12-02	2017-12-01
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-0113024	2014-06-16	2017-06-15
Mini-circuits	Amplifier	ZVA-183-S+	771001215	2016-05-20	2017-05-19
HP	Amplifier	8449B	3008A00277	2016-12-02	2017-12-01
EMCT	Semi-Anechoic Chamber	966	N/A	2015-04-24	2018-04-23
N/A	RF Cable (below 1GHz)	NO.1	N/A	2016-11-10	2017-11-09
N/A	RF Cable (below 1GHz)	NO.4	N/A	2016-11-10	2017-11-09
N/A	RF Cable (above 1GHz)	NO.2	N/A	2016-11-10	2017-11-09

* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data

Environmental Conditions

Temperature:	23.7 °C
Relative Humidity:	51 %
ATM Pressure:	101.5 kPa

* The testing was performed by Tom Tang on 2016-12-23.

Test Mode: Transmitting

1) 30MHz-25GHz:

BDR Mode (GFSK):

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	72.53	PK	H	23.53	3.00	0.00	99.06	N/A	N/A
2402	62.72	AV	H	23.53	3.00	0.00	89.25	N/A	N/A
2402	60.27	PK	V	23.53	3.00	0.00	86.80	N/A	N/A
2402	49.58	AV	V	23.53	3.00	0.00	76.11	N/A	N/A
2390	25.15	PK	H	23.57	3.00	0.00	51.72	74.00	22.28
2390	13.53	AV	H	23.57	3.00	0.00	40.10	54.00	13.90
4804	33.56	PK	H	30.77	5.12	26.87	42.58	74.00	31.42
4804	22.42	AV	H	30.77	5.12	26.87	31.44	54.00	22.56
7206	32.19	PK	H	34.71	6.16	26.35	46.71	74.00	27.29
7206	21.26	AV	H	34.71	6.16	26.35	35.78	54.00	18.22
2105	33.47	PK	H	24.54	3.04	26.83	34.22	74.00	39.78
2105	22.75	AV	H	24.54	3.04	26.83	23.50	54.00	30.50
198.78	42.42	QP	V	13.30	0.93	27.77	28.88	43.50	14.62
231.76	43.96	QP	V	11.97	1.14	27.57	29.50	46.00	16.50
Middle Channel: 2441 MHz									
2441	73.82	PK	H	23.40	3.00	0.00	100.22	N/A	N/A
2441	62.45	AV	H	23.40	3.00	0.00	88.85	N/A	N/A
2441	61.38	PK	V	23.40	3.00	0.00	87.78	N/A	N/A
2441	49.73	AV	V	23.40	3.00	0.00	76.13	N/A	N/A
4882	33.07	PK	H	31.02	5.09	26.87	42.31	74.00	31.69
4882	22.57	AV	H	31.02	5.09	26.87	31.81	54.00	22.19
7323	31.96	PK	H	34.95	6.22	26.40	46.73	74.00	27.27
7323	21.58	AV	H	34.95	6.22	26.40	36.35	54.00	17.65
1698	33.43	PK	H	24.42	2.82	26.52	34.15	74.00	39.85
1698	22.59	AV	H	24.42	2.82	26.52	23.31	54.00	30.69
3057	33.56	PK	H	24.52	3.52	26.43	35.17	74.00	38.83
3057	22.79	AV	H	24.52	3.52	26.43	24.40	54.00	29.60
198.78	42.24	QP	V	13.30	0.93	27.77	28.70	43.50	14.80
231.76	44.3	QP	V	11.97	1.14	27.57	29.84	46.00	16.16
High Channel: 2480 MHz									
2480	71.95	PK	H	23.27	2.99	0.00	98.21	N/A	N/A
2480	60.83	AV	H	23.27	2.99	0.00	87.09	N/A	N/A
2480	60.54	PK	V	23.27	2.99	0.00	86.80	N/A	N/A
2480	49.92	AV	V	23.27	2.99	0.00	76.18	N/A	N/A
2483.5	25.5	PK	H	23.26	2.99	0.00	51.75	74.00	22.25
2483.5	13.94	AV	H	23.26	2.99	0.00	40.19	54.00	13.81
4960	33.36	PK	H	31.27	5.05	26.88	42.80	74.00	31.20
4960	21.94	AV	H	31.27	5.05	26.88	31.38	54.00	22.62
7440	31.48	PK	H	35.18	6.27	26.45	46.48	74.00	27.52
7440	21.12	AV	H	35.18	6.27	26.45	36.12	54.00	17.88
2032	33.26	PK	H	24.79	3.05	26.82	34.28	74.00	39.72
2032	22.85	AV	H	24.79	3.05	26.82	23.87	54.00	30.13
198.78	42.63	QP	V	13.30	0.93	27.77	29.09	43.50	14.41
231.76	44.26	QP	V	11.97	1.14	27.57	29.80	46.00	16.20

EDR Mode ($\pi/4$ -DQPSK):

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	71.79	PK	H	23.53	3.00	0.00	98.32	N/A	N/A
2402	59.23	AV	H	23.53	3.00	0.00	85.76	N/A	N/A
2402	57.82	PK	V	23.53	3.00	0.00	84.35	N/A	N/A
2402	45.69	AV	V	23.53	3.00	0.00	72.22	N/A	N/A
2390	24.78	PK	H	23.57	3.00	0.00	51.35	74.00	22.65
2390	13.63	AV	H	23.57	3.00	0.00	40.20	54.00	13.80
4804	33.29	PK	H	30.77	5.12	26.87	42.31	74.00	31.69
4804	21.65	AV	H	30.77	5.12	26.87	30.67	54.00	23.33
7206	32.82	PK	H	34.71	6.16	26.35	47.34	74.00	26.66
7206	20.73	AV	H	34.71	6.16	26.35	35.25	54.00	18.75
1526	32.54	PK	H	24.14	2.69	26.36	33.01	74.00	40.99
1526	20.38	AV	H	24.14	2.69	26.36	20.85	54.00	33.15
198.78	41.8	QP	V	13.30	0.93	27.77	28.26	43.50	15.24
231.76	43.37	QP	V	11.97	1.14	27.57	28.91	46.00	17.09
Middle Channel: 2441 MHz									
2441	71.39	PK	H	23.40	3.00	0.00	97.79	N/A	N/A
2441	59.63	AV	H	23.40	3.00	0.00	86.03	N/A	N/A
2441	58.1	PK	V	23.40	3.00	0.00	84.50	N/A	N/A
2441	45.55	AV	V	23.40	3.00	0.00	71.95	N/A	N/A
4882	33.32	PK	H	31.02	5.09	26.87	42.56	74.00	31.44
4882	21.93	AV	H	31.02	5.09	26.87	31.17	54.00	22.83
7323	32.86	PK	H	34.95	6.22	26.40	47.63	74.00	26.37
7323	20.74	AV	H	34.95	6.22	26.40	35.51	54.00	18.49
1589	33.02	PK	H	24.24	2.74	26.42	33.58	74.00	40.42
1589	22.43	AV	H	24.24	2.74	26.42	22.99	54.00	31.01
3112	32.56	PK	H	24.83	3.60	26.45	34.54	74.00	39.46
3112	21.43	AV	H	24.83	3.60	26.45	23.41	54.00	30.59
198.78	42.19	QP	V	13.30	0.93	27.77	28.65	43.50	14.85
231.76	43.33	QP	V	11.97	1.14	27.57	28.87	46.00	17.13
High Channel: 2480 MHz									
2480	71.94	PK	H	23.27	2.99	0.00	98.20	N/A	N/A
2480	58.45	AV	H	23.27	2.99	0.00	84.71	N/A	N/A
2480	57.49	PK	V	23.27	2.99	0.00	83.75	N/A	N/A
2480	45.87	AV	V	23.27	2.99	0.00	72.13	N/A	N/A
2483.5	25.15	PK	H	23.26	2.99	0.00	51.40	74.00	22.60
2483.5	14.07	AV	H	23.26	2.99	0.00	40.32	54.00	13.68
4960	33.63	PK	H	31.27	5.05	26.88	43.07	74.00	30.93
4960	21.34	AV	H	31.27	5.05	26.88	30.78	54.00	23.22
7440	32.78	PK	H	35.18	6.27	26.45	47.78	74.00	26.22
7440	20.93	AV	H	35.18	6.27	26.45	35.93	54.00	18.07
1688	32.45	PK	H	24.40	2.81	26.51	33.15	74.00	40.85
1688	20.31	AV	H	24.40	2.81	26.51	21.01	54.00	32.99
198.78	42.17	QP	V	13.30	0.93	27.77	28.63	43.50	14.87
231.76	43.69	QP	V	11.97	1.14	27.57	29.23	46.00	16.77

EDR Mode (8-DPSK):

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	71.55	PK	H	23.53	3.00	0.00	98.08	N/A	N/A
2402	59.74	AV	H	23.53	3.00	0.00	86.27	N/A	N/A
2402	57.39	PK	V	23.53	3.00	0.00	83.92	N/A	N/A
2402	45.54	AV	V	23.53	3.00	0.00	72.07	N/A	N/A
2390	24.45	PK	H	23.57	3.00	0.00	51.02	74.00	22.98
2390	13.17	AV	H	23.57	3.00	0.00	39.74	54.00	14.26
4804	33.62	PK	H	30.77	5.12	26.87	42.64	74.00	31.36
4804	21.29	AV	H	30.77	5.12	26.87	30.31	54.00	23.69
7206	32.21	PK	H	34.71	6.16	26.35	46.73	74.00	27.27
7206	20.93	AV	H	34.71	6.16	26.35	35.45	54.00	18.55
1566	32.75	PK	H	24.21	2.72	26.39	33.29	74.00	40.71
1566	20.39	AV	H	24.21	2.72	26.39	20.93	54.00	33.07
198.78	41.5	QP	V	13.30	0.93	27.77	27.96	43.50	15.54
231.76	43.35	QP	V	11.97	1.14	27.57	28.89	46.00	17.11
Middle Channel: 2441 MHz									
2441	71.67	PK	H	23.40	3.00	0.00	98.07	N/A	N/A
2441	59.58	AV	H	23.40	3.00	0.00	85.98	N/A	N/A
2441	58.24	PK	V	23.40	3.00	0.00	84.64	N/A	N/A
2441	45.37	AV	V	23.40	3.00	0.00	71.77	N/A	N/A
4882	33.15	PK	H	31.02	5.09	26.87	42.39	74.00	31.61
4882	22.57	AV	H	31.02	5.09	26.87	31.81	54.00	22.19
7323	33.09	PK	H	34.95	6.22	26.40	47.86	74.00	26.14
7323	22.62	AV	H	34.95	6.22	26.40	37.39	54.00	16.61
1673	32.05	PK	H	24.38	2.80	26.50	32.73	74.00	41.27
1673	20.66	AV	H	24.38	2.80	26.50	21.34	54.00	32.66
2589	32.33	PK	H	23.38	3.07	26.80	31.98	74.00	42.02
2589	20.22	AV	H	23.38	3.07	26.80	19.87	54.00	34.13
198.78	41.25	QP	V	13.30	0.93	27.77	27.71	43.50	15.79
231.76	43.08	QP	V	11.97	1.14	27.57	28.62	46.00	17.38
High Channel: 2480 MHz									
2480	71.46	PK	H	23.27	2.99	0.00	97.72	N/A	N/A
2480	58.81	AV	H	23.27	2.99	0.00	85.07	N/A	N/A
2480	57.74	PK	V	23.27	2.99	0.00	84.00	N/A	N/A
2480	45.22	AV	V	23.27	2.99	0.00	71.48	N/A	N/A
2483.5	25.05	PK	H	23.26	2.99	0.00	51.30	74.00	22.70
2483.5	13.75	AV	H	23.26	2.99	0.00	40.00	54.00	14.00
4960	33.26	PK	H	31.27	5.05	26.88	42.70	74.00	31.30
4960	21.57	AV	H	31.27	5.05	26.88	31.01	54.00	22.99
7440	32.84	PK	H	35.18	6.27	26.45	47.84	74.00	26.16
7440	21.16	AV	H	35.18	6.27	26.45	36.16	54.00	17.84
2950	32.56	PK	H	24.10	3.39	26.46	33.59	74.00	40.41
2950	20.89	AV	H	24.10	3.39	26.46	21.92	54.00	32.08
198.78	41.71	QP	V	13.30	0.93	27.77	28.17	43.50	15.33
231.76	43.65	QP	V	11.97	1.14	27.57	29.19	46.00	16.81

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	28.2 °C
Relative Humidity:	50 %
ATM Pressure:	102.1 kPa

* The testing was performed by Tom Tang on 2016-12-17.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency	Channel Separation	Limit
		MHz	MHz	MHz
BDR (GFSK)	Low	2402	1.002	0.62
	Middle	2441	0.998	0.62
	High	2480	1.002	0.62
EDR ($\pi/4$ -DQPSK)	Low	2402	0.998	0.84
	Middle	2441	1.006	0.84
	High	2480	1.002	0.84
EDR (8DPSK)	Low	2402	1.002	0.85
	Middle	2441	1.006	0.85
	High	2480	1.002	0.85

Note: Limit= (2/3)× 20dB bandwidth


BDR Mode (GFSK):

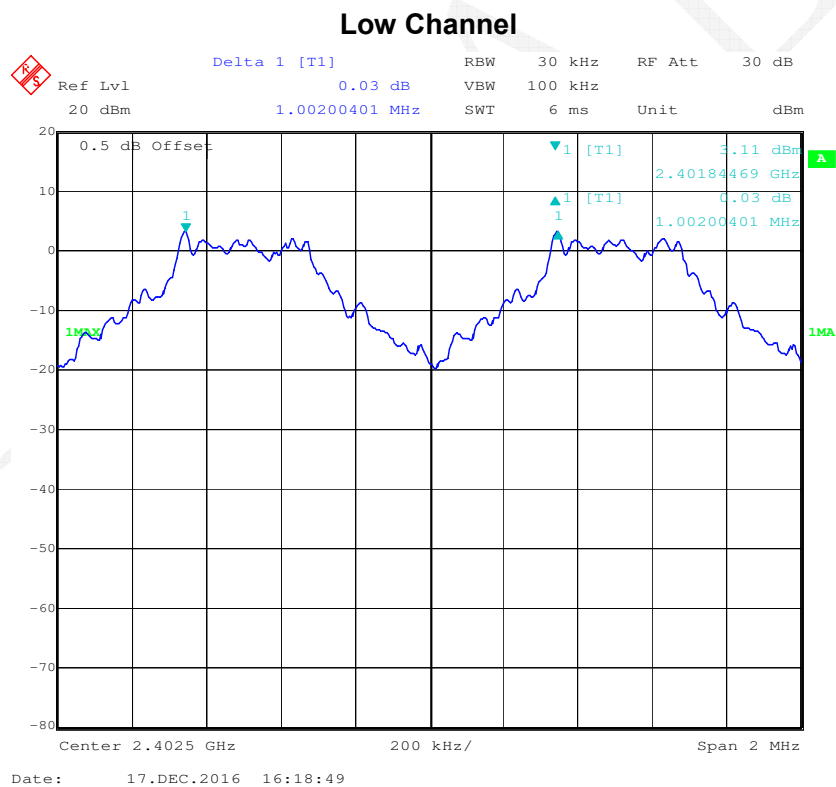

Middle Channel

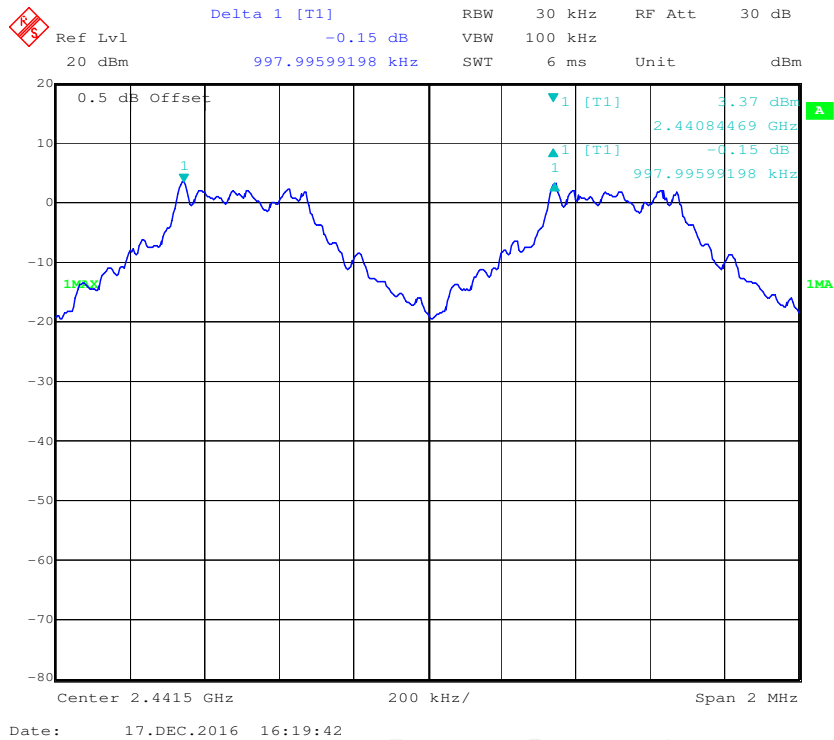


High Channel

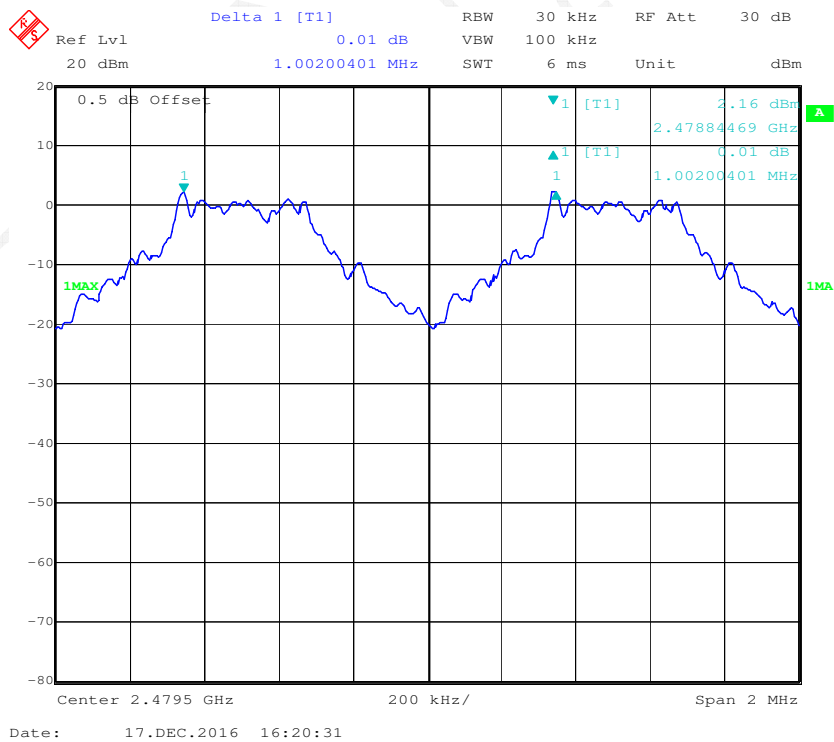


EDR Mode ($\pi/4$ -DQPSK):


Low Channel

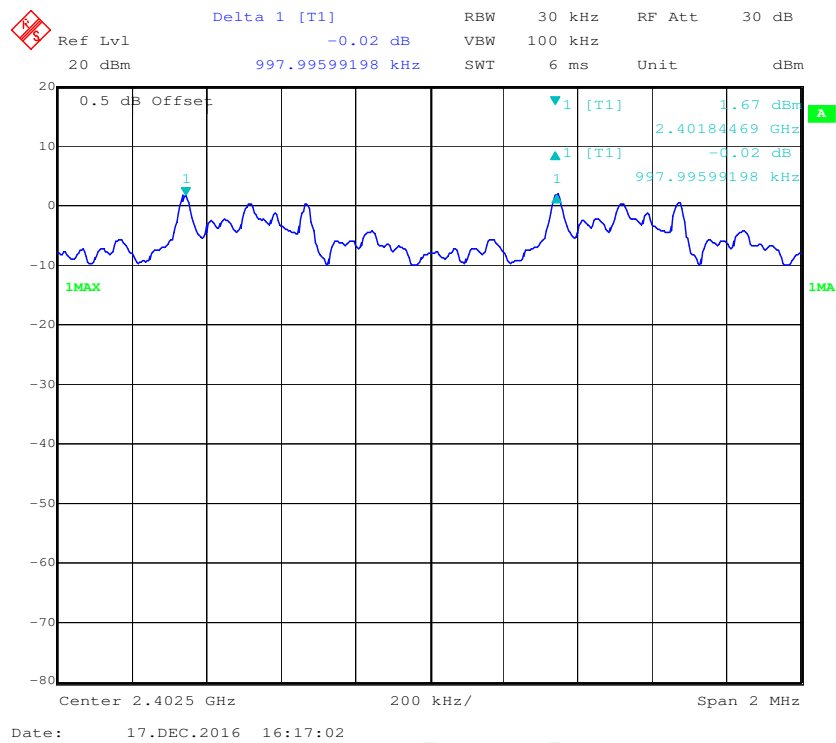

Middle Channel

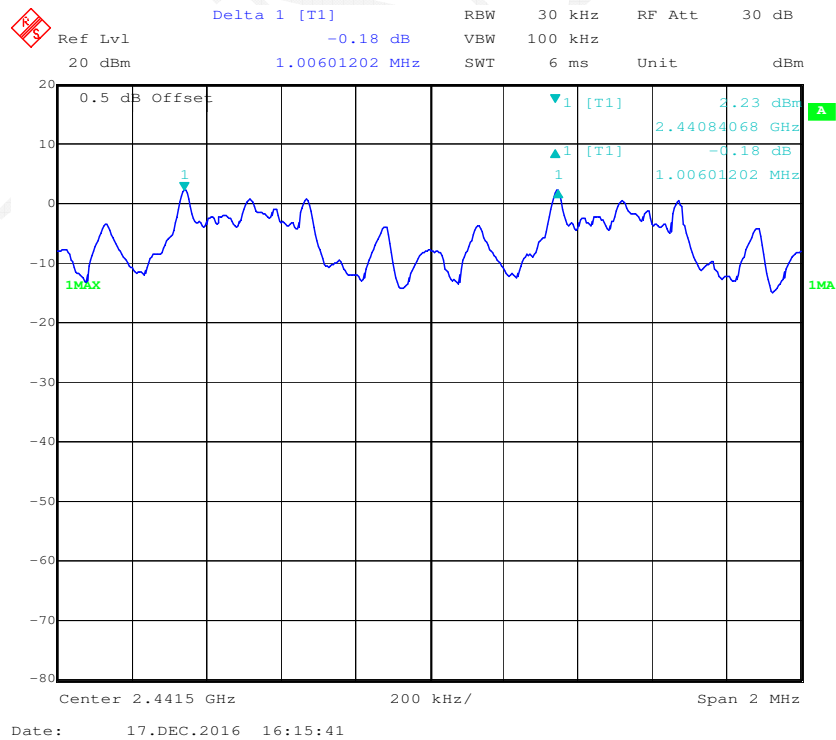


High Channel

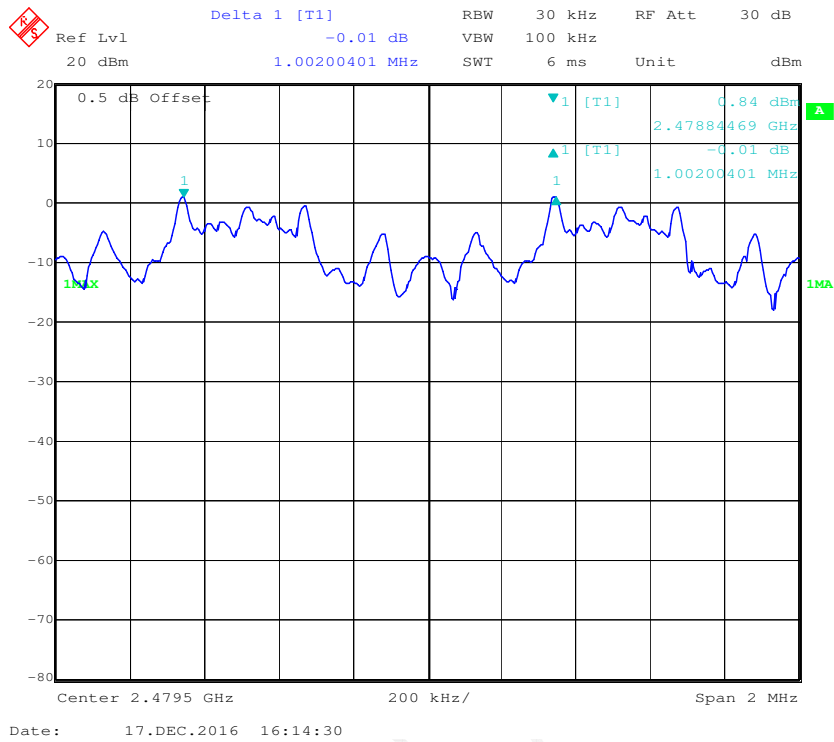


EDR Mode (8-DPSK):


Low Channel

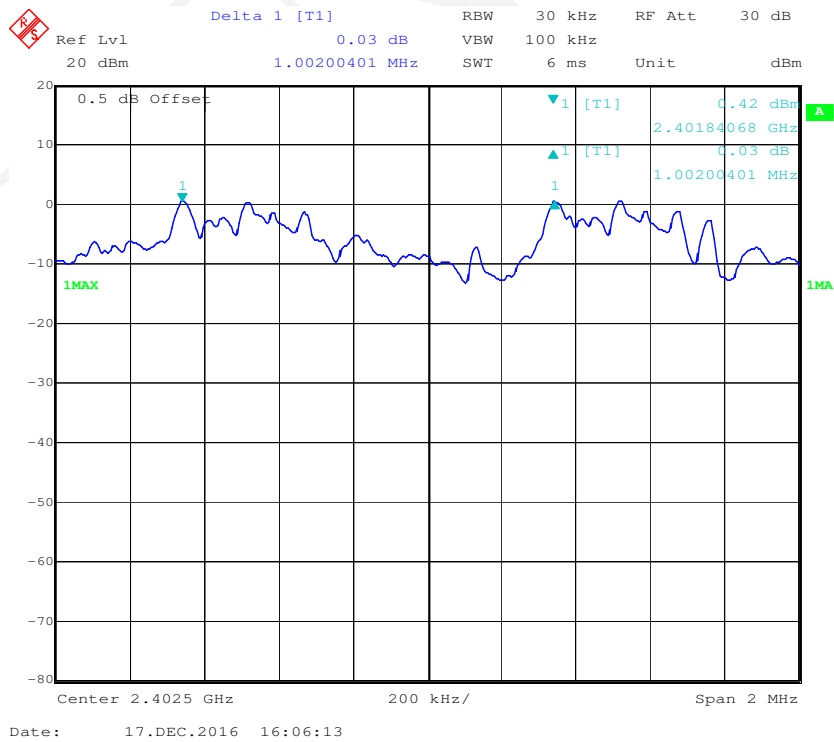

Middle Channel

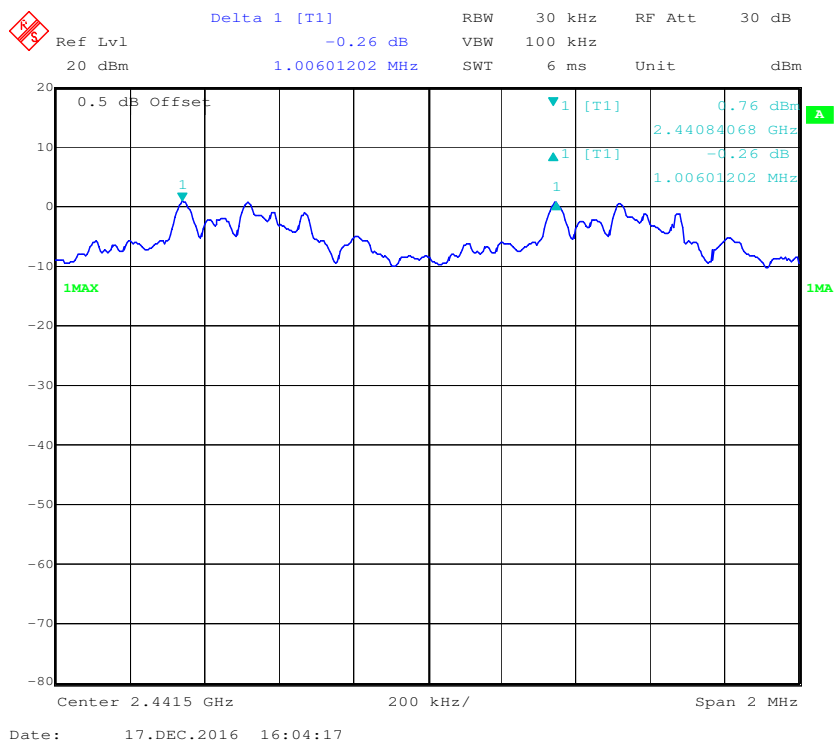

High Channel

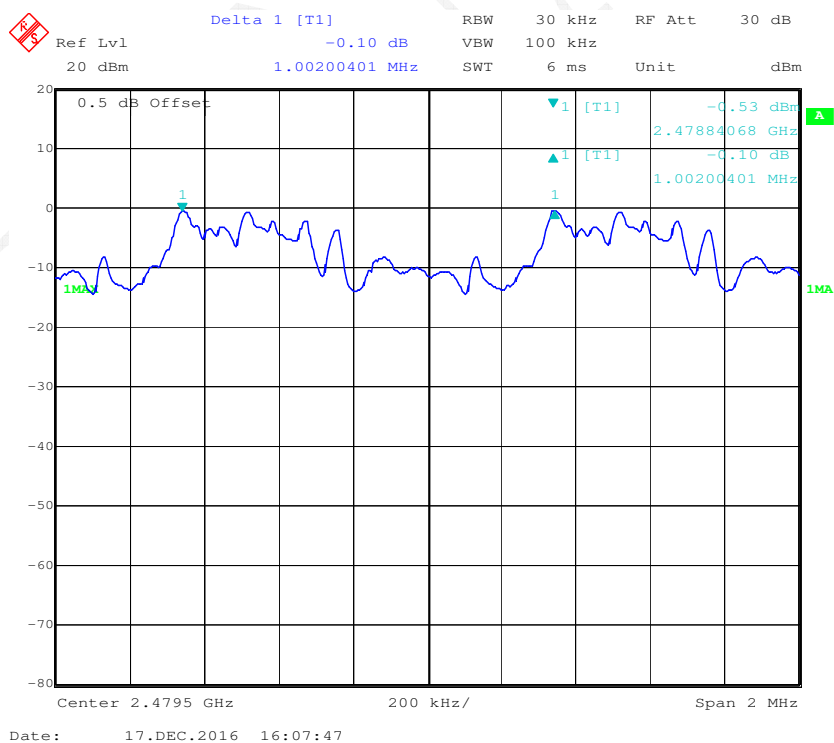

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.2 °C
Relative Humidity:	50 %
ATM Pressure:	102.1 kPa

* The testing was performed by Tom Tang on 2016-12-17.


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.93
	Middle	2441	0.93
	High	2480	0.93
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.26
	Middle	2441	1.26
	High	2480	1.26
EDR Mode (8-DPSK)	Low	2402	1.27
	Middle	2441	1.27
	High	2480	1.27


BDR Mode (GFSK):

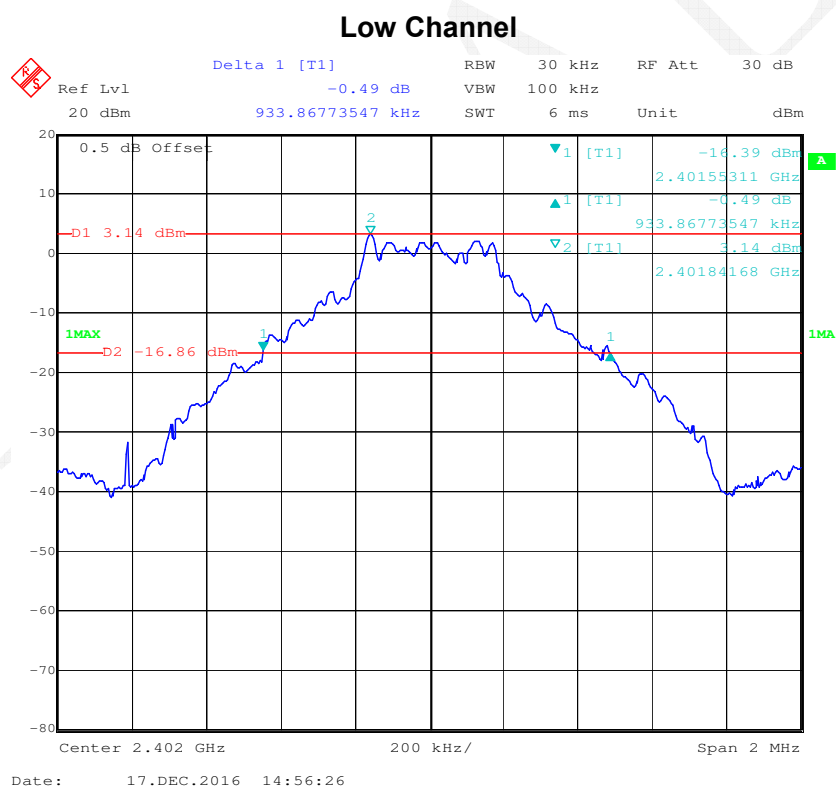

Middle Channel

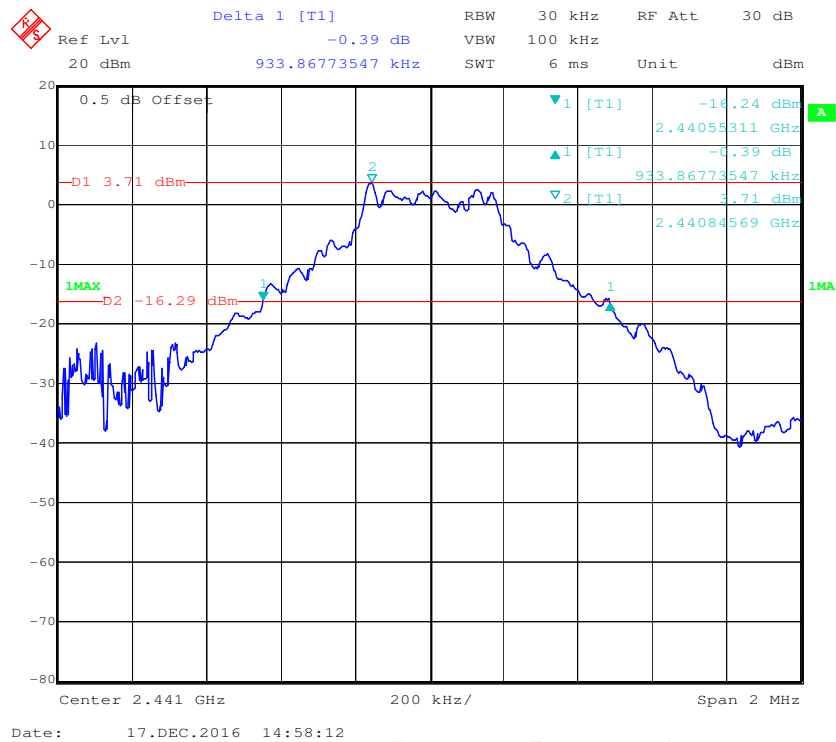


High Channel

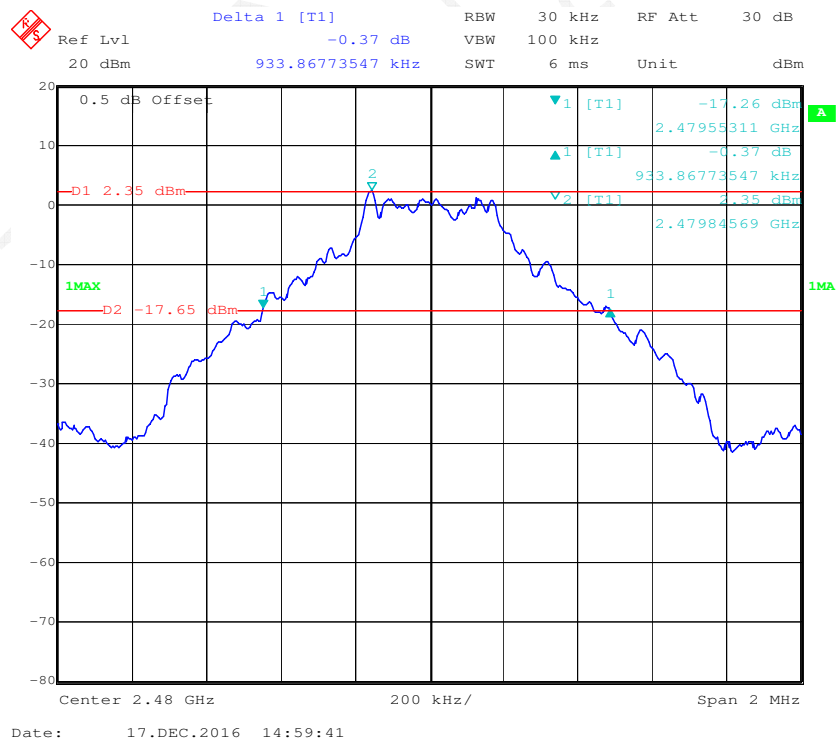


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

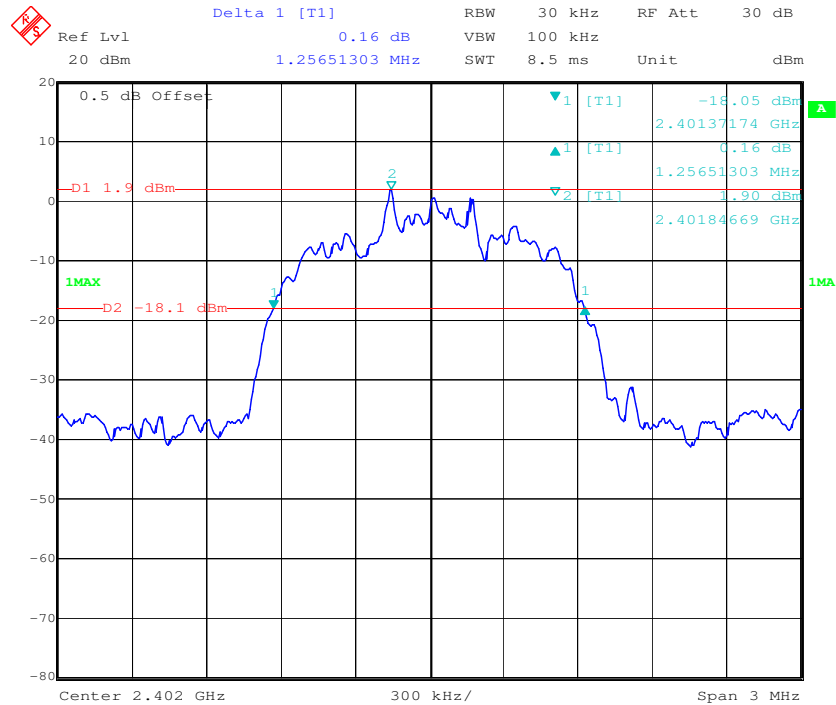


Date: 17.DEC.2016 15:02:47

Middle Channel

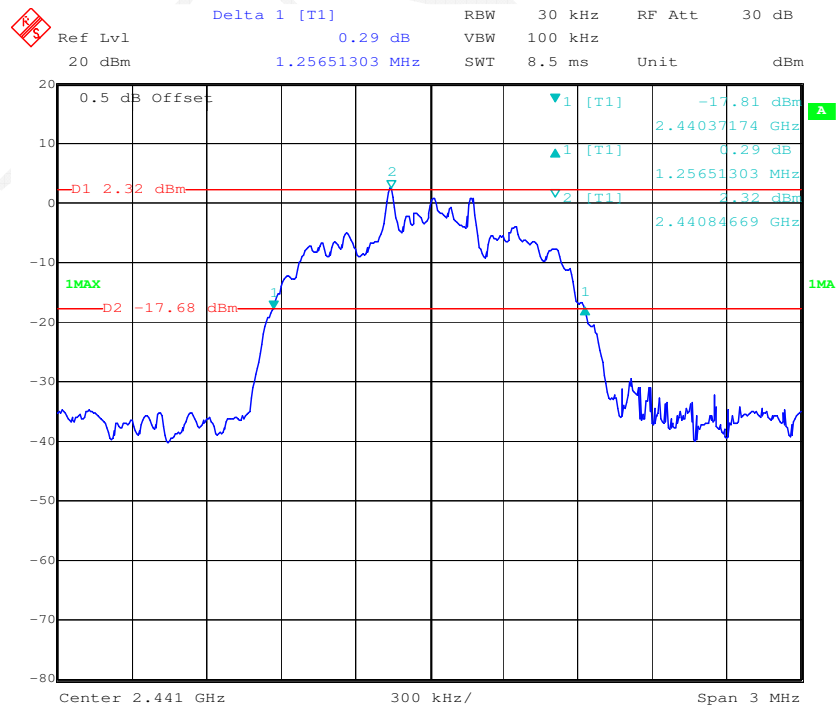


Date: 17.DEC.2016 15:18:57

High Channel

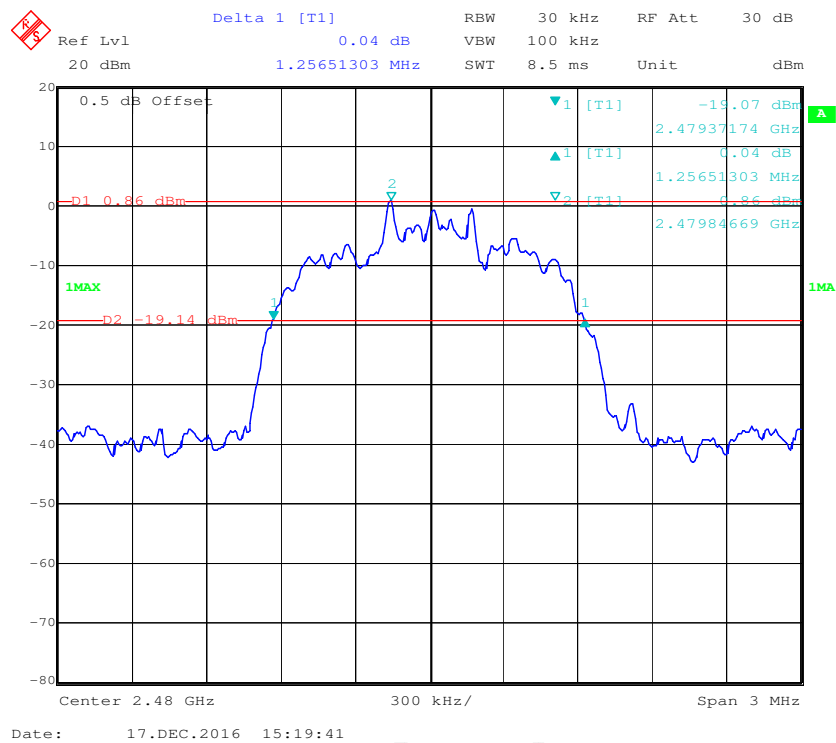


EDR Mode (8-DPSK):


Low Channel

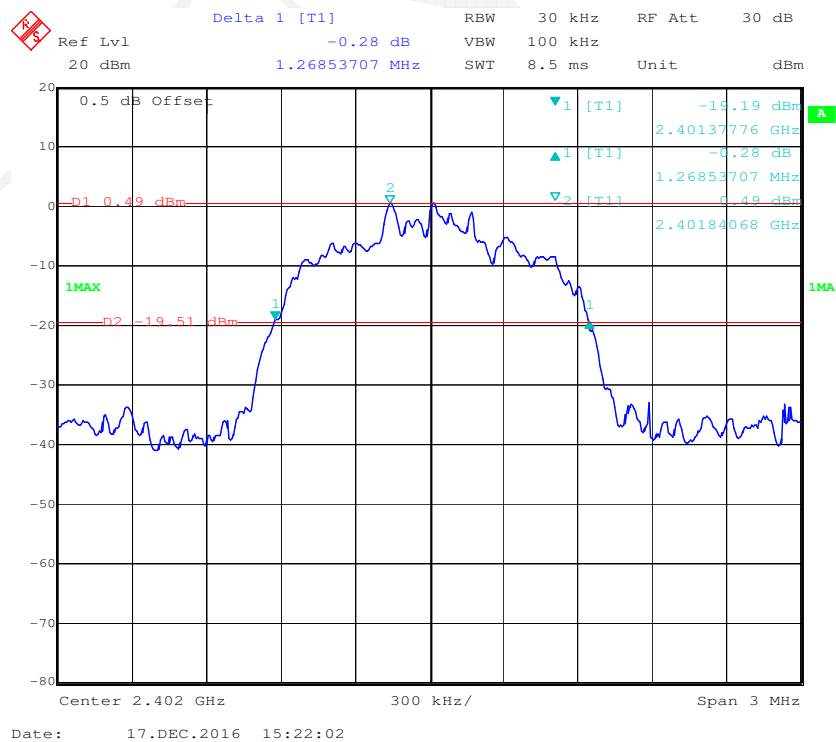

Middle Channel

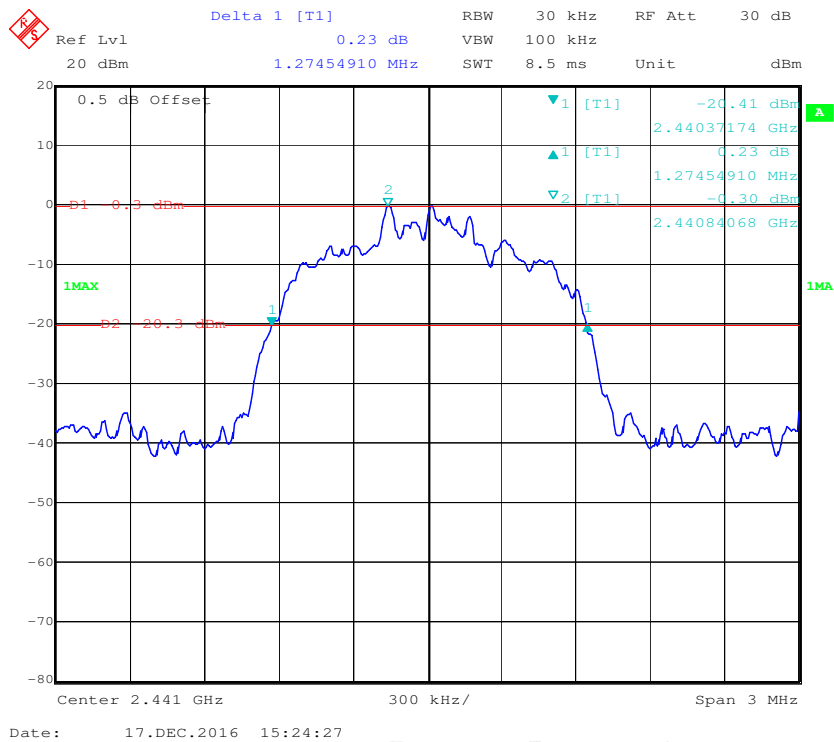

High Channel

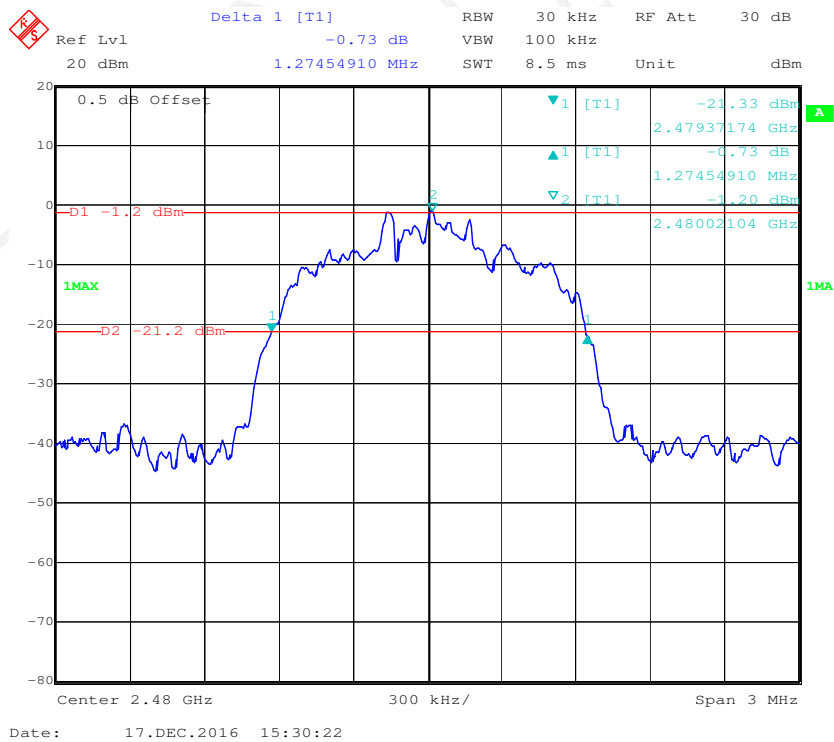

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.2 °C
Relative Humidity:	50 %
ATM Pressure:	102.1 kPa

* *The testing was performed by Tom Tang on 2016-12-17.*

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15


Number of Hopping Channels

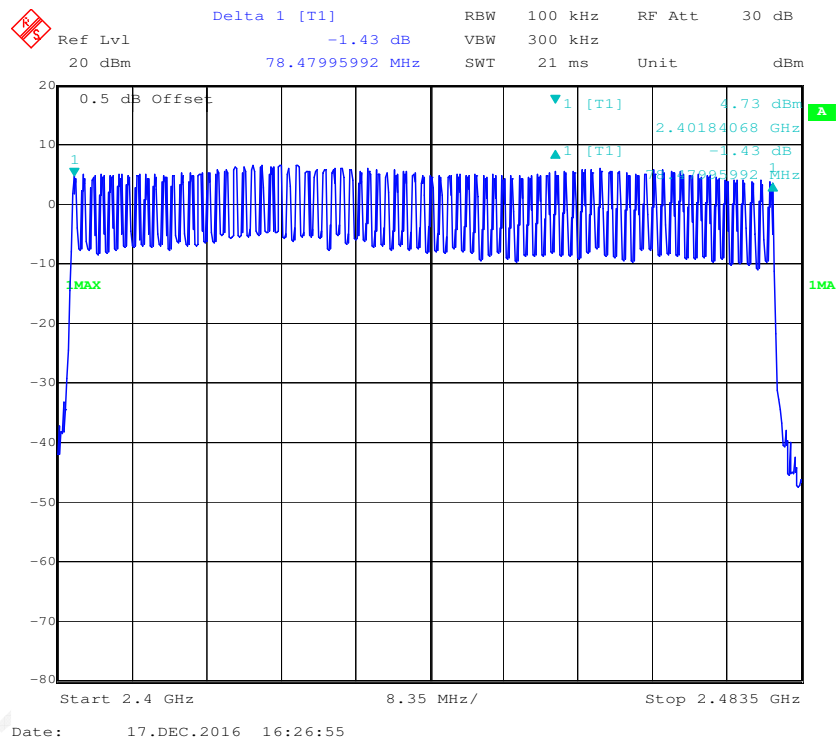

EDR Mode ($\pi/4$ -DQPSK):


Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

Number of Hopping Channels

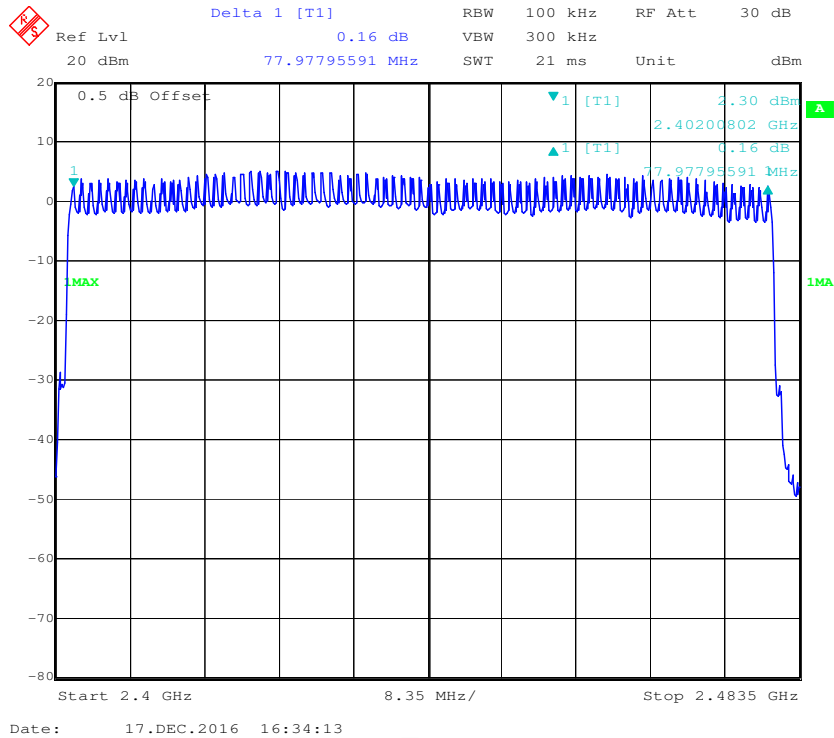

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

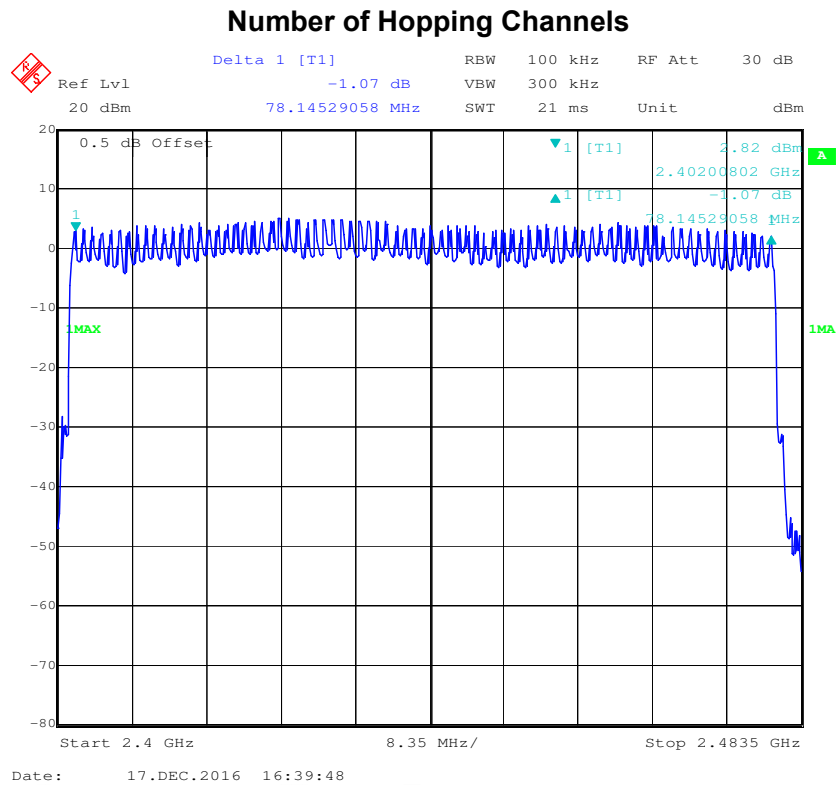

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 * channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.2 °C
Relative Humidity:	50 %
ATM Pressure:	102.1 kPa

* The testing was performed by Tom Tang on 2016-12-17.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


BDR Mode (GFSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.387	0.12	0.4	Compliance
	Middle	0.391	0.13	0.4	Compliance
	High	0.387	0.12	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
DH3	Low	1.659	0.27	0.4	Compliance
	Middle	1.659	0.27	0.4	Compliance
	High	1.653	0.26	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
DH5	Low	2.916	0.31	0.4	Compliance
	Middle	2.926	0.31	0.4	Compliance
	High	2.906	0.31	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				


DH1: Low Channel

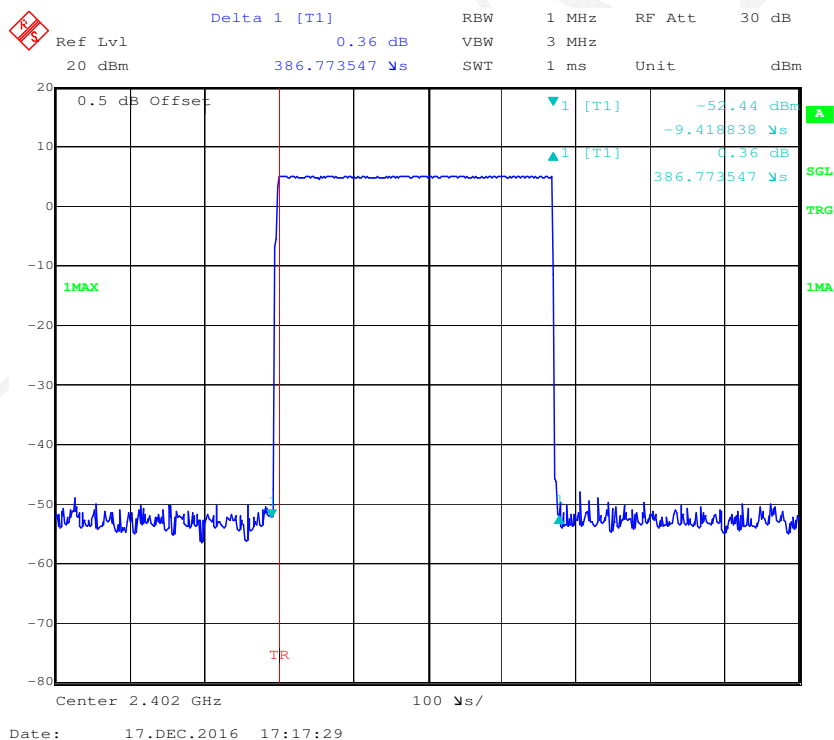


DH1: Middle Channel

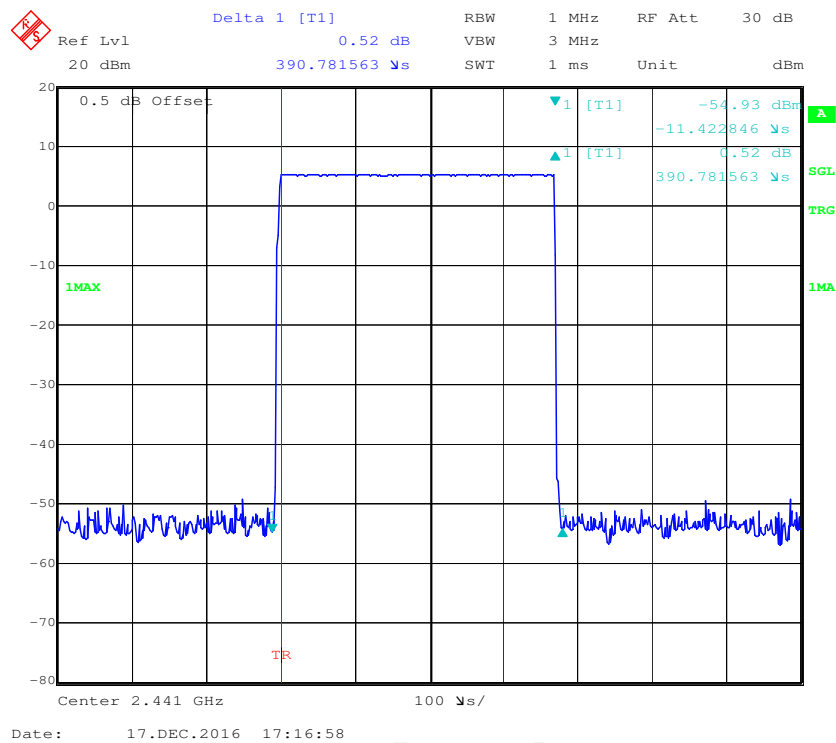

DH1: High Channel

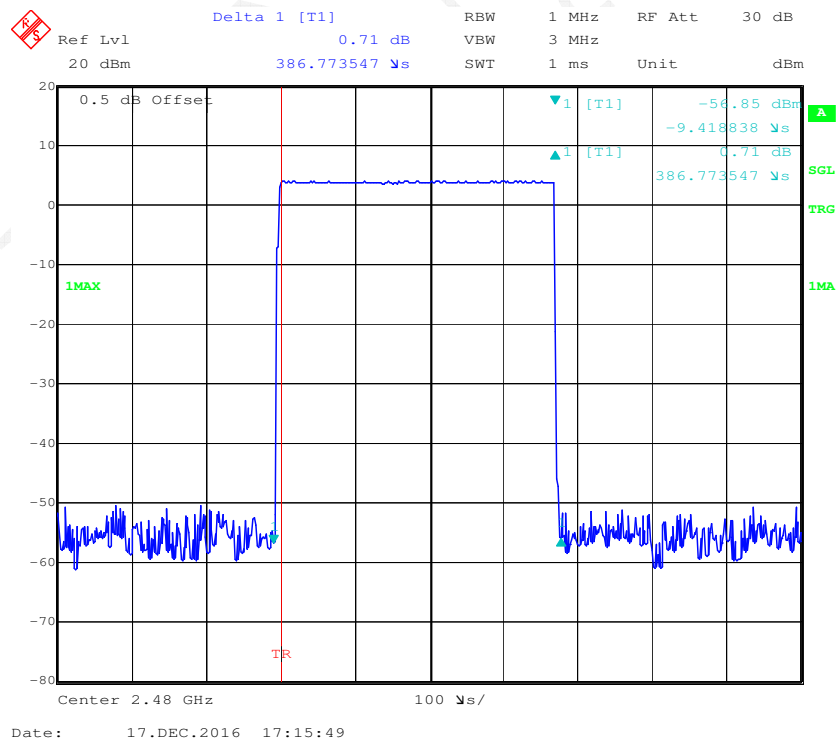


DH3: Low Channel

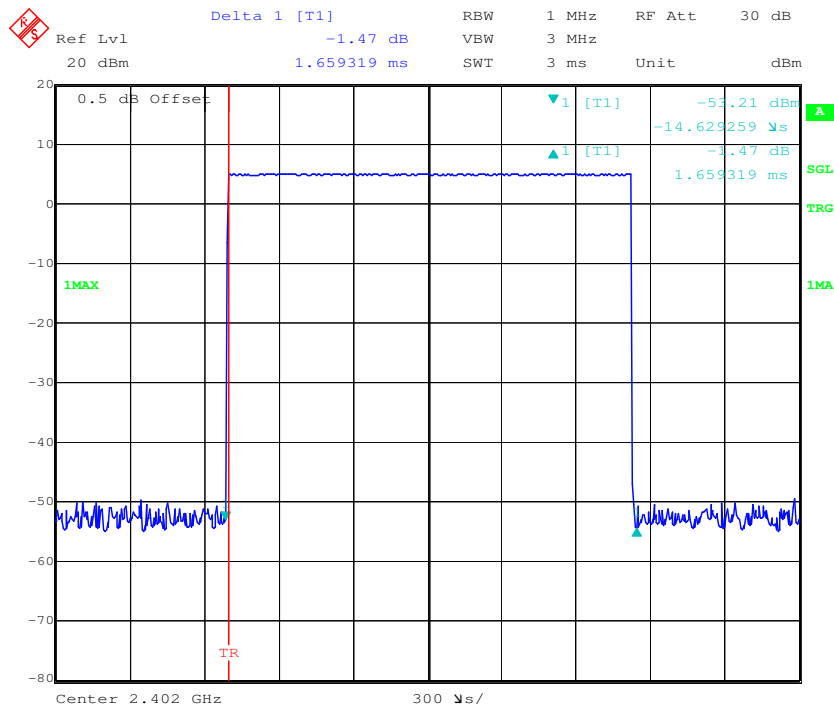


Date: 17.DEC.2016 17:22:59

DH3: Middle Channel

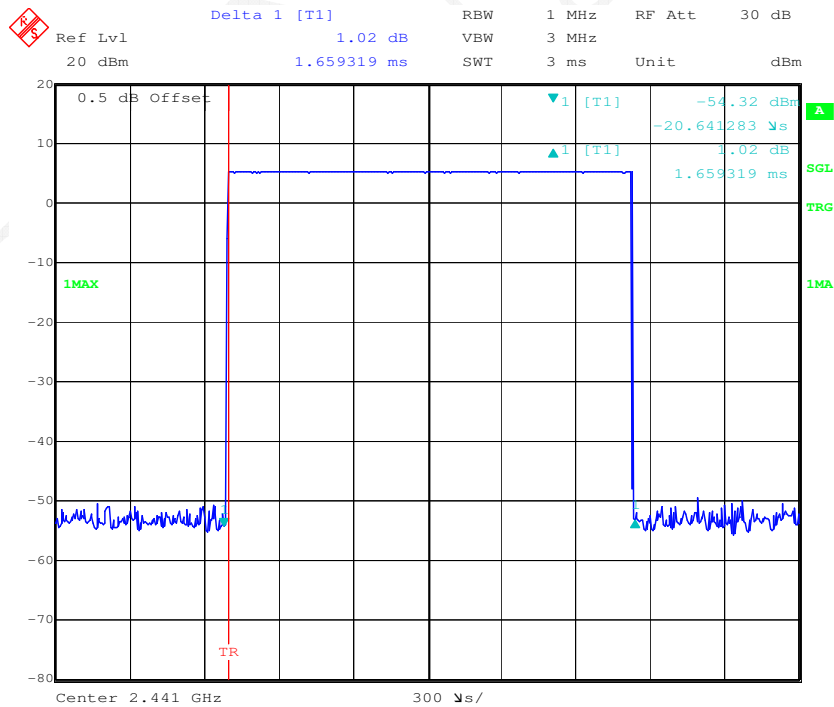


Date: 17.DEC.2016 17:23:25

DH5: Middle Channel

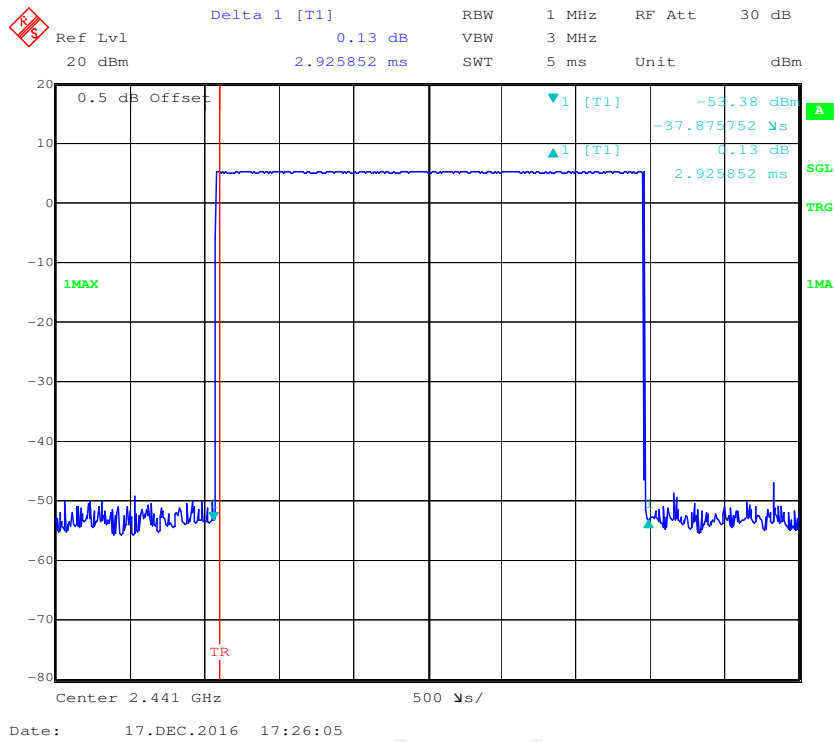


DH5: High Channel

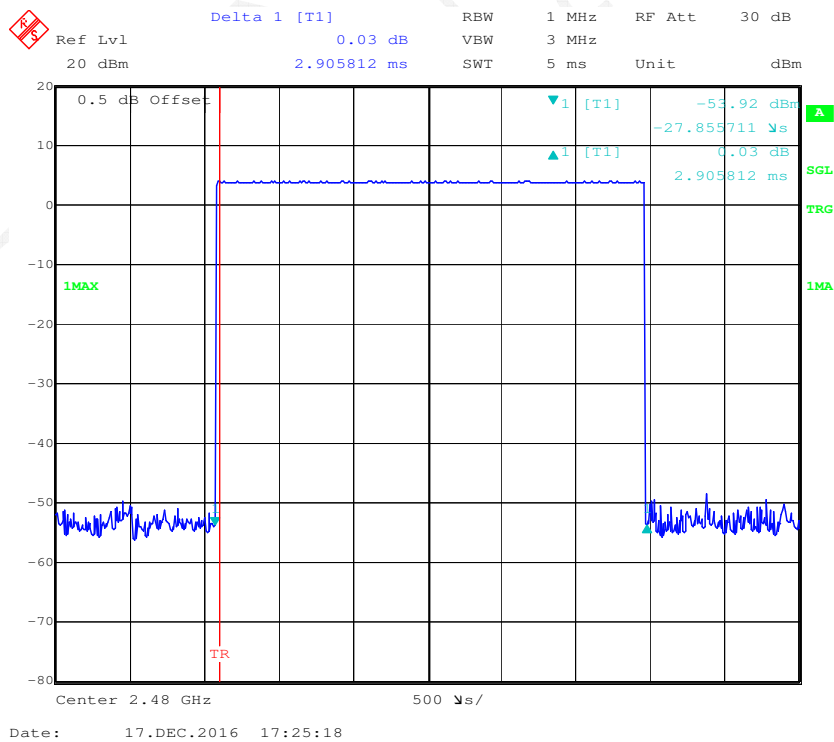


EDR Mode ($\pi/4$ -DQPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2DH1	Low	0.401	0.13	0.4	Compliance
	Middle	0.395	0.13	0.4	Compliance
	High	0.399	0.13	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
2DH3	Low	1.653	0.26	0.4	Compliance
	Middle	1.653	0.26	0.4	Compliance
	High	1.653	0.26	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
2DH5	Low	2.916	0.31	0.4	Compliance
	Middle	2.916	0.31	0.4	Compliance
	High	2.916	0.31	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				


2DH1: Low Channel

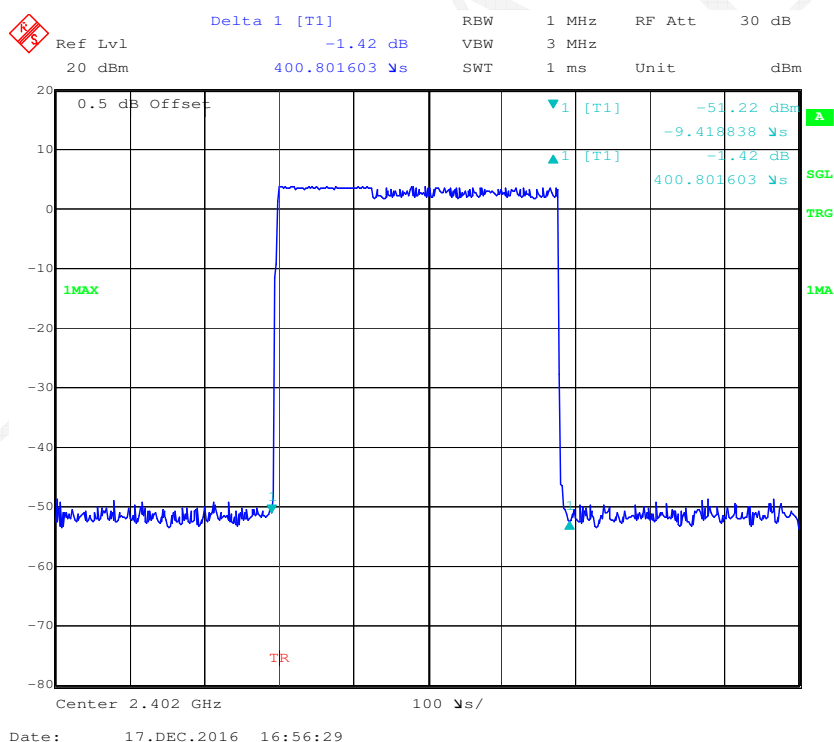


2DH1: Middle Channel

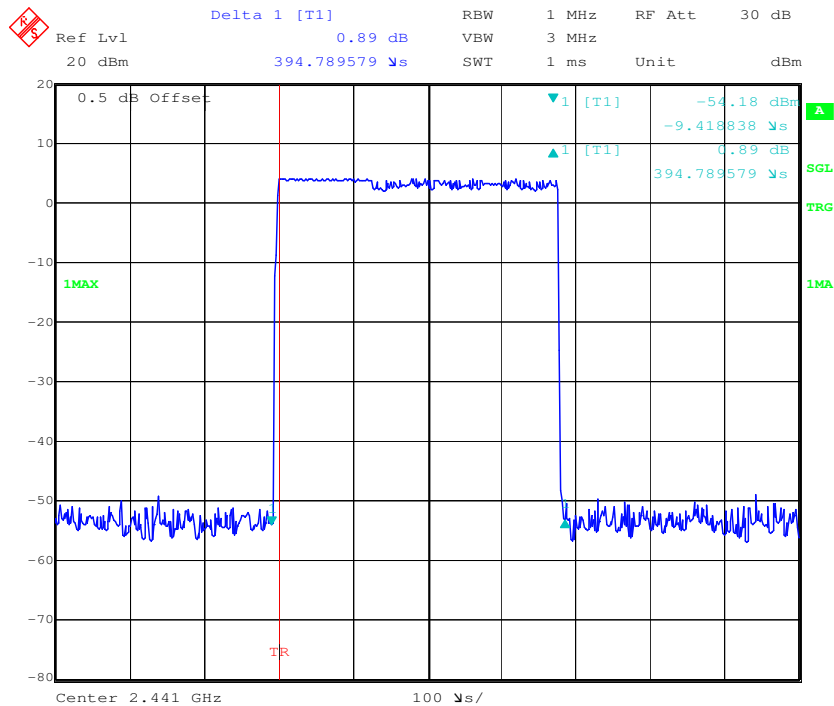


2DH1: High Channel

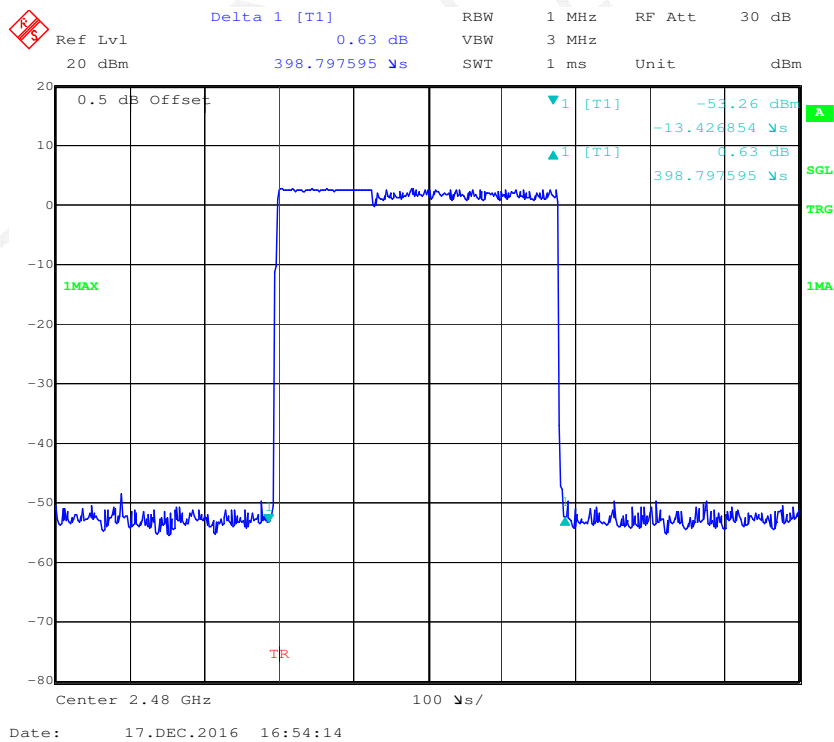


2DH3: Low Channel

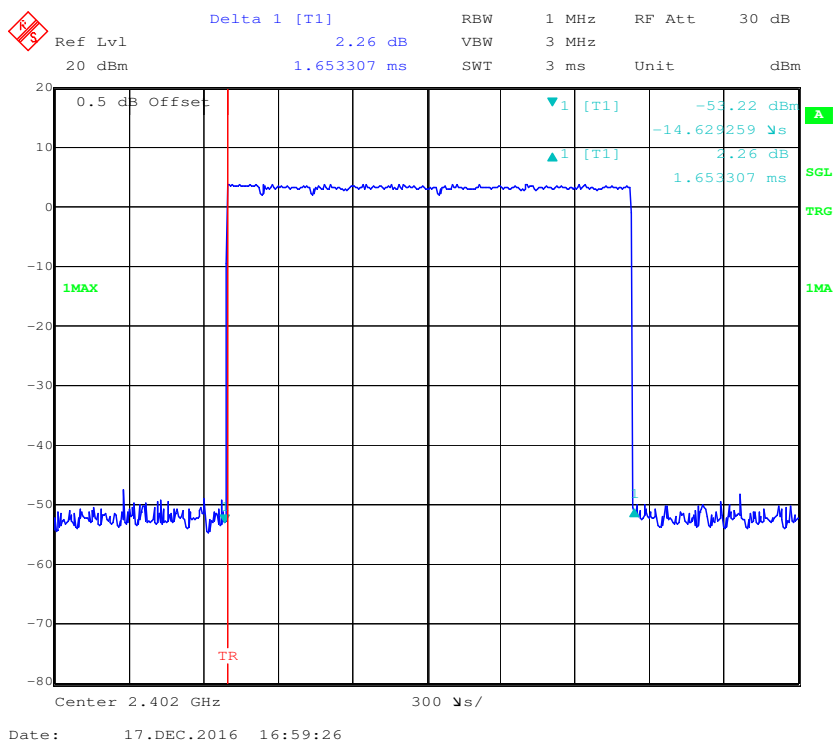


2DH3: Middle Channel

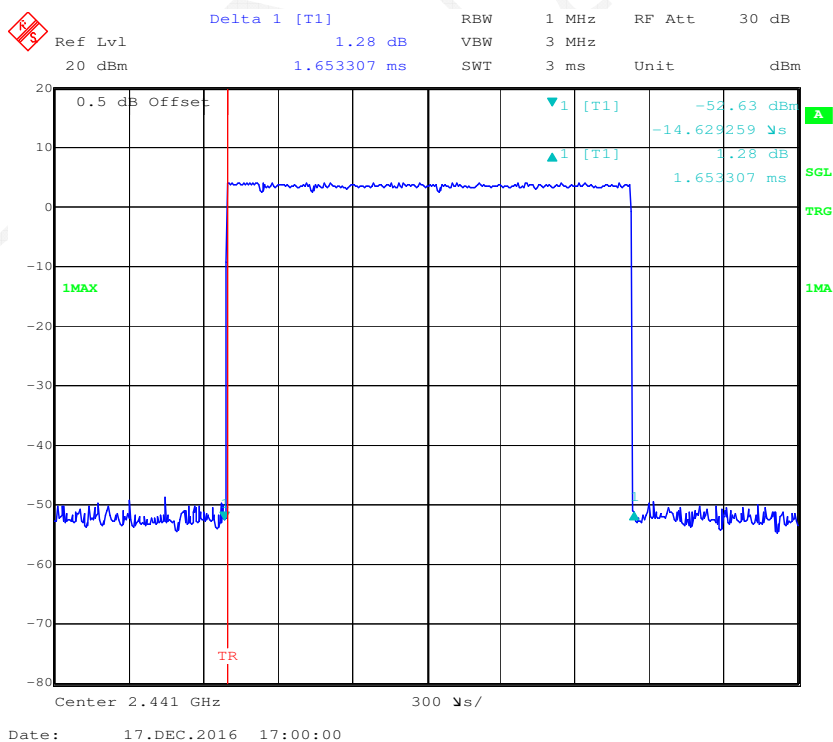


2DH3: High Channel

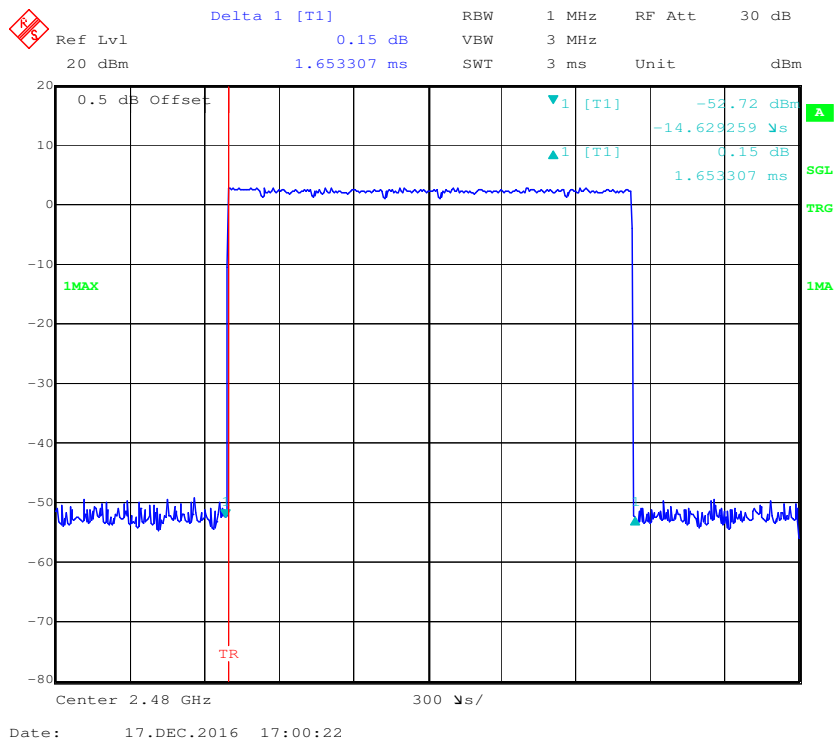


2DH5: Low Channel

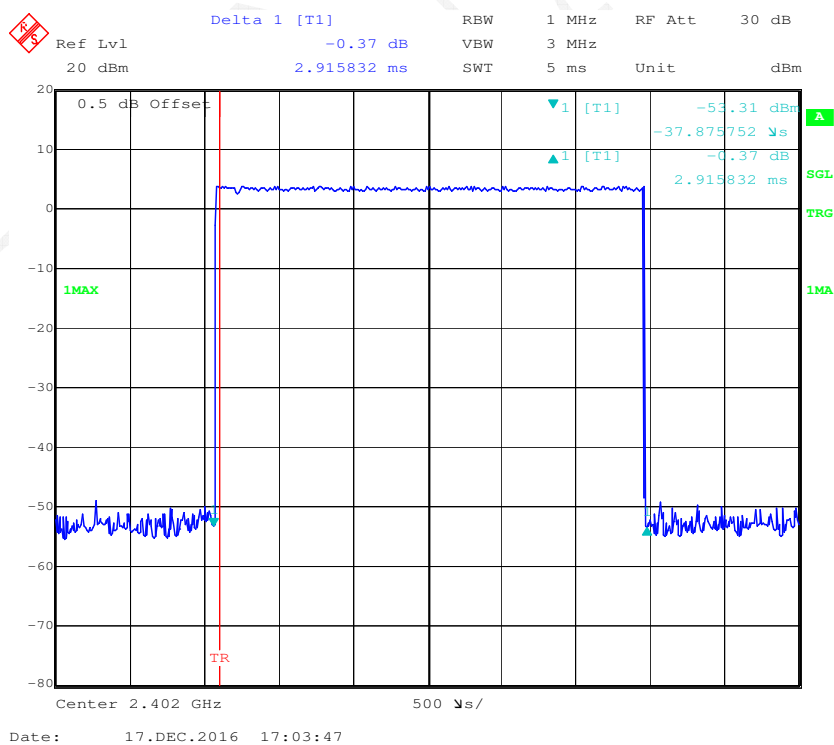

2DH5: Middle Channel

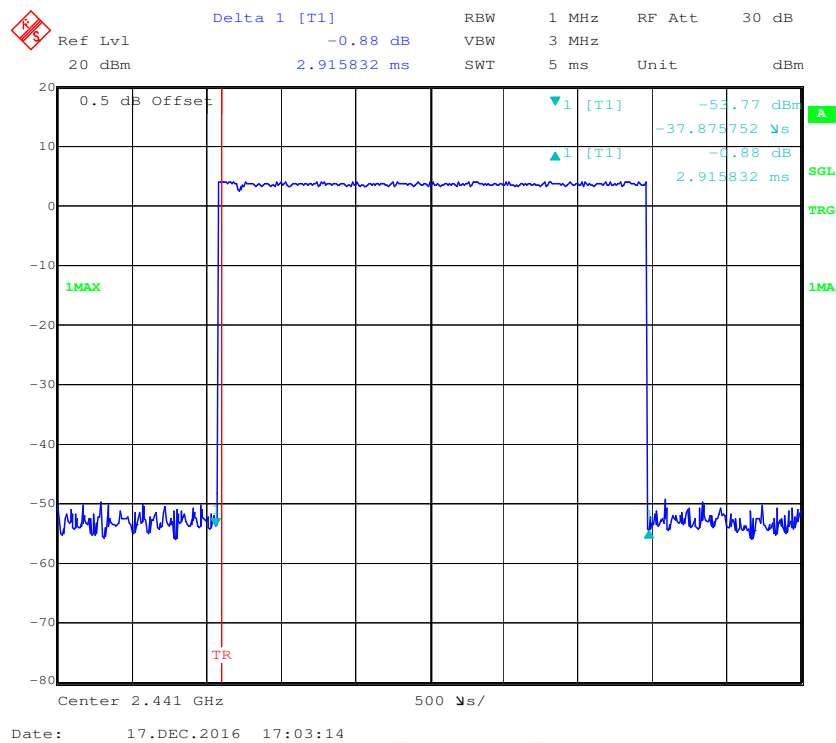


2DH5: High Channel

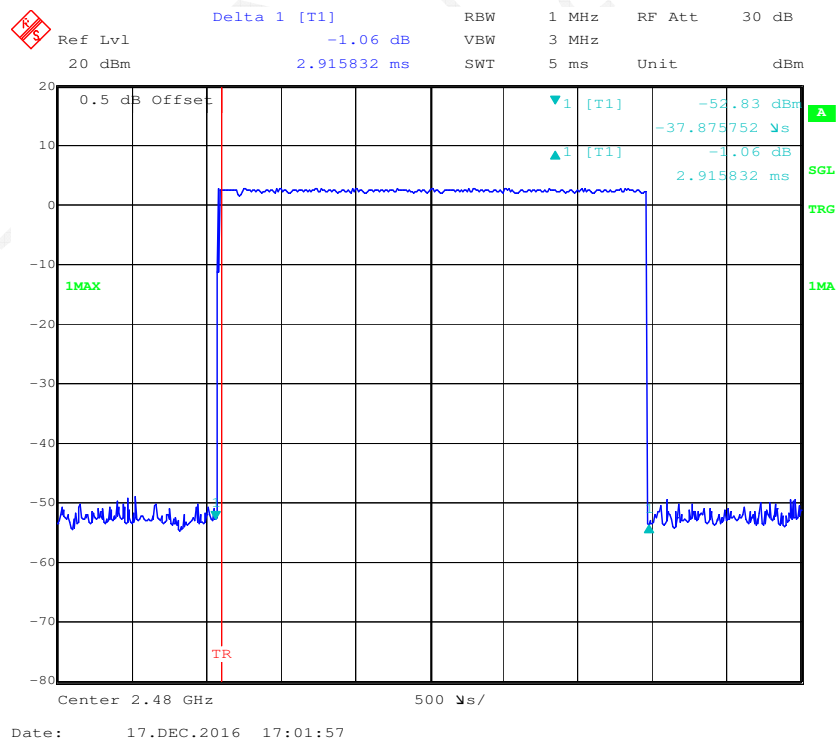


EDR Mode (8-DPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.395	0.13	0.4	Compliance
	Middle	0.395	0.13	0.4	Compliance
	High	0.397	0.13	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s				
3DH3	Low	1.653	0.26	0.4	Compliance
	Middle	1.659	0.27	0.4	Compliance
	High	1.653	0.26	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s				
3DH5	Low	2.916	0.31	0.4	Compliance
	Middle	2.926	0.31	0.4	Compliance
	High	2.936	0.31	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s				


3DH1: Low Channel

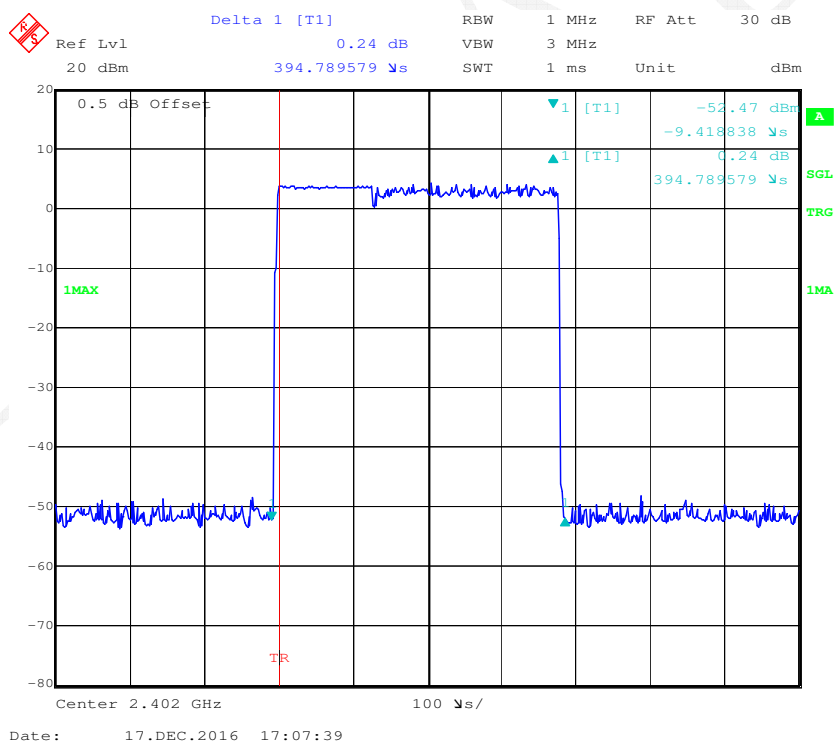


3DH1: Middle Channel

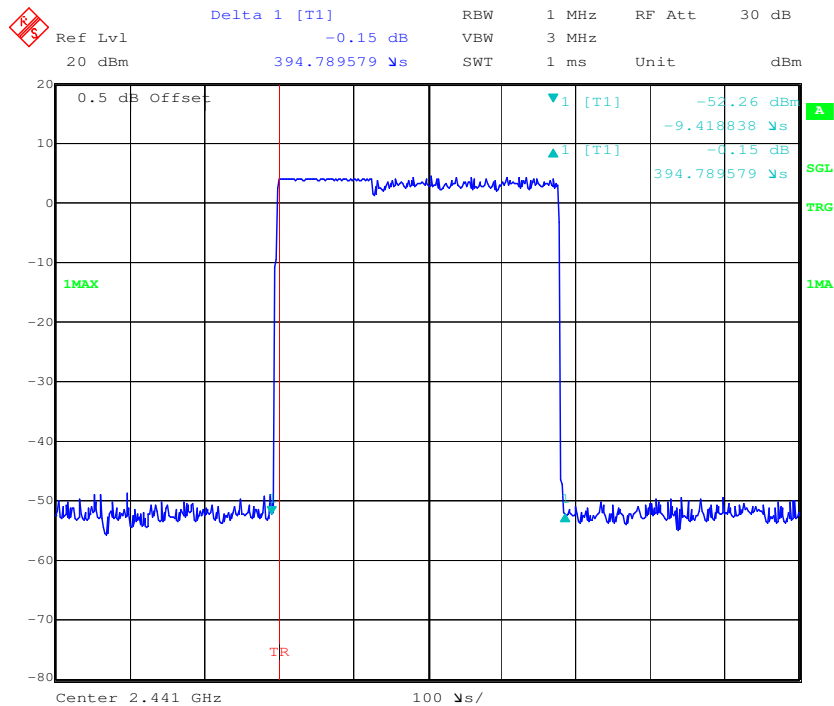


3DH1: High Channel

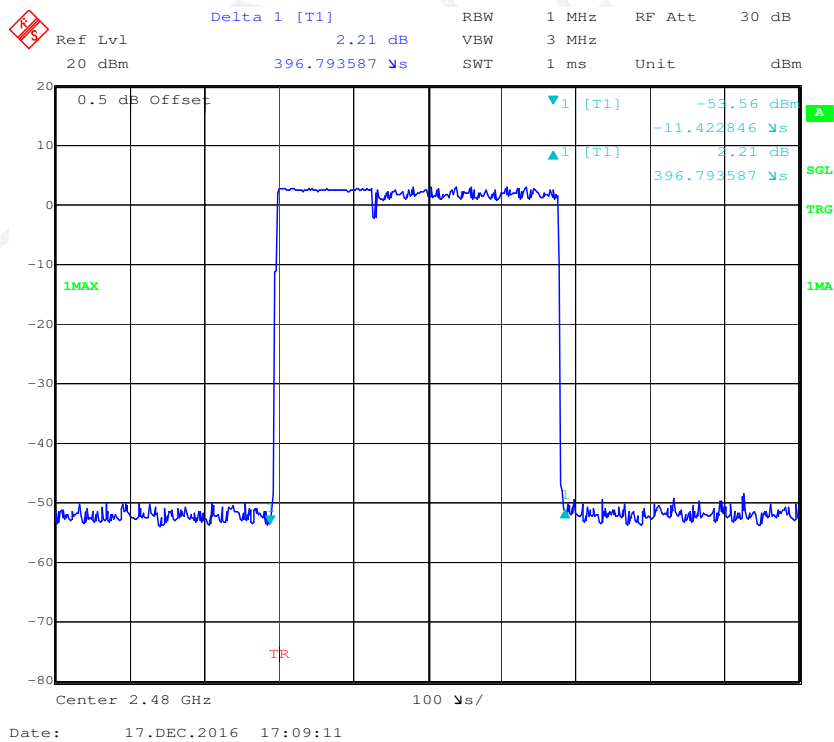


3DH3: High Channel

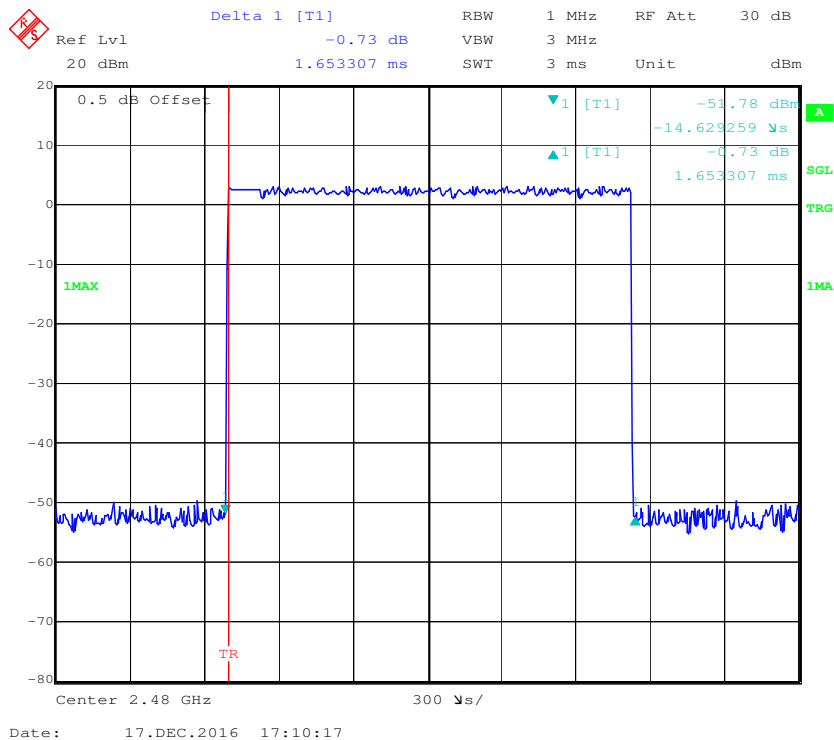


3DH5: Low Channel

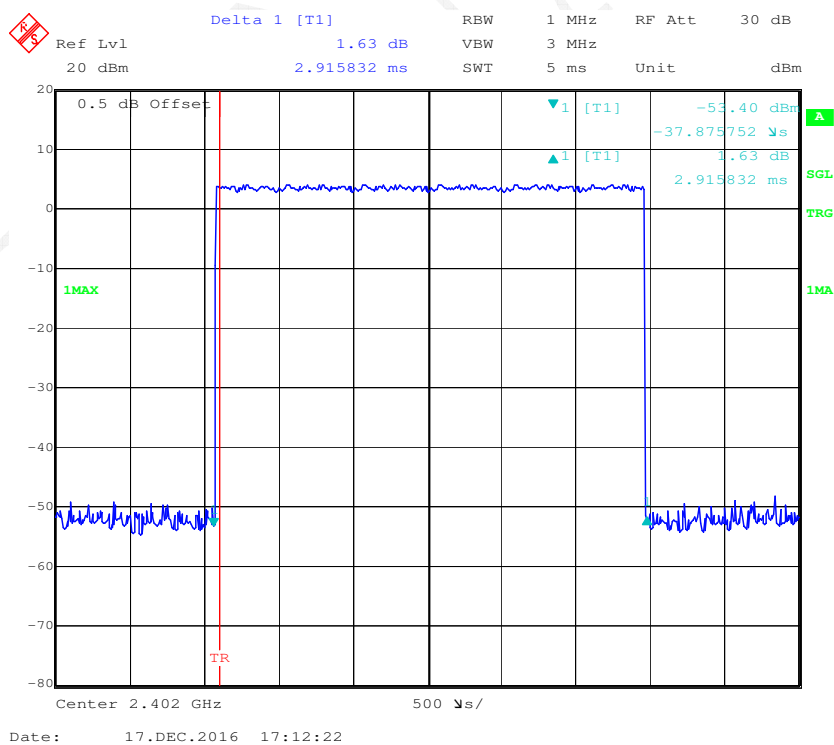

3DH5: Middle Channel

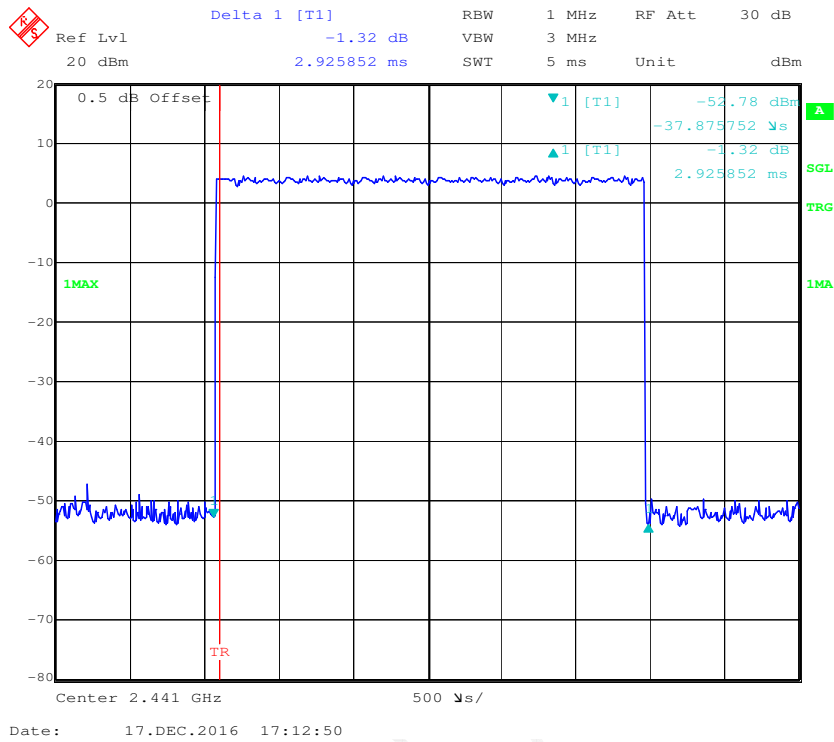

3DH5: High Channel

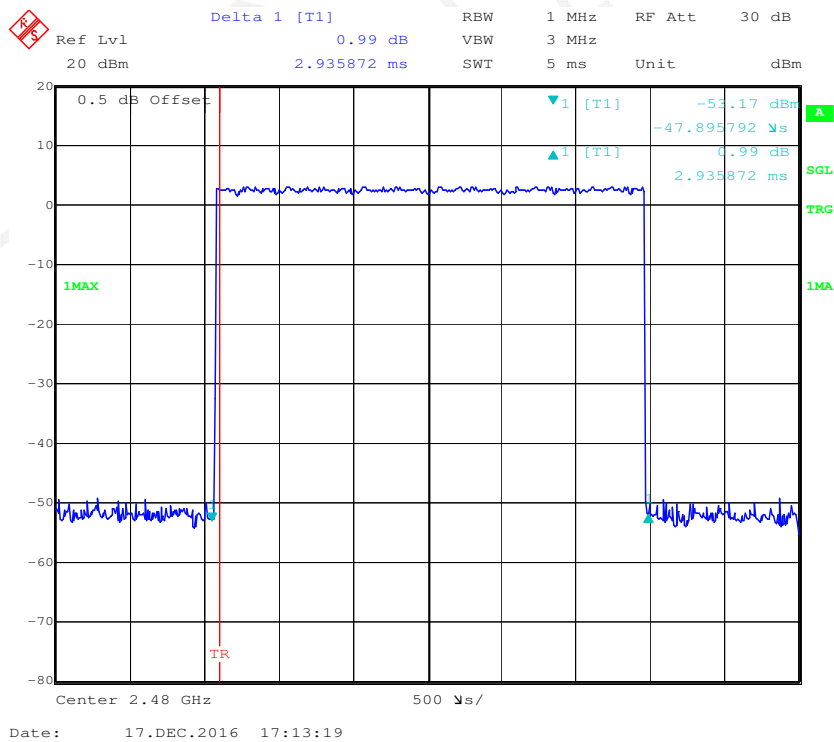

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.2 °C
Relative Humidity:	50 %
ATM Pressure:	102.1 kPa

* The testing was performed by Tom Tang on 2016-12-17.


Test Result: Compliance.

Test Mode: Transmitting


Mode	Frequency (MHz)	Peak Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	5.08	30
	2441	5.42	30
	2480	4.11	30
EDR Mode ($\pi/4$ -DQPSK)	2402	4.23	30
	2441	4.6	30
	2480	3.23	30
EDR Mode (8-DPSK)	2402	4.35	30
	2441	4.72	30
	2480	2.97	30

Note: The data above was tested in conducted mode.


BDR Mode (GFSK):

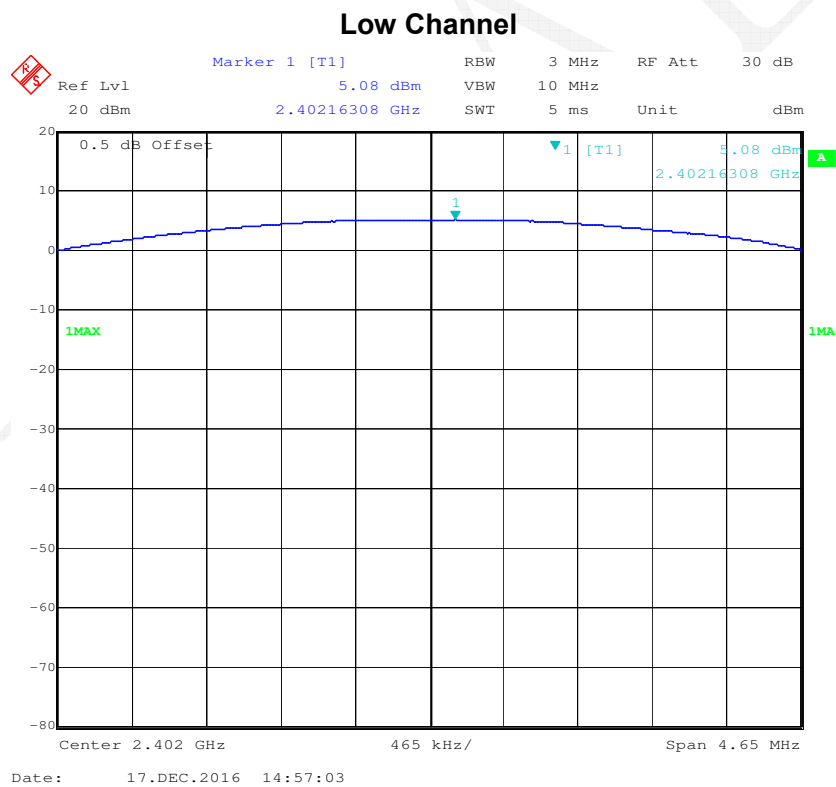

Middle Channel

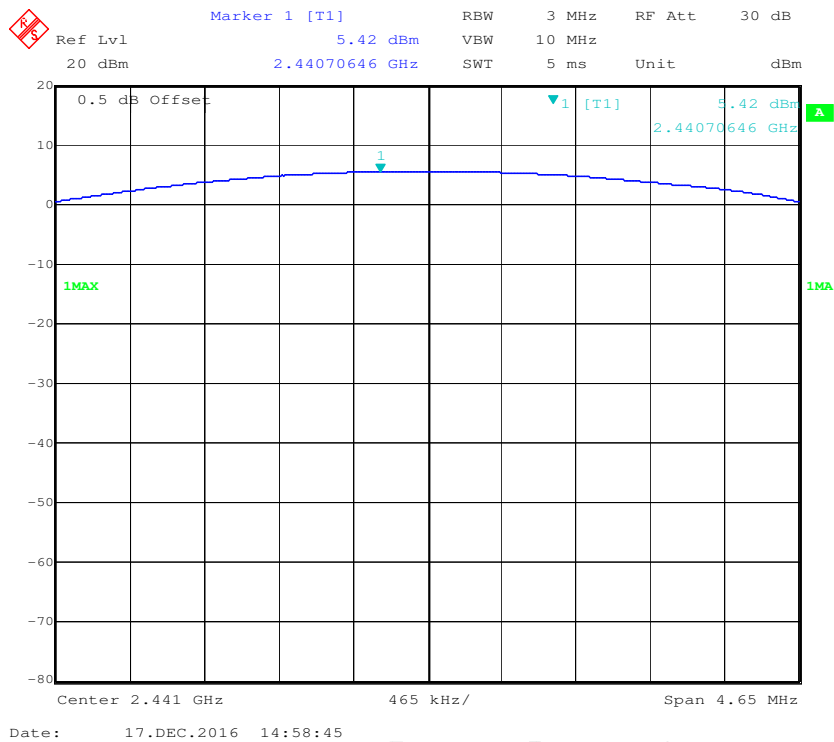


High Channel

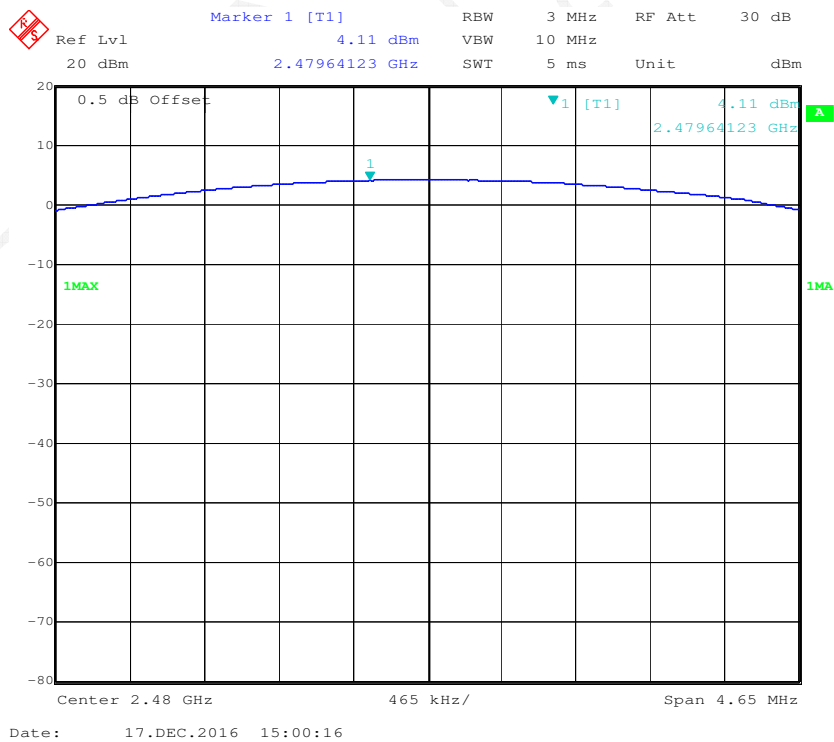


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

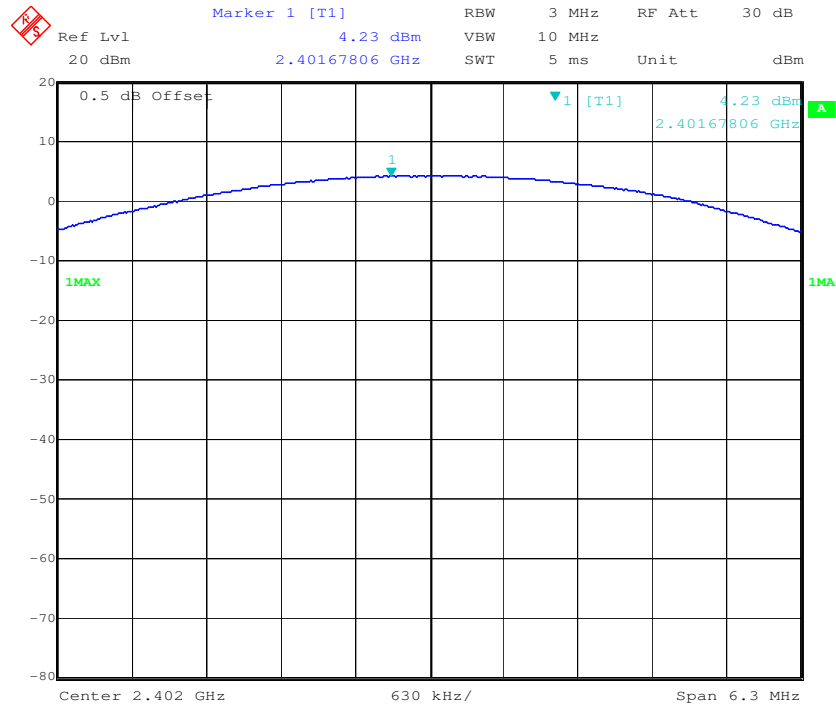


Date: 17.DEC.2016 15:03:22

Middle Channel

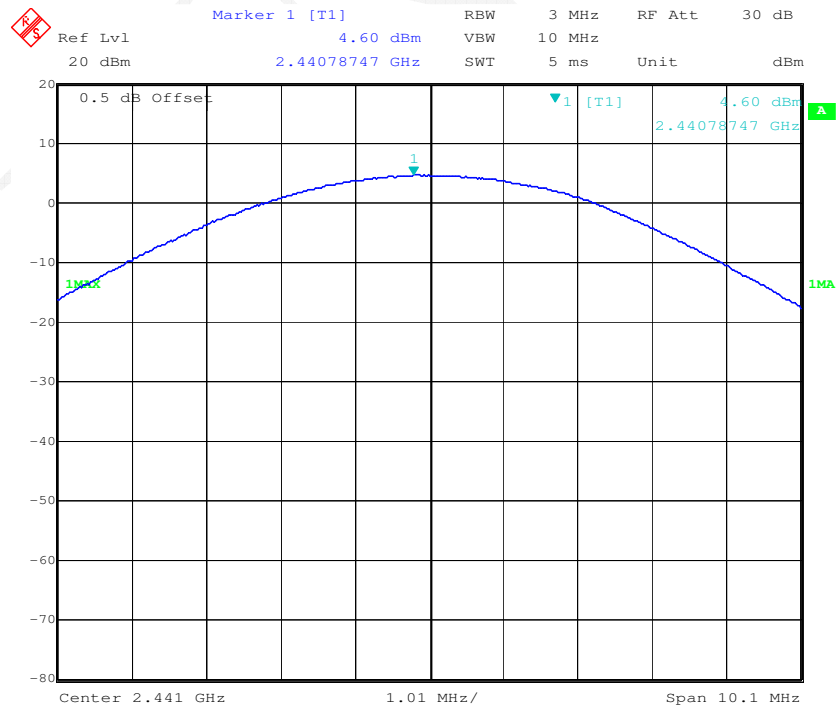


Date: 17.DEC.2016 15:17:11

High Channel

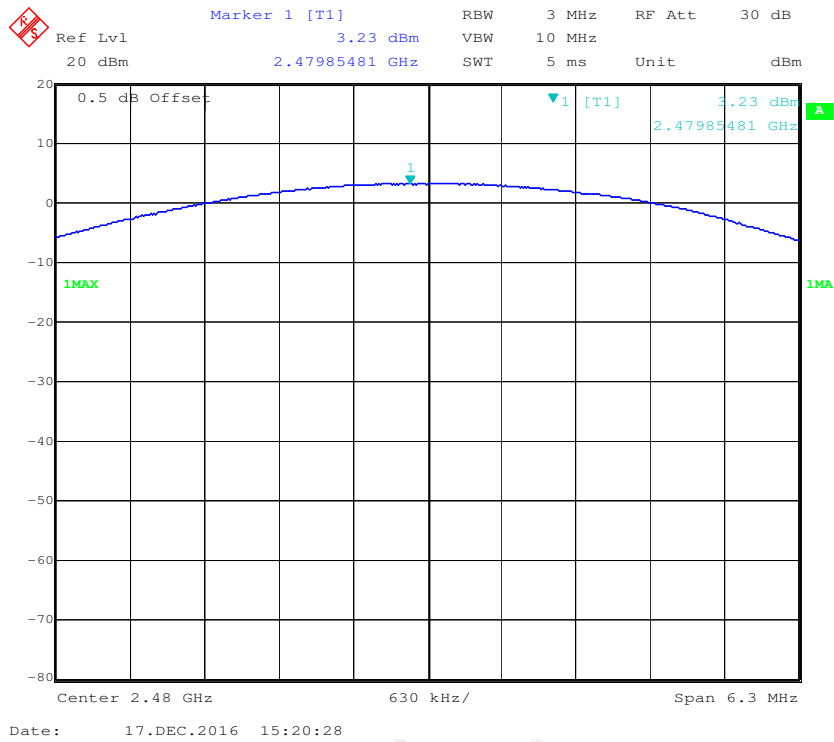


EDR Mode (8-DPSK):


Low Channel

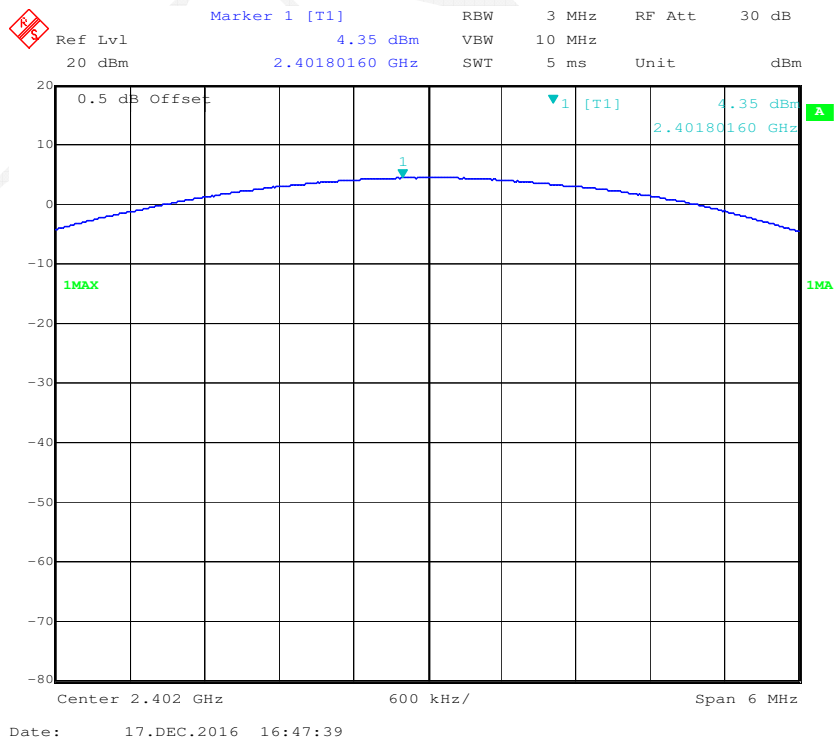

Middle Channel

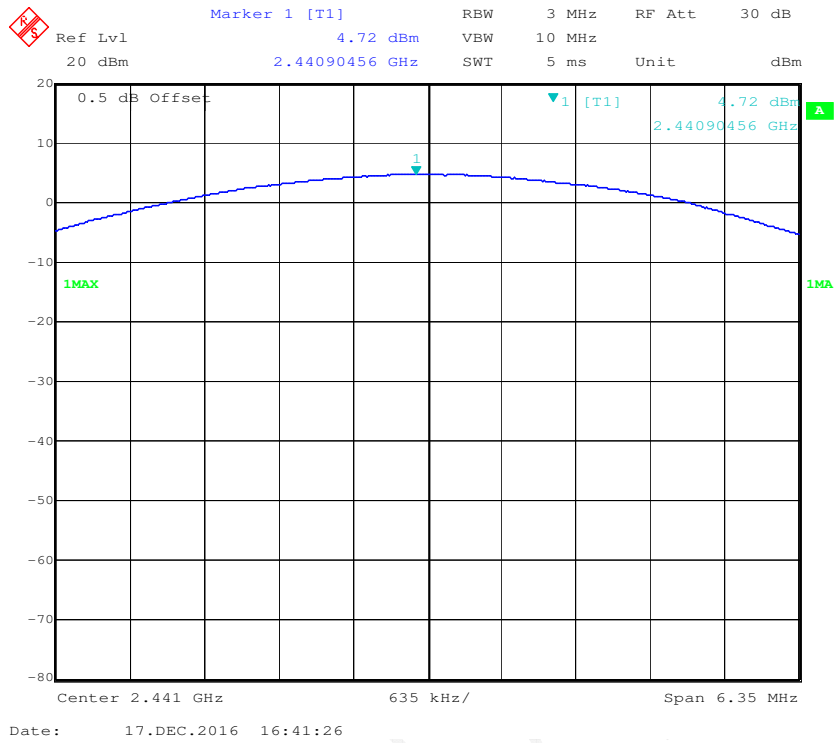

High Channel

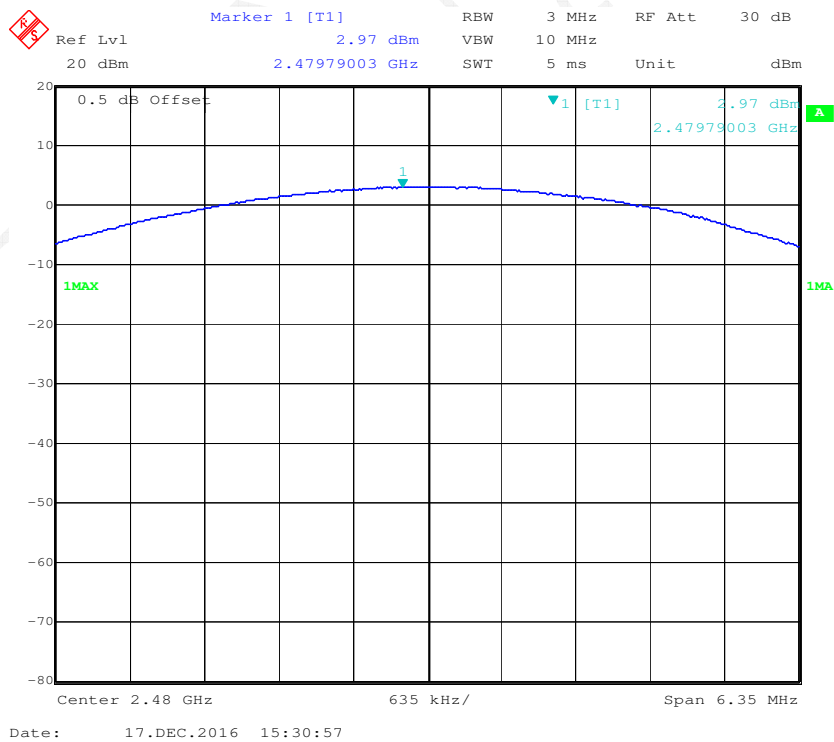

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
N/A	RF Cable	N/A	N/A	Each Time	/

* **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	28.2 °C
Relative Humidity:	50 %
ATM Pressure:	102.1 kPa

* The testing was performed by Tom Tang on 2016-12-17.


Test Result: Compliance

BDR Mode (GFSK):

Band Edge, Left Side

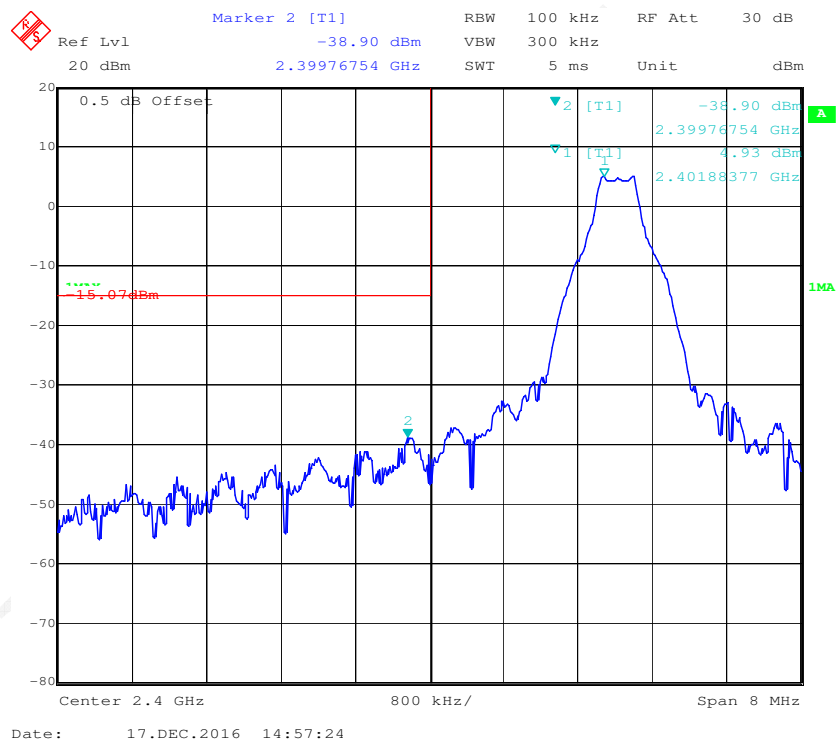


Band Edge, Right Side

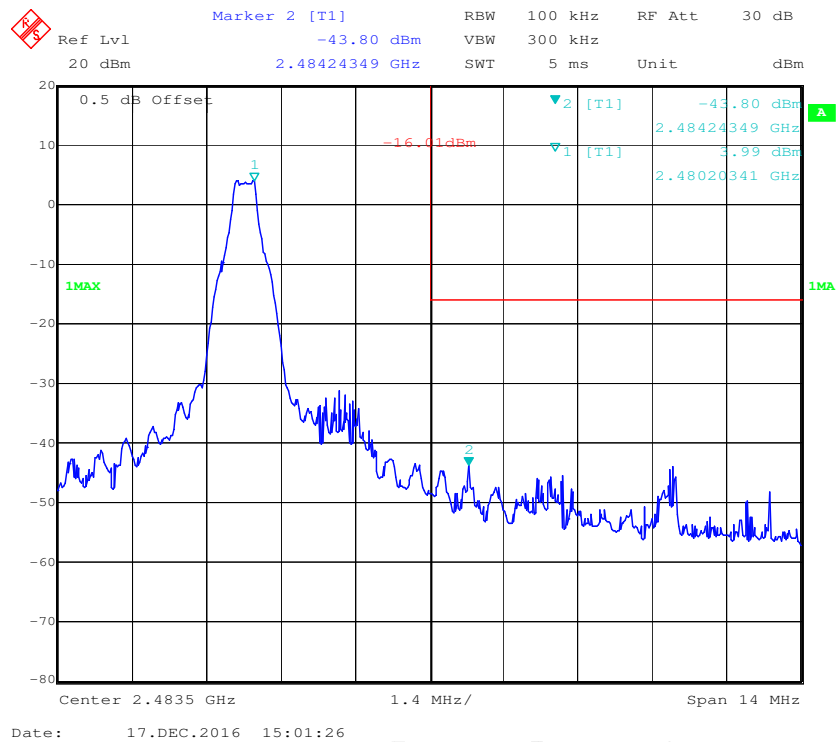


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

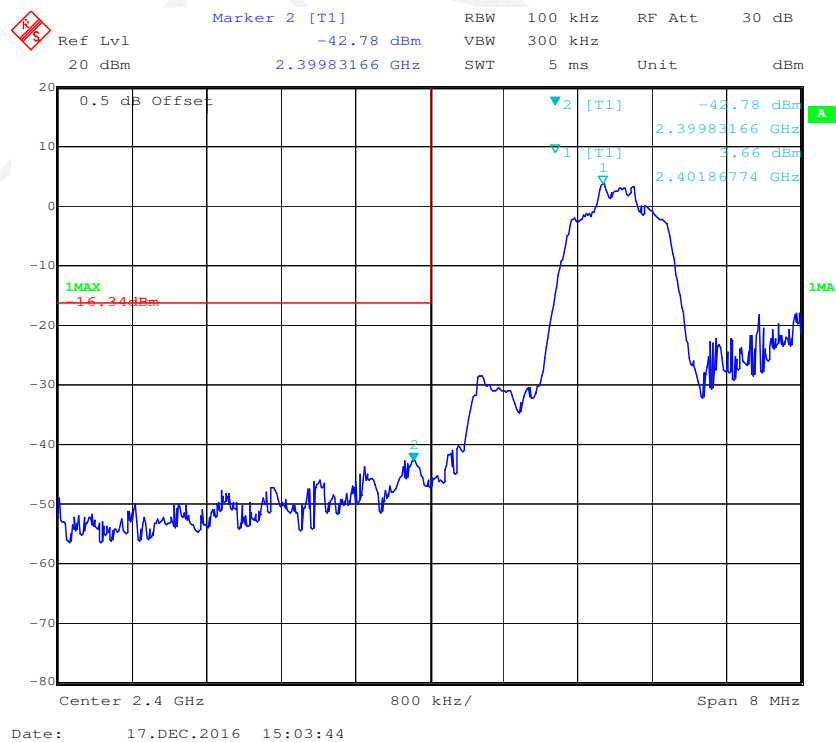


Band Edge, Right Side

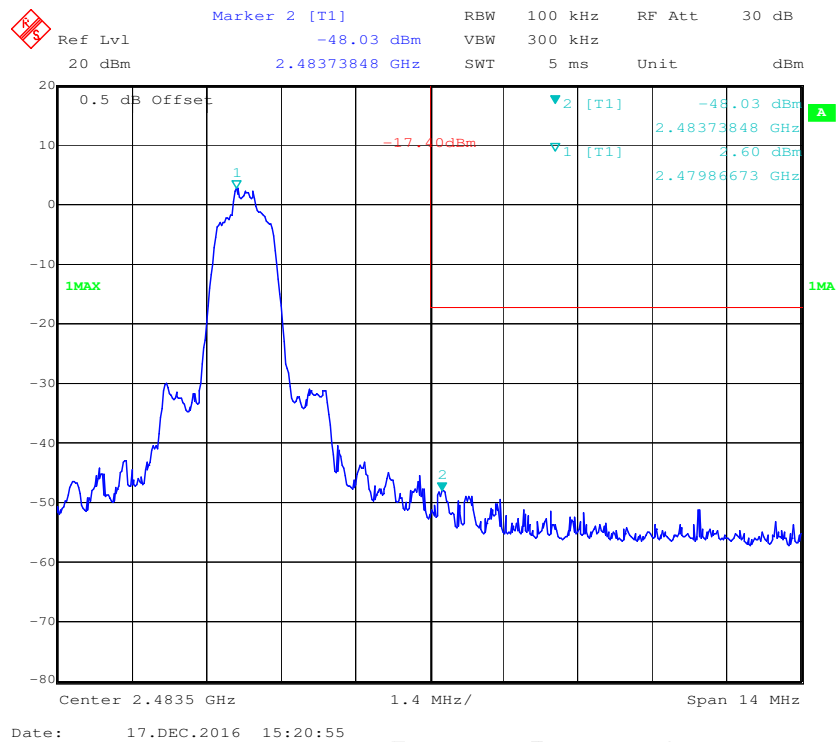


EDR Mode (8-DPSK):

Band Edge, Left Side

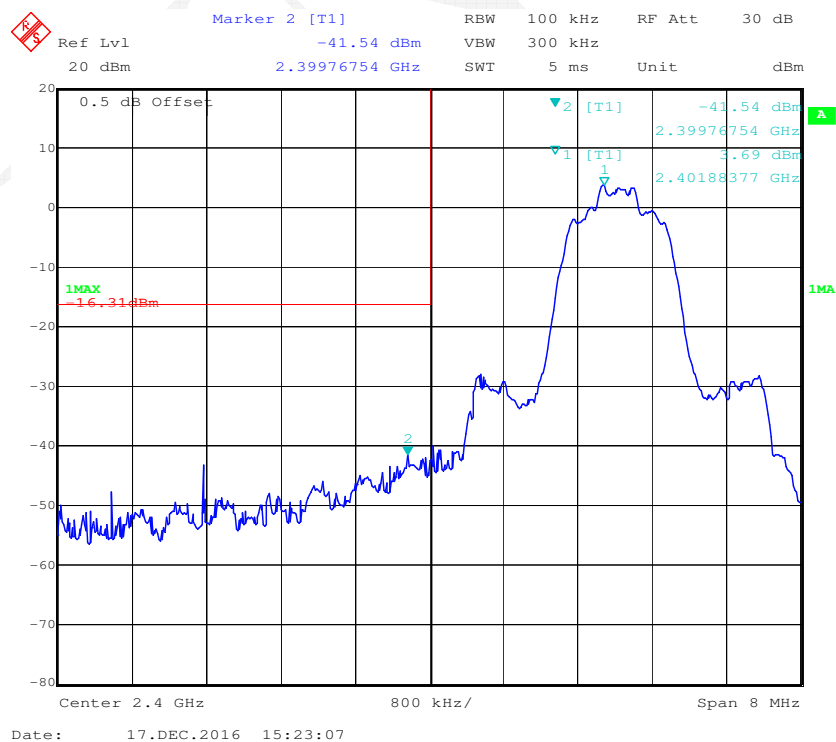

Band Edge, Right Side

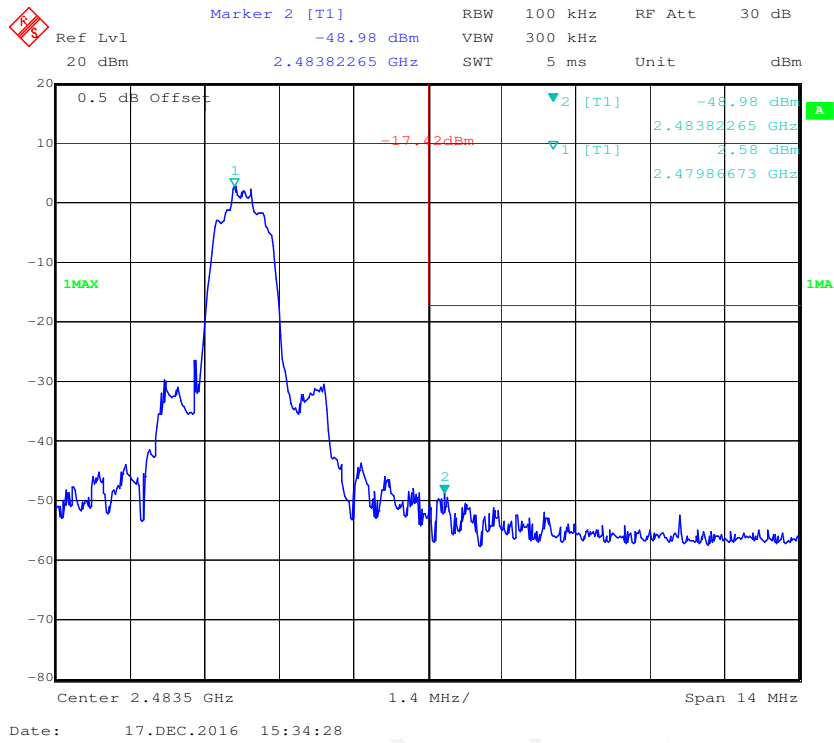

***** END OF REPORT *****