

# FCC TEST REPORT

Product Name: Smart Phone  
Trade Mark: BLU  
Model No.: ADVANCE L5  
Add. Model No.: N/A  
Report Number: 200916004RFC-2  
Test Standards: FCC 47 CFR Part 15 Subpart C  
FCC ID: YHLBLUADL5  
Test Result: PASS  
Date of Issue: October 10, 2020


Prepared for:

**BLU Products, Inc.**  
**10814 NW 33rd St # 100 Doral, FL 33172 ,USA**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**16/F, Block A, Building 6, Baoneng Science and Technology Park,**  
**Qingxiang Road No.1, Longhua New District, Shenzhen, China**  
**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Prepared by:

  
Ryan Zhou  
Senior Project Engineer

Reviewed by:

  
Kevin Liang  
Assistant Manager

Approved by:

  
  
Billy Li  
Technical Director

Date:

October 10, 2020

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.0

## Version

| Version No. | Date             | Description |
|-------------|------------------|-------------|
| V1.0        | October 10, 2020 | Original    |



## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.0

## CONTENTS

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION</b>                          | <b>4</b>  |
| 1.1 CLIENT INFORMATION                                 | 4         |
| 1.2 EUT INFORMATION                                    | 4         |
| 1.2.1 GENERAL DESCRIPTION OF EUT                       | 4         |
| 1.2.2 DESCRIPTION OF ACCESSORIES                       | 5         |
| 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD  | 5         |
| 1.4 OTHER INFORMATION                                  | 6         |
| 1.5 DESCRIPTION OF SUPPORT UNITS                       | 6         |
| 1.6 TEST LOCATION                                      | 6         |
| 1.7 TEST FACILITY                                      | 7         |
| 1.8 DEVIATION FROM STANDARDS                           | 7         |
| 1.9 ABNORMALITIES FROM STANDARD CONDITIONS             | 7         |
| 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER       | 7         |
| 1.11 MEASUREMENT UNCERTAINTY                           | 7         |
| <b>2. TEST SUMMARY</b>                                 | <b>8</b>  |
| <b>3. EQUIPMENT LIST</b>                               | <b>9</b>  |
| <b>4. TEST CONFIGURATION</b>                           | <b>10</b> |
| 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING               | 10        |
| 4.1.1 NORMAL OR EXTREME TEST CONDITIONS                | 10        |
| 4.1.2 RECORD OF NORMAL ENVIRONMENT                     | 10        |
| 4.2 TEST CHANNELS                                      | 10        |
| 4.3 EUT TEST STATUS                                    | 10        |
| 4.4 PRE-SCAN                                           | 11        |
| 4.4.1 PRE-SCAN UNDER ALL PACKETS AT MIDDLE CHANNEL     | 11        |
| 4.4.2 WORST-CASE DATA PACKETS                          | 11        |
| 4.4.3 TESTED CHANNEL DETAIL                            | 11        |
| 4.5 TEST SETUP                                         | 12        |
| 4.5.1 FOR RADIATED EMISSIONS TEST SETUP                | 12        |
| 4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP               | 13        |
| 4.5.3 FOR CONDUCTED RF TEST SETUP                      | 14        |
| 4.6 SYSTEM TEST CONFIGURATION                          | 14        |
| 4.7 DUTY CYCLE                                         | 15        |
| <b>5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b>   | <b>16</b> |
| 5.1 REFERENCE DOCUMENTS FOR TESTING                    | 16        |
| 5.2 ANTENNA REQUIREMENT                                | 16        |
| 5.3 CONDUCTED PEAK OUTPUT POWER                        | 17        |
| 5.4 20 dB BANDWIDTH                                    | 20        |
| 5.5 CARRIER FREQUENCIES SEPARATION                     | 23        |
| 5.6 NUMBER OF HOPPING CHANNEL                          | 25        |
| 5.7 DWELL TIME                                         | 29        |
| 5.8 CONDUCTED OUT OF BAND EMISSION                     | 33        |
| 5.9 RADIATED SPURIOUS EMISSIONS                        | 38        |
| 5.10 BAND EDGE MEASUREMENTS (RADIATED)                 | 42        |
| 5.11 CONDUCTED EMISSION                                | 45        |
| <b>APPENDIX 1 PHOTOS OF TEST SETUP</b>                 | <b>48</b> |
| <b>APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS</b> | <b>48</b> |

## 1. GENERAL INFORMATION

### 1.1 CLIENT INFORMATION

|                                 |                                             |
|---------------------------------|---------------------------------------------|
| <b>Applicant:</b>               | BLU Products, Inc.                          |
| <b>Address of Applicant:</b>    | 10814 NW 33rd St # 100 Doral, FL 33172 ,USA |
| <b>Manufacturer:</b>            | BLU Products, Inc.                          |
| <b>Address of Manufacturer:</b> | 10814 NW 33rd St # 100 Doral, FL 33172 ,USA |

### 1.2 EUT INFORMATION

#### 1.2.1 General Description of EUT

|                               |                                       |                                    |
|-------------------------------|---------------------------------------|------------------------------------|
| <b>Product Name:</b>          | Smart Phone                           |                                    |
| <b>Model No.:</b>             | ADVANCE L5                            |                                    |
| <b>Add. Model No.:</b>        | N/A                                   |                                    |
| <b>Trade Mark:</b>            | BLU                                   |                                    |
| <b>DUT Stage:</b>             | Identical Prototype                   |                                    |
| <b>EUT Supports Function:</b> | <b>GSM Bands:</b>                     | GSM850/PCS1900                     |
|                               | <b>UTRA Bands:</b>                    | Band II/ Band V                    |
|                               | <b>E-UTRA Bands:</b>                  | FDD Band 2/ Band 4/ Band 5/ Band 7 |
|                               | <b>2.4 GHz ISM Band:</b>              | IEEE 802.11b/g/n                   |
|                               |                                       | Bluetooth V4.2                     |
| <b>Sample Received Date:</b>  | September 16, 2020                    |                                    |
| <b>Sample Tested Date:</b>    | September 24, 2020 to October 9, 2020 |                                    |

### 1.2.2 Description of Accessories

| Adapter       |                                        |
|---------------|----------------------------------------|
| Model No.:    | US-AR-0500                             |
| Input:        | 100-240 V~50/60 Hz 0.15 A              |
| Output:       | 5.0 V $\equiv$ 500 mA                  |
| DC Cable:     | 1.0 Meter, Unshielded without ferrite  |
| Manufacturer: | Chongqing lianmao Electronic Co., Ltd. |

| Battery                 |                                          |
|-------------------------|------------------------------------------|
| Model No.:              | C348246140L                              |
| Battery Type:           | Lithium-ion Polymer Rechargeable Battery |
| Rated Voltage:          | 3.7 Vdc                                  |
| Limited Charge Voltage: | 4.2 Vdc                                  |
| Rated Capacity:         | 1400 mAh                                 |
| Manufacturer:           | Shenzhen Truepower New Energy Co.,Ltd.   |

| Cable        |                            |
|--------------|----------------------------|
| Description: | USB Micro-B Plug Cable     |
| Cable Type:  | Unshielded without ferrite |
| Length:      | 1.0 Meter                  |

### 1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

|                       |                                         |
|-----------------------|-----------------------------------------|
| Frequency Band:       | 2400 MHz to 2483.5 MHz                  |
| Frequency Range:      | 2402 MHz to 2480 MHz                    |
| Bluetooth Version:    | Bluetooth BR + EDR                      |
| Modulation Technique: | Frequency Hopping Spread Spectrum(FHSS) |
| Type of Modulation:   | GFSK, $\pi/4$ DQPSK, 8DPSK              |
| Number of Channels:   | 79                                      |
| Channel Separation:   | 1 MHz                                   |
| Hopping Channel Type: | Adaptive Frequency Hopping Systems      |
| Antenna Type:         | PIFA Antenna                            |
| Antenna Gain:         | 0.63 dBi                                |
| Maximum Peak Power:   | 8.314dBm                                |
| Normal Test Voltage:  | 3.7 Vdc                                 |

## 1.4 OTHER INFORMATION

| Operation Frequency Each of Channel          |                                   |
|----------------------------------------------|-----------------------------------|
| $f = 2402 + k \text{ MHz}, k = 0, \dots, 78$ |                                   |
| Note:                                        |                                   |
| f                                            | is the operating frequency (MHz); |
| k                                            | is the operating channel.         |

| Modulation Configure |        |             |             |
|----------------------|--------|-------------|-------------|
| Modulation           | Packet | Packet Type | Packet Size |
| GFSK                 | 1-DH1  | 4           | 27          |
|                      | 1-DH3  | 11          | 183         |
|                      | 1-DH5  | 15          | 339         |
| $\pi/4$ DQPSK        | 2-DH1  | 20          | 54          |
|                      | 2-DH3  | 26          | 367         |
|                      | 2-DH5  | 30          | 679         |
| 8DPSK                | 3-DH1  | 24          | 83          |
|                      | 3-DH3  | 27          | 552         |
|                      | 3-DH5  | 31          | 1021        |

## 1.5 DESCRIPTION OF SUPPORT UNITS

### 1) Support Equipment

| Description | Manufacturer | Model No. | Serial Number | Supplied by |
|-------------|--------------|-----------|---------------|-------------|
| --          | --           | --        | --            | --          |

### 2) Support Cable

| Cable No. | Description   | Connector | Length     | Supplied by |
|-----------|---------------|-----------|------------|-------------|
| 1         | Antenna Cable | SMA       | 0.30 Meter | UnionTrust  |

## 1.6 TEST LOCATION

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109  
 Telephone: +86 (0) 755 2823 0888  
 Fax: +86 (0) 755 2823 0886

## 1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

**CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

**A2LA-Lab Certificate No.: 4312.01**

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**ISED Wireless Device Testing Laboratories**

CAB identifier: CN0032

**FCC Accredited Lab.**

Designation Number: CN1194

Test Firm Registration Number: 259480

## 1.8 DEVIATION FROM STANDARDS

None.

## 1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

## 1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

## 1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Conducted emission 9KHz-150KHz  | $\pm 3.2$ dB            |
| 2   | Conducted emission 150KHz-30MHz | $\pm 2.7$ dB            |
| 3   | Radiated emission 9KHz-30MHz    | $\pm 4.7$ dB            |
| 4   | Radiated emission 30MHz-1GHz    | $\pm 4.6$ dB            |
| 5   | Radiated emission 1GHz-18GHz    | $\pm 4.4$ dB            |
| 6   | Radiated emission 18GHz-26GHz   | $\pm 4.6$ dB            |
| 7   | Radiated emission 26GHz-40GHz   | $\pm 4.6$ dB            |

## 2. TEST SUMMARY

| FCC 47 CFR Part 15 Subpart C Test Cases                      |                                                        |                                                 |        |
|--------------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------|--------|
| Test Item                                                    | Test Requirement                                       | Test Method                                     | Result |
| Antenna Requirement                                          | FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) | N/A                                             | PASS   |
| AC Power Line Conducted Emission                             | FCC 47 CFR Part 15 Subpart C Section 15.207            | ANSI C63.10-2013 Section 6.2                    | PASS   |
| Conducted Peak Output Power                                  | FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)     | ANSI C63.10-2013 Section 7.8.5                  | PASS   |
| 20 dB Bandwidth                                              | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)     | ANSI C63.10-2013 Section 6.9.2                  | PASS   |
| Carrier Frequencies Separation                               | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)     | ANSI C63.10-2013 Section 7.8.2                  | PASS   |
| Number of Hopping Channel                                    | FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)     | ANSI C63.10-2013 Section 7.8.3                  | PASS   |
| Dwell Time                                                   | FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)     | ANSI C63.10-2013 Section 7.8.4                  | PASS   |
| Conducted Out of Band Emission                               | FCC 47 CFR Part 15 Subpart C Section 15.247(d)         | ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8 | PASS   |
| Radiated Emissions                                           | FCC 47 CFR Part 15 Subpart C Section 15.205/15.209     | ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6        | PASS   |
| Band Edge Measurement                                        | FCC 47 CFR Part 15 Subpart C Section 15.205/15.209     | ANSI C63.10-2013 Section 6.10.5                 | PASS   |
| <b>Note:</b><br>1) N/A: In this whole report not applicable. |                                                        |                                                 |        |

### 3. EQUIPMENT LIST

| Radiated Emission Test Equipment List |                                     |              |            |                            |                         |                             |
|---------------------------------------|-------------------------------------|--------------|------------|----------------------------|-------------------------|-----------------------------|
| Used                                  | Equipment                           | Manufacturer | Model No.  | Serial Number              | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| <input checked="" type="checkbox"/>   | 3M Chamber & Accessory Equipment    | ETS-LINDGREN | 3M         | N/A                        | Dec. 03, 2018           | Dec. 03, 2021               |
| <input checked="" type="checkbox"/>   | Receiver                            | R&S          | ESIB26     | 100114                     | Nov. 24, 2019           | Nov. 23, 2020               |
| <input checked="" type="checkbox"/>   | Loop Antenna                        | ETS-LINDGREN | 6502       | 00202525                   | Nov. 16, 2019           | Nov. 15, 2020               |
| <input checked="" type="checkbox"/>   | Broadband Antenna                   | ETS-LINDGREN | 3142E      | 00201566                   | Nov. 16, 2019           | Nov. 15, 2020               |
| <input checked="" type="checkbox"/>   | 6dB Attenuator                      | Talent       | RA6A5-N-18 | 18103001                   | Nov. 16, 2019           | Nov. 15, 2020               |
| <input checked="" type="checkbox"/>   | Preamplifier                        | HP           | 8447F      | 2805A02960                 | Nov. 24, 2019           | Nov. 23, 2020               |
| <input type="checkbox"/>              | Broadband Antenna (Pre-amplifier)   | ETS-LINDGREN | 3142E-PA   | 00201891                   | May. 30, 2020           | May. 29, 2021               |
| <input type="checkbox"/>              | 6dB Attenuator                      | Talent       | RA6A5-N-18 | 18103002                   | Nov. 24, 2019           | Nov. 23, 2020               |
| <input type="checkbox"/>              | Horn Antenna                        | ETS-LINDGREN | 3117       | 00164202                   | Nov. 16, 2019           | Nov. 15, 2020               |
| <input checked="" type="checkbox"/>   | Horn Antenna (Pre-amplifier)        | ETS-LINDGREN | 3117-PA    | 00201874                   | May. 30, 2020           | May. 29, 2021               |
| <input type="checkbox"/>              | Horn Antenna                        | ETS-LINDGREN | 3116C      | 00200180                   | Jun. 19, 2020           | Jun. 18, 2021               |
| <input checked="" type="checkbox"/>   | Horn Antenna (Pre-amplifier)        | ETS-LINDGREN | 3116C-PA   | 00202652                   | Nov. 16, 2019           | Nov. 15, 2020               |
| <input checked="" type="checkbox"/>   | Multi device Controller             | ETS-LINDGREN | 7006-001   | 00160105                   | N/A                     | N/A                         |
| <input type="checkbox"/>              | Wideband Radio Communication Tester | R&S          | CMW500     | 120932                     | Jul. 20, 2020           | Jul. 19, 2021               |
| <input checked="" type="checkbox"/>   | Test Software                       | Audix        | e3         | Software Version: 9.160323 |                         |                             |

| Conducted Emission Test Equipment List |               |              |           |                            |                         |                             |
|----------------------------------------|---------------|--------------|-----------|----------------------------|-------------------------|-----------------------------|
| Used                                   | Equipment     | Manufacturer | Model No. | Serial Number              | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| <input checked="" type="checkbox"/>    | Receiver      | R&S          | ESR7      | 1316.3003K07-101181-K3     | Nov. 24, 2019           | Nov. 23, 2020               |
| <input checked="" type="checkbox"/>    | Pulse Limiter | R&S          | ESH3-Z2   | 0357.8810.54               | Nov. 24, 2019           | Nov. 23, 2020               |
| <input checked="" type="checkbox"/>    | LISN          | R&S          | ESH2-Z5   | 860014/024                 | Nov. 24, 2019           | Nov. 23, 2020               |
| <input type="checkbox"/>               | LISN          | ETS-Lindgren | 3816/2SH  | 00201088                   | Nov. 24, 2019           | Nov. 23, 2020               |
| <input checked="" type="checkbox"/>    | Test Software | Audix        | e3        | Software Version: 9.160323 |                         |                             |

| Conducted RF test Equipment List    |                                     |              |           |               |                         |                             |
|-------------------------------------|-------------------------------------|--------------|-----------|---------------|-------------------------|-----------------------------|
| Used                                | Equipment                           | Manufacturer | Model No. | Serial Number | Cal. date (mm dd, yyyy) | Cal. Due date (mm dd, yyyy) |
| <input checked="" type="checkbox"/> | EXA Spectrum Analyzer               | KEYSIGHT     | N9010A    | MY51440197    | Nov. 24, 2019           | Nov. 23, 2020               |
| <input checked="" type="checkbox"/> | USB Wideband Power Sensor           | KEYSIGHT     | U2021XA   | MY55430035    | Nov. 24, 2019           | Nov. 23, 2020               |
| <input type="checkbox"/>            | USB Wideband Power Sensor           | KEYSIGHT     | U2021XA   | MY55430023    | Nov. 24, 2019           | Nov. 23, 2020               |
| <input type="checkbox"/>            | Wideband Radio Communication Tester | R&S          | CMW500    | 120932        | Jul. 20, 2020           | Jul. 19, 2021               |

#### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.0

## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

| Environment Parameter                                           | Selected Values During Tests |             |                       |
|-----------------------------------------------------------------|------------------------------|-------------|-----------------------|
| Test Condition                                                  | Ambient                      |             |                       |
|                                                                 | Temperature (°C)             | Voltage (V) | Relative Humidity (%) |
| NT/NV                                                           | +15 to +35                   | 3.7         | 20 to 75              |
| <b>Remark:</b><br>1) NV: Normal Voltage; NT: Normal Temperature |                              |             |                       |

#### 4.1.2 Record of Normal Environment

| Test Item                        | Temperature (°C) | Relative Humidity (%) | Pressure (kPa) | Tested by   |
|----------------------------------|------------------|-----------------------|----------------|-------------|
| AC Power Line Conducted Emission | 24.1             | 66.0                  | 99.80          | Tripp Jiang |
| Conducted Peak Output Power      | 24.7             | 51.0                  | 100.21         | Hank Wu     |
| 20 dB Bandwidth                  | 24.7             | 51.0                  | 100.21         | Hank Wu     |
| Carrier Frequencies Separation   | 24.7             | 51.0                  | 100.21         | Hank Wu     |
| Number of Hopping Channel        | 24.7             | 51.0                  | 100.21         | Hank Wu     |
| Dwell Time                       | 24.7             | 51.0                  | 100.21         | Hank Wu     |
| Conducted Out of Band Emission   | 24.7             | 51.0                  | 100.21         | Hank Wu     |
| Radiated Emissions               | 26.4             | 56.0                  | 100.20         | Fire Huo    |
| Band Edge Measurement            | 26.4             | 56.0                  | 100.20         | Fire Huo    |

## 4.2 TEST CHANNELS

| Mode                             | Tx/Rx Frequency      | Test RF Channel Lists |            |            |
|----------------------------------|----------------------|-----------------------|------------|------------|
|                                  |                      | Lowest(L)             | Middle(M)  | Highest(H) |
| GFSK<br>(DH1, DH3, DH5)          | 2402 MHz to 2480 MHz | Channel 0             | Channel 39 | Channel 78 |
|                                  |                      | 2402 MHz              | 2441 MHz   | 2480 MHz   |
| $\pi$ /4DQPSK<br>(DH1, DH3, DH5) | 2402 MHz to 2480 MHz | Channel 0             | Channel 39 | Channel 78 |
|                                  |                      | 2402 MHz              | 2441 MHz   | 2480 MHz   |
| 8DPSK<br>(DH1, DH3, DH5)         | 2402 MHz to 2480 MHz | Channel 0             | Channel 39 | Channel 78 |
|                                  |                      | 2402 MHz              | 2441 MHz   | 2480 MHz   |

## 4.3 EUT TEST STATUS

| Type of Modulation            | Tx Function | Description                                                                                                                                                      |
|-------------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GFSK/ $\pi$ /4DQPSK/<br>8DPSK | 1Tx         | 1. Keep the EUT in continuously transmitting with Modulation test single<br>2. Keep the EUT in continuously transmitting with Modulation test Hopping Frequency. |

| Power Setting    |
|------------------|
| Power Setting: 4 |

| Test Software                                    |
|--------------------------------------------------|
| Test software name: Engineering mode ***83781*** |

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.0

## 4.4 PRE-SCAN

### 4.4.1 Pre-scan under all packets at middle channel

| Conducted Average Power (dBm) for packets |       |       |       |               |       |       |       |       |       |
|-------------------------------------------|-------|-------|-------|---------------|-------|-------|-------|-------|-------|
| Type of Modulation                        | GFSK  |       |       | $\pi/4$ DQPSK |       |       | 8DPSK |       |       |
| Packets                                   | 1-DH1 | 1-DH3 | 1-DH5 | 2-DH1         | 2-DH3 | 2-DH5 | 3-DH1 | 3-DH3 | 3-DH5 |
| Power (dBm)                               | -0.66 | 2.58  | 3.38  | -1.15         | 1.94  | 2.62  | -1.01 | 1.93  | 2.66  |

### 4.4.2 Worst-case data packets

| Type of Modulation | Worst-case data rates |
|--------------------|-----------------------|
| GFSK               | 1-DH5                 |
| $\pi/4$ DQPSK      | 2-DH5                 |
| 8DPSK              | 3-DH5                 |



### 4.4.3 Tested channel detail


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data packets and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

| Type of Modulation                               | GFSK                                    |                                     |                                     | $\pi/4$ DQPSK                       |                                     |                                     | 8DPSK                               |                                     |                                     |
|--------------------------------------------------|-----------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Data Packets                                     | 1-DH<br>1                               | 1-DH<br>3                           | 1-DH<br>5                           | 2-DH<br>1                           | 2-DH<br>3                           | 2-DH<br>5                           | 3-DH<br>1                           | 3-DH<br>3                           | 3-DH<br>5                           |
| Available Channel                                | 0 to 78                                 |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
| Test Item                                        | Test channel and choose of data packets |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
| AC Power Line Conducted Emission                 | Frequency Hopping Channel 0 to 78       |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                  | Link                                    |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
| Conducted Peak Output Power                      | Channel 0 & 39 & 78                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| 20 dB Bandwidth                                  | Channel 0 & 39 & 78                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Carrier Frequencies Separation                   | Frequency Hopping Channel 0 to 78       |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Number of Hopping Channel                        | Frequency Hopping Channel 0 to 78       |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Dwell Time                                       | Channel 39                              |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                  | <input checked="" type="checkbox"/>     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Conducted Out of Band Emission                   | Channel 0 & 39 & 78                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |
| Radiated Emissions                               | Channel 0 & 39 & 78                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| Band Edge Measurements (Radiated)                | Channel 0 & 78                          |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
|                                                  | <input type="checkbox"/>                | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| Remark:                                          |                                         |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
| 1. The mark "☑" means is chosen for testing;     |                                         |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |
| 2. The mark "☐" means is not chosen for testing. |                                         |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |


## 4.5 TEST SETUP

### 4.5.1 For Radiated Emissions test setup

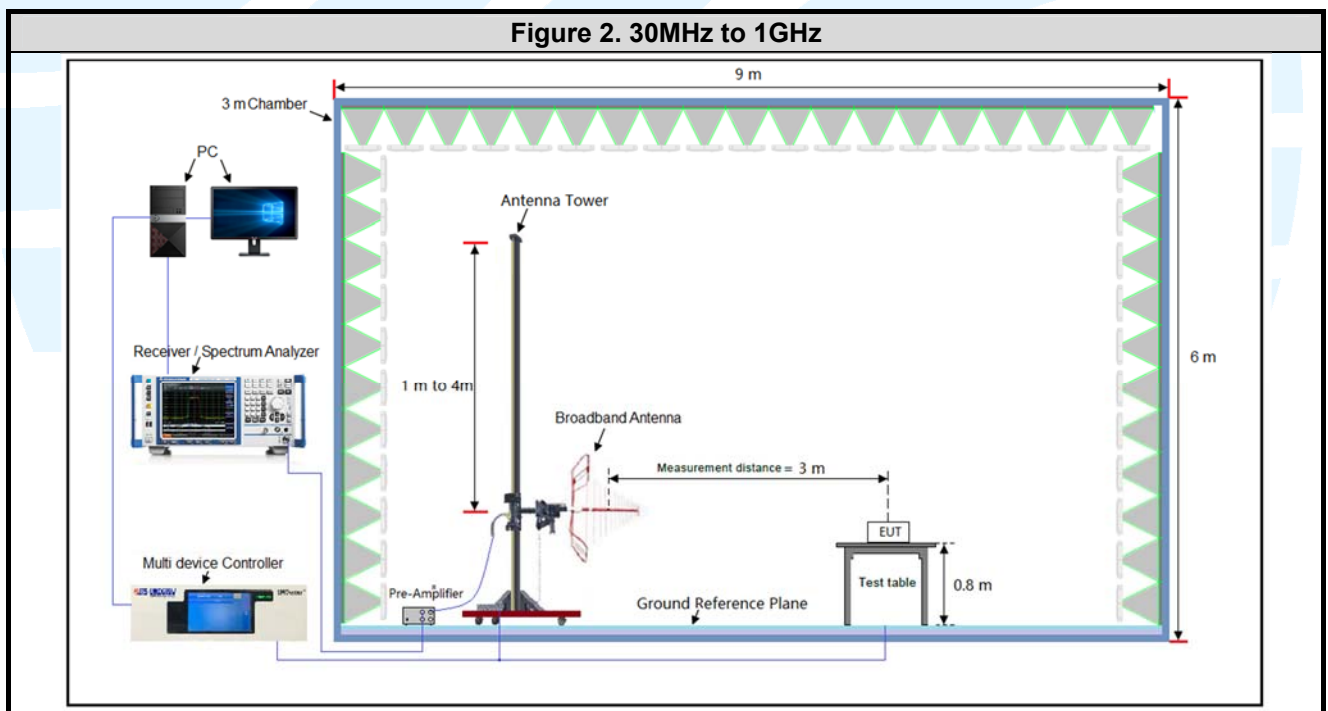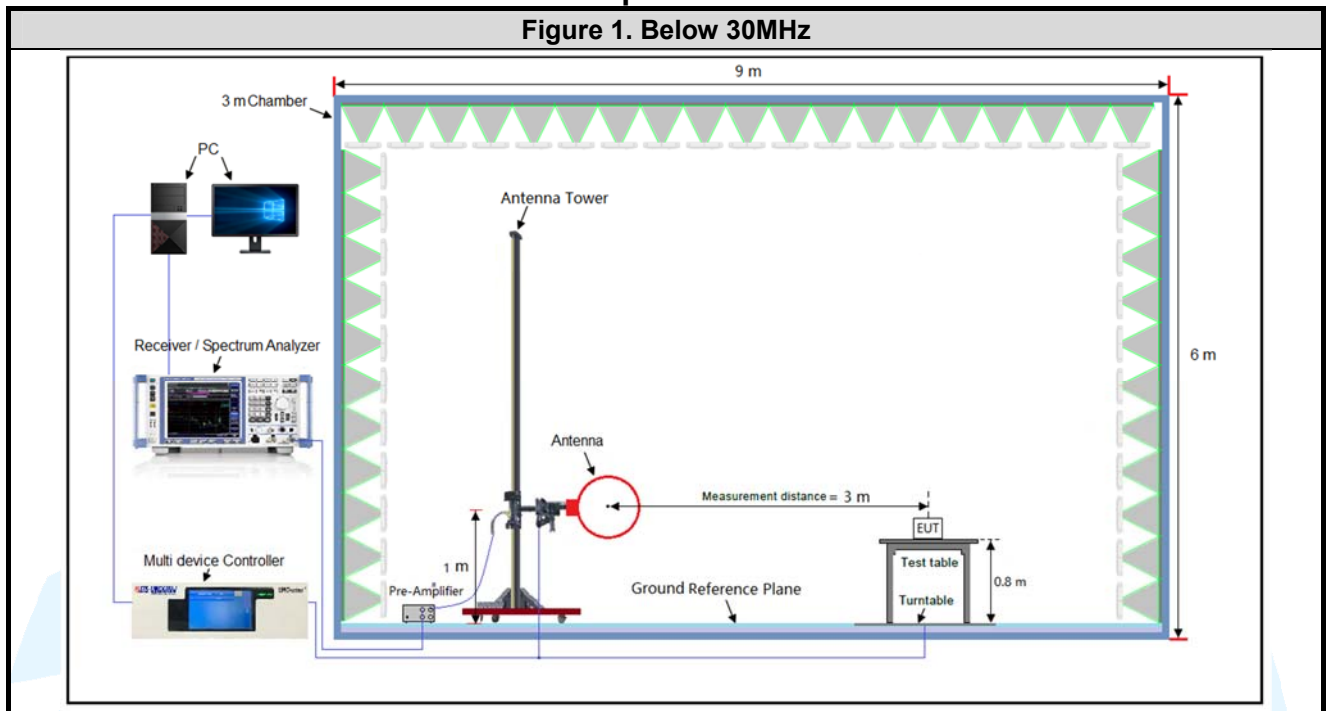


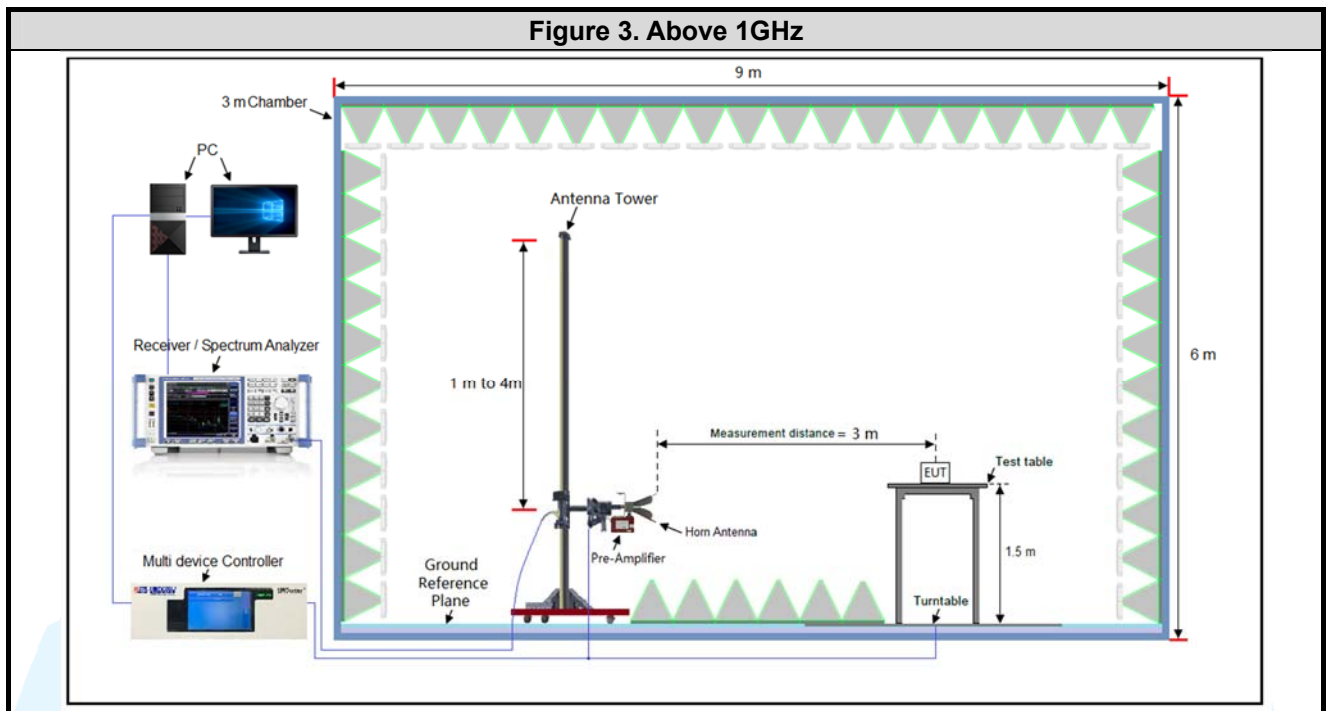

#### 4.5.2 For Conducted Emissions test setup

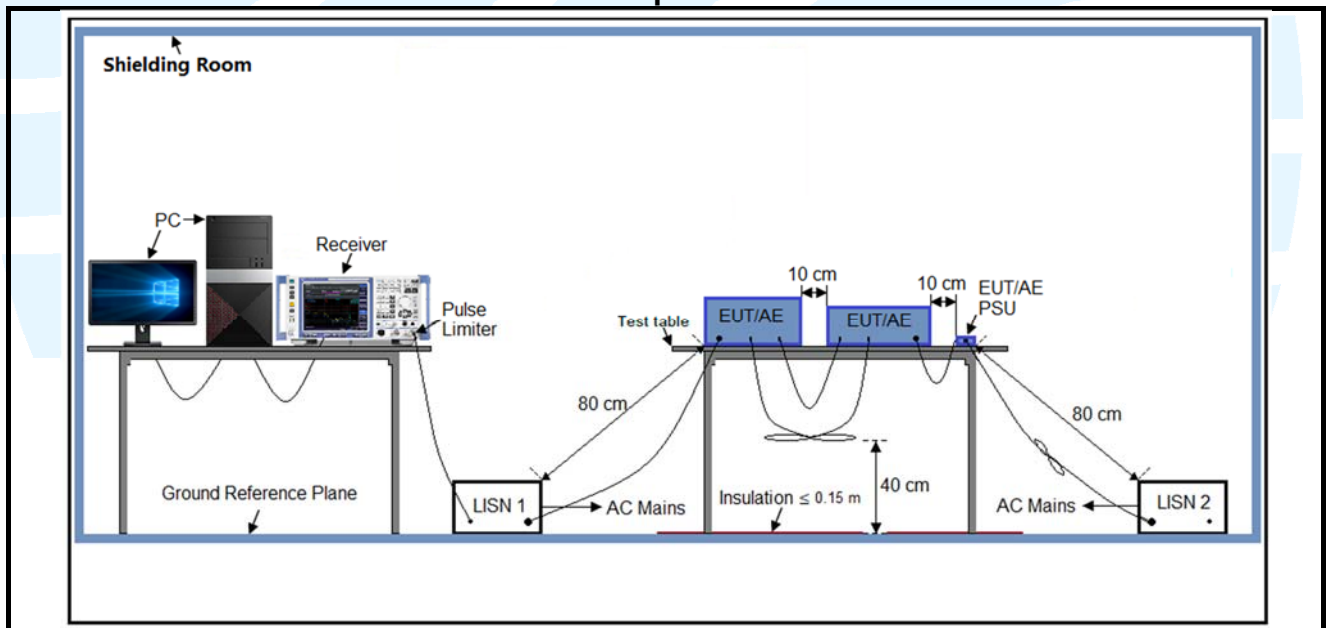

#### 4.5.3 For Conducted RF test setup

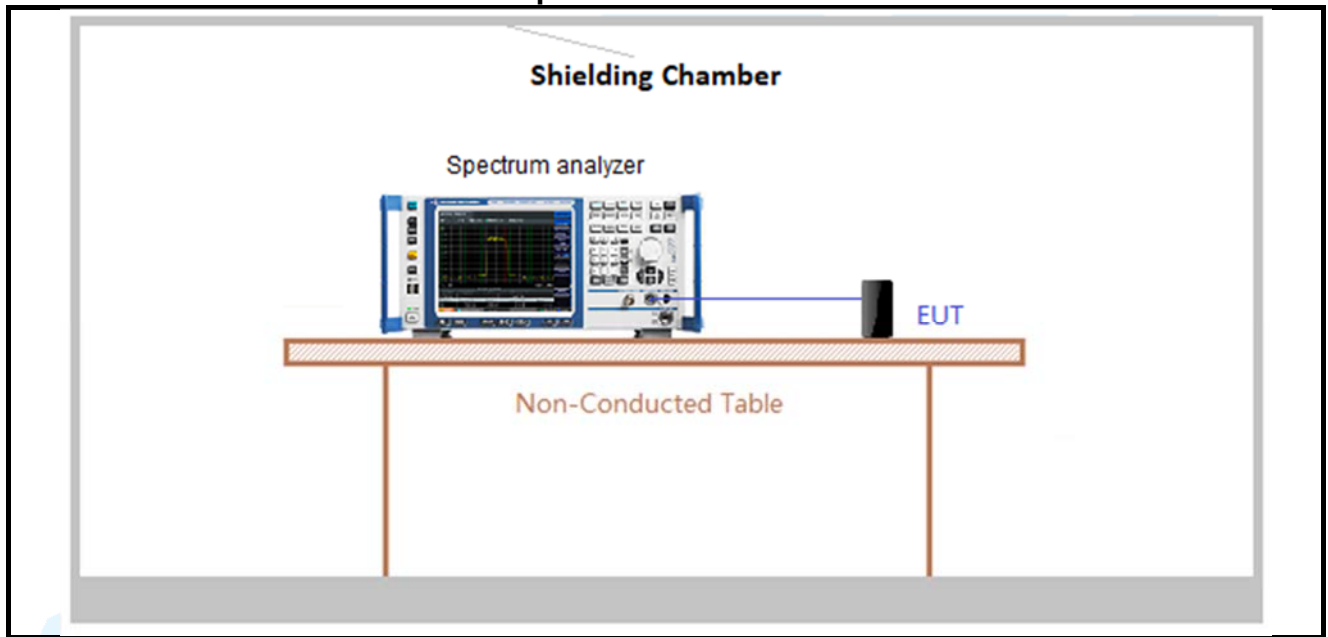

### 4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.7V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

| Frequency  | Mode | Antenna Port | Worst-case axis positioning |
|------------|------|--------------|-----------------------------|
| Above 1GHz | 1TX  | Chain 0      | Y axis                      |

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

## 4.7 DUTY CYCLE

**Test Procedure:** ANSI C63.10-2013 Clause 11.6.


### Test Results

| Type of Modulation | Packets | On Time (msec) | Period (msec) | Duty Cycle (linear) | Duty Cycle (%) | Duty Cycle Factor (dB) | 1/ T Minimum VBW (kHz) | Average Factor (dB) |
|--------------------|---------|----------------|---------------|---------------------|----------------|------------------------|------------------------|---------------------|
| GFSK               | 1-DH5   | 2.940          | 3.750         | 0.78                | 78.40          | 1.06                   | 0.34                   | -2.11               |

### Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor =  $10 * \log(1/ \text{Duty cycle})$ ;
- 3) Average factor =  $20 \log_{10} \text{Duty Cycle}$ .

The test plots as follows

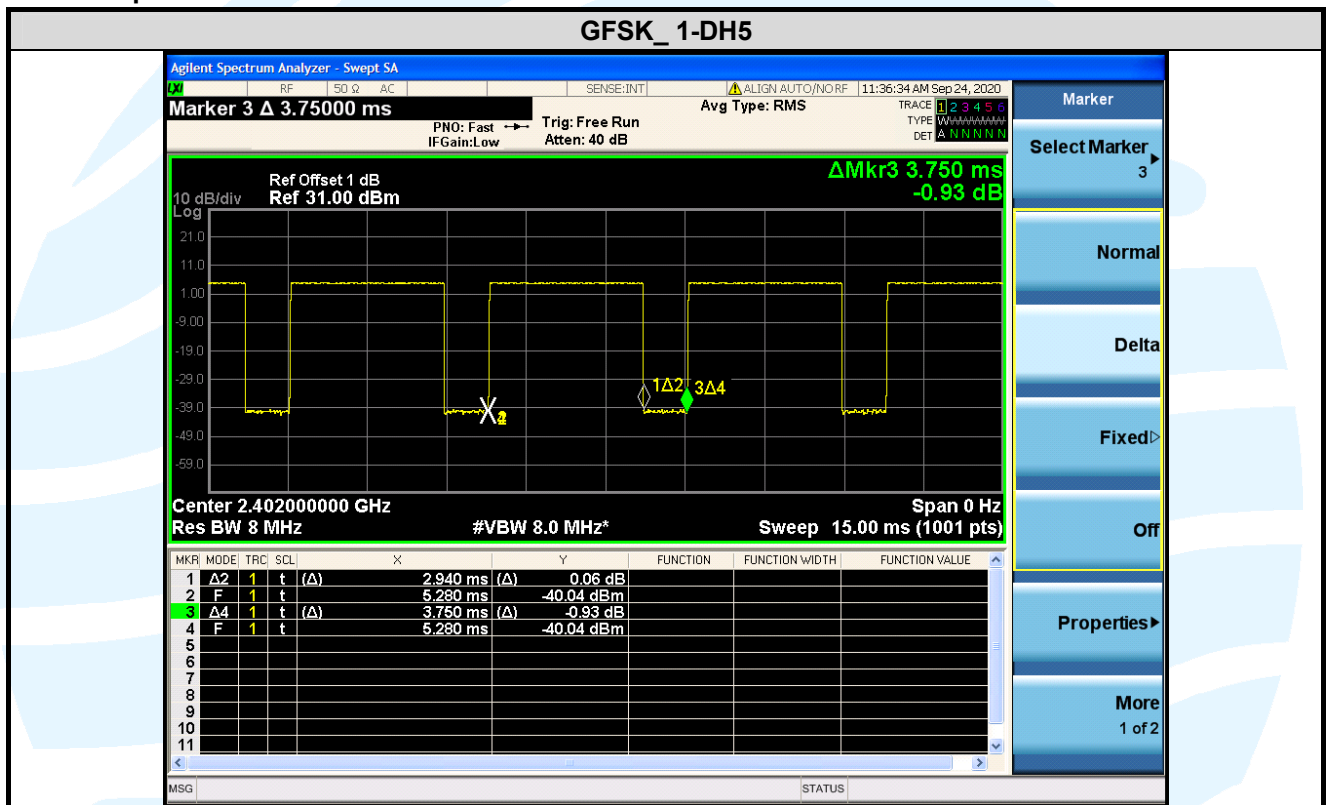

## 5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

### 5.1 REFERENCE DOCUMENTS FOR TESTING

| No. | Identity                                   | Document Title                                                                                                                                                                            |
|-----|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | FCC 47 CFR Part 2                          | Frequency allocations and radio treaty matters; general rules and regulations                                                                                                             |
| 2   | FCC 47 CFR Part 15                         | Radio Frequency Devices                                                                                                                                                                   |
| 3   | ANSI C63.10-2013                           | American National Standard for Testing Unlicensed Wireless Devices                                                                                                                        |
| 4   | KDB 558074 D01 15.247 Meas Guidance v05r02 | Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules |

### 5.2 ANTENNA REQUIREMENT

| Standard Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>15.203 requirement:</b><br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(b) (4) requirement:</b><br/>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p><b>EUT Antenna:</b><br/>Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 0.63 dBi.</p> |

### 5.3 CONDUCTED PEAK OUTPUT POWER

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(1)

**Test Method:** ANSI C63.10-2013 Section 7.8.5

**Limit:** For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

- a) Use the following spectrum analyzer settings:
  - 1) Span: Approximately 5 x 20 dB bandwidth, centered on a hopping channel.
  - 2) RBW > 20 dB bandwidth of the emission being measured.
  - 3) VBW ≥ RBW.
  - 4) Sweep: Auto.
  - 5) Detector function: Peak.
  - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

**Test Setup:** Refer to section 4.5.3 for details.


**Instruments Used:** Refer to section 3 for details

**Test Results:** Pass

| Type of Modulation | Peak Output Power (dBm) |            |              | Peak Output Power (mW) |            |             |
|--------------------|-------------------------|------------|--------------|------------------------|------------|-------------|
|                    | Channel 0               | Channel 39 | Channel 78   | Channel 0              | Channel 39 | Channel 78  |
| GFSK               | 5.736                   | 5.790      | 6.357        | 3.75                   | 3.79       | 4.32        |
| $\pi/4$ DQPSK      | 7.614                   | 7.584      | 8.046        | 5.77                   | 5.73       | 6.38        |
| 8DPSK              | 7.962                   | 7.883      | <b>8.314</b> | 6.25                   | 6.14       | <b>6.78</b> |

Note: The antenna gain of 0.63 dBi less than 6dBi maximum permission antenna gain value based on 125 mW peak output power limit.

The test plots as follows:

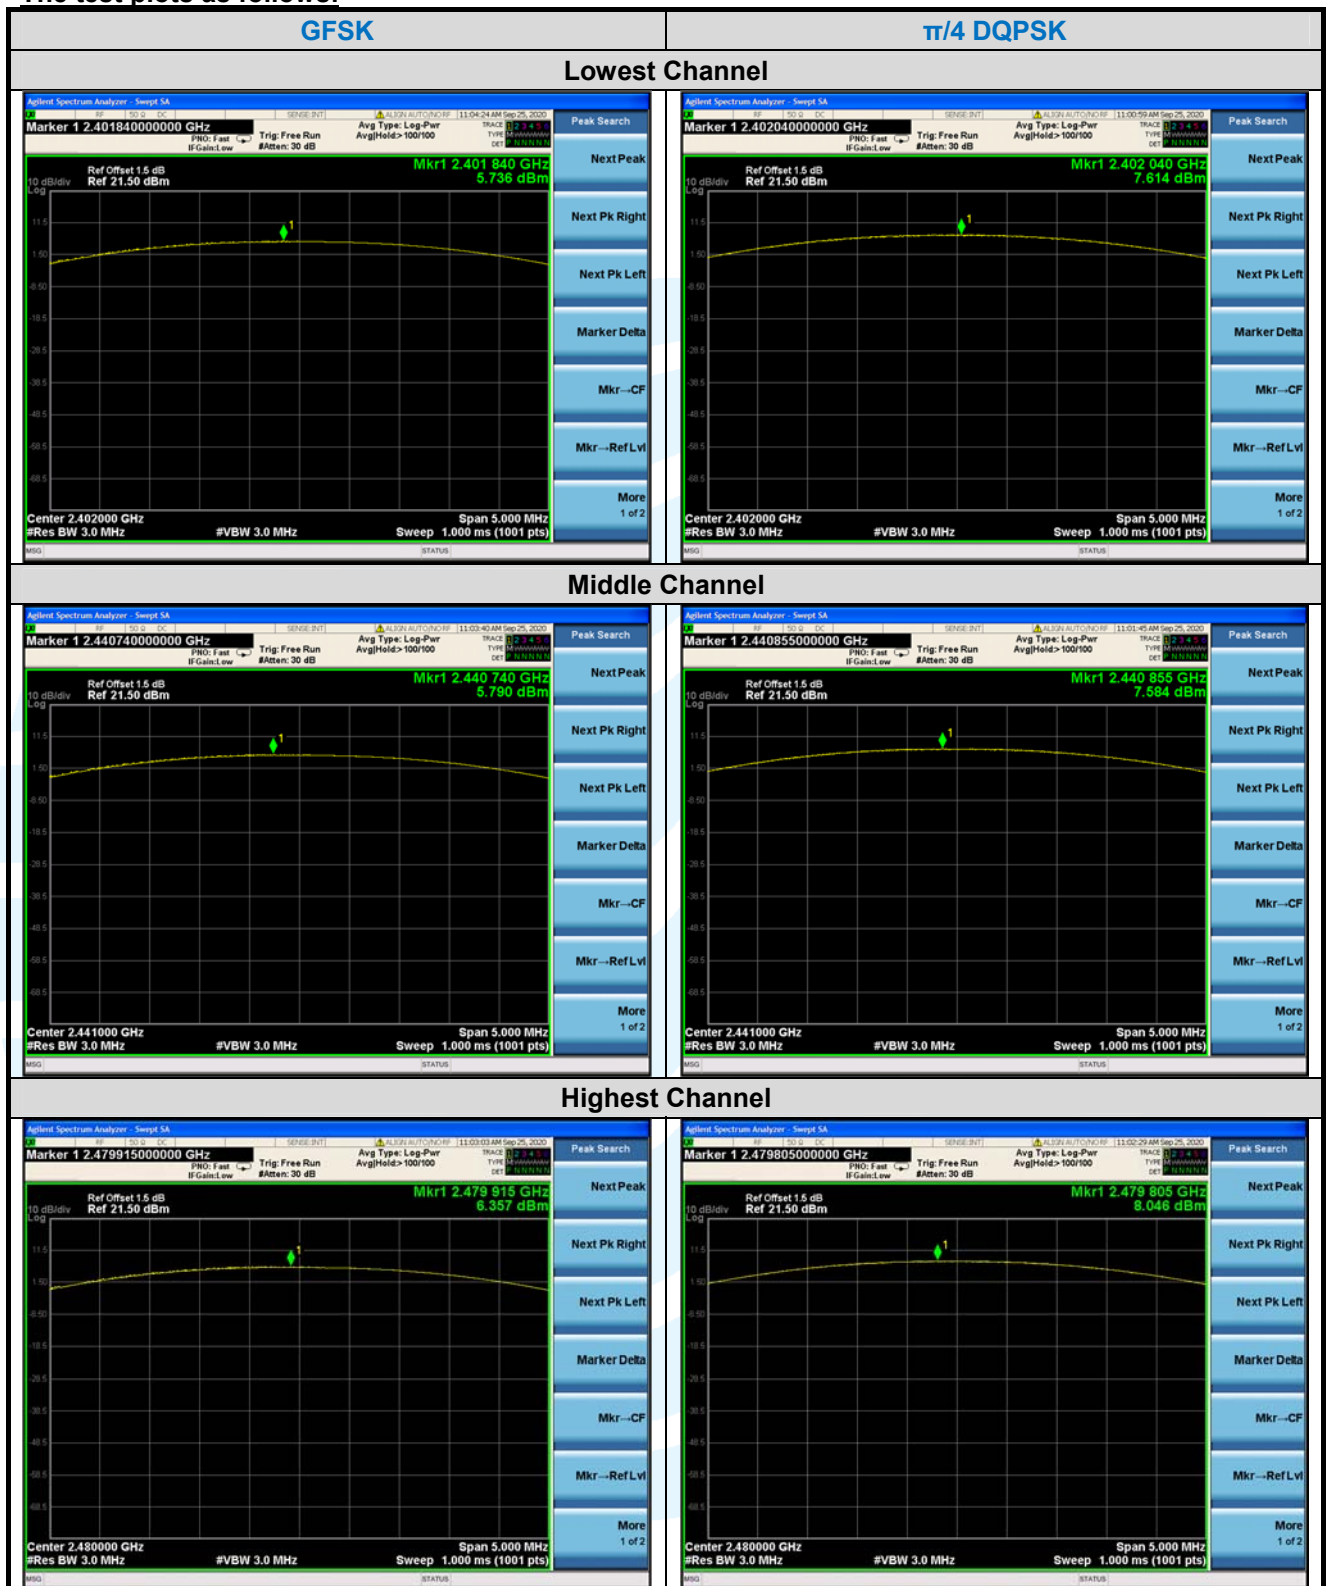

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.0

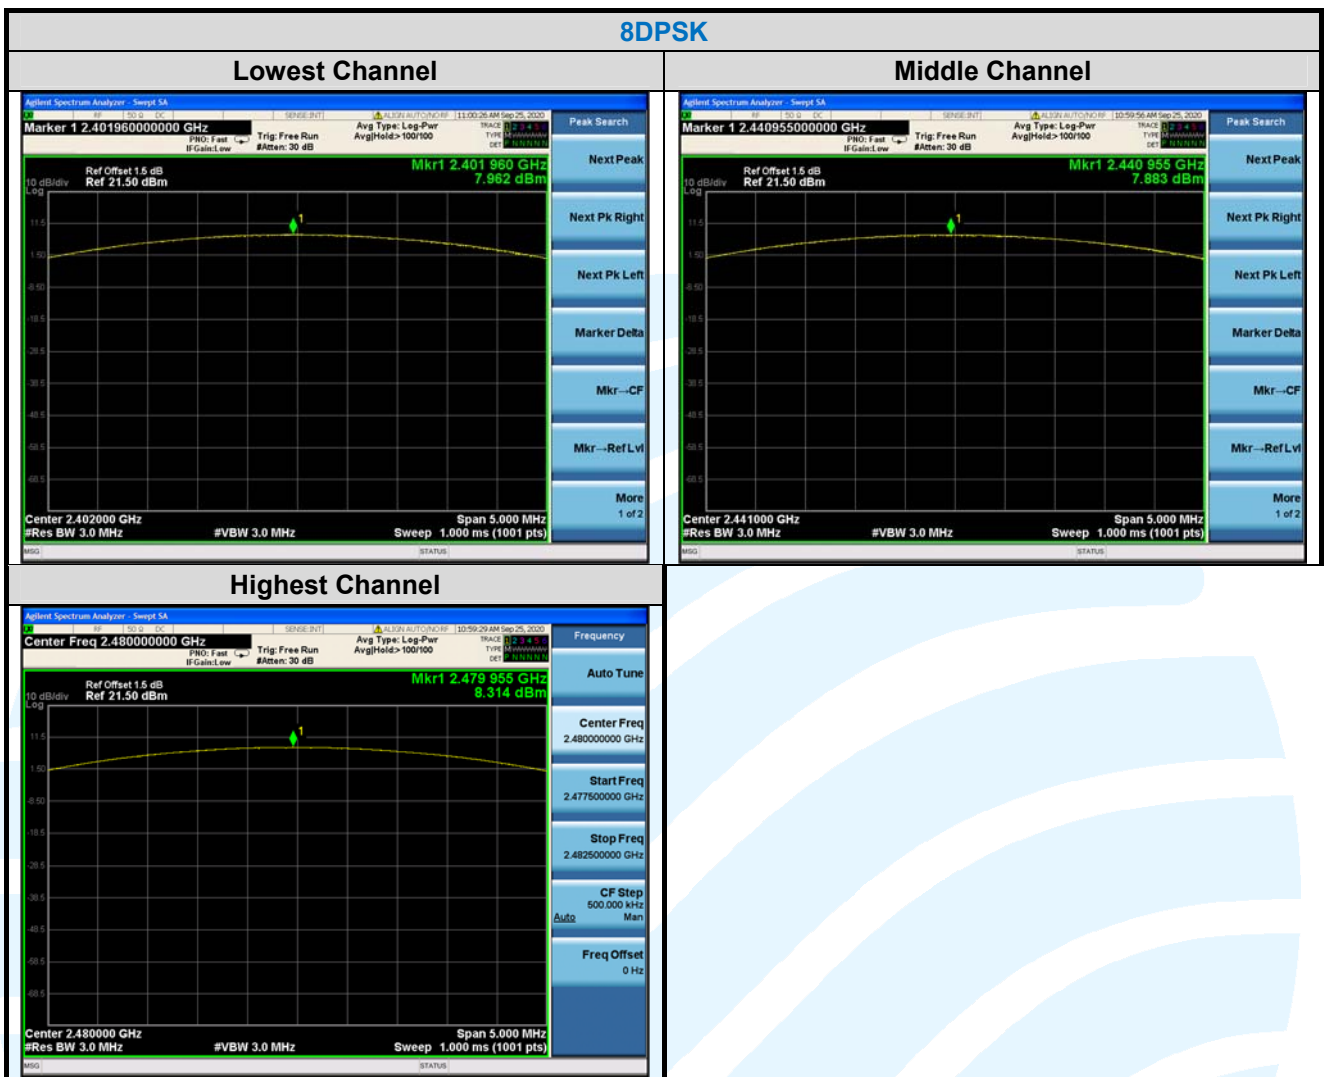

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)
<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.0

## 5.420 DB BANDWIDTH

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)

**Test Method:** ANSI C63.10-2013 Section 6.9.2

**Limit:** None; for reporting purposes only.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.  
Use the following spectrum analyzer settings:

- a) Span = approximately 2 to 5 times the OBW, centered on a hopping channel.
- b) RBW = 1% to 5% of the OBW.
- c) VBW  $\geq 3 \times$  RBW
- d) Sweep = auto;
- e) Detector function = peak
- f) Trace = max hold
- g) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


**Test Setup:** Refer to section 4.5.3 for details.

**Instruments Used:** Refer to section 3 for details

**Test Results:** Pass

| Type of Modulation | 20 dB Bandwidth (MHz) |            |            | 99% Bandwidth (MHz) |            |            |
|--------------------|-----------------------|------------|------------|---------------------|------------|------------|
|                    | Channel 0             | Channel 39 | Channel 78 | Channel 0           | Channel 39 | Channel 78 |
| GFSK               | 0.9455                | 0.9439     | 0.9436     | 0.8410              | 0.8406     | 0.8393     |
| $\pi/4$ DQPSK      | 1.2810                | 1.2810     | 1.2820     | 1.1850              | 1.1825     | 1.1842     |
| 8DPSK              | 1.2900                | 1.2900     | 1.2880     | 1.1839              | 1.1856     | 1.1869     |

The test plots as follows:

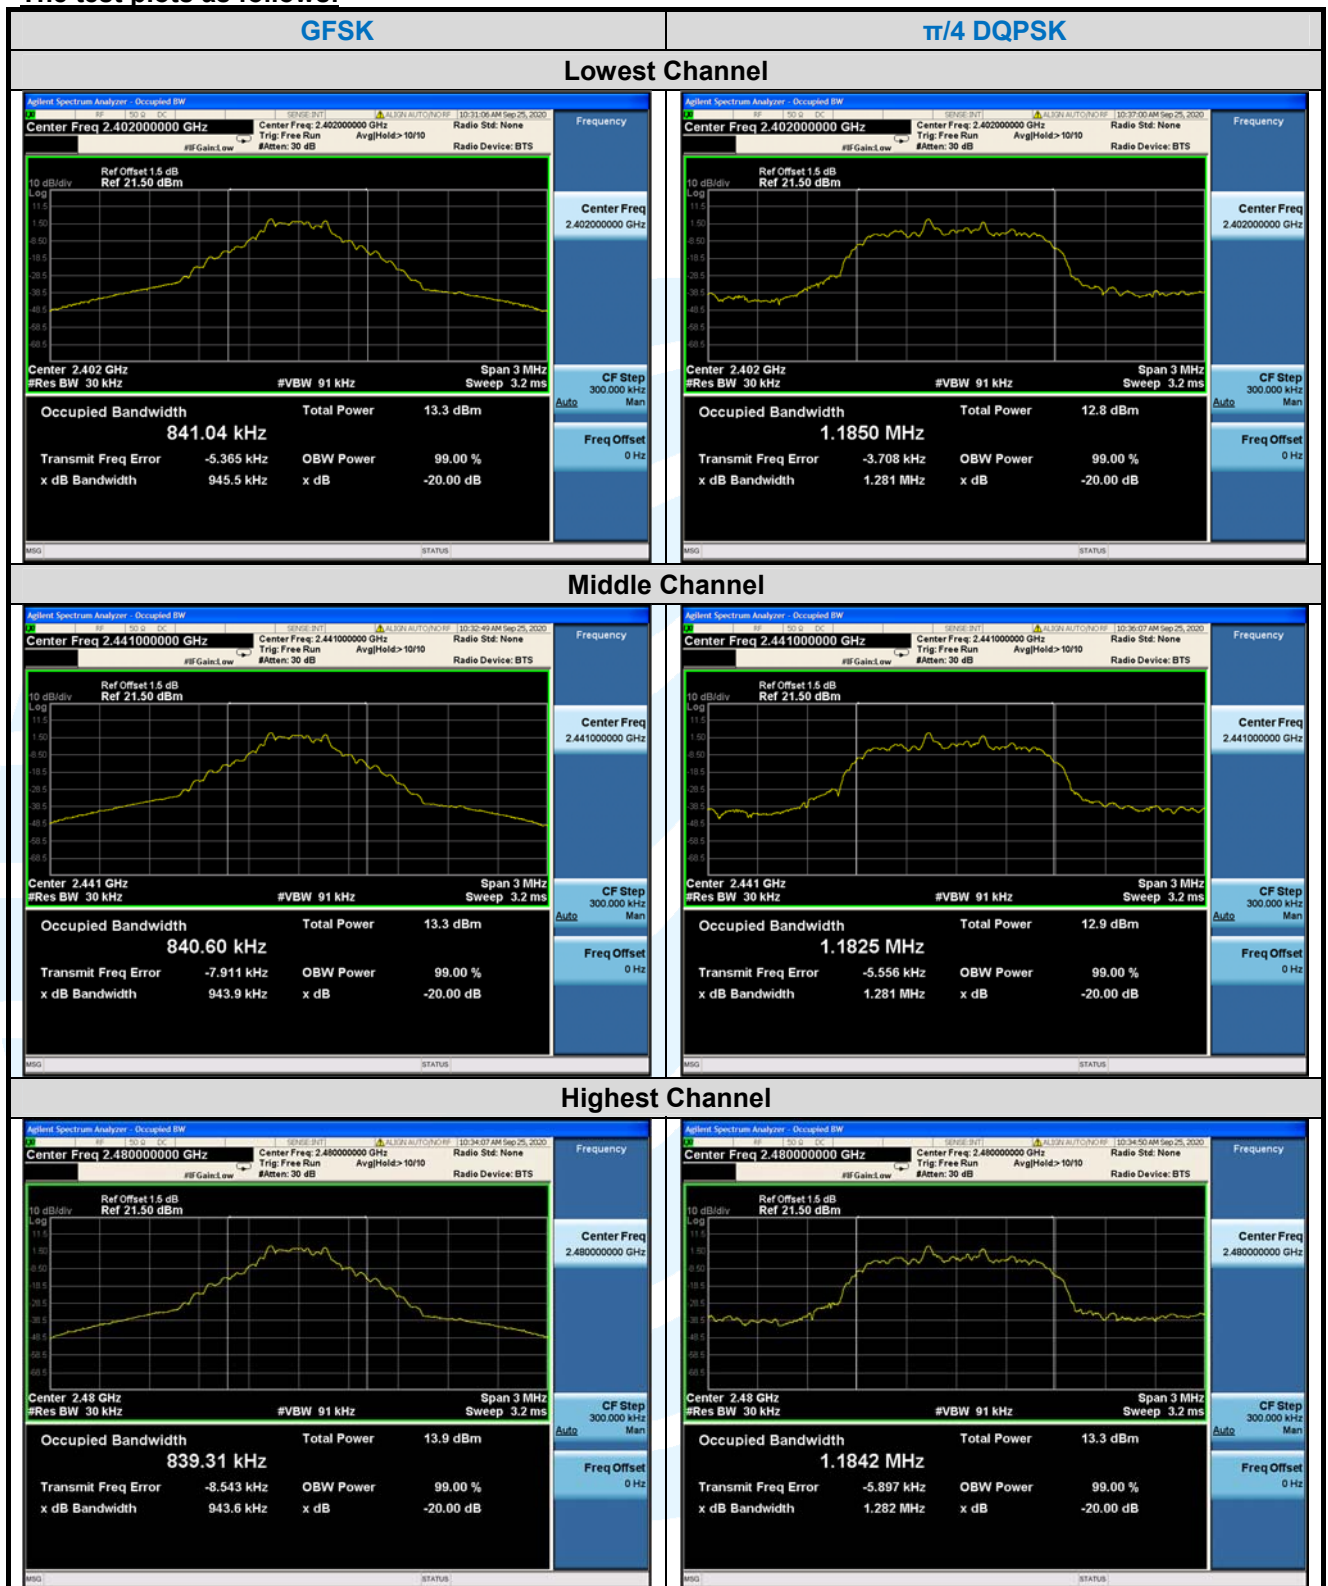

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.0



## 5.5 CARRIER FREQUENCIES SEPARATION

**Test Requirement:** FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(1)

**Test Method:** ANSI C63.10-2013 Section 7.8.2

**Limit:** Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.  
Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure:** Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW)  $\geq$  RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.
- Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

**Test Setup:** Refer to section 4.5.3 for details.


**Instruments Used:** Refer to section 3 for details

**Test Results:** Pass

| Type of Modulation | Adjacent Channel Separation (MHz) | Minimum Limit (MHz) |
|--------------------|-----------------------------------|---------------------|
|                    | Channel 39                        | Channel 39          |
| GFSK               | 1.000                             | 0.629               |
| $\pi/4$ DQPSK      | 1.000                             | 0.854               |
| 8DPSK              | 1.000                             | 0.860               |

Note: The minimum limit is two-third 20 dB bandwidth.

The test plots as follows:

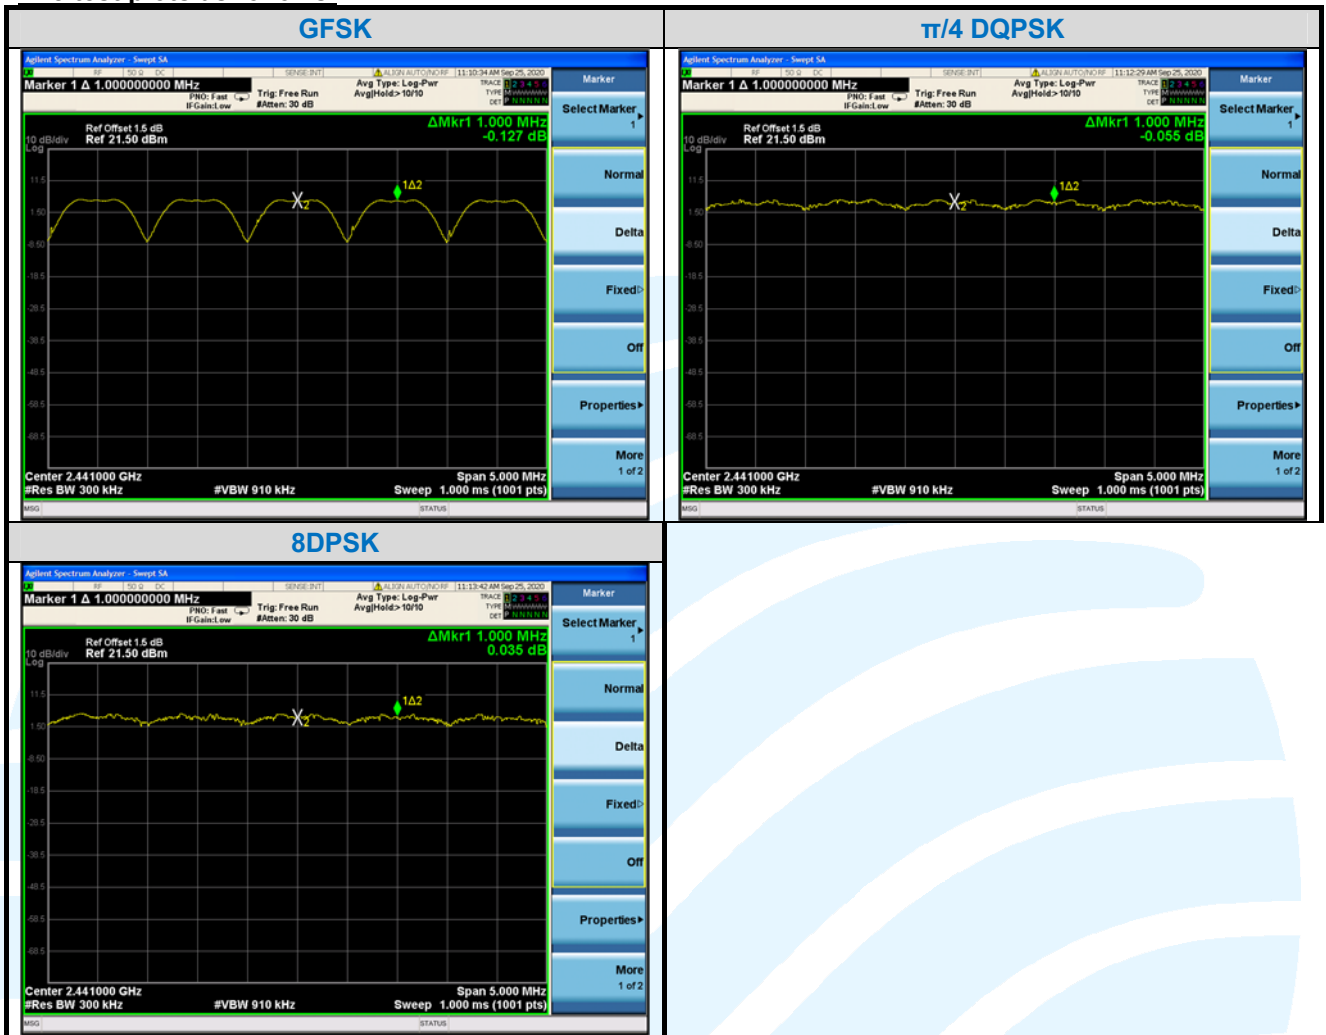

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.0