



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

MAXWEST COMMUNICATION LIMITED

ROOM 1802B FORTRESS TOWER 250 KING'S ROAD, NORTH POINT, Hong Kong

FCC ID:2ASP8UNOM6PLUS

Report Type: Original Report	Product Name: Mobile Phone
Report Number: RDG190425002-00B	
Report Date: 2019-05-31	
Jerry Zhang	
Reviewed By:	EMC Manager <i>Jerry Zhang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT CABLE LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE.....	8
APPLICABLE STANDARD	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	10
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	16
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	22
APPLICABLE STANDARD	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST PROCEDURE	22
TEST DATA	22
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	36
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST EQUIPMENT LIST AND DETAILS.....	39
TEST DATA	39
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	46
APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST EQUIPMENT LIST AND DETAILS.....	46
TEST DATA	46
FCC §15.247(d) - BAND EDGES TESTING	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST EQUIPMENT LIST AND DETAILS.....	48
TEST DATA	49

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		Mobile Phone
EUT Model:		UNO M6 PLUS
Operation Frequency:		2402-2480 MHz
Output Power(Conducted):		7.27 dBm
Modulation Type:		GFSK, $\pi/4$ -DQPSK, 8-DPSK
Rated Input Voltage:		DC 3.7V from battery or DC 5V from adapter
Adapter Information	Input:	AC 100-240V 50/60Hz 0.15A
	Output:	DC 5V 500mA
External Dimension:		117 mm(L)* 48.3 mm(W)* 14.2 mm(H)
Serial Number:		190425002
EUT Received Date:		2019.4.26

Objective

This report is prepared on behalf of MAXWEST COMMUNICATION LIMITED in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 22H, 24E PCE submissions with FCC ID: 2ASP8UNOM6PLUS
FCC Part 15B JBP submissions with FCC ID: 2ASP8UNOM6PLUS

Test Methodology

All measurements detailed in this test report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier : CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

The Engineering Mode configured the maximum power level as default setting.


Equipment Modifications

No modification was made to the EUT.

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
USB Cable	yes	No	0.8	Adapter	EUT
Earphone	No	No	1.0	EUT	Earphone

Block Diagram of Test Setup

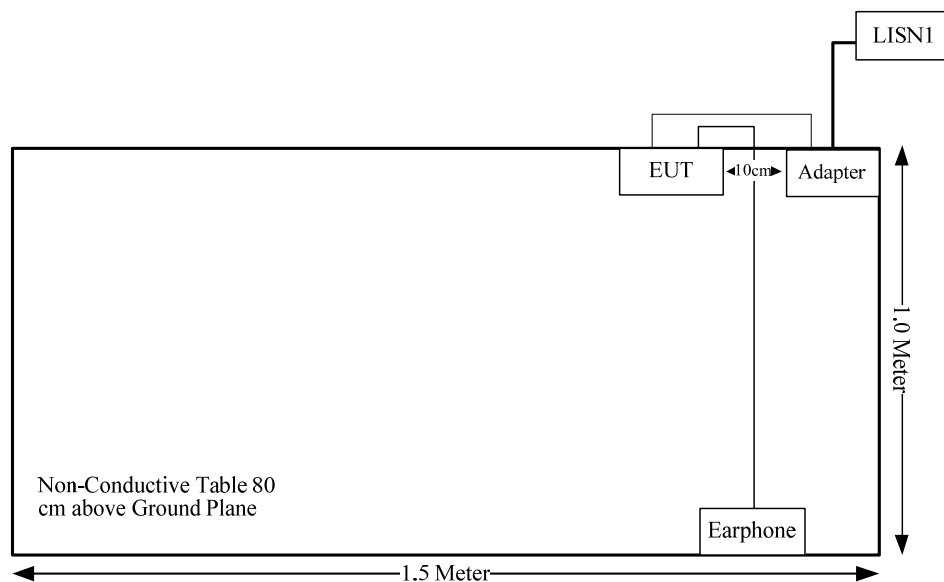

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max conducted power including tune-up tolerance is 8.0 dBm (6.31 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 6.31/5 \cdot (\sqrt{2.480}) = 2.0 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement for BT, and the antenna gain is 4.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

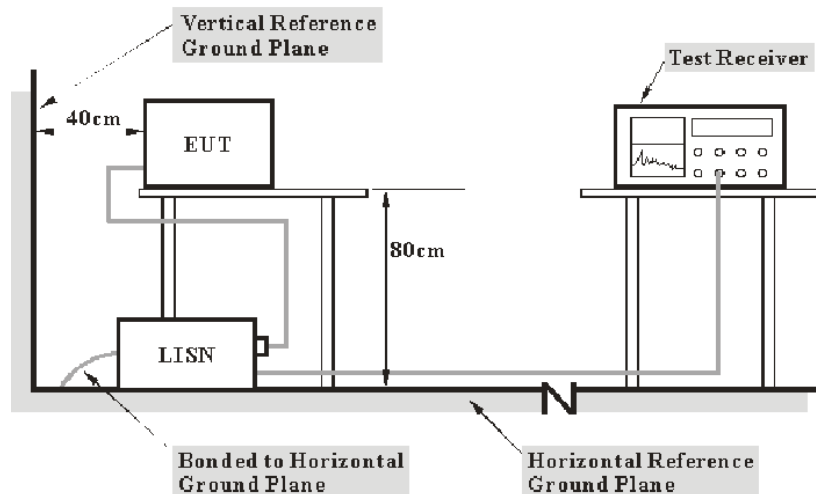

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.9 °C
Relative Humidity:	62 %
ATM Pressure:	100.7 kPa

The testing was performed by Lily Xie on 2019-05-15

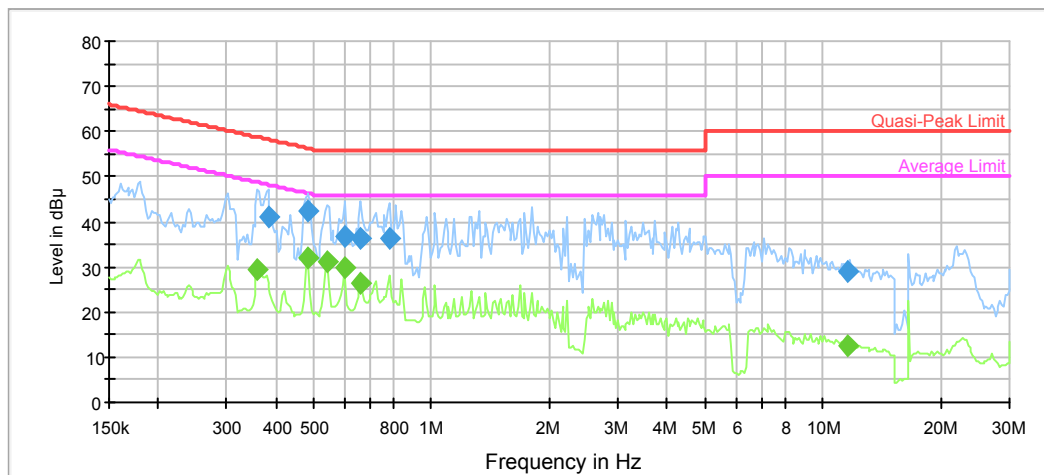Test Mode: Transmitting**AC120V, 60 Hz, Line:**

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.382209	40.9	9.000	L1	10.0	17.3	58.2
0.485304	42.2	9.000	L1	9.9	14.0	56.2
0.604065	36.6	9.000	L1	9.8	19.4	56.0
0.660657	36.3	9.000	L1	9.8	19.7	56.0
0.782419	36.5	9.000	L1	9.8	19.5	56.0
11.601974	28.9	9.000	L1	9.8	31.1	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.360058	29.5	9.000	L1	10.0	19.2	48.7
0.480499	32.1	9.000	L1	9.9	14.2	46.3
0.541438	31.0	9.000	L1	9.9	15.0	46.0
0.598084	30.0	9.000	L1	9.8	16.0	46.0
0.660657	26.3	9.000	L1	9.8	19.7	46.0
11.601974	12.7	9.000	L1	9.8	37.3	50.0

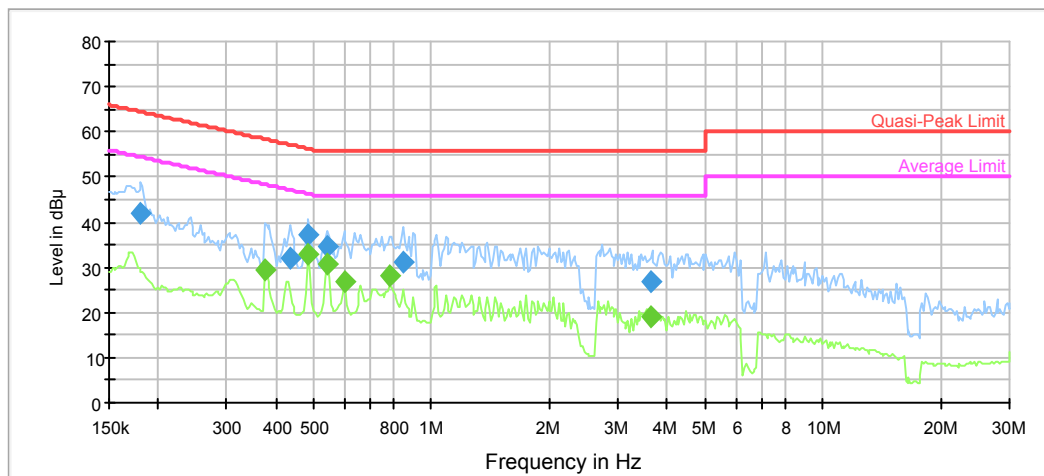AC120V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.181216	41.9	9.000	N	10.8	22.5	64.4
0.434989	32.2	9.000	N	9.9	25.0	57.2
0.485304	37.4	9.000	N	9.9	18.8	56.2
0.541438	34.6	9.000	N	9.8	21.4	56.0
0.847248	31.2	9.000	N	9.8	24.8	56.0
3.621856	26.7	9.000	N	9.8	29.3	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.374678	29.3	9.000	N	10.0	19.1	48.4
0.485304	33.1	9.000	N	9.9	13.1	46.2
0.541438	30.6	9.000	N	9.8	15.4	46.0
0.598084	26.9	9.000	N	9.8	19.1	46.0
0.782419	27.9	9.000	N	9.8	18.1	46.0
3.621856	19.0	9.000	N	9.8	27.0	46.0


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

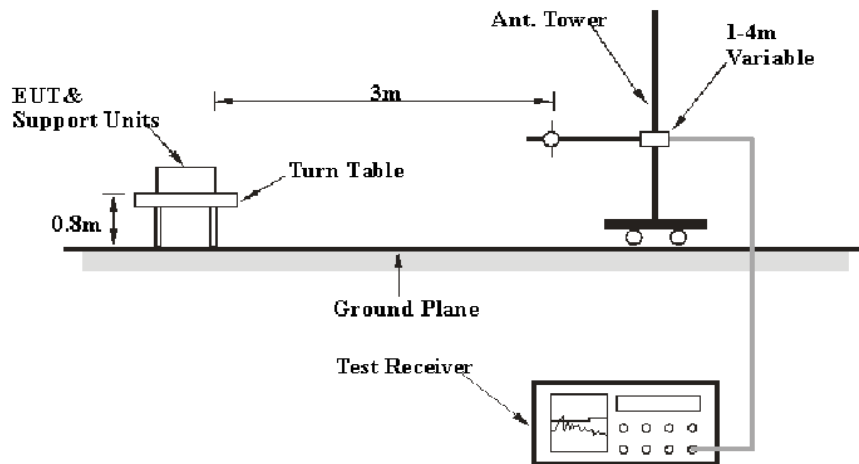

Above 1GHz:

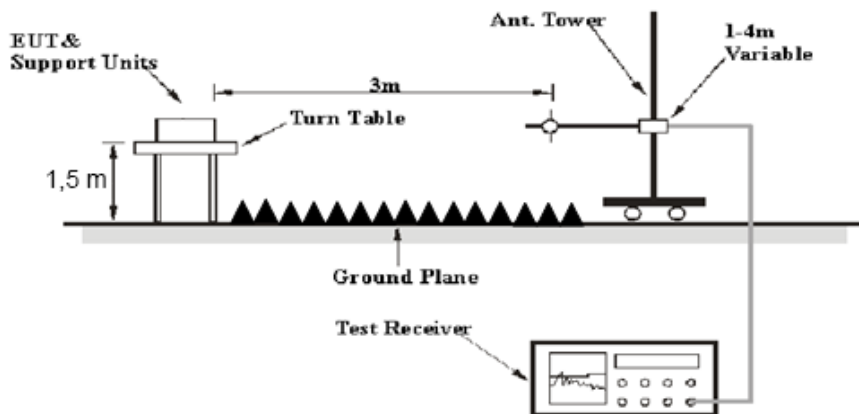

The radiated emission below 1GHz tests were performed in the 10 meters chamber test site, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

According to FCC public notice: DA-00-705, During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations :

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-3	2017-07-21	2019-07-21
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2018-09-24	2019-09-24
Sonoma	Amplifier	310N	185914	2018-10-13	2019-10-13
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-01-04	2020-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	25.4°C
Relative Humidity:	53 %
ATM Pressure:	100.6kPa

* The testing was performed by Tyler Pan&Sunny Cen on 2019-04-29


Test Mode: Transmitting

1) 30MHz-1GHz(8-DPSK middle channel was the worst)

Horizontal:

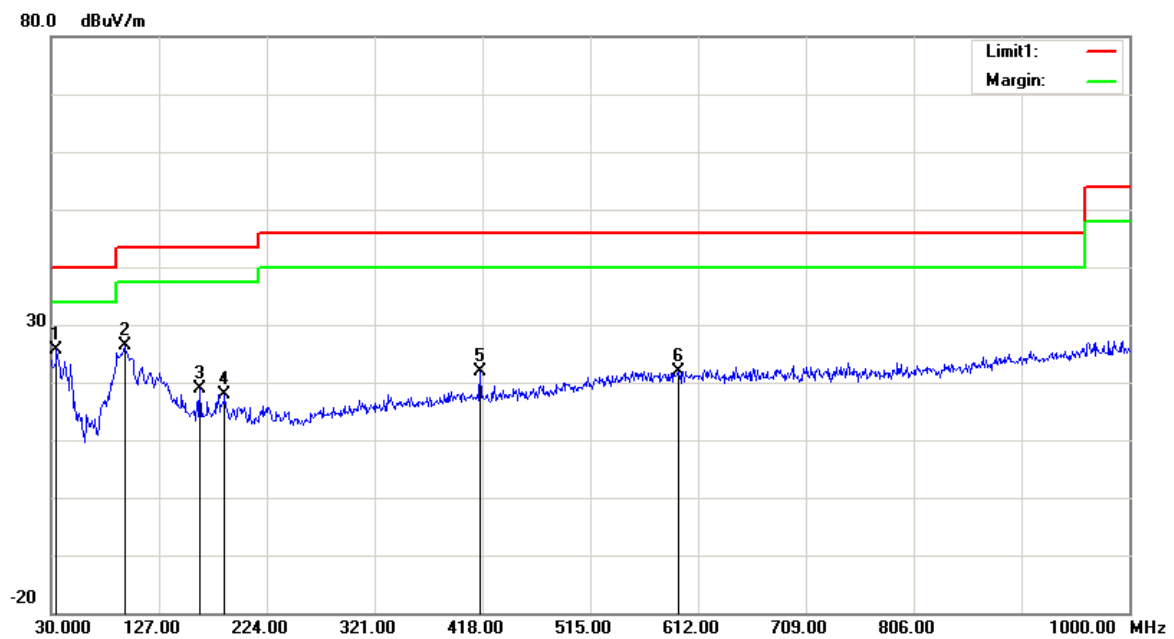

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
34.8500	36.05	peak	-10.33	25.72	40.00	14.28
95.9600	44.51	peak	-18.13	26.38	43.50	17.12
163.8600	31.75	peak	-12.86	18.89	43.50	24.61
186.1700	31.68	peak	-13.76	17.92	43.50	25.58
416.0600	29.81	peak	-7.98	21.83	46.00	24.17
594.5400	25.18	peak	-3.40	21.78	46.00	24.22

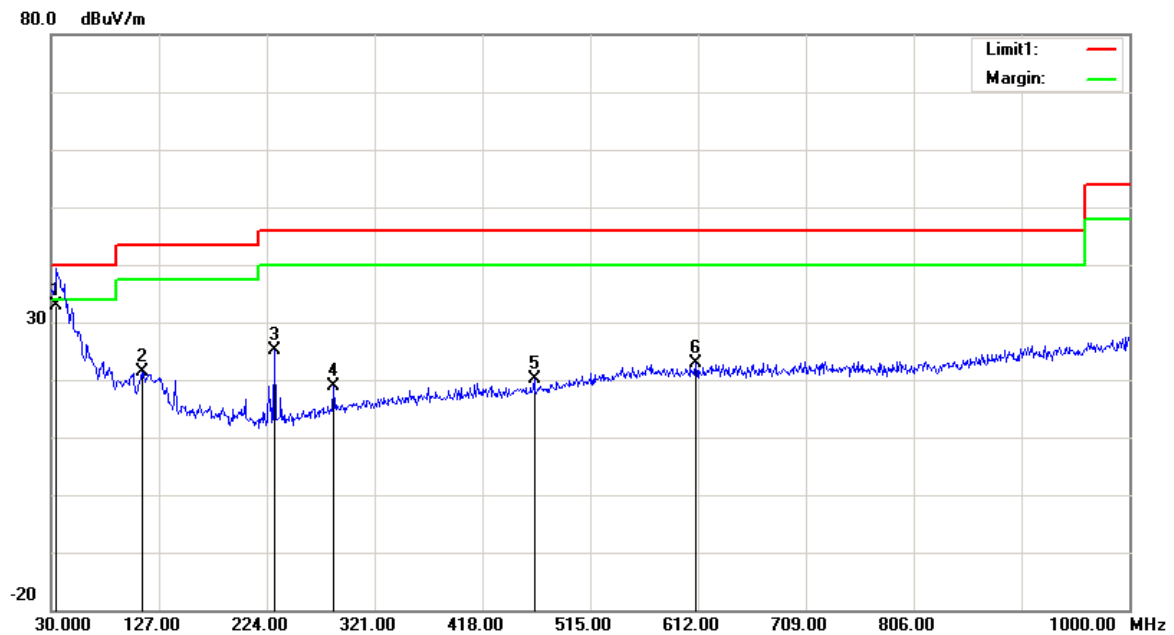Vertical:

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
34.8500	43.33	QP	-10.33	33.00	40.00	7.00
111.4800	37.83	peak	-16.44	21.39	43.50	22.11
230.7900	39.01	peak	-13.90	25.11	46.00	20.89
284.1400	30.41	peak	-11.64	18.77	46.00	27.23
464.5600	27.24	peak	-7.03	20.21	46.00	25.79
610.0600	26.02	peak	-3.22	22.80	46.00	23.20




2) 1GHz-25GHz:*EDR Mode (8-DPSK) was the worst:*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	66.75	PK	H	28.10	1.80	0.00	96.65	N/A	N/A
2402.00	54.53	AV	H	28.10	1.80	0.00	84.43	N/A	N/A
2402.00	66.07	PK	V	28.10	1.80	0.00	95.97	N/A	N/A
2402.00	53.80	AV	V	28.10	1.80	0.00	83.70	N/A	N/A
2390.00	25.80	PK	H	28.08	1.80	0.00	55.68	74.00	18.32
2390.00	13.35	AV	H	28.08	1.80	0.00	43.23	54.00	10.77
4804.00	54.78	PK	H	32.91	3.17	37.20	53.66	74.00	20.34
4804.00	41.65	AV	H	32.91	3.17	37.20	40.53	54.00	13.47
7206.00	49.59	PK	H	35.74	4.82	37.23	52.92	74.00	21.08
7206.00	39.24	AV	H	35.74	4.82	37.23	42.57	54.00	11.43
Middle Channel: 2441 MHz									
2441.00	67.76	PK	H	28.18	1.82	0.00	97.76	N/A	N/A
2441.00	55.49	AV	H	28.18	1.82	0.00	85.49	N/A	N/A
2441.00	66.89	PK	V	28.18	1.82	0.00	96.89	N/A	N/A
2441.00	54.77	AV	V	28.18	1.82	0.00	84.77	N/A	N/A
4882.00	55.06	PK	H	33.06	3.27	37.21	54.18	74.00	19.82
4882.00	41.86	AV	H	33.06	3.27	37.21	40.98	54.00	13.02
7323.00	49.66	PK	H	36.04	4.62	37.38	52.94	74.00	21.06
7323.00	39.70	AV	H	36.04	4.62	37.38	42.98	54.00	11.02
High Channel: 2480 MHz									
2480.00	66.72	PK	H	28.26	1.84	0.00	96.82	N/A	N/A
2480.00	54.65	AV	H	28.26	1.84	0.00	84.75	N/A	N/A
2480.00	66.11	PK	V	28.26	1.84	0.00	96.21	N/A	N/A
2480.00	53.87	AV	V	28.26	1.84	0.00	83.97	N/A	N/A
2483.50	26.20	PK	H	28.27	1.84	0.00	56.31	74.00	17.69
2483.50	13.98	AV	H	28.27	1.84	0.00	44.09	54.00	9.91
4960.00	54.63	PK	H	33.22	3.23	37.25	53.83	74.00	20.17
4960.00	41.31	AV	H	33.22	3.23	37.25	40.51	54.00	13.49
7440.00	49.21	PK	H	36.34	4.41	37.52	52.44	74.00	21.56
7440.00	39.06	AV	H	36.34	4.41	37.52	42.29	54.00	11.71

Worst plots (8-DPSK middle channel)




Horizontal

Fundamental
Test with Band
Rejection Filter

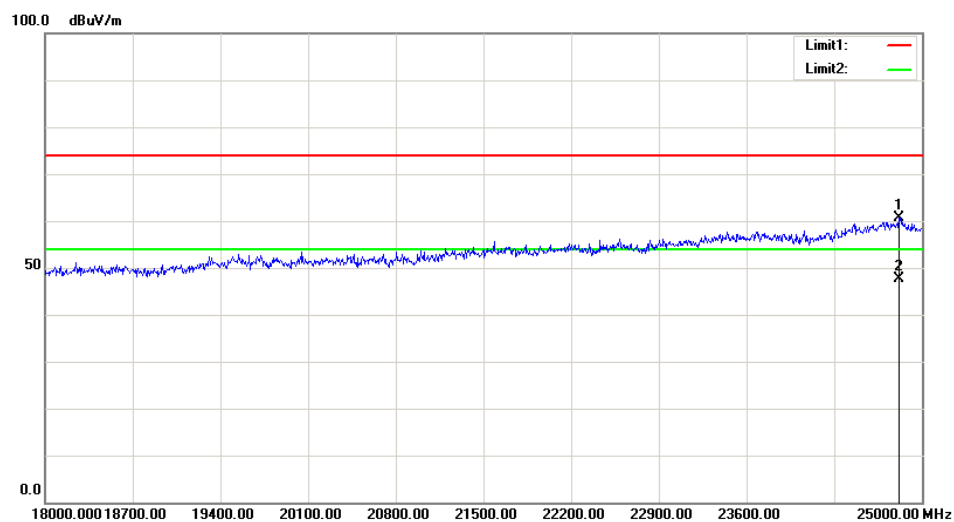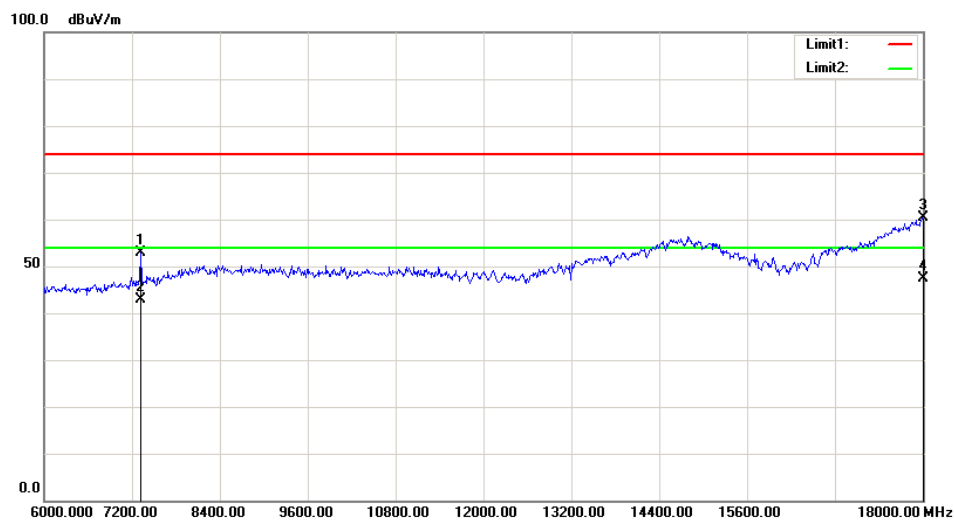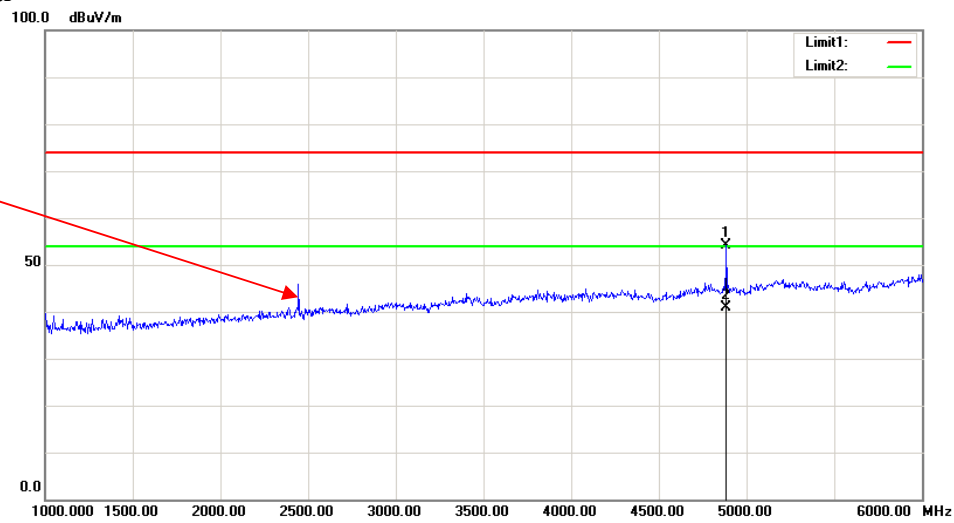

Vertical

Fundamental
Test with Band
Rejection Filter

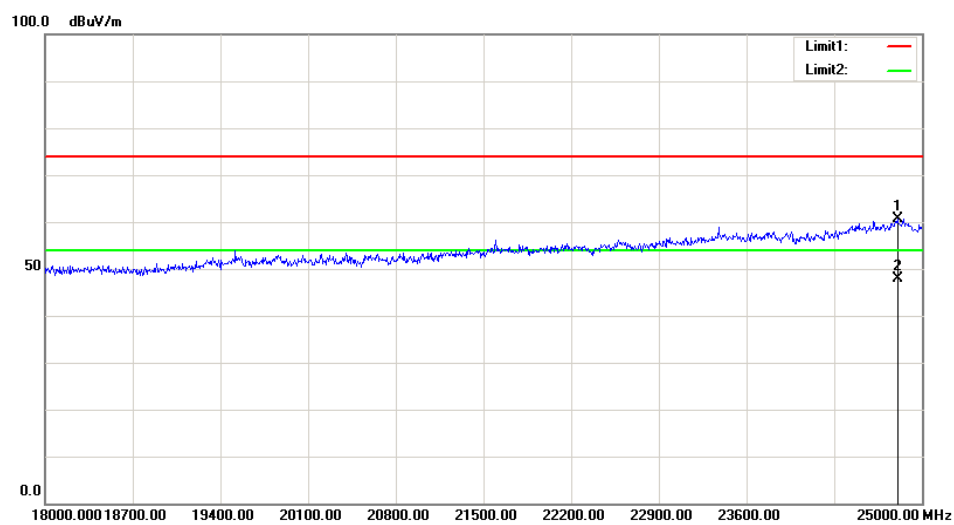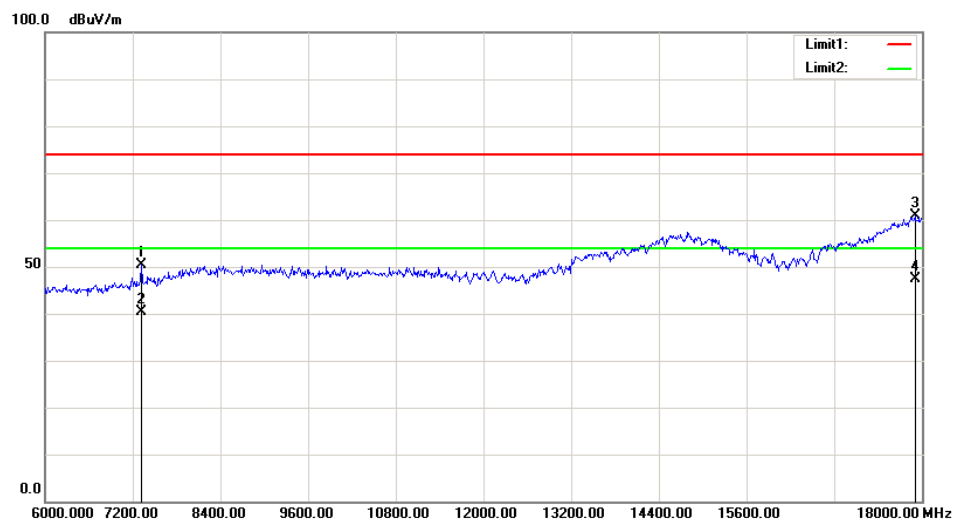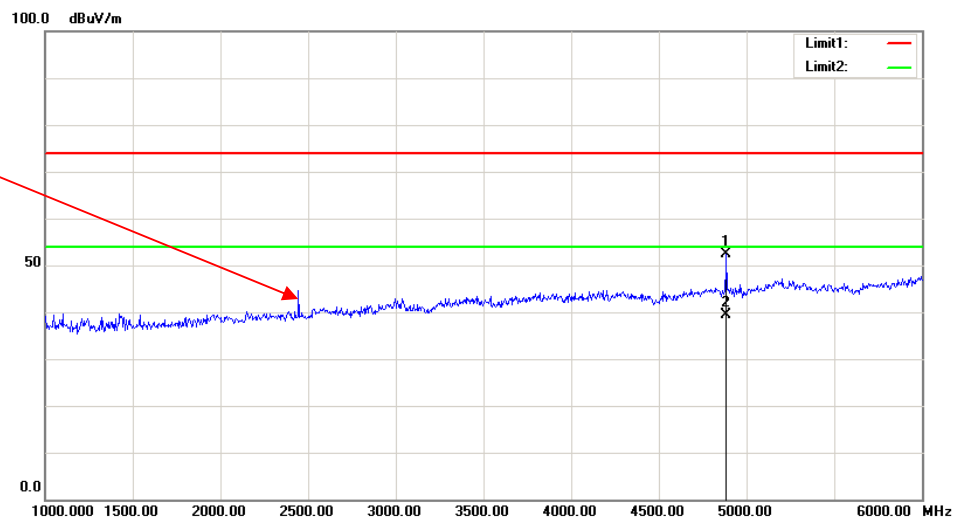

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	25.8 °C
Relative Humidity:	65 %
ATM Pressure:	100.5 kPa

* The testing was performed by Carrie He on 2019-05-05.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
<i>BDR</i> (<i>GFSK</i>)	Low	2402	1.001	0.62
	Middle	2441	0.996	0.62
	High	2480	1.001	0.62
EDR ($\pi/4$ -DQPSK)	Low	2402	1.004	0.87
	Middle	2441	0.999	0.87
	High	2480	1.001	0.87
<i>EDR</i> (<i>8-DPSK</i>)	Low	2402	1.001	0.85
	Middle	2441	0.999	0.85
	High	2480	1.001	0.85

Note: Limit= (2/3) × 20dB bandwidth


Please refer to following plots:

GFSK_Low

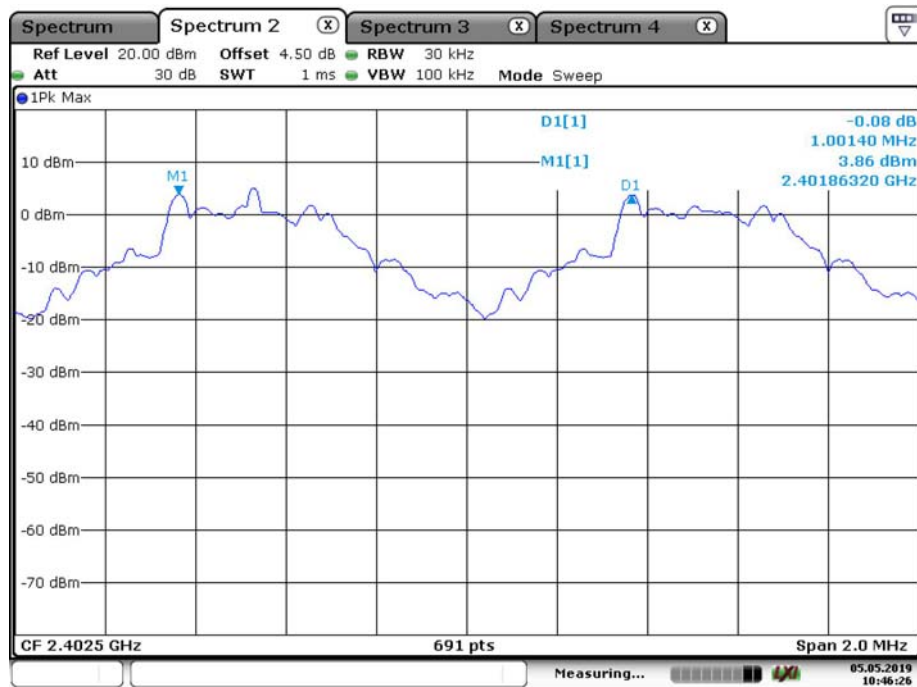


Date: 5.MAY.2019 10:46:26

GFSK_Middle

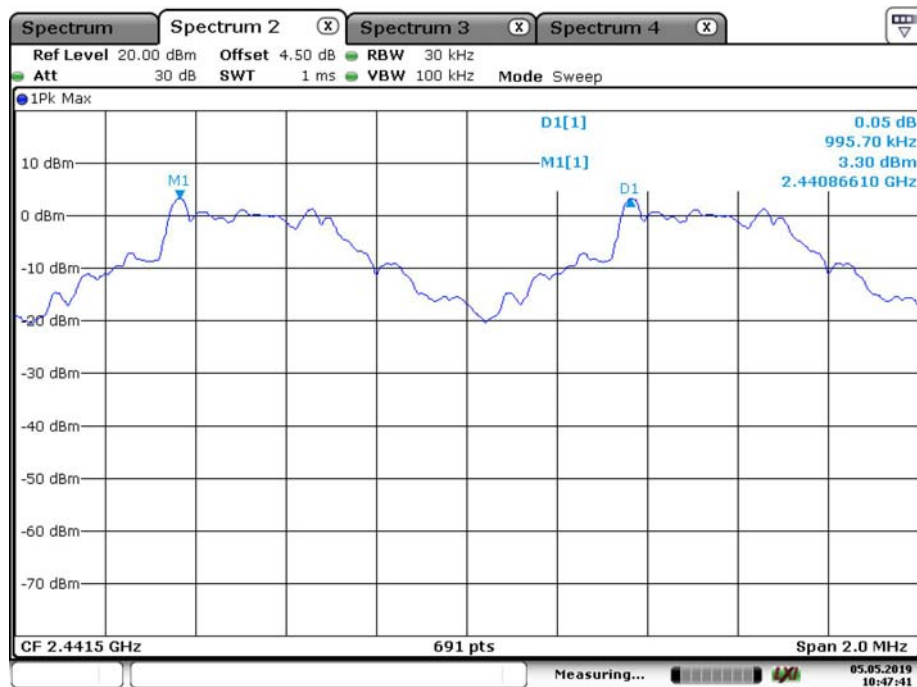


Date: 5.MAY.2019 10:47:42

GFSK_High

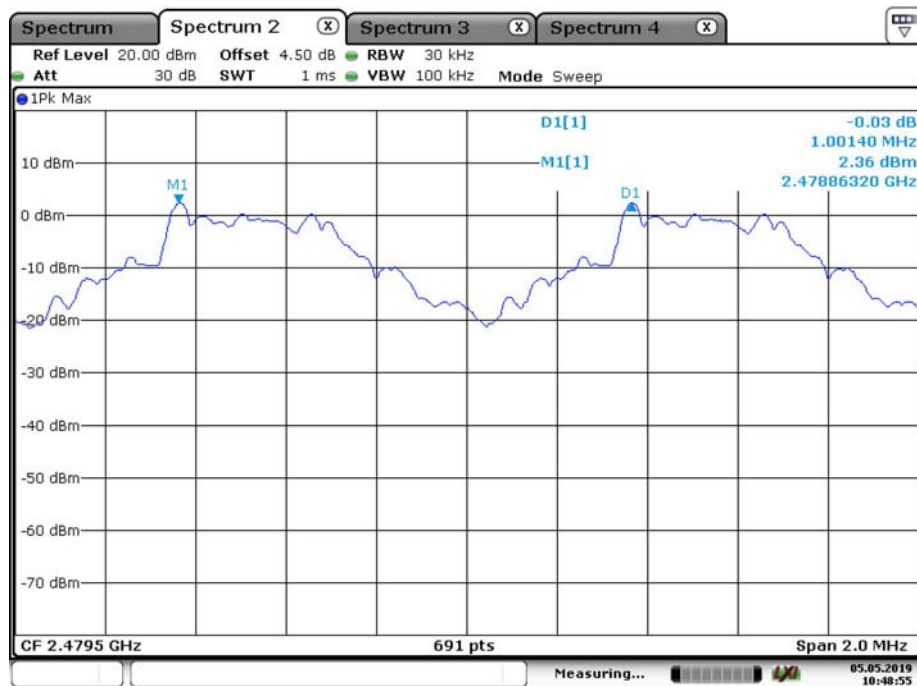


Date: 5.MAY.2019 10:48:55

$\pi/4$ -DQPSK_Low

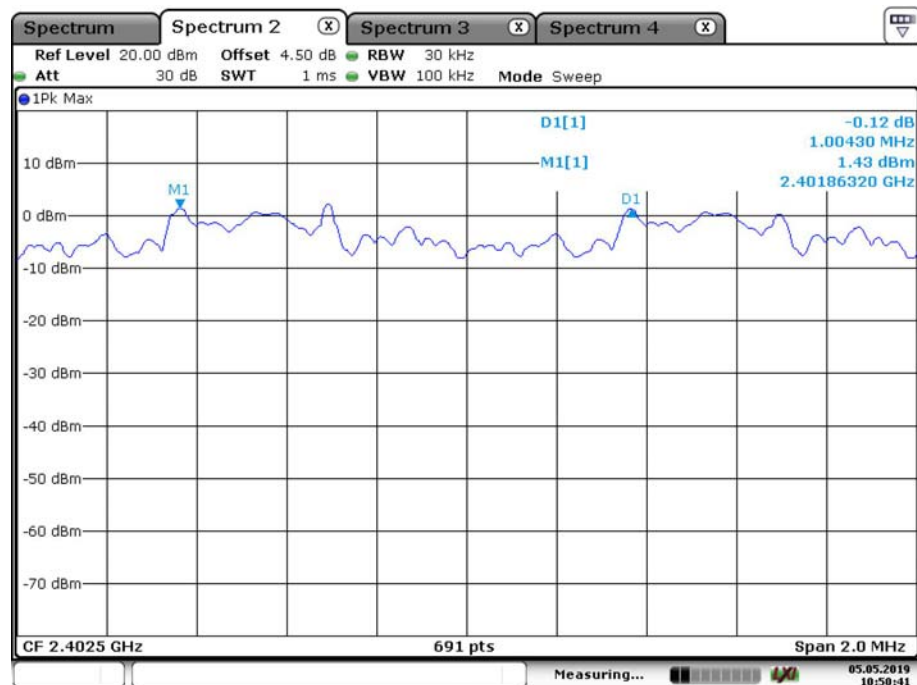


Date: 5.MAY.2019 10:50:41

$\pi/4$ -DQPSK_Middle

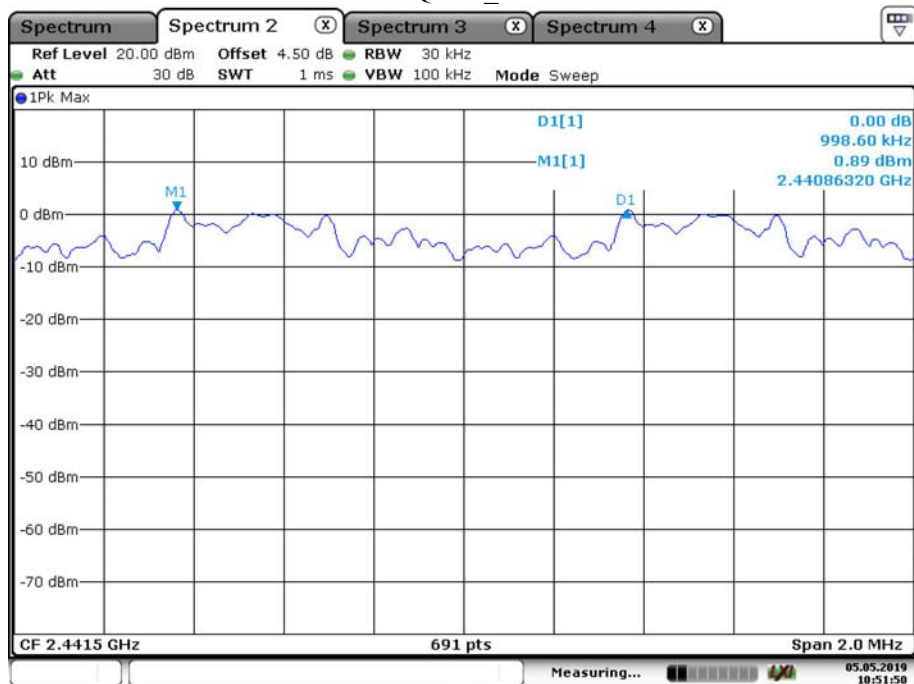


Date: 5.MAY.2019 10:51:50

$\pi/4$ -DQPSK_High

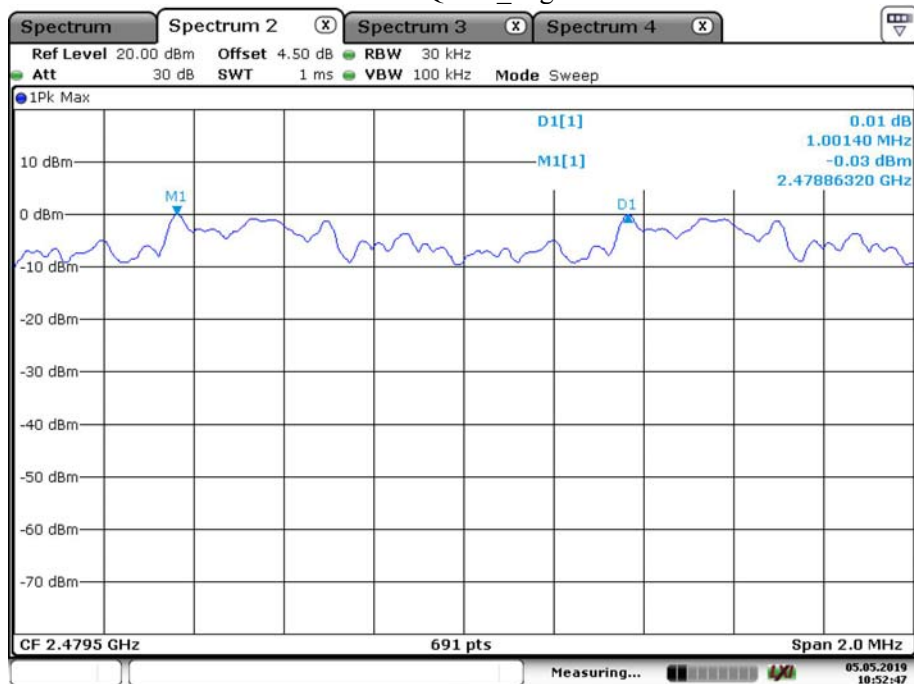


Date: 5.MAY.2019 10:52:47

8-DPSK_Low

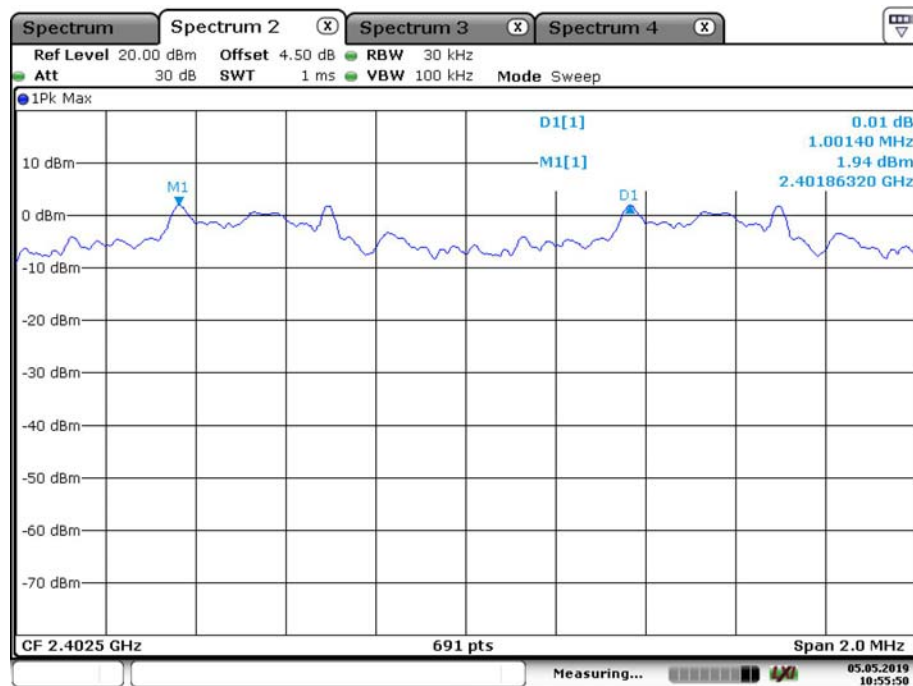


Date: 5.MAY.2019 10:55:50

8-DPSK_Middle

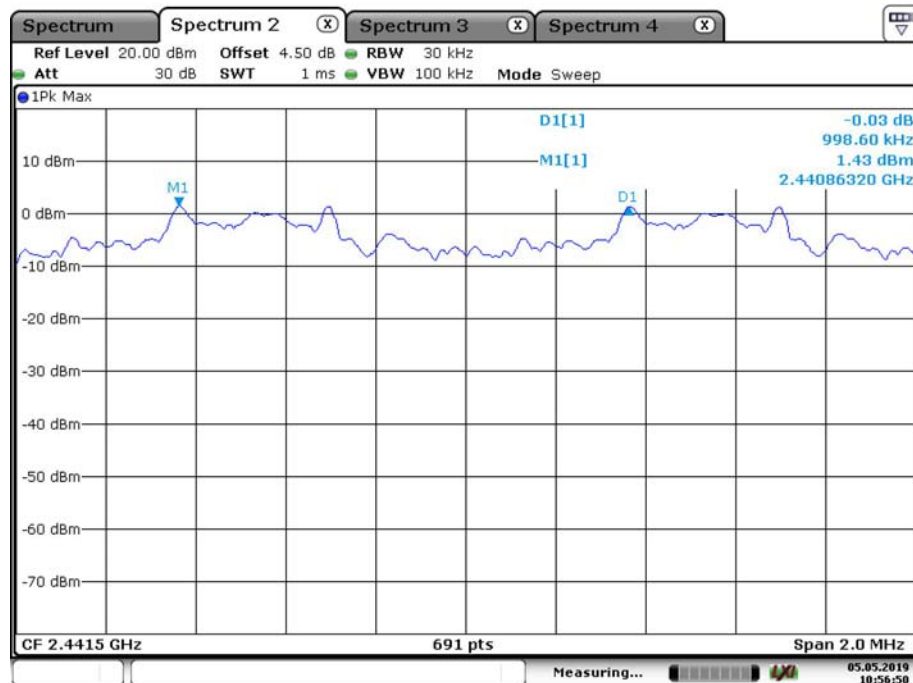

Date: 5.MAY.2019 10:56:50

8-DPSK_High

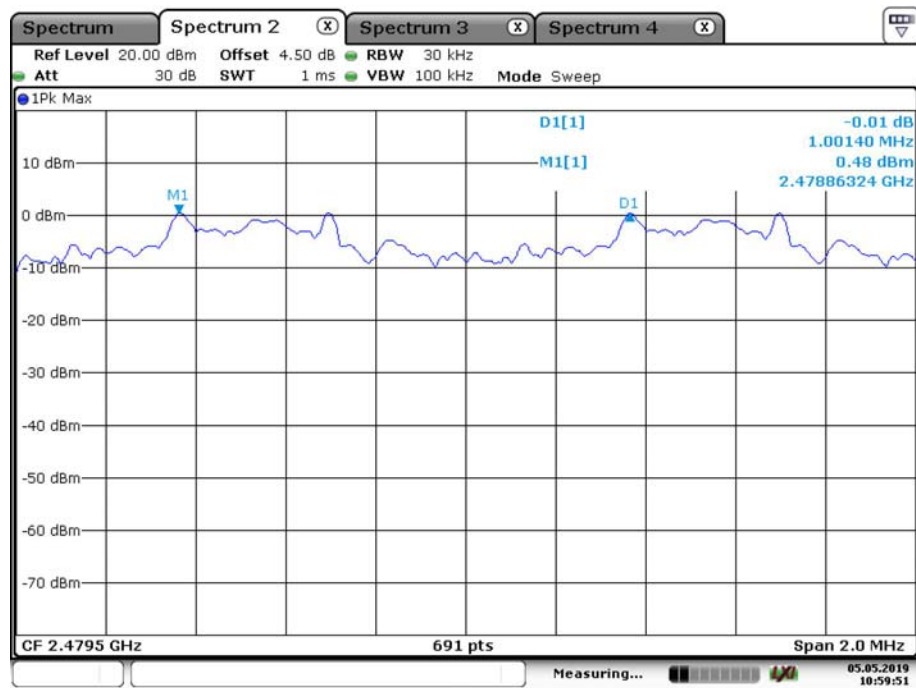

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.8 °C
Relative Humidity:	65 %
ATM Pressure:	100.5 kPa

* The testing was performed by Carrie He on 2019-05-05.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.928
	Middle	2441	0.928
	High	2480	0.924
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.308
	Middle	2441	1.308
	High	2480	1.312
EDR Mode (8-DPSK)	Low	2402	1.280
	Middle	2441	1.276
	High	2480	1.276


Please refer to following plots:

GFSK_Low

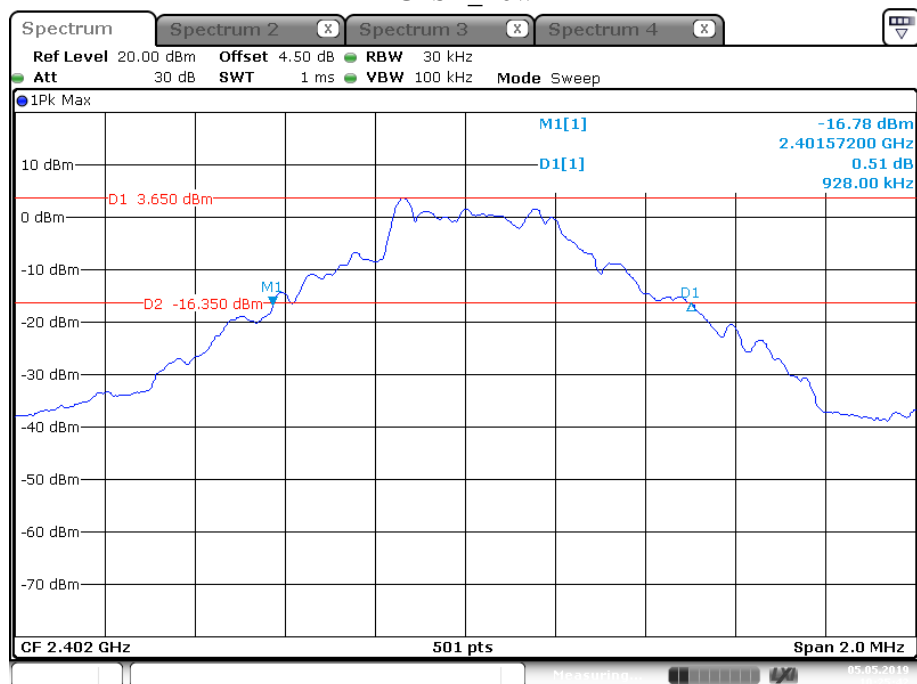

Date: 5.MAY.2019 10:25:43

GFSK_Middle

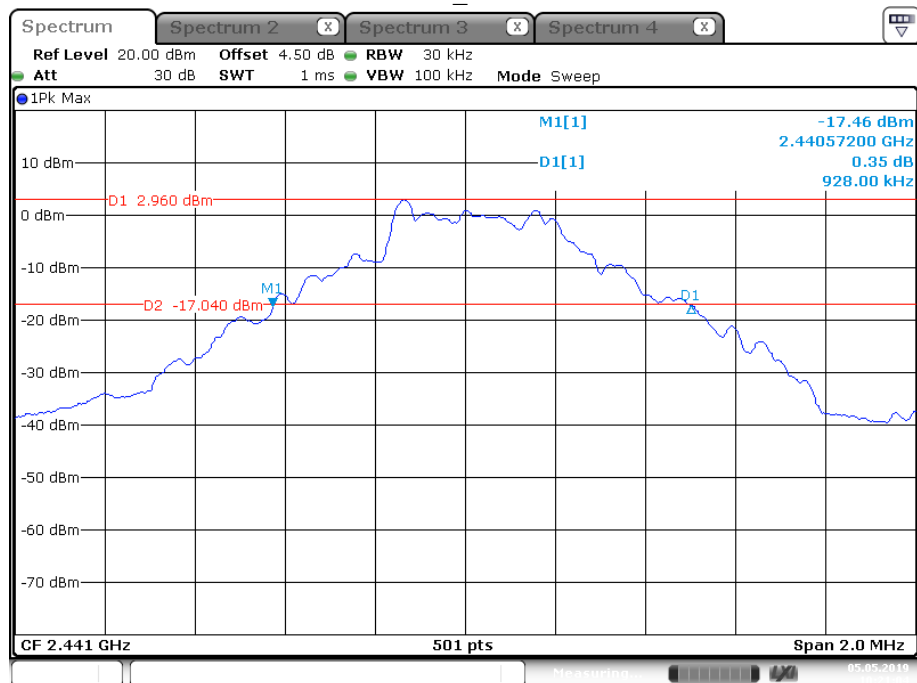

Date: 5.MAY.2019 10:21:04

Spectrum

Spectrum 2 **Spectrum 3** **Spectrum 4**

Ref Level 20.00 dBm **Offset** 4.50 dB **RBW** 30 kHz

Att 30 dB **SWT** 1 ms **VBW** 100 kHz **Mode** Sweep

1Pk Max

M1[1] -17.59 dBm
2.47957600 GHz
-0.56 dB
924.00 kHz

D1 1.940 dBm

D2 -18.060 dBm

M1

D1

CF 2.48 GHz **501 pts** **Span** 2.0 MHz


Date: 5.MAY.2019 10:23:26

The screenshot shows a Spectrum Analyzer window with the following details:


- Top Panel:**
 - Buttons: Spectrum, Spectrum 2, Spectrum 3, Spectrum 4.
 - Controls: Ref Level (20.00 dBm), Att (30 dB), Offset (4.50 dB), RBW (30 kHz), SWT (1 ms), VBW (100 kHz), Mode (Sweep).
- Main Plot:**
 - Y-axis: Power in dBm, ranging from -70 to 10.
 - X-axis: Frequency in GHz, ranging from 2.400 to 2.402.
 - Signal: A blue line representing the spectrum, showing a peak at 2.40136400 GHz.
 - Annotations:
 - M1[1] at -18.54 dBm (Peak)
 - D1[1] at -0.12 dBm (Reference)
 - D2 at -18.750 dBm (Noise Floor)
- Bottom Panel:**
 - CF 2.402 GHz
 - 501 pts
 - Span 2.0 MHz

Date: 5.MAY.2019 10:26:42


$\pi/4$ -DQPSK_Middle

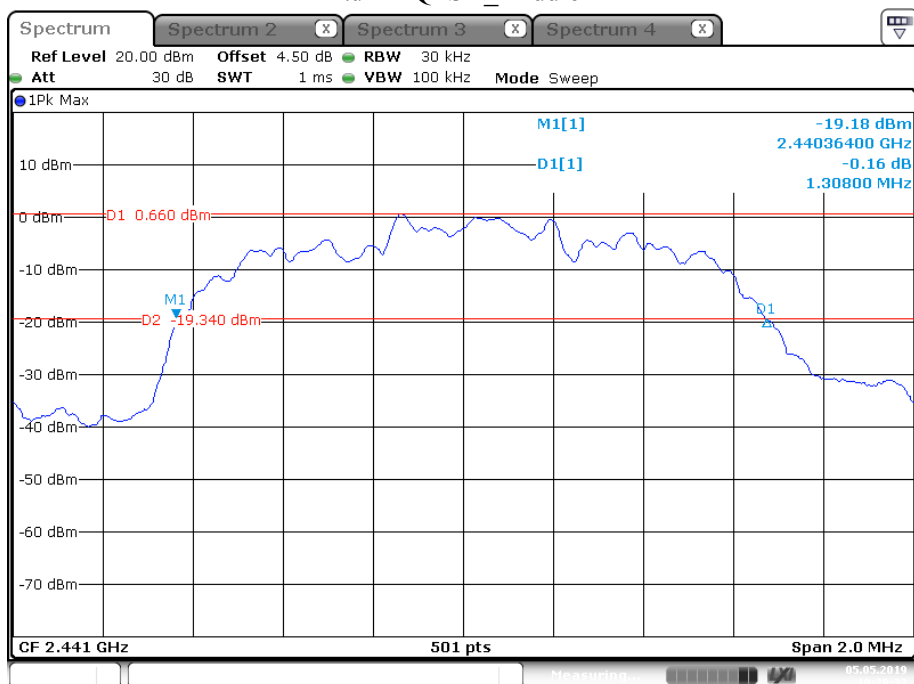

$\pi/4$ -DQPSK_High

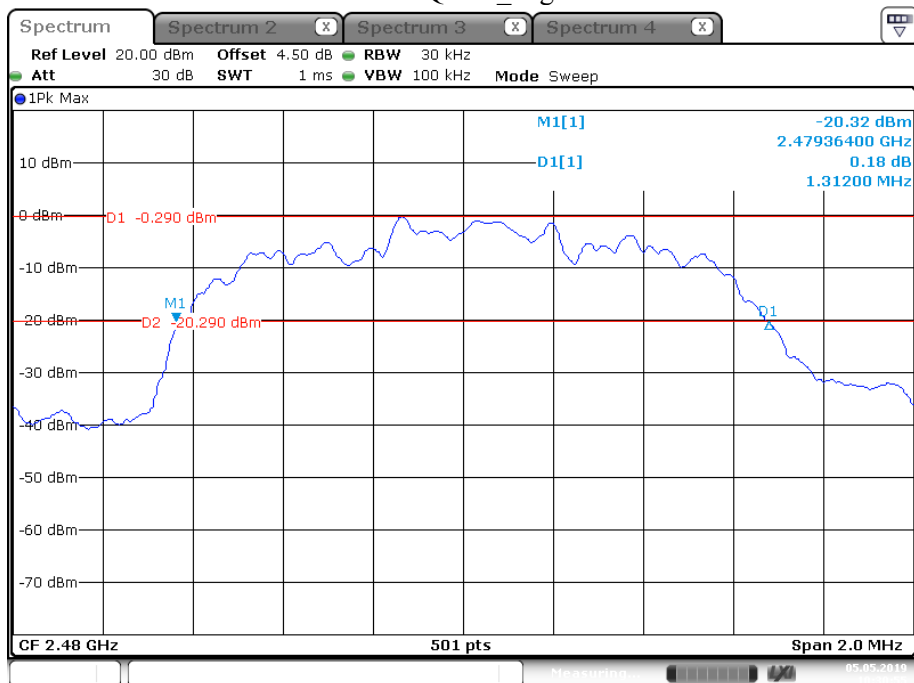


8-DPSK_Low

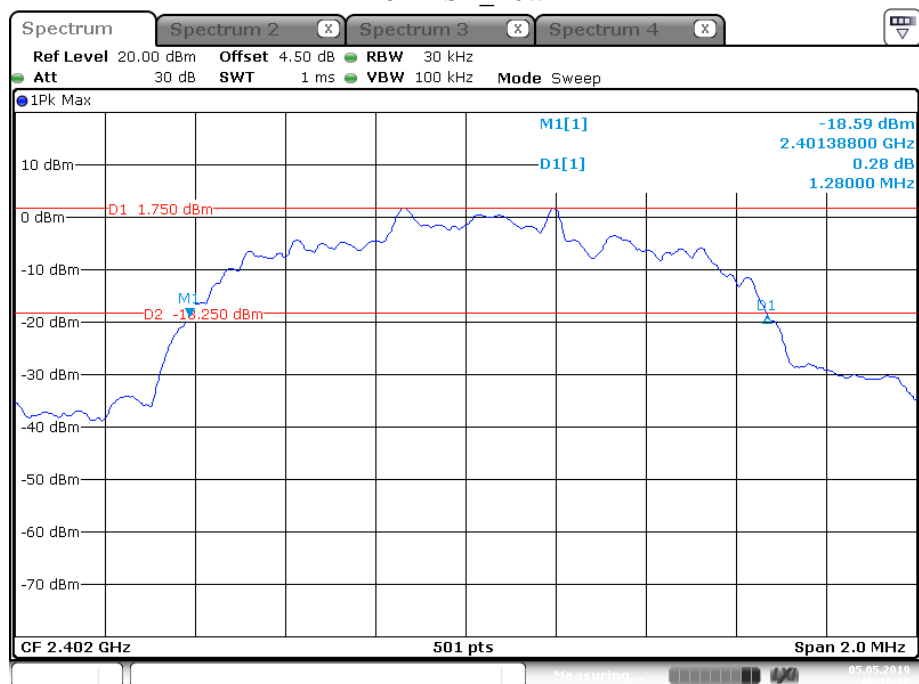


Date: 5.MAY.2019 10:32:21

8-DPSK_Middle

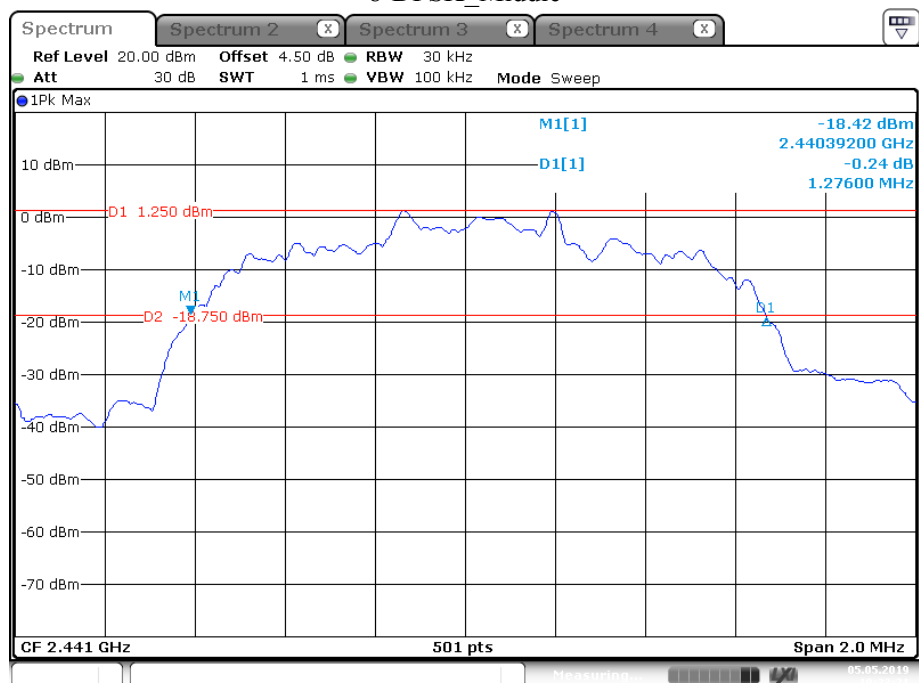

Date: 5.MAY.2019 10:33:21

8-DPSK_High

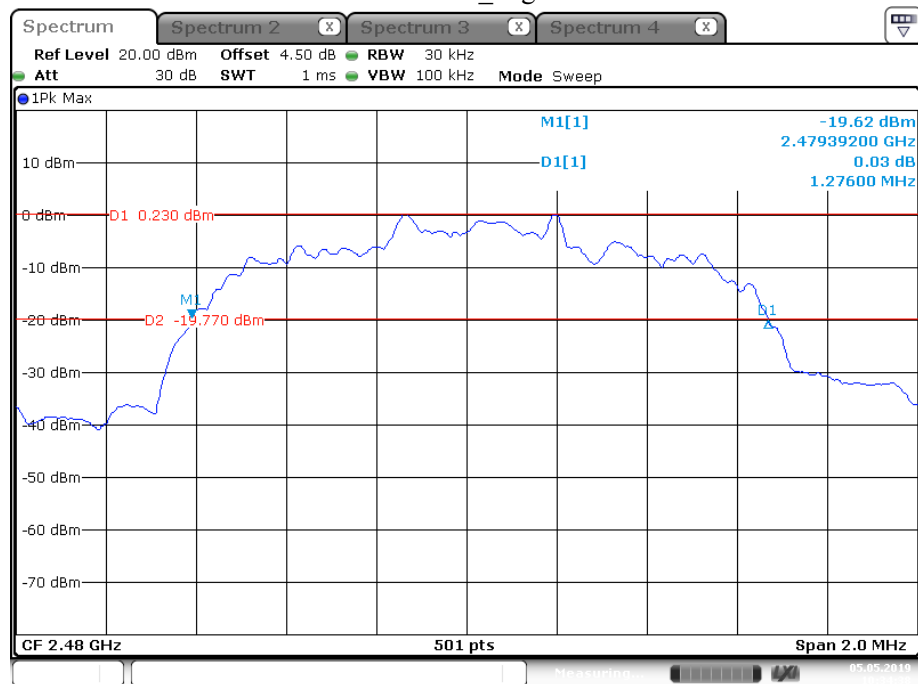

Date: 5.MAY.2019 10:34:38

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.8 °C
Relative Humidity:	65 %
ATM Pressure:	100.5 kPa

* The testing was performed by Carrie He on 2019-05-05.


Test Result: Compliance.

Please refer to following tables and plots


Please refer to following plots:

Mode	Frequency range (MHz)	Number of Hopping Channel	Limit
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	
8-DPSK	2400-2483.5	79	

Please refer to following plots:

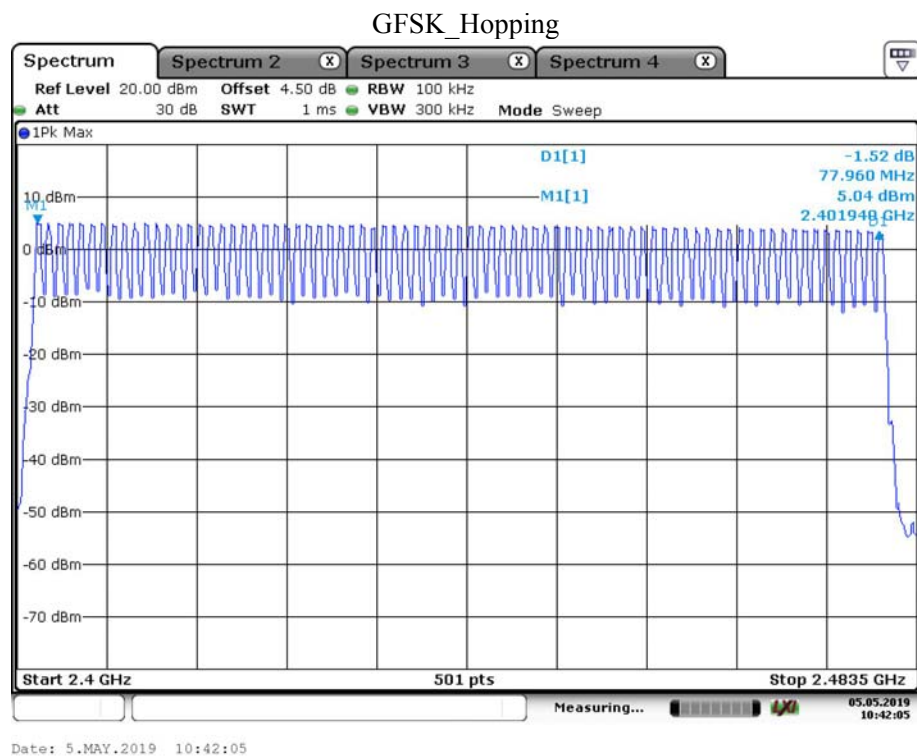


$\pi/4$ -DQPSK_Hopping

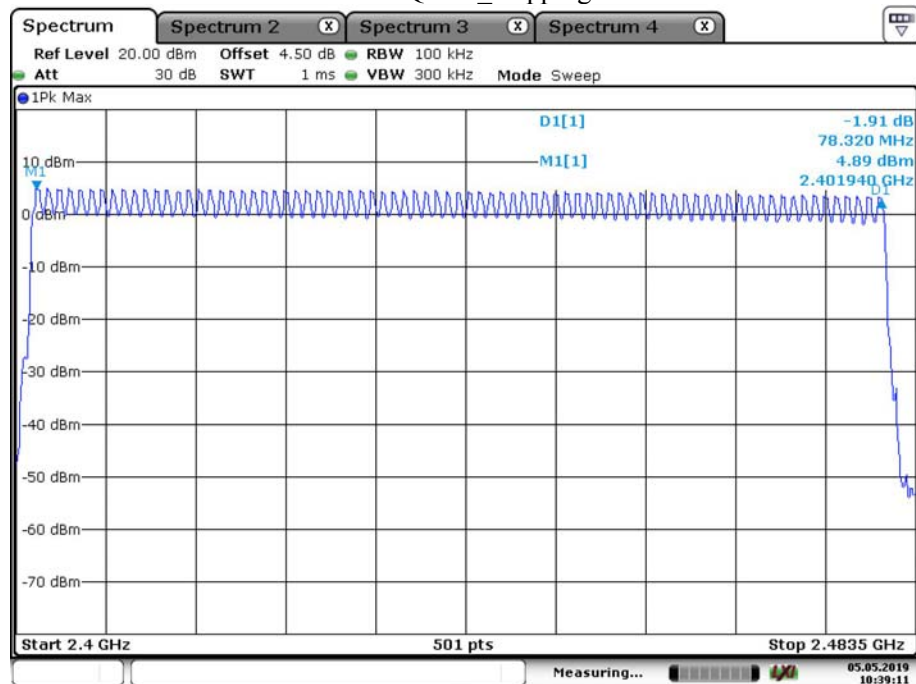

Date: 5.MAY.2019 10:39:11

8-DPSK_Hopping

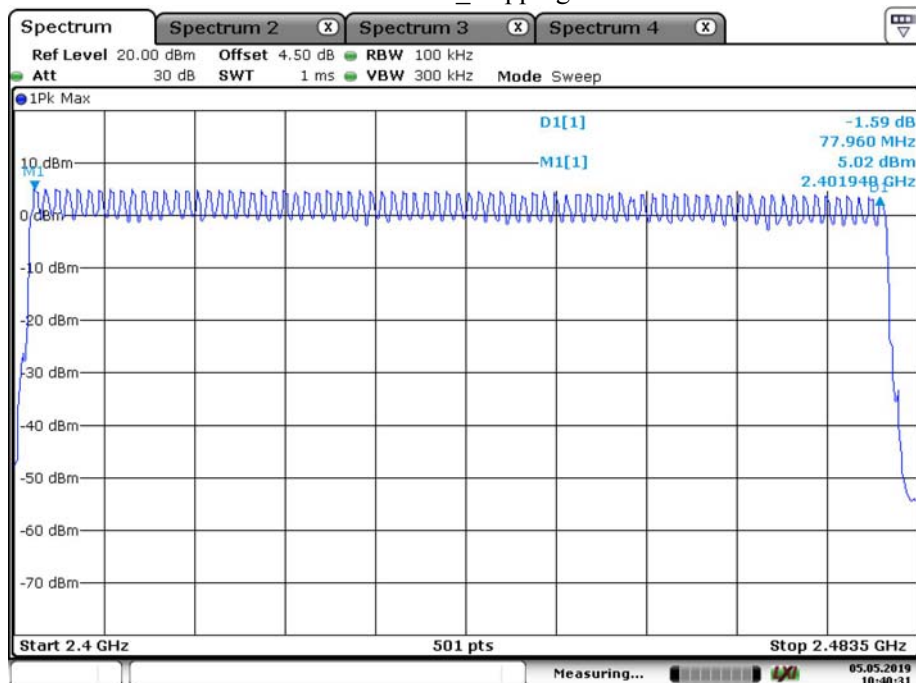

Date: 5.MAY.2019 10:40:31

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.8 °C
Relative Humidity:	65 %
ATM Pressure:	100.5 kPa

* The testing was performed by Carrie He on 2019-05-05.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Packet type	Channel	Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
GFSK	DH1	Middle	2441	0.417	0.133	0.4
	DH3	Middle	2441	1.686	0.270	
	DH5	Middle	2441	2.932	0.313	
$\pi/4$ -DQPSK	DH1	Middle	2441	0.410	0.131	
	DH3	Middle	2441	1.678	0.268	
	DH5	Middle	2441	2.929	0.312	
8-DPSK	DH1	Middle	2441	0.409	0.131	
	DH3	Middle	2441	1.686	0.270	
	DH5	Middle	2441	2.930	0.313	


Please refer to following plots:

GFSK_DH1_Middle

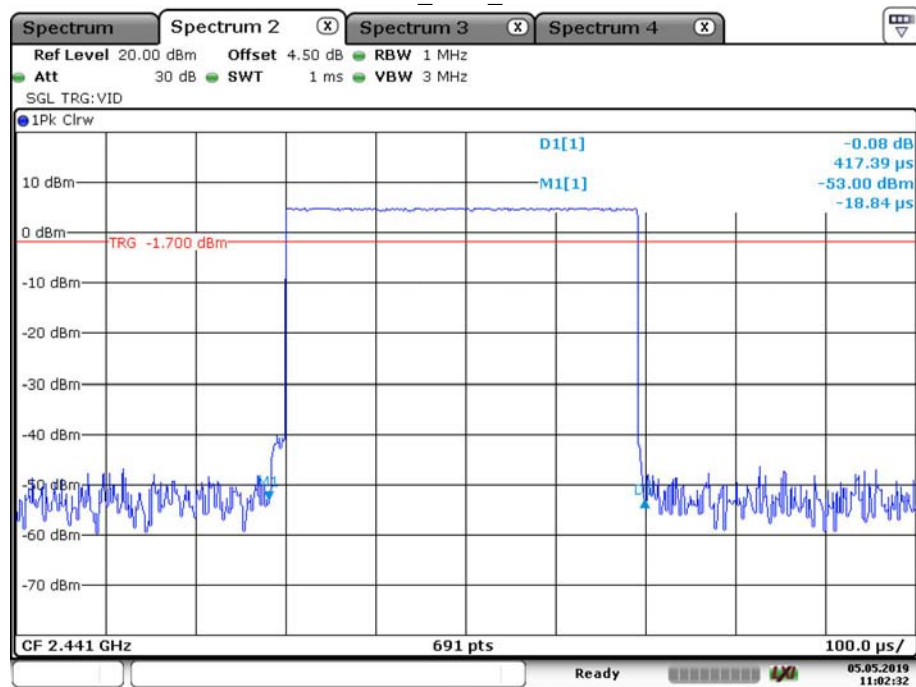


Date: 5.MAY.2019 11:02:32

GFSK_DH3_Middle

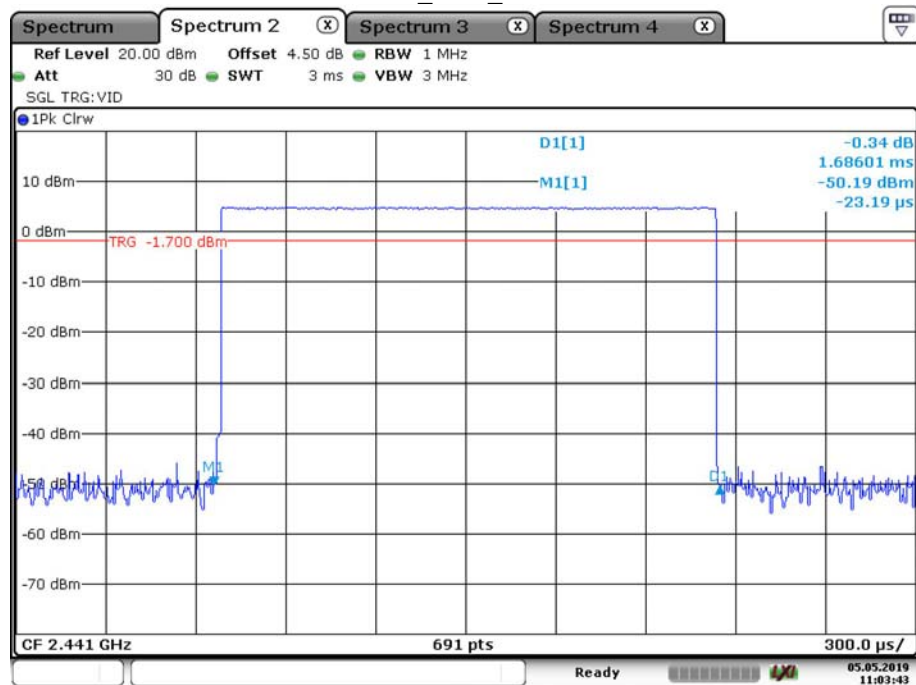


Date: 5.MAY.2019 11:03:43


GFSK_DH5_Middle

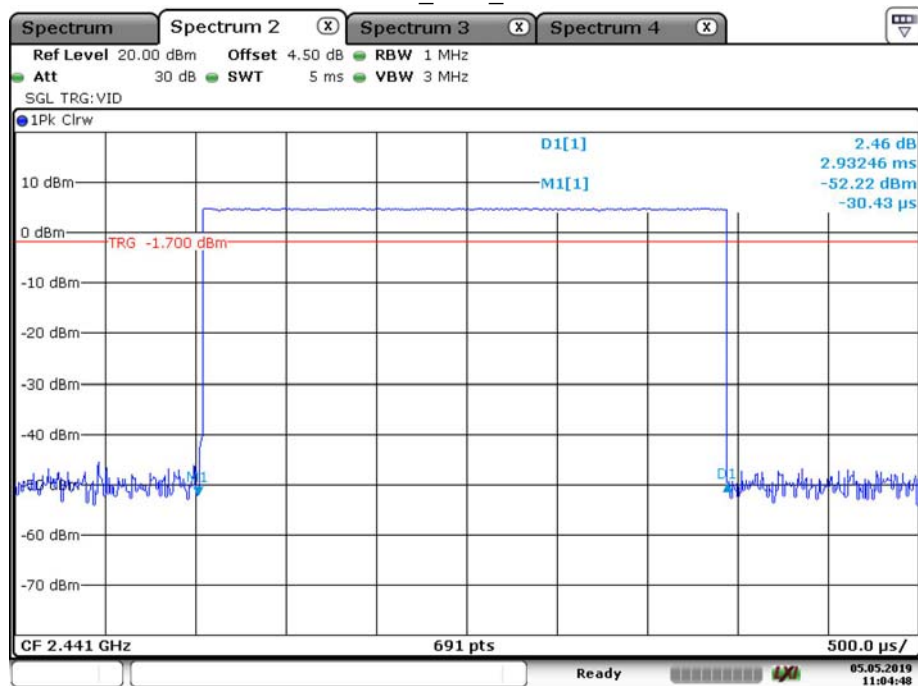


Date: 5.MAY.2019 11:04:49

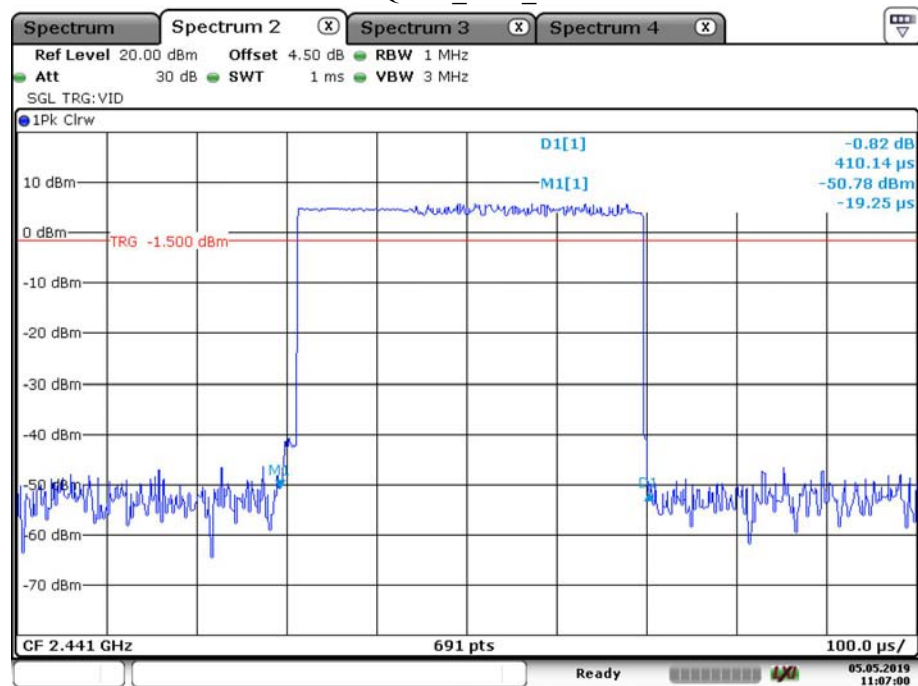 $\pi/4$ -DQPSK_DH1_Middle

Date: 5.MAY.2019 11:07:01

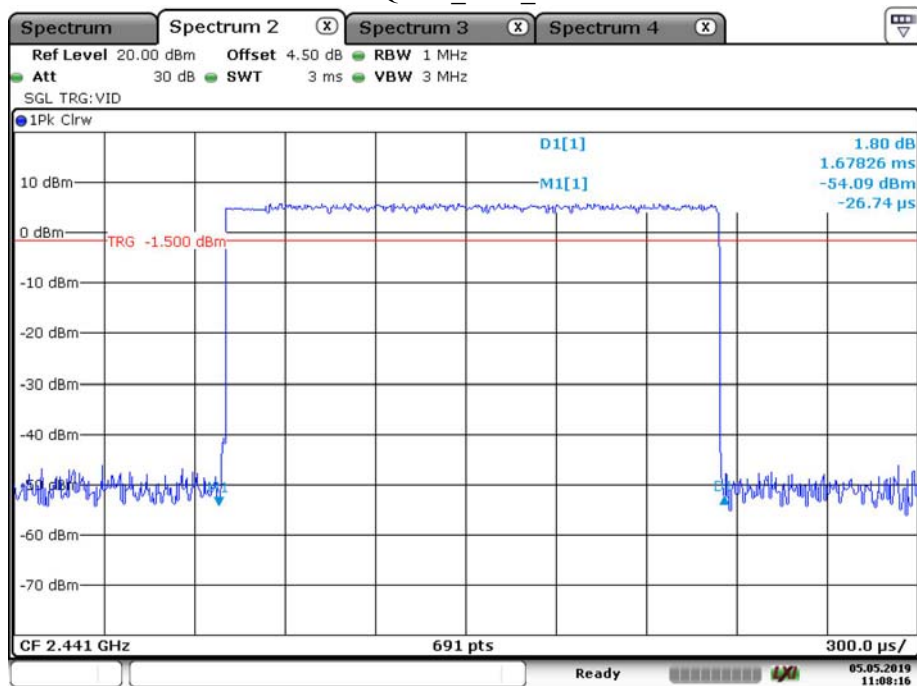
$\pi/4$ -DQPSK_DH3_Middle

Date: 5.MAY.2019 11:08:16

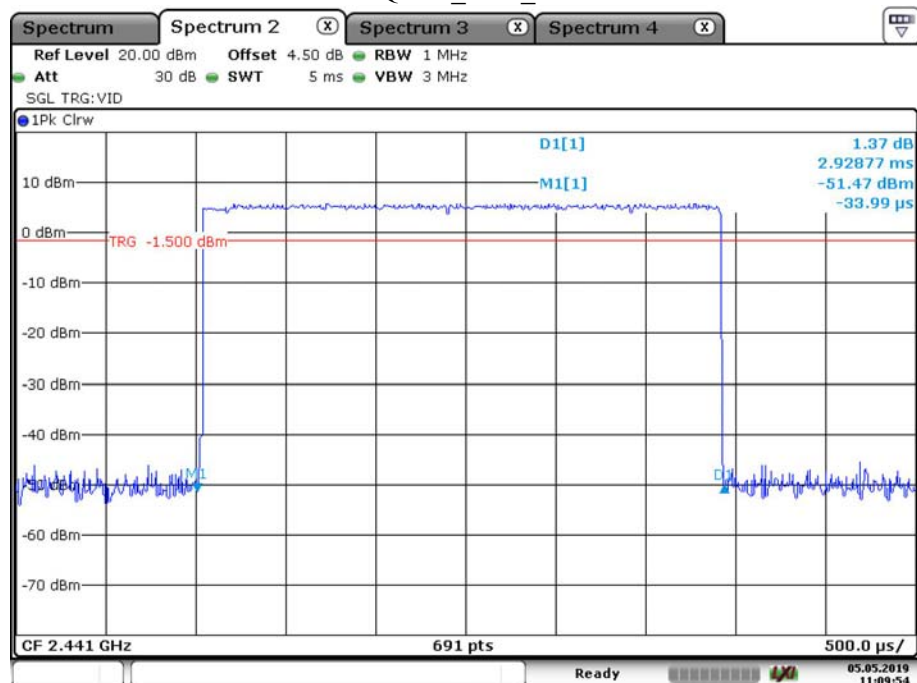 $\pi/4$ -DQPSK_DH5_Middle


Date: 5.MAY.2019 11:09:54

8-DPSK_DH1_Middle

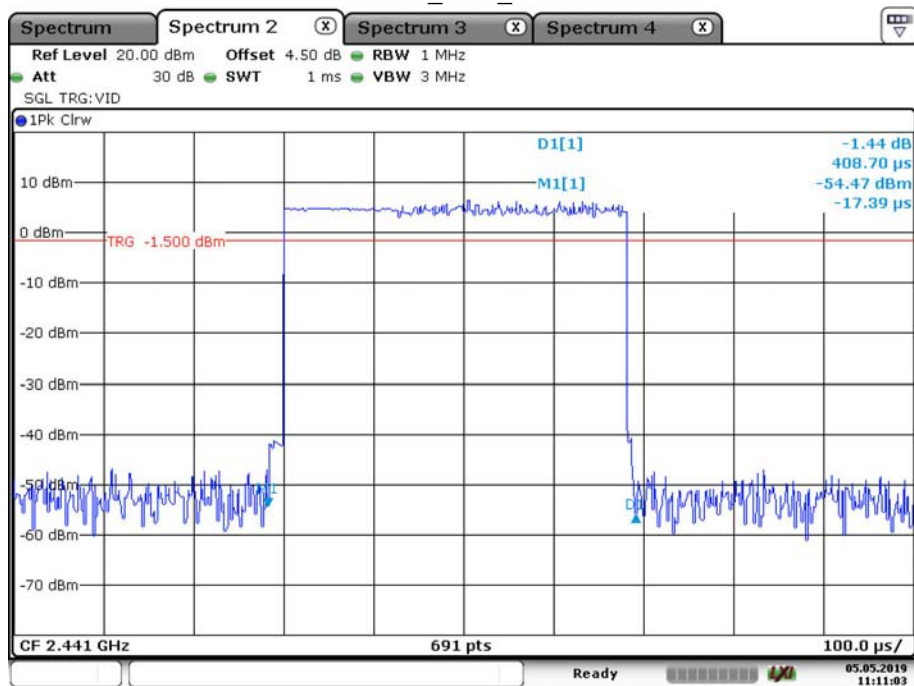


Date: 5.MAY.2019 11:11:03

8-DPSK_DH3_Middle

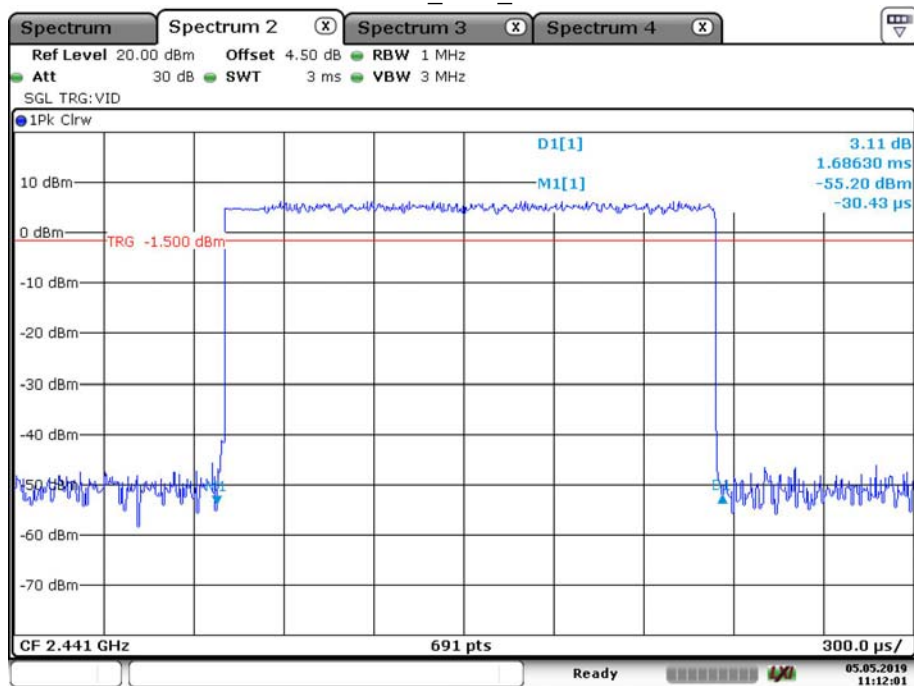

Date: 5.MAY.2019 11:12:02

8DPSK_DH5_Middle

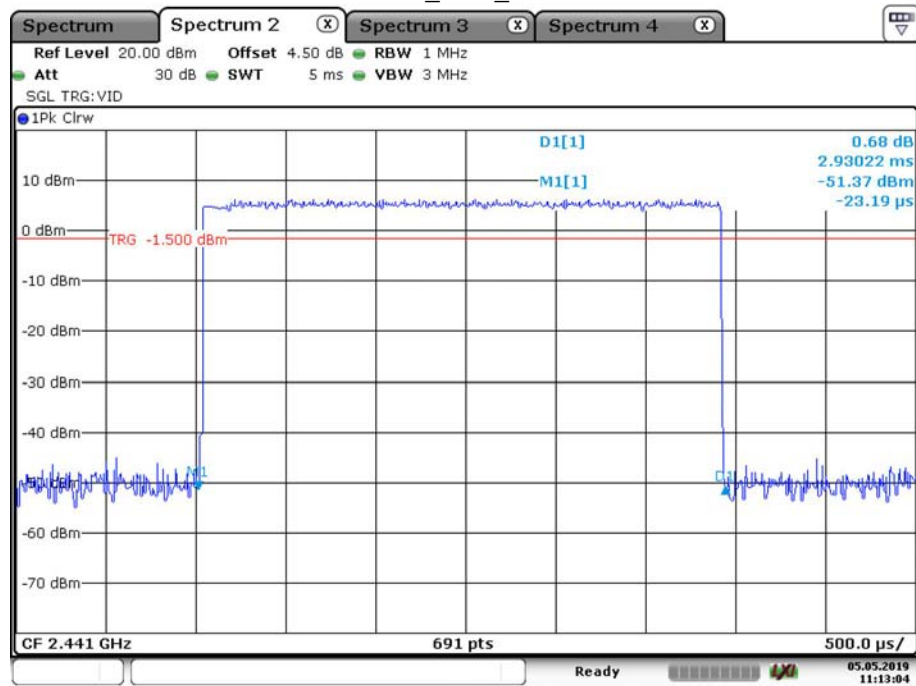

Date: 5.MAY.2019 11:13:05

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-10	2019-12-10
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25.8 °C
Relative Humidity:	65 %
ATM Pressure:	100.5 kPa

* The testing was performed by Carrie He on 2019-05-05.

Test Result: Compliance.

Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	5.48	21
	2441	4.94	21
	2480	3.93	21
EDR Mode ($\pi/4$ -DQPSK)	2402	6.81	21
	2441	6.32	21
	2480	5.41	21
EDR Mode (8-DPSK)	2402	7.27	21
	2441	6.83	21
	2480	5.91	21

Note: The data above was tested in conducted mode.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	25.8 °C
Relative Humidity:	65 %
ATM Pressure:	100.5 kPa

* The testing was performed by Carrie He on 2019-05-05.


Test Result: Compliance

Please refer to following plots:


Single Channel:

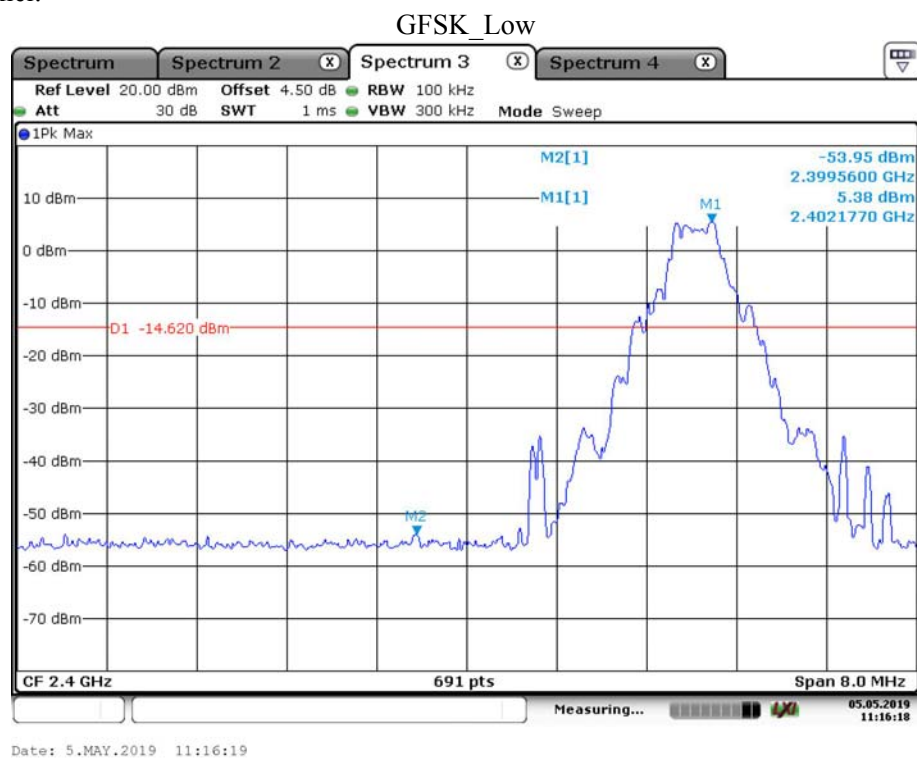

GFSK_High

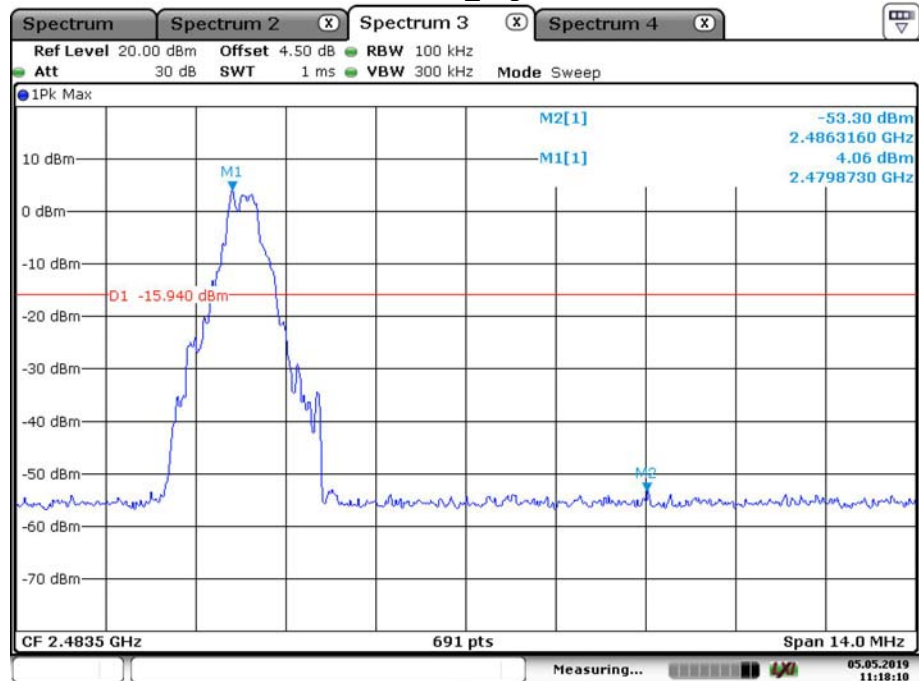


Date: 5.MAY.2019 11:18:10

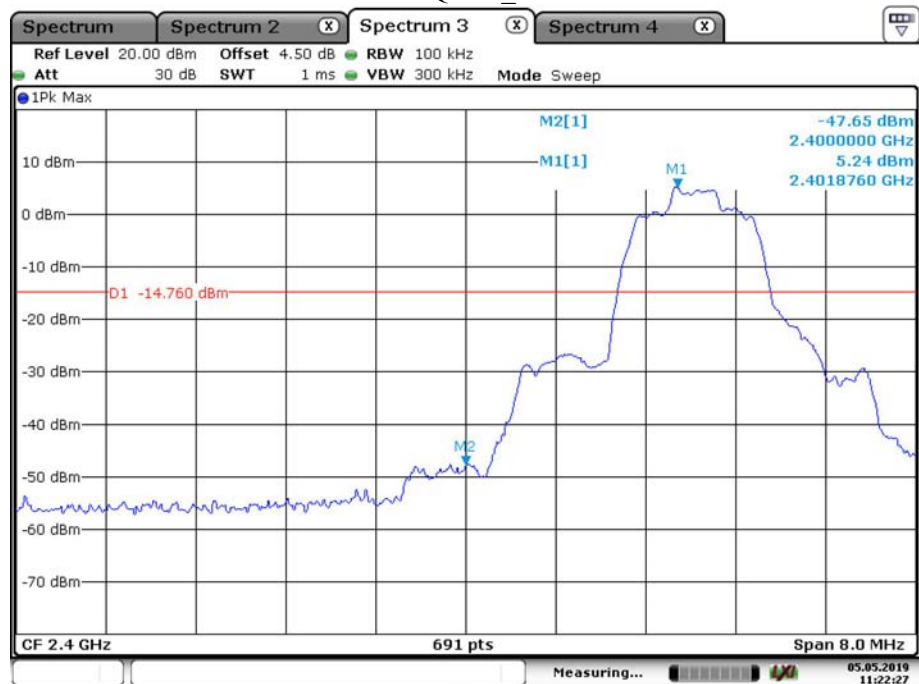 $\pi/4$ -DQPSK_Low


Date: 5.MAY.2019 11:22:27

$\pi/4$ -DQPSK_High

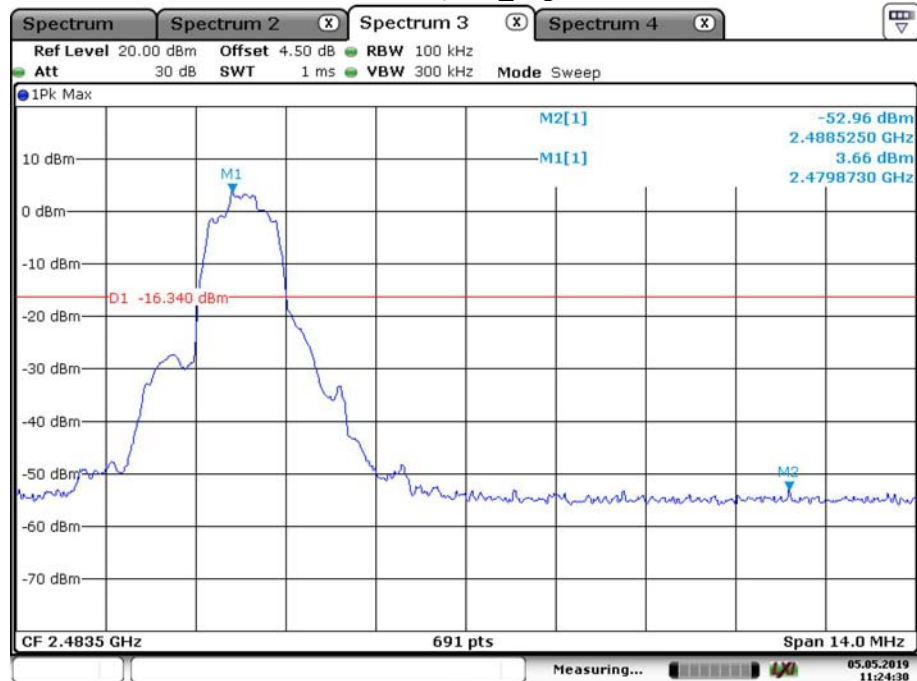


Date: 5.MAY.2019 11:24:31

8-DPSK_Low

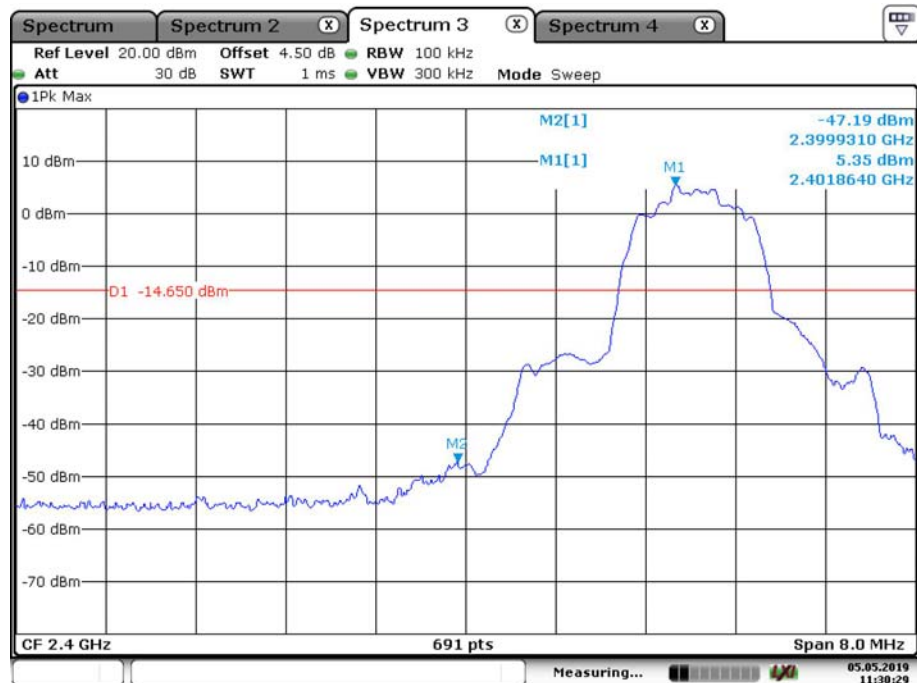

Date: 5.MAY.2019 11:30:29


8-DPSK_High

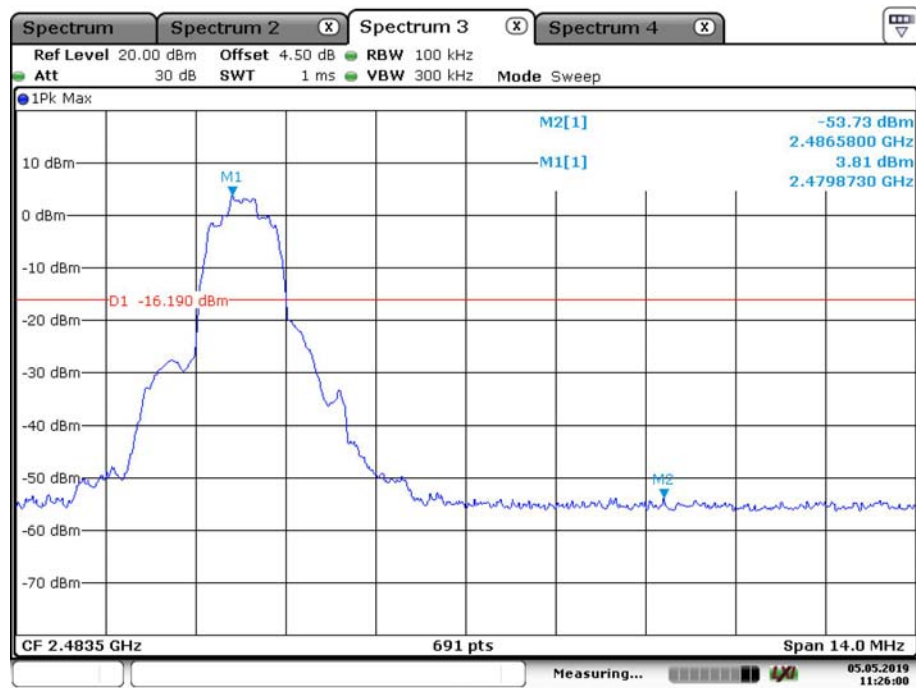

Date: 5.MAY.2019 11:26:00


Hopping mode:

GFSK_Low

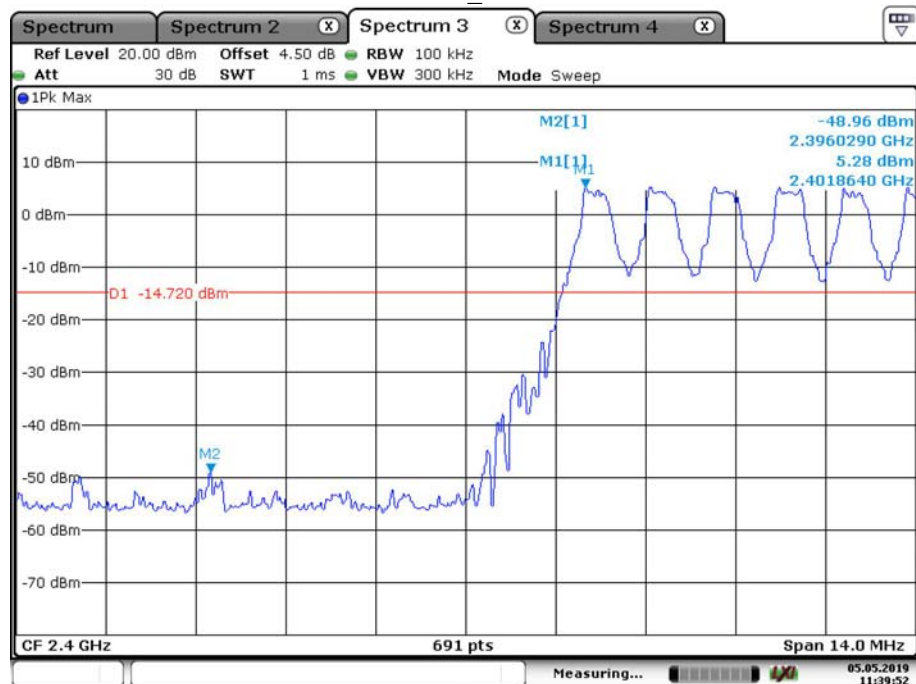


Date: 5.MAY.2019 11:39:52

GFSK_High

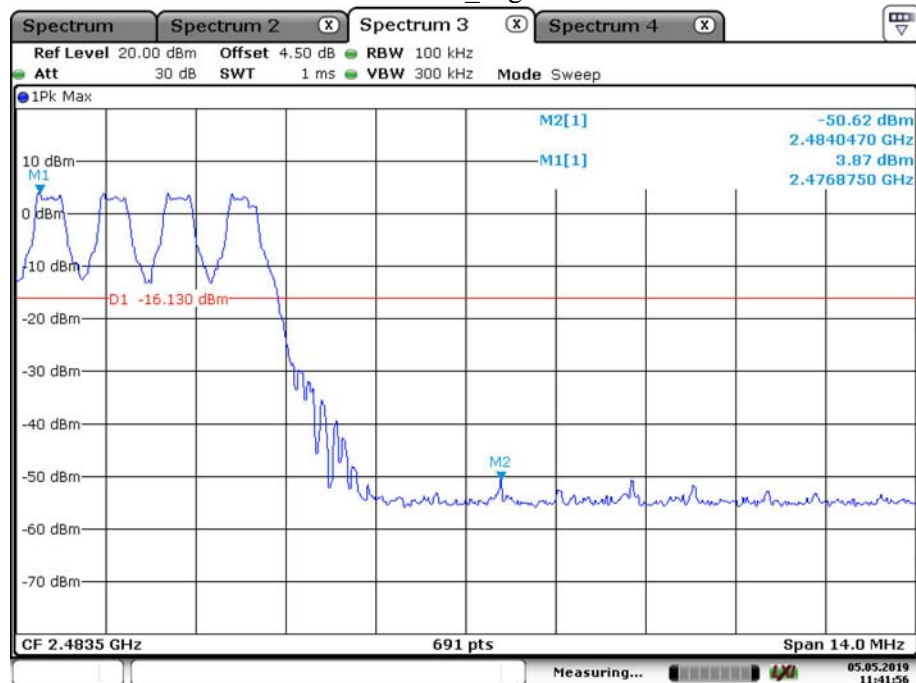


Date: 5.MAY.2019 11:41:57

$\pi/4$ DQPSK_Low

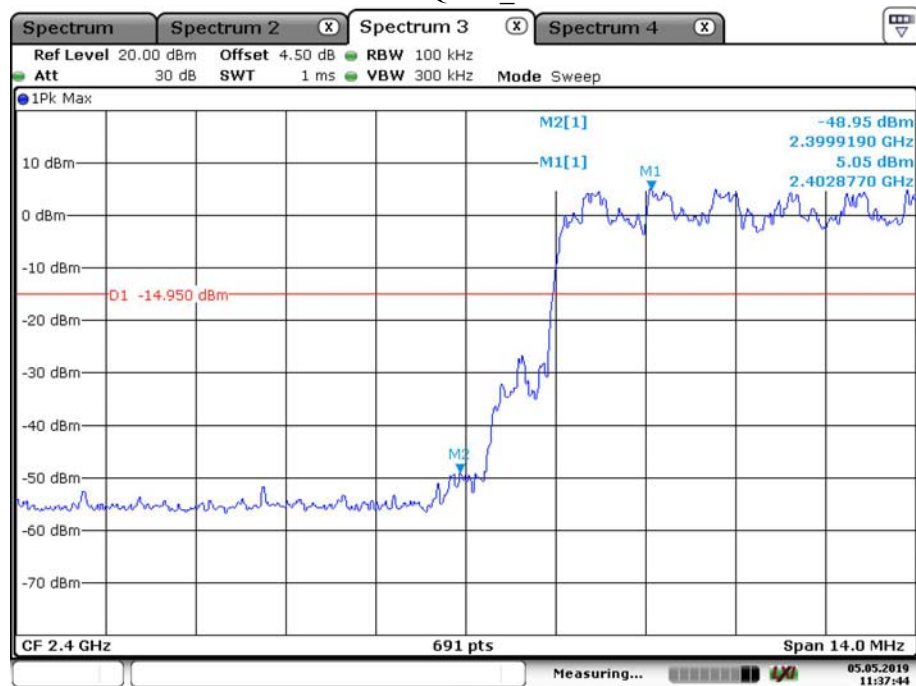


Date: 5.MAY.2019 11:37:44

$\pi/4$ DQPSK_High

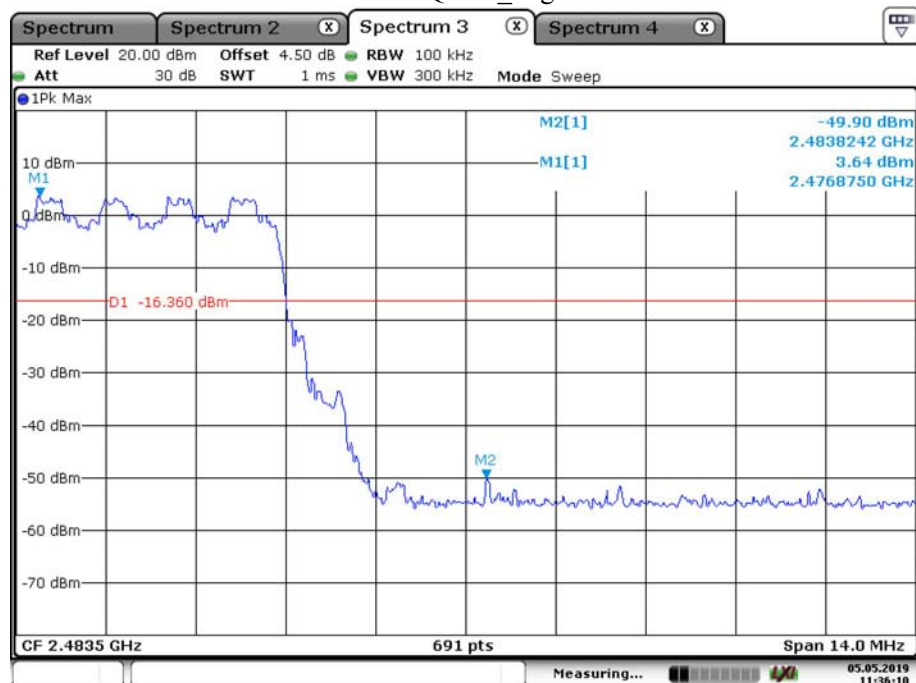


Date: 5.MAY.2019 11:36:11

8DPSK_Low

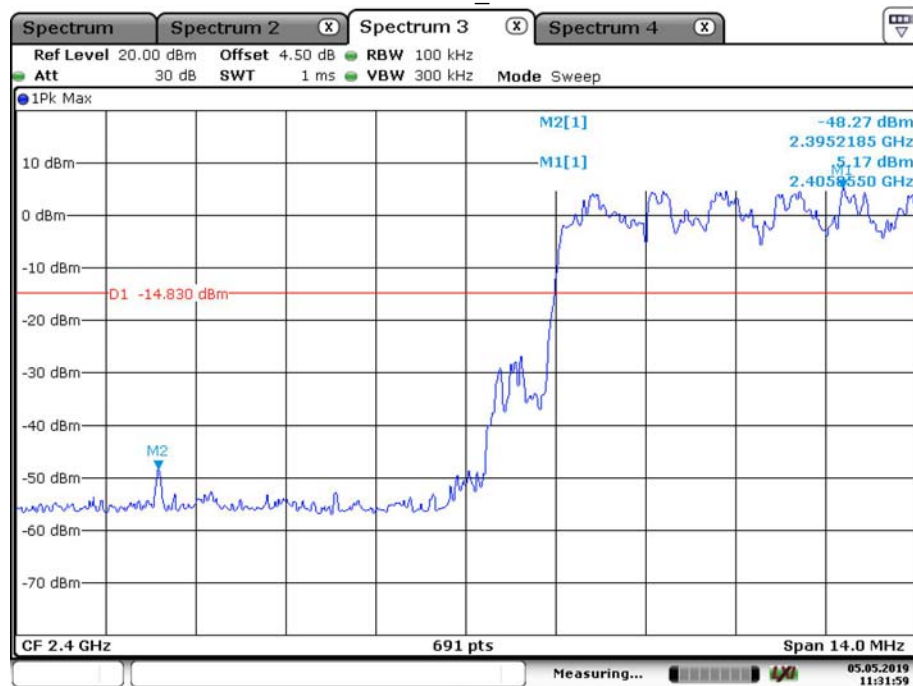

Date: 5.MAY.2019 11:31:59

8DPSK_High

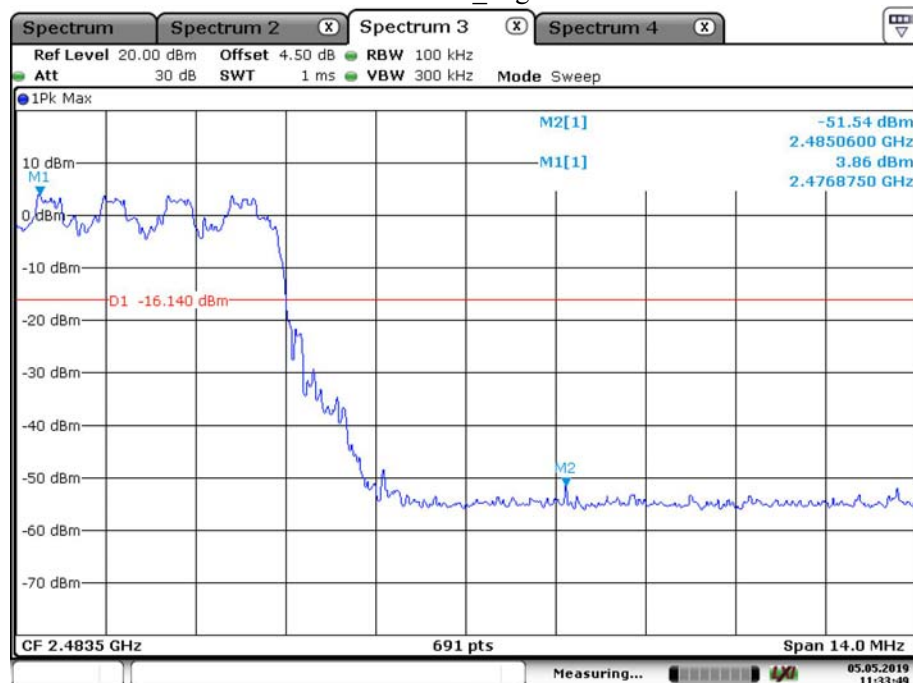

Date: 5.MAY.2019 11:33:49

***** END OF REPORT *****