


TEST REPORT

For Bluetooth-LE

Report No. : **CHTEW23100067** Report Verification: 
Project No..... : SHT2304024504EW
FCC ID..... : **2AE6C-EP8100VHF**
Applicant's name : **Shenzhen Excera Technology Co., Ltd.**
Address..... : 201, Building B, Tongfang Information Harbour, No.11 Langshan Road, Nanshan District, Shenzhen 518057, P.R.China
Product Name : **Digital Portable Radio**
Trade Mark : EXCERA
Model No. : EP8100 VHF
Listed Model(s) : EP8000 VHF
Standard : **FCC CFR Title 47 Part 15 Subpart C § 15.247**
Date of receipt of test sample..... : Aug. 10, 2023
Date of testing : Aug. 29, 2023- Oct. 13, 2023
Date of issue..... : Oct. 19, 2023
Result..... : **PASS**

Compiled by
(Position+Printed name+Signature): File administrator Xiaodong Zhao

Xiaodong Zhao

Supervised by
(Position+Printed name+Signature): Project Engineer Caspar Chen

Caspar Chen

Approved by
(Position+Printed name+Signature): RF Manager Xu Yang

Xu Yang

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,
Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<u>4.</u>	<u>TEST CONFIGURATION</u>	<u>7</u>
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test sample information	7
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Statement of the measurement uncertainty	8
4.7.	Equipment Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	Antenna Requirement	10
5.2.	AC Conducted Emission	11
5.3.	Peak Output Power	12
5.4.	Power Spectral Density	13
5.5.	6dB bandwidth	14
5.6.	99% Occupied Bandwidth	15
5.7.	Duty Cycle	16
5.8.	Conducted Band edge and Spurious Emission	17
5.9.	Radiated Band edge Emission	18
5.10.	Radiated Spurious Emission	20
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>25</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS</u>	<u>27</u>
7.1.	External Photos	27
7.2.	Internal Photos	31
<u>8.</u>	<u>APPENDIX REPORT</u>	<u>32</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC CFR Title 47 Part 15 Subpart C § 15.247](#): Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2020](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2023-10-19	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result	Test Engineer
5.1	Antenna Requirement	15.203/15.247(c)	PASS	Caspar Chen
5.2	AC Conducted Emission	15.207	PASS	-
5.3	Peak Output Power	15.247(b)(3)	PASS	Caspar Chen
5.4	Power Spectral Density	15.247(e)	PASS	Caspar Chen
5.5	6dB Bandwidth	15.247(a)(2)	PASS	Caspar Chen
5.6	99% Occupied Bandwidth	-	PASS ^{*1}	Caspar Chen
5.7	Duty cycle	-	PASS ^{*1}	Caspar Chen
5.8	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS	Caspar Chen
5.9	Radiated Band Edge Emission	15.205/15.209	PASS	Yifan Wang
5.10	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS	Yifan Wang

Note:

- The measurement uncertainty is not included in the test result.
- ^{*1}: No requirement on standard, only report these test data.

3. SUMMARY

3.1. Client Information

Applicant:	Shenzhen Excera Technology Co., Ltd.
Address:	201, Building B, Tongfang Information Harbour, No.11 Langshan Road, Nanshan District, Shenzhen 518057, P.R.China
Manufacturer:	Shenzhen Excera Technology Co., Ltd.
Address:	201, Building B, Tongfang Information Harbour, No.11 Langshan Road, Nanshan District, Shenzhen 518057, P.R.China
Factory:	Shenzhen Excera Technology Co., Ltd.
Address:	201, Building B, Tongfang Information Harbour, No.11 Langshan Road, Nanshan District, Shenzhen 518057, P.R.China

3.2. Product Description

Main unit information:	
Product Name:	Digital Portable Radio
Trade Mark:	EXCERA
Model No.:	EP8100 VHF
Listed Model(s):	EP8000 VHF
Power supply:	DC 7.2V from Battery
Hardware version:	EP8100 VHF -F
Software version:	EXCERA OneKeyUpdate 1.4.01.15D
Accessory unit information:	
Battery information:	MODEL: EB242L DC 7.2V 2400mAh/17.28Wh
Adapter information:	MODEL: DSA-12PFU-12 FCA 120100 INPUT:100-240V~50/60Hz 0.5A OUTPUT: DC 12V 1.0A, 12W
desktop charger:	MODEL: ESC102L INPUT: DC 12V 1A OUTPUT: DC 8.4V 1A

3.3. Radio Specification Description

Bluetooth version:	V4.0
Support function:	BLE
Modulation:	GFSK
Operation frequency:	2402MHz~2480MHz
Channel number:	40

Channel separation:	2MHz
Antenna type:	intenal antenna
Antenna gain:	0.00dBi

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Contact information:	Phone: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

Channel	Frequency (MHz)
00	2402
01	2404
.
19	2440
.
38	2478
39	2480

4.2. Descriptions of Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For Radiated spurious emissions:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

4.3. Test sample information

Test item	HTW sample no.
RF Conducted test items	Please refer to the description in the appendix report
RF Radiated test items	YPHT23040245005
EMI test items	-

Note:

RF Conducted test items: Peak Output Power, Power Spectral Density, 6dB Bandwidth, 99% Occupied Bandwidth, Duty cycle, Conducted Band Edge and Spurious Emission

RF Radiated test items: Radiated Band Edge Emission, Radiated Spurious Emission

EMI test items: AC Conducted Emission

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ No			
Item	Equipment	Trade Name	Model No.
1			
2			

4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	AC Conducted Emission	3.21dB
2	Peak Output Power	1.07
3	Power Spectral Density	1.07
4	6dB Bandwidth	0.002%
5	99% Occupied Bandwidth	0.002%
6	Duty cycle	-
7	Conducted Band Edge and Spurious Emission	1.68dB
8	Radiated Band Edge Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz
9	Radiated Spurious Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.7. Equipment Used during the Test

● RF Conducted test item							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2023/08/22	2024/08/21
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2023/08/22	2024/08/21
●	Vector signal generator	R&S	HTWE0244	SMBV100A	260790	2023/05/23	2024/05/22
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A

● Radiated emission- 9kHz~30MHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/4/6	2026/4/5
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2023/08/22	2024/08/21
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2021/4/6	2024/4/5
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated emission- 30MHz~1GHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/4/6	2026/4/5
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2023/08/22	2024/08/21
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2023/2/22	2026/2/21
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	/	2023/5/25	2024/5/24
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated emission- Above 1GHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2023/4/17	2026/4/16
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2023/08/22	2024/08/21
●	Spectrum Analyzer	R&S	HTWE0385	N9020A	MY54486658	2023/08/22	2024/08/21
●	Horn Antenna	SCHWARZBECK	HTWE0126	BBHA 9120D	1011	2023/2/14	2026/2/13
●	Pre-Amplifier	CD	HTWE0071	PAP-0102	12004	2023/5/25	2024/5/24
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2023/5/25	2024/5/24
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

REQUIREMENT


FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

TEST RESULT

☒ Passed ☐ Not Applicable

The antenna type is a internal antenna, please refer to the below antenna photo.

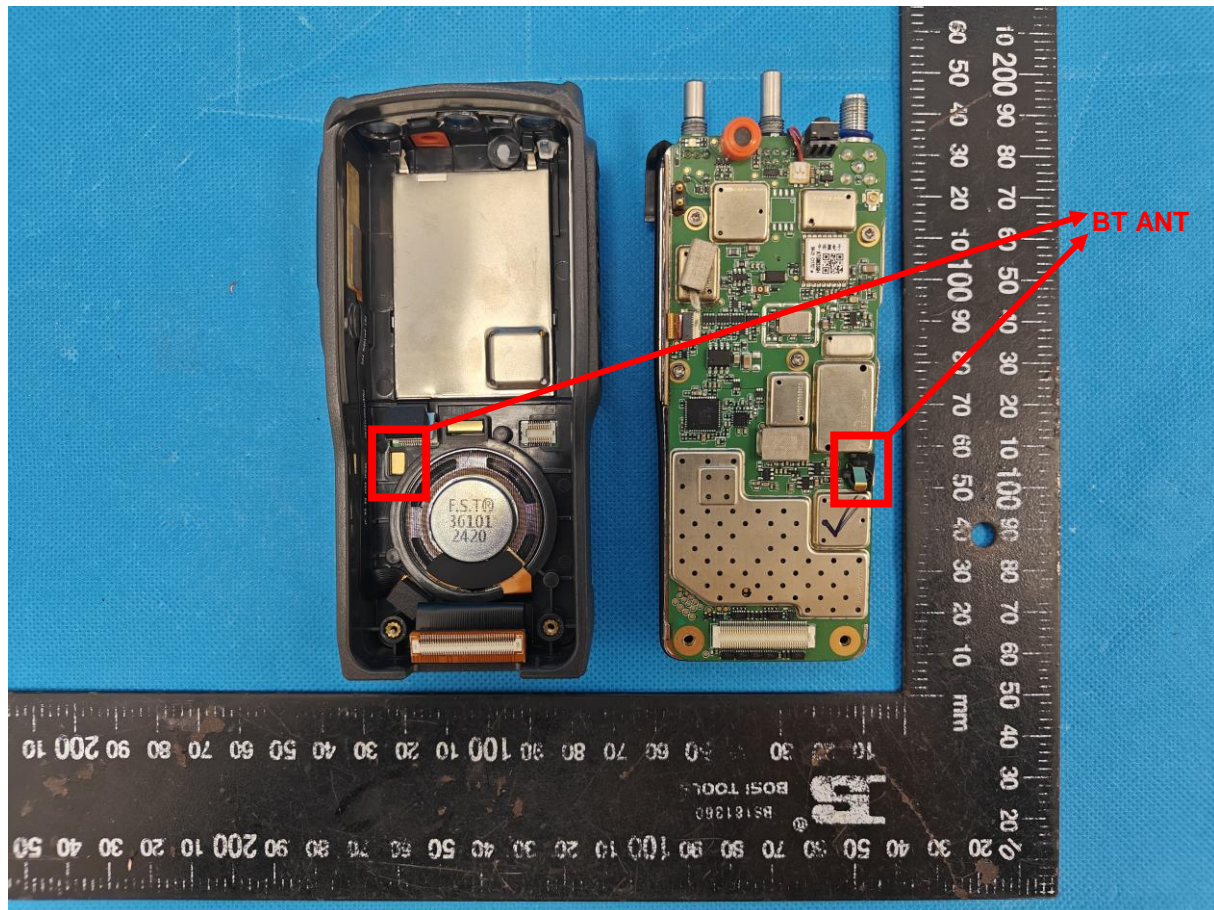

5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

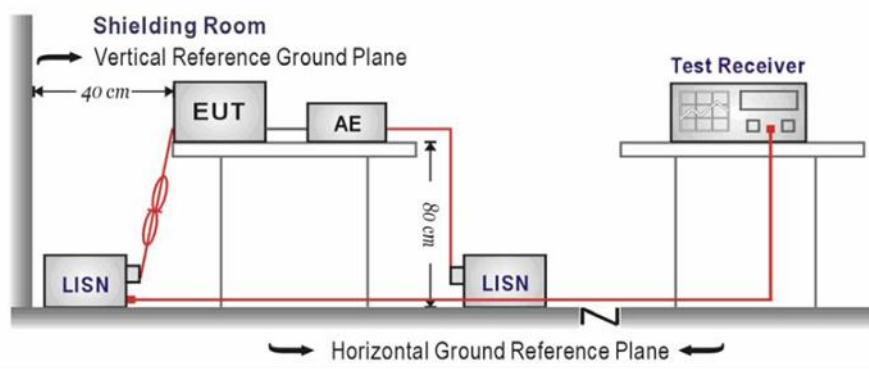

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE

Refer to the clause 4.2

TEST RESULT


☐ Passed ☒ Not Applicable

5.3. Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

TEST CONFIGURATION

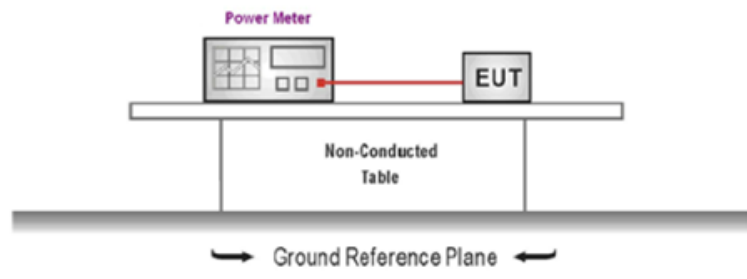

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10 and KDB 558074 D01 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report


5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION

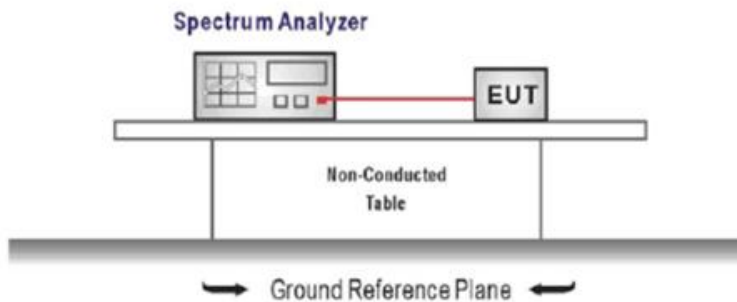

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
 $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$, $VBW \geq 3 \times RBW$
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report


5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

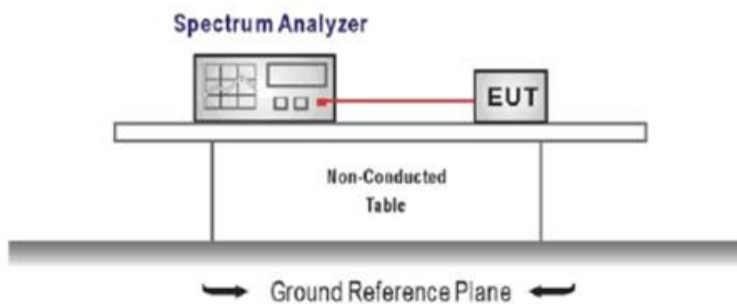

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = DTS channel center frequency
Span = 2 x DTS bandwidth
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA


Refer to the appendix report

5.6. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION

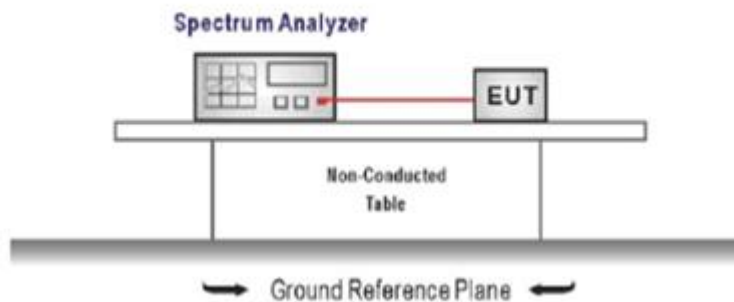

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = channel center frequency
Span $\geq 1.5 \times \text{OBW}$
RBW = 1%~5%OBW
VBW $\geq 3 \times \text{RBW}$
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA


Refer to the appendix report

5.7. Duty Cycle

LIMIT

N/A

TEST CONFIGURATION

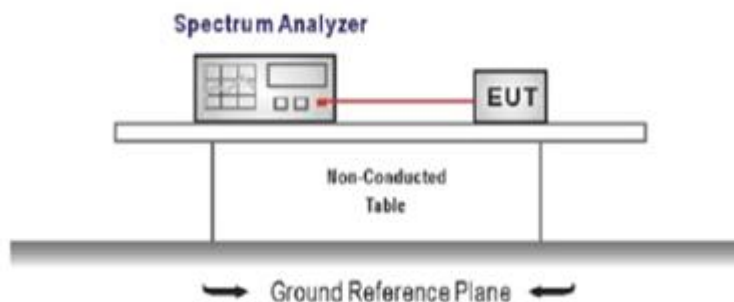

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span=zero span, Frequency=centered channel, RBW= 1 MHz, VBW \geq RBW
Sweep=as necessary to capture the entire dwell time,
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

TEST MODE

Refer to the clause 4.2

TEST DATA


Refer to the appendix report

5.8. Conducted Band edge and Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

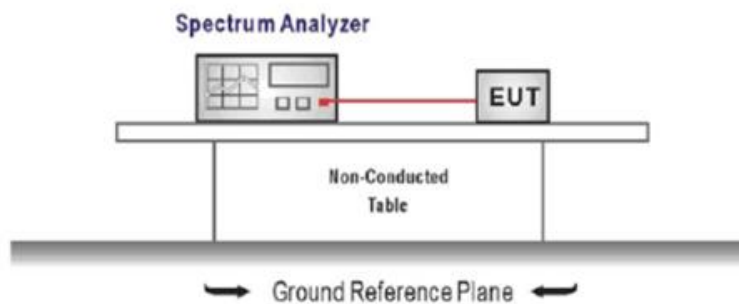

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report


5.9. Radiated Band edge Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

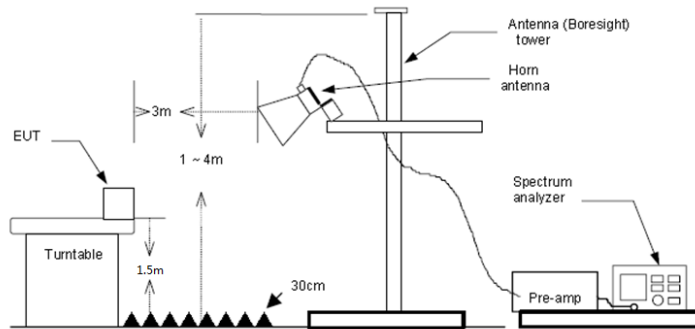

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level– Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	40.64	27.86	4.01	37.55	34.96	74.00	-39.04	Peak
2	2390.03	40.37	27.54	4.31	37.55	34.67	74.00	-39.33	Peak

Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	40.64	27.86	4.01	37.55	34.96	74.00	-39.04	Peak
2	2333.40	45.06	27.77	4.07	37.61	39.29	74.00	-34.71	Peak
3	2390.03	40.37	27.54	4.31	37.55	34.67	74.00	-39.33	Peak

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	43.64	27.33	4.18	37.64	37.51	74.00	-36.49	Peak
2	2500.00	40.57	27.30	4.19	37.67	34.39	74.00	-39.61	Peak

Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	43.28	27.33	4.18	37.64	37.15	74.00	-36.85	Peak
2	2500.00	41.22	27.30	4.19	37.67	35.04	74.00	-38.96	Peak

5.10. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + $40 \cdot \log(300/3)$ = Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m + $40 \cdot \log(30/3)$ = Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

- 9 kHz ~ 30 MHz

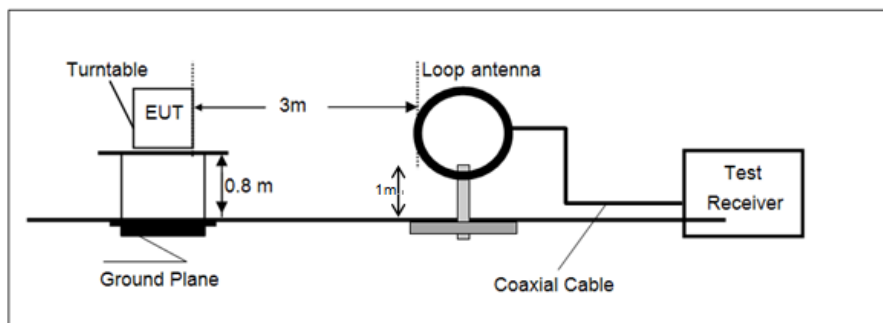

- 30 MHz ~ 1 GHz

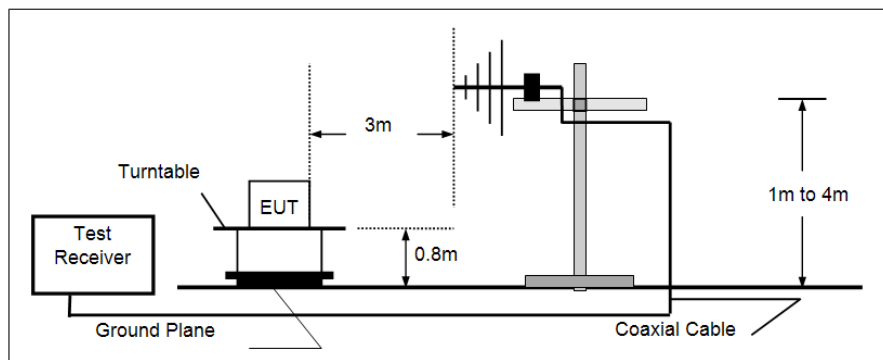

- Above 1 GHz

For 9 kHz ~ 30 MHz


The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

For 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found CH39 which it was worst case, so only show the worst case's data on this report.

Polarization:


Horizontal

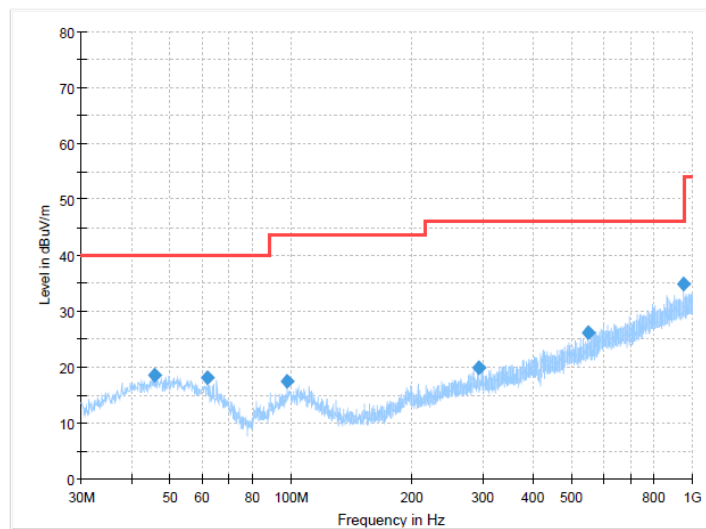**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.7625	18.62	40.00	21.38	300.0	H	0.0	-8.8
61.7675	18.18	40.00	21.82	100.0	H	60.0	-10.4
97.7788	17.48	43.50	26.02	100.0	H	0.0	-11.1
294.2038	19.79	46.00	26.21	100.0	H	72.0	-7.5
550.5263	26.08	46.00	19.92	300.0	H	222.0	-0.9
948.4688	34.95	46.00	11.05	300.0	H	0.0	7.1

Polarization:

Vertical

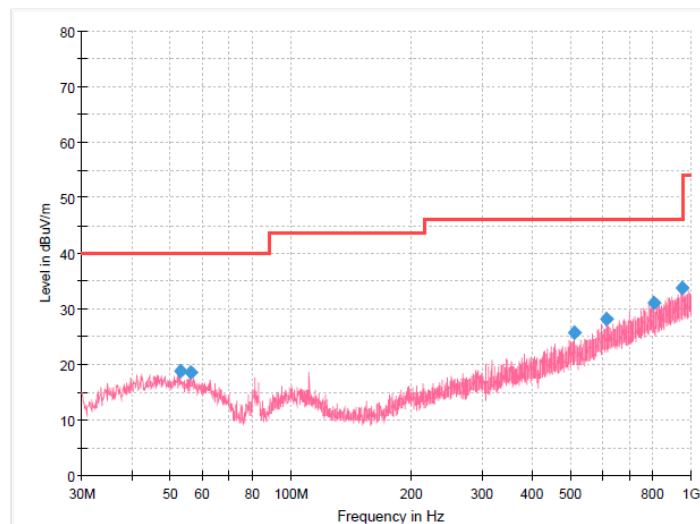**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
52.7950	18.70	40.00	21.30	100.0	V	229.0	-8.9
56.1900	18.55	40.00	21.45	100.0	V	349.0	-9.1
509.4225	25.73	46.00	20.27	100.0	V	79.0	-1.8
616.4863	28.13	46.00	17.87	100.0	V	79.0	1.3
806.0000	31.06	46.00	14.94	100.0	V	79.0	4.8
948.5900	33.73	46.00	12.27	100.0	V	268.0	7.1

For 1 GHz ~ 25 GHz

Test channel		CH00			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3570.71	40.16	29.24	5.13	37.32	37.21	74.00	-36.79	Peak
2	4809.50	45.35	31.28	6.00	35.88	46.75	74.00	-27.25	Peak
3	6974.36	38.98	35.00	7.34	34.15	47.17	74.00	-26.83	Peak
4	11197.71	36.46	40.00	10.14	36.00	50.60	74.00	-23.40	Peak
Test channel		CH00			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	4809.50	42.75	31.28	6.00	35.88	44.15	74.00	-29.85	Peak
2	6974.36	39.03	35.00	7.34	34.15	47.22	74.00	-26.78	Peak
3	9784.47	35.81	39.30	9.48	33.44	51.15	74.00	-22.85	Peak
4	11515.68	35.32	40.47	10.37	36.16	50.00	74.00	-24.00	Peak

Test channel		CH19			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3570.71	40.44	29.24	5.13	37.32	37.49	74.00	-36.51	Peak
2	4883.52	47.00	31.20	6.21	35.97	48.44	74.00	-25.56	Peak
3	6992.14	38.86	35.07	7.34	34.22	47.05	74.00	-26.95	Peak
4	9759.59	35.89	39.30	9.46	33.66	50.99	74.00	-23.01	Peak
Test channel		CH19			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3963.52	40.85	29.73	5.54	36.80	39.32	74.00	-34.68	Peak
2	4883.52	45.10	31.20	6.21	35.97	46.54	74.00	-27.46	Peak
3	6851.19	39.80	34.40	7.29	34.05	47.44	74.00	-26.56	Peak
4	9784.47	35.58	39.30	9.48	33.44	50.92	74.00	-23.08	Peak

Test channel		CH39			Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3080.60	42.57	28.72	4.64	37.38	38.55	74.00	-35.45	Peak
2	4933.50	39.73	31.20	6.05	35.79	41.19	74.00	-32.81	Peak
3	6956.63	38.95	34.93	7.35	34.16	47.07	74.00	-26.93	Peak
4	9784.47	34.82	39.30	9.48	33.44	50.16	74.00	-23.84	Peak
Test channel		CH39			Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2980.33	42.40	28.50	4.75	37.46	38.19	74.00	-35.81	Peak
2	5762.24	39.70	31.92	6.66	35.22	43.06	74.00	-30.94	Peak
3	6992.14	38.77	35.07	7.34	34.22	46.96	74.00	-27.04	Peak
4	9784.47	34.60	39.30	9.48	33.44	49.94	74.00	-24.06	Peak

6. TEST SETUP PHOTOS

Radiated Emission






7. EXTERNAL AND INTERNAL PHOTOS

7.1. External Photos










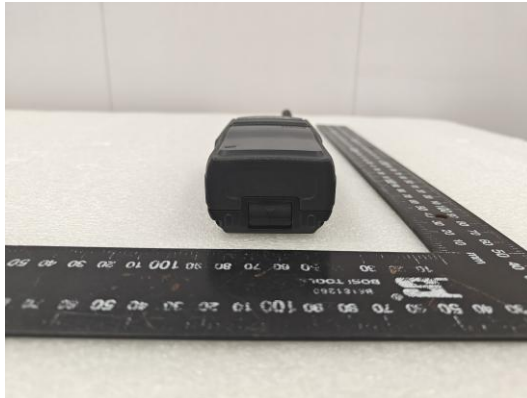



7.2. Internal Photos

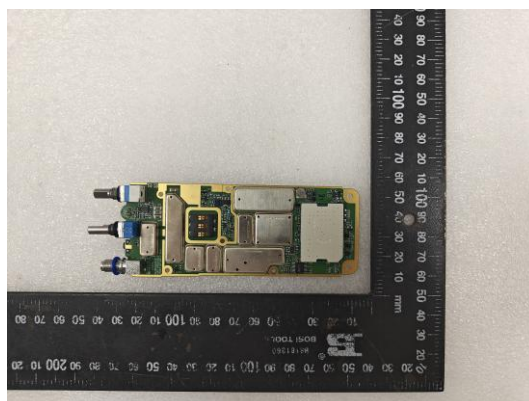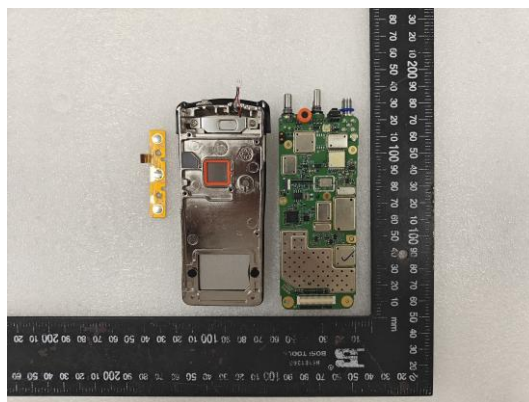

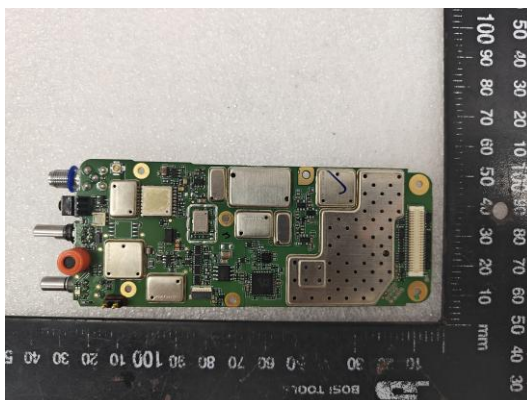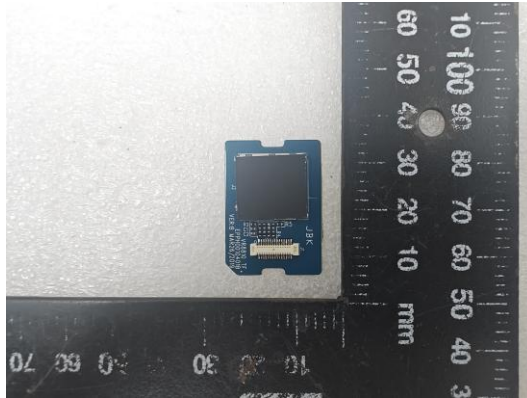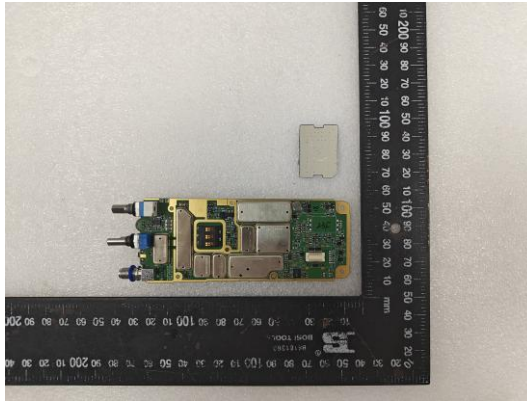

8. APPENDIX REPORT




APPENDIX REPORT

Project No.	SHT2304024504EW	Radio Specification	Bluetooth BLE
Test sample No.	YPHT23040245005	Model No.	EP8100 VHF
Start test date	2023/9/5	Finish date	2023/9/19
Temperature	23.9℃	Humidity	47%
Test Engineer	<i>Casper Chen</i>	Auditor	<i>Xiaodong Zhao</i>

Appendix clause	Test item	Result
A	Peak Output Power	PASS
B	Power Spectral Density	PASS
C	6 dB Bandwidth	PASS
D	99% Occupied Bandwidth	PASS
E	Duty cycle	PASS
F	Band edge and Spurious Emissions (conducted)	PASS

Appendix A: Peak Output Power

Type	Channel	Peak Output power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
BT-BLE	00	4.58	4.57	≤ 30.00	Pass
	19	2.98	2.97		
	39	4.01	3.99		

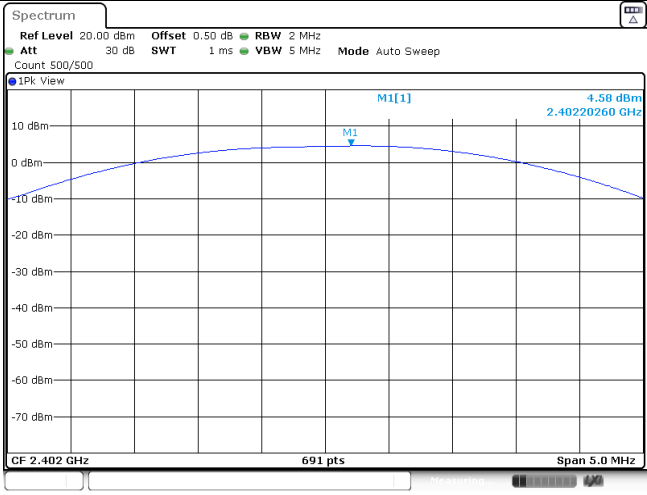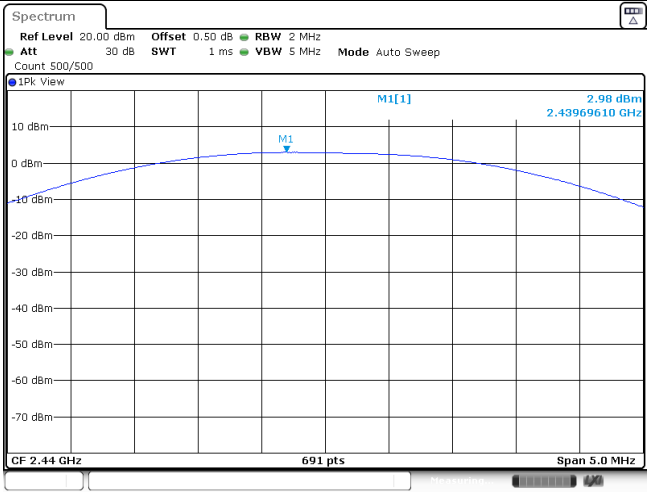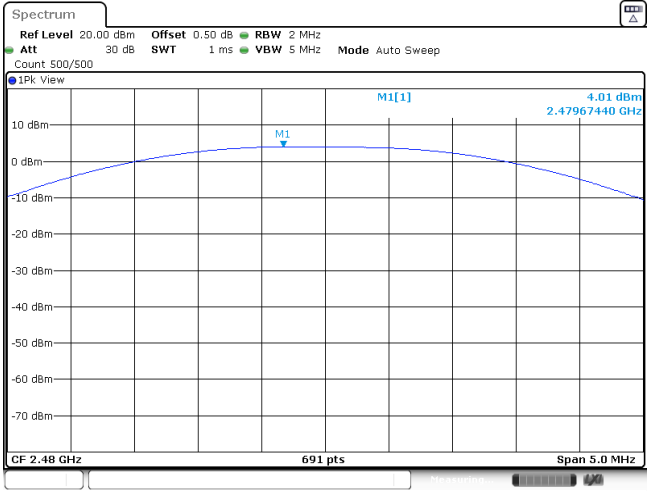CH00	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 0.50 dB RBW 2 MHz Att 30 dB SWT 1 ms VBW 5 MHz Mode Auto Sweep Count 500/500</p> <p>IPk View</p> <p>M1[1] 4.58 dBm 2.40220260 GHz</p> <p>CF 2.402 GHz 691 pts Span 5.0 MHz</p> <p>Date: 19 SEP 2023 09:33:20</p>
CH19	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 0.50 dB RBW 2 MHz Att 30 dB SWT 1 ms VBW 5 MHz Mode Auto Sweep Count 500/500</p> <p>IPk View</p> <p>M1[1] 2.98 dBm 2.43969610 GHz</p> <p>CF 2.44 GHz 691 pts Span 5.0 MHz</p> <p>Date: 19 SEP 2023 09:35:19</p>
CH39	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 0.50 dB RBW 2 MHz Att 30 dB SWT 1 ms VBW 5 MHz Mode Auto Sweep Count 500/500</p> <p>IPk View</p> <p>M1[1] 4.01 dBm 2.47967440 GHz</p> <p>CF 2.48 GHz 691 pts Span 5.0 MHz</p> <p>Date: 19 SEP 2023 09:37:09</p>

Appendix B: Power Spectral Density

Type	Channel	Power Spectral Density(dBm/3KHz)	Limit (dBm/3KHz)	Result
BT-BLE	00	-11.65	≤8.00	Pass
	19	-13.18		
	39	-11.99		

CH00	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm</div><div>Offset 0.50 dB</div><div>RBW 3 kHz</div><div>Att 30 dB</div><div>SWT 632.3 μs</div><div>VBW 10 kHz</div><div>Mode Auto FFT</div><div>Count 100/100</div></div><div><div>IPk Max</div><div><div>M1</div><div>M1[1]</div><div>-11.65 dBm</div><div>2.40186690 GHz</div></div></div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div>CF 2.402 GHz</div><div>691 pts</div><div>Span 1.0 MHz</div></div><div>Date: 19.05.2023 09:33:04</div></div>
CH19	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm</div><div>Offset 0.50 dB</div><div>RBW 3 kHz</div><div>Att 30 dB</div><div>SWT 632.3 μs</div><div>VBW 10 kHz</div><div>Mode Auto FFT</div><div>Count 100/100</div></div><div><div>IPk Max</div><div><div>M1</div><div>M1[1]</div><div>-13.18 dBm</div><div>2.43986690 GHz</div></div></div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div>CF 2.44 GHz</div><div>691 pts</div><div>Span 1.0 MHz</div></div><div>Date: 19.05.2023 09:35:04</div></div>
CH39	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm</div><div>Offset 0.50 dB</div><div>RBW 3 kHz</div><div>Att 30 dB</div><div>SWT 632.3 μs</div><div>VBW 10 kHz</div><div>Mode Auto FFT</div><div>Count 100/100</div></div><div><div>IPk Max</div><div><div>M1</div><div>M1[1]</div><div>-11.99 dBm</div><div>2.47986690 GHz</div></div></div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div>CF 2.48 GHz</div><div>691 pts</div><div>Span 1.0 MHz</div></div><div>Date: 19.05.2023 09:37:23</div></div>



Appendix C: 6dB bandwidth

Type	Channel	6dB Bandwidth(kHz)	Limit (kHz)	Result
BT-BLE	00	714.00	≥500	Pass
	19	708.00		
	39	708.00		

CH00	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm</div><div>Offset 0.50 dB</div><div>RBW 100 kHz</div><div>Att 30 dB</div><div>SWT 19.1 μs</div><div>VBW 300 kHz</div><div>Mode Auto FFT</div><div>Count 500/500</div></div><div><div>1Pk View</div></div><div><div>CF 2.402 GHz</div><div>1001 pts</div><div>Span 2.0 MHz</div></div><div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.401644 GHz</td><td>-1.80 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.402002 GHz</td><td>4.26 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>714.0 kHz</td><td>-0.02 dB</td><td></td><td></td></tr></table></div><div>Date: 19.08.2023 09:33:04</div></div>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.401644 GHz	-1.80 dBm			M2		1	2.402002 GHz	4.26 dBm			D3	M1	1	714.0 kHz	-0.02 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.401644 GHz	-1.80 dBm																									
M2		1	2.402002 GHz	4.26 dBm																									
D3	M1	1	714.0 kHz	-0.02 dB																									
CH19	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm</div><div>Offset 0.50 dB</div><div>RBW 100 kHz</div><div>Att 30 dB</div><div>SWT 19.1 μs</div><div>VBW 300 kHz</div><div>Mode Auto FFT</div><div>Count 500/500</div></div><div><div>1Pk View</div></div><div><div>CF 2.44 GHz</div><div>1001 pts</div><div>Span 2.0 MHz</div></div><div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.439632 GHz</td><td>-3.41 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.440002 GHz</td><td>2.60 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>708.0 kHz</td><td>-0.03 dB</td><td></td><td></td></tr></table></div><div>Date: 19.08.2023 09:35:04</div></div>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.439632 GHz	-3.41 dBm			M2		1	2.440002 GHz	2.60 dBm			D3	M1	1	708.0 kHz	-0.03 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.439632 GHz	-3.41 dBm																									
M2		1	2.440002 GHz	2.60 dBm																									
D3	M1	1	708.0 kHz	-0.03 dB																									
CH39	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm</div><div>Offset 0.50 dB</div><div>RBW 100 kHz</div><div>Att 30 dB</div><div>SWT 19.1 μs</div><div>VBW 300 kHz</div><div>Mode Auto FFT</div><div>Count 500/500</div></div><div><div>1Pk View</div></div><div><div>CF 2.48 GHz</div><div>1001 pts</div><div>Span 2.0 MHz</div></div><div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.479636 GHz</td><td>-2.15 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.479998 GHz</td><td>3.86 dBm</td><td></td><td></td></tr><tr><td>D3</td><td>M1</td><td>1</td><td>708.0 kHz</td><td>-0.07 dB</td><td></td><td></td></tr></table></div><div>Date: 19.08.2023 09:36:53</div></div>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.479636 GHz	-2.15 dBm			M2		1	2.479998 GHz	3.86 dBm			D3	M1	1	708.0 kHz	-0.07 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.479636 GHz	-2.15 dBm																									
M2		1	2.479998 GHz	3.86 dBm																									
D3	M1	1	708.0 kHz	-0.07 dB																									


Appendix D: 99% Occupied Bandwidth

Type	Channel	99% Occupied Bandwidth(MHz)	Limit (kHz)	Result
BT-BLE	00	1.02	-	Pass
	19	1.02		
	39	1.02		

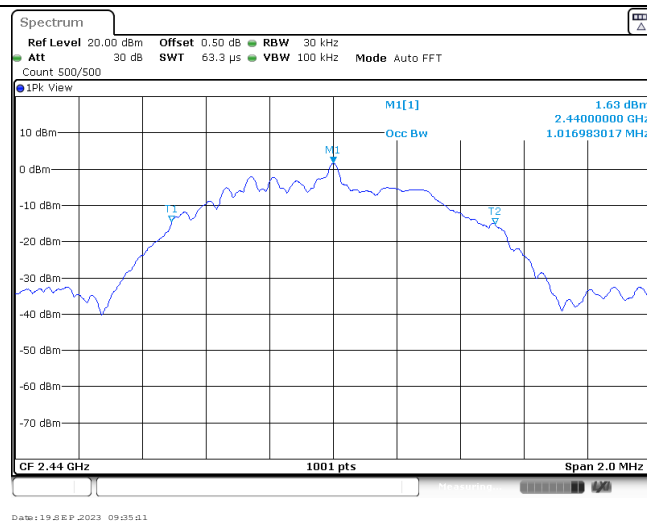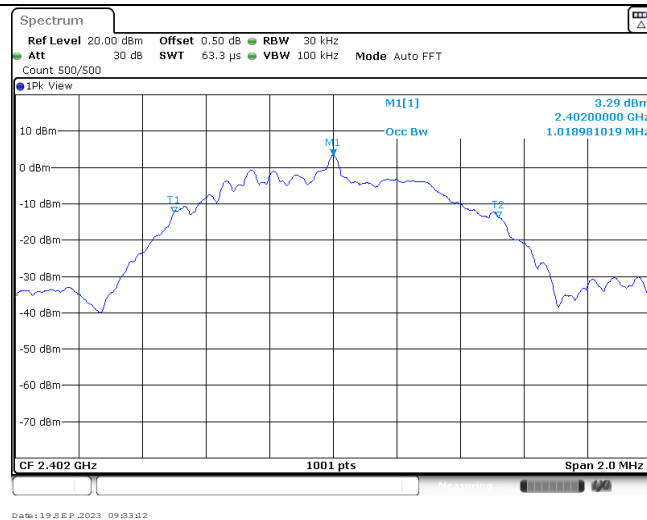

Appendix E: Duty cycle

Test Frequency (MHz)	T _{on} time for single burst (ms)	T _{period} (ms)	Duty cycle	1/T _{on} time (kHz)
2440	0.41	0.65	0.63	2.44

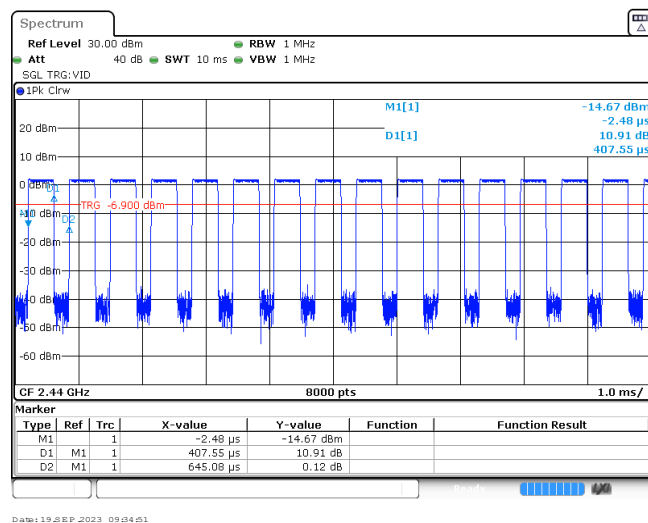


Appendix F: Band edge and Spurious Emissions (conducted)


Test Item:	Band edge																																										
CH00	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm Att 30 dB Count 300/300</div><div>Offset 0.50 dB SWT 1.1 ms RBW 100 kHz VBW 300 kHz Mode Auto Sweep</div></div><div><div>1Pk Max</div><div><div>M1[1] 3.78 dBm 2.402040 GHz</div><div>M2[1] -42.67 dBm 2.400000 GHz</div><div>D1 -16.220 dBm</div><div>M3</div><div>M4</div><div>M5</div></div><div>Start 2.31 GHz 691 pts Stop 2.405 GHz</div></div><div><div>Marker</div><table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.40204 GHz</td><td>3.78 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-42.67 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-55.08 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-53.70 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.398804 GHz</td><td>-46.46 dBm</td><td></td><td></td></tr></tbody></table></div><div>Date: 19 SEP 2023 09:33:44</div></div>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40204 GHz	3.78 dBm			M2	1		2.4 GHz	-42.67 dBm			M3	1		2.39 GHz	-55.08 dBm			M4	1		2.31 GHz	-53.70 dBm			M5	1		2.398804 GHz	-46.46 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																					
M1	1		2.40204 GHz	3.78 dBm																																							
M2	1		2.4 GHz	-42.67 dBm																																							
M3	1		2.39 GHz	-55.08 dBm																																							
M4	1		2.31 GHz	-53.70 dBm																																							
M5	1		2.398804 GHz	-46.46 dBm																																							
CH39	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm Att 30 dB Count 100/100</div><div>Offset 0.50 dB SWT 56.9 μs RBW 100 kHz VBW 300 kHz Mode Auto FFT</div></div><div><div>1Pk Max</div><div><div>M1[1] 3.83 dBm 2.4799900 GHz</div><div>M2[1] -46.66 dBm 2.4835000 GHz</div><div>D1 -16.170 dBm</div><div>M3</div><div>M4</div></div><div>Start 2.478 GHz 691 pts Stop 2.5 GHz</div></div><div><div>Marker</div><table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.47999 GHz</td><td>3.83 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-46.66 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-58.74 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4835159 GHz</td><td>-48.23 dBm</td><td></td><td></td></tr></tbody></table></div><div>Date: 19 SEP 2023 09:37:32</div></div>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.47999 GHz	3.83 dBm			M2	1		2.4835 GHz	-46.66 dBm			M3	1		2.5 GHz	-58.74 dBm			M4	1		2.4835159 GHz	-48.23 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																					
M1	1		2.47999 GHz	3.83 dBm																																							
M2	1		2.4835 GHz	-46.66 dBm																																							
M3	1		2.5 GHz	-58.74 dBm																																							
M4	1		2.4835159 GHz	-48.23 dBm																																							

Appendix report page: 12 of 14


CH19
Reference level

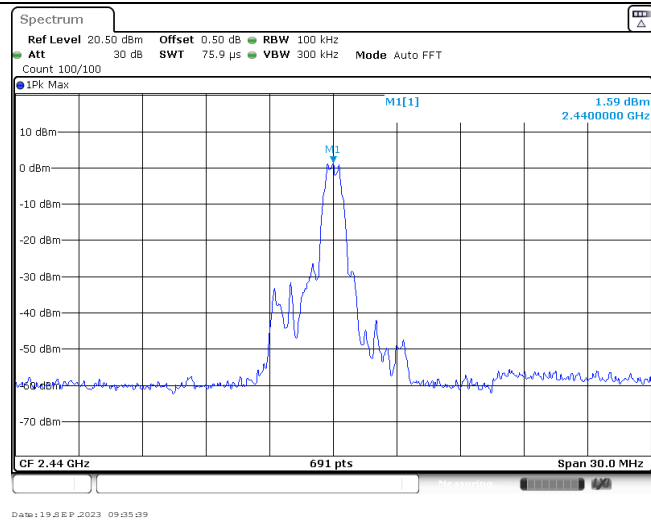


CH19
30MHz~1000MHz

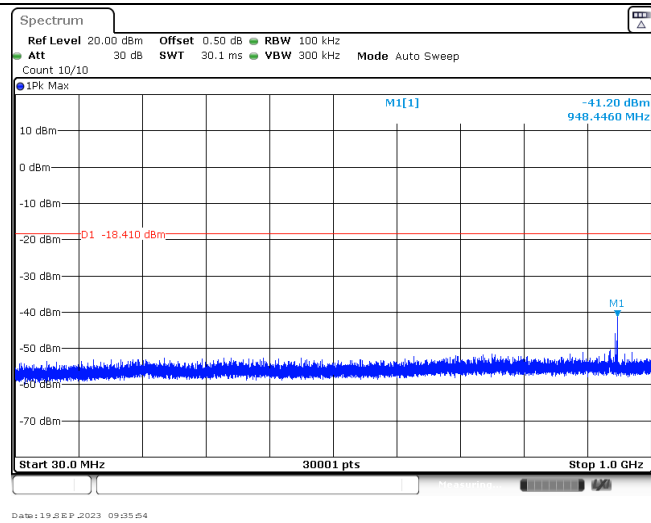


CH19
1GHz~26GHz

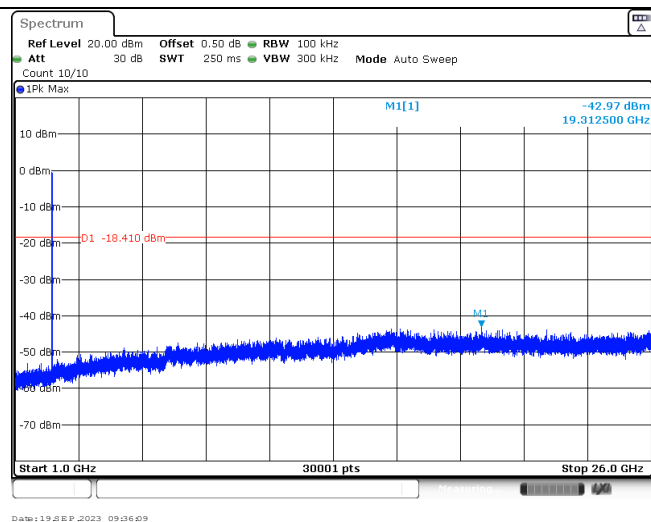


CH39
Reference level

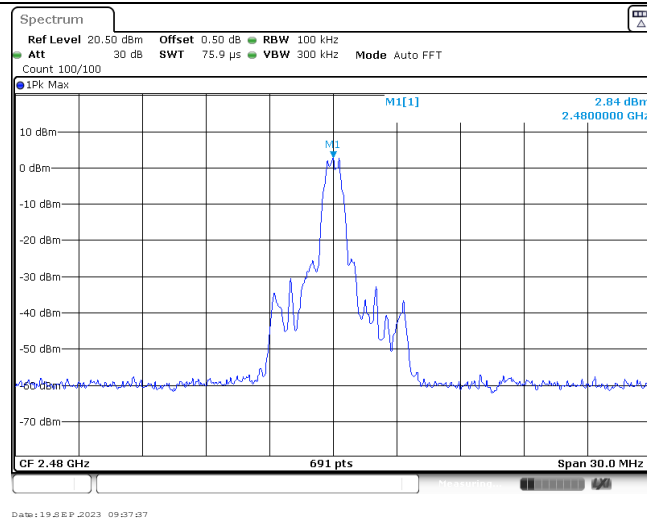

CH39
30MHz~1000MHz

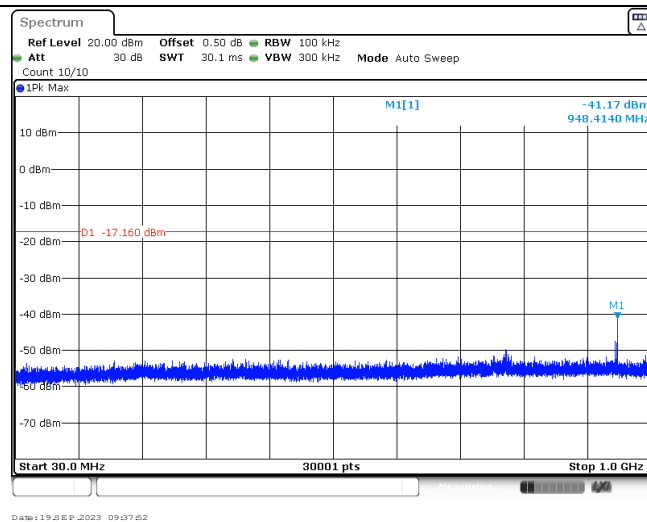

CH39
1GHz~26GHz

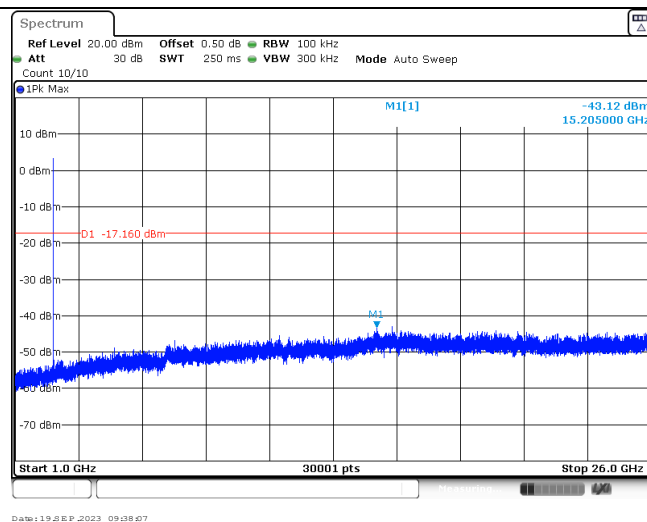

-----End of Report-----