



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC

FCC ID: PY7-88607S

**Report Number: 11783639-S1V1
Issue Date: 8/2/2017**

Prepared for
**SONY MOBILE COMMUNICATIONS INC.
4-12-3 HIGASHI-SHINAGAWA
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
V1	8/2/2017	Initial Issue	--

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	SAR Measurement System.....	7
4.2.	SAR Scan Procedures.....	8
4.3.	Test Equipment.....	10
5.	Measurement Uncertainty.....	11
6.	Device Under Test (DUT) Information	12
6.1.	DUT Description	12
6.2.	Wireless Technologies.....	13
6.3.	Maximum Output Power from Tune-up Procedure	14
6.4.	General LTE SAR Test and Reporting Considerations.....	17
6.5.	LTE Carrier Aggregation	18
6.6.	LTE (TDD) Considerations.....	19
7.	RF Exposure Conditions (Test Configurations)	20
8.	Dielectric Property Measurements & System Check	22
8.1.	Dielectric Property Measurements	22
8.2.	System Check.....	25
9.	Conducted Output Power Measurements.....	27
9.1.	GSM	27
9.2.	W-CDMA	30
9.3.	LTE.....	35
9.4.	LTE Carrier Aggregation	46
9.5.	Wi-Fi 2.4GHz (DTS Band)	47
9.6.	Wi-Fi 5GHz (U-NII Bands).....	48
9.7.	Bluetooth	49
10.	Measured and Reported (Scaled) SAR Results.....	50
10.1.	GSM850.....	52
10.2.	GSM1900.....	52
10.3.	W-CDMA Band II.....	52
10.4.	W-CDMA Band IV	53
10.5.	LTE Band 2 (20MHz Bandwidth)	53


10.6.	<i>LTE Band 4 (20MHz Bandwidth)</i>	54
10.7.	<i>LTE Band 12 (10MHz Bandwidth)</i>	54
10.8.	<i>LTE Band 17 (10MHz Bandwidth)</i>	54
10.9.	<i>LTE Band 38 (20MHz Bandwidth)</i>	55
10.10.	<i>LTE Band 41 (20MHz Bandwidth)</i>	55
10.11.	<i>Wi-Fi (DTS Band)</i>	55
10.12.	<i>Wi-Fi (U-NII Band)</i>	56
10.13.	<i>Bluetooth</i>	57
10.14.	<i>Standalone SAR Test Exclusion Considerations & Estimated SAR</i>	57
11.	SAR Measurement Variability	58
12.	Simultaneous Transmission SAR Analysis	59
12.1.	<i>Sum of the 1-g SAR for WWAN & Wi-Fi & BT</i>	60
12.2.	<i>Sum of the 10-g SAR for Wi-Fi 5GHz & BT</i>	60
Appendixes		61
	<i>11783639-S1V1 SAR_App A Setup Photos</i>	61
	<i>11783639-S1V1 SAR_App B System Check Plots</i>	61
	<i>11783639-S1V1 SAR_App C Highest Test Plots</i>	61
	<i>11783639-S1V1 SAR_App D Tissue Ingredients</i>	61
	<i>11783639-S1V1 SAR_App E Probe Cal. Certificates</i>	61
	<i>11783639-S1V1 SAR_App F Dipole Cal. Certificates</i>	61

1. Attestation of Test Results

Applicant Name	SONY MOBILE COMMUNICATIONS INC.			
FCC ID	PY7-88607S			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg)			
	Peak spatial-average(1g of tissue)		Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure	1.6		4	
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	PCE	DTS	NII	DSS
Head	0.215	0.733	0.727	N/A
Body-worn	0.500	0.056	0.098	N/A
Hotspot/Wi-Fi Direct	0.853	0.114	N/A	N/A
Extremity	N/A	N/A	0.304	N/A
Simultaneous TX 1-g	1.392	0.985	1.392	1.177
Simultaneous TX 10-g	N/A	N/A	0.739	0.739
Date Tested	7/12/2017 to 7/28/2017			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By:	Prepared By:
	
David Weaver Program Manager UL Verification Services Inc.	AJ Newcomer Laboratory Engineer UL Verification Services Inc.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures:

- o 248227 D01 802.11 Wi-Fi SAR v02r02
- o 447498 D01 General RF Exposure Guidance v06
- o 447498 D03 Supplement C Cross-Reference v01
- o 648474 D04 Handset SAR v01r03
- o 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- o 865664 D02 RF Exposure Reporting v01r02
- o 941225 D01 3G SAR Procedures v03r01
- o 941225 D05 SAR for LTE Devices v02r05
- o 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- o 941225 D06 Hotspot Mode v02r01
- o 941225 D07 UMPC Mini Tablet v01r02

In addition to the above, the following information was used:

- o [TCB workshop](#) October, 2014; Page 36, RF Exposure Procedures Update (Overlapping LTE Bands)
- o [TCB workshop](#) October, 2014; Page 37, RF Exposure Procedures Update (Other LTE Considerations)
- o [TCB workshop](#) October, 2015; Page 6, RF Exposure Procedures (KDB 941225 D05A)
- o [TCB workshop](#) April, 2016; Page 13, RF Exposure Procedures (LTE Carrier Aggregation)

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

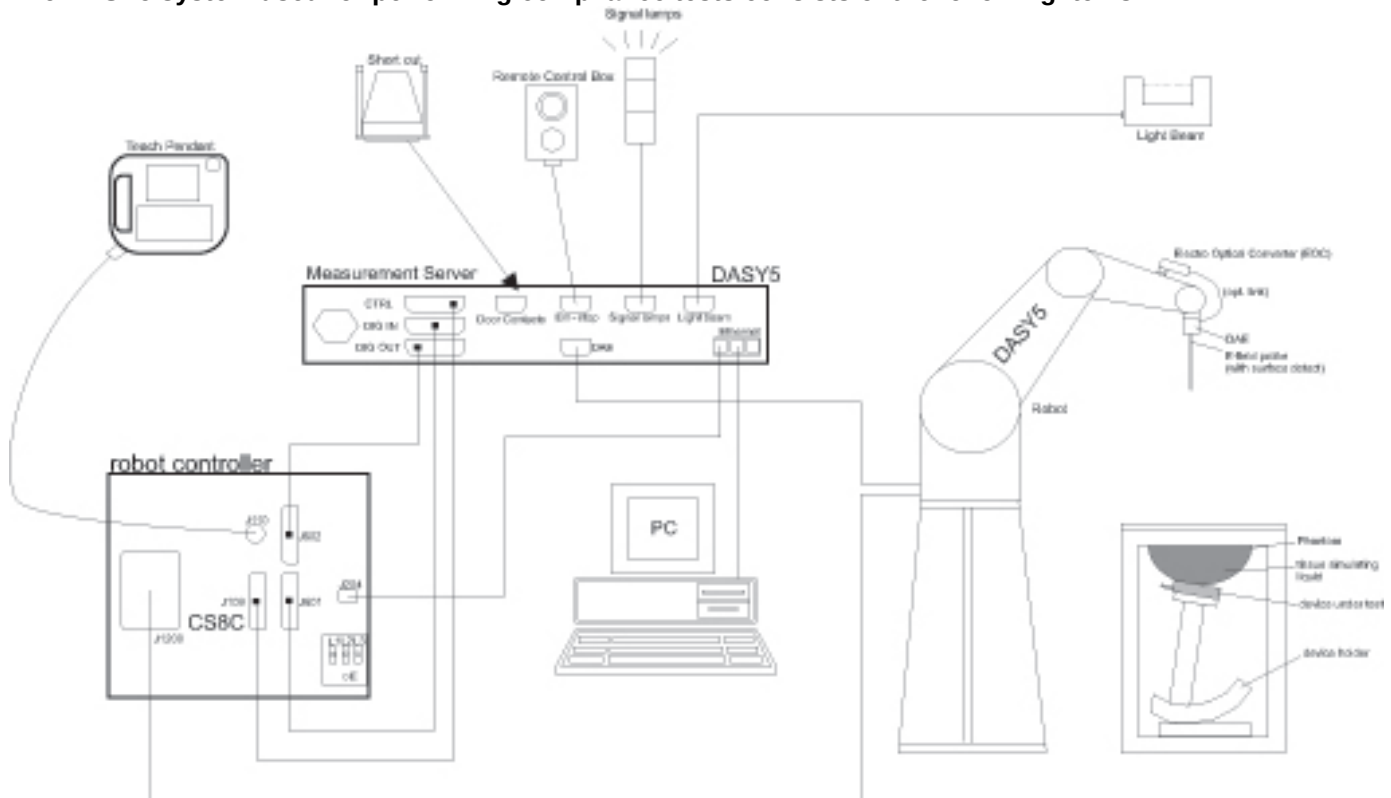
47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
S-Parameter Network Analyzer	Agilent	8753ES	MY40000980	5/10/2018
Dielectric Probe kit	SPEAG	DAK-3.5	1103	2/17/2018
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	11/8/2017
Thermometer	Control Company	Traceable 4242	122529162	11/11/2017
Thermometer (Liquid Check)*	Traceable	15557603	160643192	7/25/2018
Thermometer (Liquid Check)	Traceable	15557603	170024401	12/23/2017

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	N5181A	MY50140610	5/31/2018
Power Meter	Agilent	N1912A	MY50001018	10/11/2017
Power Sensor	Agilent	N1921A	MY52260009	1/5/2018
Power Sensor	Agilent	N1921A	MY53020038	4/13/2018
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2149	N/A
DC Power Supply	BK Precision	1611	215-02292	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab 1)	SPEAG	EX3DV4	3751	11/17/2017
E-Field Probe (SAR Lab 2)	SPEAG	EX3DV4	3991	5/30/2018
E-Field Probe (SAR Lab 3)	SPEAG	EX3DV4	3871	8/25/2017
E-Field Probe (SAR Lab 4)	SPEAG	EX3DV4	3990	3/15/2018
Data Acquisition Electronics (SAR Lab 1)	SPEAG	DAE4	1259	1/20/2018
Data Acquisition Electronics (SAR Lab 2)	SPEAG	DAE4	1433	3/8/2018
Data Acquisition Electronics (SAR Lab 3)	SPEAG	DAE4	1343	8/15/2017
Data Acquisition Electronics (SAR Lab 4)	SPEAG	DAE4	1258	5/12/2018
System Validation Dipole	SPEAG	D750V3	1024	5/12/2018
System Validation Dipole	SPEAG	D835V2	4d117	5/22/2018
System Validation Dipole	SPEAG	D900V2	108	11/8/2017
System Validation Dipole	SPEAG	D1750V2	1053	8/16/2017
System Validation Dipole	SPEAG	D1900V2	5d163	9/16/2017
System Validation Dipole	SPEAG	D1900V2	5d043	11/9/2017
System Validation Dipole	SPEAG	D2450V2	899	3/10/2018
System Validation Dipole	SPEAG	D2600V2	1036	3/10/2018
System Validation Dipole	SPEAG	D5GHzV2	1138	9/22/2017
Thermometer (SAR Lab 1)	EXTECH	445703	80666	4/13/2018
Thermometer (SAR Lab 2)*	Traceable	15557603	160643193	7/25/2017
Thermometer (SAR Lab 3)*	Traceable	15557603	160643167	7/25/2017
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-234	6/14/2018
Thermometer (SAR Lab 4)	Traceable	15557603	170024385	12/23/2017

Note(s):

*Equipment not used past calibration due date.

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY50001018	10/11/2017
Power Sensor	Agilent	N1921A	MY52260009	1/5/2018
Power Sensor	Agilent	N1921A	MY53020038	4/13/2018
Base Station Simulator	R & S	CMW500	135390	4/27/2018
Base Station Simulator	R & S	CMW500	132909	3/14/2018
Base Station Simulator	R & S	CMW500	137876	8/5/2017
Base Station Simulator	Agilent	E5515C	GB47050526	2/21/2018

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 147.9 mm x 73.4 mm Overall Diagonal: 163.1 mm Display Diagonal: 130.85 mm		
Back Cover	☒ The Back Cover is not removable.		
Battery Options	☒ The rechargeable battery is not user accessible.		
Accessory	Headset		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☐ Mobile Hotspot (Wi-Fi 5 GHz)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☐ Wi-Fi Direct (Wi-Fi 5 GHz)		
Test sample information	S/N	Technology	Notes
	BH90004T83	FCC SAR GSM/UMTS	Conducted
	BH90007B83	FCC SAR LTE (LB/MB)	Conducted
	BH90004983	FCC SAR LTE (HB)	Conducted
	BH90005583	WLAN/BT 2.4GHz	Conducted
	BH90005483	WLAN 5GHz	Conducted
	BH9000QK83	SAR GSM/UMTS #1	Radiated
	BH9000GU83	SAR GSM/UMTS #2	Radiated
	BH9000QP83	SAR LTE (LB/MB) #1	Radiated
	BH9000Q883	SAR LTE (LB/MB) #2	Radiated
	BH9000HZ83	SAR LTE (HB) #1	Radiated
	BH9000E483	SAR LTE (HB) #2	Radiated
	BH9000NF83	SAR WLAN/BT 2.4GHz #1	Radiated
	BH9000NV83	SAR WLAN/BT 2.4GHz #2	Radiated
	BH9000EK83	SAR WLAN 5GHz #1	Radiated
	BH9000JP83	SAR WLAN 5GHz #2	Radiated
	BH9000M883	SAR WLAN 5GHz #3	Radiated
Hardware Version	A		
Software Version	0.184		

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: ☐ Class 8 - 1 Up, 4 Down ☐ Class 10 - 2 Up, 4 Down ☐ Class 12 - 4 Up, 4 Down ☒ Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? ☒ Yes ☐ No			
W-CDMA (UMTS)	Band II Band IV	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) DC-HSDPA (Rel. 8) HSPA+ (Rel. 7)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 12 FDD Band 17 TDD Band 38 TDD Band 41	QPSK 16QAM 64QAM ☒ Rel. 11 Carrier Aggregation 2CC (1 Uplink and 2 Downlinks). (Carrier Aggregation is only supported for downlink and not for uplink.)		100% (FDD) 63.3% (TDD)
	Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		100%
	Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No			
	Does this device support Band gap channel(s)? ☒ Yes ☐ No			
Bluetooth	2.4 GHz	Version 5.0 LE		N/A

6.3. Maximum Output Power from Tune-up Procedure

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

RF Air interface	Mode	Time Slots	Max. RF Output Power (dBm)	
			Tune-up Limit	Frame Power
GSM850	Voice/GPRS	1	33.7	24.67
	GPRS	2	32.2	26.18
	GPRS	3	30.2	25.94
	GPRS	4	29.2	26.19
	EGPRS	1	28.0	18.97
	EGPRS	2	26.5	20.48
	EGPRS	3	24.5	20.24
	EGPRS	4	23.6	20.59
GSM1900	Voice/GPRS	1	27.2	18.17
	GPRS	2	25.0	18.98
	GPRS	3	23.8	19.54
	GPRS	4	22.0	18.99
	EGPRS	1	26.0	16.97
	EGPRS	2	24.4	18.38
	EGPRS	3	22.3	18.04
	EGPRS	4	21.5	18.49

RF Air interface	Mode	Time Slots	Max. RF Output Power (dBm)			
			CS		PS	
			Tune-up Limit	Frame Power	Tune-up Limit	Frame Power
DTM GSM850	Voice + GPRS	1	33.7	24.7		
	Voice + GPRS	2	32.2	26.2	32.2	26.2
	Voice + GPRS	3	30.2	25.9	30.2	25.9
	Voice + EGPRS	1	33.7	24.7		
	Voice + EGPRS	2	32.2	26.2	26.5	20.5
	Voice + EGPRS	3	30.2	25.9	23.6	19.3
DTM GSM1900	Voice + GPRS	1	27.2	18.2		
	Voice + GPRS	2	25.0	19.0	25.0	19.0
	Voice + GPRS	3	23.8	19.5	23.8	19.5
	Voice + EGPRS	1	27.2	18.2		
	Voice + EGPRS	2	25.0	19.0	24.4	18.4
	Voice + EGPRS	3	23.8	19.5	22.3	18.0

RF Air interface	Mode		Max. RF Output Power (dBm)
W-CDMA Band II	Release 99		18.5
	HSDPA	Subtest 1/2	18.0
		Subtest 3/4	17.5
	HSUPA	Subtest 1/5	17.7
		Subtest 2/4	16.0
		Subtest 3	17.0
	DC-HSDPA	Subtest 1/2	18.0
		Subtest 3/4	17.5
W-CDMA Band IV	Release 99		20.0
	HSDPA	Subtest 1/2	19.5
		Subtest 3/4	19.0
	HSUPA	Subtest 1/5	19.2
		Subtest 2/4	17.5
		Subtest 3	18.5
	DC-HSDPA	Subtest 1/2	19.5
		Subtest 3/4	19.0

RF Air interface	Mode		Max. RF Output Power (dBm)
LTE Band 2	QPSK		18.5
	16QAM		18.5
	64QAM		18.5
LTE Band 4	QPSK		20.0
	16QAM		20.0
	64QAM		20.0
LTE Band 12	QPSK		25.0
	16QAM		24.0
	64QAM		23.0
LTE Band 17	QPSK		25.0
	16QAM		24.0
	64QAM		23.0
LTE Band 38	QPSK		24.0
	16QAM		24.0
	64QAM		23.0
LTE Band 41	QPSK		24.0
	16QAM		24.0
	64QAM		23.0

RF Air interface	Mode	Channel	Max. RF Output Power (dBm)	
			Chain 0	Chain 1
WiFi 2.4 GHz	802.11b	1-12	15.00	13.80
		13	12.70	12.03
	802.11g	1	8.96	7.85
		2-11	15.00	13.80
		12	10.16	9.41
		13	3.66	2.91
	802.11n HT20	1	8.96	7.85
		2-11	15.00	13.80
		12	9.20	8.37
		13	3.70	2.87
WiFi 5 GHz	802.11a	All	14.50	12.50
	802.11n HT20	All	14.50	12.50
	802.11n HT40	All	14.50	12.50
	802.11ac VHT20	All	14.50	12.50
	802.11ac VHT40	All	14.50	12.50
	802.11ac VHT80	All	14.50	12.50
Bluetooth		Low	10.09	
		Mid	11.83	
		High	11.84	
Bluetooth LE		Low	3.10	
		Mid	5.28	
		High	6.43	

6.4. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4	Frequency range: 1710 - 1755 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 12	Frequency range: 699 – 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 17	Frequency range: 704 - 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23780/ 709	23755/ 706.5		
	Mid			23790/ 710	23790/ 710		
	High			23800/ 711	23825/ 713.5		
	Band 38	Frequency range: 2570 - 2620 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	37850/ 2580	37825/ 2577.5	37800/ 2575	37775/ 2572.5		
	Mid	38000/ 2595	38000/ 2595	38000/ 2595	38000/ 2595		
	High	38150/ 2610	38175/ 2612.5	38200/ 2615	38225/ 2617.5		
	Band 41	Frequency range: 2496 - 2690 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	39750 / 2506.0					
	Low-Mid	40185 / 2549.5					
	Mid	40620 / 2593.0					
	Mid-High	41055 / 2636.5					
	High	41490 / 2680.0					

General LTE SAR Test and Reporting Considerations (Continued)

LTE transmitter and antenna implementation	Refer to Appendix A.																																																														
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3 <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr><tr><td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr><tr><td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr></table> MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing	Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
Power reduction	No																																																														
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														

6.5. LTE Carrier Aggregation

Combination	CA configuration	Bandwidth (MHz)											
		PCC						SCC1					
		20	15	10	5	3	1.4	20	15	10	5	3	1.4
Intra-Band contiguous	41C				√			√					
				√				√					
			√					√	√				
		√						√	√	√	√		

6.6. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special Subframe configurations.

Table 4.2-1: Configuration of Special Subframe (lengths of DwPTS/GP/UpPTS).

Special Subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle and Special Subframe 7.

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required
WWAN	Head	0 mm	Left Touch	N/A	Yes
			Left Tilt (15°)	N/A	Yes
			Right Touch	N/A	Yes
			Right Tilt (15°)	N/A	Yes
	Body-worn	15 mm	Rear	N/A	Yes
			Front	N/A	Yes
	Hotspot	10 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	> 25 mm	No
			Edge 2 (Right)	< 25 mm	Yes
			Edge 3 (Bottom)	< 25 mm	Yes
			Edge 4 (Left)	< 25 mm	Yes
	Extremity	0 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	> 25 mm	No
			Edge 2 (Right)	< 25 mm	Yes
			Edge 3 (Bottom)	< 25 mm	Yes
			Edge 4 (Left)	< 25 mm	Yes
WLAN/BT Main (Chain 0)	Head	0 mm	Left Touch	N/A	Yes
			Left Tilt (15°)	N/A	Yes
			Right Touch	N/A	Yes
			Right Tilt (15°)	N/A	Yes
	Body-worn	15 mm	Rear	N/A	Yes
			Front	N/A	Yes
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	< 25 mm	Yes
			Edge 2 (Right)	> 25 mm	No
			Edge 3 (Bottom)	> 25 mm	No
			Edge 4 (Left)	< 25 mm	Yes
	Extremity	0 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	< 25 mm	Yes
			Edge 2 (Right)	> 25 mm	No
			Edge 3 (Bottom)	> 25 mm	No
			Edge 4 (Left)	< 25 mm	Yes

Notes:

- SAR is not required when the distance from the antenna to the edge is > 25 mm per KDB 941225 D06 Hot Spot SAR.
- When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. When Hotspot Mode is not supported, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

RF Exposure Conditions (Test Configurations) continued:

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required
WLAN Sub (Chain 1)	Head	0 mm	Left Touch	N/A	Yes
			Left Tilt (15°)	N/A	Yes
			Right Touch	N/A	Yes
			Right Tilt (15°)	N/A	Yes
	Body	15 mm	Rear	N/A	Yes
			Front	N/A	Yes
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	< 25 mm	Yes
			Edge 2 (Right)	< 25 mm	Yes
			Edge 3 (Bottom)	> 25 mm	No
			Edge 4 (Left)	> 25 mm	No
	Extremity	0 mm	Rear	< 25 mm	Yes
			Front	< 25 mm	Yes
			Edge 1 (Top)	< 25 mm	Yes
			Edge 2 (Right)	< 25 mm	Yes
			Edge 3 (Bottom)	> 25 mm	No
			Edge 4 (Left)	> 25 mm	No

Notes:

1. SAR is not required when the distance from the antenna to the edge is > 25 mm per KDB 941225 D06 Hot Spot SAR.
2. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg. When Hotspot Mode is not supported, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
1	7/12/2017	1900	Body	1900	51.76	53.30	-2.89	1.48	1.52	-2.37
				1850	51.92	53.30	-2.59	1.45	1.52	-4.87
				1920	51.75	53.30	-2.91	1.50	1.52	-1.25
1	7/15/2017	1900	Head	1900	41.34	40.00	3.35	1.44	1.40	2.79
				1850	41.31	40.00	3.28	1.45	1.40	3.86
				1920	41.15	40.00	2.88	1.45	1.40	3.43
2	7/14/2017	2600	Head	2600	37.52	39.01	-3.82	2.06	1.96	4.99
				2495	37.89	39.14	-3.20	1.92	1.85	3.86
				2690	37.03	38.90	-4.80	2.16	2.06	4.83
2	7/17/2017	2600	Body	2600	51.15	52.51	-2.59	2.23	2.16	3.29
				2495	51.50	52.64	-2.17	2.10	2.01	4.26
				2690	50.72	52.40	-3.20	2.36	2.29	3.05
2	7/27/2017	835	Body	835	56.22	55.20	1.85	0.98	0.97	1.51
				805	56.59	55.33	2.27	0.96	0.97	-0.62
				905	55.98	55.00	1.78	1.08	1.05	2.80
2	7/27/2017	900	Head	900	39.98	41.50	-3.66	0.97	0.97	0.39
				835	40.71	41.50	-1.90	0.91	0.90	1.50
				915	39.78	41.50	-4.14	0.98	0.98	0.47
3	7/12/2017	1750	Body	1750	53.21	53.44	-0.43	1.49	1.49	-0.08
				1710	53.23	53.54	-0.59	1.45	1.46	-0.79
				1755	53.14	53.43	-0.54	1.49	1.49	0.05
3	7/12/2017	750	Head	750	43.05	41.96	2.59	0.83	0.89	-6.60
				695	44.18	42.24	4.58	0.82	0.89	-7.70
				790	42.48	41.76	1.73	0.86	0.90	-3.72
3	7/14/2017	750	Head	750	40.41	41.96	-3.70	0.93	0.89	4.25
				695	41.16	42.24	-2.57	0.87	0.89	-1.74
				790	39.82	41.76	-4.64	0.97	0.90	8.56
3	7/14/2017	750	Body	750	53.25	55.55	-4.13	0.94	0.96	-2.69
				695	54.33	55.76	-2.56	0.93	0.96	-3.21
				790	53.19	55.39	-3.98	0.99	0.97	2.10
3	7/17/2017	1750	Body	1750	51.35	53.44	-3.91	1.45	1.49	-2.50
				1710	51.42	53.54	-3.97	1.41	1.46	-3.87
				1755	51.29	53.43	-4.00	1.45	1.49	-2.37
3	7/18/2017	1750	Head	1750	41.79	40.08	4.25	1.39	1.37	1.24
				1710	41.96	40.15	4.52	1.36	1.35	0.64
				1755	41.80	40.08	4.30	1.39	1.37	1.47

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
3	7/25/2017	5200	Head	5200	35.46	35.99	-1.47	4.63	4.65	-0.54
				5150	35.33	36.05	-1.99	4.59	4.59	0.00
				5350	34.98	35.82	-2.34	4.77	4.80	-0.74
3	7/25/2017	5600	Head	5600	34.71	35.53	-2.32	5.02	5.06	-0.87
				5500	34.82	35.65	-2.32	4.92	4.96	-0.87
				5725	34.55	35.39	-2.38	5.15	5.19	-0.75
3	7/25/2017	5800	Head	5800	34.48	35.30	-2.32	5.22	5.27	-0.89
				5700	34.59	35.42	-2.34	5.14	5.16	-0.48
				5850	34.40	35.30	-2.55	5.26	5.27	-0.25
3	7/26/2017	5800	Body	5800	46.19	48.20	-4.17	6.26	6.00	4.33
				5700	46.22	48.34	-4.39	6.09	5.88	3.53
				5850	46.02	48.20	-4.52	6.28	6.00	4.72
4	7/17/2017	5200	Body	5200	47.79	49.02	-2.51	5.15	5.29	-2.75
				5150	47.86	49.09	-2.50	5.06	5.24	-3.29
				5350	47.55	48.82	-2.59	5.37	5.47	-1.91
4	7/17/2017	5600	Body	5600	47.10	48.48	-2.84	5.69	5.76	-1.23
				5500	47.22	48.61	-2.87	5.51	5.64	-2.43
				5725	46.92	48.31	-2.87	5.87	5.91	-0.59
4	7/17/2017	5800	Body	5800	46.70	48.20	-3.11	5.94	6.00	-1.08
				5700	46.82	48.34	-3.15	5.80	5.88	-1.39
				5850	46.67	48.20	-3.17	6.03	6.00	0.55
4	7/25/2017	2450	Body	2450	54.56	52.70	3.53	2.04	1.95	4.41
				2400	54.64	52.77	3.54	1.97	1.90	3.95
				2480	54.33	52.66	3.17	2.06	1.99	3.36
4	7/25/2017	2450	Head	2450	39.64	39.20	1.12	1.84	1.80	2.44
				2400	39.70	39.30	1.03	1.77	1.75	0.82
				2480	39.52	39.16	0.91	1.86	1.83	1.23
4	7/26/2017	1900	Body	1900	55.01	53.30	3.21	1.55	1.52	2.11
				1850	54.85	53.30	2.91	1.54	1.52	1.18
				1920	54.63	53.30	2.50	1.50	1.52	-1.45

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 $\pm$ 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be $\geq$ 15.0 cm for SAR measurements $\leq$ 3 GHz and $\geq$ 10.0 cm for measurements $>$ 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab	Date	Tissue Type	Dipole Type Serial #	Dipole Cal. Due Date	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
1	7/12/2017	Body	D1900V2 SN:5d163	9/19/2017	3.900	39.00	39.60	-1.52	2.050	20.50	21.00	-2.38	1,2
1	7/15/2017	Head	D1900V2 SN:5d043	11/9/2017	4.240	42.40	40.00	6.00	2.190	21.90	20.90	4.78	3,4
2	7/14/2017	Head	D2600V2 SN:1036	3/10/2018	6.280	62.80	57.50	9.22	2.750	27.50	25.60	7.42	5,6
2	7/17/2017	Body	D2600V2 SN:1036	3/10/2018	5.950	59.50	54.60	8.97	2.590	25.90	24.50	5.71	
2	7/27/2017	Body	D835V2 SN:4d117	5/22/2018	1.030	10.30	10.39	-0.87	0.676	6.76	6.76	0.00	7,8
2	7/27/2017	Head	D900V2 SN:108	11/8/2017	1.070	10.70	10.80	-0.93	0.688	6.88	6.94	-0.86	9,10
3	7/12/2017	Body	D1750V2 SN:1053	8/16/2017	3.770	37.70	37.40	0.80	2.020	20.20	19.70	2.54	
3	7/12/2017	Head	D750V3 SN:1024	5/12/2018	0.792	7.92	8.47	-6.49	0.525	5.25	5.53	-5.06	11,12
3	7/14/2017	Body	D750V3 SN:1024	5/12/2018	0.864	8.64	8.59	0.58	0.576	5.76	5.65	1.95	
3	7/17/2017	Body	D1750V2 SN:1053	8/16/2017	3.720	37.20	37.40	-0.53	1.990	19.90	19.70	1.02	
3	7/18/2017	Head	D1750V2 SN:1053	8/16/2017	3.540	35.40	37.40	-5.35	1.870	18.70	19.70	-5.08	13,14
3	7/25/2017	Head	D5GHzV2 SN:1138 (5.2 GHz)	9/22/2017	7.690	76.90	78.30	-1.79	2.200	22.00	22.40	-1.79	
3	7/25/2017	Head	D5GHzV2 SN:1138 (5.6 GHz)	9/22/2017	7.930	79.30	82.30	-3.65	2.270	22.70	23.50	-3.40	
3	7/25/2017	Head	D5GHzV2 SN:1138 (5.8 GHz)	9/22/2017	7.280	72.80	79.40	-8.31	2.100	21.00	22.70	-7.49	15,16
3	7/26/2017	Body	D5GHzV2 SN:1138 (5.8 GHz)	9/22/2017	7.700	77.00	75.70	1.72	2.180	21.80	21.10	3.32	
4	7/17/2017	Body	D5GHzV2 SN:1138 (5.2 GHz)	9/22/2017	7.450	74.50	74.20	0.40	2.090	20.90	20.90	0.00	
4	7/18/2017	Body	D5GHzV2 SN:1138 (5.6 GHz)	9/22/2017	8.460	84.60	78.80	7.36	2.350	23.50	22.00	6.82	17,18
4	7/18/2017	Body	D5GHzV2 SN:1138 (5.8 GHz)	9/22/2017	7.860	78.60	75.70	3.83	2.180	21.80	21.10	3.32	
4	7/25/2017	Body	D2450V2 SN:899	3/10/2018	5.420	54.20	50.30	7.75	2.510	25.10	23.70	5.91	19,20
4	7/25/2017	Head	D2450V2 SN:899	3/10/2018	5.620	56.20	52.60	6.84	2.540	25.40	24.60	3.25	
4	7/26/2017	Body	D1900V2 SN:5d163	9/19/2017	4.030	40.30	39.60	1.77	2.130	21.30	21.00	1.43	21,22

9. Conducted Output Power Measurements

9.1. GSM

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Meas. Avg Pwr	
						Burst (dBm)	Frame (dBm)
850	GPRS (GMSK)	CS4	1	128	824.2	33.4	24.4
				190	836.6	33.4	24.4
				251	848.8	33.4	24.4
			2	128	824.2	31.7	25.7
				190	836.6	31.7	25.7
				251	848.8	31.7	25.6
			3	128	824.2	29.7	25.4
				190	836.6	29.7	25.4
				251	848.8	29.6	25.4
			4	128	824.2	28.5	25.5
				190	836.6	28.6	25.5
				251	848.8	28.5	25.5
	EGPRS (8PSK)	MCS9	1	128	824.2	27.3	18.3
				190	836.6	27.3	18.3
				251	848.8	27.2	18.2
			2	128	824.2	25.0	19.0
				190	836.6	25.2	19.1
				251	848.8	25.1	19.1
			3	128	824.2	23.2	18.9
				190	836.6	23.1	18.9
				251	848.8	23.0	18.7
			4	128	824.2	22.2	19.2
				190	836.6	22.3	19.3
				251	848.8	22.1	19.1

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 4 time slots, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4\text{db}$ higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is $\leq 1.2\text{W/kg}$.

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max. Meas. Avg Pwr	
						Burst (dBm)	Frame (dBm)
1900	GPRS (GMSK)	CS4	1	512	1850.2	26.4	17.4
				661	1880.0	26.6	17.6
				810	1909.8	26.6	17.6
			2	512	1850.2	24.0	18.0
				661	1880.0	24.2	18.2
				810	1909.8	24.6	18.6
			3	512	1850.2	23.0	18.7
				661	1880.0	23.2	18.9
				810	1909.8	23.3	19.0
			4	512	1850.2	21.4	18.4
				661	1880.0	21.4	18.4
				810	1909.8	21.6	18.6
	EGPRS (8PSK)	MCS9	1	512	1850.2	26.0	16.9
				661	1880.0	26.0	16.9
				810	1909.8	25.9	16.9
			2	512	1850.2	23.7	17.7
				661	1880.0	23.8	17.8
				810	1909.8	23.9	17.9
			3	512	1850.2	22.2	18.0
				661	1880.0	22.3	18.0
				810	1909.8	22.3	18.0
			4	512	1850.2	21.1	18.1
				661	1880.0	21.2	18.1
				810	1909.8	21.2	18.2

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 3 time slots, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4\text{db}$ higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is $\leq 1.2\text{W/kg}$.

GSM850 DTM Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Meas. Avg Pwr			
						CS		PS	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)
850	GSM(Voice) + GPRS(GMSK)	CS4	1	128	824.2	33.4	24.4		
				190	836.6	33.4	24.4		
				251	848.8	33.4	24.4		
			2	128	824.2	31.6	25.6	31.7	25.6
				190	836.6	31.6	25.6	31.7	25.6
				251	848.8	31.6	25.6	31.6	25.6
			3	128	824.2	29.7	25.4	29.7	25.4
				190	836.6	29.6	25.4	29.7	25.4
				251	848.8	29.6	25.3	29.6	25.3
	GSM(Voice) + EGPRS(8PSK)	MCS9	1	128	824.2	33.4	24.4		
				190	836.6	33.4	24.4		
				251	848.8	33.4	24.4		
			2	128	824.2	31.7	25.7	24.7	18.7
				190	836.6	31.7	25.7	24.7	18.6
				251	848.8	31.7	25.6	24.6	18.6
			3	128	824.2	29.8	25.5	22.7	18.4
				190	836.6	29.8	25.5	22.7	18.4
				251	848.8	29.8	25.5	22.6	18.3

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) with 1 time slot + GMSK(GPRS) mode with 1 time slot, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for GSM(Voice) + EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4\text{db}$ higher than that of GSM(Voice) + GMSK (GPRS) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GMSK (GPRS) is $\leq 1.2\text{W/kg}$.

GSM1900 DTM Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Max Meas. Avg Pwr			
						CS		PS	
						Burst (dBm)	Frame (dBm)	Burst (dBm)	Frame (dBm)
1900	GSM(Voice) + GPRS(GMSK)	CS4	1	512	1850.2	26.4	17.4		
				661	1880.0	26.6	17.6		
				810	1909.8	26.6	17.6		
			2	512	1850.2	23.7	17.7	24.0	18.0
				661	1880.0	23.8	17.8	24.1	18.1
				810	1909.8	23.9	17.9	24.1	18.1
			3	512	1850.2	22.8	18.5	23.0	18.7
				661	1880.0	22.8	18.5	23.1	18.8
				810	1909.8	22.9	18.6	23.1	18.8
	GSM(Voice) + EGPRS(8PSK)	MCS9	1	512	1850.2	26.4	17.4		
				661	1880.0	26.6	17.6		
				810	1909.8	26.6	17.6		
			2	512	1850.2	23.8	17.8	23.7	17.7
				661	1880.0	23.9	17.9	23.7	17.7
				810	1909.8	24.0	18.0	23.8	17.8
			3	512	1850.2	22.8	18.5	21.8	17.5
				661	1880.0	22.9	18.6	21.8	17.5
				810	1909.8	23.0	18.7	22.0	17.7

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GSM(Voice) with 1 time slot + GMSK(GPRS) mode with 2 time slots, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for GSM(Voice) + EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4\text{db}$ higher than that of GSM(Voice) + GMSK (GPRS) mode or the adjusted SAR of the highest reported SAR of GSM(Voice) + GMSK (GPRS) is $\leq 1.2\text{W/kg}$.

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in Table C.11.1.3 of 3GPP TS 34.121-1 v13. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

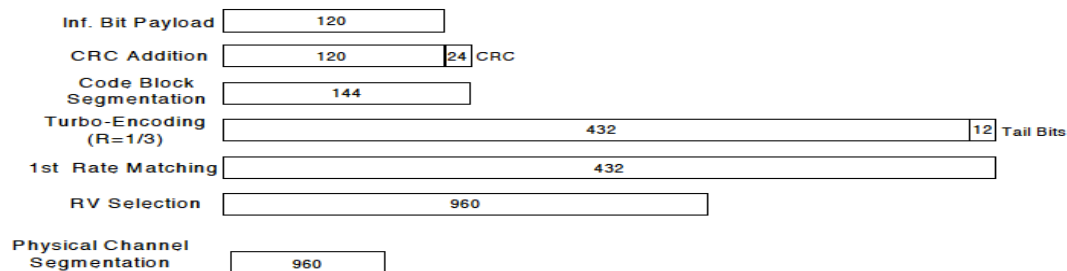
Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., Rel. 7 Therefore, the RF conducted power is not measured.

W-CDMA Band II Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Meas. Avg Pwr (dBm)
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	18.1
			9400	1880.0	N/A	18.0
			9538	1907.6	N/A	18.0
	HSDPA	Subtest 1	9262	1852.4	0	17.2
			9400	1880.0	0	17.2
			9538	1907.6	0	17.0
		Subtest 2	9262	1852.4	0	17.2
			9400	1880.0	0	17.1
			9538	1907.6	0	17.1
		Subtest 3	9262	1852.4	0.5	16.9
			9400	1880.0	0.5	16.5
			9538	1907.6	0.5	16.6
		Subtest 4	9262	1852.4	0.5	16.9
			9400	1880.0	0.5	16.5
			9538	1907.6	0.5	16.6
	HSUPA	Subtest 1	9262	1852.4	0	17.3
			9400	1880.0	0	17.3
			9538	1907.6	0	17.2
		Subtest 2	9262	1852.4	2	15.3
			9400	1880.0	2	15.3
			9538	1907.6	2	15.1
		Subtest 3	9262	1852.4	1	16.4
			9400	1880.0	1	16.2
			9538	1907.6	1	16.2
		Subtest 4	9262	1852.4	2	15.3
			9400	1880.0	2	15.3
			9538	1907.6	2	15.1
		Subtest 5	9262	1852.4	0	17.3
			9400	1880.0	0	17.2
			9538	1907.6	0	17.0
	DC-HSDPA	Subtest 1	9262	1852.4	0	17.2
			9400	1880.0	0	17.2
			9538	1907.6	0	17.0
		Subtest 2	9262	1852.4	0	17.2
			9400	1880.0	0	17.1
			9538	1907.6	0	17.1
		Subtest 3	9262	1852.4	0.5	16.9
			9400	1880.0	0.5	16.5
			9538	1907.6	0.5	16.6
		Subtest 4	9262	1852.4	0.5	16.9
			9400	1880.0	0.5	16.5
			9538	1907.6	0.5	16.6

W-CDMA Band IV Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Meas. Avg Pwr (dBm)
W-CDMA Band IV	Rel 99	RMC, 12.2 kbps	1312	1712.4	N/A	19.5
			1413	1732.6	N/A	19.5
			1513	1752.6	N/A	19.6
	HSDPA	Subtest 1	1312	1712.4	0	18.5
			1413	1732.6	0	18.7
			1513	1752.6	0	18.8
		Subtest 2	1312	1712.4	0	18.3
			1413	1732.6	0	18.5
			1513	1752.6	0	18.4
		Subtest 3	1312	1712.4	0.5	17.8
			1413	1732.6	0.5	18.1
			1513	1752.6	0.5	18.1
		Subtest 4	1312	1712.4	0.5	17.8
			1413	1732.6	0.5	18.1
			1513	1752.6	0.5	18.1
	HSUPA	Subtest 1	1312	1712.4	0	18.3
			1413	1732.6	0	18.6
			1513	1752.6	0	18.9
		Subtest 2	1312	1712.4	2	16.5
			1413	1732.6	2	16.8
			1513	1752.6	2	16.9
		Subtest 3	1312	1712.4	1	17.5
			1413	1732.6	1	17.7
			1513	1752.6	1	17.8
		Subtest 4	1312	1712.4	2	16.5
			1413	1732.6	2	16.8
			1513	1752.6	2	16.9
		Subtest 5	1312	1712.4	0	18.3
			1413	1732.6	0	18.6
			1513	1752.6	0	18.9
	DC-HSDPA	Subtest 1	1312	1712.4	0	18.5
			1413	1732.6	0	18.7
			1513	1752.6	0	18.8
		Subtest 2	1312	1712.4	0	18.3
			1413	1732.6	0	18.5
			1513	1752.6	0	18.4
		Subtest 3	1312	1712.4	0.5	17.8
			1413	1732.6	0.5	18.1
			1513	1752.6	0.5	18.1
		Subtest 4	1312	1712.4	0.5	17.8
			1413	1732.6	0.5	18.1
			1513	1752.6	0.5	18.1

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50 (NOTE 1)	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
		65 (NOTE 3)	10, 15, 20	≥ 50	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1, 6.6.3.3.13	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9, Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2, 6.6.2.2.1, 6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
NS_21	6.6.2.2.1, 6.6.3.3.15	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

LTE Band 2 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	18.5	18.4	18.2
			1	49	0	18.1	18.1	18.1
			1	99	0	18.0	18.2	18.2
			50	0	0	18.3	18.3	18.3
			50	24	0	18.2	18.2	18.2
			50	50	0	18.1	18.1	18.1
			100	0	0	18.2	18.2	18.2
		16QAM	1	0	0	18.4	18.4	18.4
			1	49	0	18.0	18.1	18.1
			1	99	0	18.0	18.3	18.3
			50	0	0	17.8	17.8	17.8
			50	24	0	17.7	17.8	17.8
			50	50	0	17.7	17.7	17.7
			100	0	0	17.7	17.8	17.8
		64QAM	1	0	0	17.5	17.8	17.5
			1	49	0	17.3	17.0	17.4
			1	99	0	17.4	17.6	17.3
			50	0	0	17.1	17.2	17.2
			50	24	0	17.2	17.1	17.2
			50	50	0	17.1	17.1	17.2
			100	0	0	17.1	17.1	17.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	18.4	18.3	18.4
			1	37	0	18.1	18.2	18.1
			1	74	0	18.1	18.1	18.1
			36	0	0	18.2	18.2	18.3
			36	20	0	18.2	18.2	18.2
			36	39	0	18.2	18.1	18.1
			75	0	0	18.2	18.2	18.2
		16QAM	1	0	0	18.3	18.2	17.8
			1	37	0	18.0	18.0	17.6
			1	74	0	18.0	18.0	17.5
			36	0	0	17.7	17.9	17.8
			36	20	0	17.7	17.8	17.8
			36	39	0	17.7	17.7	17.7
			75	0	0	17.8	17.8	17.7
		64QAM	1	0	0	17.6	17.5	17.6
			1	37	0	17.4	17.4	17.5
			1	74	0	17.5	17.2	17.3
			36	0	0	17.3	17.2	17.3
			36	20	0	17.2	17.1	17.2
			36	39	0	17.2	17.1	17.3
			75	0	0	17.2	17.1	17.1

LTE Band 2 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	18.4	18.4	18.2
			1	25	0	18.1	18.1	18.1
			1	49	0	18.3	18.3	18.1
			25	0	0	18.3	18.2	18.2
			25	12	0	18.2	18.1	18.2
			25	25	0	18.1	18.1	18.1
			50	0	0	18.2	18.2	18.2
		16QAM	1	0	0	18.0	18.3	17.7
			1	25	0	17.6	18.0	17.5
			1	49	0	17.9	18.1	17.5
			25	0	0	17.9	17.8	17.8
			25	12	0	17.8	17.7	17.7
			25	25	0	17.7	17.7	17.7
		64QAM	50	0	0	17.8	17.7	17.7
			1	0	0	17.9	17.7	17.3
			1	25	0	17.6	17.5	17.3
			1	49	0	17.5	17.5	17.2
			25	0	0	17.1	17.3	17.2
			25	12	0	17.2	17.1	17.1
			25	25	0	17.0	17.1	17.1
			50	0	0	17.1	17.1	17.1
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	18.3	18.2	18.2
			1	12	0	18.2	18.1	18.2
			1	24	0	18.1	18.1	18.1
			12	0	0	18.2	18.1	18.1
			12	7	0	18.2	18.1	18.1
			12	13	0	18.2	18.1	18.1
			25	0	0	18.2	18.1	18.1
		16QAM	1	0	0	17.9	18.2	17.9
			1	12	0	17.8	18.2	17.8
			1	24	0	17.8	18.2	17.8
			12	0	0	17.9	17.9	17.8
			12	7	0	17.8	17.8	17.7
			12	13	0	17.8	17.8	17.7
		64QAM	25	0	0	17.7	17.7	17.7
			1	0	0	17.7	17.5	17.5
			1	12	0	17.5	17.5	17.4
			1	24	0	17.5	17.5	17.4
			12	0	0	17.3	17.2	17.2
			12	7	0	17.2	17.1	17.2
			12	13	0	17.2	17.1	17.1
			25	0	0	17.2	17.1	17.2

LTE Band 2 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	18.2	18.2	18.1
			1	8	0	18.2	18.2	18.2
			1	14	0	18.1	18.1	18.1
			8	0	0	18.2	18.1	18.2
			8	4	0	18.2	18.1	18.2
			8	7	0	18.2	18.1	18.2
			15	0	0	18.2	18.1	18.2
		16QAM	1	0	0	17.8	18.0	17.6
			1	8	0	17.8	18.1	17.6
			1	14	0	17.7	18.0	17.5
			8	0	0	17.8	17.7	17.8
			8	4	0	17.8	17.7	17.8
			8	7	0	17.8	17.7	17.8
			15	0	0	17.7	17.7	17.7
		64QAM	1	0	0	17.2	17.4	17.4
			1	8	0	17.5	17.3	17.4
			1	14	0	17.5	17.3	17.4
			8	0	0	17.2	17.0	17.1
			8	4	0	17.2	17.1	17.2
			8	7	0	17.2	17.0	17.1
			15	0	0	17.2	17.1	17.1
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	18.1	18.0	18.0
			1	3	0	18.1	18.1	18.1
			1	5	0	18.1	18.0	18.0
			3	0	0	18.1	18.0	18.0
			3	1	0	18.1	18.1	18.1
			3	3	0	18.1	18.1	18.1
			6	0	0	18.1	18.0	18.0
		16QAM	1	0	0	17.6	17.9	17.6
			1	3	0	17.7	17.9	17.7
			1	5	0	17.6	17.9	17.6
			3	0	0	17.8	17.8	17.6
			3	1	0	17.9	17.8	17.7
			3	3	0	17.9	17.8	17.7
			6	0	0	17.8	17.5	17.7
		64QAM	1	0	0	17.2	17.2	17.3
			1	3	0	17.5	17.2	17.4
			1	5	0	17.5	17.1	17.4
			3	0	0	17.3	17.1	17.1
			3	1	0	17.2	17.1	17.2
			3	3	0	17.2	17.1	17.2
			6	0	0	17.1	17.1	17.2

LTE Band 4 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0		20.0	
			1	49	0		19.8	
			1	99	0		19.9	
			50	0	0		20.0	
			50	24	0		19.9	
			50	50	0		19.8	
			100	0	0		19.9	
		16QAM	1	0	0		20.0	
			1	49	0		19.8	
			1	99	0		19.8	
			50	0	0		19.5	
			50	24	0		19.4	
			50	50	0		19.4	
			100	0	0		19.4	
		64QAM	1	0	0		19.2	
			1	49	0		19.0	
			1	99	0		18.9	
			50	0	0		18.8	
			50	24	0		18.8	
			50	50	0		18.7	
			100	0	0		18.7	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	20.0	20.0	20.0
			1	37	0	19.8	19.8	19.8
			1	74	0	19.8	19.9	19.8
			36	0	0	19.9	19.9	19.9
			36	20	0	19.9	19.9	19.9
			36	39	0	19.8	19.9	19.8
			75	0	0	19.8	19.9	19.8
		16QAM	1	0	0	20.0	20.0	19.4
			1	37	0	19.7	19.8	19.3
			1	74	0	19.7	19.8	19.3
			36	0	0	19.4	19.6	19.4
			36	20	0	19.4	19.5	19.4
			36	39	0	19.3	19.4	19.4
			75	0	0	19.4	19.4	19.3
		64QAM	1	0	0	19.3	19.2	19.0
			1	37	0	19.1	19.0	19.0
			1	74	0	19.0	19.0	19.1
			36	0	0	18.7	18.8	18.8
			36	20	0	18.7	18.7	18.7
			36	39	0	18.7	18.7	18.8
			75	0	0	18.7	18.7	18.7

Note(s):

20 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 4 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	19.9	20.0	19.8
			1	25	0	19.7	19.8	19.8
			1	49	0	19.6	19.8	19.8
			25	0	0	19.8	19.9	19.9
			25	12	0	19.8	19.9	19.8
			25	25	0	19.7	19.8	19.8
			50	0	0	19.8	19.9	19.9
		16QAM	1	0	0	19.4	19.8	19.3
			1	25	0	19.2	19.7	19.3
			1	49	0	19.2	19.7	19.2
			25	0	0	19.4	19.5	19.5
			25	12	0	19.4	19.4	19.4
			25	25	0	19.3	19.4	19.4
			50	0	0	19.3	19.4	19.4
		64QAM	1	0	0	19.2	19.0	18.8
			1	25	0	18.9	18.8	18.8
			1	49	0	18.9	18.8	18.9
			25	0	0	18.6	18.6	18.8
			25	12	0	18.5	18.7	18.7
			25	25	0	18.5	18.7	18.7
			50	0	0	18.5	18.7	18.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	20.0	19.9	20.0
			1	12	0	19.8	19.8	19.9
			1	24	0	19.7	19.9	20.0
			12	0	0	19.9	19.9	19.9
			12	7	0	19.8	19.9	19.9
			12	13	0	19.7	19.8	19.8
			25	0	0	19.7	19.9	19.9
		16QAM	1	0	0	19.5	20.0	19.6
			1	12	0	19.3	19.9	19.5
			1	24	0	19.3	19.9	19.5
			12	0	0	19.5	19.6	19.5
			12	7	0	19.3	19.6	19.5
			12	13	0	19.3	19.5	19.5
			25	0	0	19.2	19.5	19.4
		64QAM	1	0	0	19.0	19.0	19.0
			1	12	0	18.8	19.0	19.0
			1	24	0	18.8	18.9	19.1
			12	0	0	18.7	18.7	18.8
			12	7	0	18.6	18.7	18.7
			12	13	0	18.6	18.7	18.7
			25	0	0	18.5	18.6	18.7

LTE Band 4 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	19.8	19.9	19.8
			1	8	0	19.8	20.0	19.9
			1	14	0	19.7	19.8	19.8
			8	0	0	19.9	19.9	19.9
			8	4	0	19.9	19.9	19.9
			8	7	0	19.7	19.8	19.9
			15	0	0	19.7	19.8	19.8
		16QAM	1	0	0	19.4	19.8	19.3
			1	8	0	19.3	19.8	19.4
			1	14	0	19.2	19.7	19.2
			8	0	0	19.4	19.5	19.5
			8	4	0	19.4	19.5	19.5
			8	7	0	19.3	19.4	19.5
			15	0	0	19.2	19.4	19.4
		64QAM	1	0	0	18.9	19.1	19.1
			1	8	0	18.8	19.0	19.2
			1	14	0	18.8	19.1	19.2
			8	0	0	18.8	18.9	18.9
			8	4	0	18.8	18.9	18.9
			8	7	0	18.7	18.9	18.9
			15	0	0	18.7	18.9	18.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	19.7	19.8	19.8
			1	3	0	19.8	19.9	19.9
			1	5	0	19.7	19.8	19.8
			3	0	0	19.7	19.8	19.8
			3	1	0	19.8	19.9	19.8
			3	3	0	19.8	19.8	19.8
			6	0	0	19.7	19.8	19.8
		16QAM	1	0	0	19.3	19.7	19.4
			1	3	0	19.3	19.7	19.5
			1	5	0	19.3	19.6	19.4
			3	0	0	19.4	19.5	19.4
			3	1	0	19.5	19.5	19.4
			3	3	0	19.5	19.5	19.4
			6	0	0	19.5	19.2	19.4
		64QAM	1	0	0	18.9	19.0	19.2
			1	3	0	19.0	19.2	19.2
			1	5	0	18.9	19.2	19.1
			3	0	0	18.9	18.9	19.0
			3	1	0	18.8	18.8	18.9
			3	3	0	18.8	18.9	18.9
			6	0	0	18.7	18.8	18.9

LTE Band 12 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						704 MHz	707.5 MHz	711 MHz
LTE Band 12	10	QPSK	1	0	0		24.3	
			1	25	0		24.3	
			1	49	0		24.2	
			25	0	1		23.9	
			25	12	1		24.0	
			25	25	1		23.8	
			50	0	1		23.9	
		16QAM	1	0	1		23.7	
			1	25	1		23.8	
			1	49	1		23.6	
			25	0	2		23.0	
			25	12	2		23.0	
			25	25	2		22.9	
			50	0	2		22.9	
		64QAM	1	0	2		22.8	
			1	25	2		22.9	
			1	49	2		22.8	
			25	0	3		21.5	
			25	12	3		21.7	
			25	25	3		21.5	
			50	0	3		21.6	
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						701.5 MHz	707.5 MHz	713.5 MHz
LTE Band 12	5	QPSK	1	0	0	24.3	24.3	24.3
			1	12	0	24.3	24.3	24.2
			1	24	0	24.2	24.2	24.2
			12	0	1	24.0	24.0	23.9
			12	7	1	24.0	24.0	23.9
			12	13	1	24.0	24.0	23.9
			25	0	1	24.0	24.0	23.9
		16QAM	1	0	1	23.8	24.0	24.0
			1	12	1	23.9	24.0	24.0
			1	24	1	23.8	24.0	24.0
			12	0	2	23.0	23.0	23.0
			12	7	2	23.0	23.0	23.0
			12	13	2	23.0	23.0	22.9
			25	0	2	23.0	23.0	22.9
		64QAM	1	0	2	23.0	22.4	22.9
			1	12	2	23.0	22.6	23.0
			1	24	2	23.0	22.4	23.0
			12	0	3	22.0	21.7	21.6
			12	7	3	21.6	21.7	21.6
			12	13	3	21.7	21.6	21.6
			25	0	3	21.6	21.6	21.6

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 12 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						700.5 MHz	707.5 MHz	714.5 MHz
LTE Band 12	3	QPSK	1	0	0	24.3	24.2	24.2
			1	8	0	24.3	24.4	24.2
			1	14	0	24.2	24.2	24.1
			8	0	1	24.0	24.0	23.9
			8	4	1	24.0	24.0	23.9
			8	7	1	24.0	24.0	23.9
			15	0	1	24.0	24.0	23.9
		16QAM	1	0	1	24.0	23.7	23.8
			1	8	1	24.0	23.8	23.8
			1	14	1	24.0	23.8	23.7
			8	0	2	23.0	23.0	23.0
			8	4	2	23.0	23.0	23.0
			8	7	2	23.0	23.0	23.0
			15	0	2	22.9	23.0	22.9
		64QAM	1	0	2	23.0	22.6	22.6
			1	8	2	23.0	23.0	22.6
			1	14	2	22.8	22.8	22.7
			8	0	3	21.8	21.7	21.8
			8	4	3	21.7	21.8	21.6
			8	7	3	21.7	21.8	21.6
			15	0	3	21.7	21.7	21.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)		
						699.7 MHz	707.5 MHz	715.3 MHz
LTE Band 12	1.4	QPSK	1	0	0	24.9	24.9	23.8
			1	3	0	25.0	25.0	24.9
			1	5	0	24.9	24.9	24.7
			3	0	0	24.9	24.9	24.8
			3	1	0	25.0	25.0	24.8
			3	3	0	25.0	25.0	24.8
			6	0	1	23.9	23.9	23.8
		16QAM	1	0	1	24.0	23.6	23.9
			1	3	1	24.0	23.7	23.9
			1	5	1	24.0	23.7	23.8
			3	0	1	24.0	24.0	23.9
			3	1	1	24.0	24.0	24.0
			3	3	1	24.0	24.0	24.0
			6	0	2	23.0	22.8	22.9
		64QAM	1	0	2	22.9	22.5	22.7
			1	3	2	23.0	23.0	23.0
			1	5	2	22.9	22.6	22.8
			3	0	2	22.8	22.7	22.7
			3	1	2	22.8	23.0	22.7
			3	3	2	22.9	23.0	22.6
			6	0	3	21.8	21.7	21.5

LTE Band 17 Measured Results

SAR for LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 38 Measured Results

SAR for LTE Band 38 (Frequency range: 2570-2620 MHz) is covered by LTE Band 41 (Frequency range: 2496-2690 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 41 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)				
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	20	QPSK	1	0	0	23.8	23.8	23.9	23.8	23.7
			1	49	0	23.6	23.6	23.7	23.5	23.4
			1	99	0	23.5	23.5	23.6	23.4	23.3
			50	0	0	23.6	23.2	23.8	23.0	23.1
			50	24	0	23.6	23.2	23.8	22.9	23.2
			50	50	0	23.5	23.5	23.7	22.8	23.1
		16QAM	100	0	0	23.4	23.0	23.7	22.7	22.7
			1	0	0	23.1	23.3	23.4	23.5	23.3
			1	49	0	22.9	23.2	23.2	23.2	23.4
			1	99	0	22.8	23.0	23.1	23.0	23.1
			50	0	1	22.2	22.1	22.3	22.2	22.3
			50	24	1	22.1	22.1	22.3	22.0	22.3
		64QAM	50	50	1	22.0	22.1	22.2	21.8	22.1
			100	0	1	22.1	22.0	22.3	21.7	22.0
			1	0	1	21.7	22.0	22.3	22.2	21.6
			1	49	1	21.8	21.9	22.0	22.1	21.6
			1	99	1	21.7	21.8	21.9	21.8	21.7
			50	0	2	20.7	20.8	20.9	21.1	20.6
			50	24	2	20.7	20.8	20.9	21.0	20.6
			50	50	2	20.7	20.8	20.8	20.9	20.5
			100	0	2	20.7	20.8	20.9	20.9	20.0
LTE Band 41	15	QPSK	1	0	0	23.8	23.8	23.9	23.7	23.5
			1	37	0	23.6	23.6	23.8	23.5	23.3
			1	74	0	23.6	23.5	23.7	23.4	23.2
			36	0	0	23.6	23.4	23.8	23.0	23.2
			36	20	0	23.7	23.7	23.8	23.0	23.2
			36	39	0	23.6	23.5	23.8	22.9	23.1
			75	0	0	23.4	23.0	23.7	22.7	22.8
		16QAM	1	0	0	23.3	23.3	23.5	23.7	23.2
			1	37	0	23.1	23.1	23.3	23.5	22.9
			1	74	0	23.0	23.0	23.2	23.3	23.0
			36	0	1	22.2	22.2	22.3	22.1	22.3
			36	20	1	22.2	22.2	22.4	22.1	22.2
			36	39	1	22.1	22.1	22.3	21.9	22.1
			75	0	1	22.2	22.0	22.3	21.8	22.0
		64QAM	1	0	1	21.7	22.0	22.3	22.2	21.6
			1	37	1	21.8	21.9	22.0	22.1	21.6
			1	74	1	21.7	21.8	21.9	21.8	21.7
			36	0	2	20.7	20.8	20.9	21.1	20.6
			36	20	2	20.7	20.8	20.9	21.0	20.6
			36	39	2	20.7	20.8	20.8	20.9	20.5
			75	0	2	20.7	20.8	20.9	20.9	20.0

LTE Band 41 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)				
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	10	QPSK	1	0	0	23.7	23.8	23.8	23.8	23.6
			1	25	0	23.6	23.7	23.7	23.6	23.4
			1	49	0	23.5	23.6	23.7	23.5	23.4
			25	0	0	23.7	23.4	23.9	23.1	23.1
			25	12	0	23.7	23.7	23.8	23.2	23.1
			25	25	0	23.6	23.3	23.8	23.0	23.0
		16QAM	50	0	0	23.6	23.2	23.7	22.8	23.1
			1	0	0	23.2	23.2	23.4	23.5	23.0
			1	25	0	23.1	23.1	23.4	23.5	23.0
			1	49	0	23.0	23.0	23.3	23.2	22.9
			25	0	1	22.2	22.2	22.4	22.5	22.1
			25	12	1	22.2	22.1	22.3	22.3	22.1
		64QAM	25	25	1	22.1	22.1	22.3	22.2	22.1
			50	0	1	22.2	22.2	22.3	22.0	22.1
			1	0	1	21.7	22.0	22.3	22.2	21.6
			1	25	1	21.8	21.9	22.0	22.1	21.6
			1	49	1	21.7	21.8	21.9	21.8	21.7
			25	0	2	20.7	20.8	20.9	21.1	20.6
			25	12	2	20.7	20.8	20.9	21.0	20.6
			25	25	2	20.7	20.8	20.8	20.9	20.5
			50	0	2	20.7	20.8	20.9	20.9	20.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Meas. Avg Pwr (dBm)				
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	5	QPSK	1	0	0	23.8	23.6	23.9	23.6	23.4
			1	12	0	23.7	23.6	23.8	23.6	23.4
			1	24	0	23.7	23.5	23.7	23.5	23.3
			12	0	0	23.8	23.5	23.8	23.3	23.3
			12	7	0	23.8	23.4	23.9	23.3	23.3
			12	13	0	23.7	23.5	23.8	23.2	23.3
		16QAM	25	0	0	23.8	23.4	23.8	23.0	23.2
			1	0	0	23.2	23.1	23.4	23.5	23.3
			1	12	0	23.2	23.0	23.4	23.5	23.3
			1	24	0	23.1	23.0	23.3	23.4	23.2
			12	0	1	22.2	22.2	22.4	22.4	22.4
			12	7	1	22.3	22.2	22.4	22.3	22.3
		64QAM	12	13	1	22.2	22.1	22.4	22.2	22.3
			25	0	1	22.3	22.1	22.3	22.2	22.3
			1	0	1	21.7	22.0	22.3	22.2	21.6
			1	12	1	21.8	21.9	22.0	22.1	21.6
			1	24	1	21.7	21.8	21.9	21.8	21.7
			12	0	2	20.7	20.8	20.9	21.1	20.6
			12	7	2	20.7	20.8	20.9	21.0	20.6
			12	13	2	20.7	20.8	20.8	20.9	20.5
			25	0	2	20.7	20.8	20.9	20.9	20.0

9.4. LTE Carrier Aggregation

The following power measurements were performed with a single carrier uplink; CA for this device is only supported in the downlinks.

This device supports CA combinations of one (1) Uplink and up to two (2) Downlinks.

This device supports CA combinations of one (1) uplink and up to two (2) downlink.														
Type	LTE CA combinations			PCC (UL)				SCC (DL)			LTE Rel 8 Tx.	LTE Rel 11	Delta	
	PCC	+	SCC	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel	Freq. (MHz)	Power [dBm]		Tx. Power [dBm]
Intra-Band Contiguous	41C			QPSK	20	39750	2506.0	1,0	20	39948	2525.8	23.91	23.90	0.0%

Note:

Per KDB 941225 D05A LTE Rel. 10 KDB Inquiry Sheet: SAR is excluded for Carrier Aggregation when measured power does not exceed LTE Release 8 by more than a $\frac{1}{4}$ dBm

9.5. Wi-Fi 2.4GHz (DTS Band)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Max Output Power (dBm)		SAR Test (Yes/No)
					Chain 0	Chain 1	Chain 0	Chain 1	
2.4	802.11b	1 Mbps	1	2412	13.4	13.1	15.0	13.8	Yes
			6	2437	13.3	12.7			
			11	2462	13.3	13.0			
	802.11g	6 Mbps	2	2417	Not Required	Not Required	15.0	13.8	No
			6	2437					
			11	2462					
	802.11n (HT20)	6.5 Mbps	2	2417	Not Required	Not Required	15.0	13.8	No
			6	2437					
			11	2462					

Note(s):

1. SAR not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.

9.6. Wi-Fi 5GHz (U-NII Bands)

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Max Output Power (dBm)		SAR Test (Yes/No)
					Chain 0	Chain 1	Chain 0	Chain 1	
5.2 U-NII 1	802.11a	6 Mbps	36	5180	Not Required	Not Required	14.5	12.5	No
			40	5200					
			44	5220					
			48	5240					
	802.11n (HT20)	6.5 Mbps	36	5180			14.5	12.5	No
			40	5200					
			44	5220					
			48	5240					
	802.11n (HT40)	13.5 Mbps	38	5190			14.5	12.5	No
			46	5230					
	802.11ac (VHT20)	6.5 Mbps	36	5180			14.5	12.5	No
			40	5200					
			44	5220					
			48	5240					
	802.11ac (VHT40)	13.5 Mbps	38	5190			14.5	12.5	No
			46	5230					
	802.11ac (VHT80)	29.3 Mbps	42	5210	12.7	11.2	14.5	12.5	Yes
5.3 U-NII-2A	802.11a	6 Mbps	52	5260	Not Required	Not Required	14.5	12.5	Yes
			56	5280					
			60	5300					
			64	5320					
	802.11n (HT20)	6.5 Mbps	52	5260			14.5	12.5	No
			56	5280					
			60	5300					
			64	5320					
	802.11n (HT40)	13.5 Mbps	54	5270			14.5	12.5	No
			62	5310					
	802.11ac (VHT20)	6.5 Mbps	52	5260			14.5	12.5	No
			56	5280					
			60	5300					
			64	5320					
	802.11ac (VHT40)	13.5 Mbps	54	5270			14.5	12.5	No
			62	5310					
	802.11ac (VHT80)	29.3 Mbps	58	5290	13.2	11.4	14.5	12.5	No

Note(s):

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)		Max Output Power (dBm)		SAR Test (Yes/No)
					Chain 0	Chain 1	Chain 0	Chain 1	
5.5 U-NII-2C	802.11a	6 Mbps	100	5500	Not Required	Not Required	14.5	12.5	No
			116	5580					
			124	5620					
			140	5700					
	802.11n (HT20)	6.5 Mbps	100	5500			14.5	12.5	No
			116	5580					
			124	5620					
			140	5700					
	802.11n (HT40)	13.5 Mbps	102	5510			14.5	12.5	No
			118	5590					
			134	5670					
	802.11ac (VHT20)	6.5 Mbps	100	5500			14.5	12.5	No
			116	5580					
			124	5620					
			140	5700					
	802.11ac (VHT40)	13.5 Mbps	102	5510			14.5	12.5	No
			118	5590					
			134	5670					
	802.11ac (VHT80)	29.3 Mbps	106	5530	13.3	10.5	14.5	12.5	Yes
			122	5610	13.5	10.8			
			138	5690	13.5	10.9			
5.8 U-NII-3	802.11a	6 Mbps	149	5745	Not Required	Not Required	14.5	12.5	No
			157	5785					
			165	5825					
	802.11n (HT20)	6.5 Mbps	149	5745			14.5	12.5	No
			157	5785					
			165	5825					
	802.11n (HT40)	13.5 Mbps	151	5755			14.5	12.5	No
			159	5795					
	802.11ac (VHT20)	6.5 Mbps	149	5745			14.5	12.5	No
			157	5785					
			165	5825					
	802.11ac (VHT40)	13.5 Mbps	151	5755			14.5	12.5	No
			159	5795					
	802.11ac (VHT80)	29.3 Mbps	155	5775	13.2	10.7	14.5	12.5	Yes

Note(s):

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.

9.7. Bluetooth

Maximum tune-up tolerance limit is 11.84 dBm. This power level qualifies for exclusion of SAR testing. Refer to §10.21 for Standalone SAR Test Exclusion Considerations & Estimated SAR.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR

measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - o For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - o When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - o The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 4 Slots	0	Left Touch	190	836.6	29.2	28.6	0.187	0.215	1
			Left Tilt	190	836.6	29.2	28.6	0.113	0.130	
			Right Touch	190	836.6	29.2	28.6	0.176	0.202	
			Right Tilt	190	836.6	29.2	28.6	0.100	0.115	
Body-worn	GPRS 4 Slots	15	Rear	190	836.6	29.2	28.6	0.151	0.173	
			Front	190	836.6	29.2	28.6	0.187	0.215	2
Hotspot	GPRS 4 Slots	10	Rear	190	836.6	29.2	28.6	0.199	0.228	
			Front	190	836.6	29.2	28.6	0.247	0.284	
			Edge 2	190	836.6	29.2	28.6	0.148	0.170	
			Edge 3	190	836.6	29.2	28.6	0.204	0.234	
			Edge 4	190	836.6	29.2	28.6	0.054	0.062	
	DTM CS+PS 1 Slot	10	Edge 2	190	836.6	32.2	31.7	0.416	0.467	3

10.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 3 Slots	0	Left Touch	661	1880.0	23.8	23.2	0.030	0.034	4
			Left Tilt	661	1880.0	23.8	23.2	0.008	0.009	
			Right Touch	661	1880.0	23.8	23.2	0.017	0.020	
			Right Tilt	661	1880.0	23.8	23.2	0.010	0.011	
Body-worn	GPRS 3 Slots	15	Rear	661	1880.0	23.8	23.2	0.082	0.094	
			Front	661	1880.0	23.8	23.2	0.252	0.289	5
Hotspot	GPRS 3 Slots	10	Rear	661	1880.0	23.8	23.2	0.136	0.156	
			Front	661	1880.0	23.8	23.2	0.564	0.648	6
			Edge 2	661	1880.0	23.8	23.2	0.112	0.129	
			Edge 3	661	1880.0	23.8	23.2	0.521	0.598	
			Edge 4	661	1880.0	23.8	23.2	0.115	0.132	
	DTM CS+PS 2 Slot	10	Front	661	1880.0	23.8	23.1	0.475	0.558	

10.3. W-CDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	18.5	18.0	0.051	0.057	7
			Left Tilt	9400	1880.0	18.5	18.0	0.010	0.011	
			Right Touch	9400	1880.0	18.5	18.0	0.026	0.029	
			Right Tilt	9400	1880.0	18.5	18.0	0.015	0.017	
Body-worn	Rel 99 RMC	15	Rear	9400	1880.0	18.5	18.0	0.089	0.100	
			Front	9400	1880.0	18.5	18.0	0.446	0.500	8
Hotspot	Rel 99 RMC	10	Rear	9400	1880.0	18.5	18.0	0.193	0.217	
			Front	9262	1852.4	18.5	18.1	0.595	0.652	
				9400	1880.0	18.5	18.0	0.735	0.825	
				9538	1907.6	18.5	18.0	0.730	0.819	
			Edge 2	9400	1880.0	18.5	18.0	0.143	0.160	
			Edge 3	9262	1852.4	18.5	18.1	0.564	0.618	
				9400	1880.0	18.5	18.0	0.760	0.853	9
			Edge 4	9400	1880.0	18.5	18.0	0.153	0.172	

10.4. W-CDMA Band IV

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	1413	1732.6	20.0	19.5	0.036	0.041	10
			Left Tilt	1413	1732.6	20.0	19.5	0.005	0.006	
			Right Touch	1413	1732.6	20.0	19.5	0.018	0.020	
			Right Tilt	1413	1732.6	20.0	19.5	0.002	0.002	
Body-worn	Rel 99 RMC	15	Rear	1413	1732.6	20.0	19.5	0.083	0.093	
			Front	1413	1732.6	20.0	19.5	0.259	0.291	11
Hotspot	Rel 99 RMC	10	Rear	1413	1732.6	20.0	19.5	0.141	0.158	
			Front	1413	1732.6	20.0	19.5	0.548	0.615	
			Edge 2	1413	1732.6	20.0	19.5	0.014	0.016	
			Edge 3	1413	1732.6	20.0	19.5	0.574	0.644	12
			Edge 4	1413	1732.6	20.0	19.5	0.032	0.036	

10.5. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	18900	1880.0	1	0	18.5	18.4	0.029	0.030	
						50	0	18.5	18.3	0.032	0.034	13
			Left Tilt	18900	1880.0	1	0	18.5	18.4	0.004	0.004	
						50	0	18.5	18.3	0.004	0.004	
			Right Touch	18900	1880.0	1	0	18.5	18.4	0.018	0.018	
						50	0	18.5	18.3	0.019	0.020	
			Right Tilt	18900	1880.0	1	0	18.5	18.4	0.009	0.010	
						50	0	18.5	18.3	0.009	0.009	
Body-worn	QPSK	15	Rear	18900	1880.0	1	0	18.5	18.4	0.096	0.098	
						50	0	18.5	18.3	0.084	0.089	
			Front	18900	1880.0	1	0	18.5	18.4	0.203	0.207	
						50	0	18.5	18.3	0.214	0.226	14
Hotspot	QPSK	10	Rear	18900	1880.0	1	0	18.5	18.4	0.158	0.161	
						50	0	18.5	18.3	0.152	0.161	
			Front	18900	1880.0	1	0	18.5	18.4	0.556	0.568	
						50	0	18.5	18.3	0.562	0.594	
			Edge 2	18900	1880.0	1	0	18.5	18.4	0.098	0.100	
						50	0	18.5	18.3	0.063	0.067	
			Edge 3	18900	1880.0	1	0	18.5	18.4	0.568	0.580	
						50	0	18.5	18.3	0.566	0.598	15
			Edge 4	18900	1880.0	1	0	18.5	18.4	0.119	0.122	
						50	0	18.5	18.3	0.166	0.175	

10.6. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20175	1732.5	1	0	20.0	20.0	0.045	0.045	16
						50	0	20.0	20.0	0.050	0.050	
			Left Tilt	20175	1732.5	1	0	20.0	20.0	0.006	0.006	
						50	0	20.0	20.0	0.004	0.004	
			Right Touch	20175	1732.5	1	0	20.0	20.0	0.021	0.021	
						50	0	20.0	20.0	0.025	0.025	
Body-worn	QPSK	15	Rear	20175	1732.5	1	0	20.0	20.0	0.070	0.070	17
						50	0	20.0	20.0	0.073	0.073	
			Front	20175	1732.5	1	0	20.0	20.0	0.233	0.233	
						50	0	20.0	20.0	0.246	0.246	
Hotspot	QPSK	10	Rear	20175	1732.5	1	0	20.0	20.0	0.137	0.137	18
						50	0	20.0	20.0	0.148	0.148	
			Front	20175	1732.5	1	0	20.0	20.0	0.516	0.516	
						50	0	20.0	20.0	0.542	0.542	
			Edge 2	20175	1732.5	1	0	20.0	20.0	0.016	0.016	
						50	0	20.0	20.0	0.014	0.014	
			Edge 3	20175	1732.5	1	0	20.0	20.0	0.590	0.590	
						50	0	20.0	20.0	0.601	0.601	
			Edge 4	20175	1732.5	1	0	20.0	20.0	0.031	0.031	
						50	0	20.0	20.0	0.035	0.035	

10.7. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	23095	707.5	1	25	25.0	24.3	0.119	0.140	19
						25	12	24.0	24.0	0.104	0.104	
			Left Tilt	23095	707.5	1	25	25.0	24.3	0.070	0.083	
						25	12	24.0	24.0	0.055	0.055	
			Right Touch	23095	707.5	1	25	25.0	24.3	0.145	0.171	
						25	12	24.0	24.0	0.111	0.111	
Body-worn	QPSK	15	Right Tilt	23095	707.5	1	25	25.0	24.3	0.091	0.107	20
						25	12	24.0	24.0	0.067	0.067	
			Rear	23095	707.5	1	25	25.0	24.3	0.135	0.159	
						25	12	24.0	24.0	0.110	0.110	
			Front	23095	707.5	1	25	25.0	24.3	0.223	0.263	
						25	12	24.0	24.0	0.179	0.179	
Hotspot	QPSK	10	Rear	23095	707.5	1	25	25.0	24.3	0.144	0.170	21
						25	12	24.0	24.0	0.116	0.116	
			Front	23095	707.5	1	25	25.0	24.3	0.275	0.324	
						25	12	24.0	24.0	0.222	0.222	
			Edge 2	23095	707.5	1	25	25.0	24.3	0.144	0.170	
						25	12	24.0	24.0	0.115	0.115	
			Edge 3	23095	707.5	1	25	25.0	24.3	0.066	0.078	
						25	12	24.0	24.0	0.053	0.053	
			Edge 4	23095	707.5	1	25	25.0	24.3	0.172	0.203	
						25	12	24.0	24.0	0.144	0.144	

10.8. LTE Band 17 (10MHz Bandwidth)

SAR for LTE Band 17 (Frequency Range: 704-716 MHz) is covered by LTE Band 12 (Frequency Range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

10.9. LTE Band 38 (20MHz Bandwidth)

SAR for LTE Band 38 (Frequency range: 2570-2620 MHz) is covered by LTE Band 41 (Frequency range: 2496-2690 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

10.10. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	40620	2593.0	1	0	24.0	23.9	0.053	0.054	22
						50	0	24.0	23.8	0.048	0.050	
			Left Tilt	40620	2593.0	1	0	24.0	23.9	0.018	0.018	
						50	0	24.0	23.8	0.018	0.019	
			Right Touch	40620	2593.0	1	0	24.0	23.9	0.106	0.108	
						50	0	24.0	23.8	0.093	0.098	
			Right Tilt	40620	2593.0	1	0	24.0	23.9	0.015	0.015	
						50	0	24.0	23.8	0.011	0.012	
Body-worn	QPSK	15	Rear	40620	2593.0	1	0	24.0	23.9	0.066	0.067	23
						50	0	24.0	23.8	0.061	0.064	
			Front	40620	2593.0	1	0	24.0	23.9	0.194	0.197	
						50	0	24.0	23.8	0.183	0.192	
Hotspot	QPSK	10	Rear	40620	2593.0	1	0	24.0	23.9	0.148	0.151	24
						50	0	24.0	23.8	0.135	0.142	
			Front	40620	2593.0	1	0	24.0	23.9	0.388	0.395	
						50	0	24.0	23.8	0.270	0.284	
			Edge 2	40620	2593.0	1	0	24.0	23.9	0.166	0.169	
						50	0	24.0	23.8	0.161	0.169	
			Edge 3	40620	2593.0	1	0	24.0	23.9	0.425	0.433	
						50	0	24.0	23.8	0.413	0.434	
			Edge 4	40620	2593.0	1	0	24.0	23.9	0.057	0.058	
						50	0	24.0	23.8	0.054	0.057	

10.11. Wi-Fi (DTS Band)

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	Chain 0	802.11b 1 Mbps	Head	0	Left Touch	1	2412.0	0.164	15.0	13.4	0.102	0.147	25
					Left Tilt	1	2412.0	0.094	15.0	13.4			
					Right Touch	1	2412.0	0.693	15.0	13.4	0.507	0.733	
					Right Tilt	1	2412.0	0.349	15.0	13.4	0.265	0.383	
			Body-worn	15	Rear	1	2412.0	0.013	15.0	13.4			26
					Front	1	2412.0	0.045	15.0	13.4	0.039	0.056	
			Hotspot & Wi-Fi Direct	10	Rear	1	2412.0	0.037	15.0	13.4			27
					Front	1	2412.0	0.135	15.0	13.4	0.079	0.114	
					Edge 1	1	2412.0	0.015	15.0	13.4			
					Edge 4	1	2412.0	0.086	15.0	13.4			
2.4GHz	Chain 1	802.11b 1 Mbps	Head	0	Left Touch	1	2412.0	0.577	13.8	13.1	0.321	0.377	28
					Left Tilt	1	2412.0	0.225	13.8	13.1			
					Right Touch	1	2412.0	0.069	13.8	13.1	0.042	0.049	
					Right Tilt	1	2412.0	0.054	13.8	13.1			
			Body-worn	15	Rear	1	2412.0	0.005	13.8	13.1			29
					Front	1	2412.0	0.022	13.8	13.1	0.010	0.011	
			Hotspot & Wi-Fi Direct	10	Rear	1	2412.0	0.015	13.8	13.1			30
					Front	1	2412.0	0.051	13.8	13.1			
					Edge 1	1	2412.0	0.015	13.8	13.1			
					Edge 2	1	2412.0	0.059	13.8	13.1	0.039	0.046	

10.12. Wi-Fi (U-NII Band)

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.3 GHz U-NII 2A	Chain 0	802.11ac VHT80 29.3 Mbps	Head	0	Left Touch	58	5290.0	0.393	14.5	13.2					
					Left Tilt	58	5290.0	0.152	14.5	13.2					
					Right Touch	58	5290.0	0.877	14.5	13.2	0.539	0.727	0.137	0.185	31
					Right Tilt	58	5290.0	0.436	14.5	13.2	0.289	0.390	0.078	0.105	
			Body-worn	15	Rear	58	5290.0	0.009	14.5	13.2					
					Front	58	5290.0	0.055	14.5	13.2	0.029	0.039	0.011	0.015	32
			Extremity	0	Rear	58	5290.0	0.145	14.5	13.2					
					Front	58	5290.0	2.060	14.5	13.2	0.985	1.329	0.225	0.304	33
					Edge 1	58	5290.0	0.103	14.5	13.2					
					Edge 4	58	5290.0	0.897	14.5	13.2					
5.3 GHz U-NII 2A	Chain 1	802.11ac VHT80 29.3 Mbps	Head	0	Left Touch	58	5290.0	0.609	12.5	11.4	0.349	0.450	0.108	0.139	34
					Left Tilt	58	5290.0	0.278	12.5	11.4	0.097	0.125	0.030	0.039	
					Right Touch	58	5290.0	0.256	12.5	11.4					
					Right Tilt	58	5290.0	0.207	12.5	11.4					
			Body-worn	15	Rear	58	5290.0	0.033	12.5	11.4					
					Front	58	5290.0	0.070	12.5	11.4	0.046	0.059	0.013	0.017	35
			Extremity	0	Rear	58	5290.0	0.370	12.5	11.4					
					Front	58	5290.0	2.310	12.5	11.4	0.539	0.694	0.142	0.183	36
					Edge 1	58	5290.0	0.302	12.5	11.4					
					Edge 2	58	5290.0	0.839	12.5	11.4					

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.5 GHz U-NII 2C	Chain 0	802.11ac VHT80 29.3 Mbps	Head	0	Left Touch	122	5610.0	0.477	14.5	13.5					
					Left Tilt	122	5610.0	0.336	14.5	13.5					
					Right Touch	122	5610.0	1.300	14.5	13.5	0.518	0.652	0.147	0.185	37
					Right Tilt	122	5610.0	0.493	14.5	13.5	0.218	0.274	0.063	0.080	
			Body-worn	15	Rear	122	5610.0	0.007	14.5	13.5					
					Front	122	5610.0	0.080	14.5	13.5	0.039	0.049	0.012	0.015	38
			Extremity	0	Rear	122	5610.0	0.082	14.5	13.5					
					Front	122	5610.0	1.570	14.5	13.5	0.983	1.238	0.235	0.296	39
					Edge 1	122	5610.0	0.193	14.5	13.5					
					Edge 4	122	5610.0	1.030	14.5	13.5					
5.5 GHz U-NII 2C	Chain 1	802.11ac VHT80 29.3 Mbps	Head	0	Left Touch	122	5610.0	0.407	12.5	10.8	0.169	0.250	0.051	0.075	40
					Left Tilt	122	5610.0	0.157	12.5	10.8					
					Right Touch	122	5610.0	0.101	12.5	10.8					
					Right Tilt	122	5610.0	0.059	12.5	10.8					
			Body-worn	15	Rear	122	5610.0	0.004	12.5	10.8					
					Front	122	5610.0	0.026	12.5	10.8	<0.001	<0.001	<0.001	<0.001	41
			Extremity	0	Rear	122	5610.0	0.118	12.5	10.8					
					Front	122	5610.0	1.290	12.5	10.8	0.265	0.392	0.076	0.112	42
					Edge 1	122	5610.0	0.015	12.5	10.8					
					Edge 2	122	5610.0	0.655	12.5	10.8					

Frequency Band	Antenna	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled	
5.8 GHz U-NII 3	Chain 0	802.11ac VHT80	Head	0	Left Touch	155	5775.0	0.828	14.5	13.2					
					Left Tilt	155	5775.0	0.564	14.5	13.2					
					Right Touch	155	5775.0	1.340	14.5	13.2	0.517	0.697	0.144	0.194	43
					Right Tilt	155	5775.0	0.572	14.5	13.2	0.211	0.285	0.057	0.077	
			Body-worn	15	Rear	155	5775.0	0.008	14.5	13.2					
					Front	155	5775.0	0.131	14.5	13.2	0.073	0.098	0.024	0.032	44
			Extremity	0	Rear	155	5775.0	0.131	14.5	13.2					
					Front	155	5775.0	1.680	14.5	13.2					
					Edge 1	155	5775.0	0.281	14.5	13.2					
					Edge 4	155	5775.0	2.210	14.5	13.2	0.799	1.078	0.157	0.212	45
5.8 GHz U-NII 3	Chain 1	802.11ac VHT80	Head	0	Left Touch	155	5775.0	0.571	12.5	10.7	0.228	0.345	0.064	0.097	46
					Left Tilt	155	5775.0	0.205	12.5	10.7					
					Right Touch	155	5775.0	0.152	12.5	10.7					
					Right Tilt	155	5775.0	0.110	12.5	10.7					
			Body-worn	15	Rear	155	5775.0	0.008	12.5	10.7					
					Front	155	5775.0	0.056	12.5	10.7	0.026	0.039	0.005	0.007	47
			Extremity	0	Rear	155	5775.0	0.210	12.5	10.7					
					Front	155	5775.0	1.420	12.5	10.7	0.412	0.624	0.116	0.176	48
					Edge 1	155	5775.0	0.081	12.5	10.7					
					Edge 2	155	5775.0	1.100	12.5	10.7					

10.13. Bluetooth

Maximum tune-up tolerance limit is 11.84 dBm. This power level qualifies for exclusion of SAR testing. Refer to §10.21 for Standalone SAR Test Exclusion Considerations & Estimated SAR.

10.14. Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$,
for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})/x}]$
W/kg for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Body-worn and Hotspot:

RF Air interface	RF Exposure Conditions	Frequency (GHz)	Max. tune-up tolerance Power		Min. test separation distance (mm)	SAR test exclusion Result*	Estimated 1-g SAR (W/kg)
			(dBm)	(mW)			
Bluetooth	Body-worn	2.480	11.84	15	15	1.6	0.210
Bluetooth	Hotspot	2.480	11.84	15	10	2.4	0.315

Conclusion:

*: The computed value is ≤ 3 ; therefore, this qualifies for Standalone SAR test exclusion.

Extremity:

RF Air interface	RF Exposure Conditions	Frequency (GHz)	Max. tune-up tolerance Power		Min. test separation distance (mm)	SAR test exclusion Result*	Estimated 10-g SAR (W/kg)
			(dBm)	(mW)			
Bluetooth	Extremity	2.480	11.84	15	0	4.7	0.252

Conclusion:

*: The computed value is ≤ 7.5 ; therefore, this qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Hotspot	Front	No	0.275	N/A	N/A
850	GSM 850	Hotspot	Edge 2	No	0.416	N/A	N/A
1700	WCDMA Band IV	Hotspot	Edge 3	No	0.574	N/A	N/A
	LTE Band 4	Hotspot	Edge 3	No	0.601	N/A	N/A
1900	GSM 1900	Hotspot	Front	No	0.564	N/A	N/A
	WCDMA Band II	Hotspot	Edge 3	No	0.760	N/A	N/A
	LTE Band 2	Hotspot	Edge 3	No	0.566	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Head	Right Touch	No	0.507	N/A	N/A
2600	LTE Band 41	Hotspot	Edge 3	No	0.413	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Head	Right Touch	No	0.539	N/A	N/A
5600	Wi-Fi 802.11a/n/ac	Head	Right Touch	No	0.518	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Head	Right Touch	No	0.517	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is < 1.20 .

Extremity:

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio
5300	Wi-Fi 802.11a/n/ac	Extremity	Front	No	0.304	N/A	N/A
5600	Wi-Fi 802.11a/n/ac	Extremity	Front	No	0.296	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Extremity	Edge 4	No	0.212	N/A	N/A

Note(s):

Repeated Measurement is not required since measured SAR is < 2 W/kg.

12. Simultaneous Transmission SAR Analysis

Simultaneous Transmission Condition

Case	Cellular	WLAN Chain 0 / BT	WLAN Chain 1
1	GSM/GPRS/Edge	BT/BLE	(None)
2	GSM/GPRS/Edge	WLAN 2.4G	(None)
3	GSM/GPRS/Edge	WLAN 2.4G	WLAN 2.4G
4	GSM/GPRS/Edge	WLAN 2.4G	WLAN 5G
5	GSM/GPRS/Edge	WLAN 5G	WLAN 5G
6	GSM/GPRS/Edge	BT WLAN 5G	WLAN 5G
7	UMTS/HSPA	BT/BLE	(None)
8	UMTS/HSPA	WLAN 2.4G	(None)
9	UMTS/HSPA	WLAN 2.4G	WLAN 2.4G
10	UMTS/HSPA	WLAN 2.4G	WLAN 5G
11	UMTS/HSPA	WLAN 5G	WLAN 5G
12	UMTS/HSPA	BT WLAN 5G	WLAN 5G
13	LTE	BT/BLE	(None)
14	LTE	WLAN 2.4G	(None)
15	LTE	WLAN 2.4G	WLAN 2.4G
16	LTE	WLAN 2.4G	WLAN 5G
17	LTE	WLAN 5G	WLAN 5G
18	LTE	BT WLAN 5G	WLAN 5G
19	(None)	BT WLAN 5G	WLAN 5G

12.1. Sum of the 1-g SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)						Σ 1-g SAR (W/kg)							
		WWAN	DTS		U-NII		BT	WWAN + BT	WWAN + DTS	WWAN + DTS	WWAN + U-NII	WWAN+DTS+U-NII	WWAN+U-NII+BT	U-NII+BT	
		①	Chain 0 ②	Chain 1 ③	Chain 0 ④	Chain 1 ⑤	⑥	① + ⑥	① + ②	① + ② + ③	① + ④ + ⑤	① + ② + ⑤	① + ④ + ⑤ + ⑥	④ + ⑤ + ⑥	
Head	Left Touch	0.215	0.102	0.377	0.727	0.450			0.317	0.694	1.392	0.767		1.177	
	Left Tilt	0.130	0.102	0.049	0.390	0.125			0.232	0.281	0.645	0.357		0.515	
	Right Touch	0.202	0.507	0.049	0.390	0.125			0.709	0.758	0.717	0.834		0.515	
	Right Tilt	0.115	0.265	0.049	0.390	0.125			0.380	0.429	0.630	0.505		0.515	
Body-worn	Rear	0.173	0.056	0.011	0.098	0.059	0.210	0.383	0.229	0.240	0.330	0.288	0.540	0.367	
	Front	0.500	0.056	0.011	0.098	0.059	0.210	0.710	0.556	0.567	0.657	0.615	0.867	0.367	
Hotspot	Rear	0.228	0.114	0.046			0.315	0.543	0.342	0.388					
	Front	0.825	0.114	0.046			0.315	1.140	0.939	0.985					
	Edge 1		0.114	0.046			0.315				0.160				
	Edge 2	0.170		0.046					0.170	0.216					
	Edge 3	0.853						0.853	0.853	0.853					
	Edge 4	0.203	0.114				0.315	0.518	0.317	0.317					

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1-g SAR is < 1.6 W/kg.

12.2. Sum of the 10-g SAR for Wi-Fi 5GHz & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)			Σ 10-g SAR (W/kg)	
		U-NII		BT	U-NII	U-NII+BT
		Chain 0 ①	Chain 1 ②	③	① + ②	① + ② + ③
Extremity	Rear	0.304	0.183	0.252	0.487	0.739
	Front	0.304	0.183	0.252	0.487	0.739
	Edge 1	0.304	0.183	0.252	0.487	0.739
	Edge 2		0.183			
	Edge 4	0.304		0.252	0.304	0.556

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 10-g SAR is < 4.0 W/kg.

Appendixes

Refer to separated files for the following appendixes.

11783639-S1V1 SAR_App A Setup Photos

11783639-S1V1 SAR_App B System Check Plots

11783639-S1V1 SAR_App C Highest Test Plots

11783639-S1V1 SAR_App D Tissue Ingredients

11783639-S1V1 SAR_App E Probe Cal. Certificates

11783639-S1V1 SAR_App F Dipole Cal. Certificates

END OF REPORT