

FCC Test Report

Report No.: AGC11758230201FE02

FCC ID : 2A482-BSWX5

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Baseus True Wireless Earphones

BRAND NAME: Baseus

MODEL NAME : Baseus Bowie WX5

APPLICANT: Shenzhen Baseus Technology Co., Ltd.

DATE OF ISSUE : Mar. 13, 2023

STANDARD(S) : FCC Part 15.247

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 57

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar. 13, 2023	Valid	Initial Release



Page 3 of 57

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RELATED SUBMITTAL(S)/GRANT(S)	7
2.4. TEST METHODOLOGY	7
2.5. SPECIAL ACCESSORIES	
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	7
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF TESTED SYSTEM	10
5.2. EQUIPMENT USED IN TESTED SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3. LIMITS AND MEASUREMENT RESULT	13
8. BANDWIDTH	20
8.1. MEASUREMENT PROCEDURE	20
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	20
8.3. LIMITS AND MEASUREMENT RESULTS	20
9. CONDUCTED SPURIOUS EMISSION	27
9.1. MEASUREMENT PROCEDURE	27
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	27
9.3. MEASUREMENT EQUIPMENT USED	27
9.4. LIMITS AND MEASUREMENT RESULT	27
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	



Report No.: AGC11758230201FE02 Page 4 of 57

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)......39 11. RADIATED EMISSION43 11.3. LIMITS AND MEASUREMENT RESULT......45 12. LINE CONDUCTED EMISSION TEST...... 55 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST.......55 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST55 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 56 APPENDIX A: PHOTOGRAPHS OF TEST SETUP57 APPENDIX B: PHOTOGRAPHS OF EUT57



Page 5 of 57

1. VERIFICATION OF COMPLIANCE

Applicant	Shenzhen Baseus Technology Co., Ltd.		
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China		
Manufacturer	Shenzhen Baseus Technology Co., Ltd.		
Address	2nd Floor, Building B, Baseus Intelligence Park, No.2008, Xuegang Rd, Gangtou Community, Bantian Street, Longgang District, Shenzhen, China		
Factory	Shengyang Acoustics (Guangdong) Co., Ltd.		
Address	No. 5, Minxing Street, Middle Shandong, Shilong Town, Dongguan City, Guangdong Province, China		
Product Designation	Baseus True Wireless Earphones		
Brand Name	Baseus		
Test Model	Baseus Bowie WX5		
Date of receipt of test item	Feb. 27, 2023		
Date of test	Feb. 27, 2023 to Mar. 13, 2023		
Deviation	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Report Template	AGCRT-US-BLE/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Reviewed By

Cool Cheng (Project Engineer)

Calvin Liu (Reviewer)

Approved By

Mar. 13, 2023



Page 6 of 57

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "Baseus True Wireless Earphones". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz		
RF Output Power	Left 1M: 1.489dBm (Max), 2M: 1.461dBm (Max) Right 1M: 2.287dBm (Max), 2M: 2.275dBm (Max)		
Bluetooth Version	V5.3		
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE ☑GFSK 1Mbps ☑GFSK 2Mbps		
Number of channels	40 Channels		
Antenna Designation	Chip Antenna (Comply with requirements of the FCC part 15.203)		
Antenna Gain	1.01dBi		
Hardware Version	V2.0		
Software Version	V0.3		
Power Supply(Headset)	DC 3.7V by battery		
Power Supply(Charging dock)	DC 3.7V by battery or DC 5V by adapter		
Note: The FLIT comprised left and right abannal handants, both are the come in CCII but different in the DCD			

Note: The EUT comprises left and right channel headsets, both are the same in SCH but different in the PCB Layout. The RF output power of each headset had been tested and recorded in the report. For the other test items, the Right headset had been tested and recorded in this report as the worst case because of the higher power.

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2404 MHz
2400~2483.5MHz	:	:
	38	2478 MHz
	39	2480 MHz



Page 7 of 57

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2A482-BSWX5** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.




Page 8 of 57

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$





4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX_2402MHz_GFSK_1Mbps
2	Middle channel TX_2440MHz_GFSK_1Mbps
3	High channel TX_2480MHz_GFSK_1Mbps
4	Low channel TX_2402MHz_GFSK_2Mbps
5	Middle channel TX_2440MHz_GFSK_2Mbps
6	High channel TX_2480MHz_GFSK_2Mbps

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting COMx Baudrate Classic BLE Test Mode FCC Test @ Stop DUT Test RF Control 2402 (37) -RF Mode Hopping TX Power 4 PHY Type 1M PHY PRBS9 Payload ▼ Payload Length LOG: FCC test mode LOG: [COM3] open, 1500000bps LOG: [COM3] 9600bps LOG: BR/EDR Test LOG: Test end LOG: BLE Test COM3 is open 9600bps




Page 10 of 57


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Baseus True Wireless Earphones	Baseus Bowie WX5	2A482-BSWX5	EUT
2	Control Box	USB-TTL	N/A	AE
3	Xiaomi phone	Mi 10	N/A	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Not applicable

Note: The BT function cannot transmit when charging.



Page 11 of 57

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
Signal Analyzer	Aglient	N9020A	MY52090123	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 22, 2022	Mar. 21, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 03, 2022	Aug. 02, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 21, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Aug. 03, 2022	Aug. 02, 2024
ANTENNA	SCHWARZBECK	VULB9168	494	Apr. 28, 2021	Apr. 27, 2023
Test software	FARA	EZ-EMC	Ver RA-03A	N/A	N/A



Page 12 of 57

7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

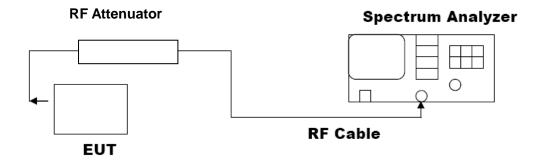




Page 13 of 57

7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power-Left						
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	1.347	≤30	Pass		
GFSK 1M	2440	1.293	≤30	Pass		
	2480	1.489	≤30	Pass		
GFSK 2M	2402	1.403	≤30	Pass		
	2440	1.280	≤30	Pass		
	2480	1.461	≤30	Pass		


Test Data of Conducted Output Power-Right						
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	1.734	≤30	Pass		
GFSK 1M	2440	1.761	≤30	Pass		
	2480	2.287	≤30	Pass		
GFSK 2M	2402	1.900	≤30	Pass		
	2440	1.724	≤30	Pass		
	2480	2.275	≤30	Pass		






Test Graphs of Conducted Output Power-Left Avg Type: Log-Pwr Avg|Hold: 100/100 TYPE M WW Trig: Free Run #Atten: 40 dB PNO: Fast ↔ IFGain:Low



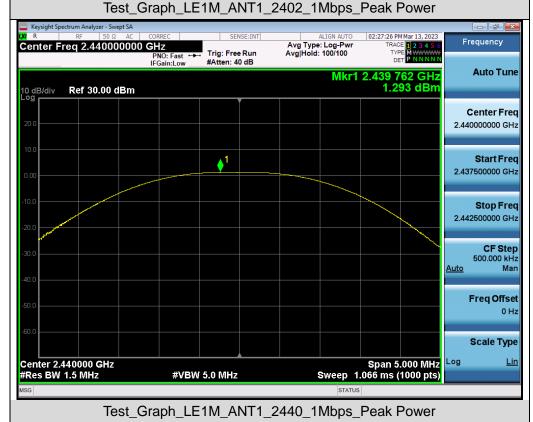






















Test Graphs of Conducted Output Power-Right 08:55:19 AM Mar 13, 2023 Avg Type: Log-Pwr Avg|Hold: 100/100 Frequency RACE 1 2 3 4 1
TYPE M WWW Center Freq 2.402000000 GHz Trig: Free Run #Atten: 40 dB IFGain:Low **Auto Tune** Mkr1 2.401 782 GHz 1.734 dBm Ref 20.00 dBm 10 dB/div Center Freq 2.402000000 GHz **∮**1 Start Freq 2.399500000 GHz Stop Freq 2.404500000 GHz CF Step 500.000 kHz Auto Man **Freq Offset** 0 Hz **Scale Type** Log Center 2.402000 GHz #Res BW 1.5 MHz Span 5.000 MHz Sweep 1.066 ms (1000 pts) <u>Lin</u> **#VBW 5.0 MHz** Test_Graph_LE1M_ANT1_2402_1Mbps_Peak Power






















Page 20 of 57

8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.


8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail		
GFSK 1M	2402	1.014	0.666	≥0.5	Pass		
	2440	1.015	0.663	≥0.5	Pass		
	2480	1.012	0.667	≥0.5	Pass		
GFSK 2M	2402	2.000	1.156	≥0.5	Pass		
	2440	2.000	1.158	≥0.5	Pass		
	2480	1.999	1.153	≥0.5	Pass		













Test_Graph_LE2M_ANT1_2402_2Mbps_OBW

% of OBW Power

x dB

99.00 %


-26.00 dB

Transmit Freq Error

x dB Bandwidth

3.953 kHz

2.358 MHz










Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





Test Graphs of DTS Bandwidth 08:55:03 AM Mar 13, 2023 Radio Std: None SENSE:INT Center Freq: 2.402000000 GHz
Trig: Free Run Avg|Hol
#Atten: 30 dB Frequency Center Freq 2.402000000 GHz Avg|Hold:>10/10 2.401733 GHz 1.2461 dBm Ref 30.00 dBm Center Freq 2.402000000 GHz Center 2.402 GHz #Res BW 100 kHz Span 3 MHz Sweep 1 ms **CF Step #VBW 300 kHz** 300,000 kHz Man Auto **Total Power** 7.94 dBm **Occupied Bandwidth** 1.0318 MHz Freq Offset 0 Hz -14.961 kHz % of OBW Power 99.00 % **Transmit Freq Error** x dB Bandwidth 666.1 kHz x dB -6.00 dB Test_Graph_LE1M_ANT1_2402_1Mbps_DTSBW 09:01:03 AM Mar 13, 2023 Radio Std: None Center Freq: 2.440000000 GHz
Trig: Free Run Avg|Hol Frequency Center Freq 2.440000000 GHz Avg|Hold: 10/10 #IFGain:Low 2.439733 GHz 1.3075 dBm Ref 30.00 dBm Center Freq 2.440000000 GHz Center 2.44 GHz #Res BW 100 kHz Span 3 MHz Sweep 1 ms CF Step 300.000 kHz #VBW 300 kHz <u>Auto</u> **Total Power** 7.99 dBm **Occupied Bandwidth** 1.0299 MHz Freq Offset 0 Hz % of OBW Power **Transmit Freq Error** -14.547 kHz 99.00 %

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2440_1Mbps_DTSBW


x dB

-6.00 dB

x dB Bandwidth

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

663.1 kHz



Auto

Man

Freq Offset





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE2M_ANT1_2402_2Mbps_DTSBW

Total Power

x dB

% of OBW Power

8.88 dBm

99.00 %

-6.00 dB


Occupied Bandwidth

Transmit Freq Error x dB Bandwidth

2.0376 MHz


-5.850 kHz

1.156 MHz







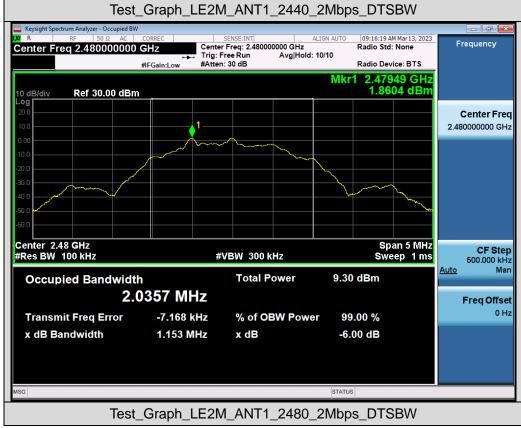

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 27 of 57

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT							
AParal In I have	Measurement Result						
Applicable Limits	Test Data	Criteria					
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS					






Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2402_1Mbps_Lower Band Emissions



CF Step 300.000 kHz

Freq Offset

Scale Type


Man

Lin

Auto

Span 3.000 MHz Sweep 2.000 ms (30000 pts)



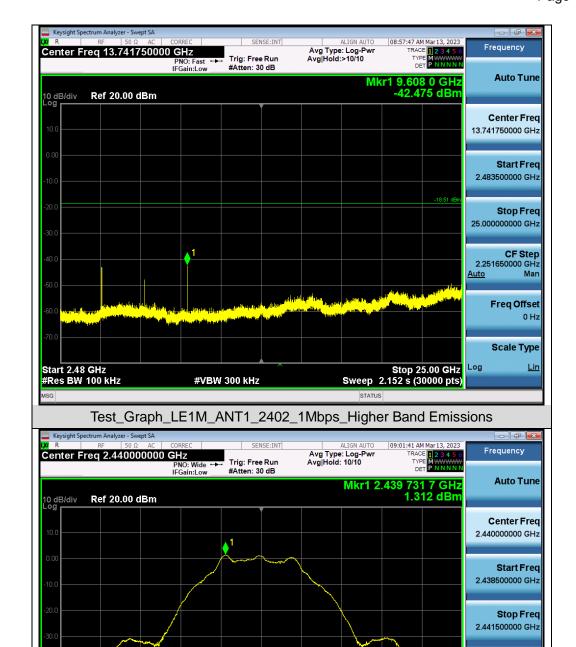


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_LE1M_ANT1_2440_1Mbps_Reference Level

#VBW 300 kHz

Center 2.440000 GHz #Res BW 100 kHz





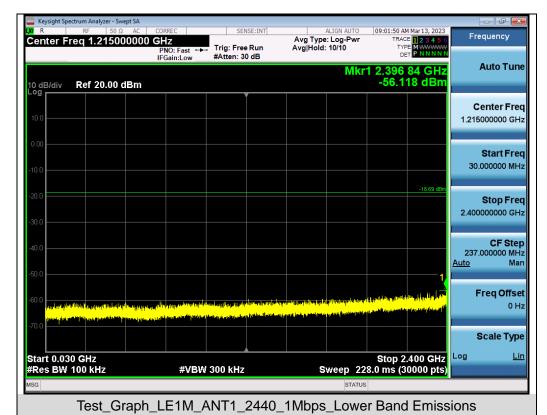





Freq Offset

Scale Type

Lin

Log

Stop 2.400 GHz Sweep 228.0 ms (30000 pts)






Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2480_1Mbps_Lower Band Emissions

#VBW 300 kHz


Start 0.030 GHz #Res BW 100 kHz
















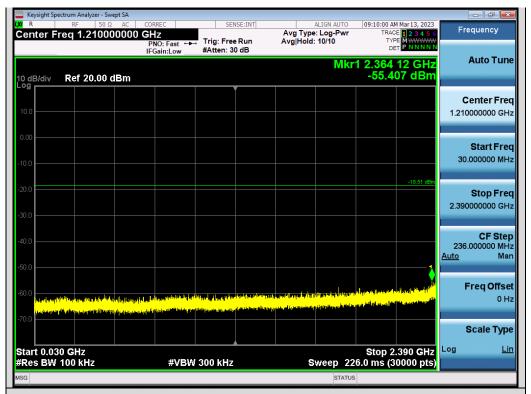


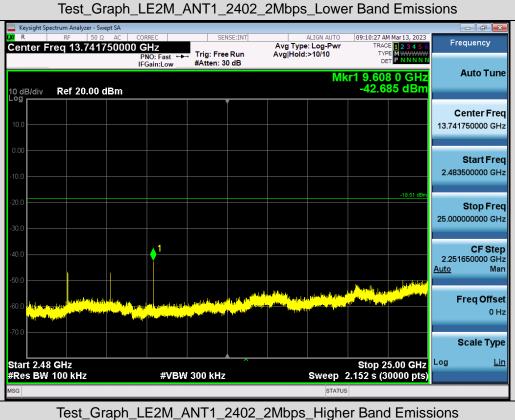








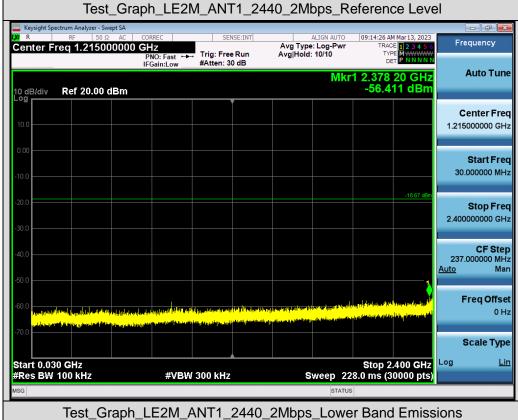

















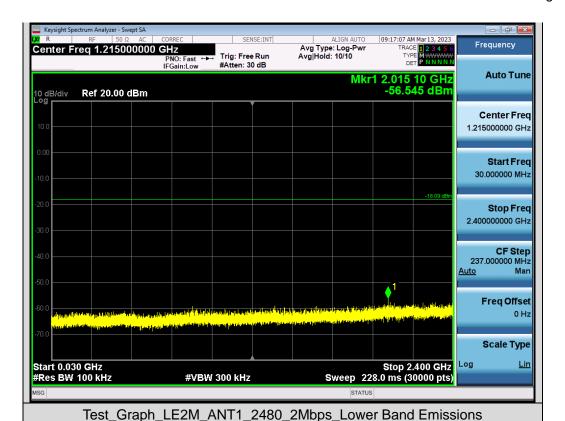

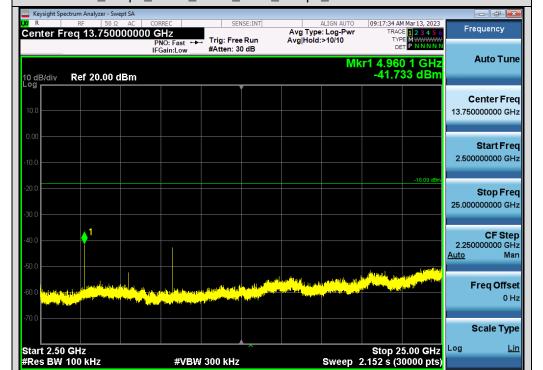

Test_Graph_LE2M_ANT1_2480_2Mbps_Higher Band Emissions






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands Frequency Avg Type: Log-Pwi Avg|Hold: 100/100 Center Freq 2.398500000 GHz Trig: Free Run #Atten: 30 dB TYPE **Auto Tune** Mkr2 2.400 000 0 GHz -52.032 dBm Ref 20.00 dBm Center Freq 2.398500000 GHz Start Freq 2.390000000 GHz Stop Freq 2.407000000 GHz Start 2.390000 GHz #Res BW 100 kHz Stop 2.407000 GHz 2.000 ms (30000 pts) CF Step 1.700000 MHz **#VBW** 300 kHz Auto Man 1.553 dBm -52.032 dBm -49.439 dBm Freq Offset 2.397 529 0 GHz 0 Hz Scale Type Log <u>Lin</u> Test_Graph_LE1M_ANT1_2402_1Mbps_Lower Band Edge Emissions Avg Type: Log-Pwr Avg|Hold: 100/100 Frequency Center Freq 2.487500000 GHz Trig: Free Run #Atten: 30 dB PNO: Fast ↔ IFGain:Low Mkr2 2.483 500 0 GHz -53.862 dBm **Auto Tune** Ref 20.00 dBm Center Frea 2.487500000 GHz Start Freq 2.475000000 GHz Stop Freq 2 500000000 GHz Stop 2.50000 GHz Sweep 4.000 ms (30000 pts) Start 2.47500 GHz #Res BW 100 kHz **CF Step** #VBW 300 kHz 2.500000 MHz <u>Auto</u> Freq Offset 0 Hz **Scale Type** Log <u>Lin</u>


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2480_1Mbps_Higher Band Edge Emissions





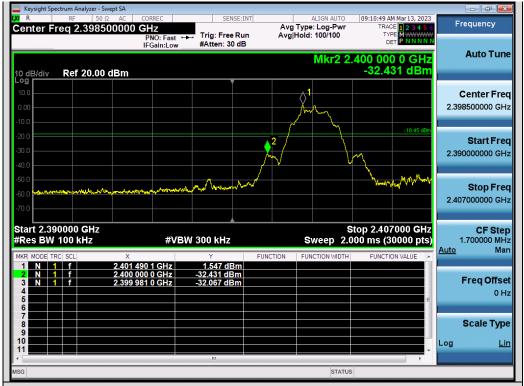

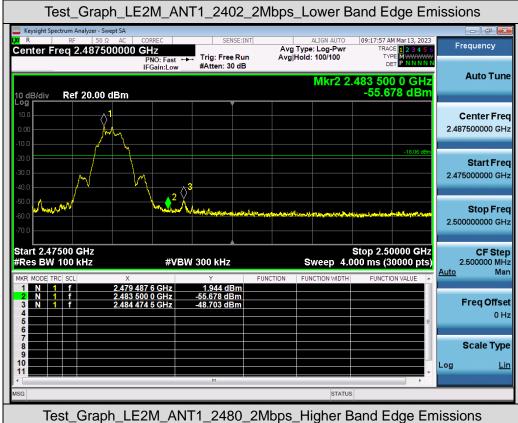



Page 39 of 57

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4. LIMITS AND MEASUREMENT RESULT

	Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail				
	2402	-13.783	≤ 8	Pass				
GFSK 1M	2440	-13.811	≪8	Pass				
	2480	-13.170	≤ 8	Pass				
	2402	-16.367	≪8	Pass				
GFSK 2M	2440	-16.411	≪8	Pass				
	2480	-15.772	≪8	Pass				






Test Graphs of Conducted Output Power Spectral Density Avg Type: Log-Pwr Avg|Hold: 92/100 Frequency Center Freq 2.402000000 GHz Trig: Free Run #Atten: 30 dB IFGain:Low **Auto Tune** Mkr1 2.401 961 GHz -13.783 dBm Ref 20.00 dBm 10 dB/div Center Freq 2.402000000 GHz Start Freq 2.401500500 GHz Stop Freq 2.402499500 GHz CF Step 99.900 kHz Auto Man Freq Offset 0 Hz **Scale Type** Center 2.4020000 GHz #Res BW 3.0 kHz Span 999.0 kHz Sweep 105.4 ms (1000 pts) Log <u>Lin</u> #VBW 10 kHz Test_Graph_LE1M_ANT1_2402_1Mbps_PSD Avg Type: Log-Pwr Avg|Hold: 93/100 Center Freq 2.440000000 GHz Frequency Trig: Free Run #Atten: 30 dB PNO: Wide ↔ IFGain:Low **Auto Tune** Mkr1 2.439 960 7 GHz -13.811 dBm Ref 20.00 dBm 10 dB/div Center Frea 2.440000000 GHz Start Freq 2.439502750 GHz Stop Freq 2 440497250 GHz CF Step 99.450 kHz <u>Auto</u> Freq Offset 0 Hz **Scale Type** Center 2.4400000 GHz #Res BW 3.0 kHz Span 994.5 kHz Sweep 104.9 ms (1000 pts) <u>Lin</u> #VBW 10 kHz

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2440_1Mbps_PSD




Freq Offset

Scale Type

Lin

Span 1.734 MHz Sweep 182.9 ms (1000 pts)



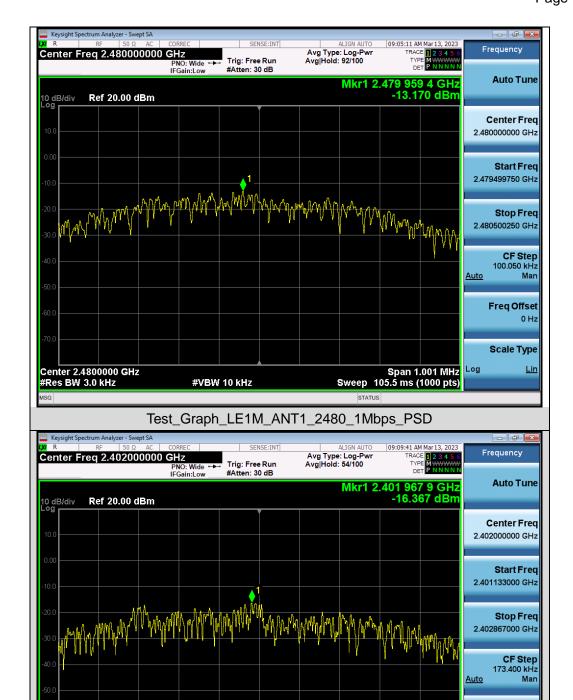


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_LE2M_ANT1_2402_2Mbps_PSD


#VBW 10 kHz

Center 2.4020000 GHz #Res BW 3.0 kHz





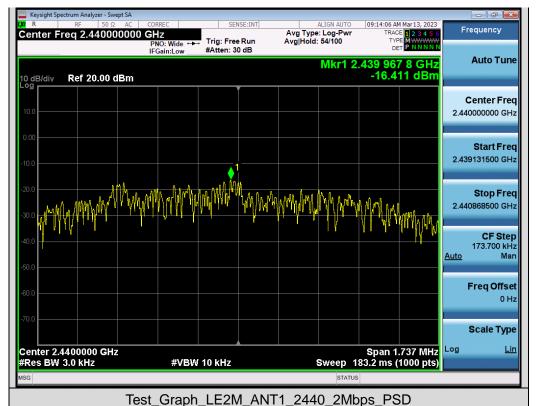

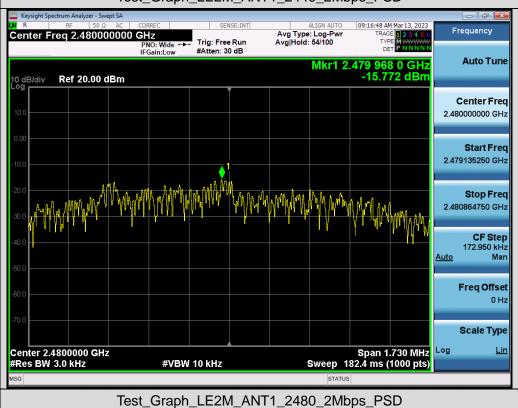




Page 43 of 57

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.






11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

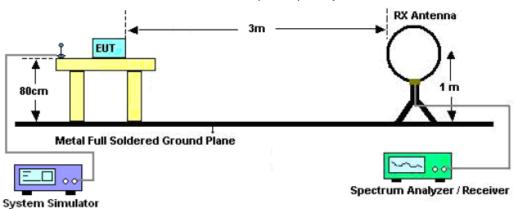

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

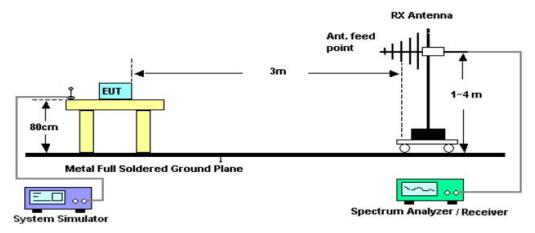

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

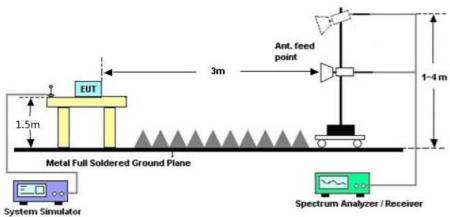



Page 45 of 57

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Page 46 of 57

Radiated emission from 30MHz to 1000MHz

EUT	Baseus True Wireless Earphones	Model Name	Baseus Bowie WX5
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

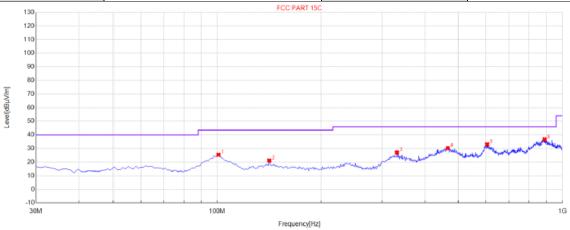


	# QP Detector							
NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Polarity
NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Folanty
1	100.81	25.46	21.07	43.50	18.04	100	70	Horizontal
2	141.55	21.18	14.80	43.50	22.32	100	100	Horizontal
3	331.67	27.06	21.05	46.00	18.94	100	280	Horizontal
4	465.53	30.34	26.39	46.00	15.66	100	20	Horizontal
5	605.21	33.10	28.53	46.00	12.90	100	250	Horizontal
6	888.45	36.67	32.64	46.00	9.33	100	20	Horizontal

RESULT: PASS



Page 47 of 57

EUT	Baseus True Wireless Earphones	Model Name	Baseus Bowie WX5
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

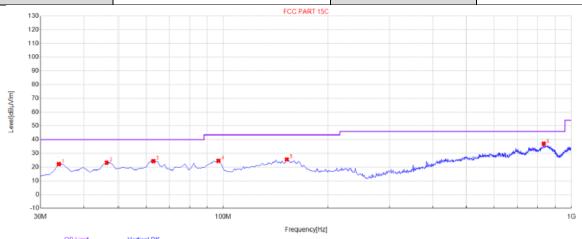

	# QP Detector							
NO.	Freq.	Level	Factor	Limit	Margin	Height	Angle	Polarity
MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polatity	
1	33.88	22.22	10.57	40.00	17.78	100	270	Vertical
2	46.49	23.28	12.77	40.00	16.72	100	10	Vertical
3	62.98	24.44	14.50	40.00	15.56	100	80	Vertical
4	96.93	24.68	12.76	43.50	18.82	100	320	Vertical
5	152.22	25.63	21.12	43.50	17.87	100	0	Vertical
6	833.16	37.02	32.20	46.00	8.98	100	280	Vertical

RESULT: PASS Note:

- 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.
- 2. All test modes had been tested. The mode 3 is the worst case and recorded in the report.



Page 48 of 57

Radiated emission above 1GHz

EUT	Baseus True Wireless Earphones	Model Name	Baseus Bowie WX5
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	43.45	0.08	43.53	74	-30.47	peak
4804.000	35.38	0.08	35.46	54	-18.54	AVG
7206.000	38.64	2.21	40.85	74	-33.15	peak
7206.000	31.29	2.21	33.5	54	-20.5	AVG
Domork:	-		•		•	

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Baseus True Wireless Earphones	Model Name	Baseus Bowie WX5
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	44.37	0.08	44.45	74	-29.55	peak
4804.000	34.85	0.08	34.93	54	-19.07	AVG
7206.000	38.26	2.21	40.47	74	-33.53	peak
7206.000	30.62	2.21	32.83	54	-21.17	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Page 49 of 57

EUT	Baseus True Wireless Earphones	Model Name	Baseus Bowie WX5
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	44.61	0.14	44.75	74	-29.25	peak
4880.000	35.75	0.14	35.89	54	-18.11	AVG
7320.000	39.73	2.36	42.09	74	-31.91	peak
7320.000	31.56	2.36	33.92	54	-20.08	AVG
<u> </u>						

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Baseus True Wireless Earphones	Model Name	Baseus Bowie WX5
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	45.17	0.14	45.31	74	-28.69	peak
4880.000	38.12	0.14	38.26	54	-15.74	AVG
7320.000	40.42	2.36	42.78	74	-31.22	peak
7320.000	32.48	2.36	34.84	54	-19.16	AVG

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 50 of 57

EUT	Baseus True Wireless Earphones	Model Name	Baseus Bowie WX5
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	44.62	0.22	44.84	74	-29.16	peak
4960.000	35.46	0.22	35.68	54	-18.32	AVG
7440.000	38.77	2.64	41.41	74	-32.59	peak
7440.000	29.43	2.64	32.07	54	-21.93	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Baseus True Wireless Earphones	Model Name	Baseus Bowie WX5
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	42.95	0.22	43.17	74	-30.83	peak
4960.000	34.01	0.22	34.23	54	-19.77	AVG
7440.000	38.67	2.64	41.31	74	-32.69	peak
7440.000	29.73	2.64	32.37	54	-21.63	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: PASS

Note:


The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Level-Limits.

The "Factor" value can be calculated automatically by software of measurement system.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. $Further\ enquiry\ of\ validity\ or\ verification\ of\ the\ test\ report\ should\ be\ addressed\ to\ AGC\ by\ agc 01@agccert.com.$

Web: http://www.agccert.com/







Test result for band edge emission at restricted bands

EUT	Baseus True Wireless Earphones	Model Name	Baseus Bowie WX5
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Test Graph for Peak Measurement Frequency Center Freq 2.388250000 GHz Avg Type: Log-Pw Avg|Hold: 100/100 Auto Tune Mkr2 2.390 00 GH 48.056 dBµV/ı Ref 126.99 dBµV/m Center Freq 2.388250000 GHz Start Fred 2.370000000 GHz Stop Freq 2.406500000 GHz Stop 2.40650 GHz .066 ms (1000 pts) 2.401 49 GHz 96.797 dBµV/n 2.390 00 GHz 48.056 dBµV/n Freq Offset 0 Hz

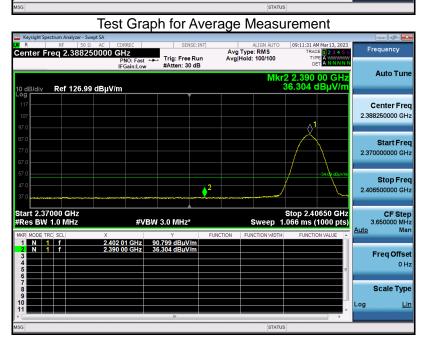

RESULT: PASS




Scale Type




Baseus True Wireless EUT Model Name Baseus Bowie WX5 Earphones 21° C **Temperature Relative Humidity** 54% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Vertical Mode 1 **Antenna**



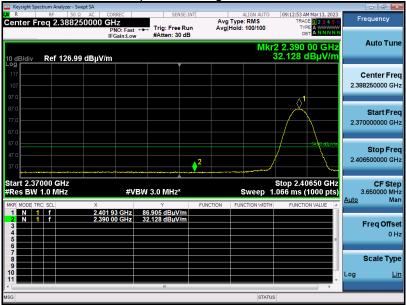

RESULT: PASS



Freq Offset

Scale Type




Baseus True Wireless EUT Model Name Baseus Bowie WX5 Earphones 21° C **Temperature Relative Humidity** 54% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Horizontal Mode 3 **Antenna**


Test Graph for Peak Measurement

Center Freq 2.487750000 GHz Frequency Avg Type: Log-Pw Avg|Hold: 100/100 Trig: Free Run Auto Tune Ref 126.99 dBμV/m Center Fred 2.487750000 GHz Start Fred 2.475500000 GHz Stop Freq #VBW 3.0 MHz 2.479 497 GHz 97.199 dBµV/m 2.483 500 GHz 51.624 dBµV/m



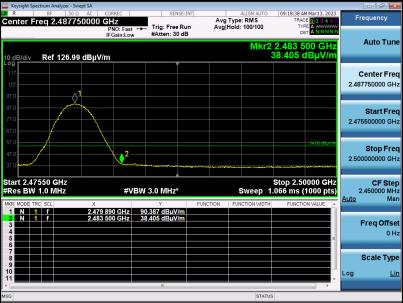


RESULT: PASS





Baseus True Wireless EUT Model Name Baseus Bowie WX5 Earphones 21° C **Temperature Relative Humidity** 54% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Vertical Mode 3 **Antenna**

> Test Graph for Peak Measurement Center Freq 2.487750000 GHz Frequency Avg Type: Log-Pw Avg|Hold: 100/100 Trig: Free Run Auto Tune Mkr2 2.483 500 G 47.651 dBµV Ref 126.99 dBμV/m Center Fred 2.487750000 GHz Start Fred 2.475500000 GHz Stop Fred #VBW 3.0 MHz 2.479 473 GHz 93.298 dBµV/m 2.483 500 GHz 47.651 dBµV/m Freq Offset

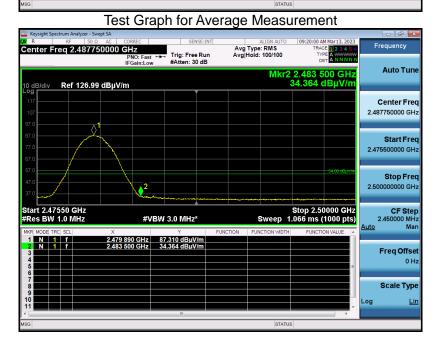

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 55 of 57

12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

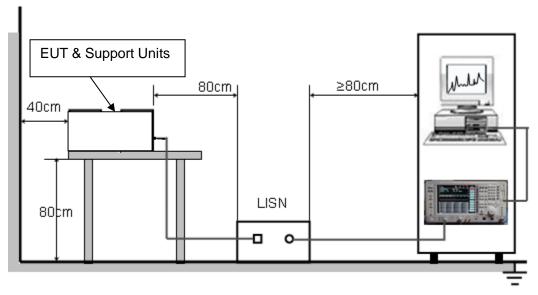



Page 56 of 57

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The BT function cannot transmit when charging.



Page 57 of 57

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC11758230201AP02

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC11758230201AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.