

SAR TEST REPORT

Equipment Under Test :	GSM 850&GSM1900MHz MOBILE PHONE
FCC ID :	RAD027
Model No. :	CE5
Market Name :	ELLE N1 Colección 2005-2006
Applicant :	TCL&Alcatel Mobile Phones
Address of Applicant :	30/F, Times Square, 500 Zhangyang RD. Shanghai 200122, P.R.China
Date of Receipt :	2005.09.13
Date of Test :	2005.09.19 – 2005.11.23
Date of Issue :	2005.11.25

Standards:

**FCC OET Bulletin 65 supplement C,
ANSI/IEEE C95.1, C95.3, IEEE 1528-2002**

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS-CSTC Shanghai GSM Lab or testing done by SGS-CSTC Shanghai GSM Lab must approve SGS Shanghai GSM Lab in connection with distribution or use of the product described in this report in writing.


Tested by :



Date :

2005.11.25

Approved by :



Date :

2005.11.25

Contents

1. General Information.....	5
1.1 Test Laboratory.....	5
1.2 Details of Applicant	5
1.3 Description of EUT(s)	5
1.4 Test Environment	6
1.5 Operation Configuration	6
1.6 The SAR Measurement System.....	6
1.7 SAR System Verification	8
1.8 Tissue Simulant Fluid for the Frequency Band 850MHz and 1900MHZ	9
1.9 Test Standards and Limits	10
2. Summary of Results	11
3. Instruments List	13
4. Measurements	14
850MHz GSM Mode.....	14
4.1 FCC-OET65-LeftHandSide-Touch-GSM850-Low	14
FCC-OET65-LeftHandSide-Touch-GSM850-Low	14
4.2 FCC-OET65-LeftHandSide-Touch-GSM850-Mid	15
FCC-OET65-LeftHandSide-Touch-GSM850-Mid.....	16
4.3 FCC-OET65-LeftHandSide-Touch-GSM850-High	17
FCC-OET65-LeftHandSide-Touch-GSM850-High	17
4.4 FCC-OET65-LeftHandSide-Tilt-GSM850-Low	19
FCC-OET65-LeftHandSide-Tilt-GSM850-Low	19
4.5 FCC-OET65-LeftHandSide-Tilt-GSM850-Mid	21
FCC-OET65-LeftHandSide-Tilt-GSM850-Mid.....	21
4.6 FCC-OET65-LeftHandSide-Tilt-GSM850-High.....	23
FCC-OET65-LeftHandSide-Tilt-GSM850-High.....	23
4.7 FCC-OET65-RightHandSide-Touch-GSM850-Low	25
FCC-OET65-RightHandSide-Touch-GSM850-Low	25
4.8 FCC-OET65-RightHandSide-Touch-GSM850-Mid	27
FCC-OET65-RightHandSide-Touch-GSM850-Mid.....	27
4.9 FCC-OET65-RightHandSide-Touch-GSM850-High.....	29
FCC-OET65-RightHandSide-Touch-GSM850-High	29

4.10 FCC-OET65-RightHandSide-Tilt-GSM850-Low.....	31
FCC-OET65-RightHandSide-Tilt-GSM850-Low	31
4.11 FCC-OET65-RightHandSide-Tilt-GSM850-Mid	33
FCC-OET65-RightHandSide-Tilt-GSM850-Mid	33
4.12 FCC-OET65-RightHandSide-Tilt-GSM850-High	35
FCC-OET65-RightHandSide-Tilt-GSM850-High	35
4.13 FCC-OET65-Body-Worn-GSM850-Low.....	37
FCC-OET65-Body-Worn-GSM850-Low	37
4.14 FCC-OET65-Body-Worn-GSM850-Mid	39
FCC-OET65-Body-Worn-GSM850-Mid	39
4.15 FCC-OET65-Body-Worn-GSM850-High.....	41
FCC-OET65-Body-Worn-GSM850-High.....	41
850MHz GPRS Mode.....	43
4.16 FCC-OET65-Body-Worn-GSM850-GPRS-Low	43
FCC-OET65-Body-Worn-GSM850-GPRS-Low.....	43
4.17 FCC-OET65-Body-Worn-GSM850-GPRS-Middle	45
FCC-OET65-Body-Worn-GSM850-GPRS-Mid	45
4.18 FCC-OET65-Body-Worn-GSM850-GPRS-High	47
FCC-OET65-Body-Worn-GSM850-GPRS-High.....	47
1900MHz GSM Mode.....	48
4.19 FCC-OET65-LeftHandSide-Touch-GSM1900-Low	48
FCC-OET65-LeftHandSide-Touch-GSM1900-Low	48
4.20 FCC-OET65-LeftHandSide-Touch-GSM1900-Mid	50
FCC-OET65-LeftHandSide-Touch-GSM1900-Mid	50
4.21 FCC-OET65-LeftHandSide-Touch-GSM1900-High	52
FCC-OET65-LeftHandSide-Touch-GSM1900-High.....	52
4.22 FCC-OET65-LeftHandSide-Tilt-GSM1900-Low	54
FCC-OET65-LeftHandSide-Tilt-GSM1900-Low	54
4.23 FCC-OET65-LeftHandSide-Tilt-GSM1900-Mid	56
FCC-OET65-LeftHandSide-Tilt-GSM1900-Mid	56
4.24 FCC-OET65-LeftHandSide-Tilt-GSM1900-High.....	58
FCC-OET65-LeftHandSide-Tilt-GSM1900-High.....	58
4.25 FCC-OET65-RightHandSide-Touch-GSM1900-Low.....	60
FCC-OET65-RightHandSide-Touch-GSM1900-Low	60

4.26 FCC-OET65-RightHandSide-Touch-GSM1900-Mid	62
FCC-OET65-RightHandSide-Touch-GSM1900-Mid.....	62
4.27 FCC-OET65-RightHandSide-Touch-GSM1900-High.....	64
FCC-OET65-RightHandSide-Touch-GSM1900-High	64
4.28 FCC-OET65-RightHandSide-Tilt-GSM1900-Low.....	66
FCC-OET65-RightHandSide-Tilt-GSM1900-Low	66
4.29 FCC-OET65-RightHandSide-Tilt-GSM1900-Mid.....	68
FCC-OET65-RightHandSide-Tilt-GSM1900-Mid.....	68
4.30 FCC-OET65-RightHandSide-Tilt-GSM1900-High	70
FCC-OET65-RightHandSide-Tilt-GSM1900-High.....	70
4.31 FCC-OET65-Body-Worn-GSM1900-Low.....	72
FCC-OET65-Body-Worn-GSM1900-Low.....	72
4.32 FCC-OET65-Body-Worn-GSM1900-Mid.....	74
FCC-OET65-Body-Worn-GSM1900-Mid	74
4.33 FCC-OET65-Body-Worn-GSM1900-High.....	76
FCC-OET65-Body-Worn-GSM1900-High.....	76
1900MHz GPRS Mode.....	78
4.34 FCC-OET65-Body-Worn-GSM1900-GPRS-Low	78
FCC-OET65-Body-Worn-GSM1900-GPRS-Low.....	78
4.35 FCC-OET65-Body-Worn-GSM1900-GPRS-Middle	80
FCC-OET65-Body-Worn-GSM1900-GPRS-Mid	80
4.36 FCC-OET65-Body-Worn-GSM1900-GPRS-High	82
FCC-OET65-Body-Worn-GSM1900-GPRS-High.....	82
Appendix	85
1. Photographs of Test Setup.....	85
2. Photographs of the EUT	88
3. Photographs of the battery.....	89
4. Photograph of the charger	89
5. Probe Calibration certificate.....	90
6. Uncertainty analysis	98
7. Phantom description	99

1. General Information

1.1 Test Laboratory

GSM Lab
SGS-CSTC Standards Technical Services Co.Ltd Shanghai Branch
9F,the 3rd Building, No.899, Yishan Rd, Xuhui District, Shanghai, China
Zip code: 200233
Telephone: +86 (0) 21 6495 1616
Fax: +86 (0) 21 6495 3679
Internet: <http://www.cn.sgs.com>

1.2 Details of Applicant

Name: TCL&Alcatel Mobile Phones
Address: 30/F, Times Square, 500 Zhangyang RD. Shanghai
200122, P.R.China

1.3 Description of EUT(s)

Brand name	Alcatel	
Model No.	CE5	
Market Name	ELLE N1 Colección 2005-2006	
Serial No.	IMEI: 01070500000045-7	
Battery Type	Lithium-Ion, 3.7Volt	
Antenna Type	Internal Antenna	
Operation Mode	GSM850/GSM1900	
Modulation Mode	GMSK	
Frequency range	GSM850	Tx: 824~849 MHz
		Rx: 869~894 MHz
	GSM1900	Tx: 1850~1910 MHz
		Rx: 1930~1990 MHz
Maximum RF Conducted Power	GSM850: 33dBm, GSM1900: 30dBm	

1.4 Test Environment

Ambient temperature: 22.0° C

Tissue Simulating Liquid: 22° C

Relative Humidity: 38%

1.5 Operation Configuration

Configuration 1: GSM 850, LeftHandSide Touch & 15° Tilt Position

Configuration 2: GSM 850, RightHandSide Touch & 15° Tilt Position

Configuration 3: GSM 850, BodyWorn (1.5cm between EUT and phantom)

Configuration 4: GSM 1900, LeftHandSide Touch & 15° Tilt Position

Configuration 5: GSM 1900, RightHandSide Touch & 15° Tilt Position

Configuration 6: GSM 1900, BodyWorn (1.5cm between EUT and phantom)

1.6 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig.a.

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (Speag Dasy 4 professional system). A Model ET3DV6 1774 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

The DASY4 system for performing compliance tests consists of the following items:

- Ÿ A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).
- Ÿ A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- Ÿ A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable

batteries. The signal is optically transmitted to the EOC.

- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

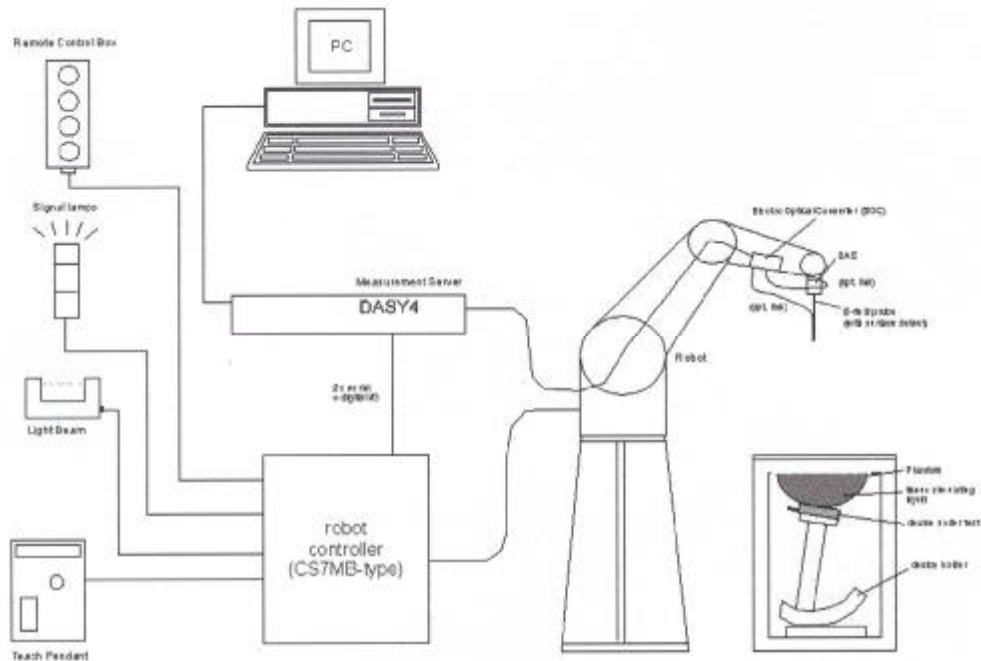


Fig. a SAR System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000.
- DASY4 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and body-worn usage.

- Ÿ The device holder for handheld mobile phones.
- Ÿ Tissue simulating liquid mixed according to the given recipes.
- Ÿ Validation dipole kits allowing to validate the proper functioning of the system.

1.7 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig. b. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. These tests were done at 850MHz and 1900MHz. The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed in the table 1 (SAR values are normalized to 1W forward power delivered to the dipole). During the tests, the ambient temperature of the laboratory was in the range 22°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

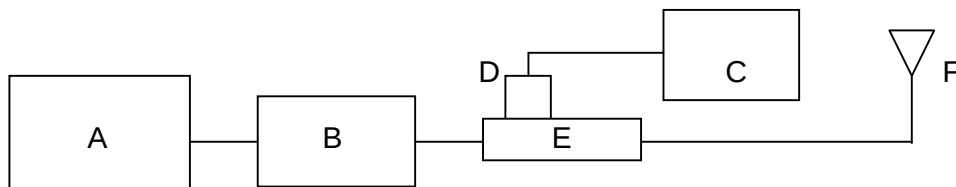


Fig. b the microwave circuit arrangement used for SAR system verification

- A. Agilent Model E4438C Signal Generator
- B. Agilent Model 8449B Preamplifier
- C. Agilent Model E4416A Power Meter
- D. Agilent Model 8481H Power Sensor
- E. HT CP6100 20N Dual directional coupler
- F. Reference dipole antenna

Validation Kit	Frequency (MHz)	Target SAR 1g (250mW)	Target SAR 10g (250mW)	Measured SAR 1g	Measured SAR 10g	Measured Date
ET3DV6 SN1774	900 Head	2.69	1.73	2.74	1.77	2005-09-08
ET3DV6 SN1774	900 Body	2.75	1.77	2.83	1.82	2005-09-11
ES3DV3 SN3088	900 Body	2.75	1.77	2.81	1.80	2005-11-23
ET3DV6 SN1774	1900 Head	10.4	5.35	10.31	5.30	2005-09-10
ET3DV6 SN1774	1900 Body	10.52	5.53	10.42	5.46	2005-09-04

Table 1. Result System Validation

1.8 Tissue Simulant Fluid for the Frequency Band 850MHz and 1900MHZ

The dielectric properties for this body-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with Agilent E5071B Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in Table 2. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Fluid was 22°C.

Frequency (MHz)	Tissue Type	Limit/Measured	Permittivity (ρ)	Conductivity (σ)	Simulated Tissue Temp (°C)
850	Head	Measured, 2005-09-19	41.63	0.892	22
		Recommended Limit	41.5±5%	0.90±5%	20-24
	Body	Measured, 2005-09-21	52.52	1.013	21.8
		Measured, 2005-11-23	55.4	0.957	22
		Recommended Limit	55.2±5%	0.97±5%	20-24
1900	Head	Measured, 2005-09-20	39.99	1.46	22.5
		Recommended Limit	40.0±5%	1.40±5%	20-24

	Body	Measured, 2005-09-26	51.46	1.54	21.5
		Recommended Limit	53.3±5%	1.52±5%	20-24

Table 2. Dielectric parameters for the Frequency Band 850MHz&1900MHZ

1.9 Test Standards and Limits

According to FCC 47 CFR §2.1093(d) the limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in Section 4.2 of "IEEE Standard for Safty Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3KHz to 300GHz," ANSI/IEEE C95.1-1992, Conpyright 1992 by the Institute of Electrical & Electronics Engineers, Inc., New York, New York 10071.

Human Exposure	Uncontrolled Environment General Population
Spatial Peak SAR (Brain)	1.60 W/Kg (averaged over a mass of 1g)

Table 3. RF Exposure Limits

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.

2. Summary of Results

Frequency Band(MHz)	EUT position	Conducted Output Power (Average)(dBm)	1g Average (W/Kg)	Power Drift (dB)	Amb. Temp (°C)	Verdict
GSM 850	LeftHandSide Touch, Low Channel	32.8	1.13	-0.219	22	PASS
	LeftHandSide Touch, Mid Channel	32.6	1.06	-0.073	22	PASS
	LeftHandSide Touch, High Channel	32.6	1.06	-0.127	22	PASS
	LeftHandSide Tilt, Low Channel	32.8	0.255	-0.056	22	PASS
	LeftHandSide Tilt, Mid Channel	32.6	0.262	-0.018	22	PASS
	LeftHandSide Tilt, High Channel	32.6	0.270	-0.069	22	PASS
	RightHandSide Touch, Low Channel	32.8	1.19	0.061	22	PASS
	RightHandSide Touch, Mid Channel	32.6	1.11	0.163	22	PASS
	RightHandSide Touch, High Channel	32.6	1.14	-0.047	22	PASS
	RightHandSide Tilt, Low Channel	32.8	0.277	-0.040	22	PASS
	RightHandSide Tilt, Mid Channel	32.6	0.257	-0.060	22	PASS
	RightHandSide Tilt, High Channel	32.6	0.255	-0.047	22	PASS
	BodyWorn, Low Channel	32.8	0.681	-0.014	22	PASS
	BodyWorn, Mid Channel	32.6	0.668	0.01	22	PASS
	BodyWorn, High Channel	32.6	0.662	-0.036	22	PASS
GPRS 850 2 Tx slot	BodyWorn, Low Channel	33.5	1.38	-0.113	22	PASS
	BodyWorn, Mid Channel	33.2	1.36	0.000	22	PASS
	BodyWorn, High Channel	33.2	1.3	-0.110	22	PASS
GSM 1900	LeftHandSide Touch, Low Channel	30.7	0.662	0.417	22	PASS
	LeftHandSide Touch, Mid Channel	30.8	0.710	-0.051	22	PASS
	LeftHandSide Touch, High Channel	30.7	0.699	-0.073	22	PASS
	LeftHandSide Tilt, Low Channel	30.7	0.167	-0.132	22	PASS

	LeftHandSide Tilt, Mid Channel	30.8	0.175	-0.143	22	PASS
	LeftHandSide Tilt, High Channel	30.7	0.179	-0.052	22	PASS
	RightHandSide Touch, Low Channel	30.7	0.715	0.045	22	PASS
	RightHandSide Touch, Mid Channel	30.8	0.805	-0.103	22	PASS
	RightHandSide Touch, High Channel	30.7	0.857	0.013	22	PASS
	RightHandSide Tilt, Low Channel	30.7	0.179	-0.120	22	PASS
	RightHandSide Tilt, Mid Channel	30.8	0.189	-0.032	22	PASS
	RightHandSide Tilt, High Channel	30.7	0.201	0.720	22	PASS
	BodyWorn, Low Channel	30.7	0.197	-0.089	22	PASS
	BodyWorn, Mid Channel	30.8	0.202	-0.043	22	PASS
	BodyWorn, High Channel	30.7	0.209	-0.01	22	PASS
	BodyWorn, Low Channel	31.1	0.369	-0.186	22	PASS
GPRS 1900 2 Tx slot	BodyWorn, Mid Channel	31.2	0.374	-0.099	22	PASS
	BodyWorn, High Channel	31.1	0.395	-0.079	22	PASS

Note:

1. In GSM850 band, the low, middle and high channels are CH128/824.2MHz, CH189/836.4MHz and CH251/848.8MHz separately.
2. In GSM1900 band, the low, middle and high channels are CH512/1805.2MHz, CH661/1880.0MHz and CH810/1909.8MHz separately.
3. For the Bodyworn measurements the sample was only placed with the antenna toward the phantom since this position delivers the highest SAR values.

3. Instruments List

Instrument	Model	Serial number	No.	Date of last Calibration
Desktop PC	COMPAQ EVO	N/A	GSM-SAR-025	N/A
Dasy 4 software	V 4.5 build 19	N/A	GSM-SAR-001	N/A
Dasy 4 software	V 4.6 build 23	N/A	GSM-SAR-001	N/A
Probe	ET3DV6	1774	GSM-SAR-021	2004.10.26
Probe	ES3DV3	3088	GSM-SAR-031	2005.09.13
DAE	DAE4	611	GSM-SAR-123	2005.5.27
Phantom	SAM	N/A	GSM-SAR-005	N/A
Robot	RX90L	N/A	GSM-SAR-008	N/A
900MHz system validation dipole	D900V2	184	GSM-SAR-013	2005.8.25
1900MHz system validation dipole	D1900V2	5d028	GSM-SAR-020	2005.8.25
Dielectric probe kit	85070D	US01440168	GSM-SAR-016	2004.12.20
Agilent network analyzer	E5071B	MY42100549	GSM-SAR-007	2004.12.20
Agilent signal generator	E4438	14438CATO-19719	GSM-SAR-008	2004.12.20
Agilent preamplifier	8449B	3008A01921	GSM-SAR-009	2004.12.20
Agilent power meter	E4416A	GB41292095	GSM-SAR-010	2004.12.20
Agilent power sensor	8481h	MY41091234	GSM-SAR-011	2004.12.20
HT CP6100 20N Coupling	6100	SCP301480120	GSM-SAR-012	2004.12.20
R&S Universal radio communication tester	CMU200	103633	GSM-AUD-002	2004.12.20

4. Measurements

850MHz GSM Mode

4.1 FCC-OET65-LeftHandSide-Touch-GSM850-Low

Date/Time: 2005-9-19 14:42:28 Date/Time: 2005-9-19 14:51:46

Test Laboratory: SGS-GSM

FCC-OET65-LeftHandSide-Touch-GSM850-Low

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.866$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Low/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.21 mW/g


Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.91 V/m; Power Drift = -0.219 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.770 mW/g

Maximum value of SAR (measured) = 1.22 mW/g

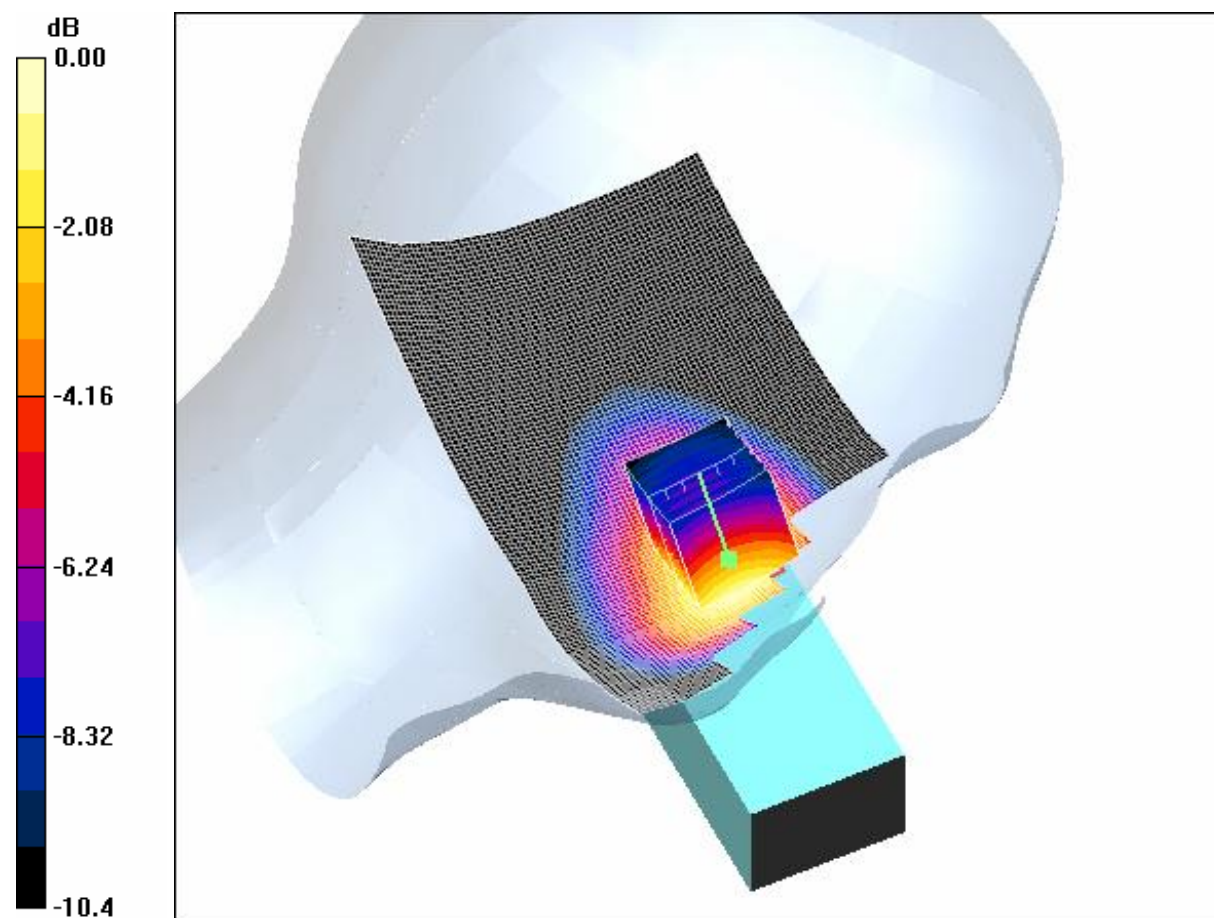

0 dB = 1.22mW/g

4.2 FCC-OET65-LeftHandSide-Touch-GSM850-Mid

Date/Time: 2005-9-19 15:11:13Date/Time: 2005-9-19 15:20:30

Test Laboratory: SGS-GSM

FCC-OET65-LeftHandSide-Touch-GSM850-Mid

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.878$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Middle/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.13 mW/g


Touch position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.20 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.722 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

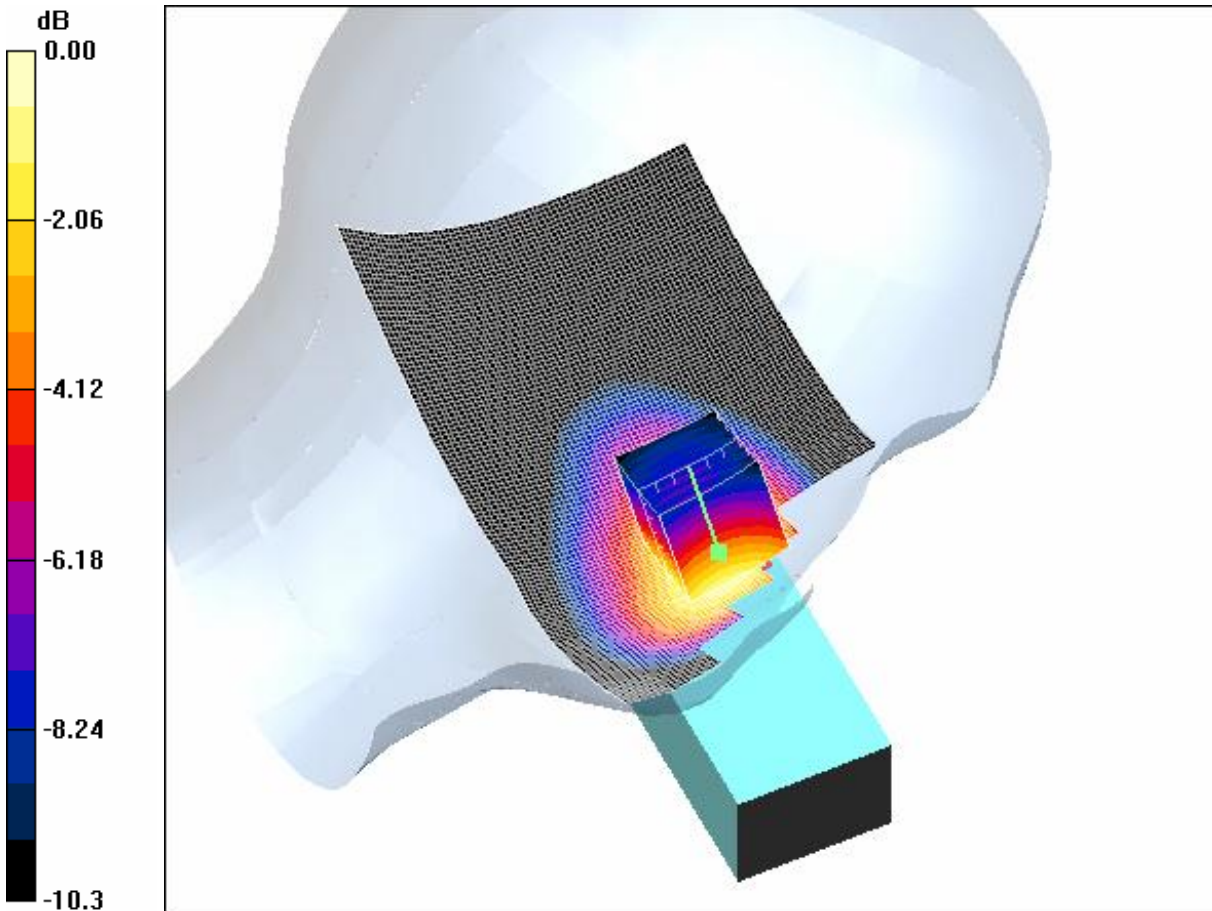

0 dB = 1.14mW/g

4.3 FCC-OET65-LeftHandSide-Touch-GSM850-High

Date/Time: 2005-9-19 15:43:05Date/Time: 2005-9-19 15:52:22

Test Laboratory: SGS-GSM

FCC-OET65-LeftHandSide-Touch-GSM850-High

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r =$

41.6; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - High/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.14 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.95 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.719 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

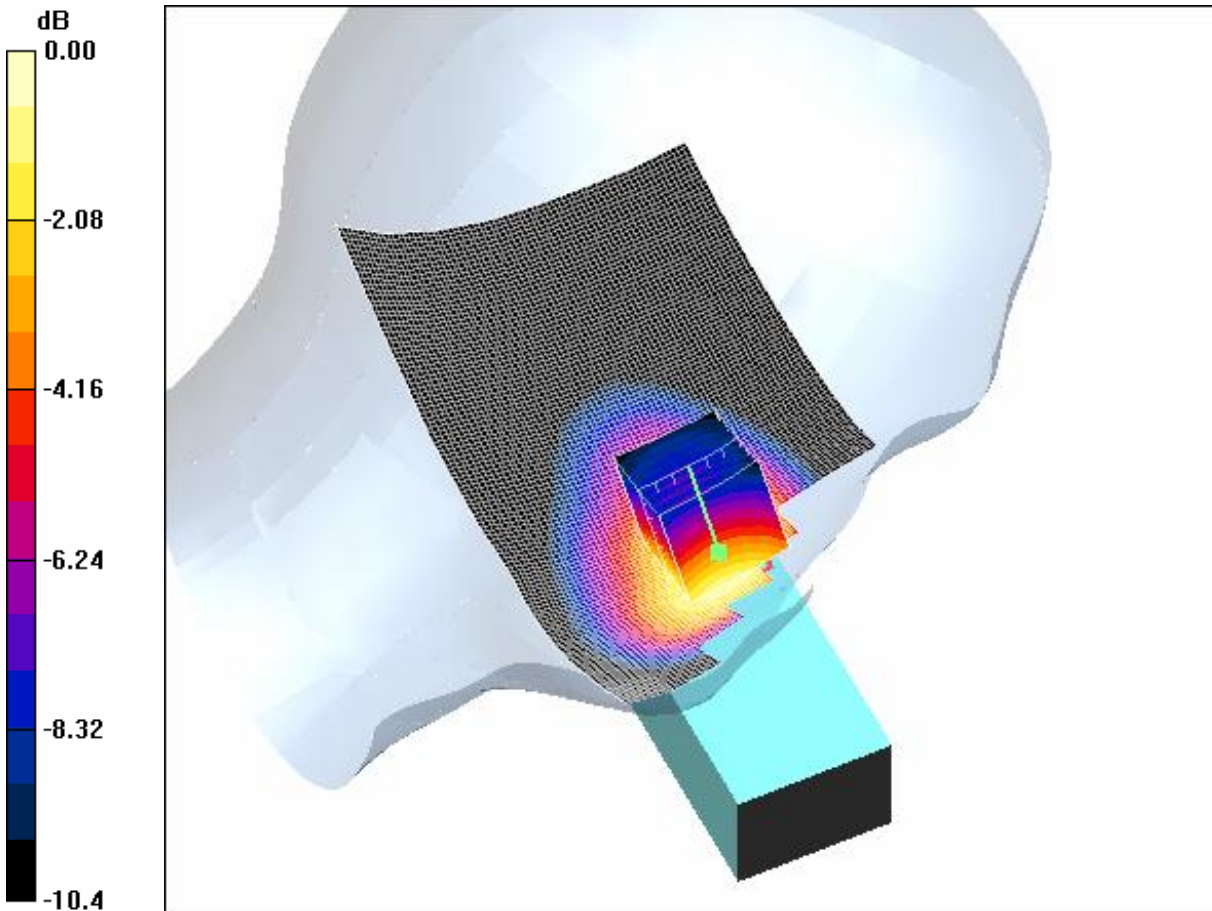

0 dB = 1.14mW/g

4.4 FCC-OET65-LeftHandSide-Tilt-GSM850-Low

Date/Time: 2005-9-19 17:16:12Date/Time: 2005-9-19 17:25:28

Test Laboratory: SGS-GSM

FCC-OET65-LeftHandSide-Tilt-GSM850-Low

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.866$ mho/m; $\epsilon_r =$

41.8; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Low/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.266 mW/g


Tilt position - Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.266 mW/g

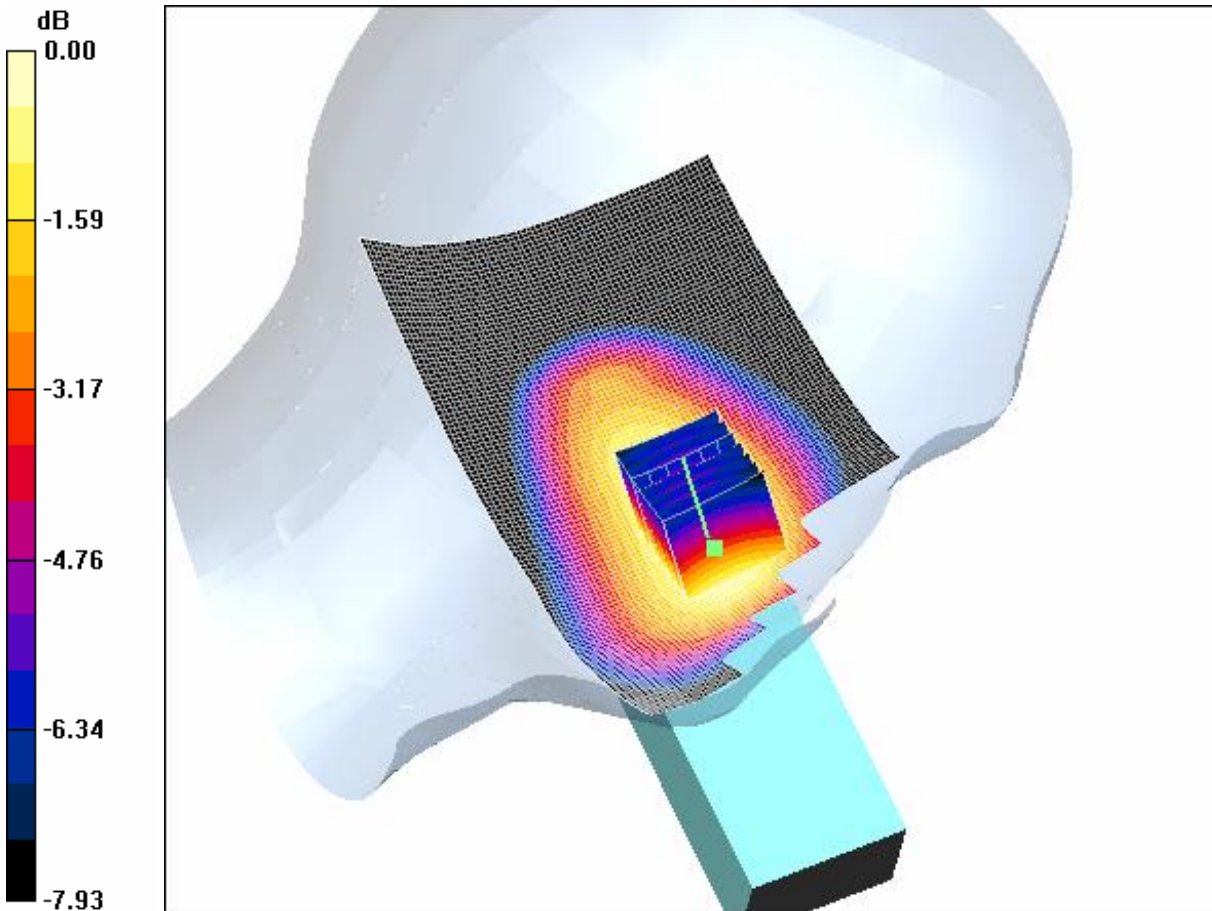

0 dB = 0.266mW/g

4.5 FCC-OET65-LeftHandSide-Tilt-GSM850-Mid

Date/Time: 2005-9-19 16:18:07Date/Time: 2005-9-19 16:27:24

Test Laboratory: SGS-GSM

FCC-OET65-LeftHandSide-Tilt-GSM850-Mid

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.878$ mho/m; $\epsilon_r =$

41.7; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Middle/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.274 mW/g


Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.195 mW/g

Maximum value of SAR (measured) = 0.274 mW/g

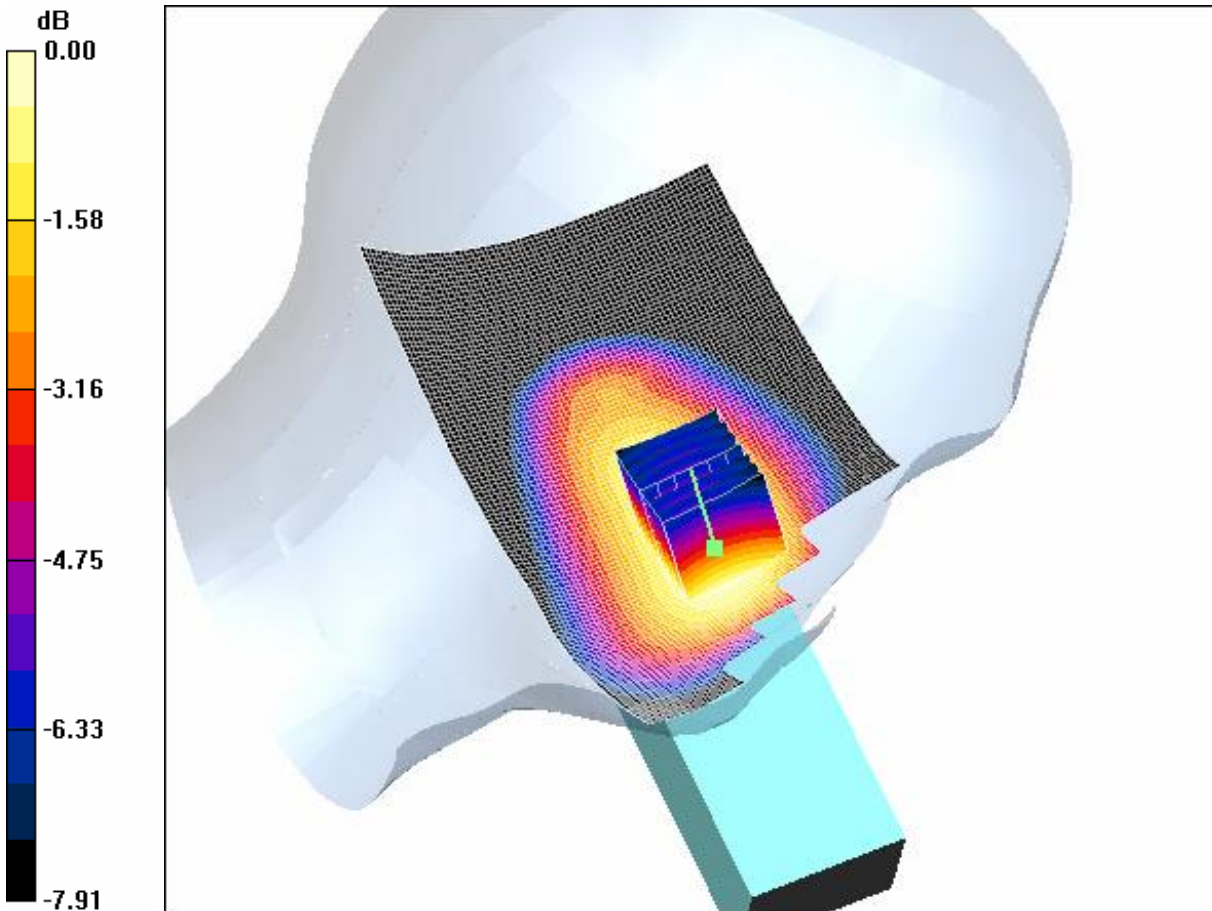

0 dB = 0.274mW/g

4.6 FCC-OET65-LeftHandSide-Tilt-GSM850-High

Date/Time: 2005-9-19 19:15:59Date/Time: 2005-9-19 19:25:15

Test Laboratory: SGS-GSM

FCC-OET65-LeftHandSide-Tilt-GSM850-High

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r =$

41.6; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - High/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.282 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.283 mW/g

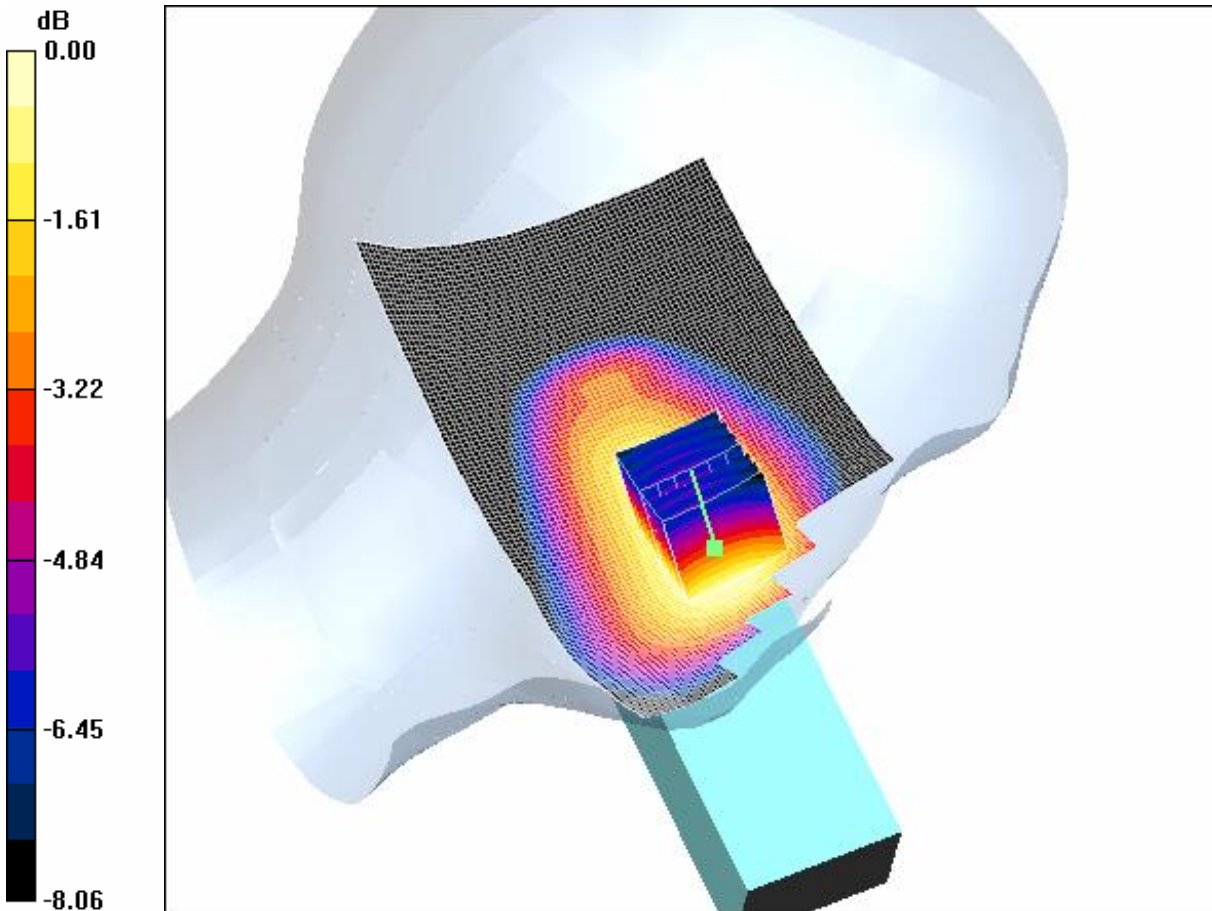

0 dB = 0.283mW/g

4.7 FCC-OET65-RightHandSide-Touch-GSM850-Low

Date/Time: 2005-9-19 10:56:40Date/Time: 2005-9-19 11:05:52

Test Laboratory: SGS-GSM

FCC-OET65-RightHandSide-Touch-GSM850-Low

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.866$ mho/m; $\epsilon_r =$

41.8; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Low/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.30 mW/g


Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.791 mW/g

Maximum value of SAR (measured) = 1.26 mW/g

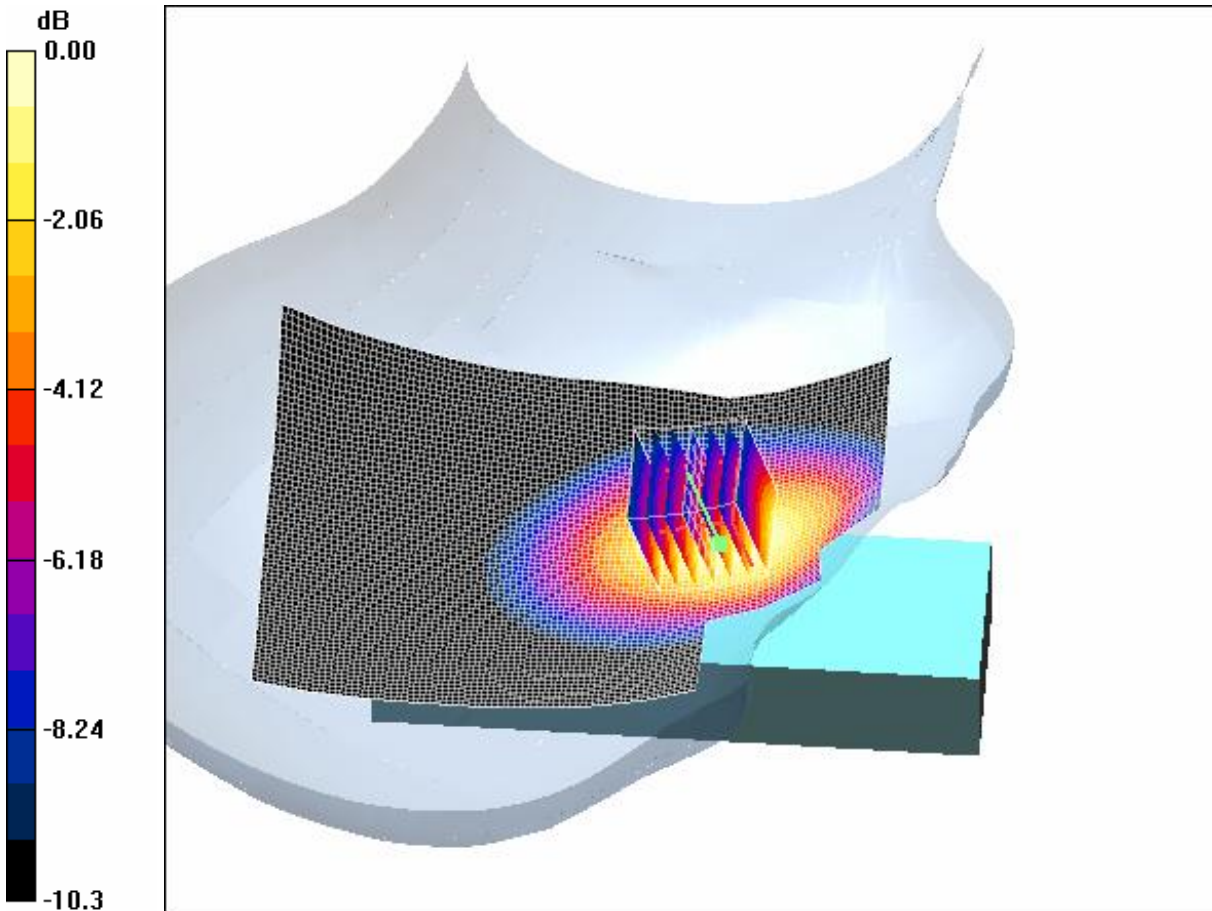

0 dB = 1.26mW/g

4.8 FCC-OET65-RightHandSide-Touch-GSM850-Mid

Date/Time: 2005-9-19 10:28:28Date/Time: 2005-9-19 10:37:43

Test Laboratory: SGS-GSM

FCC-OET65-RightHandSide-Touch-GSM850-Mid

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.878$ mho/m; $\epsilon_r =$

41.7; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Middle/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.20 mW/g


Touch position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.44 V/m; Power Drift = 0.163 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.737 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

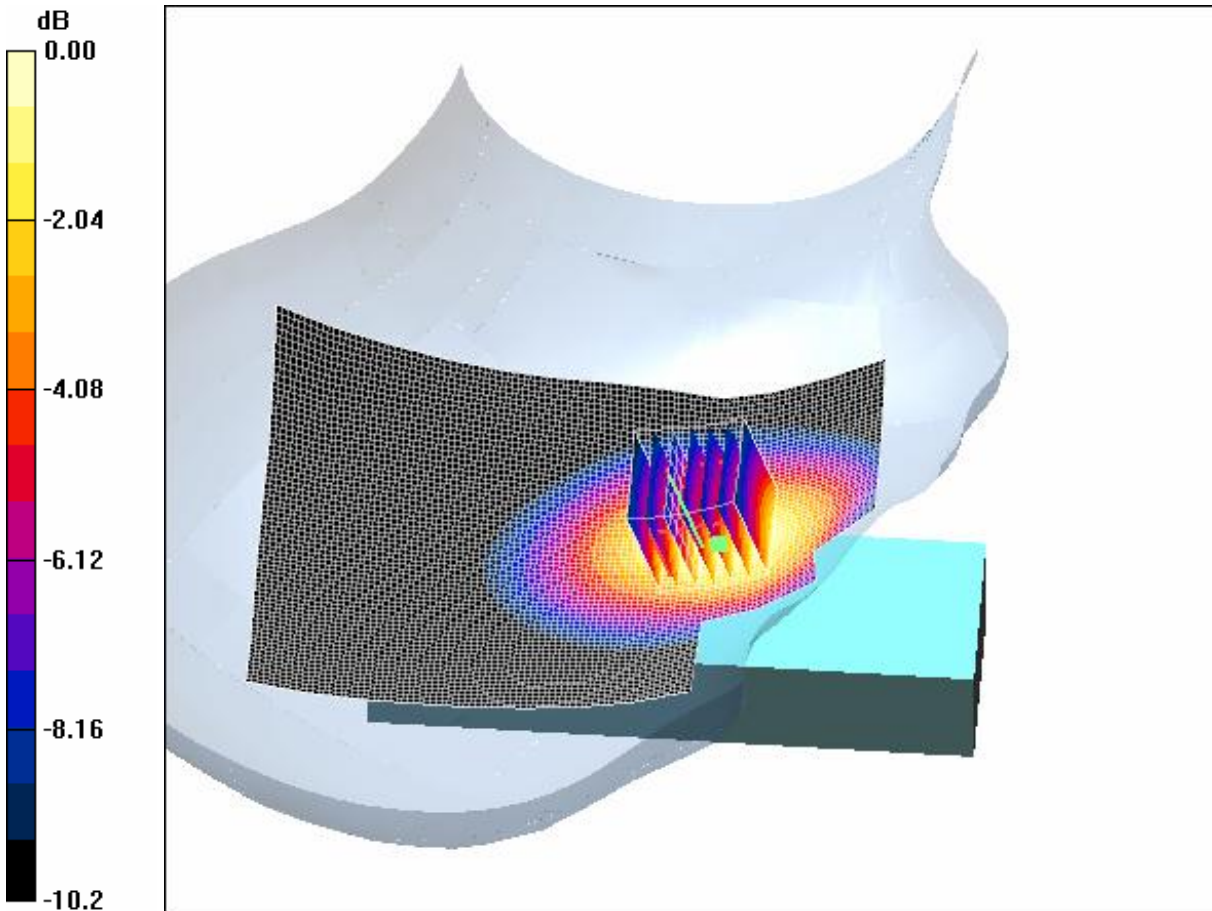

0 dB = 1.18mW/g

4.9 FCC-OET65-RightHandSide-Touch-GSM850-High

Date/Time: 2005-9-19 11:44:05Date/Time: 2005-9-19 11:53:19

Test Laboratory: SGS-GSM

FCC-OET65-RightHandSide-Touch-GSM850-High

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r =$

41.6; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - High/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.24 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.66 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.757 mW/g

Maximum value of SAR (measured) = 1.21 mW/g

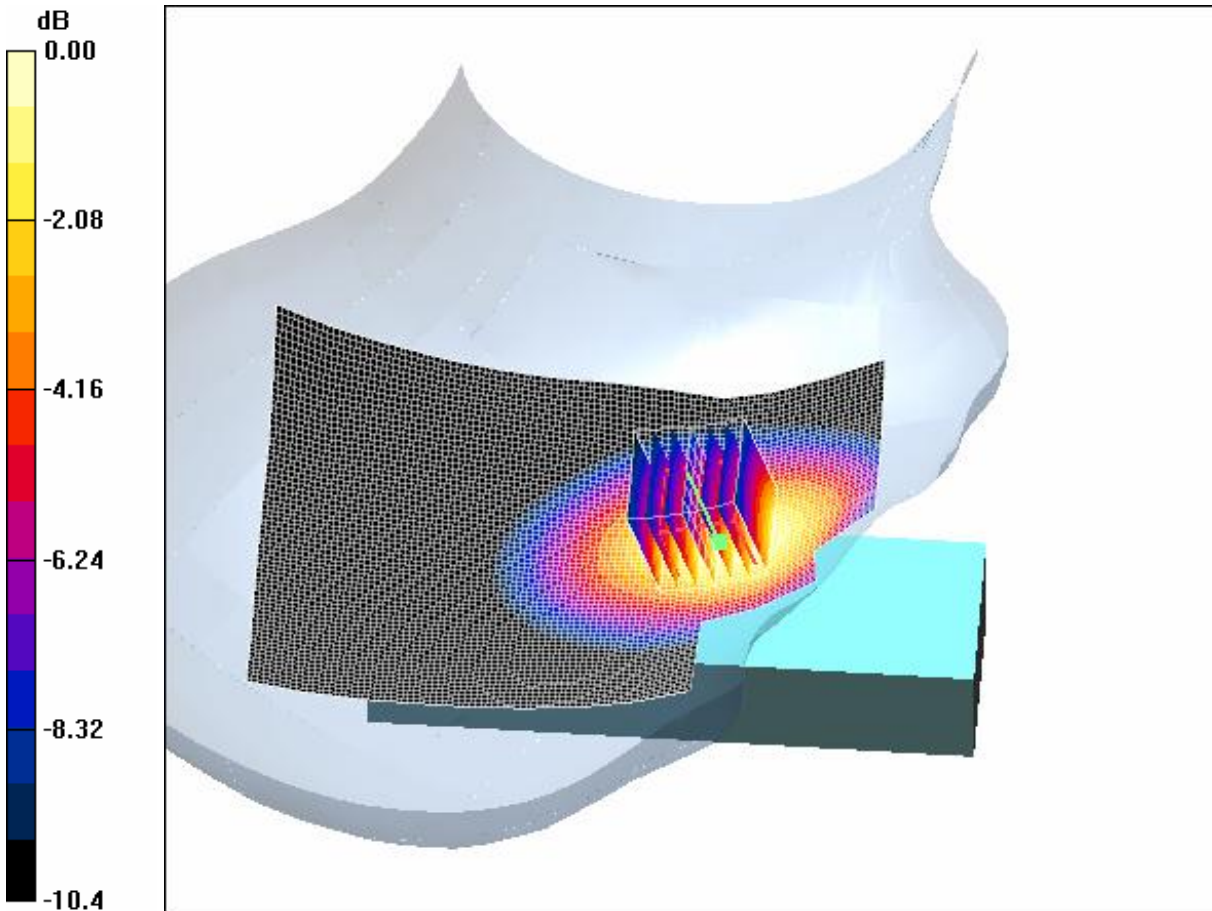

0 dB = 1.21mW/g

4.10 FCC-OET65-RightHandSide-Tilt-GSM850-Low

Date/Time: 2005-9-19 14:00:40Date/Time: 2005-9-19 14:10:17

Test Laboratory: SGS-GSM

FCC-OET65-RightHandSide-Tilt-GSM850-Low

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.866$ mho/m; $\epsilon_r =$

41.8; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Low/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.291 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.292 mW/g

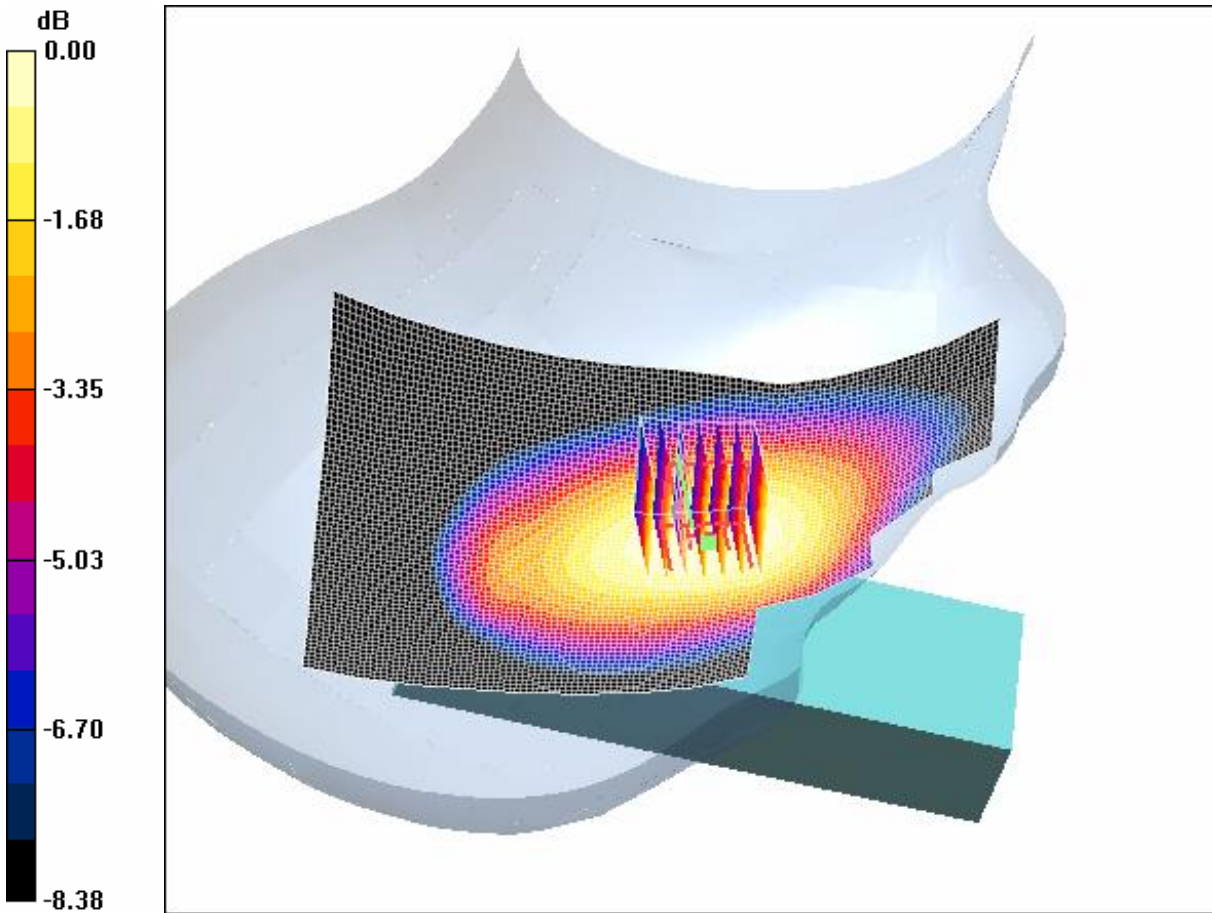

0 dB = 0.292mW/g

4.11 FCC-OET65-RightHandSide-Tilt-GSM850-Mid

Date/Time: 2005-9-19 13:08:29Date/Time: 2005-9-19 13:18:08

Test Laboratory: SGS-GSM

FCC-OET65-RightHandSide-Tilt-GSM850-Mid

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.878$ mho/m; $\epsilon_r =$

41.7; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Middle/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.266 mW/g


Tilt position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.273 mW/g

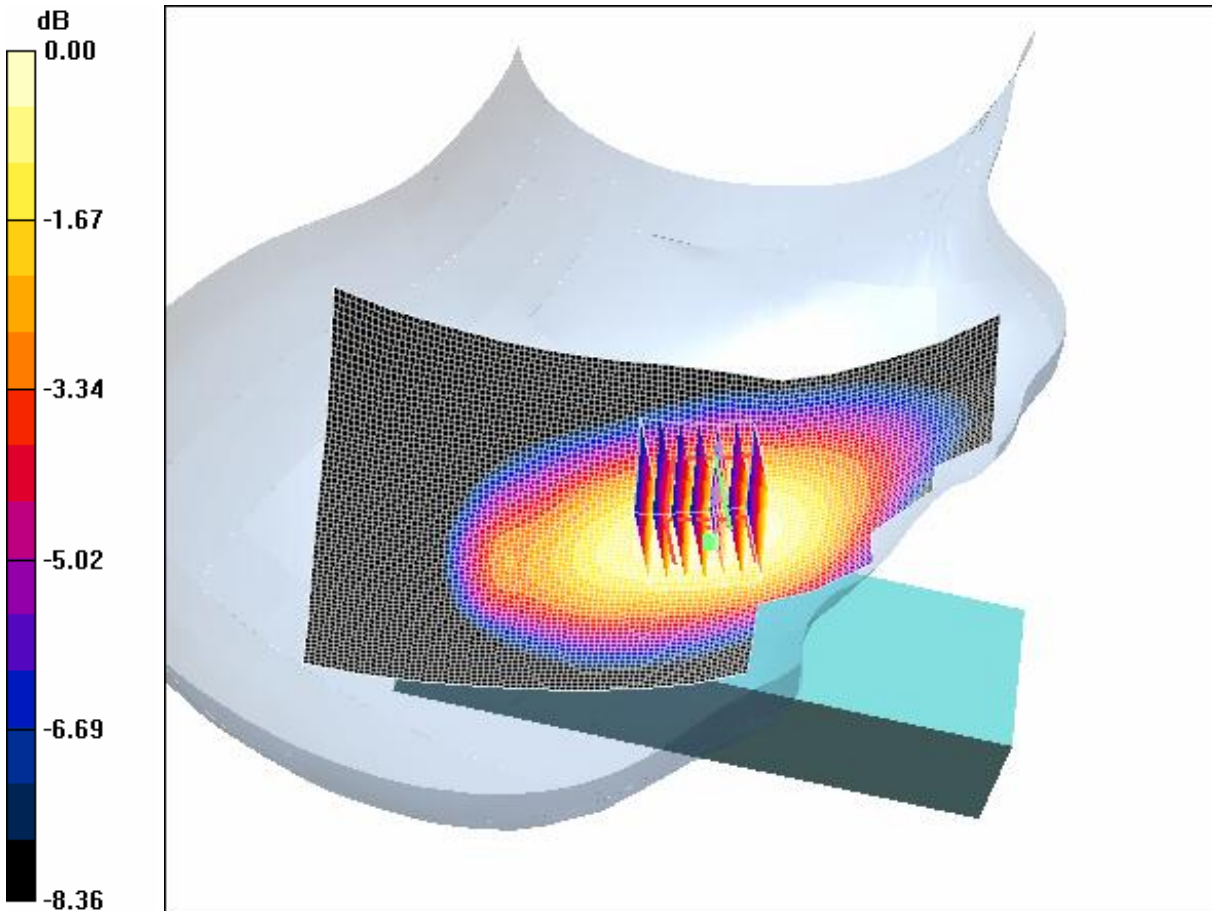

0 dB = 0.273mW/g

4.12 FCC-OET65-RightHandSide-Tilt-GSM850-High

Date/Time: 2005-9-19 12:16:12Date/Time: 2005-9-19 12:25:47

Test Laboratory: SGS-GSM

FCC-OET65-RightHandSide-Tilt-GSM850-High

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Head Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r =$

41.6; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.96, 6.96, 6.96); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - High/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.268 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.320 W/kg

SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.190 mW/g

Maximum value of SAR (measured) = 0.267 mW/g

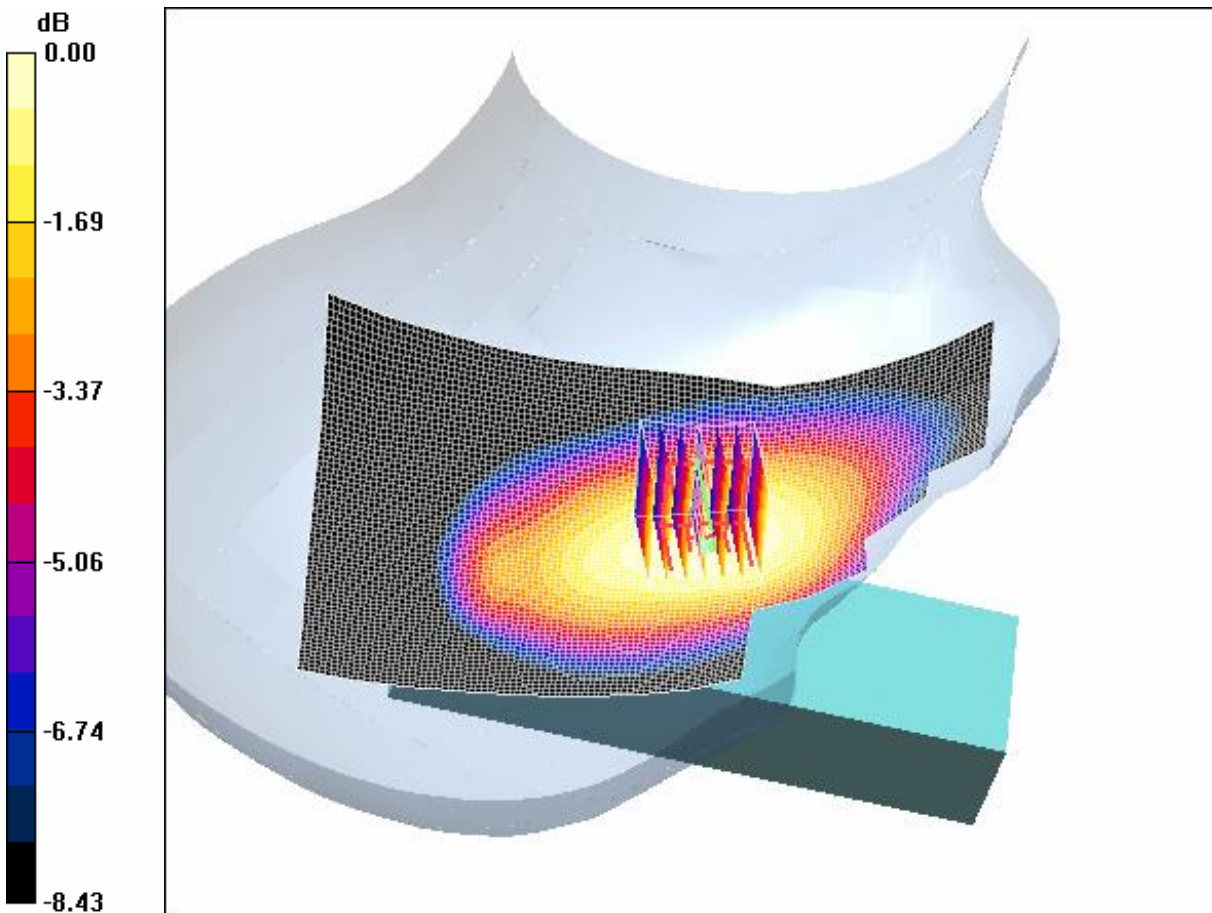

0 dB = 0.267mW/g

4.13 FCC-OET65-Body-Worn-GSM850-Low

Date/Time: 2005-9-21 18:03:24Date/Time: 2005-9-21 18:31:12

Test Laboratory: SGS-GSM

FCC-OET65-Body-Worn-GSM850-Low

DUT: GSM50085-Body; Type: Body; Serial: 20050921

Communication System: GSM850-GSM Mode; Frequency: 824.2 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Body Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.984$ mho/m; $\epsilon_r = 52.6$; $\rho =$

1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.65, 6.65, 6.65); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.733 mW/g


Body Worn - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.0 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.889 W/kg

SAR(1 g) = 0.681 mW/g; SAR(10 g) = 0.490 mW/g

Maximum value of SAR (measured) = 0.720 mW/g

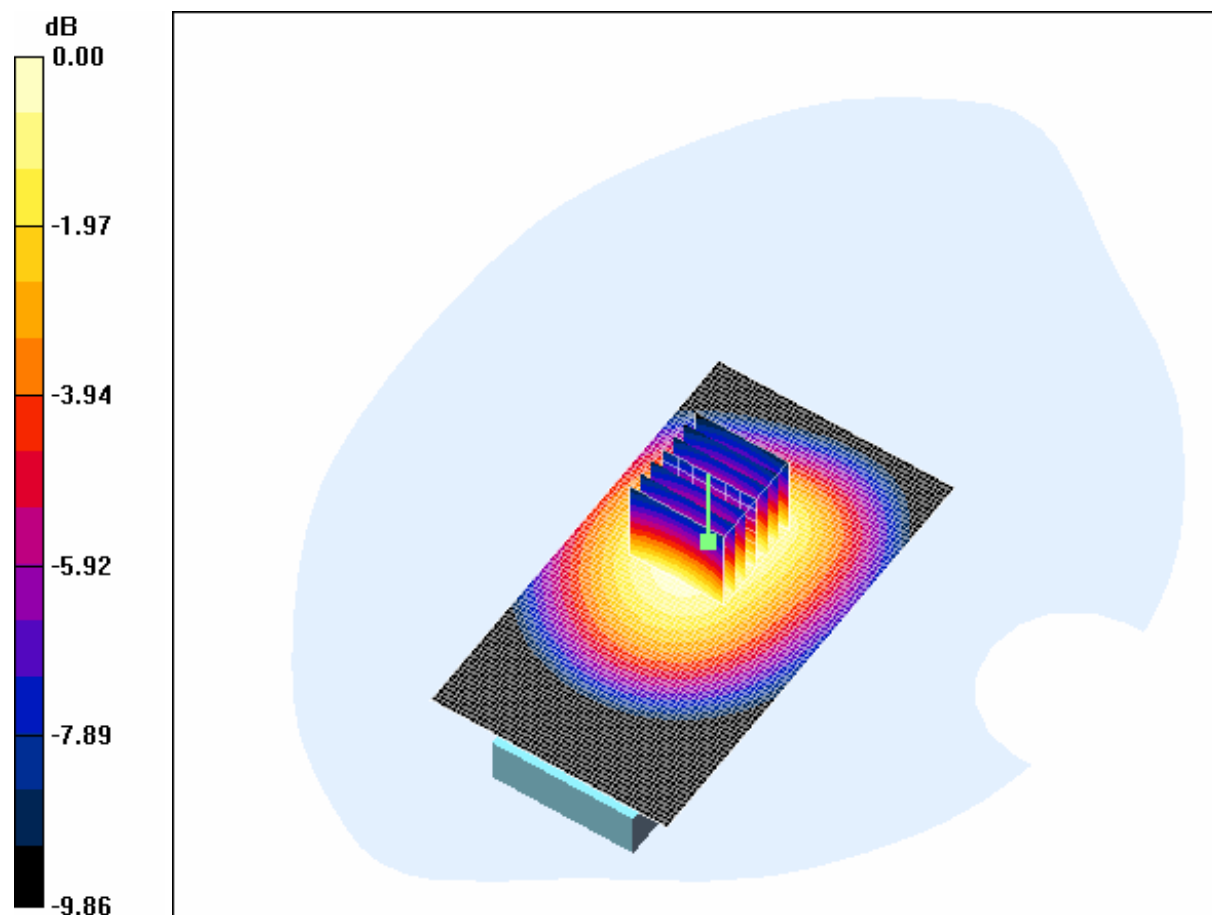

0 dB = 0.720mW/g

4.14 FCC-OET65-Body-Worn-GSM850-Mid

Date/Time: 2005-9-21 17:16:22Date/Time: 2005-9-21 17:21:57

Test Laboratory: SGS-GSM

FCC-OET65-Body-Worn-GSM850-Mid

DUT: GSM50085-Body; Type: Body; Serial: 20050921

Communication System: GSM850-GSM Mode; Frequency: 836.4 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 52.5$; $\rho =$

1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.65, 6.65, 6.65); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.725 mW/g


Body Worn - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.5 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.668 mW/g; SAR(10 g) = 0.477 mW/g

Maximum value of SAR (measured) = 0.708 mW/g

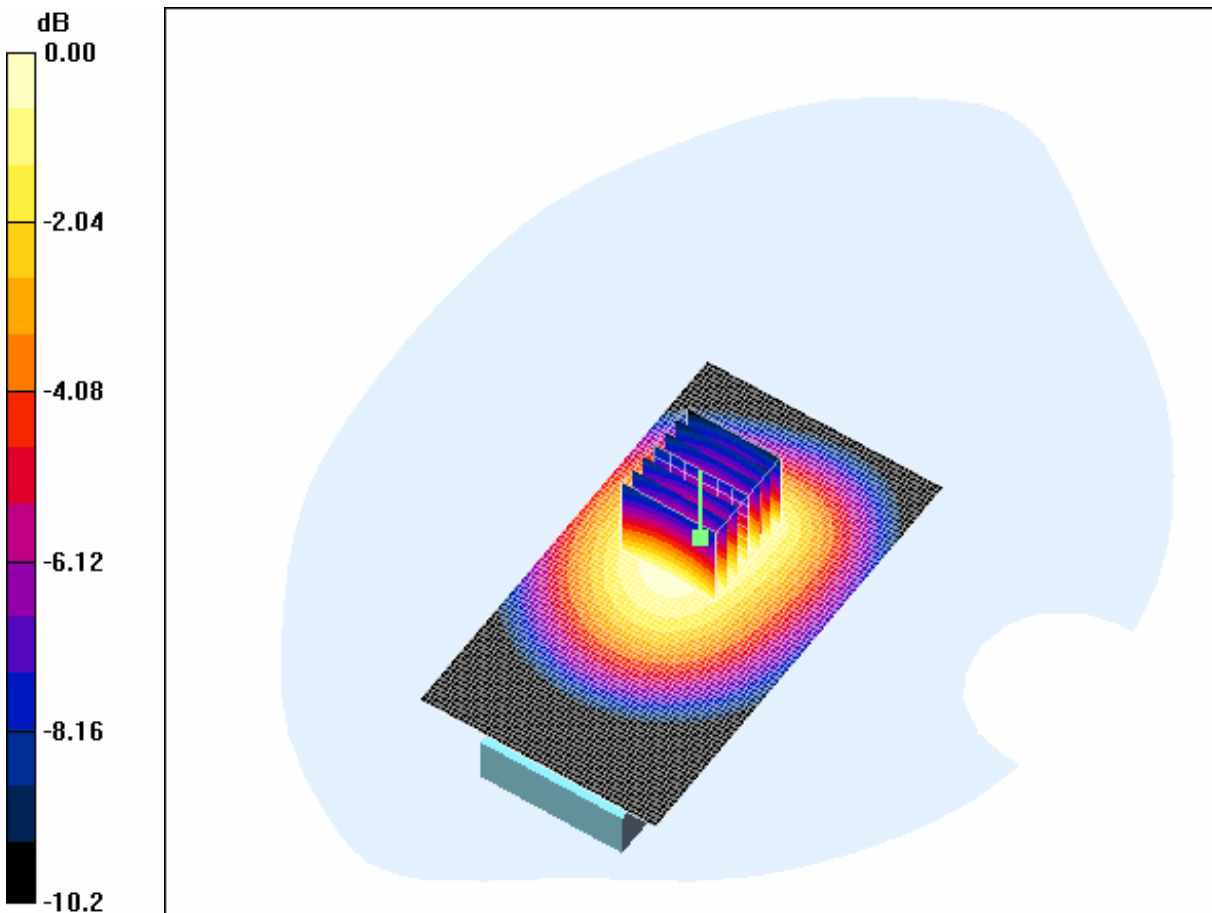

0 dB = 0.708mW/g

4.15 FCC-OET65-Body-Worn-GSM850-High

Date/Time: 2005-9-21 17:37:32Date/Time: 2005-9-21 17:43:07

Test Laboratory: SGS-GSM

FCC-OET65-Body-Worn-GSM850-High

DUT: GSM50085-Body; Type: Body; Serial: 20050921

Communication System: GSM850-GSM Mode; Frequency: 848.8 MHz;Duty Cycle: 1:8.3

Medium: HSL850-Body Medium parameters used: $f = 848.8$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 52.5$; $\rho =$

1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(6.65, 6.65, 6.65); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn - High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.719 mW/g


Body Worn - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.4 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.473 mW/g

Maximum value of SAR (measured) = 0.707 mW/g

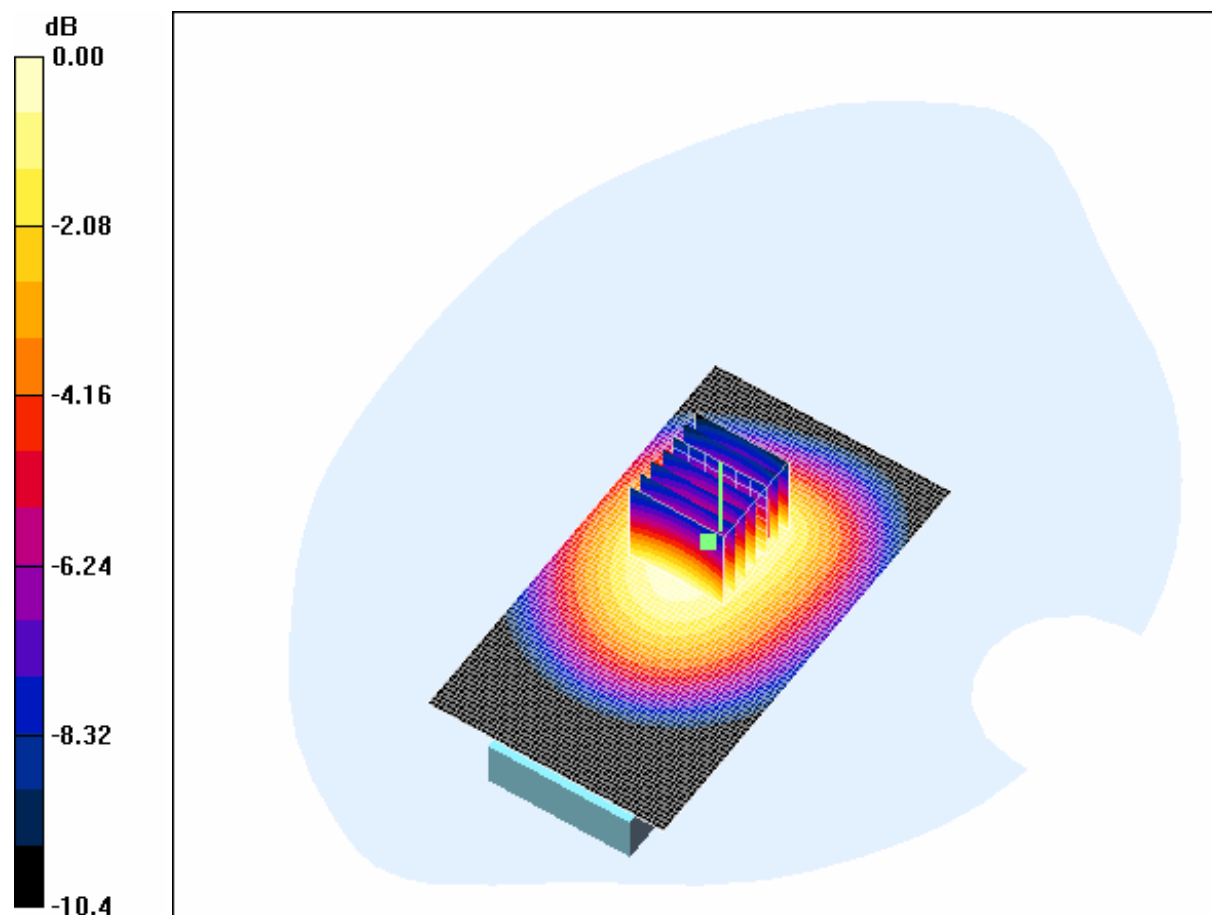

0 dB = 0.707mW/g

850MHz GPRS Mode

4.16 FCC-OET65-Body-Worn-GSM850-GPRS-Low

Date/Time: 2005-11-23 17:53:06

Test Laboratory: SGS-GSM

FCC-OET65-Body-Worn-GSM850-GPRS-Low

DUT: GSM50085-Body; Type: Body; Serial: 20051123

Communication System: GSM850-GPRS Mode; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: HSL850-Body Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.945$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.83, 5.83, 5.83); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611;
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.48 mW/g


Body Worn - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.8 V/m; Power Drift = -0.113 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.38 mW/g; SAR(10 g) = 0.998 mW/g

Maximum value of SAR (measured) = 1.46 mW/g

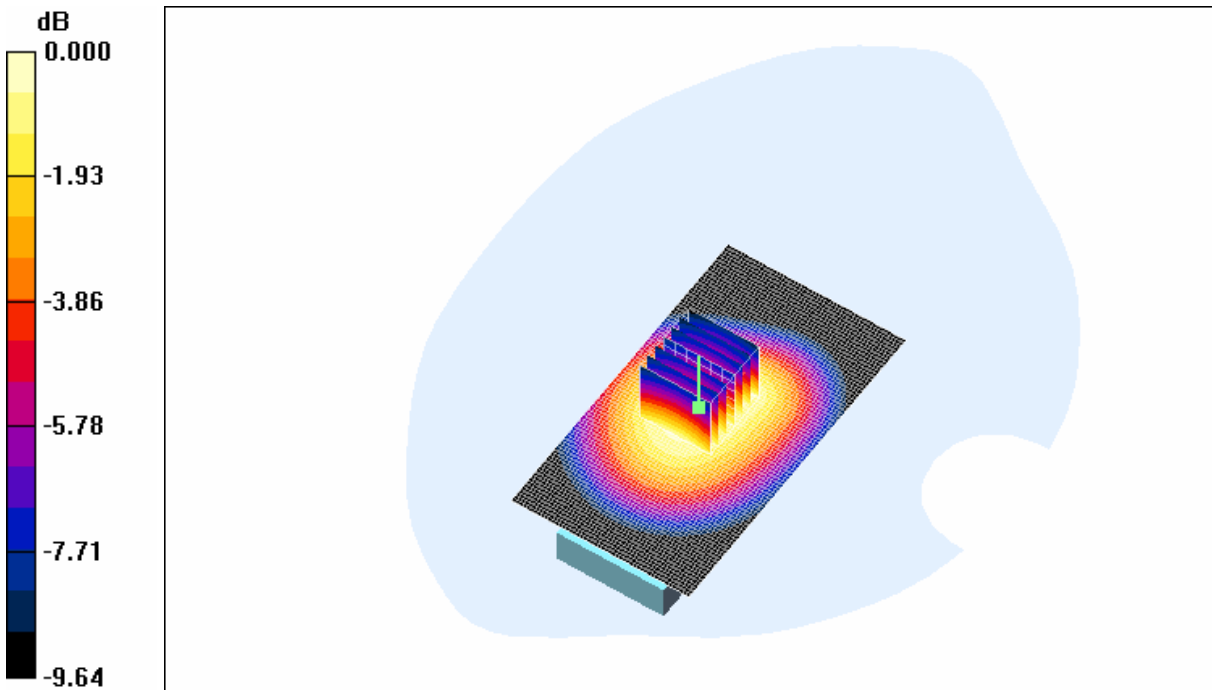

0 dB = 1.46mW/g

4.17 FCC-OET65-Body-Worn-GSM850-GPRS-Middle

Date/Time: 2005-11-23 18:20:42

Test Laboratory: SGS-GSM

FCC-OET65-Body-Worn-GSM850-GPRS-Mid

DUT: GSM50085-Body; Type: Body; Serial: 20051123

Communication System: GSM850-GPRS Mode; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: HSL850-Body Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.957$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.83, 5.83, 5.83); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611;
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.46 mW/g


Body Worn - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.1 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.36 mW/g; SAR(10 g) = 0.981 mW/g

Maximum value of SAR (measured) = 1.44 mW/g

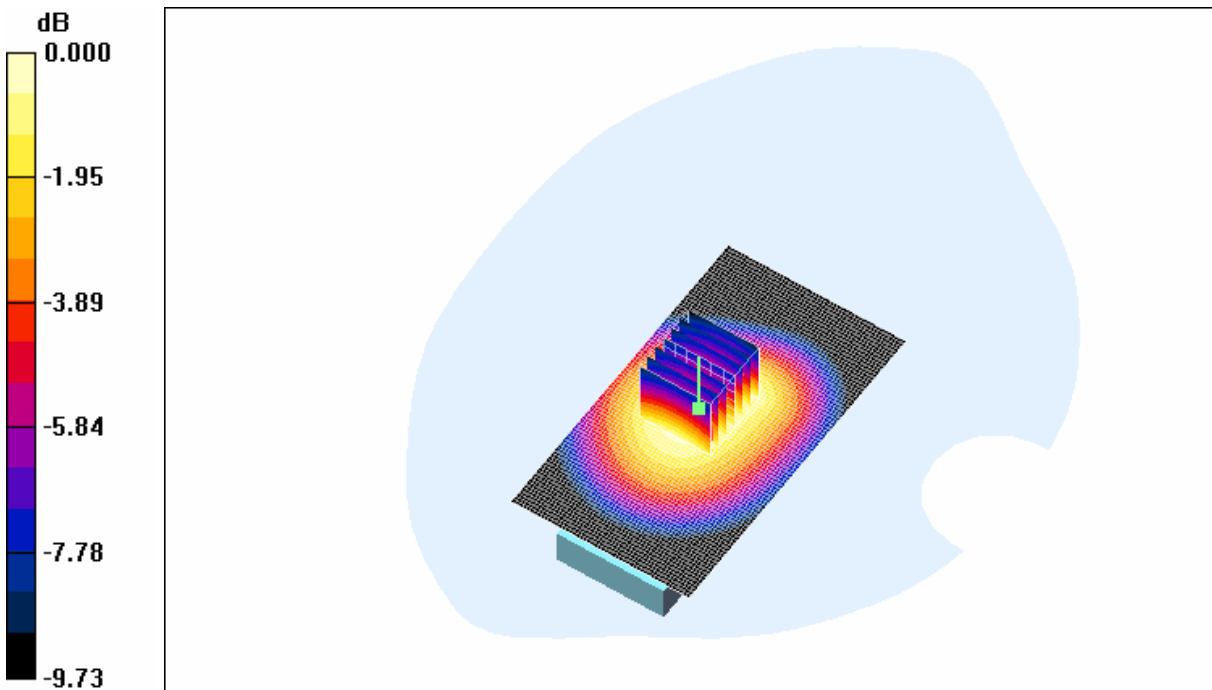

0 dB = 1.44mW/g

4.18 FCC-OET65-Body-Worn-GSM850-GPRS-High

Date/Time: 2005-11-23 19:17:27

Test Laboratory: SGS-GSM

FCC-OET65-Body-Worn-GSM850-GPRS-High

DUT: GSM50085-Body; Type: Body; Serial: 20051123

Communication System: GSM850-GPRS Mode; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: HSL850-Body Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.969 \text{ mho/m}$; $\epsilon_r = 55.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS4 (High Precision Assessment)

DAS4 Configuration:

- Probe: ES3DV3 - SN3088; ConvF(5.83, 5.83, 5.83); Calibrated: 2005-9-13
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611;
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DAS4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 160

Body Worn - High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.42 mW/g


Body Worn - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.4 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 1.3 mW/g; SAR(10 g) = 0.937 mW/g

Maximum value of SAR (measured) = 1.38 mW/g

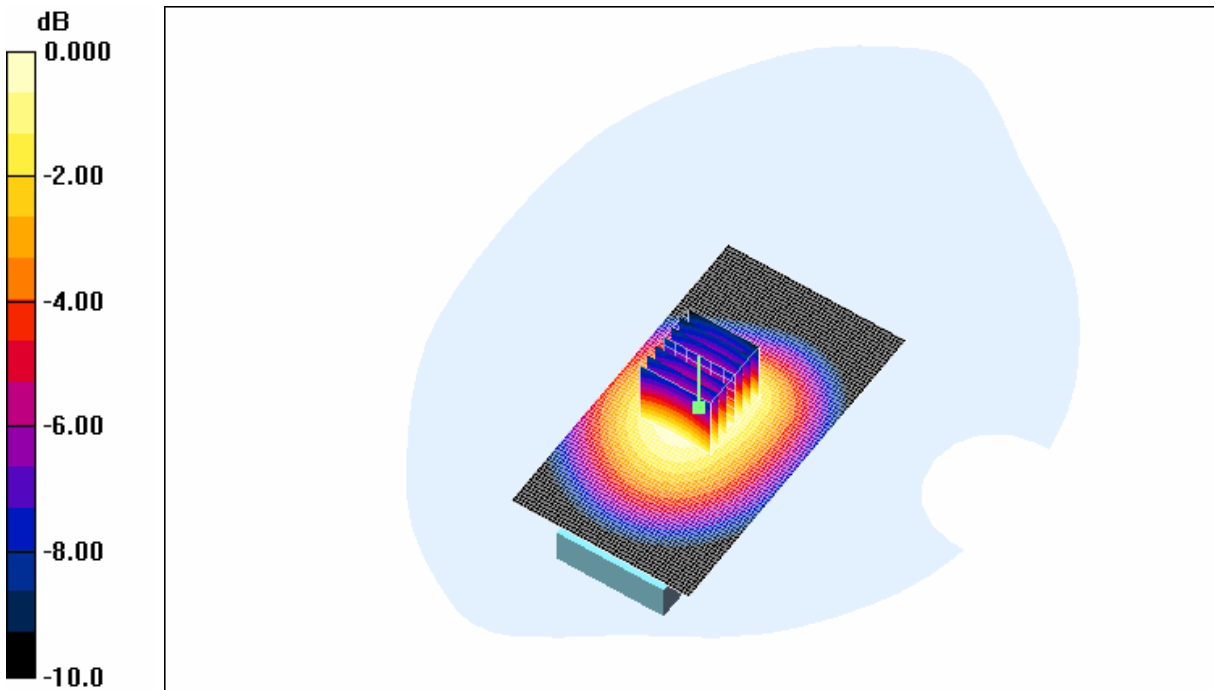

0 dB = 1.38mW/g

1900MHz GSM Mode

4.19 FCC-OET65-LeftHandSide-Touch-GSM1900-Low

Date/Time: 2005-9-19 20:23:48Date/Time: 2005-9-19 20:34:02

Test Laboratory: SGS-GSM

FCC-OET65-LeftHandSide-Touch-GSM1900-Low

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: DCS 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASYS4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASYS4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Low/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.707 mW/g


Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.75 V/m; Power Drift = 0.417 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.369 mW/g

Maximum value of SAR (measured) = 0.748 mW/g

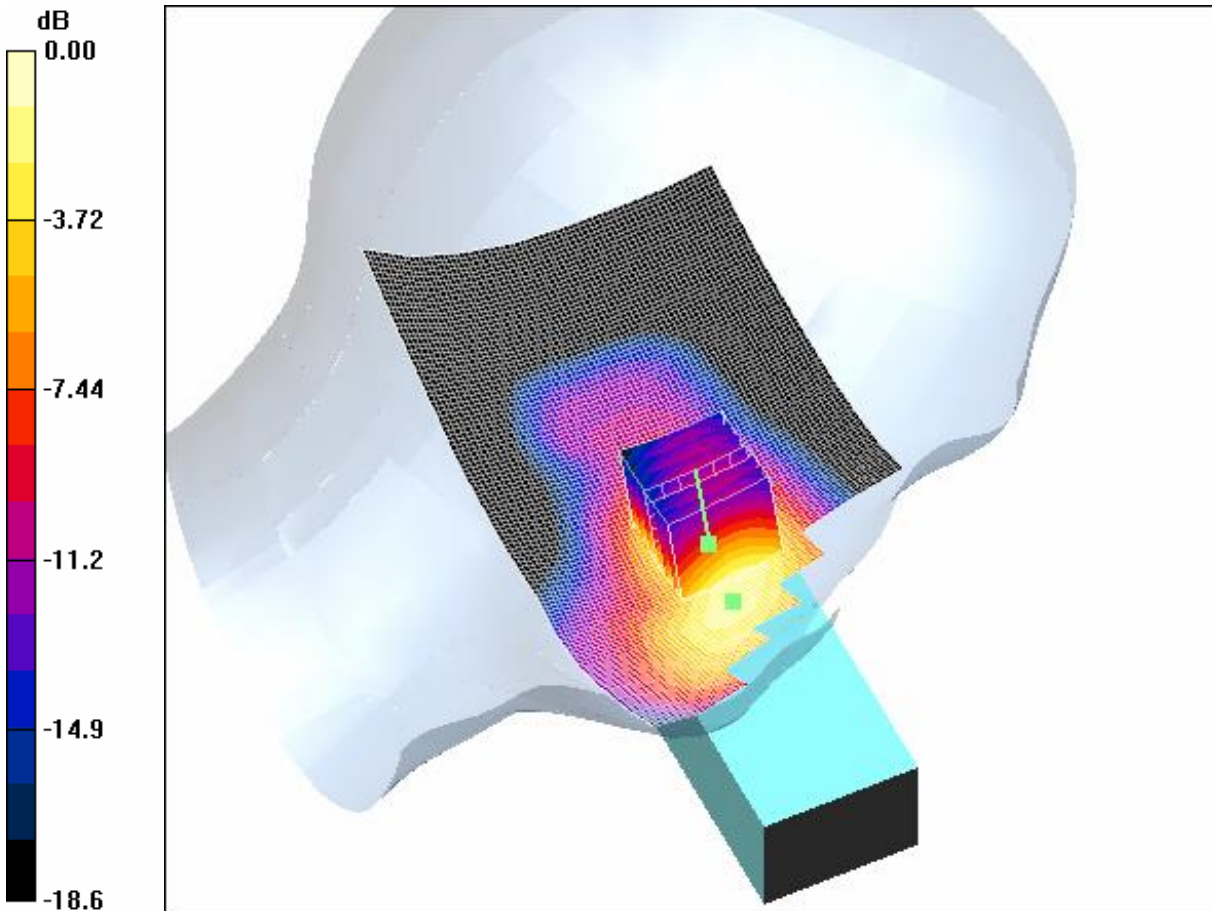

0 dB = 0.748mW/g

4.20 FCC-OET65-LeftHandSide-Touch-GSM1900-Mid

Date/Time: 2005-9-19 20:54:09Date/Time: 2005-9-19 21:04:23

Test Laboratory: SGS-GSM

FCC-OET65-LeftHandSide-Touch-GSM1900-Mid

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: DCS 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$

kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Middle/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.739 mW/g


Touch position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.09 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.388 mW/g

Maximum value of SAR (measured) = 0.768 mW/g

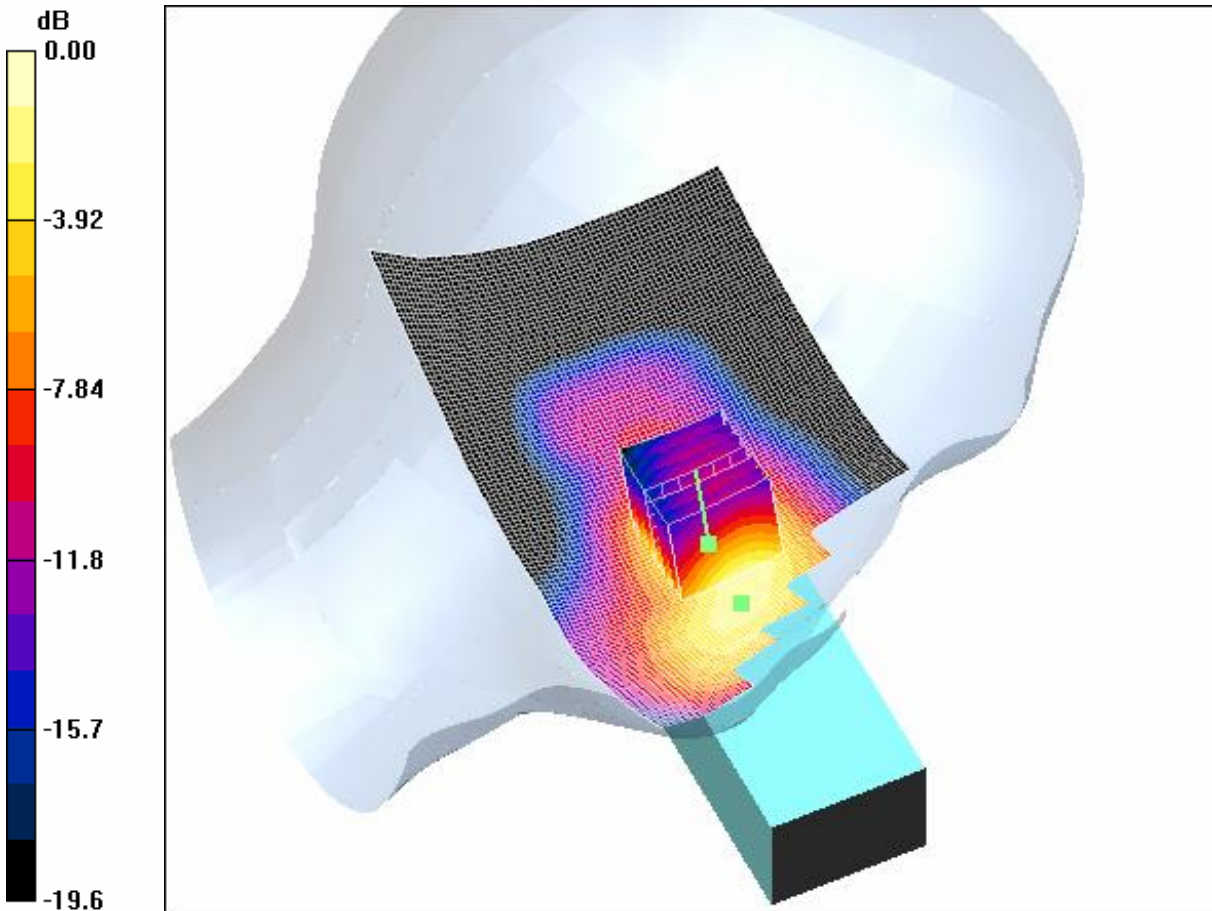

0 dB = 0.768mW/g

4.21 FCC-OET65-LeftHandSide-Touch-GSM1900-High

Date/Time: 2005-9-19 21:31:27Date/Time: 2005-9-19 21:41:43

Test Laboratory: SGS-GSM

FCC-OET65-LeftHandSide-Touch-GSM1900-High

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: DCS 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 40$; $\rho = 1000$

kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - High/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.736 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.91 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.699 mW/g; SAR(10 g) = 0.377 mW/g

Maximum value of SAR (measured) = 0.762 mW/g

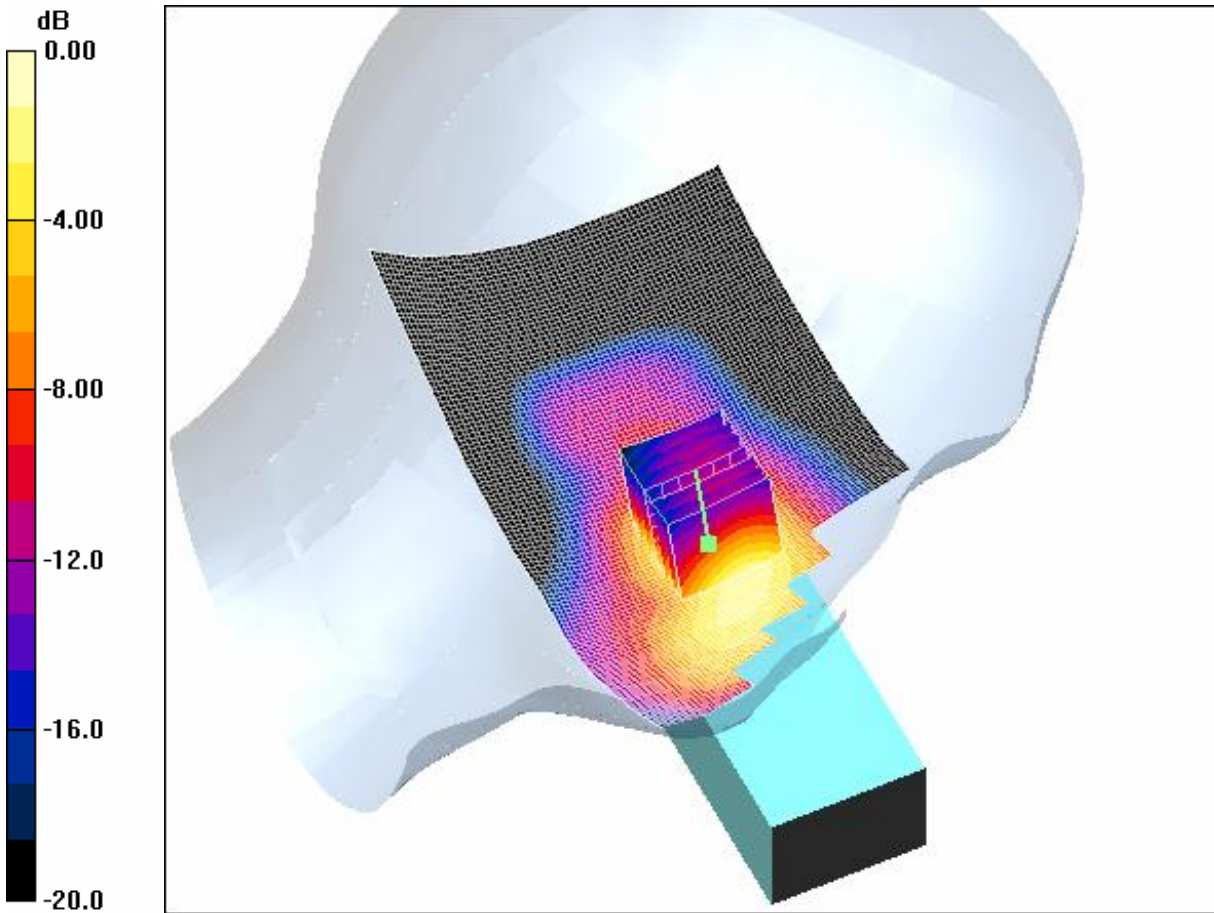

0 dB = 0.762mW/g

4.22 FCC-OET65-LeftHandSide-Tilt-GSM1900-Low

Date/Time: 2005-9-19 22:54:40Date/Time: 2005-9-19 23:05:01

Test Laboratory: SGS-GSM

FCC-OET65-LeftHandSide-Tilt-GSM1900-Low

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: DCS 1900; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$

kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Low/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.196 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.132 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.182 mW/g

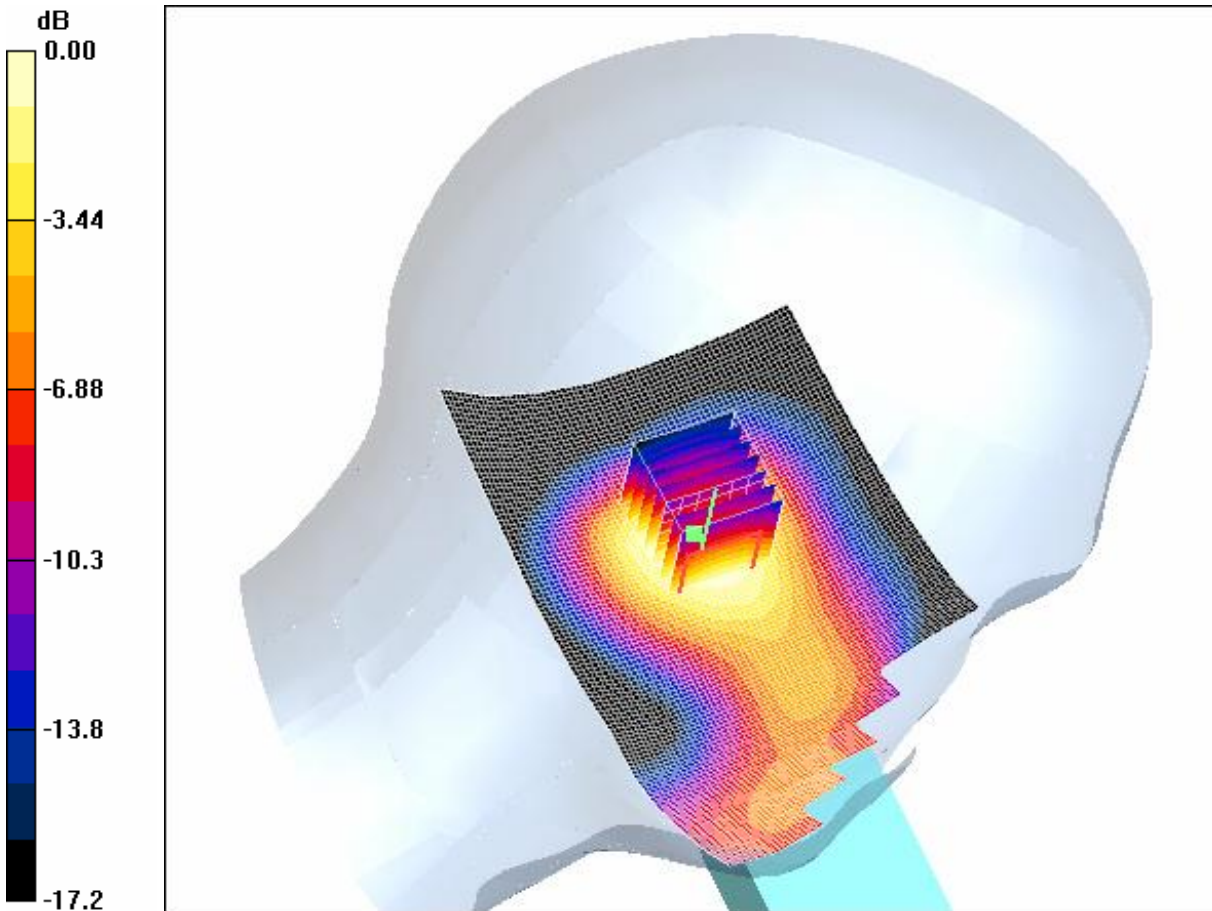

0 dB = 0.182mW/g

4.23 FCC-OET65-LeftHandSide-Tilt-GSM1900-Mid

Date/Time: 2005-9-19 23:24:51Date/Time: 2005-9-19 23:35:17

Test Laboratory: SGS-GSM

FCC-OET65-LeftHandSide-Tilt-GSM1900-Mid

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: DCS 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$

kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Middle/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.203 mW/g


Tilt position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.189 mW/g

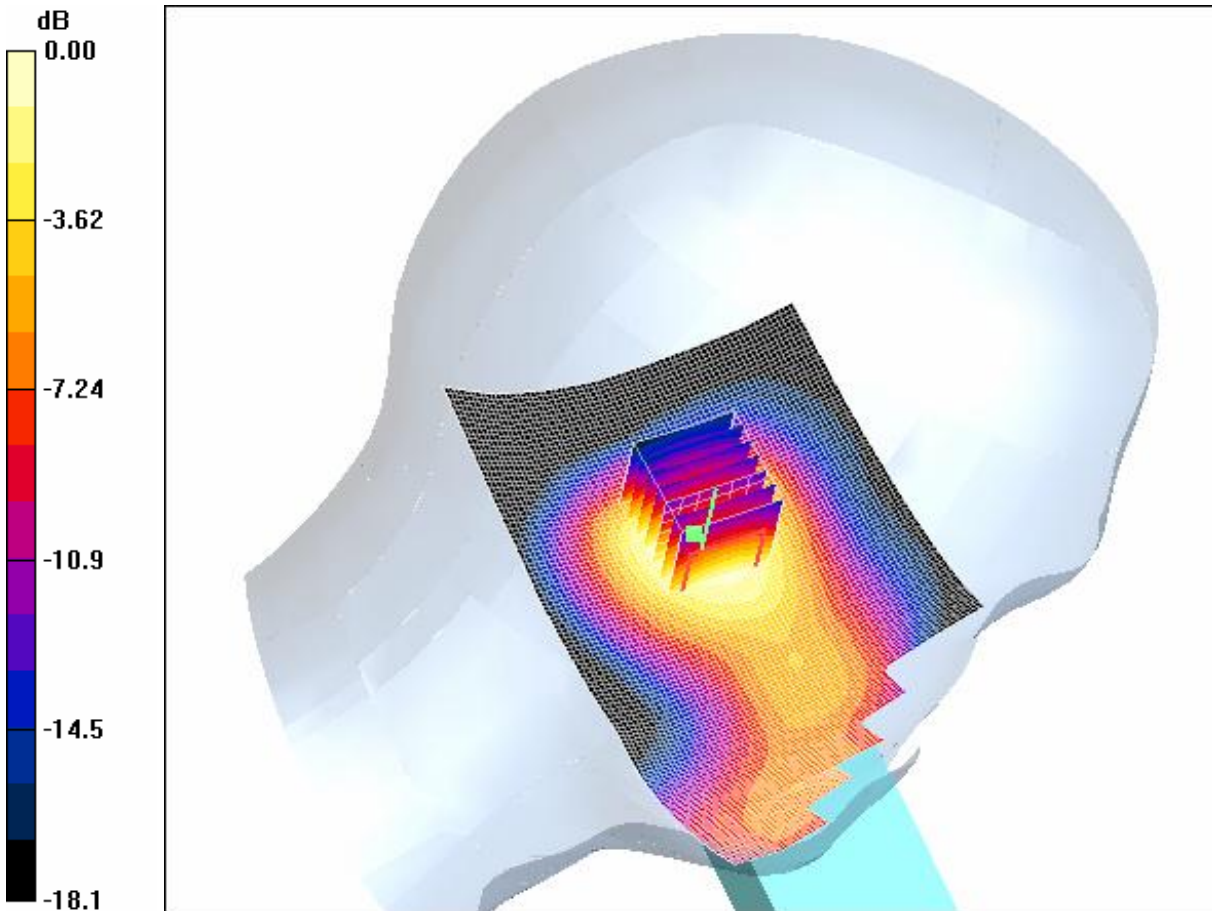

0 dB = 0.189mW/g

4.24 FCC-OET65-LeftHandSide-Tilt-GSM1900-High

Date/Time: 2005-9-20 0:05:28Date/Time: 2005-9-20 0:15:56

Test Laboratory: SGS-GSM

FCC-OET65-LeftHandSide-Tilt-GSM1900-High

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: DCS 1900; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 40$; $\rho = 1000$

kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - High/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.208 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.179 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.194 mW/g

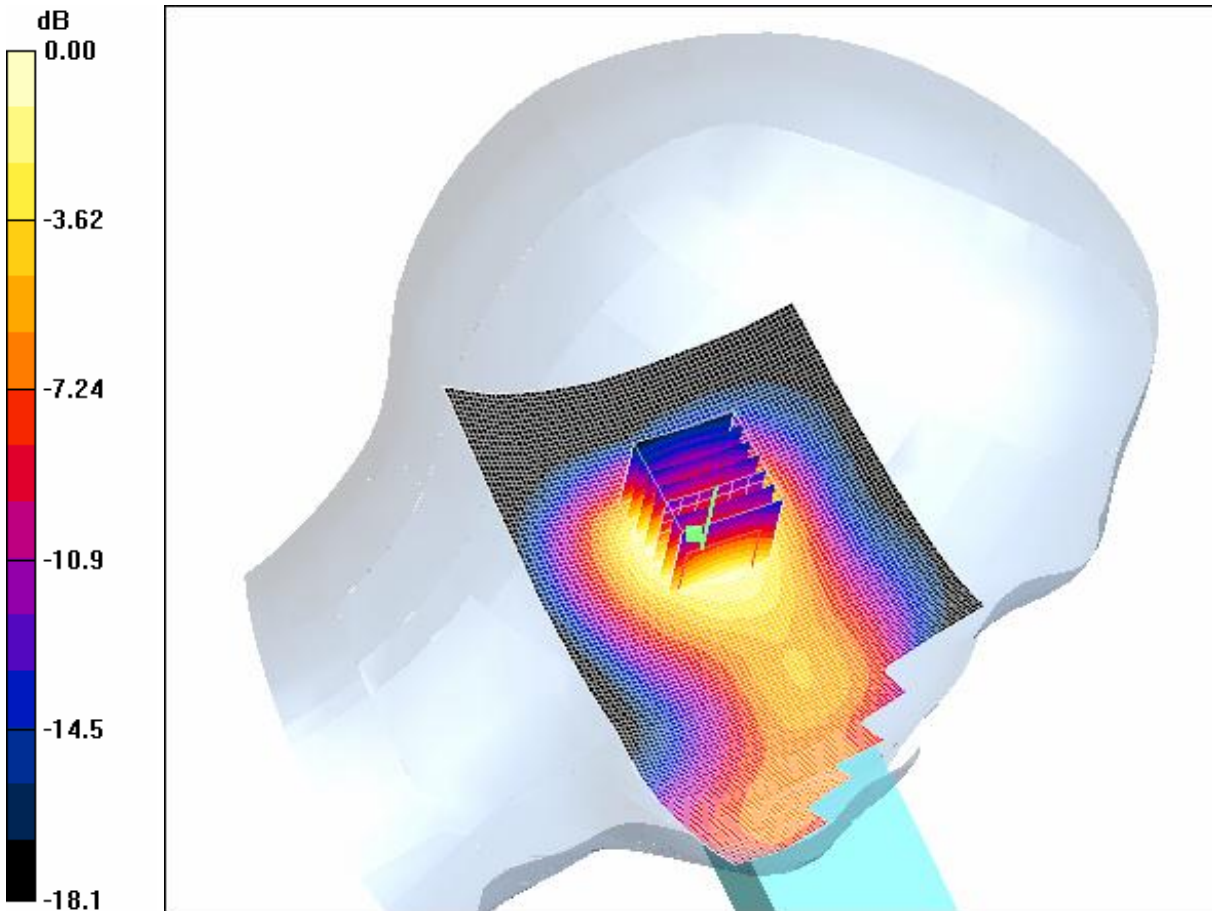

0 dB = 0.194mW/g

4.25 FCC-OET65-RightHandSide-Touch-GSM1900-Low

Date/Time: 2005-9-20 18:46:29Date/Time: 2005-9-20 18:57:30

Test Laboratory: SGS-GSM

FCC-OET65-RightHandSide-Touch-GSM1900-Low

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: DCS1900-GSM Mode; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.5$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Low/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.820 mW/g


Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.75 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.715 mW/g; SAR(10 g) = 0.390 mW/g

Maximum value of SAR (measured) = 0.796 mW/g

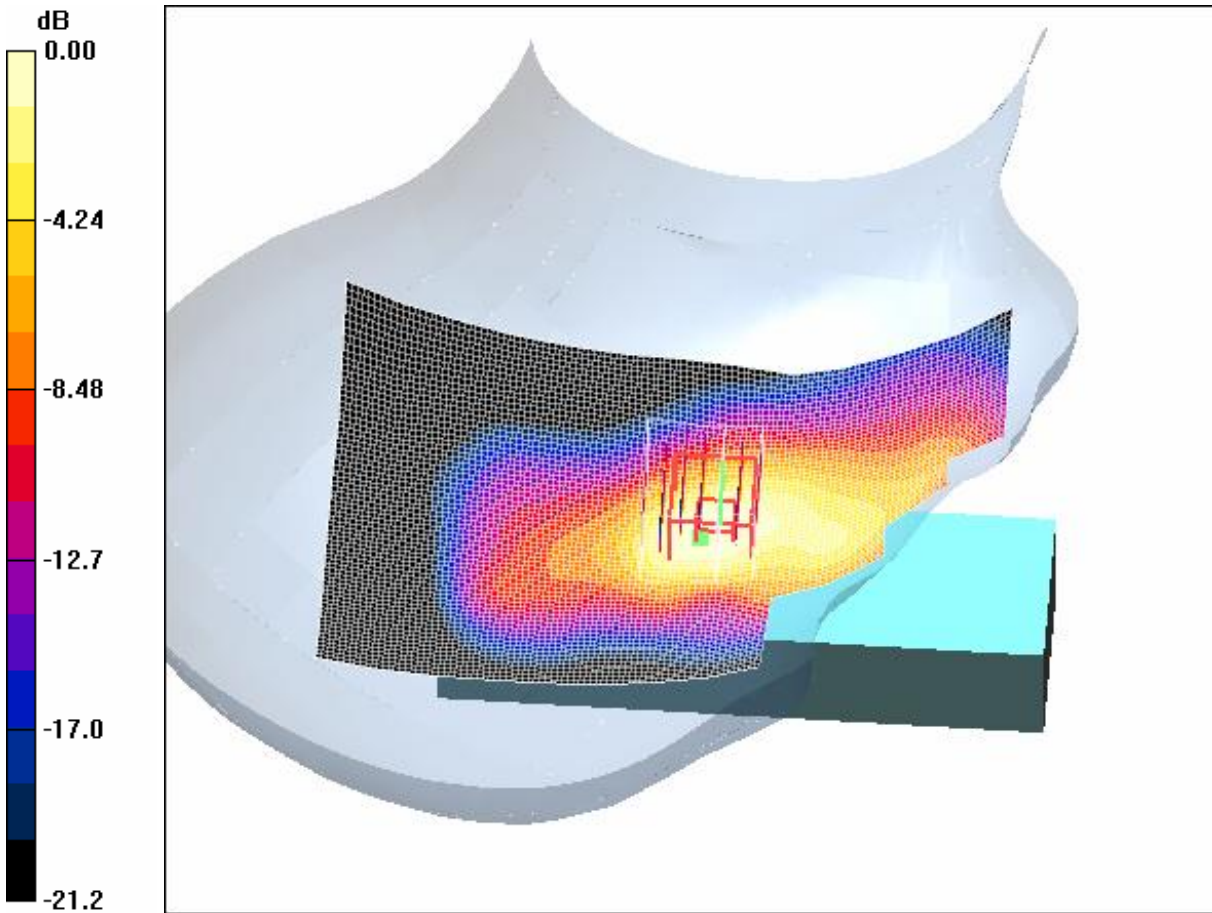

0 dB = 0.796mW/g

4.26 FCC-OET65-RightHandSide-Touch-GSM1900-Mid

Date/Time: 2005-9-20 19:18:35Date/Time: 2005-9-20 19:29:37

Test Laboratory: SGS-GSM

FCC-OET65-RightHandSide-Touch-GSM1900-Mid

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: DCS1900-GSM Mode; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Middle/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.925 mW/g


Touch position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.23 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.805 mW/g; SAR(10 g) = 0.437 mW/g

Maximum value of SAR (measured) = 0.874 mW/g

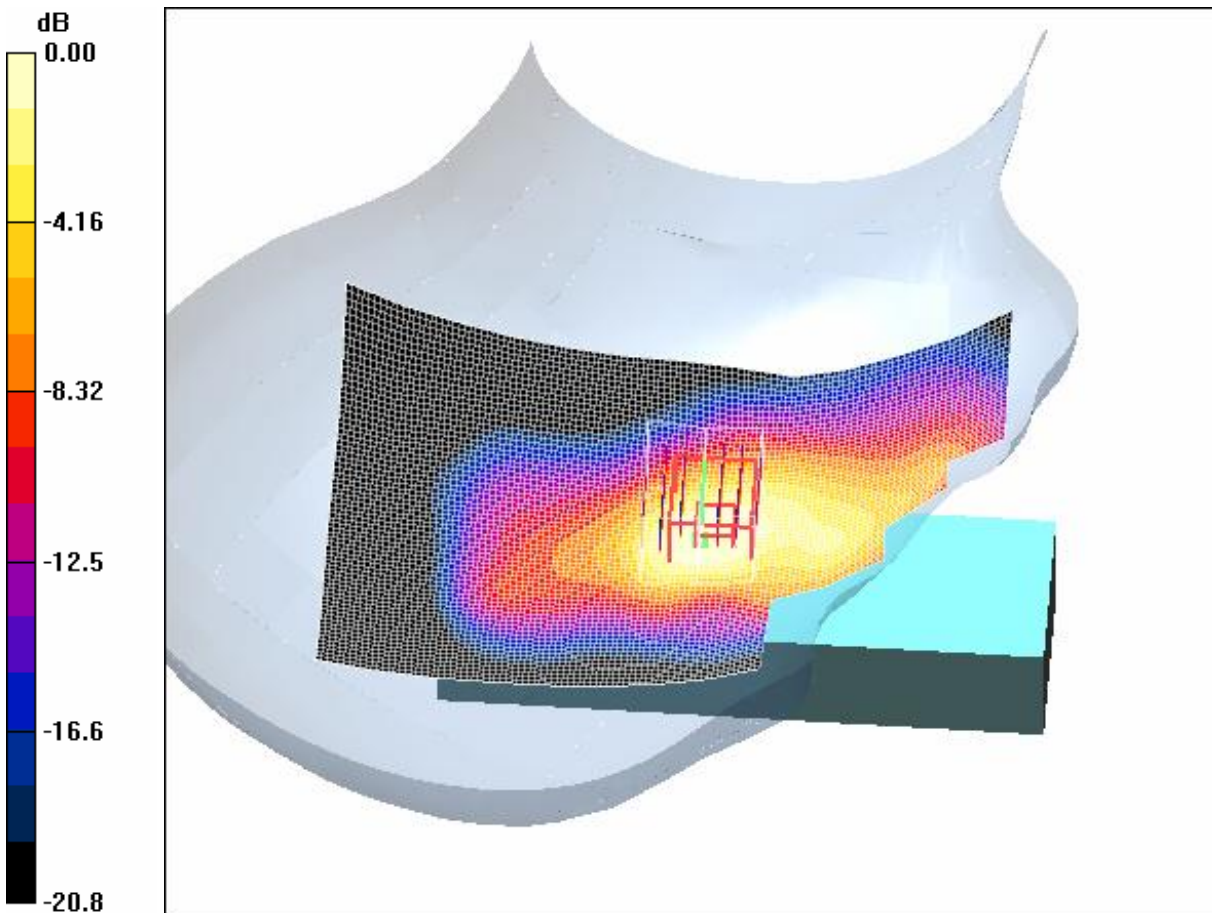

0 dB = 0.874mW/g

4.27 FCC-OET65-RightHandSide-Touch-GSM1900-High

Date/Time: 2005-9-20 19:51:08Date/Time: 2005-9-20 20:02:11

Test Laboratory: SGS-GSM

FCC-OET65-RightHandSide-Touch-GSM1900-High

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: DCS1900-GSM Mode; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 40$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - High/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.982 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.29 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.857 mW/g; SAR(10 g) = 0.465 mW/g

Maximum value of SAR (measured) = 0.932 mW/g

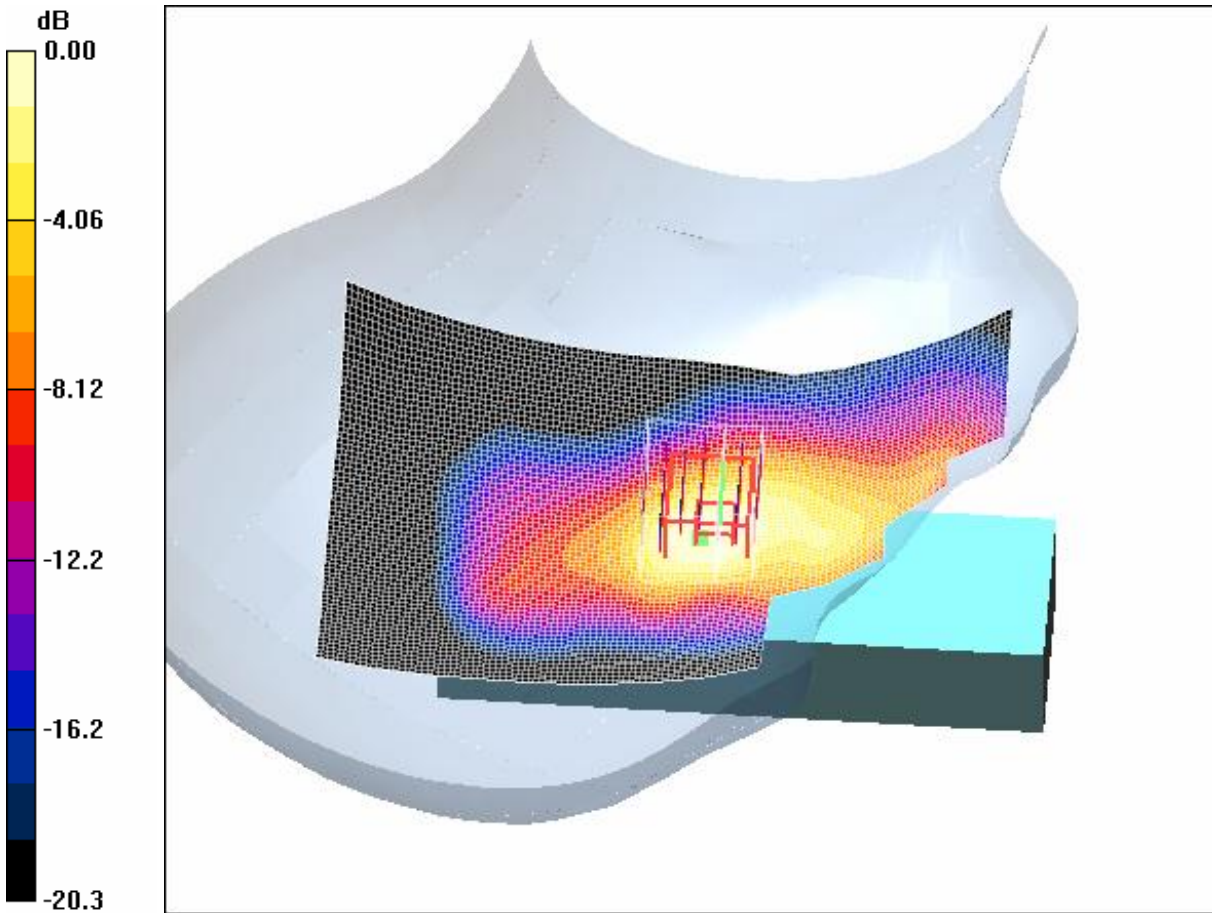

0 dB = 0.932mW/g

4.28 FCC-OET65-RightHandSide-Tilt-GSM1900-Low

Date/Time: 2005-9-20 22:06:18Date/Time: 2005-9-20 22:17:26

Test Laboratory: SGS-GSM

FCC-OET65-RightHandSide-Tilt-GSM1900-Low

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: DCS1900-GSM Mode; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.5$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Low/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.204 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.120 dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.179 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.193 mW/g

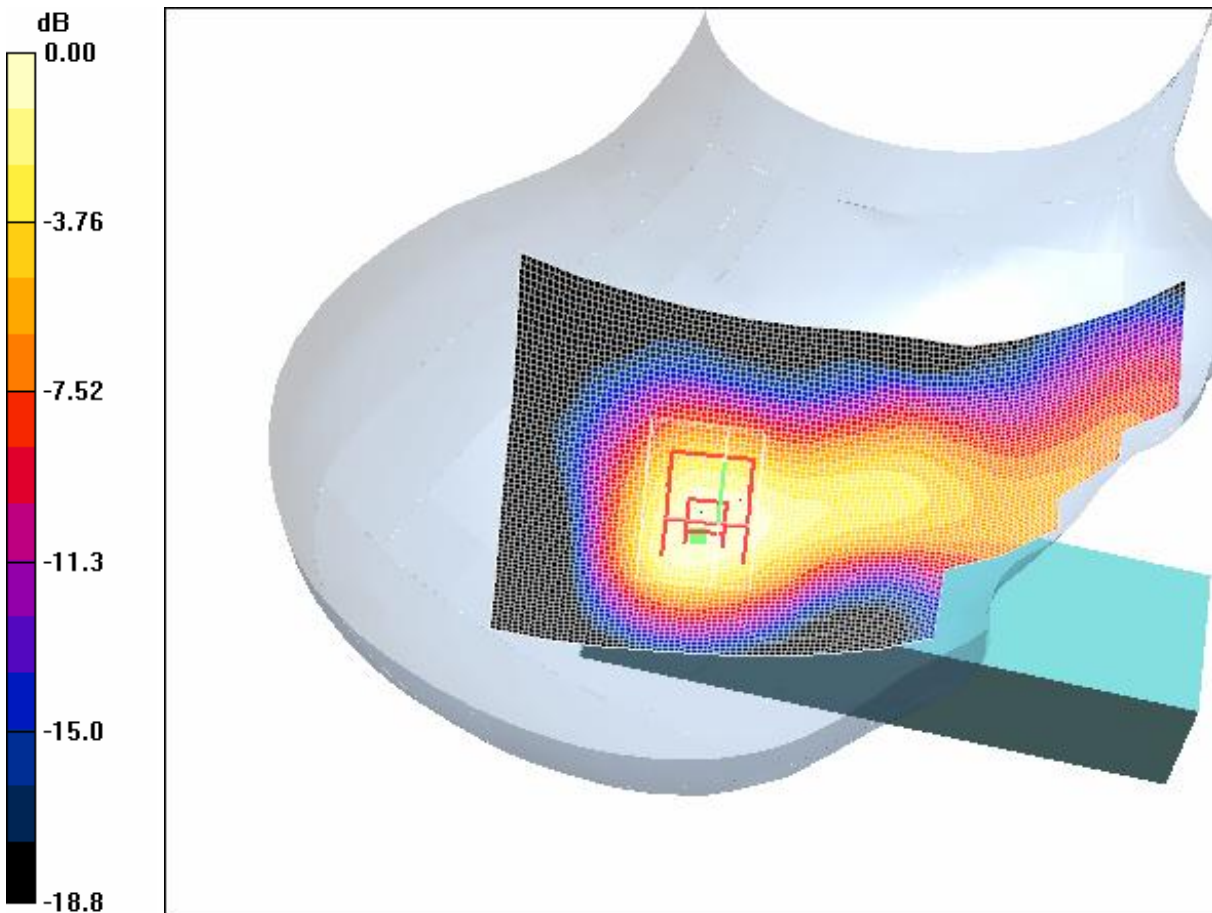

0 dB = 0.193mW/g

4.29 FCC-OET65-RightHandSide-Tilt-GSM1900-Mid

Date/Time: 2005-9-20 22:38:47 Date/Time: 2005-9-20 22:49:55

Test Laboratory: SGS-GSM

FCC-OET65-RightHandSide-Tilt-GSM1900-Mid

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: DCS1900-GSM Mode; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 40.3$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Middle/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.213 mW/g


Tilt position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.205 mW/g

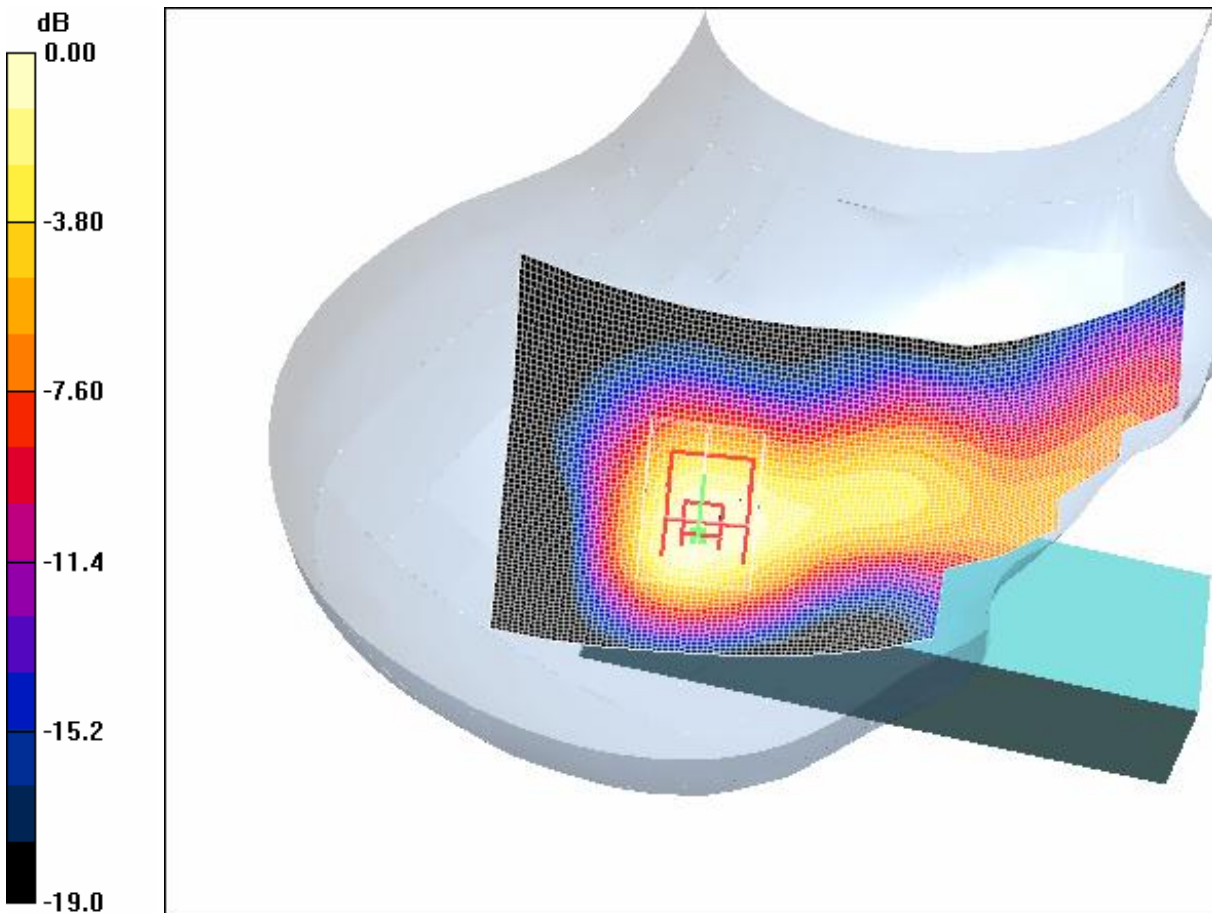

0 dB = 0.205mW/g

4.30 FCC-OET65-RightHandSide-Tilt-GSM1900-High

Date/Time: 2005-9-20 23:49:35Date/Time: 2005-9-21 0:00:41

Test Laboratory: SGS-GSM

FCC-OET65-RightHandSide-Tilt-GSM1900-High

DUT: GSM50085-Head; Type: Head; Serial: 20050919

Communication System: DCS1900-GSM Mode; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium: HSL1900-Head Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 40$; $\rho =$

1000 kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(5.25, 5.25, 5.25); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - High/Area Scan (71x131x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.243 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = 0.720 dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.222 mW/g

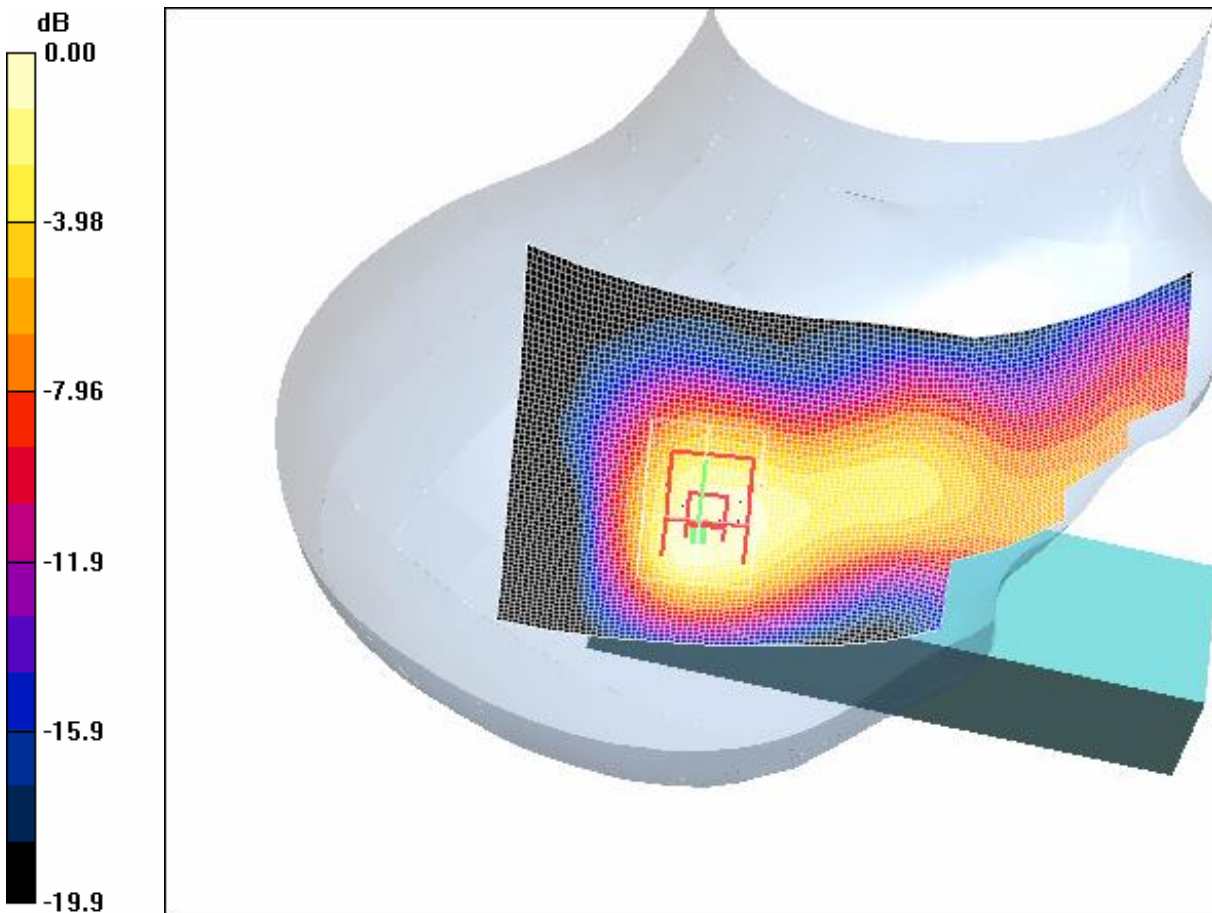

0 dB = 0.222mW/g

4.31 FCC-OET65-Body-Worn-GSM1900-Low

Date/Time: 2005-9-22 17:54:32Date/Time: 2005-9-22 18:00:17

Test Laboratory: SGS-GSM

FCC-OET65-Body-Worn-GSM1900-Low

DUT: GSM50085-Body; Type: Body; Serial: 20050921

Communication System: DCS1900-GSM Mode; Frequency: 1850.2 MHz;Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$

kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.66, 4.66, 4.66); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.216 mW/g


Body Worn - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.41 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.215 mW/g

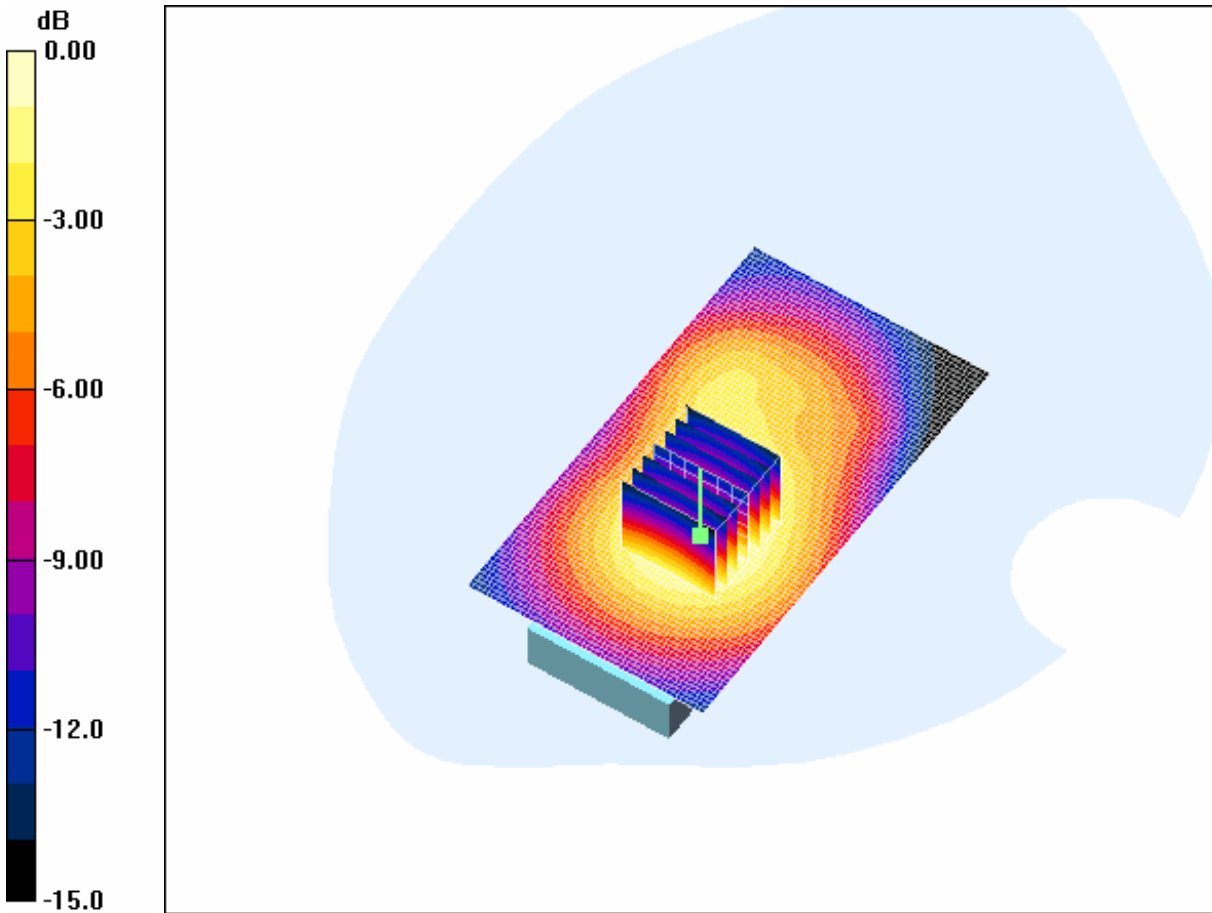

0 dB = 0.215mW/g

4.32 FCC-OET65-Body-Worn-GSM1900-Mid

Date/Time: 2005-9-22 18:18:50Date/Time: 2005-9-22 18:25:05

Test Laboratory: SGS-GSM

FCC-OET65-Body-Worn-GSM1900-Mid

DUT: GSM50085-Body; Type: Body; Serial: 20050921

Communication System: DCS1900-GSM Mode; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$

kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.66, 4.66, 4.66); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.222 mW/g


Body Worn - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.15 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.219 mW/g

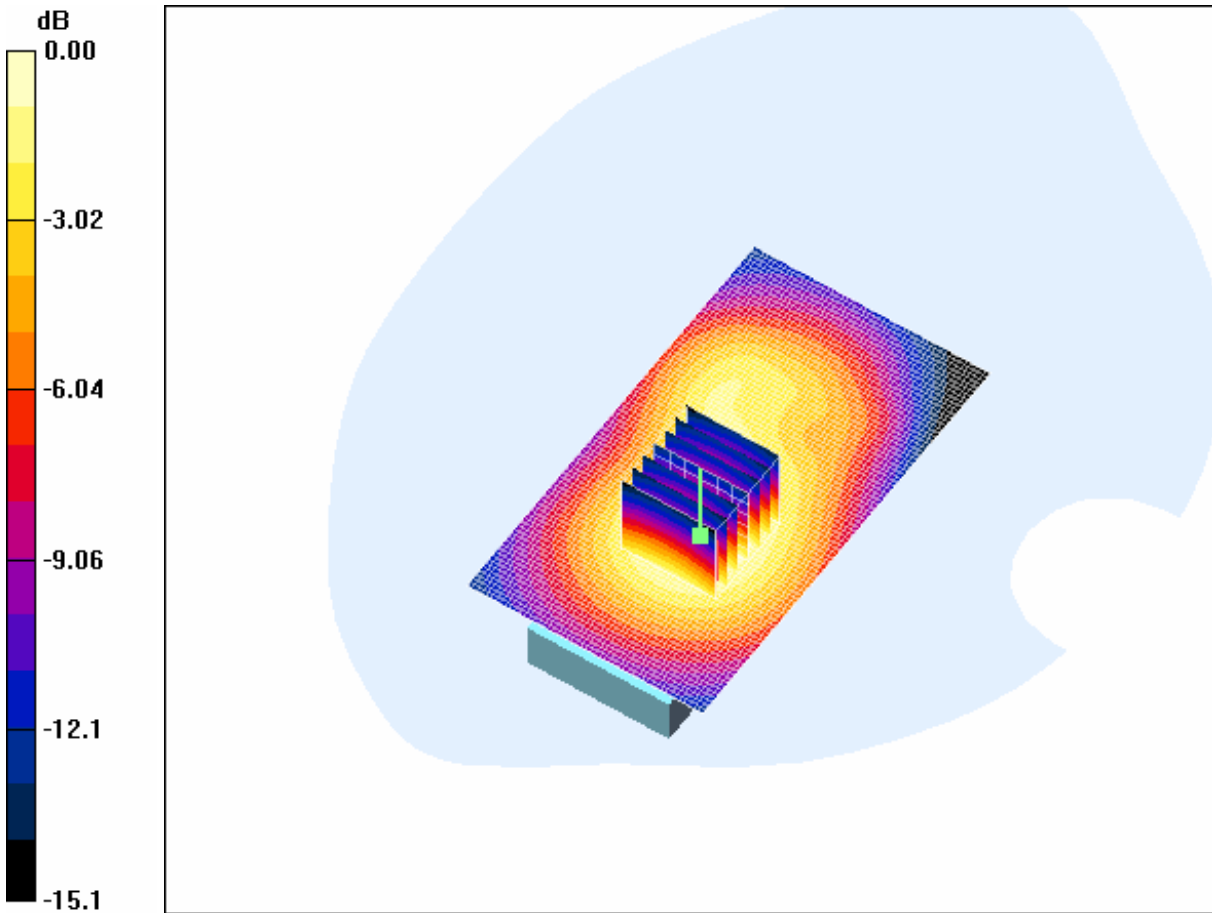

0 dB = 0.219mW/g

4.33 FCC-OET65-Body-Worn-GSM1900-High

Date/Time: 2005-9-22 18:41:25Date/Time: 2005-9-22 18:47:10

Test Laboratory: SGS-GSM

FCC-OET65-Body-Worn-GSM1900-High

DUT: GSM50085-Body; Type: Body; Serial: 20050921

Communication System: DCS1900-GSM Mode; Frequency: 1909.8 MHz;Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$

kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.66, 4.66, 4.66); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn - High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.232 mW/g


Body Worn - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.87 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.209 mW/g; SAR(10 g) = 0.129 mW/g

Maximum value of SAR (measured) = 0.224 mW/g

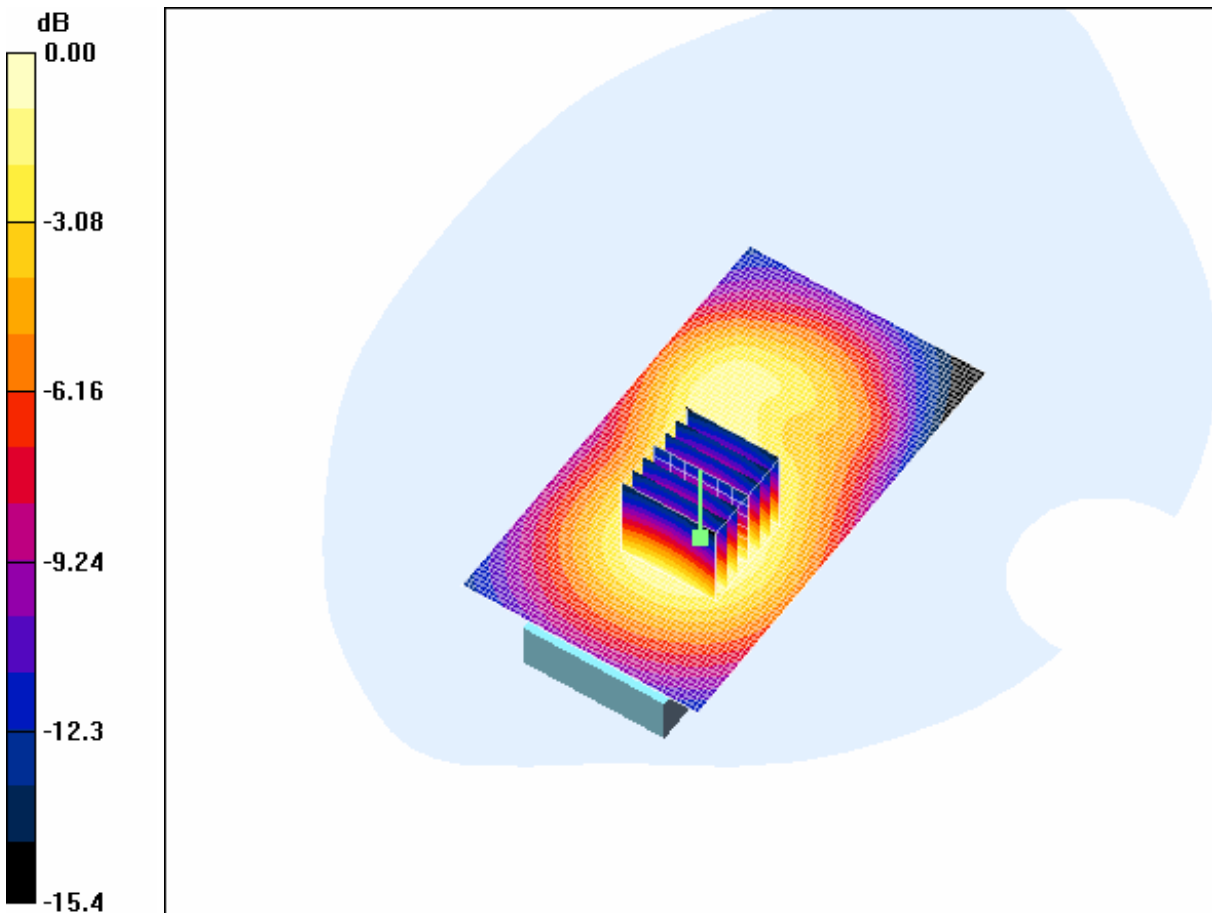

0 dB = 0.224mW/g

1900MHz GPRS Mode

4.34 FCC-OET65-Body-Worn-GSM1900-GPRS-Low

Date/Time: 2005-9-26 19:56:26 Date/Time: 2005-9-26 20:02:08

Test Laboratory: SGS-GSM

FCC-OET65-Body-Worn-GSM1900-GPRS-Low

DUT: GSM50085-Body; Type: Body; Serial: 20050921

Communication System: GSM1900-GPRS Mode; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: HSL1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.66, 4.66, 4.66); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn - Low/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.408 mW/g


Body Worn - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.186 dB

Peak SAR (extrapolated) = 0.560 W/kg

SAR(1 g) = 0.369 mW/g; SAR(10 g) = 0.230 mW/g

Maximum value of SAR (measured) = 0.398 mW/g

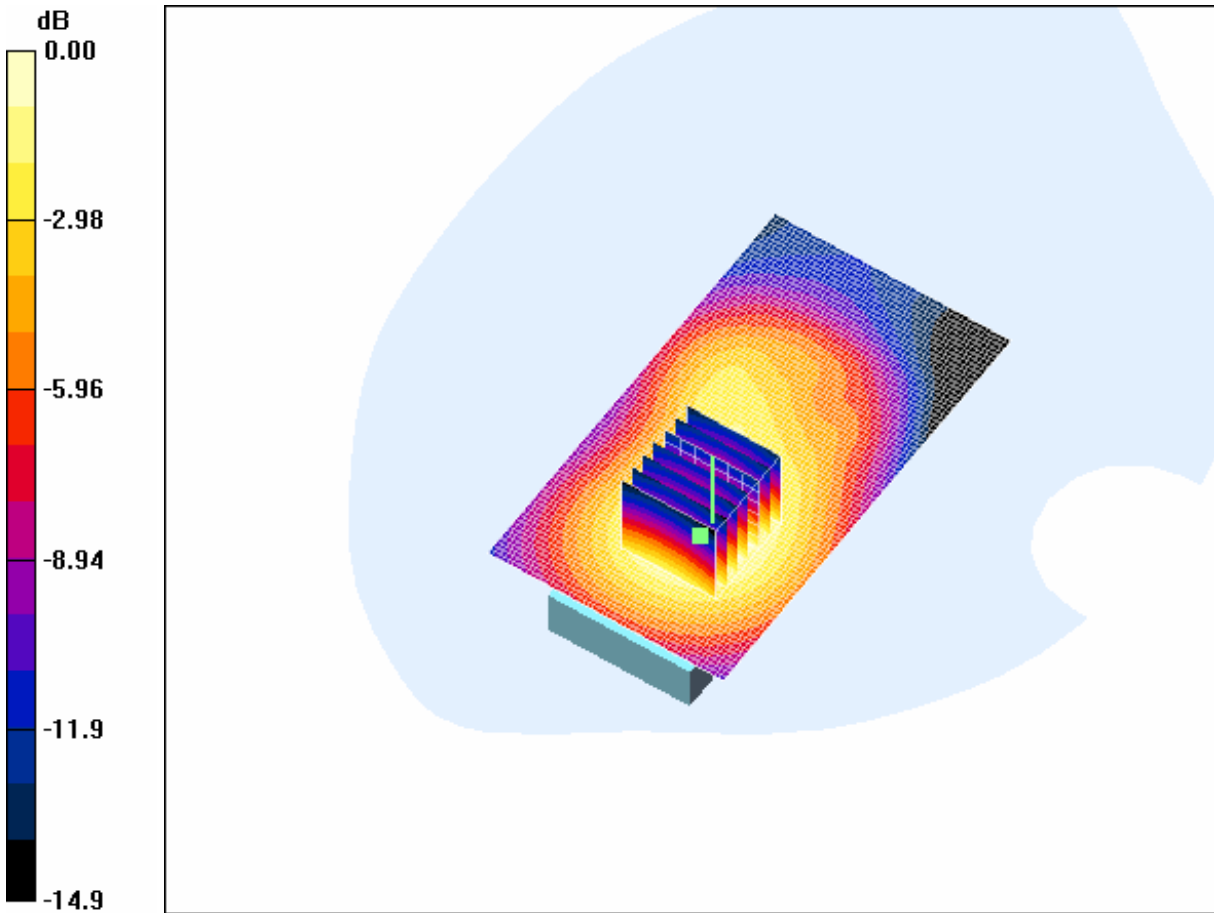

0 dB = 0.398mW/g

4.35 FCC-OET65-Body-Worn-GSM1900-GPRS-Middle

Date/Time: 2005-9-26 20:41:06Date/Time: 2005-9-26 20:46:50

Test Laboratory: SGS-GSM

FCC-OET65-Body-Worn-GSM1900-GPRS-Mid

DUT: GSM50085-Body; Type: Body; Serial: 20050921

Communication System: GSM1900-GPRS Mode; Frequency: 1880 MHz;Duty Cycle: 1:4

Medium: HSL1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$

kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.66, 4.66, 4.66); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn - Middle/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.411 mW/g


Body Worn - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.572 W/kg

SAR(1 g) = 0.374 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.403 mW/g

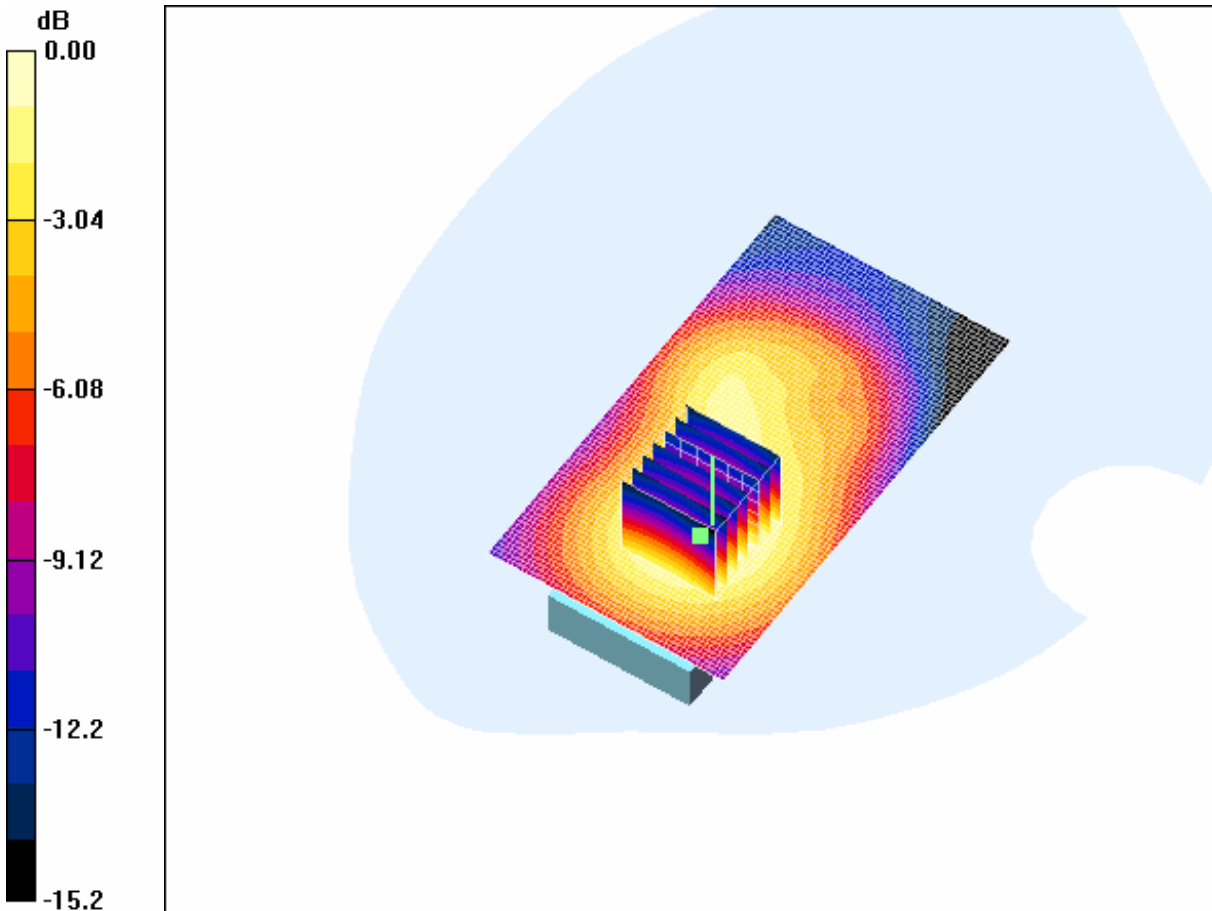

0 dB = 0.403mW/g

4.36 FCC-OET65-Body-Worn-GSM1900-GPRS-High

Date/Time: 2005-9-26 21:12:23Date/Time: 2005-9-26 21:18:07

Test Laboratory: SGS-GSM

FCC-OET65-Body-Worn-GSM1900-GPRS-High

DUT: GSM50085-Body; Type: Body; Serial: 20050921

Communication System: GSM1900-GPRS Mode; Frequency: 1909.8 MHz;Duty Cycle: 1:4

Medium: HSL1900 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$

kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1774; ConvF(4.66, 4.66, 4.66); Calibrated: 2004-10-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn611
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1283
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Body Worn - High/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.426 mW/g


Body Worn - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.426 mW/g

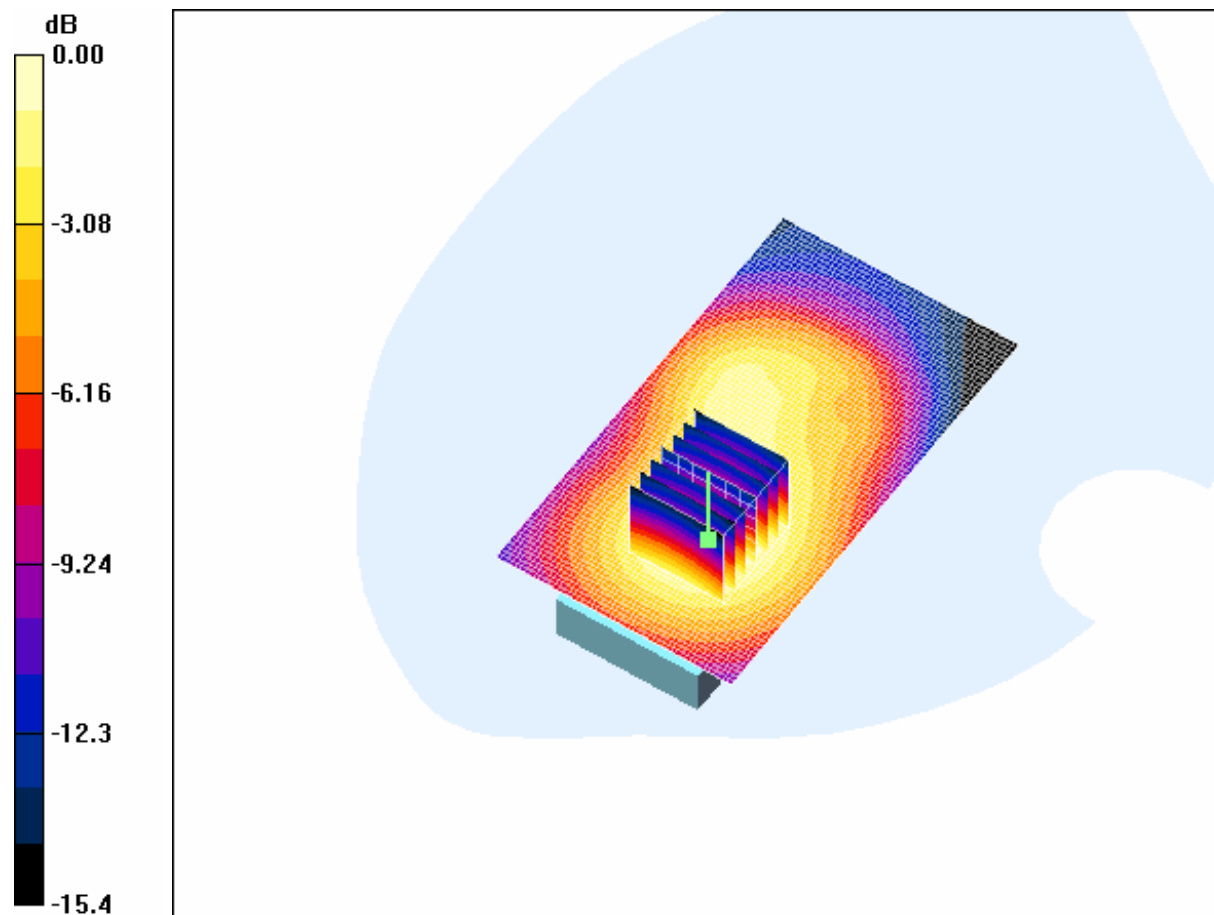

0 dB = 0.426mW/g

Appendix

1. Photographs of Test Setup

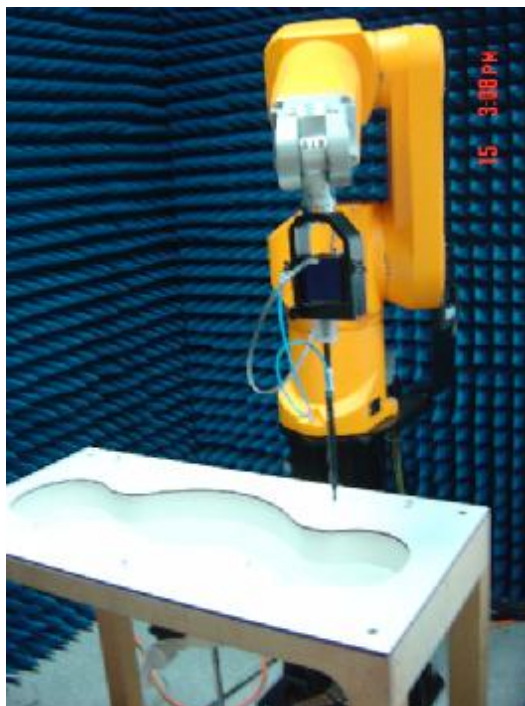


Fig.1 Photograph of the SAR measurement System

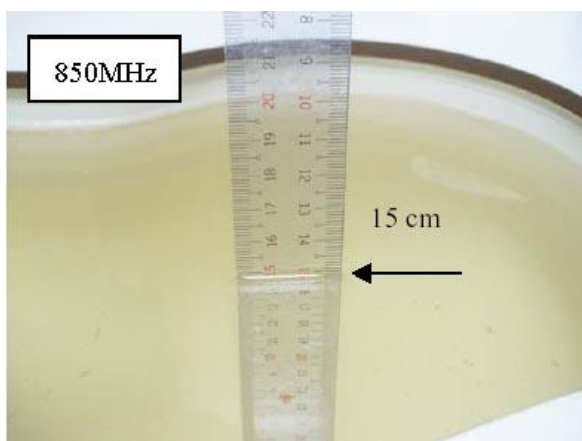


Fig.2 Photograph of the Tissue Simulant
Fluid Liquid depth 15cm
for Left-Head Side

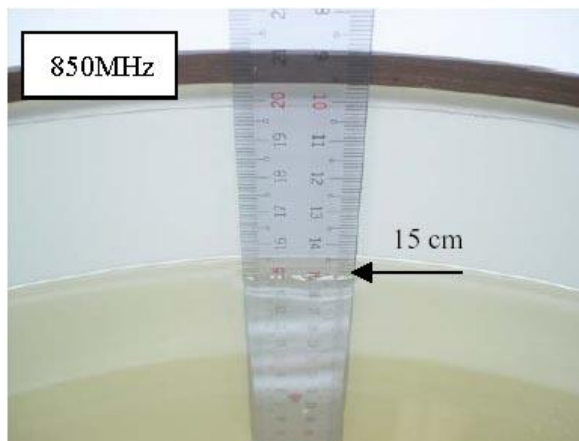


Fig.3 Photograph of the Tissue Simulant
Liquid depth 15cm for Body-Worn

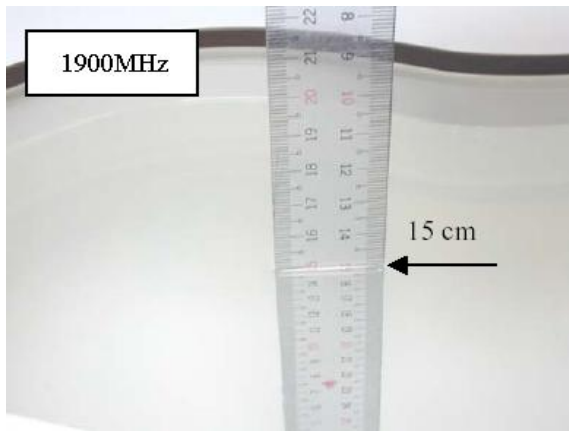


Fig.4 Photograph of the Tissue Simulant Fluid Liquid depth 15cm for Right-Head Side

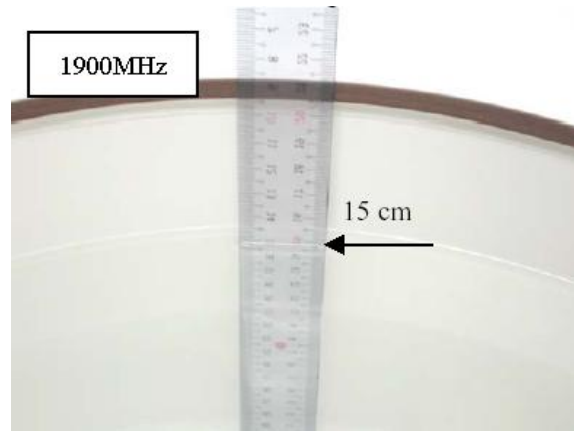


Fig.5 Photograph of the Tissue Simulant Liquid depth 15cm for Body-Worn

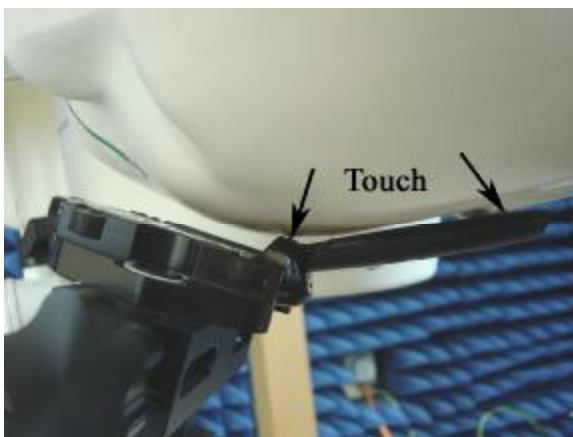


Fig.6 Photograph of the Left Hand Side Touch status

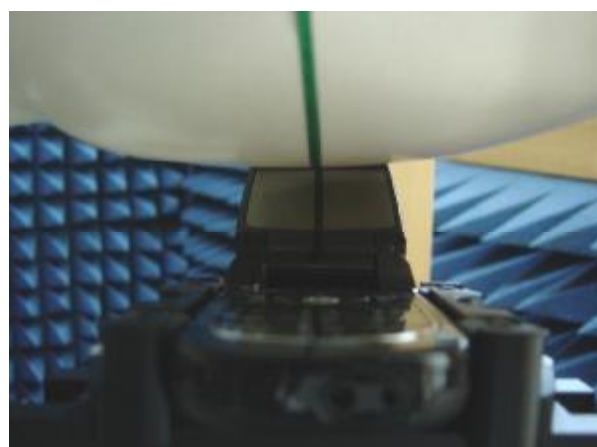


Fig.7 Photograph of the Left Hand Side Tilt status

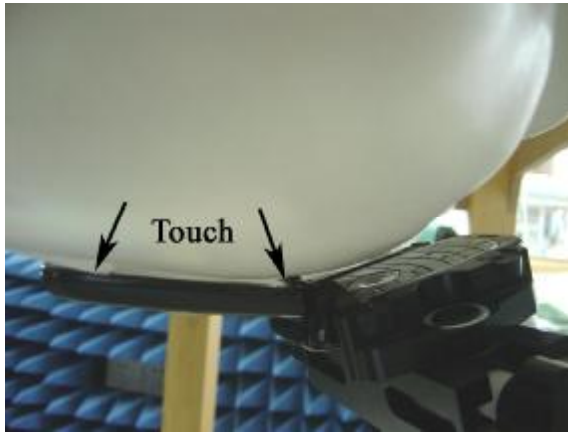


Fig.8 Photograph of the Right Hand Side Touch status

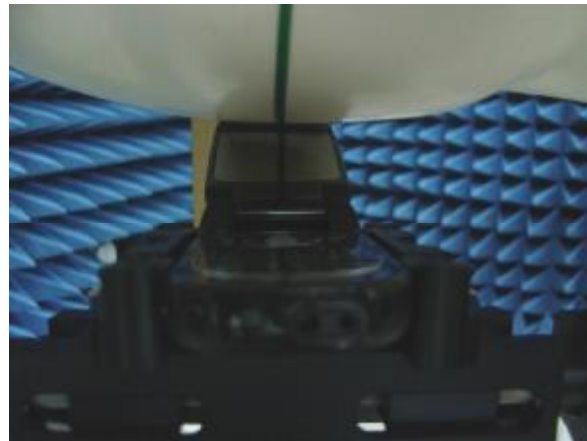
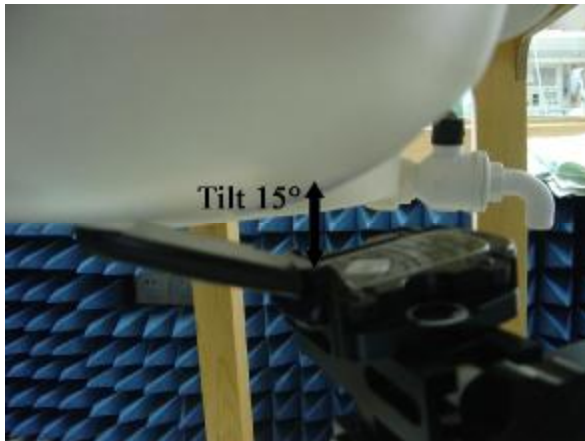


Fig.9 Photograph of the Right Hand Side Tilt status

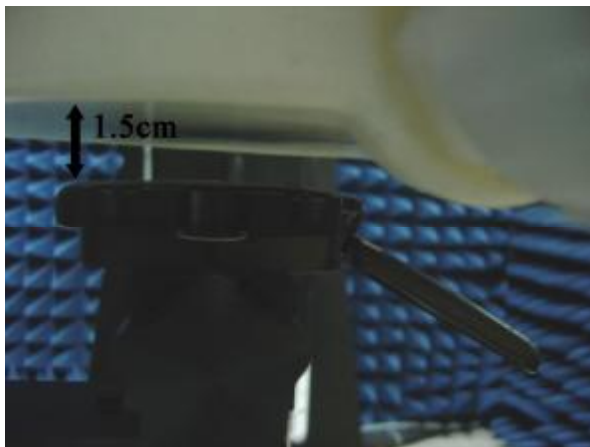


Fig.10 Photograph of the BodyWorn status

2. Photographs of the EUT



Fig.11 Front View



Fig.12 Back View

3. Photographs of the battery



Fig.13 Front view of battery



Fig.14 Back view of battery

4. Photograph of the charger



Fig.15 Charger

5. Probe Calibration certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **SGS China (Auden)**Certificate No: **ET3-1774_Oct04****CALIBRATION CERTIFICATE**Object **ET3DV6 - SN:1774**
 Calibration procedure(s) **QA CAL-01.v5**
Calibration procedure for dosimetric E-field probes
Calibration date: **October 26, 2004**Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	3-Apr-03 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5096 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	3-Apr-03 (METAS, No. 251-00404)	Aug-05
Reference Probe ES3DV2	SN: 3013	8-Jan-04 (SPEAG, No. ES3-3013_Jan04)	Jan-05
DAE4	SN: 617	26-May-04 (SPEAG, No. DAE4-617_May04)	May-05

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Nov 04

	Name	Function	Signature
Calibrated by:	Nico Vetterli	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: October 28, 2004

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

ET3DV6 SN:1774

October 26, 2004

Probe ET3DV6

SN:1774

Manufactured:	April 15, 2003
Last calibrated:	May 23, 2003
Repaired:	October 18, 2004
Recalibrated:	October 26, 2004

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1774

October 26, 2004

DASY - Parameters of Probe: ET3DV6 SN:1774**Sensitivity in Free Space^A****Diode Compression^B**

NormX	1.92 ± 9.9%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	93 mV
NormY	1.80 ± 9.9%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	93 mV
NormZ	1.72 ± 9.9%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	93 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect**TSL 900 MHz Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	8.8	4.6
SAR _{be} [%]	With Correction Algorithm	0.7	0.1

TSL 1750 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	12.5	8.3
SAR _{be} [%]	With Correction Algorithm	0.7	0.1

Sensor OffsetProbe Tip to Sensor Center **2.7 mm**

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).^B Numerical linearization parameter; uncertainty not required.

ET3DV6 SN:1774

October 26, 2004

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

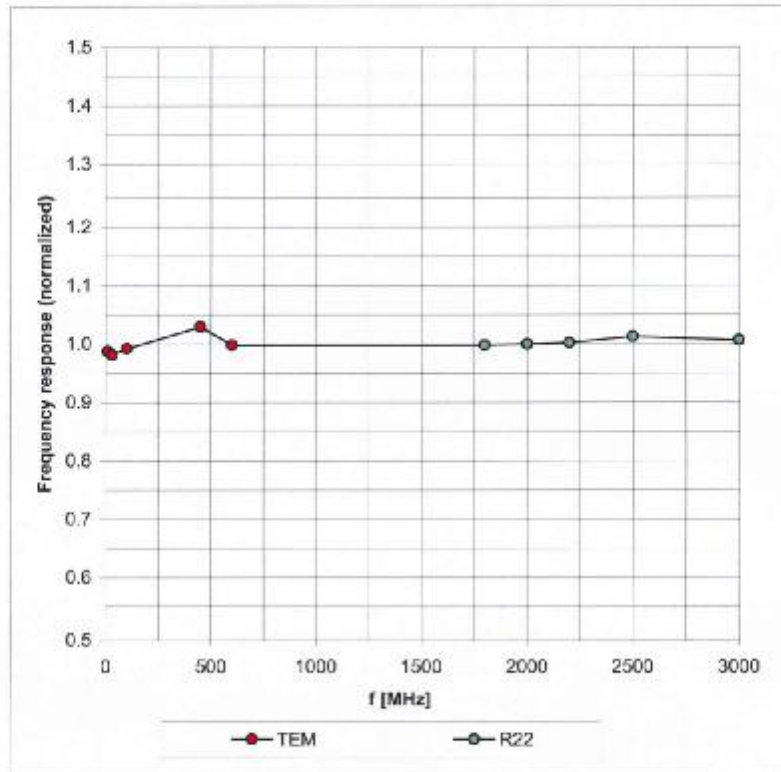


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ET3DV6 SN:1774

October 26, 2004

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

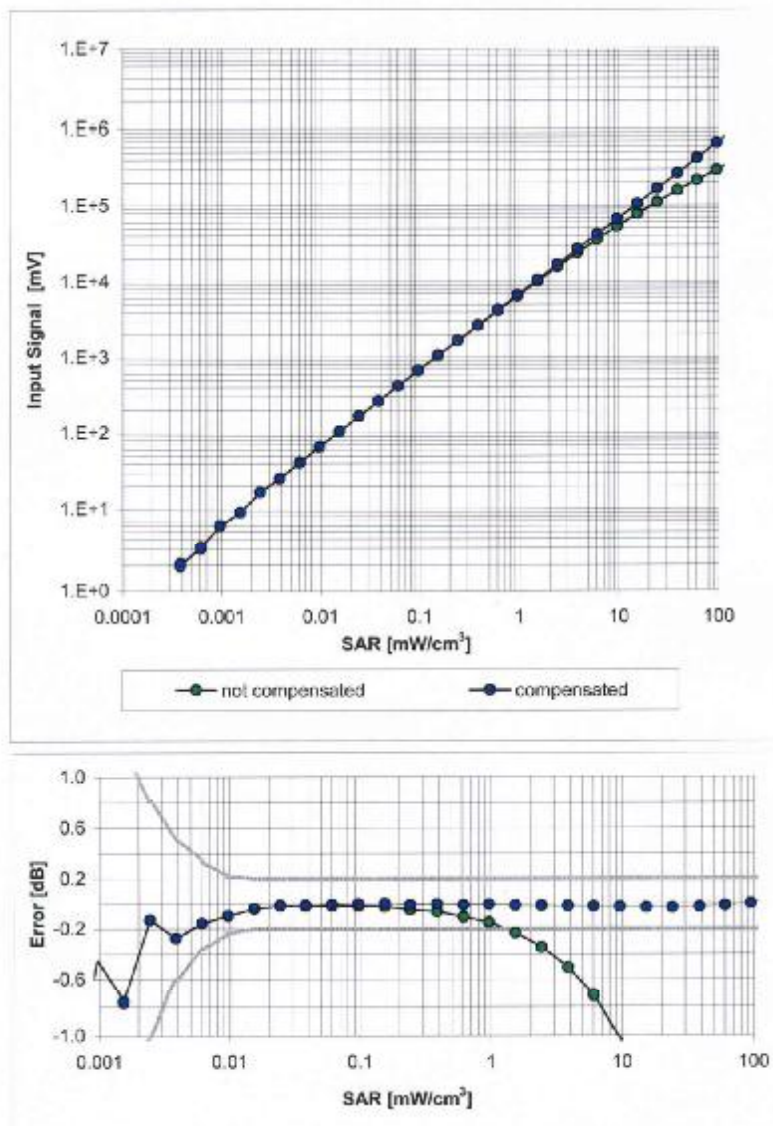


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ET3DV6 SN:1774

October 26, 2004

Conversion Factor Assessment

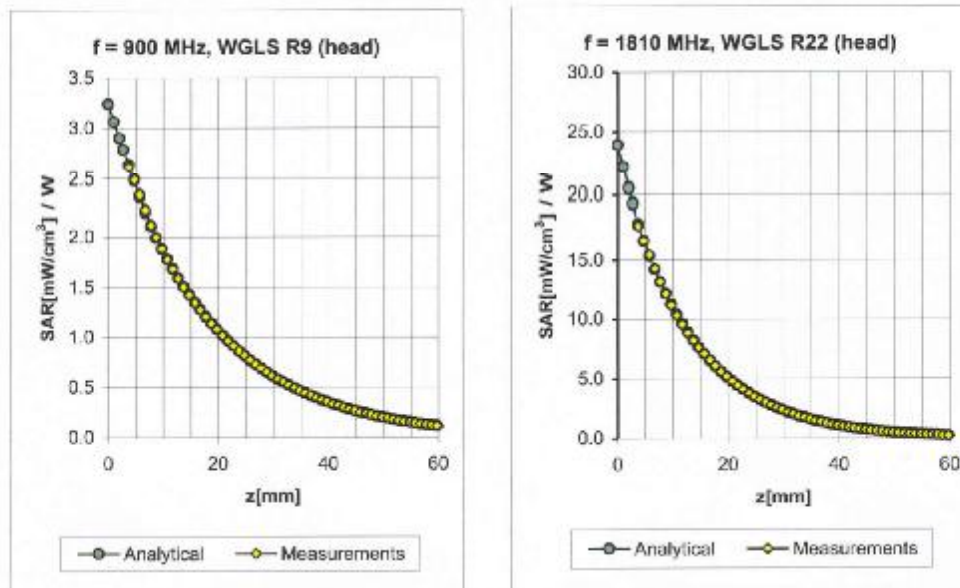

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	1.13	1.42	6.96 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	1.09	1.46	6.61 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.58	2.31	5.48 ± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.54	2.52	5.25 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.63	2.30	4.70 ± 11.8% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.96	1.58	6.65 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	1.00	1.57	6.36 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.52	2.81	4.79 ± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.52	2.98	4.66 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.62	2.18	4.35 ± 11.8% (k=2)


^c The validity of ± 100 MHz only applies for DASY 4.3 B17 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1774

October 26, 2004

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

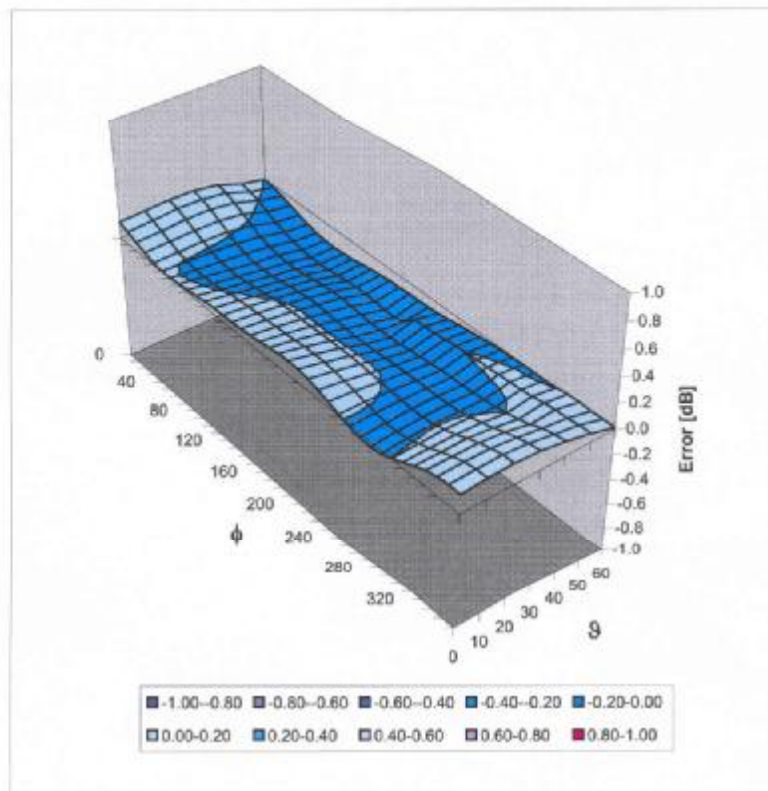


Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

ET3DV6 SN:1774

October 26, 2004

Receiving Pattern (ϕ), $\theta = 0^\circ$

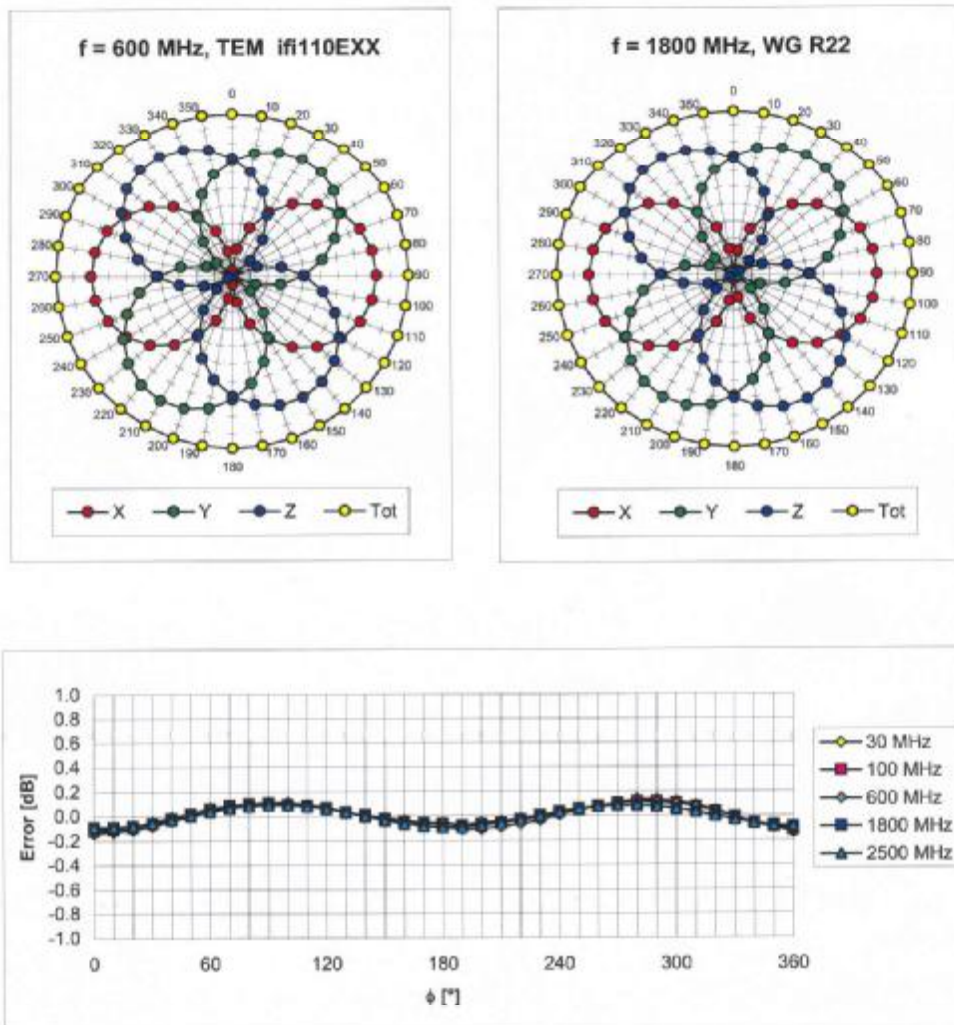

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

6. Uncertainty analysis

Error Description	Tol. (± %)	Prob. dist.	Div.	(<i>c</i> _i) (1g)	(<i>c</i> _i) (10g)	Std. unc. (± %)		(<i>v</i> _i)
Measurement System								
Probe Calibration	4.8	N	1	1	1	4.8	4.8	∞
Axial Isotropy	4.7	R	√3	1	1	2.7	2.7	∞
Hemispherical Isotropy	0	R	√3	1	1	0	0	∞
Boundary Effects	1.0	R	√3	1	1	0.6	0.6	∞
Linearity	4.7	R	√3	1	1	2.7	2.7	∞
System Detection Limit	1.0	R	√3	1	1	0.6	0.6	∞
Readout Electronics	1.0	N	1	1	1	1.0	1.0	∞
Response Time	0	R	√3	1	1	0	0	∞
Integration Time	0	R	√3	1	1	0	0	∞
RF Ambient Conditions	3.0	R	√3	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	√3	1	1	0.2	0.2	∞
Probe Positioning	2.9	R	√3	1	1	1.7	1.7	∞
Algorithms for Max. SAR Eval.	1.0	R	√3	1	1	0.6	0.6	∞
Dipole								
Dipole Axis to Liquid Distance	2.0	R	√3	1	1	1.2	1.2	∞
Input power and SAR drift meas.	4.7	R	√3	1	1	2.7	2.7	∞
Phantom and Tissue Param.								
Phantom Uncertainty	4.0	R	√3	1	1	2.3	2.3	∞
Liquid Conductivity (target)	5.0	R.	√3	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1	∞
Liquid Permittivity (target)	5.0	R	√3	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2	∞
Combined Standard Uncertainty						8.4	8.1	∞
Coverage Factor for 95%		kp=2						
Expanded Uncertainty						16.8	16.2	

Dasy4 Uncertainty Budget

7. Phantom description

**Schmid & Partner
Engineering AG**

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 CA
Series No	TP-1150 and higher
Manufacturer / Origin	Unlensee Composites Hauptstr. 69 CH-8559 Fruttwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles.
Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT1S CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz - 3 GHz Relative permittivity < 5 Loss tangent < 0.05	Material sample TP 104-S
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

[1] CENELEC EN 50361

[2] IEEE P1528-200x draft 6.5

[3] IEC PT 62209 draft 0.9

(*) The IT1S CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date

28.02.2002

Signature / Stamp

*F. Bernhardt***Schmid & Partner
Engineering AG**Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79*Thomas Kappeler***The end**