



SAR TEST REPORT

No. I18Z61508-SEM02

For

Samsung Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model name: SM-G6200

With

Hardware Version: REV0.5

Software Version: OPM1.171019.026.G6200ZCU0ARJ4

FCC ID: ZCASM6200

Issued Date: 2018-10-31



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Issue Date	Description
I18Z61508-SEM02	Rev.0	2018-10-30	Initial creation of test report
I18Z61508-SEM02	Rev.1	2018-10-31	Update the company name and address

TABLE OF CONTENT

1 TEST LABORATORY	5
1.1 TESTING LOCATION	5
1.2 TESTING ENVIRONMENT.....	5
1.3 PROJECT DATA	5
1.4 SIGNATURE.....	5
2 STATEMENT OF COMPLIANCE	6
3 CLIENT INFORMATION	8
3.1 APPLICANT INFORMATION	8
3.2 MANUFACTURER INFORMATION	8
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
4.1 ABOUT EUT	9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	9
5 TEST METHODOLOGY	10
5.1 APPLICABLE LIMIT REGULATIONS	10
5.2 APPLICABLE MEASUREMENT STANDARDS.....	10
6 SPECIFIC ABSORPTION RATE (SAR).....	11
6.1 INTRODUCTION.....	11
6.2 SAR DEFINITION	11
7 TISSUE SIMULATING LIQUIDS	12
7.1 TARGETS FOR TISSUE SIMULATING LIQUID	12
7.2 DIELECTRIC PERFORMANCE	12
8 SYSTEM VERIFICATION	18
8.1 SYSTEM SETUP.....	18
8.2 SYSTEM VERIFICATION.....	19
9 MEASUREMENT PROCEDURES	20
9.1 TESTS TO BE PERFORMED	20
9.2 GENERAL MEASUREMENT PROCEDURE.....	22
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR	23
9.4 SAR MEASUREMENT FOR LTE.....	24
9.5 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR	26
9.6 POWER DRIFT.....	26
10 AREA SCAN BASED 1-G SAR.....	27
10.1 REQUIREMENT OF KDB.....	27
10.2 FAST SAR ALGORITHMS	27
11 CONDUCTED OUTPUT POWER.....	28

11.1 GSM MEASUREMENT RESULT	28
11.2 CDMA MEASUREMENT RESULT	29
11.3 WCDMA MEASUREMENT RESULT	30
11.4 LTE MEASUREMENT RESULT	31
11.5 WI-FI AND BT MEASUREMENT RESULT	38
12 SIMULTANEOUS TX SAR CONSIDERATIONS	40
12.1 INTRODUCTION	40
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES	40
12.3 SAR MEASUREMENT POSITIONS	41
12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	41
13 EVALUATION OF SIMULTANEOUS	42
14 SAR TEST RESULT	43
14.1 SAR RESULTS FOR FAST SAR	44
14.2 SAR RESULTS FOR STANDARD PROCEDURE	52
14.3 WLAN EVALUATION FOR 2.4G	55
14.4 WLAN EVALUATION FOR 5G	58
15 SAR MEASUREMENT VARIABILITY	62
16 MEASUREMENT UNCERTAINTY	63
16.1 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz)	63
16.2 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHz)	64
16.3 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHz~3GHz)	65
16.4 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHz)	66
17 MAIN TEST INSTRUMENTS	67
ANNEX A GRAPH RESULTS	68
ANNEX B SYSTEM VERIFICATION RESULTS	108
ANNEX C SAR MEASUREMENT SETUP	123
ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	129
ANNEX E EQUIVALENT MEDIA RECIPES	132
ANNEX F SYSTEM VALIDATION	133
ANNEX G PROBE CALIBRATION CERTIFICATE	134
ANNEX H DIPOLE CALIBRATION CERTIFICATE	145
ANNEX I SENSOR TRIGGERING DATA SUMMARY	197
ANNEX J ACCREDITATION CERTIFICATE	199

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

1.2 Testing Environment

Temperature:	18°C~25°C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg


1.3 Project Data

Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	September 15, 2018
Testing End Date:	October 29, 2018


1.4 Signature



Lin Xiaojun
(Prepared this test report)

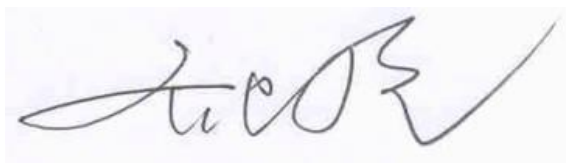

Qi Dianyuan
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2 Statement of Compliance

The maximum results of SAR found during testing for Samsung Electronics Co., Ltd. Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN SM-G6200 are as follows:

Table 2.1: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/kg)	Equipment Class
Head (Separation Distance 0mm)	GSM 850	0.24	PCE
	PCS 1900	0.11	
	UMTS FDD 5	0.11	
	UMTS FDD 2	0.17	
	CDMA BC0	0.12	
	LTE Band 5	0.09	
	LTE Band 7	0.06	
	LTE Band 41	0.03	
	Bluetooth	<0.01	DTS
	WLAN 2.4 GHz	1.54	
	WLAN 5 GHz	1.40	UNII
Hotspot (Separation Distance 10mm)	GSM 850	0.40	PCE
	PCS 1900	1.31	
	UMTS FDD 5	0.24	
	UMTS FDD 2	1.37	
	CDMA BC0	0.28	
	LTE Band 5	0.22	
	LTE Band 7	1.09	
	LTE Band 41	0.49	
	Bluetooth	<0.01	DTS
	WLAN 2.4 GHz	0.20	
	WLAN 5 GHz	0.15	UNII

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report. The highest reported SAR value is obtained at the case of **(Table 2.1)**, and the values are: **1.54 W/kg(1g)**.

Table 2.2: The sum of reported SAR values for main antenna and WiFi 2.4G

	Position	Band	Main antenna	WLAN	Sum	Distance (mm)	Ratio
Maximum reported SAR value for Head	Left hand, Touch cheek	GSM 850	0.24	1.47	1.71	71.59	0.03
	Left hand, Tilt 15°	GSM 850 CDMA BC0	0.06	1.54	1.60	/	/
Maximum reported SAR value for Body	Rear	LTE B7	0.76	0.13	0.89	/	/
	Bottom	WCDMA 1900	1.37	/	1.37	/	/

According to the KDB 447498 D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The ratio is determined by $(SAR_1 + SAR_2)^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

Table 2.3: The sum of reported SAR values for main antenna and WiFi 5G

	Position	Main antenna	WLAN	Sum
Maximum reported SAR value for Head	Left hand, Touch cheek	0.24	0.90	1.14
	Left hand, Tilt 15°	0.06	1.40	1.46
Maximum reported SAR value for Body	Rear	0.76	0.02	0.78
	Bottom	1.37	/	1.37

Table 13.3: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT	Sum
Maximum reported SAR value for Head	Left hand, Touch cheek	0.24	<0.01 ^[1]	0.24
Maximum reported SAR value for Body	Rear	0.76	<0.01 ^[1]	0.76
	Bottom	1.37	/	1.37

[1] - The SAR results of BT is too low to be measured, we use "< 0.01" to indicate the value.

According to the above tables, the highest sum of reported SAR values is **1.71 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.

According to the KDB648474 D04, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg

Table 2.5: 0mm Reported SAR for phablet (10g)

Exposure Configuration	Technology Band	Highest Reported SAR 10g(W/kg)	Limit 10g (W/kg)
Hotspot (Separation Distance 0mm)	GSM 1900	1.03	4.0
	UMTS FDD 2	2.19	4.0

3 Client Information

3.1 Applicant Information

Company Name:	Samsung Electronics Co., Ltd.
Address/Post:	(Maetan dong)129, Samsung-ro Yeongtong-gu, Suwon-si, Gyeonggi-do 16677,Korea
Contact Person:	/
E-mail:	/
Telephone:	/
Fax:	/

3.2 Manufacturer Information

Company Name:	Samsung Electronics Co., Ltd.
Address/Post:	(Maetan dong)129, Samsung-ro Yeongtong-gu, Suwon-si, Gyeonggi-do 16677,Korea
Contact Person:	/
E-mail:	/
Telephone:	/
Fax:	/

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN
Model name:	SM-G6200
Operating mode(s):	GSM 850/900/1800/1900, UMTS FDD 1/2/5/8, BT, Wi-Fi CDMA BC0, LTE Band 1/3/5/7/8/34/38/39/40/41
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850)
	1850.2 – 1910 MHz (GSM 1900)
	826.4–846.6 MHz (WCDMA 850 Band V)
	1852.4–1907.6 MHz (WCDMA1900 Band II)
	824.7 – 848.3 MHz (LTE Band 5)
	2502.5 – 2567.5 MHz (LTE Band 7)
	2498.5 – 2687.5 MHz (LTE Band41)
	2412 – 2462 MHz (Wi-Fi 2.4G)
	5150-5825 MHz (Wi-Fi 5G)
GPRS/EGPRS Multislot Class:	33
GPRS capability Class:	B
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-worn configurations:	Headset
Hotspot mode:	Support
VoIP:	Support
Product Dimension:	L: 156.14mm W: 76.4mm overall diagonal: 173.83mm

4.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW	SW Version
EUT1	359234090081623	REV0.5	OPM1.171019.026.G6200ZCU0ARJ4
EUT2	359234090078140	REV0.5	OPM1.171019.026.G6200ZCU0ARJ4
EUT3	359234090073448	REV0.5	OPM1.171019.026.G6200ZCU0ARJ4
EUT4	359234090078561	REV0.5	OPM1.171019.026.G6200ZCU0ARJ4
EUT5	359234090086903	REV0.5	OPM1.171019.026.G6200ZCU0ARJ4
EUT6	359234090092521	REV0.5	OPM1.171019.026.G6200ZCU0ARJ4
EUT7	359234090031065	REV0.5	OPM1.171019.026.G6200ZCU0ARJ4
EUT8	359234090044167	REV0.5	OPM1.171019.026.G6200ZCU0ARJ4
EUT9	359234090087448	REV0.5	OPM1.171019.026.G6200ZCU0ARJ4
EUT10	359234090044365	REV0.5	OPM1.171019.026.G6200ZCU0ARJ4
EUT11	359234090044043	REV0.5	OPM1.171019.026.G6200ZCU0ARJ4

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1-6 and conducted power with the EUT7-11.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	EB-BG610ABE	AA1K515LS/--B	Samsung SDI Co., Ltd.
AE2	Headset	SE378	/	BINSHI

*AE ID: is used to identify the test sample in the lab internally.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1992:IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

KDB447498 D01: General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03r01: SAR Measurement Procedures for 3G Devices

KDB941225 D05 SAR for LTE Devices v02r05: SAR Evaluation Considerations for LTE Devices

KDB941225 D06 Hotspot Mode SAR v02r01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB248227 D01 802.11 Wi-Fi SAR v02r02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB865664 D01SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB865664 D02RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


Frequency(MHz)	Liquid Type	Conductivity(σ)	$\pm 5\%$ Range	Permittivity(ϵ)	$\pm 5\%$ Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3
2600	Head	1.96	1.86~2.06	39.01	37.1~41.0
2600	Body	2.16	2.05~2.27	52.5	49.9~55.1
5250	Head	4.71	4.47~4.95	35.93	34.13~37.73
5250	Body	5.36	5.09~5.63	48.9	46.46~51.35
5600	Head	5.07	4.82~5.32	35.53	33.75~37.31
5600	Body	5.77	5.48~6.06	48.5	46.08~50.92
5750	Head	5.22	4.96~5.48	35.36	33.59~37.13
5750	Body	5.94	5.64~6.24	48.3	45.89~50.72

7.2 Dielectric Performance


Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2018-9-15	Head	835 MHz	41.86	0.87	0.918	2.00
	Body	835 MHz	55.92	1.30	0.996	2.68
2018-9-16	Head	1900 MHz	40.7	1.75	1.421	1.50
	Body	1900 MHz	52.61	-1.29	1.556	2.37
2018-9-17	Head	2450 MHz	39.71	1.30	1.846	2.56
	Body	2450 MHz	53.38	1.29	1.975	1.28
2018-9-18	Head	2600 MHz	38.06	-2.44	1.969	0.46
	Body	2600 MHz	51.45	-2.00	2.215	2.55
2018-10-29	Head	5250 MHz	34.8	-3.15	4.541	-3.59
	Body	5250 MHz	47.43	-3.01	5.231	-2.41
	Head	5600 MHz	34.14	-3.91	4.922	-2.92
	Body	5600 MHz	47.57	-1.92	5.696	-1.28
	Head	5750 MHz	34.87	-1.39	5.078	-2.72
	Body	5750 MHz	47.31	-2.05	5.912	-0.47


Note: The liquid temperature is 22.0°C

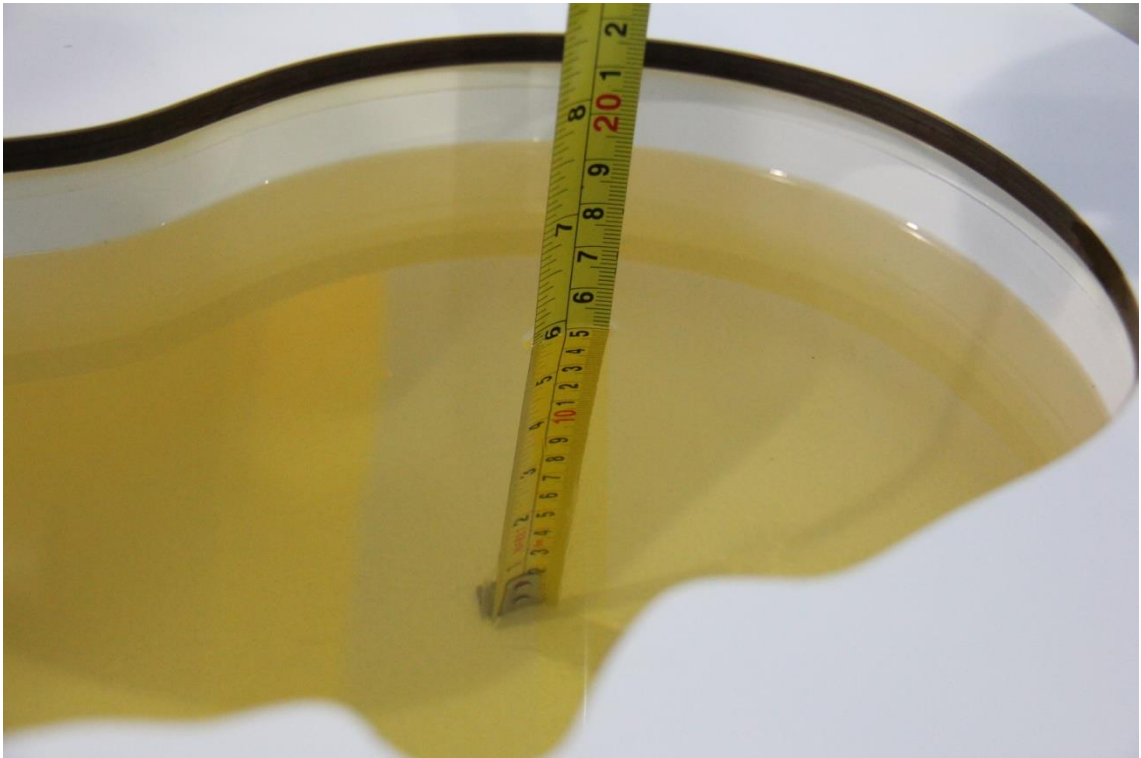

Picture 7-1 Liquid depth in the Head Phantom (835 MHz)

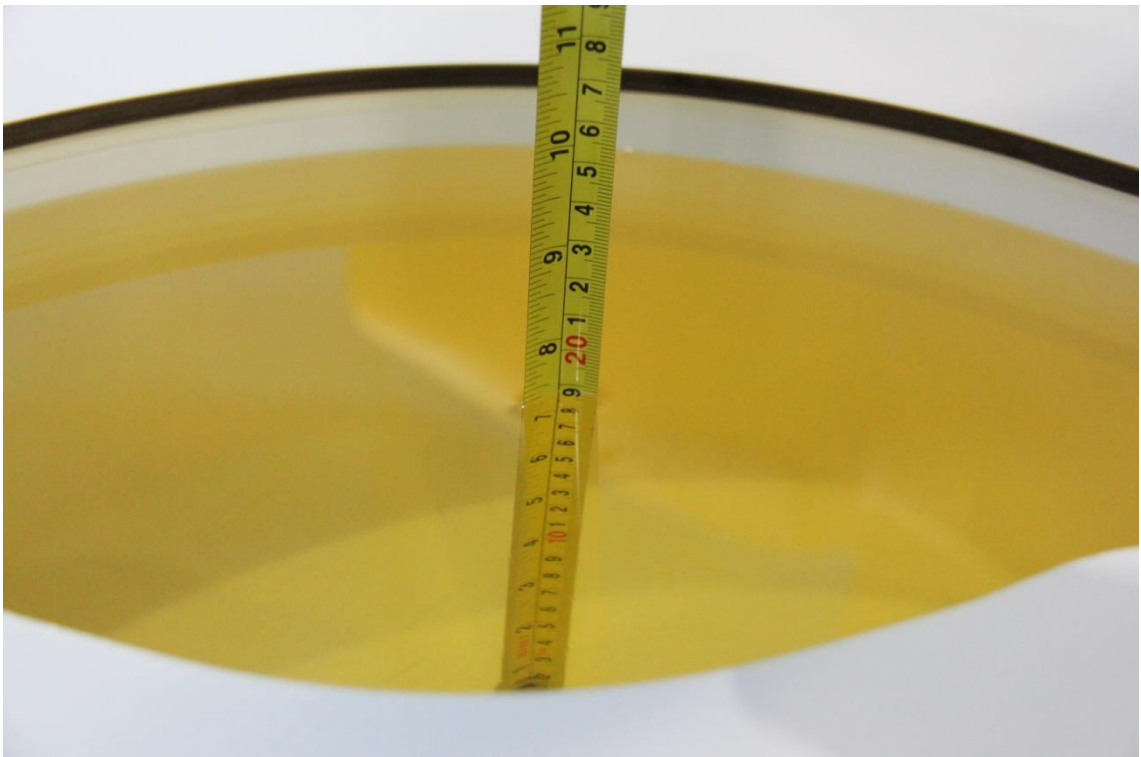

Picture 7-2 Liquid depth in the Flat Phantom (835 MHz)

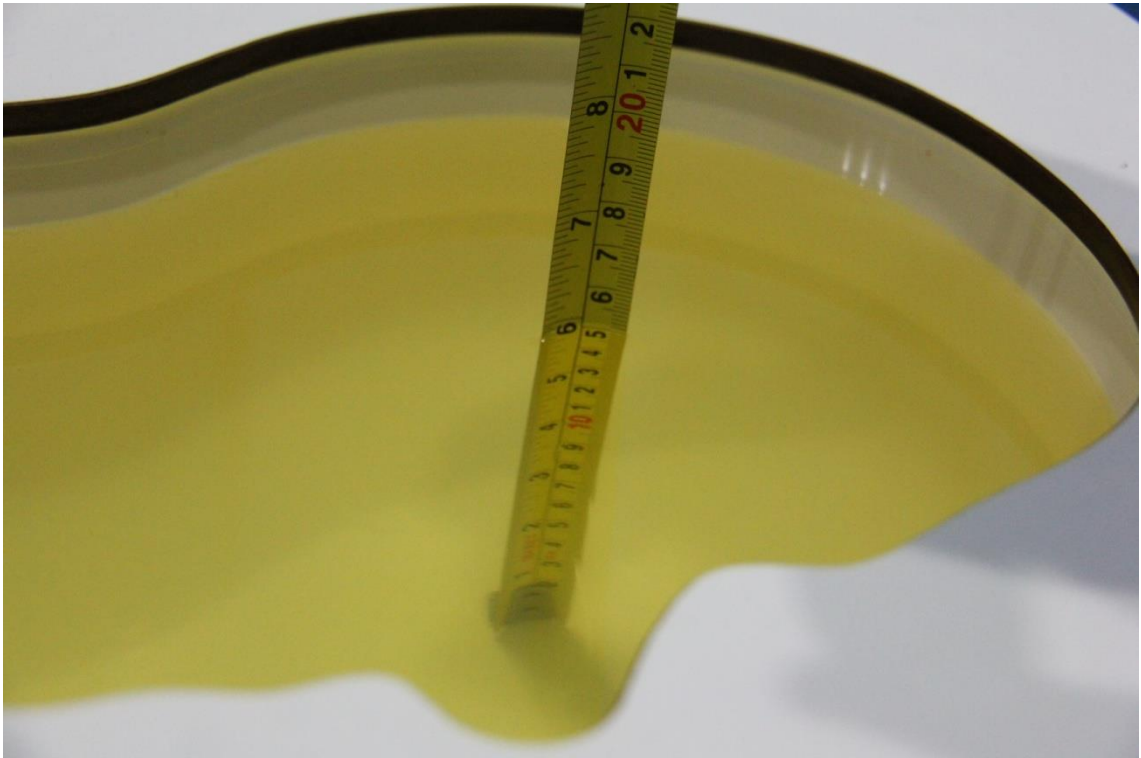


Picture 7-3 Liquid depth in the Head Phantom (1900 MHz)



Picture 7-4 Liquid depth in the Flat Phantom (1900MHz)




Picture 7-5 Liquid depth in the Head Phantom (2450MHz)

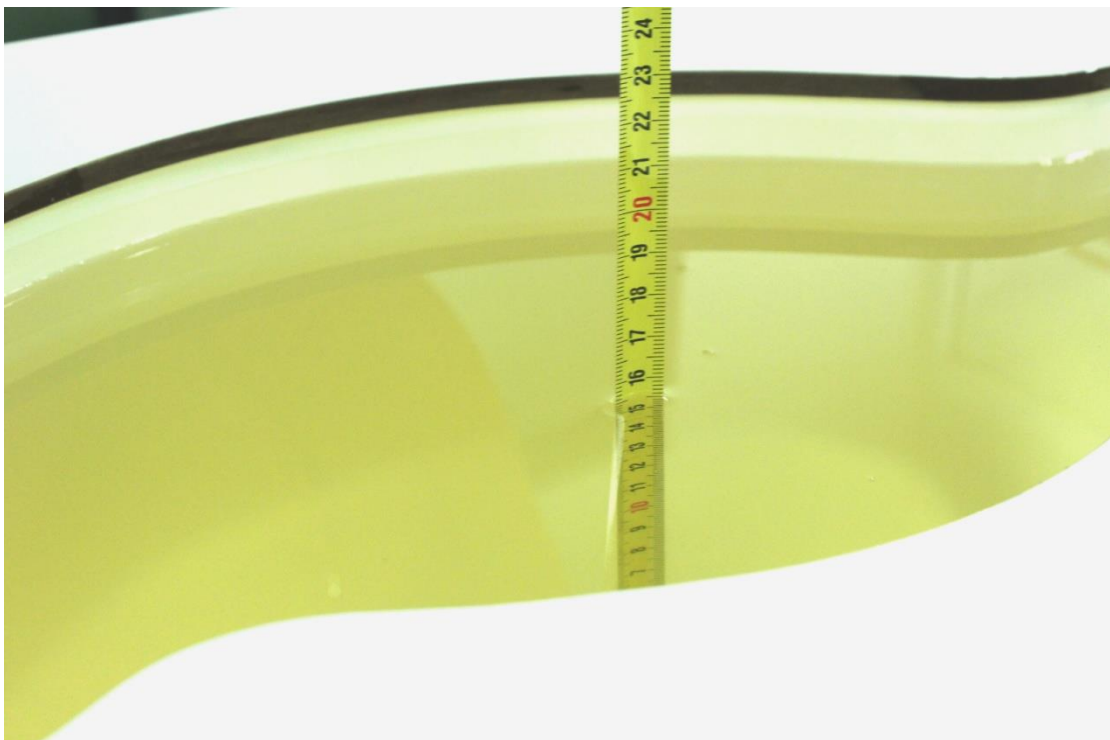

Picture 7-6 Liquid depth in the Flat Phantom (2450MHz)



Picture 7-7 Liquid depth in the Head Phantom (2600 MHz Head)

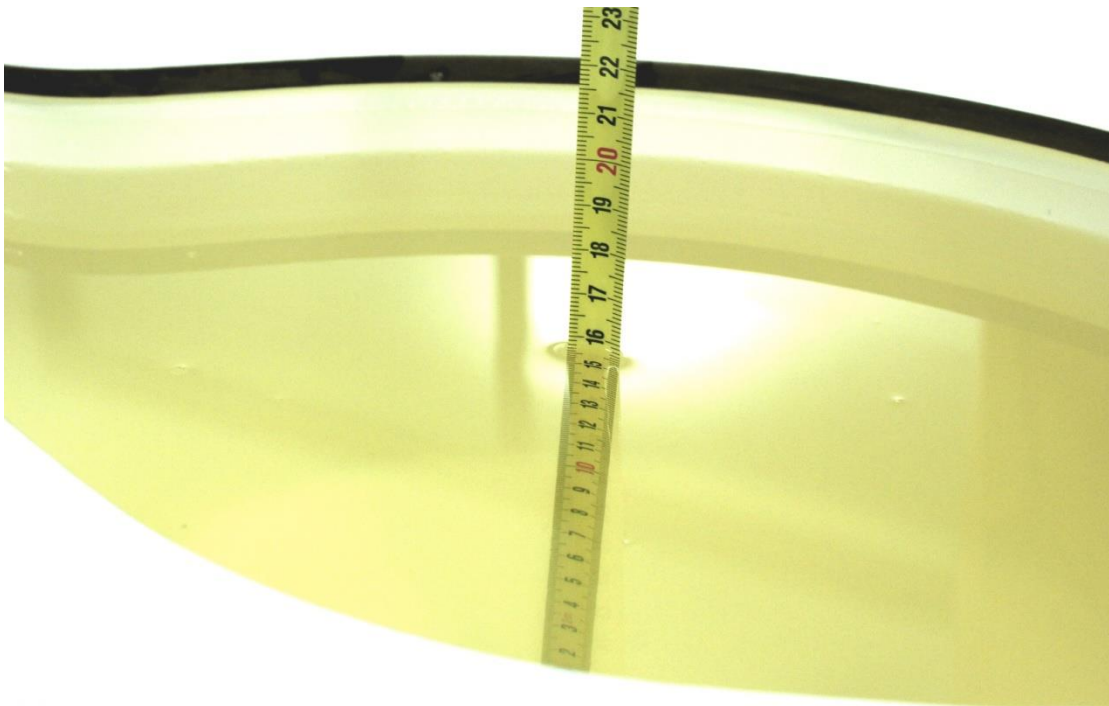

Picture 7-8 Liquid depth in the Flat Phantom (2600MHz)



Picture 7-9 Liquid depth in the Head Phantom (5GHz)




Picture 7-10 Liquid depth in the Flat Phantom (5GHz)

8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

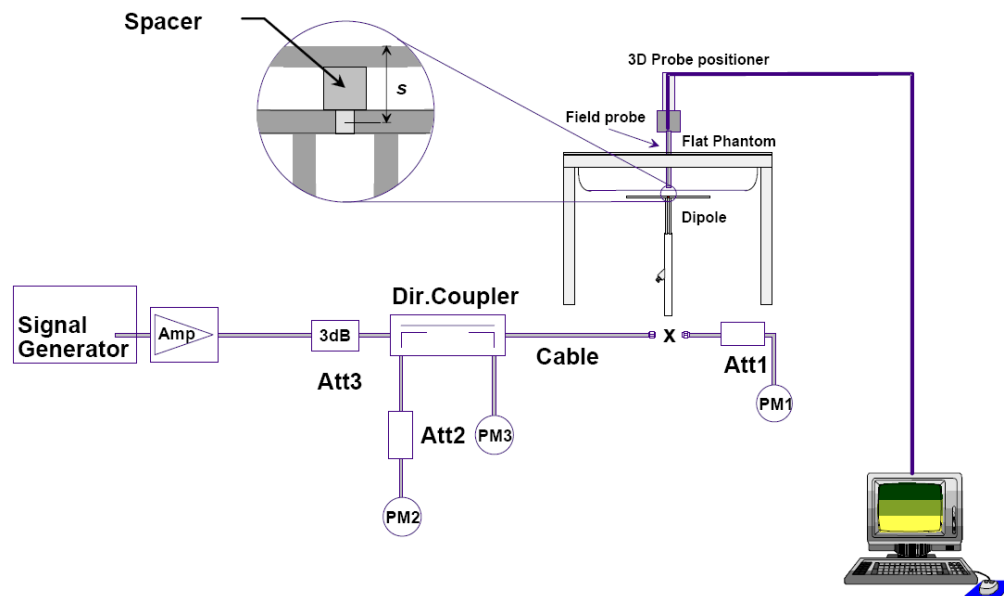

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value(W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2018-9-15	835 MHz	6.06	9.40	5.92	9.16	-2.31%	-2.55%
2018-9-16	1900 MHz	21.3	40.4	21.0	40.0	-1.60%	-0.99%
2018-9-17	2450 MHz	24.2	51.7	23.8	51.2	-1.49%	-0.97%
2018-9-18	2600 MHz	24.9	55.4	25.4	57.2	2.01%	3.25%
2018-10-29	5250 MHz	23.1	80.0	22.7	79.1	-1.73%	-1.13%
	5600 MHz	24.0	83.7	23.7	82.9	-1.25%	-0.96%
	5750 MHz	23.0	79.5	23.5	81.1	2.17%	2.01%

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2018-9-15	835 MHz	6.28	9.53	6.36	9.72	1.27%	1.99%
2018-9-16	1900 MHz	21.4	40.4	22.04	41.60	2.99%	2.97%
2018-9-17	2450 MHz	24.1	51.3	23.64	50.80	-1.91%	-0.97%
2018-9-18	2600 MHz	24.5	54.1	25.16	56.00	2.69%	3.51%
2018-10-29	5250 MHz	21.2	75.7	20.80	73.90	-1.89%	-2.38%
	5600 MHz	22.1	78.6	22.50	79.70	1.81%	1.40%
	5750 MHz	21.4	76.9	20.80	75.30	-2.80%	-2.08%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.


If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

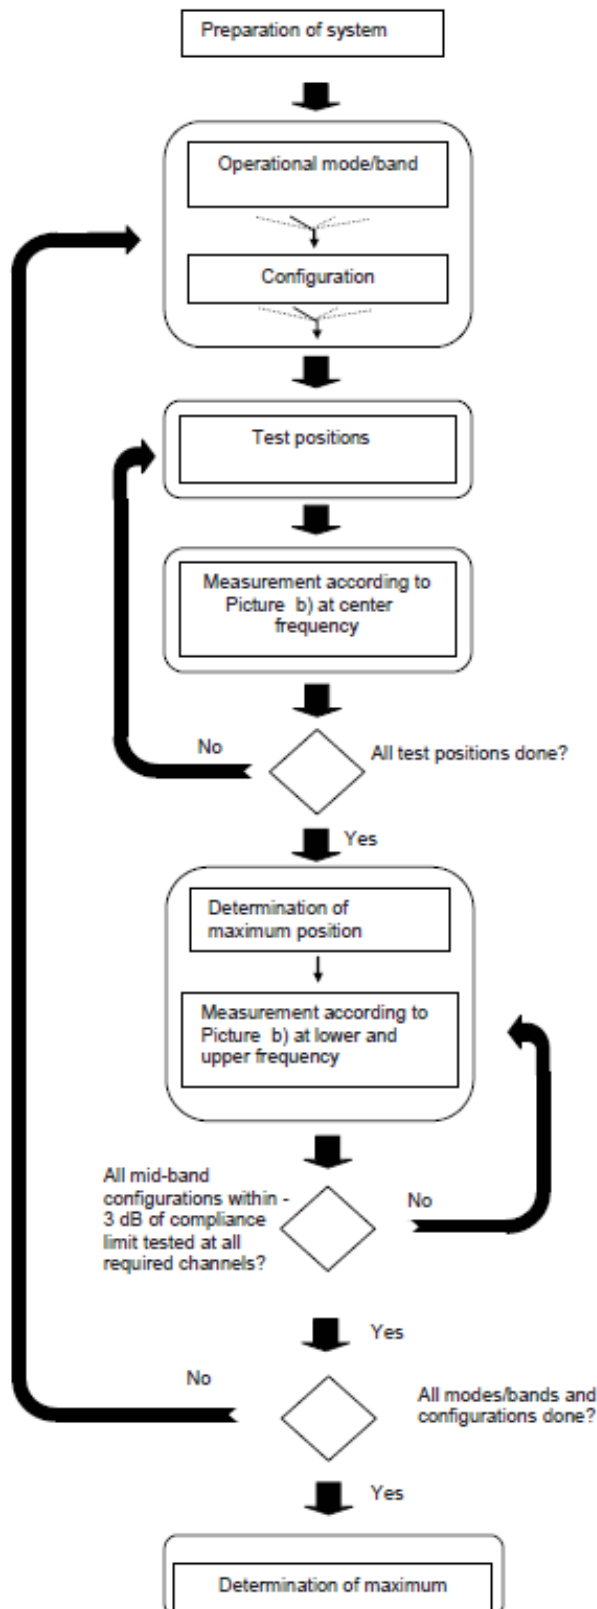

Picture a – Tests to be performed

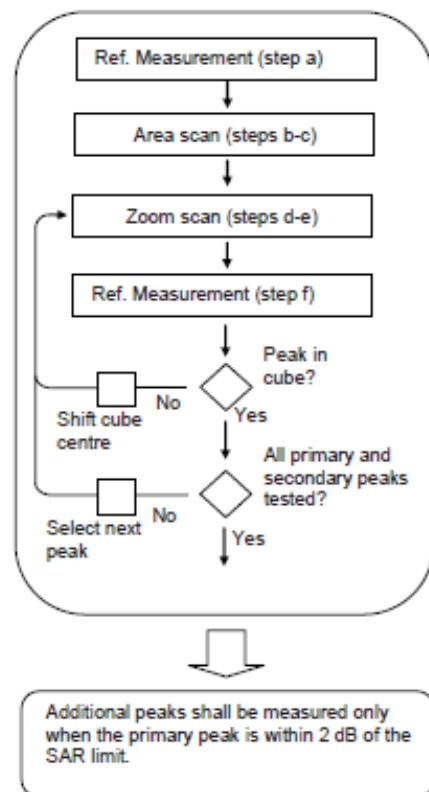

Picture b – General procedure

Picture 9.1Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.5	1.5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	1.5	1.5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	1.5	1.5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	1.5	1.5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.5	1.5	21	81

Rel.8 DC-HSDPA (Cat 24)

SAR test exclusion for Rel.8 DC-HSDPA must satisfy the SAR test exclusion requirements of Rel.5 HSDPA. SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion.

9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Schwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

TDD test:

TDD testing is performed using guidance from FCC KDB 941225 D05 v02r05 and the SAR test guidance provided in April 2013 TCB works hop notes. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05 v02r05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211.

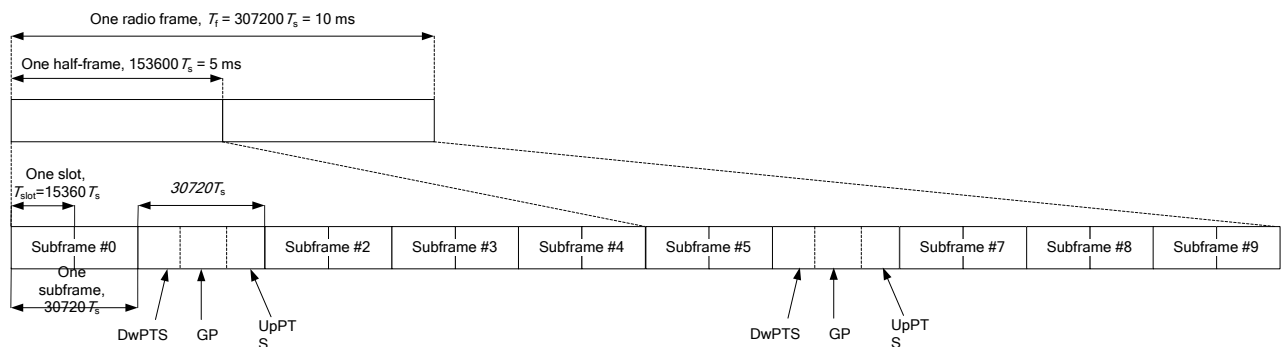


Figure 9.2: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 9.1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 9.2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Duty factor is calculated by:

Duty factor = uplink frame*6+UpPTS*2/one frame length

$$= (30720 \cdot T_s * 6 + 5120 \cdot T_s * 2) / 307200 \cdot T_s$$

$$= 0.633$$

According to the KDB 447498 D01, SAR should be evaluated at more than 3 frequencies for devices supporting transmit bands wider than 100MHz. Oct.2014 FCC-TCB conference notes (Dec. 2014 rev.) specifies the 5 test channels to use for 3GPP band 41 SAR evaluation.

9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.6 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-gSAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

There are two sets of tune-up power, Normal power and Low power, for WCDMA1900 by proximity sensor. The detail of proximity sensor is presented in annex I.

11.1 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.1-1: The conducted power measurement results for GSM, GPRS and EGPRS

GSM 850 Speech (GMSK)	Measured Power (dBm)			Tune up	calculation	Averaged Power (dBm)		
	251	190	128			251	190	128
1 Txslot	32.95	32.92	32.90	33.5	/	/	/	/
GSM 850 GPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	251	190	128			251	190	128
1 Txslot	33.02	32.97	32.95	33.5	-9.03	23.99	23.94	23.92
2 Txslots	31.82	31.75	31.69	33	-6.02	25.80	25.73	25.67
3Txslots	30.26	30.17	30.06	30.5	-4.26	26.00	25.91	25.80
4 Txslots	28.96	28.88	28.75	29.5	-3.01	25.95	25.87	25.74
GSM 850 EGPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	251	190	128			251	190	128
1 Txslot	32.92	32.91	32.89	33.5	-9.03	23.89	23.88	23.86
2 Txslots	31.71	31.68	31.63	33	-6.02	25.69	25.66	25.61
3Txslots	30.14	30.09	29.99	30.5	-4.26	25.88	25.83	25.73
4 Txslots	28.84	28.79	28.66	29.5	-3.01	25.83	25.78	25.65
GSM 850 EGPRS (8PSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	251	190	128			251	190	128
1 Txslot	26.87	26.76	26.73	27.8	-9.03	17.84	17.73	17.70
2 Txslots	26.23	26.16	26.11	27.8	-6.02	20.21	20.14	20.09
3Txslots	24.37	24.15	24.12	25.5	-4.26	20.11	19.89	19.86
4 Txslots	23.04	22.92	22.96	24.5	-3.01	20.03	19.91	19.95
PCS1900 Speech (GMSK)	Measured Power (dBm)			Tune up	calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	30.18	30.04	30.22	31	/	/	/	/
PCS1900 GPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	29.77	29.96	30.13	31	-9.03	20.74	20.93	21.10
2 Txslots	26.75	27.18	27.38	27.5	-6.02	20.73	21.16	21.36
3Txslots	25.59	26.04	26.16	26.5	-4.26	21.33	21.78	21.90
4 Txslots	24.57	24.86	24.98	25.5	-3.01	21.56	21.85	21.97

PCS1900 EGPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	29.60	29.87	30.07	31	-9.03	20.57	20.84	21.04
2 Txslots	26.53	27.04	27.28	27.5	-6.02	20.51	21.02	21.26
3Txslots	25.38	25.91	26.06	26.5	-4.26	21.12	21.65	21.80
4 Txslots	24.39	24.72	24.88	25.5	-3.01	21.38	21.71	21.87
PCS1900 EGPRS (8PSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	25.94	25.78	25.93	26.5	-9.03	16.91	16.75	16.90
2 Txslots	25.27	25.24	25.49	26	-6.02	19.25	19.22	19.47
3Txslots	23.26	23.20	23.48	24	-4.26	19.00	18.94	19.22
4 Txslots	22.12	22.04	22.21	23	-3.01	19.11	19.03	19.20

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 3Txslots for GSM850 and 4Txslots for GSM1900.

11.2 CDMA Measurement result

Table 11.2-1: The conducted Power for CDMA

Mode	CDMA BC0			
	777 (848.31MHz)	384 (836.52MHz)	1013 (824.7MHz)	Tune up
SO55/RC3	24.43	24.52	24.41	25
SO55/RC1	24.49	24.56	24.47	25
SO32/RC3(FCH only)	24.41	24.51	24.40	25
SO32/RC3(FCH+SCH _n)	24.43	24.50	24.41	25
EVDO Rev.A	24.51	24.60	24.46	25

11.3 WCDMA Measurement result

Table 11.3-1: The conducted Power for WCDMA – Normal power

Item	band	FDDV result			
	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)	Tune up
WCDMA	1	24.29	24.34	24.23	25
HSUPA	1	22.87	22.91	22.98	23
	2	22.81	22.97	22.57	23
	3	22.98	23.28	23.39	24
	4	23.35	23.37	23.43	24
	5	23.42	23.31	23.35	24
DC-HSDPA	1	22.97	22.91	22.97	24.5
	2	22.96	22.92	22.99	24.5
	3	22.95	22.95	23.01	24.5
	4	22.88	22.89	22.98	24.5
Item	band	FDDII result			
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)	Tune up
WCDMA	1	23.33	23.44	23.34	24
HSUPA	1	22.40	22.34	22.49	23
	2	21.93	21.51	21.83	23
	3	21.70	22.31	21.97	23
	4	21.95	22.49	22.16	23
	5	22.31	22.03	21.85	23
DC-HSDPA	1	22.04	22.11	22.09	23.5
	2	22.06	22.13	22.10	23.5
	3	22.07	22.11	22.16	23.5
	4	22.10	22.09	22.08	23.5

Table 11.3-2: The conducted Power for WCDMA – Low power

Item	band	FDDII result			
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)	Tune up
WCDMA	1	21.28	21.24	21.13	22
HSUPA	1	21.32	21.28	21.16	22.5
	2	21.31	21.27	21.15	22.5
	3	21.29	21.26	21.17	22.5
	4	21.31	21.28	21.18	22.5
	5	21.29	21.26	21.17	22.5
DC-HSDPA	1	19.96	19.89	19.81	20.5
	2	19.95	19.91	19.83	20.5
	3	19.92	19.92	19.79	20.5
	4	19.93	19.90	19.74	20.5

11.4 LTE Measurement result

Table 11.4-1: The conducted Power for LTE

Band 5							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
	RB offset (Start RB)			Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB High (5)	848.3	24	22.93	0	22.24	1
		836.5	24	22.87	0	21.98	1
		824.7	24	22.90	0	21.96	1
	1RB Middle (3)	848.3	24	22.91	0	22.30	1
		836.5	24	22.90	0	22.02	1
		824.7	24	22.89	0	22.04	1
	1RB Low (0)	848.3	24	22.90	0	22.24	1
		836.5	24	22.05	0	21.96	1
		824.7	24	22.34	0	21.98	1
	3RB High (3)	848.3	24	22.84	1	22.09	2
		836.5	24	22.89	1	22.20	2
		824.7	24	22.81	1	21.97	2
	3RB Middle (1)	848.3	24	22.92	1	22.19	2
		836.5	24	22.93	1	22.25	2
		824.7	24	22.86	1	22.01	2
	3RB Low (0)	848.3	24	22.85	1	22.11	2
		836.5	24	22.89	1	22.19	2
		824.7	24	22.79	1	21.95	2
	6RB (0)	848.3	24	21.84	1	20.84	2
		836.5	24	21.80	1	21.07	2
		824.7	24	21.81	1	21.04	2
3 MHz	1RB High (14)	847.5	24	23.01	0	22.33	1
		836.5	24	22.88	0	21.99	1
		825.5	24	22.94	0	21.82	1
	1RB Middle (7)	847.5	24	22.94	0	22.38	1
		836.5	24	22.87	0	22.10	1
		825.5	24	22.89	0	21.94	1
	1RB Low (0)	847.5	24	22.89	0	22.21	1
		836.5	24	22.89	0	22.07	1
		825.5	24	22.93	0	21.81	1
	8RB High (7)	847.5	24	21.95	1	21.07	2
		836.5	24	21.88	1	21.04	2
		825.5	24	21.90	1	21.07	2
	8RB Middle (4)	847.5	24	21.86	1	21.01	2
		836.5	24	21.92	1	21.10	2
		825.5	24	21.93	1	21.10	2
	8RB Low (0)	847.5	24	21.86	1	20.99	2
		836.5	24	21.89	1	21.03	2
		825.5	24	21.88	1	21.11	2

	15RB (0)	847.5	24	21.88	1	20.97	2
		836.5	24	21.93	1	20.98	2
		825.5	24	21.92	1	20.99	2
5 MHz	1RB High (24)	846.5	24	22.88	0	22.07	1
		836.5	24	22.80	0	22.12	1
		826.5	24	22.89	0	22.40	1
	1RB Middle (12)	846.5	24	22.82	0	21.94	1
		836.5	24	22.85	0	22.15	1
		826.5	24	22.85	0	22.45	1
	1RB Low (0)	846.5	24	22.86	0	21.98	1
		836.5	24	22.89	0	22.18	1
		826.5	24	22.90	0	22.43	1
	12RB High (13)	846.5	24	21.86	1	20.98	2
		836.5	24	21.89	1	21.11	2
		826.5	24	21.85	1	21.10	2
	12RB Middle (6)	846.5	24	21.91	1	21.02	2
		836.5	24	21.97	1	21.16	2
		826.5	24	21.93	1	21.16	2
	12RB Low (0)	846.5	24	21.89	1	21.00	2
		836.5	24	21.93	1	21.13	2
		826.5	24	21.92	1	21.08	2
	25RB (0)	846.5	24	21.84	1	20.86	2
		836.5	24	21.95	1	21.10	2
		826.5	24	21.91	1	21.03	2
10 MHz	1RB High (49)	844.0	24	22.90	0	22.27	1
		836.5	24	22.94	0	22.00	1
		829.0	24	22.91	0	21.89	1
	1RB Middle (24)	844.0	24	22.90	0	22.26	1
		836.5	24	22.89	0	22.04	1
		829.0	24	22.89	0	21.84	1
	1RB Low (0)	844.0	24	22.87	0	22.29	1
		836.5	24	22.81	0	21.91	1
		829.0	24	22.89	0	21.84	1
	25RB High (25)	844.0	24	21.84	1	20.94	2
		836.5	24	21.90	1	21.13	2
		829.0	24	21.96	1	21.09	2
	25RB Middle (12)	844.0	24	21.87	1	20.98	2
		836.5	24	21.93	1	21.14	2
		829.0	24	22.01	1	21.11	2
	25RB Low (0)	844.0	24	21.91	1	20.98	2
		836.5	24	21.93	1	21.15	2
		829.0	24	21.86	1	20.99	2
	50RB (0)	844.0	24	21.89	1	20.92	2
		836.5	24	21.95	1	21.06	2
		829.0	24	21.96	1	21.09	2

Band 7							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
	RB offset (Start RB)			Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
5 MHz	1RB High (24)	2567.5	24	22.95	0	22.17	1
		2535	24	22.93	0	22.14	1
		2502.5	24	22.97	0	22.56	1
	1RB Middle (12)	2567.5	24	22.91	0	22.11	1
		2535	24	22.91	0	22.07	1
		2502.5	24	22.89	0	22.51	1
	1RB Low (0)	2567.5	24	22.90	0	22.06	1
		2535	24	22.90	0	22.09	1
		2502.5	24	22.88	0	22.48	1
	12RB High (13)	2567.5	24	21.95	1	21.13	2
		2535	24	21.92	1	21.09	2
		2502.5	24	22.01	1	21.19	2
	12RB Middle (6)	2567.5	24	22.00	1	21.13	2
		2535	24	21.92	1	21.10	2
		2502.5	24	21.99	1	21.24	2
	12RB Low (0)	2567.5	24	21.94	1	21.11	2
		2535	24	21.91	1	21.08	2
		2502.5	24	21.96	1	21.18	2
	25RB (0)	2567.5	24	21.95	1	21.02	2
		2535	24	21.94	1	21.03	2
		2502.5	24	21.99	1	21.13	2
10 MHz	1RB High (49)	2565	24	22.89	0	22.05	1
		2535	24	22.92	0	21.96	1
		2505	24	22.95	0	22.33	1
	1RB Middle (24)	2565	24	22.83	0	22.02	1
		2535	24	22.83	0	21.90	1
		2505	24	22.99	0	22.44	1
	1RB Low (0)	2565	24	22.72	0	21.89	1
		2535	24	22.84	0	21.86	1
		2505	24	22.91	0	22.36	1
	25RB High (25)	2565	24	21.98	1	21.21	2
		2535	24	22.02	1	21.08	2
		2505	24	21.94	1	21.00	2
	25RB Middle (12)	2565	24	22.03	1	21.18	2
		2535	24	21.99	1	21.12	2
		2505	24	21.91	1	21.03	2
	25RB Low (0)	2565	24	21.93	1	21.17	2
		2535	24	21.97	1	21.04	2
		2505	24	22.01	1	21.13	2
	50RB (0)	2565	24	22.01	1	21.13	2
		2535	24	21.99	1	21.03	2
		2505	24	21.93	1	20.99	2

15 MHz	1RB High (74)	2562.5	24	22.92	0	21.99	1
		2535	24	23.00	0	22.42	1
		2507.5	24	23.08	0	22.44	1
	1RB Middle (37)	2562.5	24	22.77	0	21.78	1
		2535	24	22.95	0	22.33	1
		2507.5	24	22.86	0	22.31	1
	1RB Low (0)	2562.5	24	22.92	0	21.92	1
		2535	24	22.94	0	22.34	1
		2507.5	24	22.97	0	22.42	1
	36RB High (38)	2562.5	24	21.96	1	21.04	2
		2535	24	21.94	1	21.12	2
		2507.5	24	21.93	1	20.94	2
	36RB Middle (19)	2562.5	24	21.95	1	21.05	2
		2535	24	21.91	1	21.11	2
		2507.5	24	21.87	1	20.94	2
	36RB Low (0)	2562.5	24	21.94	1	21.04	2
		2535	24	21.89	1	21.09	2
		2507.5	24	21.85	1	20.91	2
	75RB (0)	2562.5	24	21.92	1	21.04	2
		2535	24	21.87	1	21.04	2
		2507.5	24	21.85	1	20.98	2
20 MHz	1RB High (99)	2560	24	22.83	0	22.46	1
		2535	24	22.87	0	22.43	1
		2510	24	22.82	0	22.46	1
	1RB Middle (50)	2560	24	22.68	0	22.32	1
		2535	24	22.77	0	22.38	1
		2510	24	22.78	0	22.40	1
	1RB Low (0)	2560	24	22.82	0	22.41	1
		2535	24	22.80	0	22.35	1
		2510	24	22.86	0	22.53	1
	50RB High (50)	2560	24	22.02	1	21.16	2
		2535	24	22.01	1	21.08	2
		2510	24	21.92	1	20.97	2
	50RB Middle (25)	2560	24	22.03	1	21.10	2
		2535	24	22.02	1	21.08	2
		2510	24	21.91	1	20.99	2
	50RB Low (0)	2560	24	21.96	1	21.01	2
		2535	24	21.95	1	21.01	2
		2510	24	21.89	1	20.99	2
	100RB (0)	2560	24	21.97	1	21.10	2
		2535	24	21.96	1	21.05	2
		2510	24	21.90	1	20.96	2

Band 41							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
	RB offset (Start RB)			Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
5 MHz	1RB High (24)	2655	24	23.22	0	22.62	1
		2615	24	23.34	0	22.55	1
		2575	24	22.82	0	22.39	1
		2535	24	22.91	0	22.61	1
	1RB Middle (12)	2655	24	23.19	0	22.39	1
		2615	24	23.29	0	22.49	1
		2575	24	23.06	0	22.44	1
		2535	24	23.12	0	22.34	1
	1RB Low (0)	2655	24	23.15	0	22.59	1
		2615	24	23.23	0	22.54	1
		2575	24	23.06	0	22.34	1
		2535	24	23.17	0	22.29	1
	12RB High (13)	2655	24	22.17	1	21.32	2
		2615	24	22.13	1	21.26	2
		2575	24	22.05	1	21.08	2
		2535	24	22.06	1	21.20	2
	12RB Middle (6)	2655	24	22.13	1	21.28	2
		2615	24	22.10	1	21.27	2
		2575	24	21.98	1	21.04	2
		2535	24	22.05	1	21.20	2
	12RB Low (0)	2655	24	22.11	1	21.25	2
		2615	24	22.05	1	21.26	2
		2575	24	21.97	1	20.99	2
		2535	24	22.02	1	21.18	2
	25RB (0)	2655	24	22.09	1	21.19	2
		2615	24	22.11	1	21.22	2
		2575	24	21.95	1	21.07	2
		2535	24	22.05	1	21.13	2
10 MHz	1RB High (49)	2652.5	24	23.14	0	22.61	1
		2614.5	24	23.19	0	22.46	1
		2575.5	24	23.05	0	22.59	1
		2537.5	24	23.15	0	22.58	1
	1RB Middle (24)	2652.5	24	23.13	0	22.54	1
		2614.5	24	23.15	0	22.48	1
		2575.5	24	22.97	0	22.50	1
		2537.5	24	23.07	0	22.47	1
	1RB Low (0)	2652.5	24	23.01	0	22.44	1
		2614.5	24	23.11	0	22.45	1
		2575.5	24	23.02	0	22.44	1
		2537.5	24	23.04	0	22.48	1
	25RB High (25)	2652.5	24	22.00	1	21.30	2
		2614.5	24	22.22	1	21.34	2
		2575.5	24	22.09	1	21.14	2
		2537.5	24	21.94	1	21.19	2

	25RB Middle (12)	2652.5	24	22.23	1	21.30	2
		2614.5	24	22.26	1	21.03	2
		2575.5	24	22.06	1	21.13	2
		2537.5	24	22.15	1	21.20	2
	25RB Low (0)	2652.5	24	22.21	1	21.06	2
		2614.5	24	22.18	1	21.02	2
		2575.5	24	21.82	1	21.10	2
		2537.5	24	21.90	1	21.19	2
	50RB (0)	2652.5	24	22.13	1	21.23	2
		2614.5	24	22.11	1	21.23	2
		2575.5	24	22.01	1	21.07	2
		2537.5	24	22.05	1	21.18	2
15 MHz	1RB High (74)	2650	24	23.25	0	22.32	1
		2613	24	23.30	0	22.60	1
		2577	24	23.11	0	22.43	1
		2540	24	23.19	0	22.45	1
	1RB Middle (37)	2650	24	23.13	0	22.47	1
		2613	24	23.24	0	22.55	1
		2577	24	23.03	0	22.41	1
		2540	24	23.16	0	22.28	1
	1RB Low (0)	2650	24	22.85	0	22.44	1
		2613	24	23.18	0	22.59	1
		2577	24	23.02	0	22.49	1
		2540	24	23.15	0	22.48	1
	36RB High (38)	2650	24	22.20	1	21.29	2
		2613	24	22.22	1	21.02	2
		2577	24	21.89	1	21.15	2
		2540	24	21.88	1	21.05	2
	36RB Middle (19)	2650	24	22.17	1	21.33	2
		2613	24	22.19	1	21.25	2
		2577	24	22.07	1	21.00	2
		2540	24	22.07	1	21.26	2
	36RB Low (0)	2650	24	22.08	1	21.18	2
		2613	24	21.90	1	21.27	2
		2577	24	22.00	1	20.91	2
		2540	24	22.10	1	20.99	2
	75RB (0)	2650	24	22.08	1	21.20	2
		2613	24	22.04	1	21.19	2
		2577	24	21.96	1	21.05	2
		2540	24	22.02	1	21.11	2
20 MHz	1RB High (99)	2647.5	24	23.26	0	22.69	1
		2612.5	24	23.05	0	22.62	1
		2577.5	24	22.83	0	22.36	1
		2542.5	24	23.19	0	22.38	1
	1RB Middle (50)	2647.5	24	23.16	0	22.57	1
		2612.5	24	23.39	0	22.64	1
		2577.5	24	23.14	0	22.09	1
		2542.5	24	23.20	0	22.56	1

	1RB Low (0)	2647.5	24	22.86	0	22.32	1
		2612.5	24	23.33	0	22.22	1
		2577.5	24	23.03	0	22.20	1
		2542.5	24	23.15	0	22.50	1
	50RB High (50)	2647.5	24	22.25	1	21.31	2
		2612.5	24	22.23	1	21.34	2
		2577.5	24	22.14	1	21.20	2
		2542.5	24	22.15	1	21.02	2
	50RB Middle (25)	2647.5	24	21.98	1	21.32	2
		2612.5	24	22.23	1	21.06	2
		2577.5	24	21.91	1	21.17	2
		2542.5	24	21.93	1	21.23	2
	50RB Low (0)	2647.5	24	22.06	1	21.00	2
		2612.5	24	21.95	1	21.30	2
		2577.5	24	21.88	1	21.13	2
		2542.5	24	22.08	1	21.19	2
	100RB (0)	2647.5	24	22.14	1	21.20	2
		2612.5	24	22.16	1	21.22	2
		2577.5	24	22.03	1	21.07	2
		2542.5	24	22.07	1	21.10	2

11.5 Wi-Fi and BT Measurement result

The output power of BT is 12.21dBm, the tune up of BT is 14dBm.

The average conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
11	18.56	/	/	/
6	17.80	/	/	/
1	18.68	18.48	18.39	18.26
Tune up	19	19	19	19

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
11	16.56	/	/	/	/	/	/	/
6	16.86	/	/	/	/	/	/	/
1	17.25	17.22	16.73	17.10	16.41	15.63	15.21	14.69
Tune up	18	17.5	17.5	17.5	17	16	15.5	15

802.11n (dBm) - HT20 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
11	16.38	/	/	/	/	/	/	/
6	16.68	/	/	/	/	/	/	/
1	17.01	16.42	16.90	16.48	15.64	15.20	14.73	14.22
Tune up	17.5	17	17	17	16	16	15	15

802.11a (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
36	/	/	/	15.53	/	/	/	/
40	14.97	14.86	15.15	16.41	15.70	14.95	14.99	14.89
44	/	/	/	15.59	/	/	/	/
48	/	/	/	15.65	/	/	/	/
52	/	/	/	16.11	/	/	/	/
56	14.65	14.60	14.53	16.28	15.32	14.52	14.47	14.45
60	/	/	/	15.75	/	/	/	/
64	/	/	/	15.54	/	/	/	/
Tune up	16	16	16	17.5	16	16	15.5	16
100	/	/	/	/	13.99	/	/	/
104	/	/	/	/	14.01	/	/	/
108	/	/	/	/	14.27	/	/	/
112	/	/	/	/	14.56	/	/	/
116	/	/	/	/	14.84	/	/	/
120	/	/	/	/	14.87	/	/	/
124	/	/	/	/	14.98	/	/	/
128	/	/	/	/	14.87	/	/	/
132	/	/	/	/	14.81	/	/	/
136	/	/	/	/	14.88	/	/	/
140	/	/	/	/	15.05	/	/	/
144	14.48	14.44	14.51	14.38	15.12	14.57	14.58	14.45
Tune up	15	15	15	15.5	15.5	15.5	16	15
149	15.34	/	/	/	/	/	/	/
153	15.79	/	/	/	/	/	/	/
157	16.01	/	/	/	/	/	/	/
161	16.18	/	/	/	/	/	/	/
165	16.33	16.29	16.28	16.20	16.04	15.89	15.44	14.90
Tune up	17	17	17	17	16.5	16.5	16	15.5


12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances

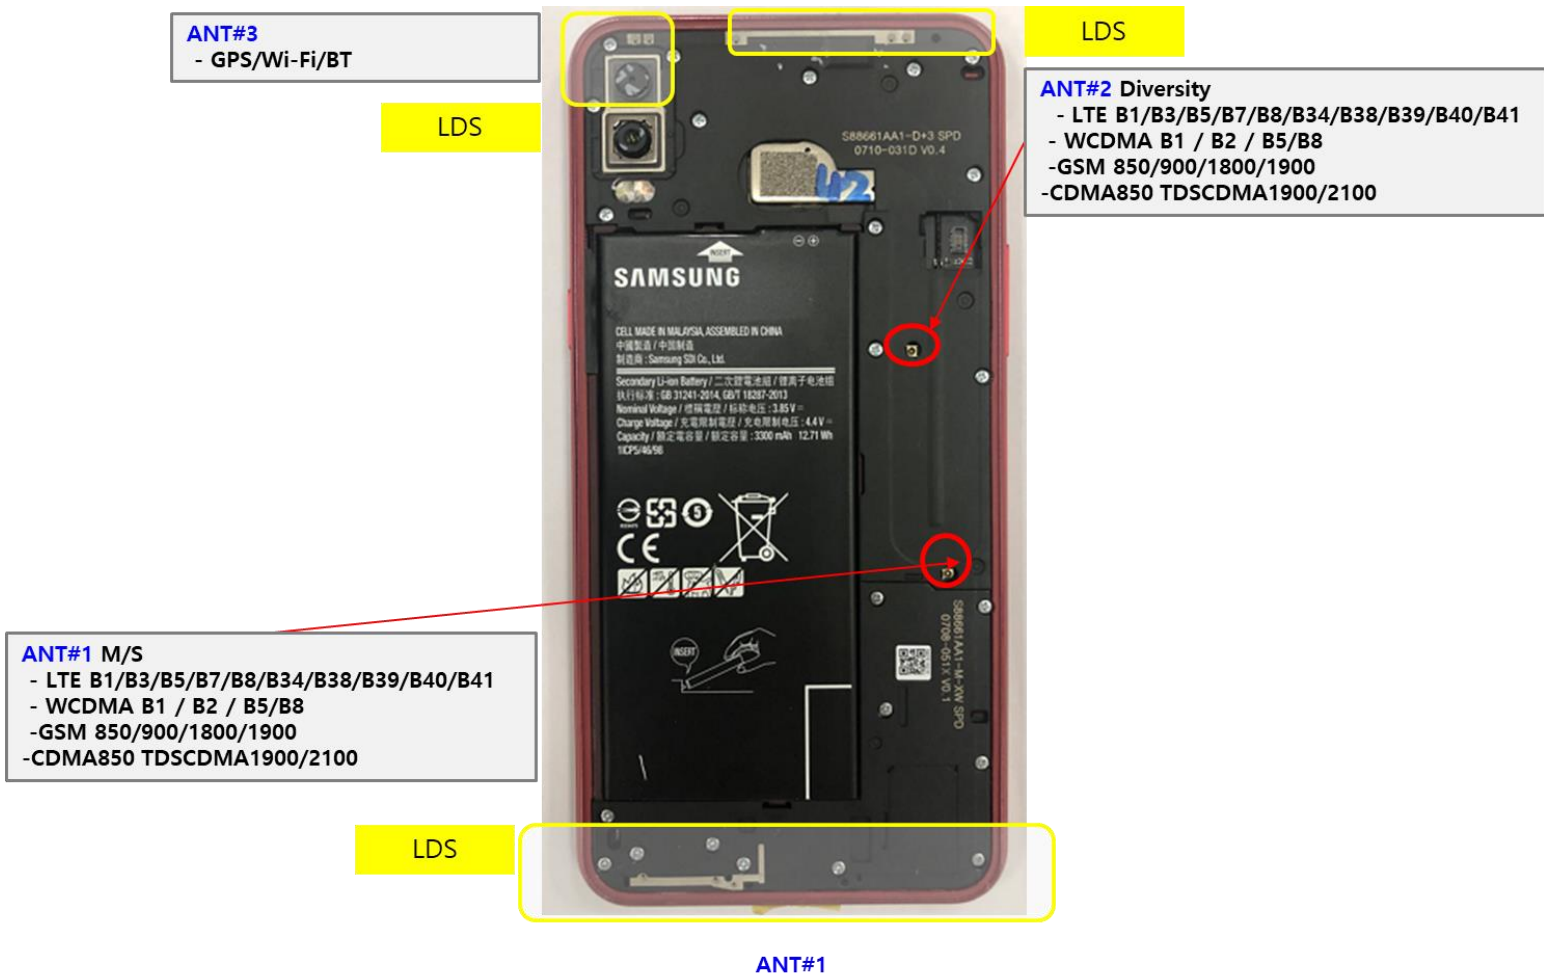

Picture 12.1 Antenna Locations

12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	No	Yes	Yes	No

12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR, where}$$

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	Position	SAR test exclusion threshold(mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Head	9.60	14	25.12	No
		Body	19.20	14	25.12	No
2.4GHz WLAN	2.45	Head	9.58	19	79.43	No
		Body	19.17	19	79.43	No
5GHz WLAN	5.25	Head	6.55	17.5	56.23	No
		Body	13.09	17.5	56.23	No
	5.6	Head	6.34	17.5	56.23	No
		Body	12.68	17.5	56.23	No
	5.75	Head	6.26	17.5	56.23	No
		Body	12.51	17.5	56.23	No

Note: The SAR results of BT is too low to be measured, we use “< 0.01” to indicate the value.

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WiFi 2.4G

	Position	Band	Main antenna	WLAN	Sum	Distance (mm)	Ratio
Maximum reported SAR value for Head	Left hand, Touch cheek	GSM 850	0.24	1.47	1.71	71.59	0.03
	Left hand, Tilt 15°	GSM 850 CDMA BC0	0.06	1.54	1.60	/	/
Maximum reported SAR value for Body	Rear	LTE B7	0.76	0.13	0.89	/	/
	Bottom	WCDMA 1900	1.37	/	1.37	/	/

Table 13.2: The sum of reported SAR values for main antenna and WiFi 5G

	Position	Main antenna	WLAN	Sum
Maximum reported SAR value for Head	Left hand, Touch cheek	0.24	0.90	1.14
	Left hand, Tilt 15°	0.06	1.40	1.46
Maximum reported SAR value for Body	Rear	0.76	0.02	0.78
	Bottom	1.37	/	1.37

According to the KDB 447498 D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The ratio is determined by $(SAR_1 + SAR_2)^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

Maxima and position w.r.t. Grid Reference Point associated 1g averages	
Zoom Scan (D:\2018\I18Z61508(FCC)\GSM850 Head 15a .da53:0\Cheek H)	
Max. 1 at (48.80, -36.00, -1.47) mm	0.22 W/kg
Zoom Scan (D:\2018\I18Z61508(FCC)\WiFi2.4G Head 15a .da53:5\Cheek Ch6 1M 17.5dB)	
Max. 2 at (9.76, 24.00, -0.13) mm	1.10 W/kg
Distances and Separation Ratios	
Max. 1 - Max. 2	Distance [mm]: 71.59 / Separation ratio [W/kg/mm]: 0.02

Picture 13.1 Distance evaluation for GSM850 and WiFi 2.4G

Table 13.3: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT	Sum
Maximum reported SAR value for Head	Left hand, Touch cheek	0.24	<0.01 ^[1]	0.24
Maximum reported SAR value for Body	Rear	0.76	<0.01 ^[1]	0.76
	Bottom	1.37	/	1.37

[1] - The SAR results of BT is too low to be measured, we use "< 0.01" to indicate the value.

Conclusion:

According to the above tables, the sum of reported SAR values is > 1.6W/kg, but the SAR to peak location separation ratio < 0.04. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.
The distance is 10 mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or more than 1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

Table 14.1: Duty Cycle

Mode	Duty Cycle
Speech for GSM850	1:2.67
Speech for GSM1900	1:2
GPRS&EGPRS for GSM850	1:2.67
GPRS&EGPRS for GSM1900	1:2
CDMA&WCDMA<E FDD	1:1
LTE TDD	1:1.58

14.1 SAR results for Fast SAR

Table 14.1-1: SAR Values (GSM 850 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
251	848.8	Left	Touch	Fig.1	30.26	30.5	0.086	0.09	0.223	0.24	0.05
190	836.6	Left	Touch	/	30.17	30.5	0.070	0.08	0.179	0.19	0.02
128	824.2	Left	Touch	/	30.06	30.5	0.056	0.06	0.154	0.17	-0.02
190	836.6	Left	Tilt	/	30.17	30.5	0.043	0.05	0.056	0.06	-0.07
190	836.6	Right	Touch	/	30.17	30.5	0.056	0.06	0.137	0.15	-0.02
190	836.6	Right	Tilt	/	30.17	30.5	0.036	0.04	0.045	0.05	-0.13
251	848.8	Left	Touch	SIM2	30.26	30.5	0.073	0.08	0.207	0.22	0.07

Note: the head SAR of GSM850 is tested with GPRS (3Txslots) mode because of VoIP.

Table 14.1-2: SAR Values (GSM 850 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode (number of timeslots)	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
190	836.6	GPRS (3)	Front	/	30.17	30.5	0.110	0.12	0.160	0.17	0.04
251	848.8	GPRS (3)	Rear	Fig.2	30.26	30.5	0.231	0.24	0.381	0.40	-0.02
190	836.6	GPRS (3)	Rear	/	30.17	30.5	0.179	0.19	0.294	0.32	0.04
128	824.2	GPRS (3)	Rear	/	30.06	30.5	0.128	0.14	0.213	0.24	-0.03
190	836.6	GPRS (3)	Left	/	30.17	30.5	0.132	0.14	0.194	0.21	0.08
190	836.6	GPRS (3)	Right	/	30.17	30.5	0.047	0.05	0.071	0.08	0.11
190	836.6	GPRS (3)	Bottom	/	30.17	30.5	0.102	0.11	0.209	0.23	0.15
251	848.8	EGPRS (3)	Rear	/	30.14	30.5	0.209	0.23	0.365	0.40	-0.03
251	848.8	GPRS (3)	Rear	SIM2	30.26	30.5	0.228	0.24	0.373	0.39	-0.01

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.1-3: SAR Values (GSM 1900 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
661	1880	Left	Touch	/	24.86	25.5	0.038	0.04	0.061	0.07	0.05
661	1880	Left	Tilt	/	24.86	25.5	0.019	0.02	0.032	0.04	0.03
810	1909.8	Right	Touch	/	24.57	25.5	0.041	0.05	0.063	0.08	0.02
661	1880	Right	Touch	/	24.86	25.5	0.049	0.06	0.070	0.08	-0.07
512	1850.2	Right	Touch	Fig.3	24.98	25.5	0.061	0.07	0.094	0.11	0.09
661	1880	Right	Tilt	/	24.86	25.5	0.030	0.03	0.051	0.06	0.03
512	1850.2	Right	Touch	SIM2	24.98	25.5	0.052	0.06	0.085	0.10	-0.08

Note: the head SAR of GSM1900 is tested with GPRS (4Txslots) mode because of VoIP.

Table 14.1-4: SAR Values (GSM 1900 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode (number of timeslots)	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
661	1880	GPRS (4)	Front	/	24.86	25.5	0.302	0.35	0.521	0.60	0.03
661	1880	GPRS (4)	Rear	/	24.86	25.5	0.305	0.35	0.527	0.61	-0.01
661	1880	GPRS (4)	Left	/	24.86	25.5	0.043	0.05	0.088	0.10	0.07
661	1880	GPRS (4)	Right	/	24.86	25.5	0.068	0.08	0.105	0.12	0.03
810	1909.8	GPRS (4)	Bottom	/	24.57	25.5	0.439	0.54	0.804	1.00	-0.01
661	1880	GPRS (4)	Bottom	/	24.86	25.5	0.574	0.67	1.08	1.25	-0.06
512	1850.2	GPRS (4)	Bottom	Fig.4	24.98	25.5	0.616	0.69	1.16	1.31	-0.01
512	1850.2	EGPRS (4)	Bottom	/	24.88	25.5	0.601	0.69	1.05	1.21	-0.03
512	1850.2	GPRS (4)	Bottom	SIM2	24.98	25.5	0.609	0.69	1.12	1.26	-0.04
512	1850.2	GPRS (4)	Bottom	Note2	24.98	25.5	0.075	0.08	0.146	0.16	-0.08
512	1850.2	GPRS (4)	Bottom	Note3	24.98	25.5	0.918	1.03	2.30	2.59	-0.03

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The distance between the EUT and the phantom bottom is 18mm for Headset because the headset plug is at the bottom of the phone.

Note3: The distance between the EUT and the phantom bottom is 0mm Base on the Principle of adding Test for Phablet.

Table 14.1-5: SAR Values (WCDMA 850 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
4233	846.6	Left	Touch	Fig.5	24.29	25	0.072	0.08	0.090	0.11	0.06
4182	836.4	Left	Touch	/	24.34	25	0.068	0.08	0.085	0.10	0.04
4132	826.4	Left	Touch	/	24.23	25	0.051	0.06	0.072	0.09	0.18
4182	836.4	Left	Tilt	/	24.34	25	0.036	0.04	0.046	0.05	0.12
4182	836.4	Right	Touch	/	24.34	25	0.047	0.05	0.068	0.08	0.03
4182	836.4	Right	Tilt	/	24.34	25	0.030	0.03	0.043	0.05	0.10
4233	846.6	Left	Touch	SIM2	24.29	25	0.063	0.07	0.081	0.10	0.05

Table 14.1-6: SAR Values (WCDMA 850 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
4182	836.4	Front	/	24.34	25	0.083	0.10	0.132	0.15	-0.02
4233	846.6	Rear	Fig.6	24.29	25	0.125	0.15	0.207	0.24	0.06
4182	836.4	Rear	/	24.34	25	0.105	0.12	0.174	0.20	0.18
4132	826.4	Rear	/	24.23	25	0.095	0.11	0.157	0.19	0.01
4182	836.4	Left	/	24.34	25	0.049	0.06	0.074	0.09	0.18
4182	836.4	Right	/	24.34	25	0.023	0.03	0.036	0.04	0.03
4182	836.4	Bottom	/	24.34	25	0.060	0.07	0.124	0.14	-0.01
4233	846.6	Rear	SIM2	24.29	25	0.108	0.13	0.192	0.23	0.03

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.1-7: SAR Values (WCDMA 1900 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
9400	1880	Left	Touch	/	23.44	24	0.062	0.07	0.088	0.10	-0.09
9400	1880	Left	Tilt	/	23.44	24	0.029	0.03	0.043	0.05	0.14
9538	1907.6	Right	Touch	/	23.33	24	0.080	0.09	0.120	0.14	-0.13
9400	1880	Right	Touch	/	23.44	24	0.090	0.10	0.135	0.15	0.05
9262	1852.4	Right	Touch	Fig.7	23.34	24	0.094	0.11	0.143	0.17	0.04
9400	1880	Right	Tilt	/	23.44	24	0.034	0.04	0.056	0.06	-0.11
9262	1852.4	Right	Touch	SIM2	23.34	24	0.077	0.09	0.129	0.15	0.13

Table 14.1-8: SAR Values (WCDMA 1900 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
9400	1880	Front	/	21.24	22	0.313	0.37	0.555	0.66	0.09
9400	1880	Rear	/	21.24	22	0.295	0.35	0.539	0.64	-0.03
9400	1880	Left	/	23.44	24	0.027	0.03	0.039	0.04	0.08
9400	1880	Right	/	23.44	24	0.128	0.15	0.210	0.24	0.02
9538	1907.6	Bottom	/	21.28	22	0.506	0.60	0.928	1.10	0.18
9400	1880	Bottom	/	21.24	22	0.556	0.66	1.06	1.26	0.02
9262	1852.4	Bottom	Fig.8	21.13	22	0.605	0.74	1.12	1.37	-0.04
9400	1880	Front	Note2	23.44	24	0.261	0.30	0.436	0.50	0.19
9400	1880	Rear	Note2	23.44	24	0.282	0.32	0.471	0.54	-0.03
9538	1907.6	Bottom	Note2	23.33	24	0.593	0.69	1.05	1.23	-0.03
9400	1880	Bottom	Note2	23.44	24	0.520	0.59	0.909	1.03	0.07
9262	1852.4	Bottom	Note2	23.34	24	0.613	0.71	1.08	1.26	-0.05
9262	1852.4	Bottom	SIM2	21.13	22	0.600	0.73	1.06	1.30	-0.01
9262	1852.4	Bottom	Note3	21.13	22	0.042	0.05	0.073	0.09	0.08
9538	1907.6	Bottom	Note4	21.13	22	1.72	2.10	4.25	5.19	-0.04
9400	1880	Bottom	Note4	21.13	22	1.75	2.14	4.40	5.38	-0.02
9262	1852.4	Bottom	Note4	21.13	22	1.79	2.19	4.51	5.51	-0.09

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The distance between the EUT and the phantom bottom is 14mm Base on the Principle of adding Test for sensor.

Note3: The distance between the EUT and the phantom bottom is 18mm for Headset because the headset plug is at the bottom of the phone.

Note4: The distance between the EUT and the phantom bottom is 0mm Base on the Principle of adding Test for Phablet.

Table 14.1-9: SAR Values (CDMA BC0 MHz Band - Head)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
777	848.31	Left	Touch	Fig.9	24.43	25	0.084	0.10	0.106	0.12	0.08
384	836.52	Left	Touch	/	24.52	25	0.069	0.08	0.088	0.10	-0.05
1013	824.7	Left	Touch	/	24.41	25	0.059	0.07	0.086	0.10	0.08
384	836.52	Left	Tilt	/	24.52	25	0.042	0.05	0.057	0.06	-0.07
384	836.52	Right	Touch	/	24.52	25	0.044	0.05	0.052	0.06	-0.01
384	836.52	Right	Tilt	/	24.52	25	0.022	0.02	0.036	0.04	-0.13
777	848.31	Left	Touch	SIM2	24.43	25	0.072	0.08	0.093	0.11	0.12

Table 14.1-10: SAR Values (CDMA BC0 MHz Band - Body)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
384	836.52	Front	/	24.51	25	0.103	0.12	0.166	0.19	0.05
777	848.31	Rear	Fig.10	24.41	25	0.148	0.17	0.247	0.28	-0.07
384	836.52	Rear	/	24.51	25	0.138	0.15	0.234	0.26	0.09
1013	824.7	Rear	/	24.40	25	0.108	0.12	0.181	0.21	0.13
384	836.52	Left	/	24.51	25	0.101	0.11	0.156	0.17	0.07
384	836.52	Right	/	24.51	25	0.033	0.04	0.052	0.06	0.01
384	836.52	Bottom	/	24.51	25	0.068	0.08	0.145	0.16	0.19
777	848.31	Rear	SIM2	24.41	25	0.130	0.15	0.221	0.25	0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.1-11: SAR Values (LTE Band5 - Head)

Ambient Temperature: 22.9°C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
20525	836.5	1RB_High	Left	Touch	Fig.11	22.94	24	0.054	0.07	0.067	0.09	0.07
20525	836.5	1RB_High	Left	Tilt	/	22.94	24	0.026	0.03	0.040	0.05	0.04
20525	836.5	1RB_High	Right	Touch	/	22.94	24	0.034	0.04	0.040	0.05	-0.02
20525	836.5	1RB_High	Right	Tilt	/	22.94	24	0.016	0.02	0.024	0.03	0.09
20450	829	25RB_Mid	Left	Touch	/	22.01	23	0.044	0.06	0.054	0.07	-0.05
20450	829	25RB_Mid	Left	Tilt	/	22.01	23	0.021	0.03	0.032	0.04	-0.11
20450	829	25RB_Mid	Right	Touch	/	22.01	23	0.019	0.02	0.023	0.03	-0.01
20450	829	25RB_Mid	Right	Tilt	/	22.01	23	0.009	0.01	0.014	0.02	-0.14
20525	836.5	1RB_High	Left	Touch	SIM2	22.94	24	0.045	0.06	0.059	0.08	0.03

Note1: The LTE mode is QPSK_10MHz.

Table 14.1-12: SAR Values (LTE Band5 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
20525	836.5	1RB_High	Front	/	22.94	24	0.088	0.11	0.141	0.18	0.04
20525	836.5	1RB_High	Rear	Fig.12	22.94	24	0.103	0.13	0.174	0.22	0.02
20525	836.5	1RB_High	Left	/	22.94	24	0.073	0.09	0.110	0.14	-0.09
20525	836.5	1RB_High	Right	/	22.94	24	0.031	0.04	0.047	0.06	0.11
20525	836.5	1RB_High	Bottom	/	22.94	24	0.050	0.06	0.095	0.12	0.17
20450	829	25RB_Mid	Front	/	22.01	23	0.064	0.08	0.102	0.13	-0.02
20450	829	25RB_Mid	Rear	/	22.01	23	0.076	0.10	0.126	0.16	0.08
20450	829	25RB_Mid	Left	/	22.01	23	0.023	0.03	0.034	0.04	-0.04
20450	829	25RB_Mid	Right	/	22.01	23	0.025	0.03	0.037	0.05	0.07
20450	829	25RB_Mid	Bottom	/	22.01	23	0.035	0.04	0.071	0.09	0.13
20525	836.5	1RB_High	Rear	SIM2	22.94	24	0.098	0.13	0.165	0.21	-0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_10MHz.

Table 14.1-13: SAR Values (LTE Band7 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
21100	2535	1RB_High	Left	Touch	Fig.13	22.87	24	0.026	0.03	0.050	0.06	0.03
21100	2535	1RB_High	Left	Tilt	/	22.87	24	0.016	0.02	0.032	0.04	0.11
21100	2535	1RB_High	Right	Touch	/	22.87	24	0.018	0.02	0.041	0.05	0.09
21100	2535	1RB_High	Right	Tilt	/	22.87	24	0.014	0.02	0.026	0.03	0.16
21350	2560	50RB_Mid	Left	Touch	/	22.03	23	0.023	0.03	0.043	0.05	0.07
21350	2560	50RB_Mid	Left	Tilt	/	22.03	23	0.015	0.02	0.028	0.03	0.18
21350	2560	50RB_Mid	Right	Touch	/	22.03	23	0.017	0.02	0.035	0.04	0.07
21350	2560	50RB_Mid	Right	Tilt	/	22.03	23	0.016	0.02	0.027	0.03	0.16
21100	2535	1RB_High	Left	Touch	SIM2	22.87	24	0.024	0.03	0.040	0.05	0.09

Note1: The LTE mode is QPSK_20MHz.

Table 14.1-14: SAR Values (LTE Band7 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conduc ted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
21100	2535	1RB_High	Front	/	22.87	24	0.218	0.28	0.442	0.57	0.10
21100	2535	1RB_High	Rear	/	22.87	24	0.338	0.44	0.587	0.76	0.03
21100	2535	1RB_High	Left	/	22.87	24	0.059	0.08	0.124	0.16	0.15
21100	2535	1RB_High	Right	/	22.87	24	0.059	0.08	0.103	0.13	0.08
21350	2560	1RB_High	Bottom	/	22.83	24	0.420	0.55	0.820	1.07	0.02
21100	2535	1RB_High	Bottom	Fig.14	22.87	24	0.436	0.57	0.844	1.09	0.09
20850	2510	1RB_Low	Bottom	/	22.86	24	0.299	0.39	0.583	0.76	0.10
21350	2560	50RB_Mid	Front	/	22.03	23	0.174	0.22	0.301	0.38	-0.05
21350	2560	50RB_Mid	Rear	/	22.03	23	0.276	0.34	0.482	0.60	0.13
21350	2560	50RB_Mid	Left	/	22.03	23	0.046	0.06	0.095	0.12	-0.02
21350	2560	50RB_Mid	Right	/	22.03	23	0.035	0.04	0.062	0.08	0.09
21350	2560	50RB_Mid	Bottom	/	22.03	23	0.382	0.48	0.756	0.94	0.14
21100	2535	50RB_Mid	Bottom	/	22.02	23	0.317	0.40	0.613	0.77	0.07
20850	2510	50RB_High	Bottom	/	21.92	23	0.309	0.40	0.594	0.76	0.02
21350	2560	100RB	Bottom	/	21.97	23	0.357	0.45	0.661	0.84	-0.10
21100	2535	1RB_High	Bottom	SIM2	22.87	24	0.423	0.55	0.763	0.99	0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.1-15: SAR Values (LTE Band41 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
40815	2612.5	1RB_Mid	Left	Touch	/	23.39	24	0.016	0.02	0.021	0.02	-0.05
40815	2612.5	1RB_Mid	Left	Tilt	/	23.39	24	0.008	0.01	0.013	0.01	0.08
40815	2612.5	1RB_Mid	Right	Touch	Fig.15	23.39	24	0.015	0.02	0.027	0.03	0.03
40815	2612.5	1RB_Mid	Right	Tilt	/	23.39	24	0.006	0.01	0.013	0.01	0.07
41165	2647.5	50RB_High	Left	Touch	/	22.25	23	0.011	0.01	0.020	0.02	0.03
41165	2647.5	50RB_High	Left	Tilt	/	22.25	23	0.006	0.01	0.010	0.01	0.05
41165	2647.5	50RB_High	Right	Touch	/	22.25	23	0.009	0.01	0.018	0.02	0.04
41165	2647.5	50RB_High	Right	Tilt	/	22.25	23	0.007	0.01	0.013	0.02	0.03
40815	2612.5	1RB_Mid	Right	Touch	SIM2	23.39	24	0.010	0.01	0.021	0.02	0.06

Note1: The LTE mode is QPSK_20MHz.

Table 14.1-16: SAR Values (LTE Band41 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
40815	2612.5	1RB_Mid	Front	/	23.39	24	0.101	0.12	0.181	0.21	0.03
40815	2612.5	1RB_Mid	Rear	/	23.39	24	0.166	0.19	0.302	0.35	-0.06
40815	2612.5	1RB_Mid	Left	/	23.39	24	0.030	0.03	0.061	0.07	-0.15
40815	2612.5	1RB_Mid	Right	/	23.39	24	0.026	0.03	0.046	0.05	0.09
40815	2612.5	1RB_Mid	Bottom	Fig.16	23.39	24	0.217	0.25	0.429	0.49	-0.19
41165	2647.5	50RB_High	Front	/	22.25	23	0.075	0.09	0.137	0.16	0.01
41165	2647.5	50RB_High	Rear	/	22.25	23	0.131	0.16	0.250	0.30	-0.01
41165	2647.5	50RB_High	Left	/	22.25	23	0.025	0.03	0.049	0.06	-0.05
41165	2647.5	50RB_High	Right	/	22.25	23	0.023	0.03	0.040	0.05	-0.08
41165	2647.5	50RB_High	Bottom	/	22.25	23	0.172	0.20	0.344	0.41	-0.03
40815	2612.5	1RB_Mid	Bottom	SIM2	23.39	24	0.213	0.25	0.419	0.48	0.04

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

14.2 SAR results for Standard procedure

There is zoom scan measurement to be added for the highest measured SAR in each exposure configuration/band.

Table 14.2-1: SAR Values (GSM 850 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
251	848.8	Left	Touch	Fig.1	30.26	30.5	0.086	0.09	0.223	0.24	0.05

Note: the head SAR of GSM850 is tested with GPRS (3Txslots) mode because of VoIP.

Table 14.2-2: SAR Values (GSM 850 MHz Band - Body)

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5°C											
Frequency		Mode (number of timeslots)	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
251	848.8	GPRS (3)	Rear	Fig.2	30.26	30.5	0.231	0.24	0.381	0.40	-0.02

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-3: SAR Values (GSM 1900 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
512	1850.2	Right	Touch	Fig.3	24.98	25.5	0.061	0.07	0.094	0.11	0.09

Note: the head SAR of GSM1900 is tested with GPRS (4Txslots) mode because of VoIP.

Table 14.2-4: SAR Values (GSM 1900 MHz Band - Body)

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5°C											
Frequency		Mode (number of timeslots)	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
512	1850.2	GPRS (4)	Bottom	Fig.4	24.98	25.5	0.616	0.69	1.16	1.31	-0.01

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-5: SAR Values (WCDMA 850 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
4233	846.6	Left	Touch	Fig.5	24.29	25	0.072	0.08	0.090	0.11	0.06

Table 14.2-6: SAR Values (WCDMA 850 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
4233	846.6	Rear	Fig.6	24.29	25	0.125	0.15	0.207	0.24	0.06

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-7: SAR Values (WCDMA 1900 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
9262	1852.4	Right	Touch	Fig.7	23.34	24	0.094	0.11	0.143	0.17	0.04

Table 14.2-8: SAR Values (WCDMA 1900 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
9262	1852.4	Bottom	Fig.8	21.13	22	0.605	0.74	1.12	1.37	-0.04

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-9: SAR Values (CDMA BC0 MHz Band - Head)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
777	848.31	Left	Touch	Fig.9	24.43	25	0.084	0.10	0.106	0.12	0.08

Table 14.2-10: SAR Values (CDMA BC0 MHz Band - Body)

Ambient Temperature: 22.5 °C						Liquid Temperature: 22.0°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
777	848.31	Rear	Fig.10	24.41	25	0.148	0.17	0.247	0.28	-0.07

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-11: SAR Values (LTE Band5 - Head)

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C												
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
20525	836.5	1RB_High	Left	Touch	Fig.11	22.94	24	0.054	0.07	0.067	0.09	0.07

Note1: The LTE mode is QPSK_10MHz.

Table 14.2-12: SAR Values (LTE Band5 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
20525	836.5	1RB_High	Rear	Fig.12	22.94	24	0.103	0.13	0.174	0.22	0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_10MHz.

Table 14.2-13: SAR Values (LTE Band7 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
21100	2535	1RB_High	Left	Touch	Fig.13	22.87	24	0.026	0.03	0.050	0.06	0.03

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-14: SAR Values (LTE Band7 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
21100	2535	1RB_High	Bottom	Fig.14	22.87	24	0.436	0.57	0.844	1.09	0.09

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.2-15: SAR Values (LTE Band41 - Head)

Ambient Temperature: 22.9 °C													Liquid Temperature: 22.5°C			
Frequency		Mode	Side	Test Position	Figure No./ Note	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Powe r Drift (dB)				
Ch.	MHz															
40815	2612.5	1RB_Mid	Right	Touch	Fig.15	23.39	24	0.015	0.02	0.027	0.03	0.03				

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-16: SAR Values (LTE Band41 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
40815	2612.5	1RB_Mid	Bottom	Fig.16	23.39	24	0.217	0.25	0.429	0.49	-0.19

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

14.3 WLAN Evaluation for 2.4G

According to the KDB248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the initial test position procedure.

Head Evaluation

Table 14.3-1: SAR Values (WLAN - Head)– 802.11b (Fast SAR)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
2412	1	Left	Touch	/	18.68	19	0.463	0.50	0.908	0.98	-0.01
2412	1	Left	Tilt	/	18.68	19	0.483	0.52	0.912	0.98	0.04
2412	1	Right	Touch	/	18.68	19	0.260	0.28	0.508	0.55	0.02
2412	1	Right	Tilt	/	18.68	19	0.365	0.39	0.753	0.81	-0.06

As shown above table, the initial test position for head is “Left Tilt”. So the head SAR of WLAN is presented as below:

Table 14.3-2: SAR Values (WLAN - Head)– 802.11b (Full SAR)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
2462	11	Left	Touch	/	18.56	19	0.539	0.60	1.18	1.31	0.16
2437	6	Left	Touch	/	17.80	19	0.506	0.67	1.10	1.45	0.03
2412	1	Left	Touch	/	18.68	19	0.451	0.49	0.921	0.99	-0.01
2462	11	Left	Tilt	/	18.56	19	0.561	0.62	1.31	1.45	-0.09
2437	6	Left	Tilt	Fig.17	17.80	19	0.482	0.64	1.15	1.52	-0.01
2412	1	Left	Tilt	/	18.68	19	0.518	0.56	1.20	1.29	0.04
2412	1	Right	Touch	/	18.68	19	0.267	0.29	0.521	0.56	0.02
2462	11	Right	Tilt	/	18.56	19	0.445	0.49	0.913	1.01	0.01
2412	1	Right	Tilt	/	18.68	19	0.371	0.40	0.774	0.83	-0.06
2437	6	Left	Tilt	SIM2	17.80	19	0.478	0.63	1.11	1.46	0.04

Note1: When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is $\leq$ 0.8 W/kg.

Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is $\leq$ 1.2 W/kg or all required channels are tested.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Table 14.3-3: SAR Values (WLAN - Head) – 802.11b (Scaled Reported SAR)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C			
Frequency		Side	Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
MHz	Ch.						
2437	6	Left	Touch	98.86%	100%	1.45	1.47
2437	6	Left	Tilt	98.86%	100%	1.52	1.54

SAR is not required for OFDM because the 802.11b adjusted SAR $\leq$ 1.2 W/kg.

Body Evaluation

Table 14.3-4: SAR Values (WLAN - Body)– 802.11b (Fast SAR)

Ambient Temperature: 22.9°C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.									
2412	1	Front	/	18.68	19	0.065	0.07	0.114	0.12	0.09
2412	1	Rear	/	18.68	19	0.064	0.07	0.119	0.13	0.10
2412	1	Right	/	18.68	19	0.039	0.04	0.079	0.09	0.05
2412	1	Top	/	18.68	19	0.116	0.12	0.234	0.25	0.03
2412	1	Top	SIM2	18.68	19	0.093	0.10	0.205	0.22	0.11

As shown above table, the initial test position for body is “Top”. So the body SAR of WLAN is presented as below:

Table 14.3-5: SAR Values (WLAN - Body)– 802.11b (Full SAR)

Ambient Temperature: 22.9 °C					Liquid Temperature: 22.5°C					
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.									
2412	1	Top	Fig.18	18.68	19	0.101	0.11	0.184	0.20	0.03

Note1: When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is $\leq$ 0.8 W/kg.


Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is $\leq$ 1.2 W/kg or all required channels are tested.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.


Table 14.3-6: SAR Values (WLAN - Body) – 802.11b (Scaled Reported SAR)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C		
Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
MHz	Ch.					
2412	1	Top	98.86%	100%	0.20	0.20

SAR is not required for OFDM because the 802.11b adjusted SAR $\leq$ 1.2 W/kg.

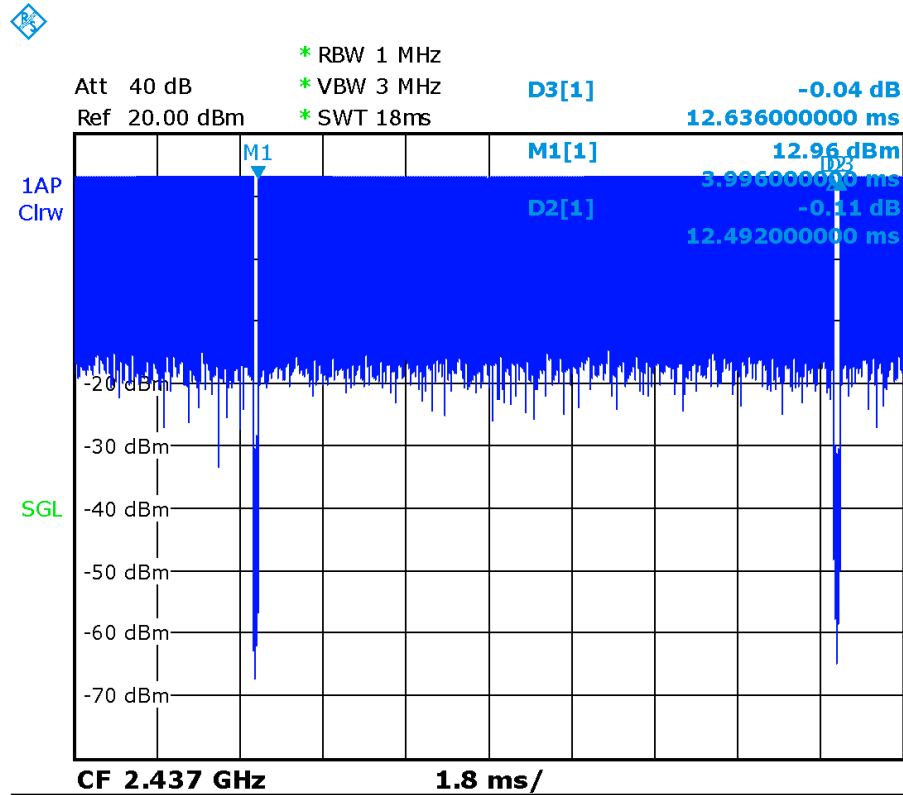

Picture 14.1 Duty factor plot for head

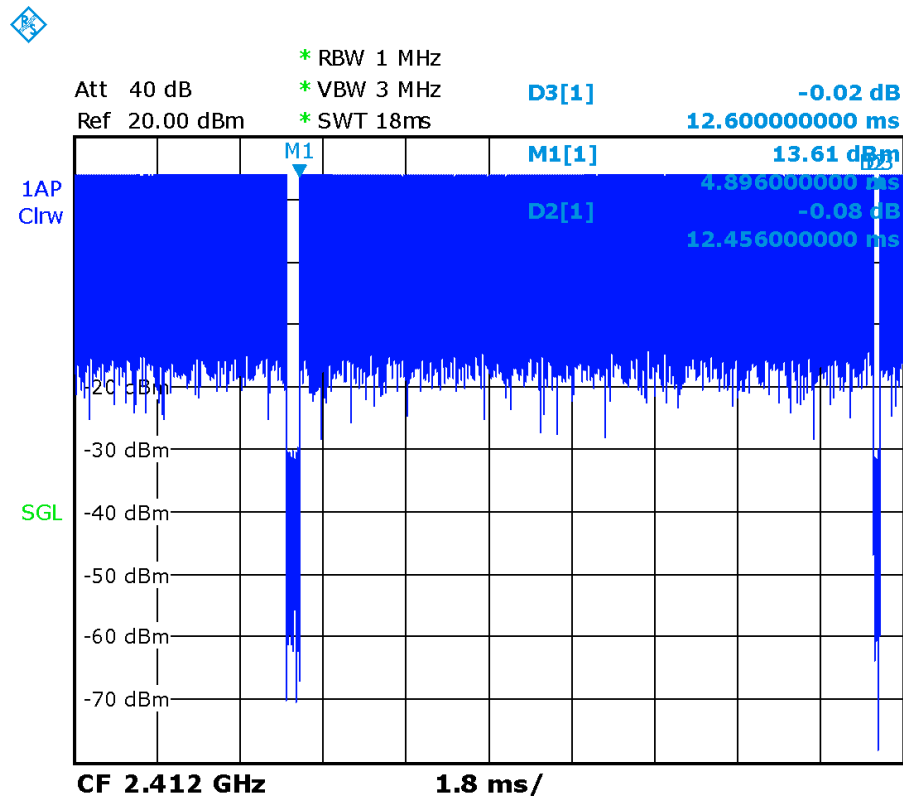

Picture 14.2 Duty factor plot for body

14.4 WLAN Evaluation For 5G

Table 14.4-1: OFDM mode specified maximum output power of WLAN antenna

802.11 mode	a	g	n		ac			
Ch. BW(MHz)	20	20	20	40	20	40	80	160
U-NII-1	X		X	X	X	X	X	
U-NII-2A	X		X	X	X	X	X	
U-NII-2C	X		X	X	X	X	X	
U-NII-3	X		X	X	X	X	X	
§ 15.247 (5.8 GHz)								

X: maximum(conducted) output power(mW), including tolerance, specified for production units

Table 14.4-2: Maximum output power specified of WLAN antenna

802.11 mode	a	g	n		ac			
Ch. BW(MHz)	20	20	20	40	20	40	80	160
U-NII-1	56		50	50	56	50	45	
U-NII-2A	56		50	50	56	50	45	
U-NII-2C	35		35	32	35	32	32	
U-NII-3	50		50	45	50	45	45	
§ 15.247 (5.8 GHz)								

- The maximum output power specified for production units is the same for all channels, modulations and data rates in each channel bandwidth configuration of the 802.11a/g/n/ac modes.
- The **blue highlighted** cells represent highest output configurations in each standalone or aggregated frequency band, with tune-up tolerance included.

Table 14.4-3: Maximum output power measured of WLAN antenna, for the applicable OFDM configurations according to the default power measurement procedures for selection initial test configurations

802.11 mode	a	n		ac		
BW(MHz)	20	20	40	20	40	80
U-NII-1	36/40/44/48 36/44/36/37	36/40/44/48 Lower power	38/46 Lower power	36/40/44/48 Lower power	38/46 Lower power	42 Lower power
U-NII-2A	52/56/60/64 41/42/38/36	52/56/60/64 Lower power	54/62 Lower power	52/56/60/64 Lower power	54/62 Lower power	58 Lower power
U-NII-2C	100/104/108/112 25/25/27/29 116/120/124/128 30/31/31/31 132/136/140/ 144 30/31/32/33	100/104/108/112 116/132/136/140 Lower power	102/110/134 Lower power	100/104/108 /112 116/132/136/ 140 Lower power	102/110/134 Lower power	106 Lower power
U-NII-3	149/153/157/161/ 165 34/38/40/41/43	149/153/157/16 1/165 Lower power	151/159 Lower power	149/153/157 /161/165 Lower power	151/159 Lower power	155 Lower power

- The **bold numbers** is the maximum output measured power (mW).
- Channels with measured maximum power within 0.25dB are considered to have the same measured output. Channels selected for initial test configuration are **highlighted in yellow**.

Table 14.4-4: Reported SAR of initial test configuration for Head

802.11 mode	a	n		ac		
BW(MHz)	20	20	40	20	40	80
U-NII-1	36/40/44/48 0.72	36/40/44/48	38/46	36/40/44/48	38/46	42
U-NII-2A	52/56/60/64 1.28	52/56/60/64	54/62	52/56/60/64	54/62	58
U-NII-2C	100/104/108/112/116/120/124 /128/132/136/140/144 0.60	100/104/108/112 116/132/136/140	102/110/118/ 126/134	100/104/108/112 116/132/136/140	102/110 /134	106
U-NII-3	149/153/157/161/165 0.92	149/153/157/161/ 165	151/159	149/153/157/161 /165	151/159	155
Highest measured output power channel tested initially are in yellow highlight.						

Table 0.4-5: Reported SAR of next highest measured output channel in initial test configuration for head

802.11 mode	a	n		ac		
BW(MHz)	20	20	40	20	40	80
U-NII-1	36/40/44/48 0.72	36/40/44/48	38/46	36/40/44/48	38/46	42
U-NII-2A	52/56/60/64 1.13 / 1.28	52/56/60/64	54/62	52/56/60/64	54/62	58
U-NII-2C	100/104/108/112/116/120/124 /128/132/136/140/144 0.60	100/104/108/112 116/132/136/140	102/110/118/ 126/134	100/104/108/112 116/132/136/140	102/110 /134	106
U-NII-3	149/153/157/161/165 0.97 / 0.92	149/153/157/161/ 165	151/159	149/153/157/161 /165	151/159	155
- The green highlighted channels are next highest measured output channel in the initial test configuration. Highest measured output power channel tested initially are in yellow highlight. - Initial test configuration SAR for U-NII-2A band is > 0.8 W/kg, SAR is required for next highest output channel in initial test configuration. The next highest output channel SAR is ≤ 1.2 W/kg, SAR is not required for subsequent next highest output channel. Similar circumstances apply to U-NII-3 band.						

Table 14.4-6: Reported SAR of initial test configuration for Body

802.11 mode	a	n		ac		
BW(MHz)	20	20	40	20	40	80
U-NII-2A	52/56/60/64 0.14	52/56/60/64	54/62	52/56/60/64	54/62	58
U-NII-2C	100/104/108/112/116/120/124 /128/132/136/140/144 0.10	100/104/108/112 116/132/136/140	102/110/118/ 126/134	100/104/108/112 116/132/136/140	102/110 /134	106
U-NII-3	149/153/157/161/165 0.07	149/153/157/161/ 165	151/159	149/153/157/161 /165	151/159	155
U-NII-1 and U-NII-2A bands have the same specified maximum output and tolerance; SAR is measured for U-NII-2A band first. Adjusted SAR of U-NII-2A band is ≤ 1.2W/kg, SAR is not required for U-NII-1 band. Highest measured output power channel tested initially are in yellow highlight.						

Table 14.4-7: SAR Values (WLAN - Head) – 802.11a

Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
40	5200	Left	Touch	/	16.41	17.5	0.125	0.16	0.338	0.43	0.09
40	5200	Left	Tilt	/	16.41	17.5	0.179	0.23	0.563	0.72	0.10
40	5200	Right	Touch	/	16.41	17.5	0.085	0.11	0.204	0.26	0.07
40	5200	Right	Tilt	/	16.41	17.5	0.113	0.15	0.279	0.36	-0.14
56	5280	Left	Touch	/	16.28	17.5	0.217	0.29	0.618	0.82	-0.01
56	5280	Left	Tilt	Fig.19	16.28	17.5	0.298	0.39	0.968	1.28	0.09
56	5280	Right	Touch	/	16.28	17.5	0.164	0.22	0.422	0.56	-0.10
56	5280	Right	Tilt	/	16.28	17.5	0.204	0.27	0.539	0.71	-0.09
52	5260	Left	Tilt	/	16.11	17.5	0.263	0.36	0.821	1.13	-0.11
144	5720	Left	Touch	/	15.12	15.5	0.116	0.13	0.398	0.43	0.08
144	5720	Left	Tilt	/	15.12	15.5	0.156	0.17	0.547	0.60	0.02
144	5720	Right	Touch	/	15.12	15.5	0.078	0.09	0.217	0.24	-0.09
144	5720	Right	Tilt	/	15.12	15.5	0.091	0.10	0.256	0.28	0.05
165	5825	Left	Touch	/	16.33	17	0.182	0.21	0.597	0.70	-0.01
165	5825	Left	Tilt	/	16.33	17	0.219	0.26	0.790	0.92	0.06
165	5825	Right	Touch	/	16.33	17	0.102	0.12	0.336	0.39	-0.09
165	5825	Right	Tilt	/	16.33	17	0.115	0.13	0.365	0.43	0.08
161	5805	Left	Tilt	/	16.18	17	0.224	0.27	0.803	0.97	0.03
56	5280	Left	Tilt	SIM2	16.28	17.5	0.289	0.38	0.945	1.25	0.06

Table 14.4-8: SAR Values (WLAN - Body) – 802.11a

Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
56	5280	Front	/	16.28	17.5	0.031	0.04	0.076	0.10	0.06
56	5280	Rear	/	16.28	17.5	0.005	0.01	0.018	0.02	0.00
56	5280	Right	/	16.28	17.5	< 0.01	< 0.01	< 0.01	< 0.01	/
56	5280	Top	Fig.20	16.28	17.5	0.046	0.06	0.135	0.14	0.03
144	5720	Front	/	15.12	15.5	0.019	0.02	0.048	0.05	0.10
144	5720	Rear	/	15.12	15.5	0.006	0.01	0.012	0.01	0.08
144	5720	Right	/	15.12	15.5	0.012	0.01	0.052	0.05	0.09
144	5720	Top	/	15.12	15.5	0.040	0.04	0.101	0.10	0.07
165	5825	Front	/	16.33	17	0.007	0.01	0.041	0.04	0.09
165	5825	Rear	/	16.33	17	< 0.01	< 0.01	< 0.01	< 0.01	/
165	5825	Right	/	16.33	17	< 0.01	< 0.01	< 0.01	< 0.01	/
165	5825	Top	/	16.33	17	0.023	0.03	0.066	0.07	0.05
56	5280	Top	SIM2	16.28	17.5	0.041	0.05	0.119	0.12	0.03

Note: The distance between the EUT and the phantom bottom is 10mm.


According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Table 14.4-9: SAR Values (WLAN - Head) – 802.11a (Scaled Reported SAR)

Frequency		Side	Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g) (W/kg)	Scaled reported SAR (1g) (W/kg)
Ch.	MHz						
56	5280	Left	Touch	91.38%	100%	0.82	0.90
56	5280	Left	Tilt	91.38%	100%	1.28	1.40

Table 14.4-10: SAR Values (WLAN - Body) – 802.11a (Scaled Reported SAR)

Frequency		Test Position	D (mm)	Actual duty factor	maximum duty factor	Reported SAR (1g) (W/kg)	Scaled reported SAR (1g) (W/kg)
Ch.	MHz						
56	5280	Rear	10	91.38%	100%	0.02	0.02
56	5280	Top	10	91.38%	100%	0.14	0.15

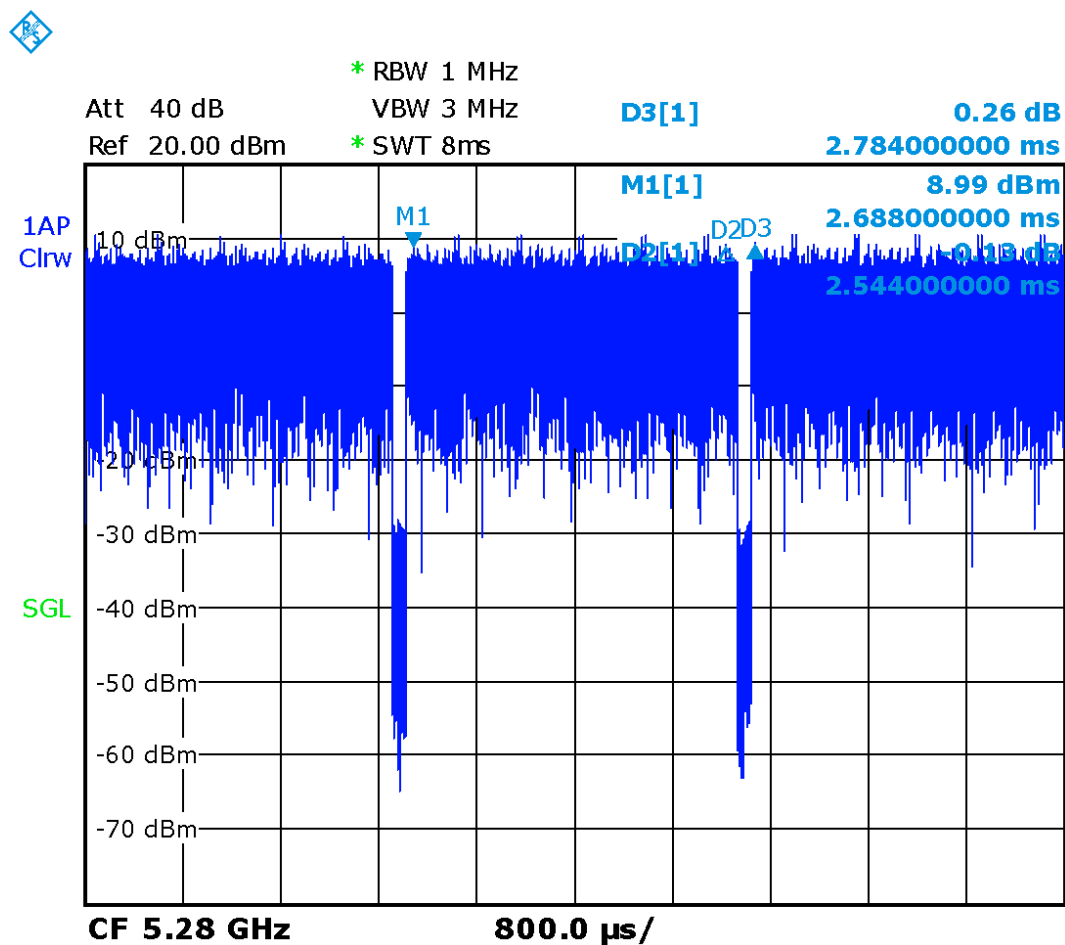

Picture 14.3 The plot of duty factor for channel 56

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Table 15.1: SAR Measurement Variability for Body GSM1900 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
Ch.	MHz						
512	1850.2	Bottom	10	1.16	1.14	1.02	/

Table 15.2: SAR Measurement Variability for Body W1900 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
Ch.	MHz						
9262	1852.4	Bottom	10	1.12	1.11	1.01	/

Table 15.3: SAR Measurement Variability for Body LTE B7 (1g)

Frequency		Mode	Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
Ch.	MHz							
21100	2535	1RB_High	Bottom	10	0.844	0.836	1.01	/

Table 15.4: SAR Measurement Variability for Head WLAN 2.4G (1g)

Frequency		Mode	Side	Test Position	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
Ch.	MHz							
6	2437	802.11b	Left	Tilt	1.15	1.13	1.02	/

Table 15.5: SAR Measurement Variability for Head WLAN 5G (1g)

Frequency		Mode	Side	Test Position	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
Ch.	MHz							
56	5280	802.11a	Left	Tilt	0.968	0.959	1.01	/

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.55	9.43	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$					19.1	18.9	

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞

	(target)									
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.7	10.6	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						21.4	21.1	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RFambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞

19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.4	10.3	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.8	20.6	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder	A	3.4	N	1	1	1	3.4	3.4	5

	uncertainty									
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.5	13.4	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						27.0	26.8	

17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	January 24, 2018	One year
02	Power meter	NRVD	102083	November 01, 2017	One year
03	Power sensor	NRV-Z5	100542		
04	Signal Generator	E4438C	MY49071430	January 2, 2018	One Year
05	Amplifier	60S1G4	0331848	No Calibration Requested	
06	BTS	E5515C	MY50263375	January 23, 2018	One year
07	BTS	CMW500	149646	October 31, 2017	One year
08	E-field Probe	SPEAG EX3DV4	7514	August 27, 2018	One year
09	DAE	SPEAG DAE4	1555	August 20, 2018	One year
10	Dipole Validation Kit	SPEAG D835V2	4d069	July 23, 2018	One year
11	Dipole Validation Kit	SPEAG D1900V2	5d101	July 24, 2018	One year
12	Dipole Validation Kit	SPEAG D2450V2	853	July 24, 2018	One year
13	Dipole Validation Kit	SPEAG D2600V2	1012	July 26, 2018	One year
14	Dipole Validation Kit	SPEAG D5GHZV2	1060	July 19, 2018	One year

END OF REPORT BODY

ANNEX A Graph Results

850 Left Cheek High

Date: 2018-9-15

Electronics: DAE4 Sn1555

Medium: Head 850 MHz

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.922$ mho/m; $\epsilon_r = 41.82$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2.67

Probe: EX3DV4 – SN7514 ConvF(9.09, 9.09, 9.09)

Area Scan (71x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.145 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.561 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.143 W/kg

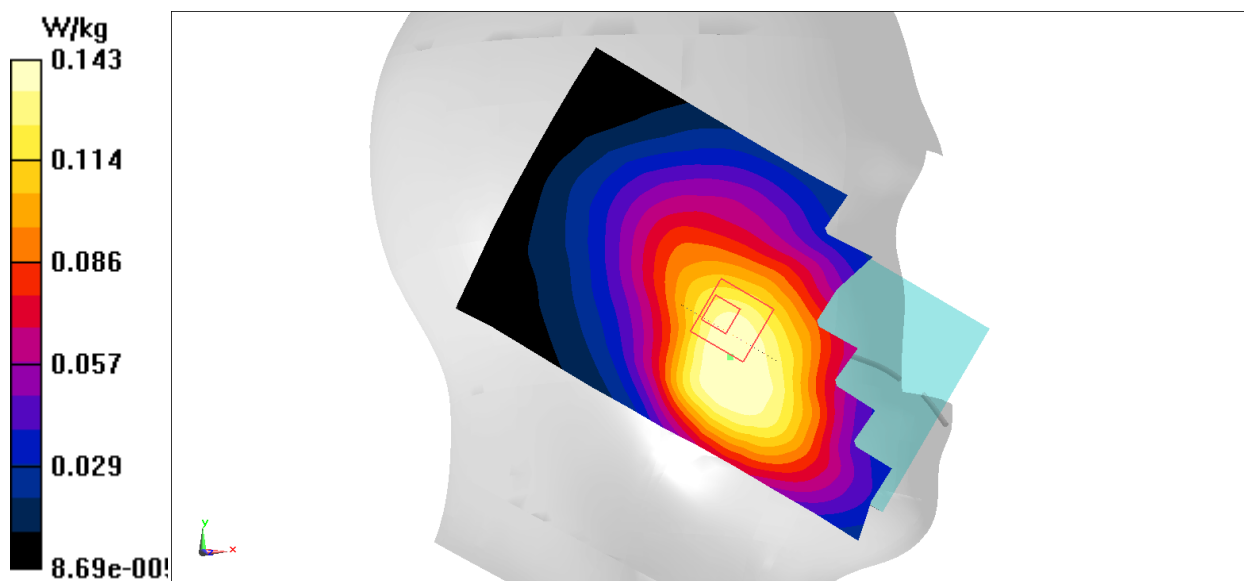


Fig.1 850MHz

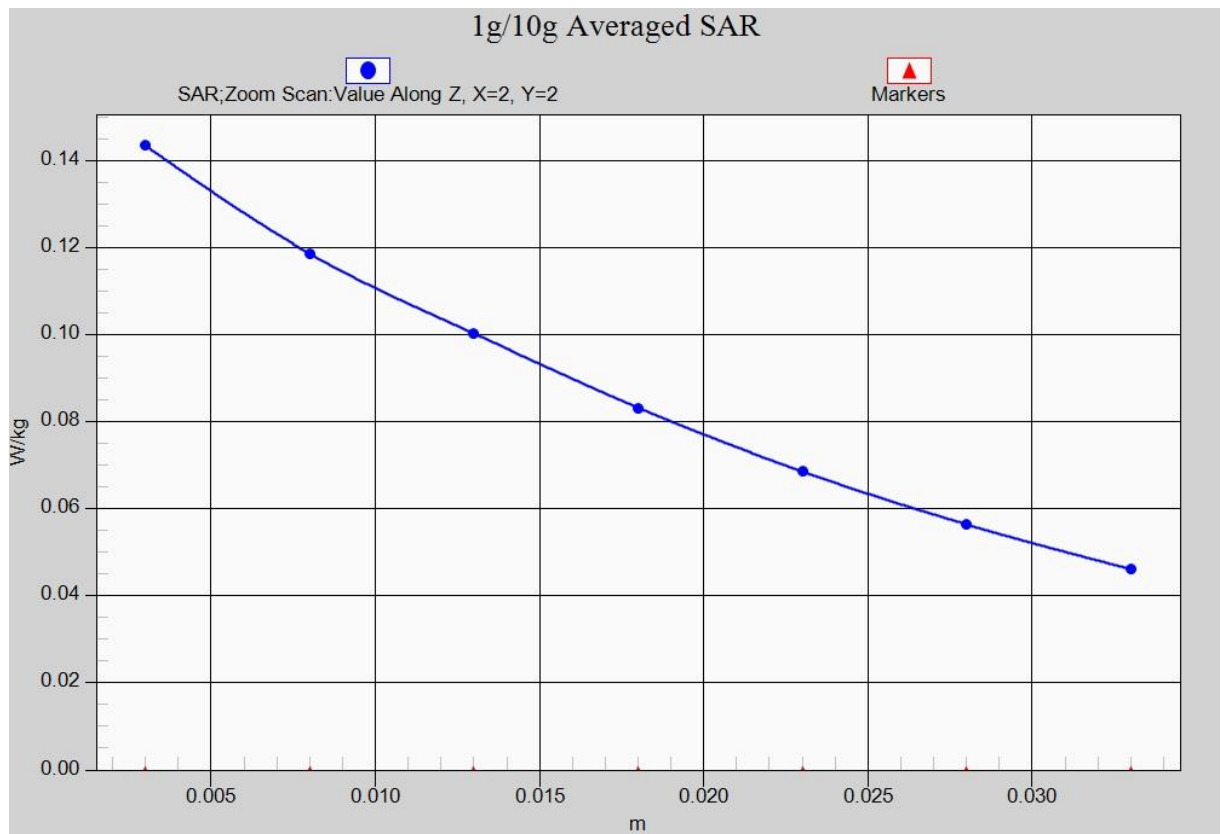


Fig. 1-1 Z-Scan at power reference point (850 MHz)

850 Body Rear High

Date: 2018-9-15

Electronics: DAE4 Sn1555

Medium: Body 850 MHz

Medium parameters used: $f = 848.8$ MHz; $\sigma = 1.001$ mho/m; $\epsilon_r = 55.88$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: GSM 850 GPRS Frequency: 848.8 MHz Duty Cycle: 1:2.67

Probe: EX3DV4 – SN7514 ConvF(9.47, 9.47, 9.47)

Area Scan (131x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.431 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.27 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.617 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.456 W/kg

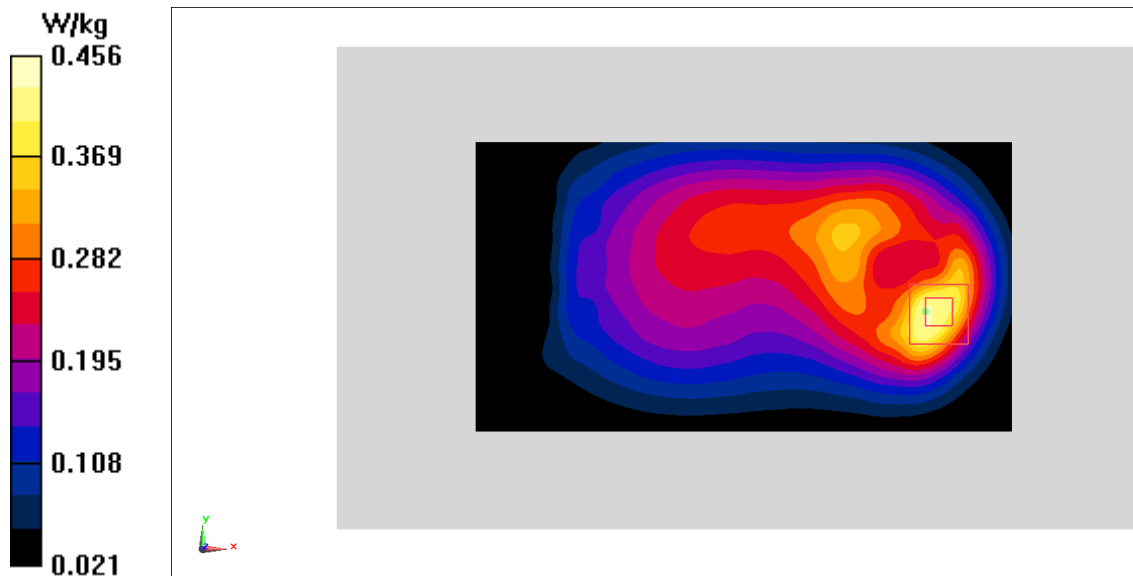


Fig.2 850 MHz

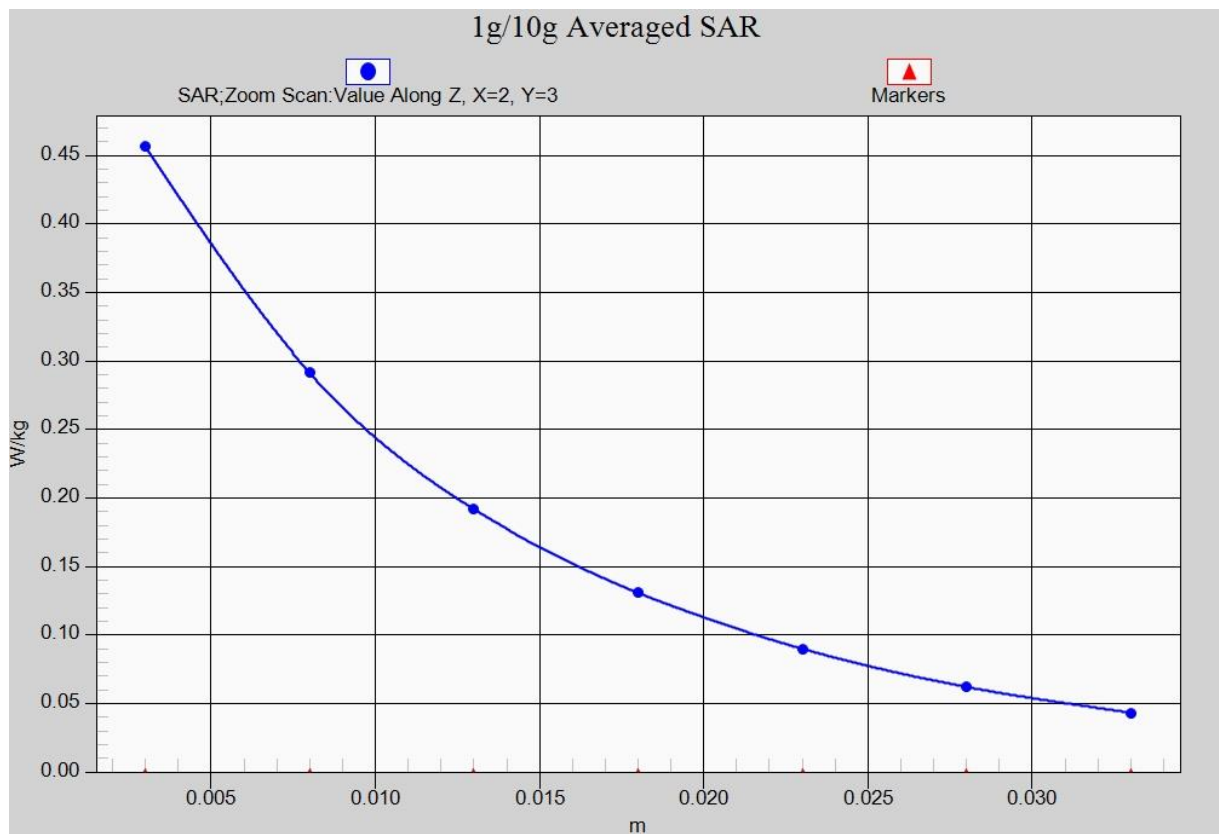


Fig. 2-1 Z-Scan at power reference point (850 MHz)

1900 Right Cheek Low

Date: 2018-9-16

Electronics: DAE4 Sn1555

Medium: Head 1900 MHz

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.409$ mho/m; $\epsilon_r = 40.75$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz Frequency: 1850.2 MHz Duty Cycle: 1:2

Probe: EX3DV4– SN7514 ConvF(7.73, 7.73, 7.73)

Area Scan (71x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.125 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.6930 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.108 W/kg

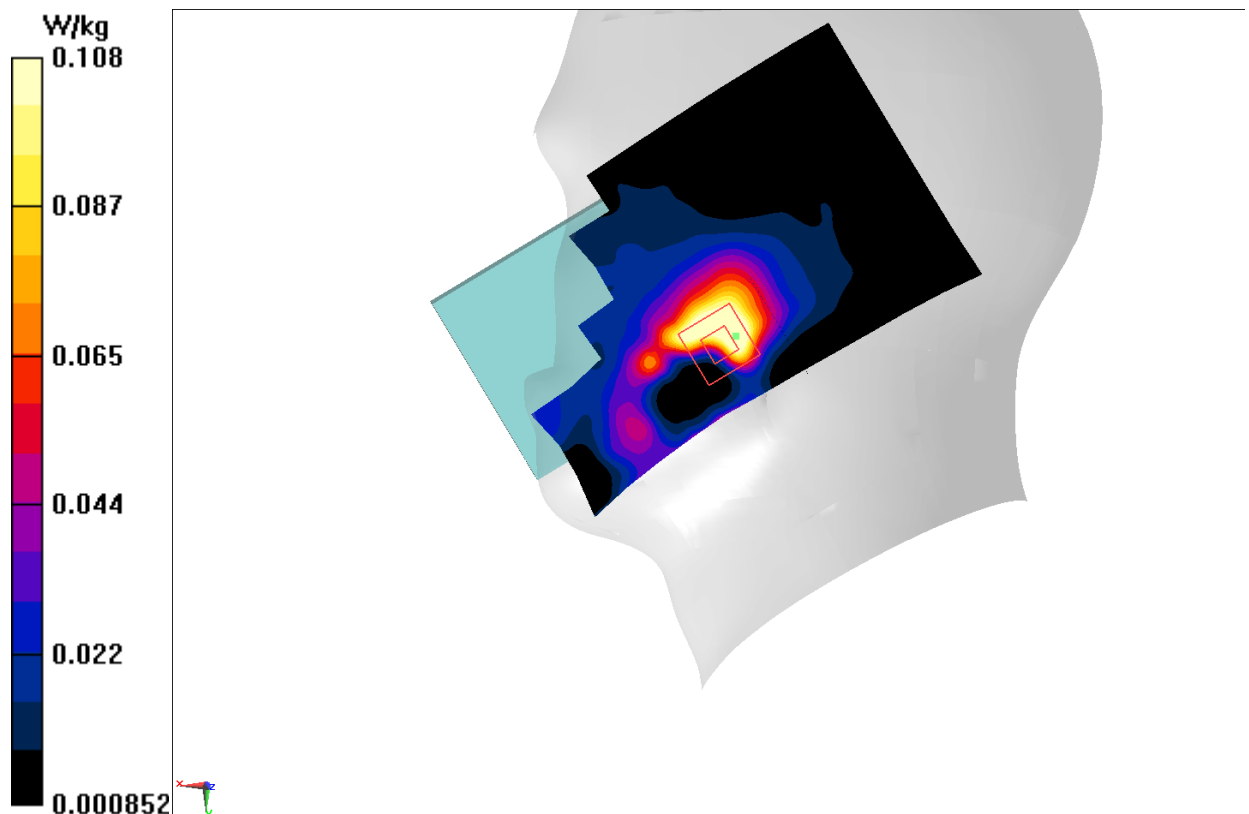


Fig.3 1900 MHz

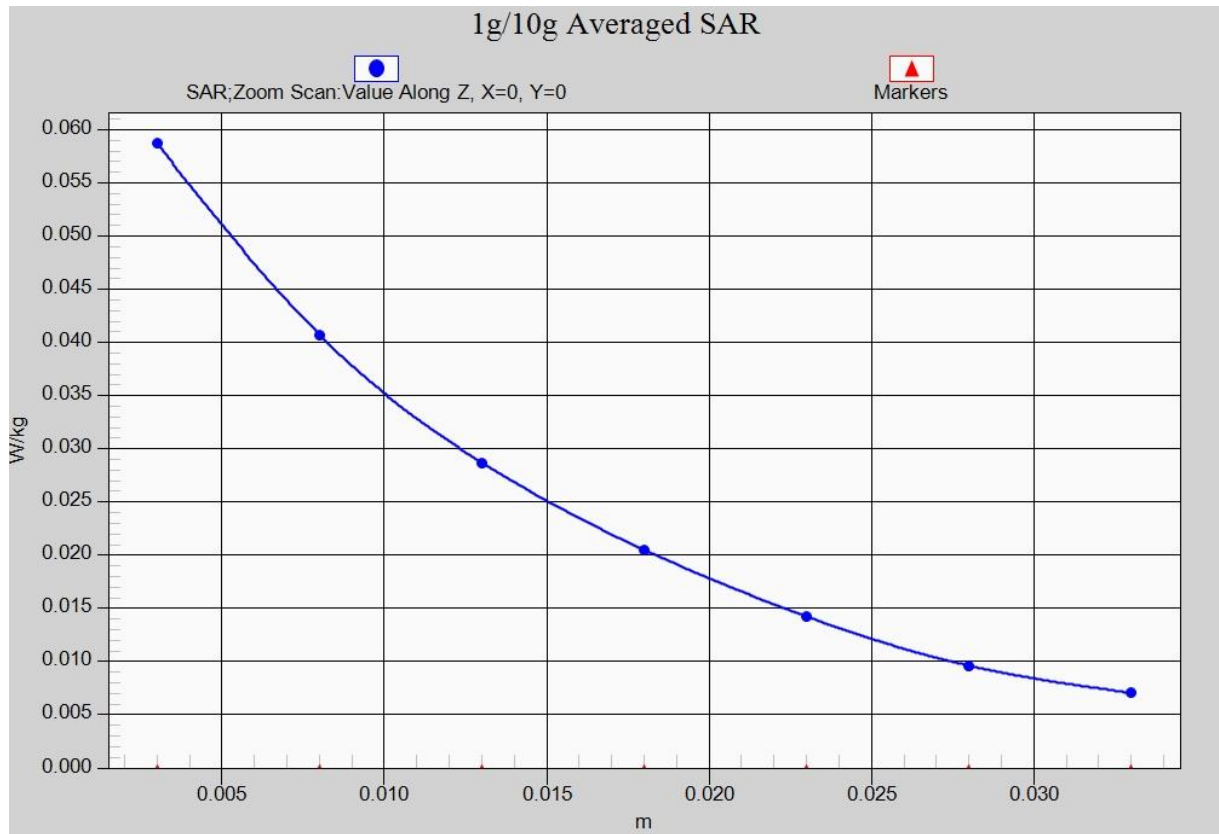


Fig. 3-1 Z-Scan at power reference point (1900 MHz)

1900 Body Bottom Low

Date: 2018-9-16

Electronics: DAE4 Sn1555

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.542$ mho/m; $\epsilon_r = 52.73$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: GSM 1900MHz GPRS Frequency: 1850.2 MHz Duty Cycle: 1:2

Probe: EX3DV4– SN7514 ConvF(7.53, 7.53, 7.53)

Area Scan (131x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.46 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 27.03 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.616 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

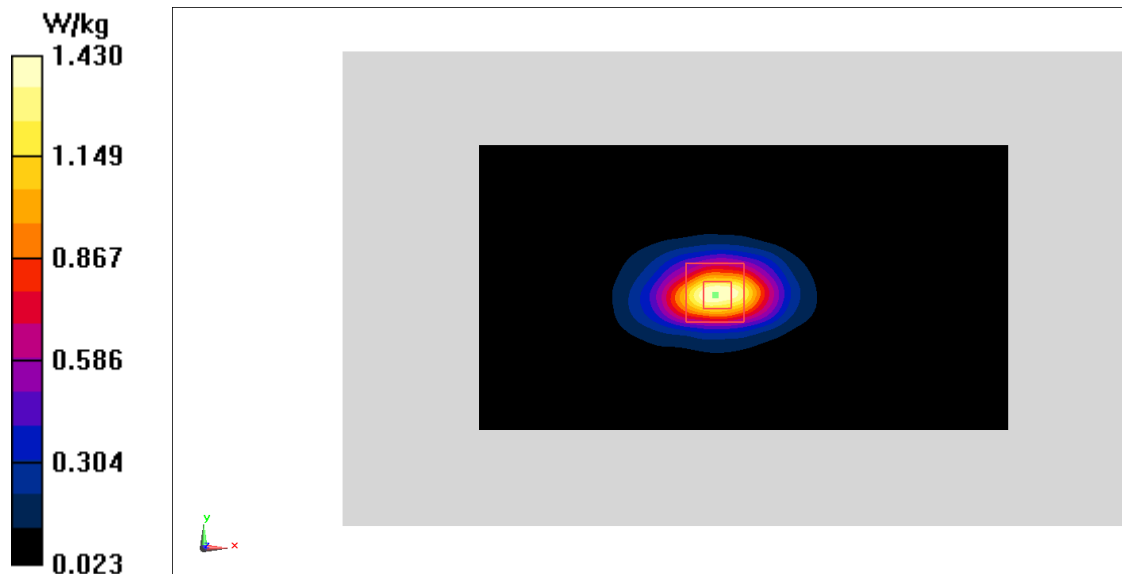


Fig.4 1900 MHz

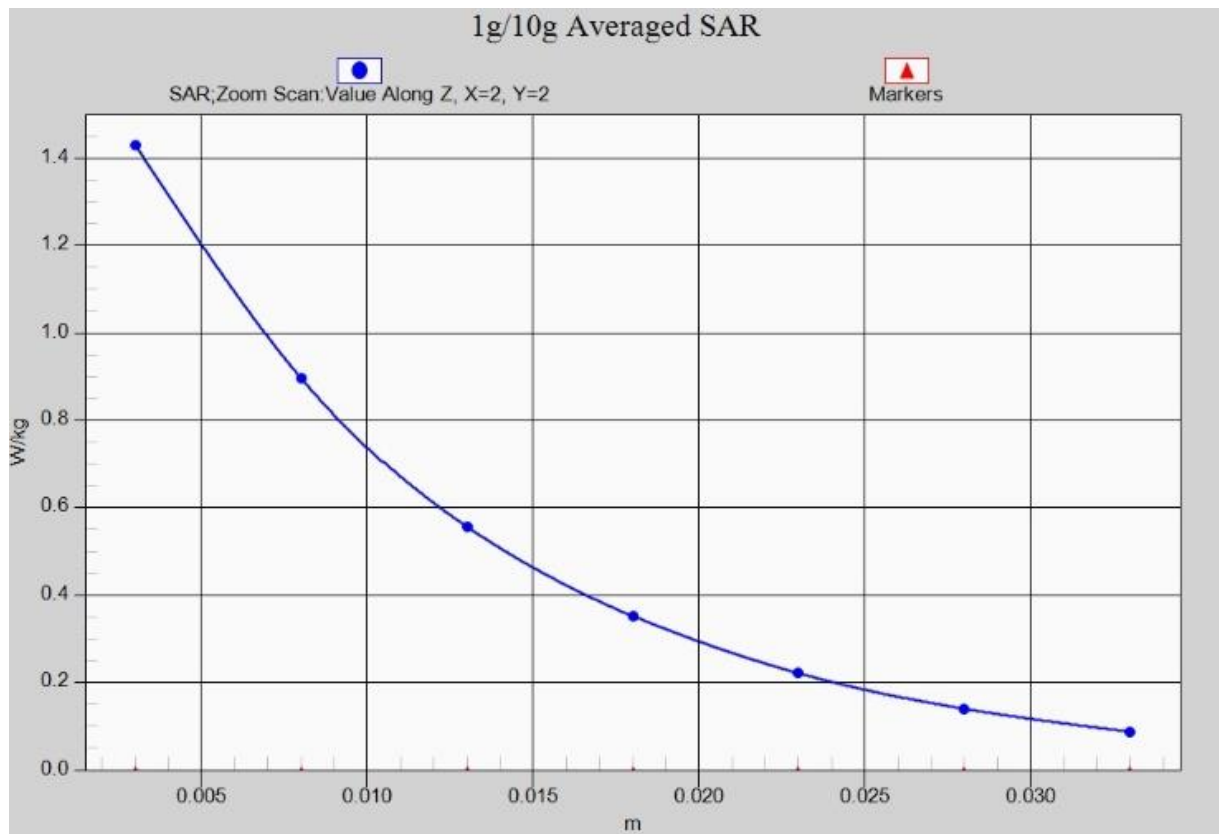


Fig. 4-1 Z-Scan at power reference point (1900 MHz)

WCDMA 850 Left Cheek High

Date: 2018-9-15

Electronics: DAE4 Sn1555

Medium: Head 850 MHz

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.825$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.09, 9.09, 9.09)

Area Scan (71x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0984 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.861 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.109 W/kg

SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.0967 W/kg

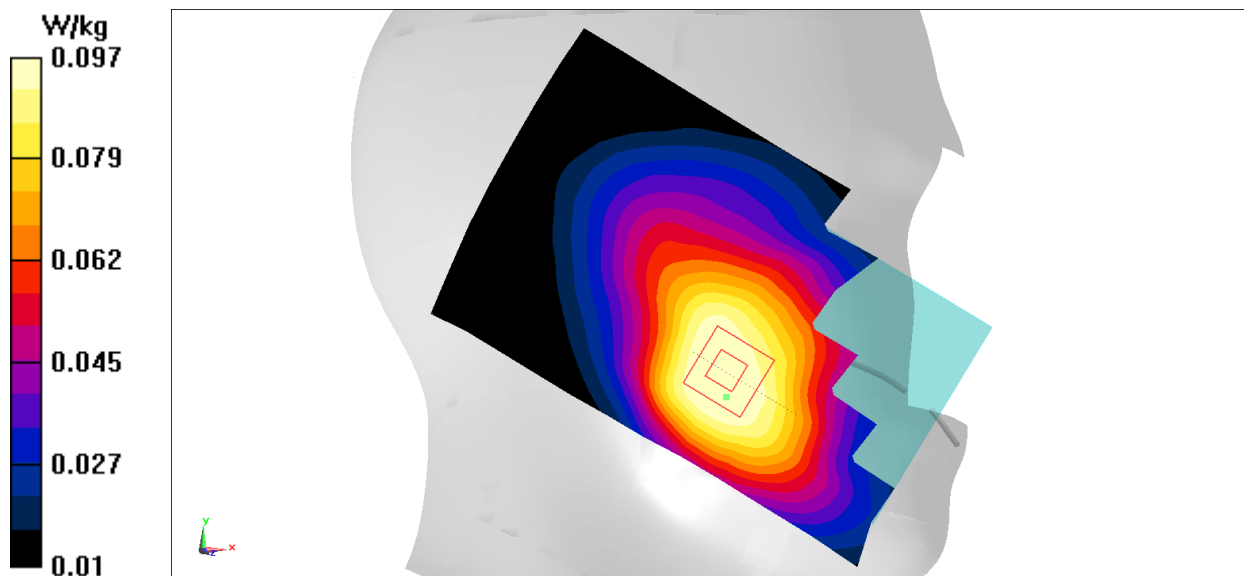


Fig.5 WCDMA 850

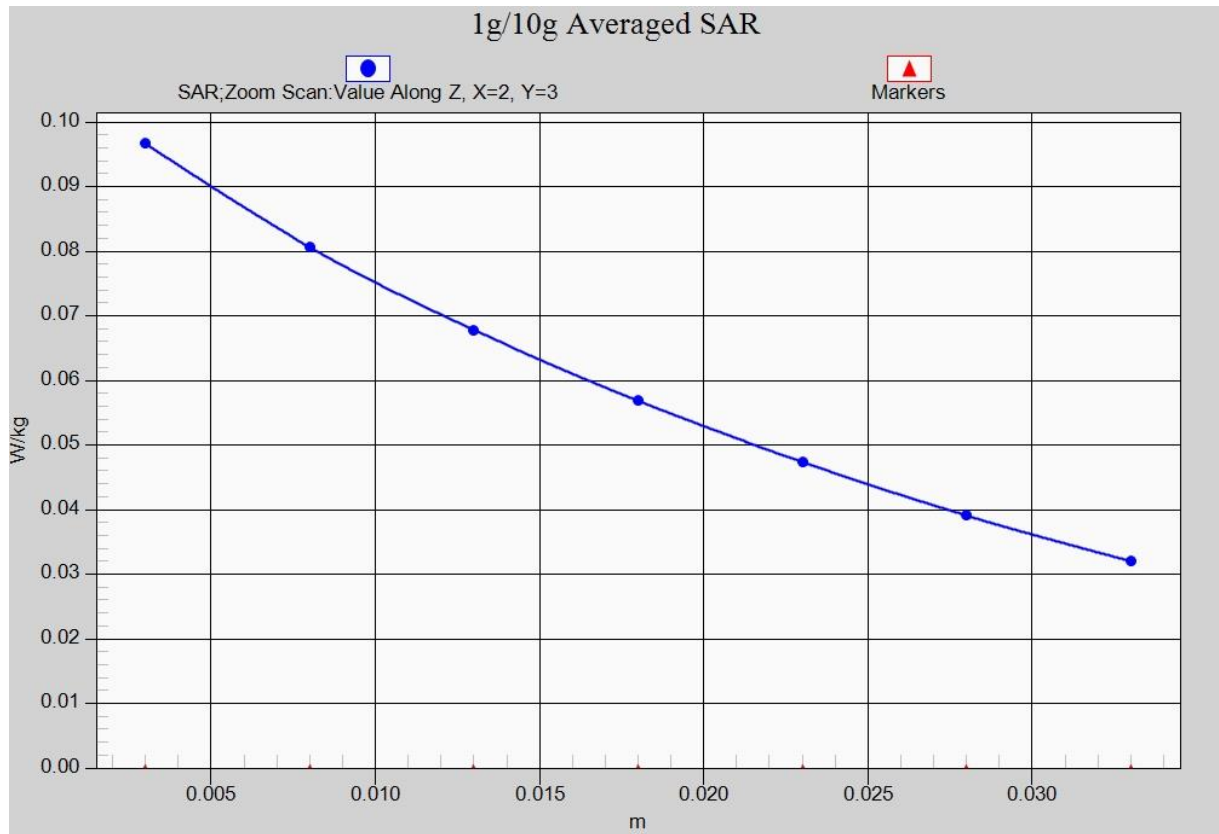


Fig. 5-1 Z-Scan at power reference point (850 MHz)

WCDMA 850 Body Rear High

Date: 2018-9-15

Electronics: DAE4 Sn1555

Medium: Body 850 MHz

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.998$ mho/m; $\epsilon_r = 55.886$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.47, 9.47, 9.47)

Area Scan (131x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.240 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.87 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.339 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.125 W/kg

Maximum value of SAR (measured) = 0.247 W/kg

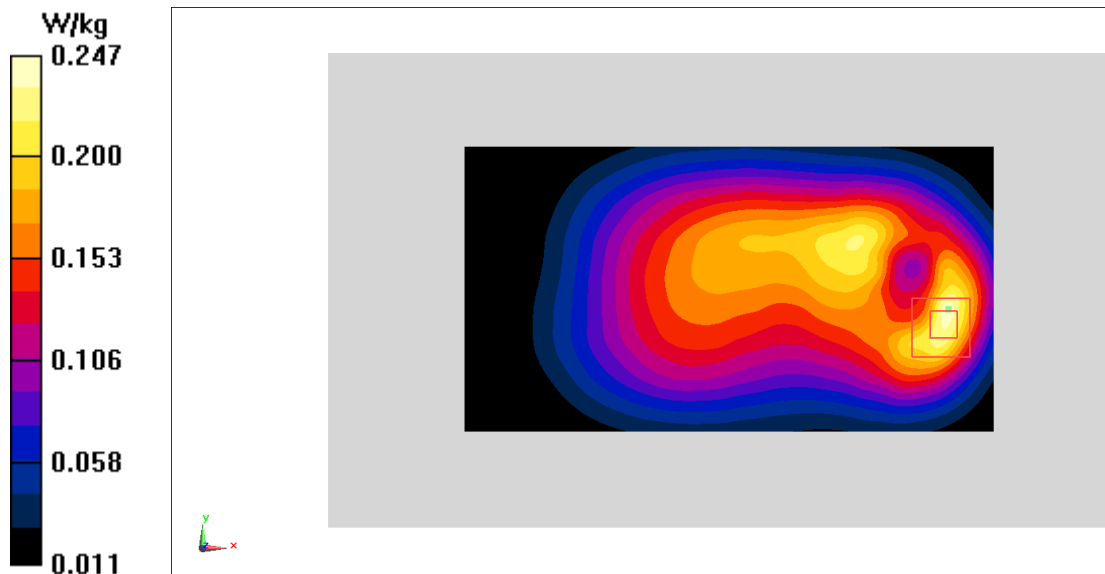


Fig.6 WCDMA 850

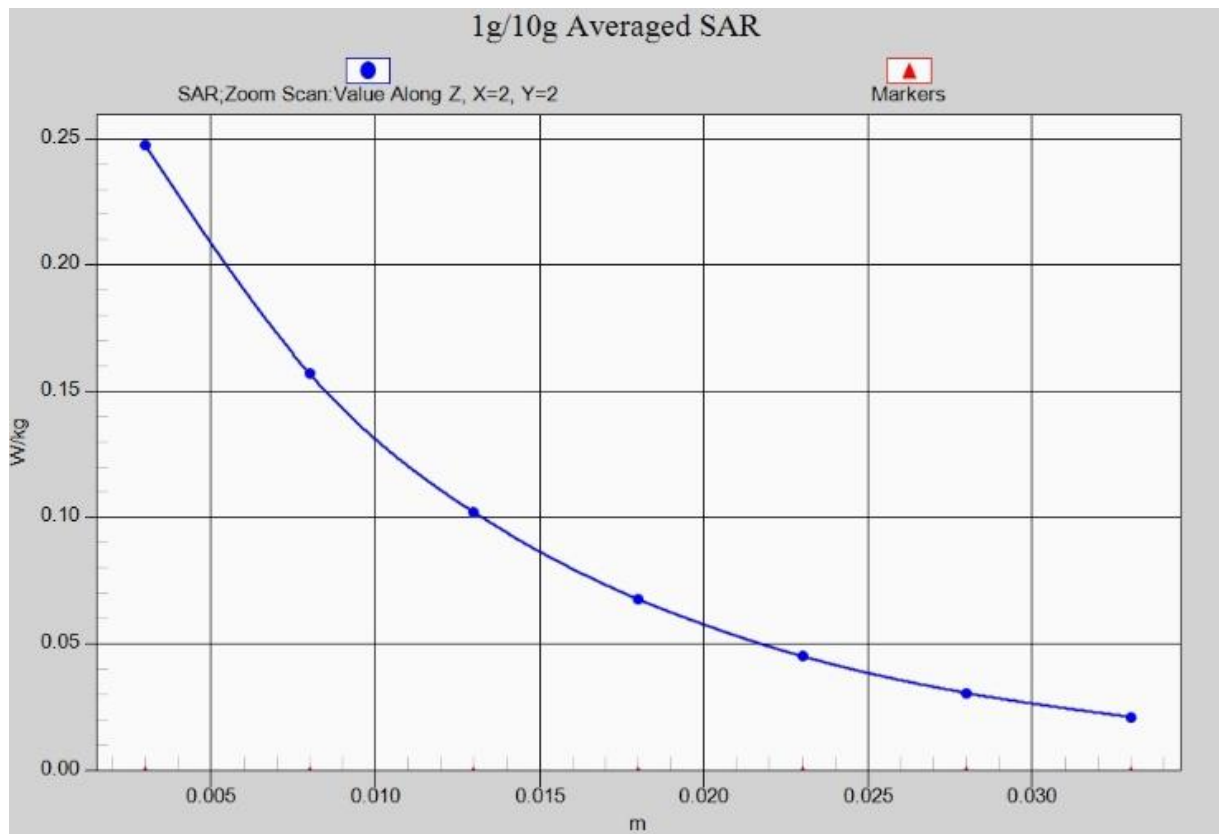


Fig. 6-1 Z-Scan at power reference point (WCDMA850)

WCDMA 1900 Right Cheek Low

Date: 2018-9-16

Electronics: DAE4 Sn1555

Medium: Head 1900 MHz

Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.409$ mho/m; $\epsilon_r = 40.75$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: WCDMA 1900 Frequency: 1852.4 MHz Duty Cycle: 1:1

Probe: EX3DV4– SN7514 ConvF(7.73, 7.73, 7.73)

Area Scan (71x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.177 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.148 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.162 W/kg

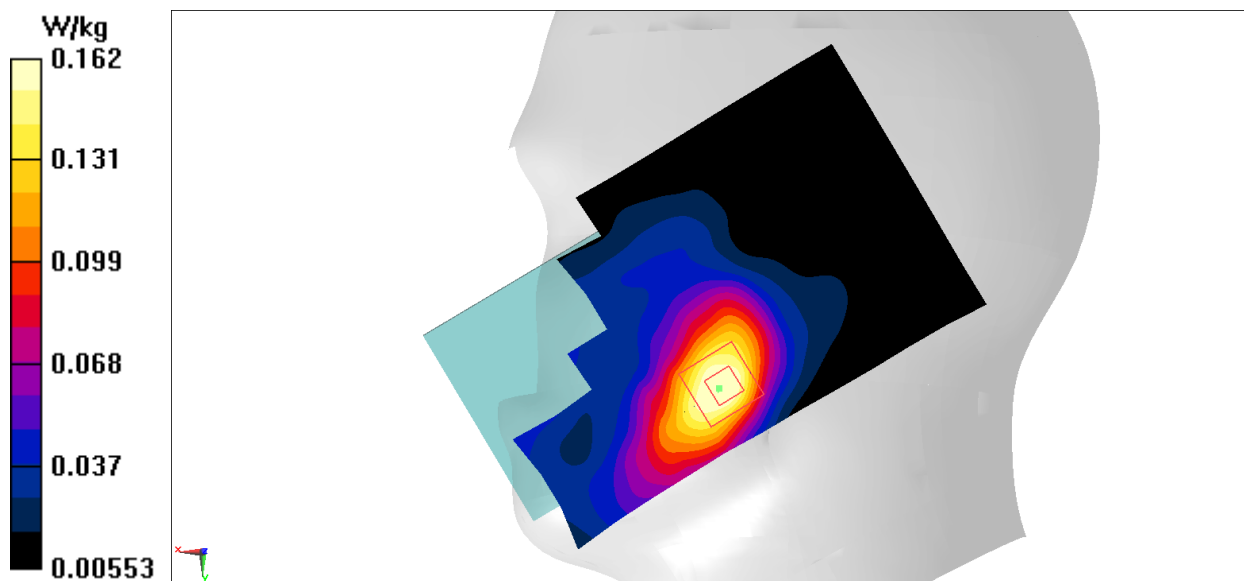


Fig.7 WCDMA1900

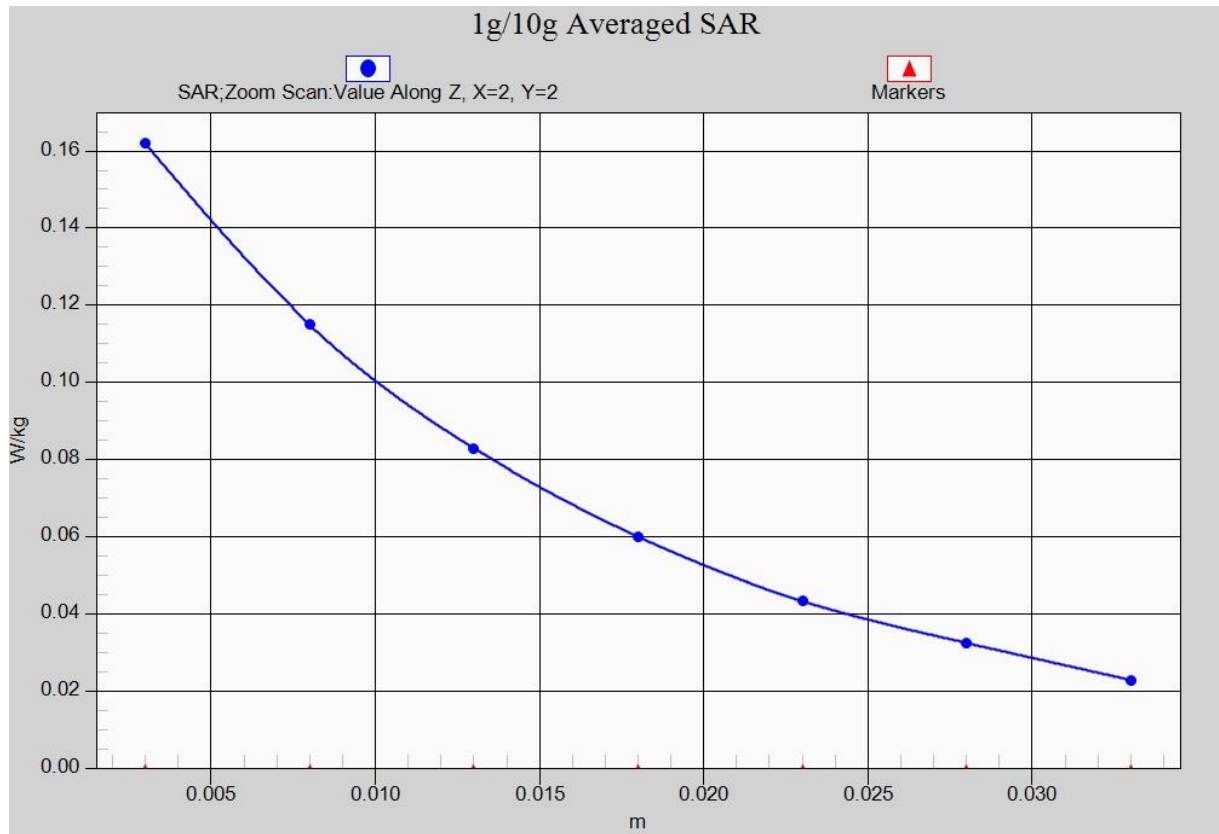


Fig. 7-1 Z-Scan at power reference point (WCDMA1900)

WCDMA 1900 Body Bottom Low

Date: 2018-9-16

Electronics: DAE4 Sn1555

Medium: Body 1900 MHz

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: WCDMA 1900 Frequency: 1852.4 MHz Duty Cycle: 1:1

Probe: EX3DV4– SN7514 ConvF(7.53, 7.53, 7.53)

Area Scan (131x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.40 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 27.95 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.605 W/kg

Maximum value of SAR (measured) = 1.40 W/kg

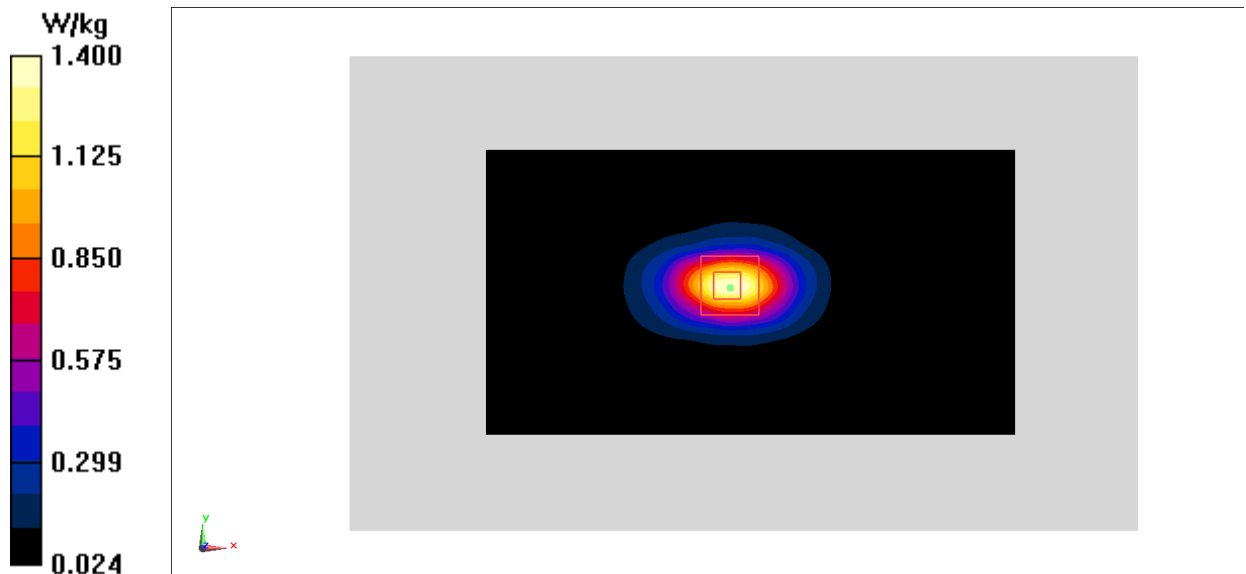


Fig.8 WCDMA1900

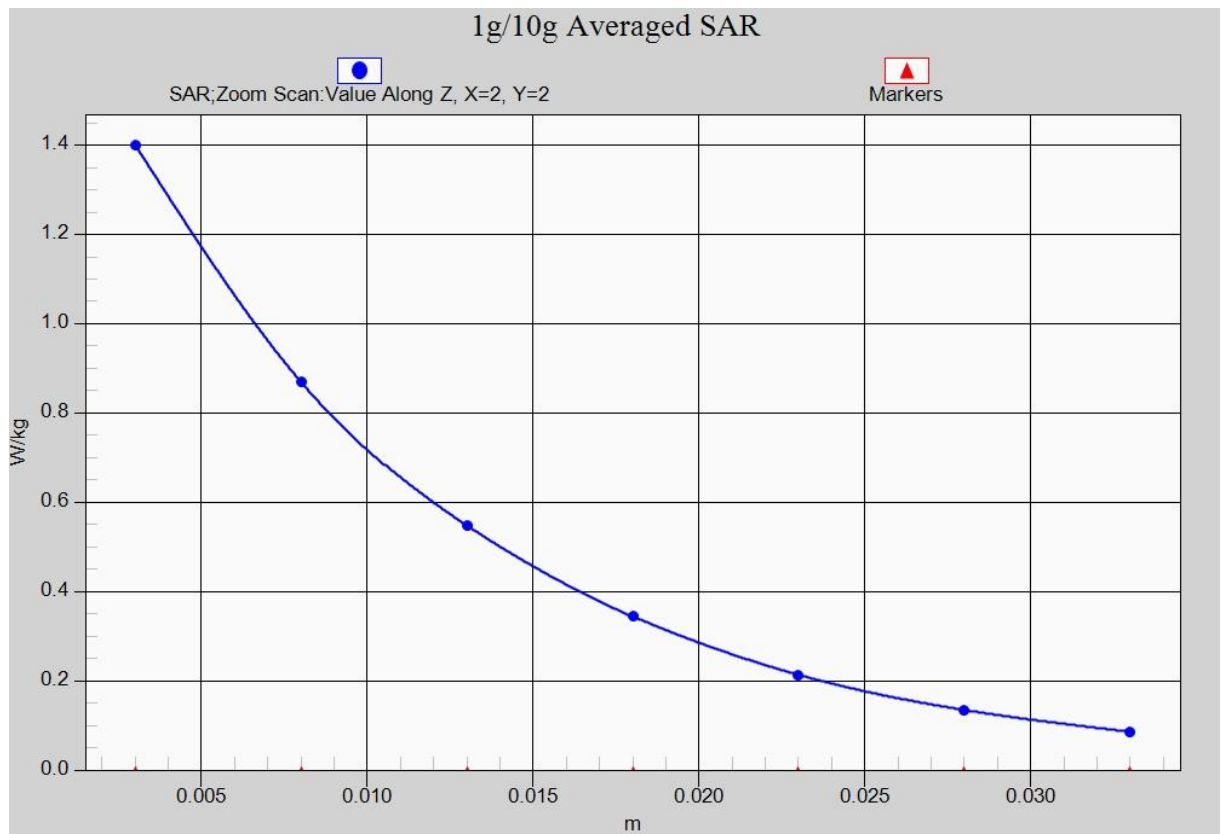


Fig. 8-1 Z-Scan at power reference point (WCDMA1900)

CDMA BC0_CH777 Left Cheek

Date: 2018-9-15

Electronics: DAE4 Sn1555

Medium: Head 835 MHz

Medium parameters used: $f = 848.31$ MHz; $\sigma = 0.938$ mho/m; $\epsilon_r = 42.13$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CDMABC0 848.31 MHz Duty Cycle: 1: 1

Probe: EX3DV4 – SN7514 ConvF(9.09, 9.09, 9.09)

Area Scan (71x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.115 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.326 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.115 W/kg

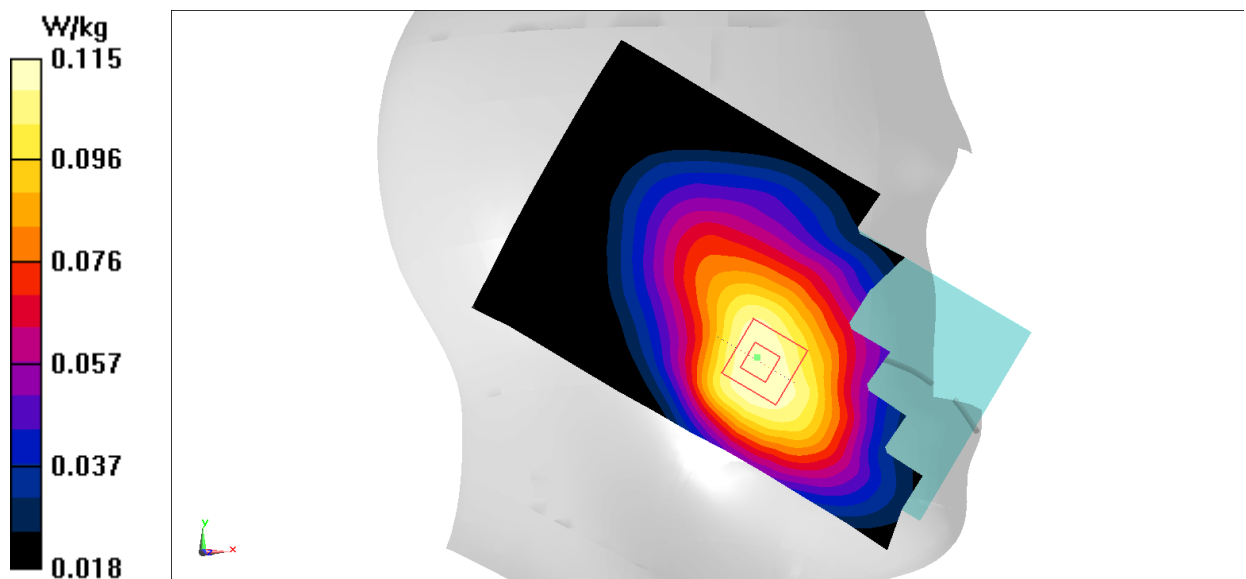


Fig.9 CDMA BC0

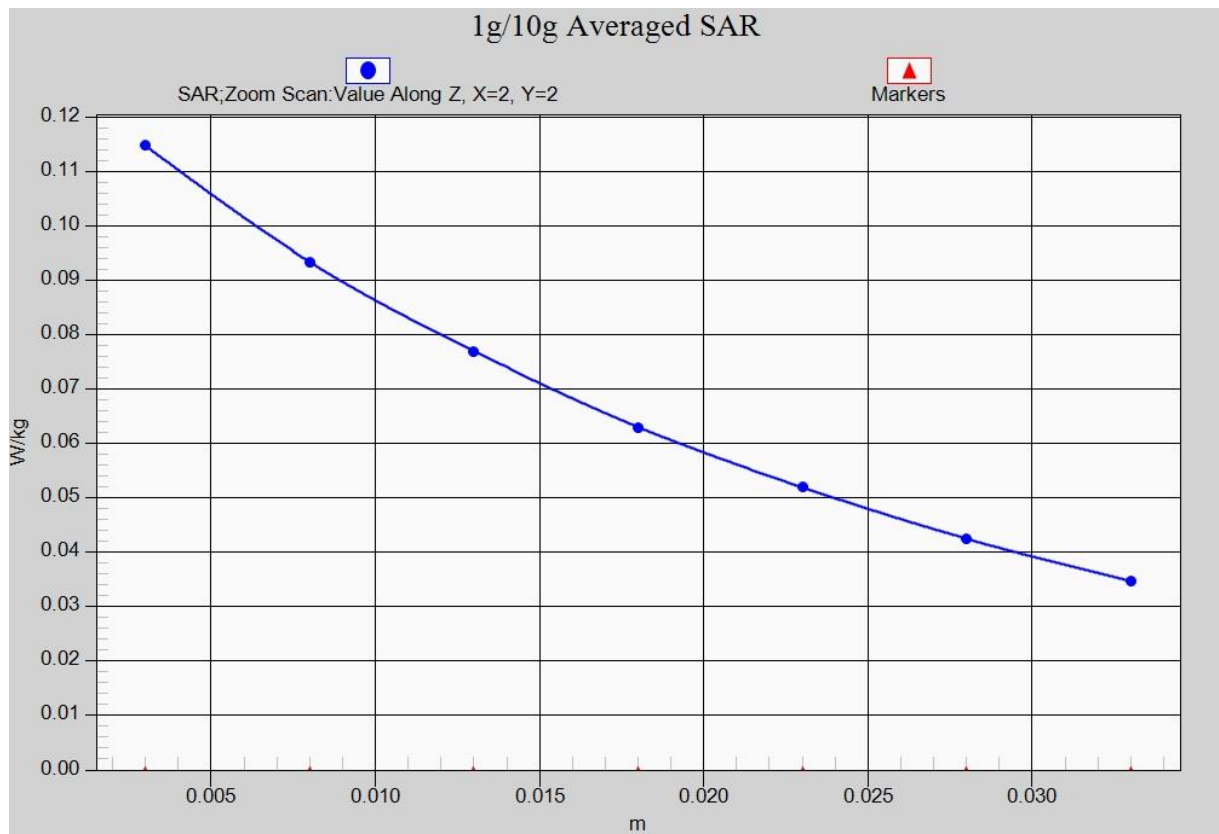


Fig. 9-1 Z-Scan at power reference point (CDMA BC0)

CDMA BC0_CH777 Rear

Date: 2018-9-15

Electronics: DAE4 Sn1555

Medium: Body 835 MHz

Medium parameters used: $f = 848.31$ MHz; $\sigma = 1.012$ mho/m; $\epsilon_r = 55.78$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C, Liquid Temperature: 22.5°C

Communication System: CDMABC0 848.31 MHz Duty Cycle: 1: 1

Probe: EX3DV4 – SN7514 ConvF(9.47,9.47,9.47)

Area Scan (131x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.294 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.71 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.405 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.148 W/kg

Maximum value of SAR (measured) = 0.288 W/kg

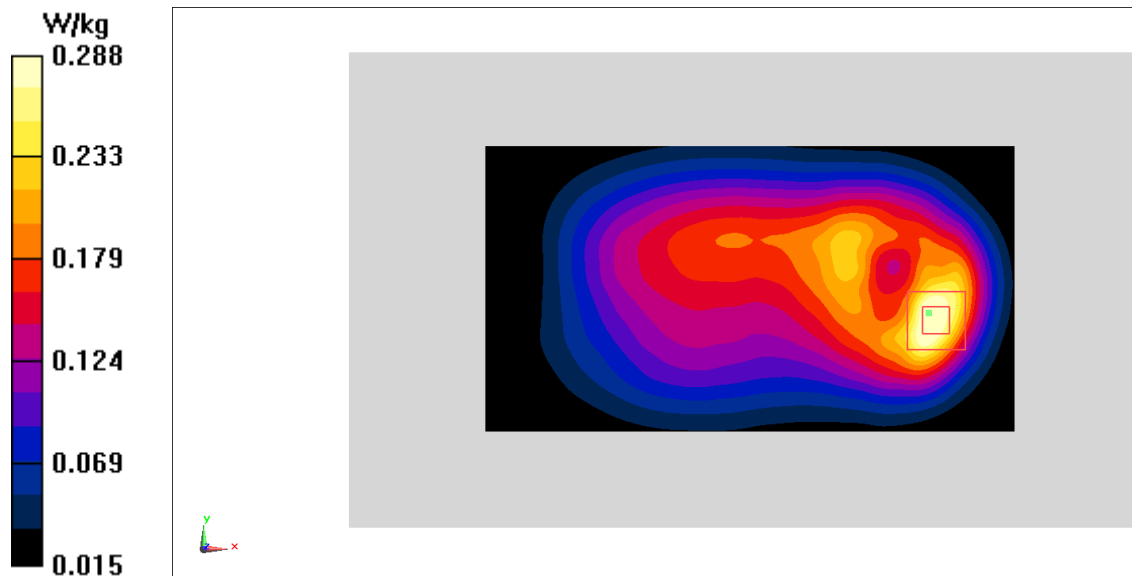


Fig.10 CDMA BC0

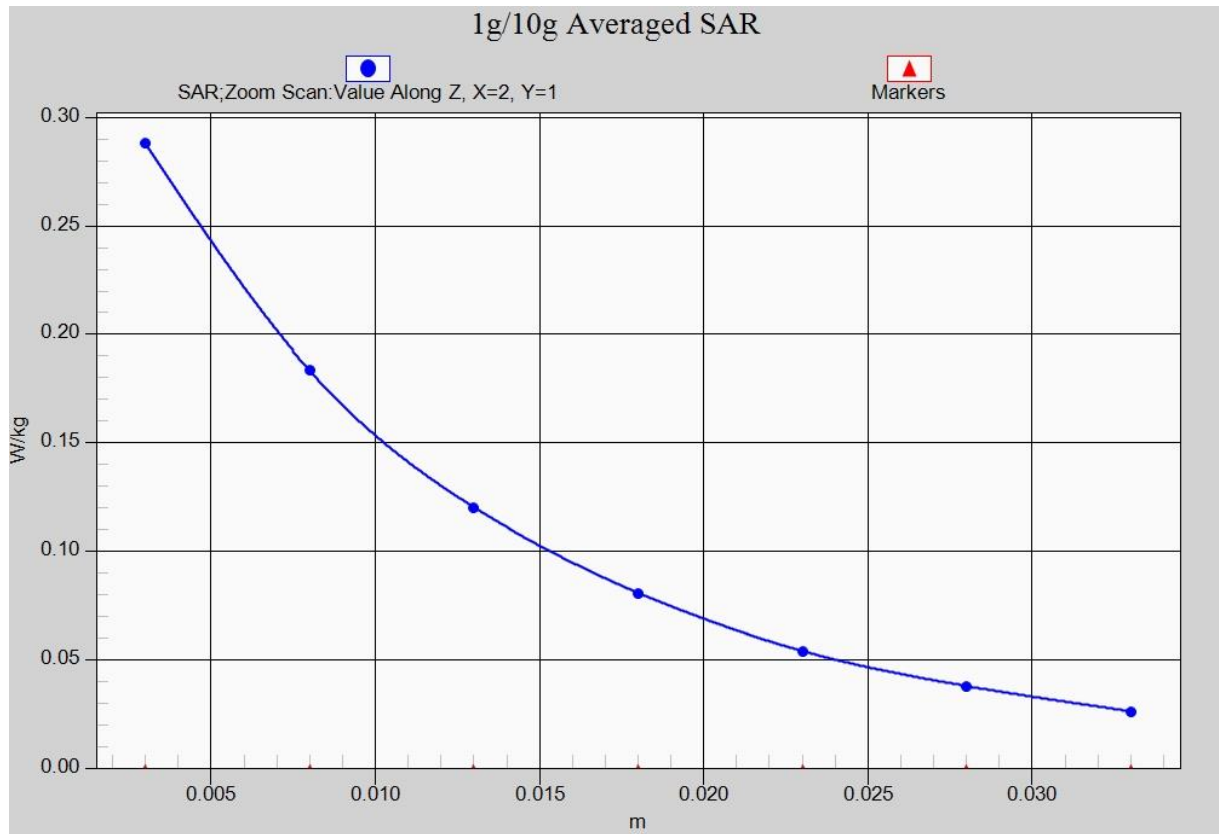


Fig. 10-1 Z-Scan at power reference point (CDMA BC0)

LTE Band5 Left Cheek Middle with QPSK_10M_1RB_High

Date: 2018-9-15

Electronics: DAE4 Sn1555

Medium: Head 850 MHz

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.871$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: LTE Band5 Frequency: 836.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7514 ConvF(9.09, 9.09, 9.09)

Area Scan (71x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0720 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.241 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0810 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.0721 W/kg

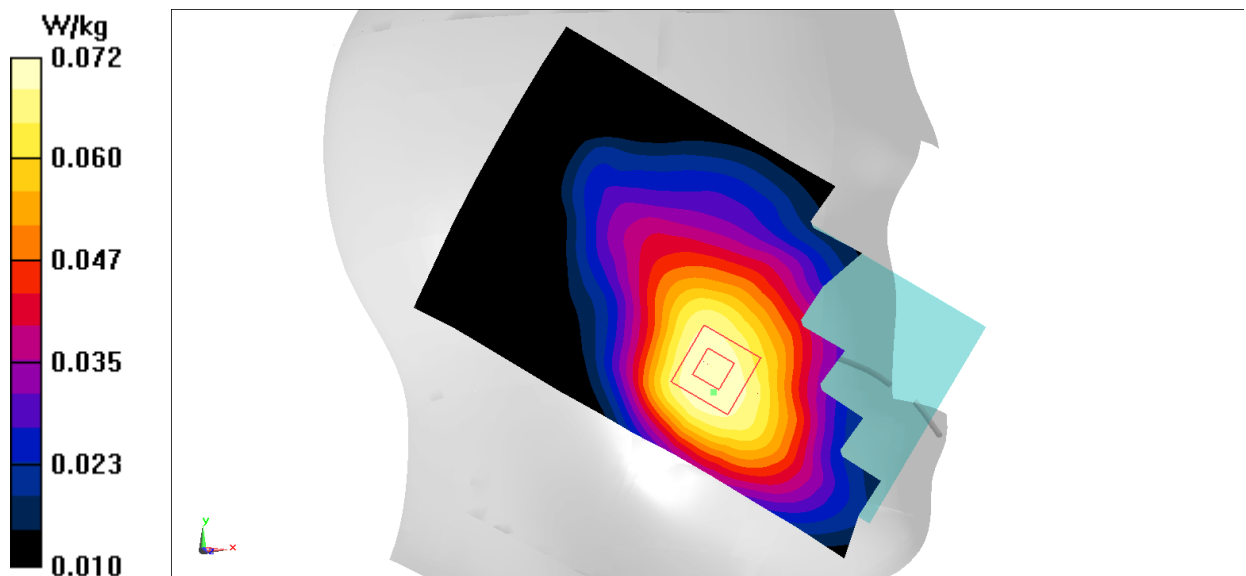


Fig.11 LTE Band5

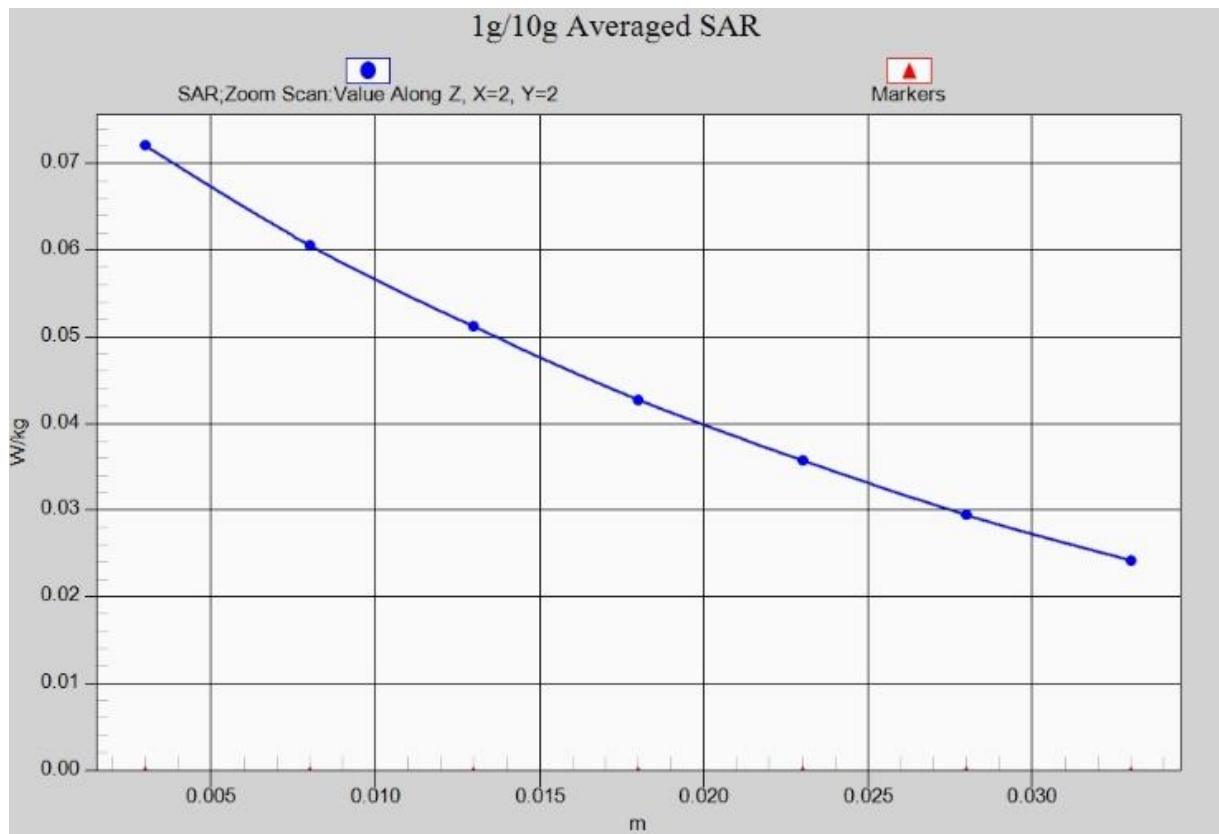


Fig. 11-1 Z-Scan at power reference point (LTE Band5)

LTE Band5 Body Rear Middle with QPSK_10M_1RB_High

Date: 2018-9-15

Electronics: DAE4 Sn1555

Medium: Body 850 MHz

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 1.024$ mho/m; $\epsilon_r = 55.654$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: LTE Band5 Frequency: 836.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7514 ConvF(9.47, 9.47, 9.47)

Area Scan (131x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.208 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.44 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.209 W/kg

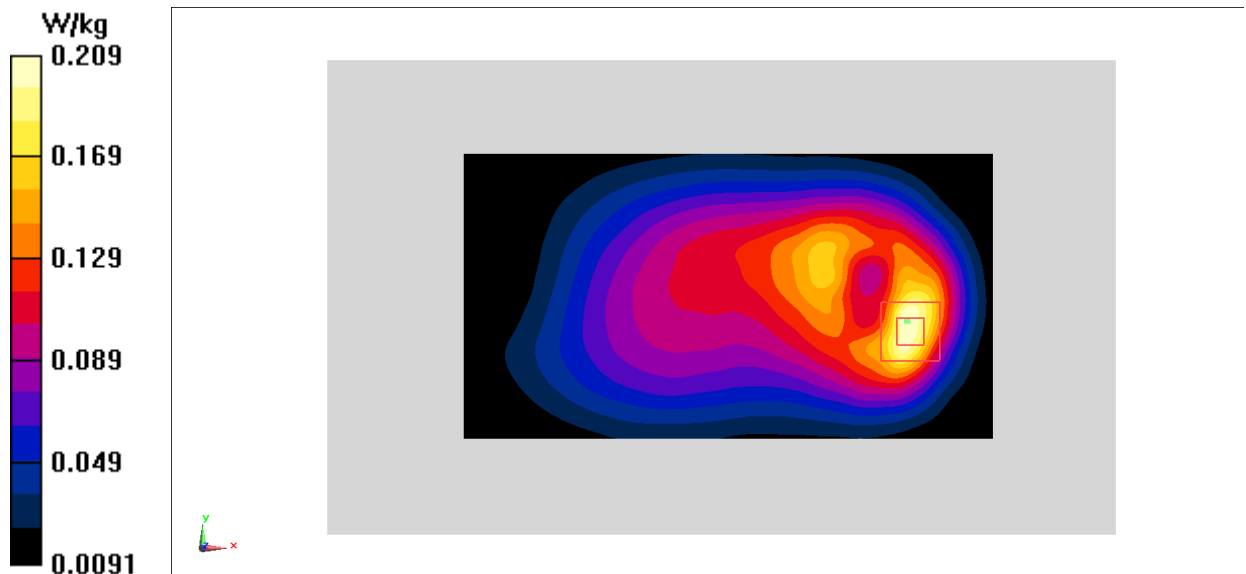


Fig.12 LTE Band5

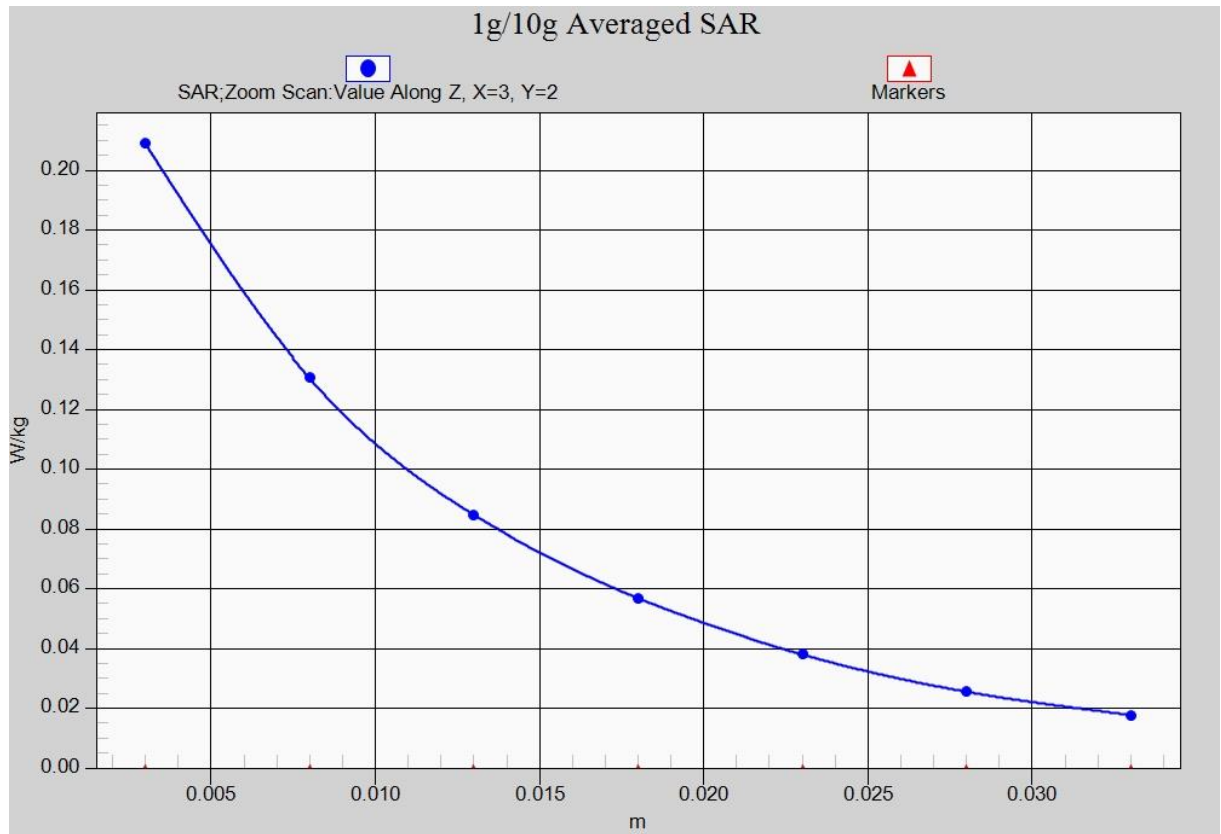


Fig. 12-1 Z-Scan at power reference point (LTE Band5)

LTE Band7 Left Cheek Middle with QPSK_20M_1RB_High

Date: 2018-9-18

Electronics: DAE4 Sn1555

Medium: Head 2600 MHz

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.966$ mho/m; $\epsilon_r = 37.99$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: LTE Band7 Frequency: 2535 MHz Duty Cycle: 1:1

Probe: EX3DV4– SN7514 ConvF(6.92, 6.92, 6.92)

Area Scan (81x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0590 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.252 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0604 W/kg

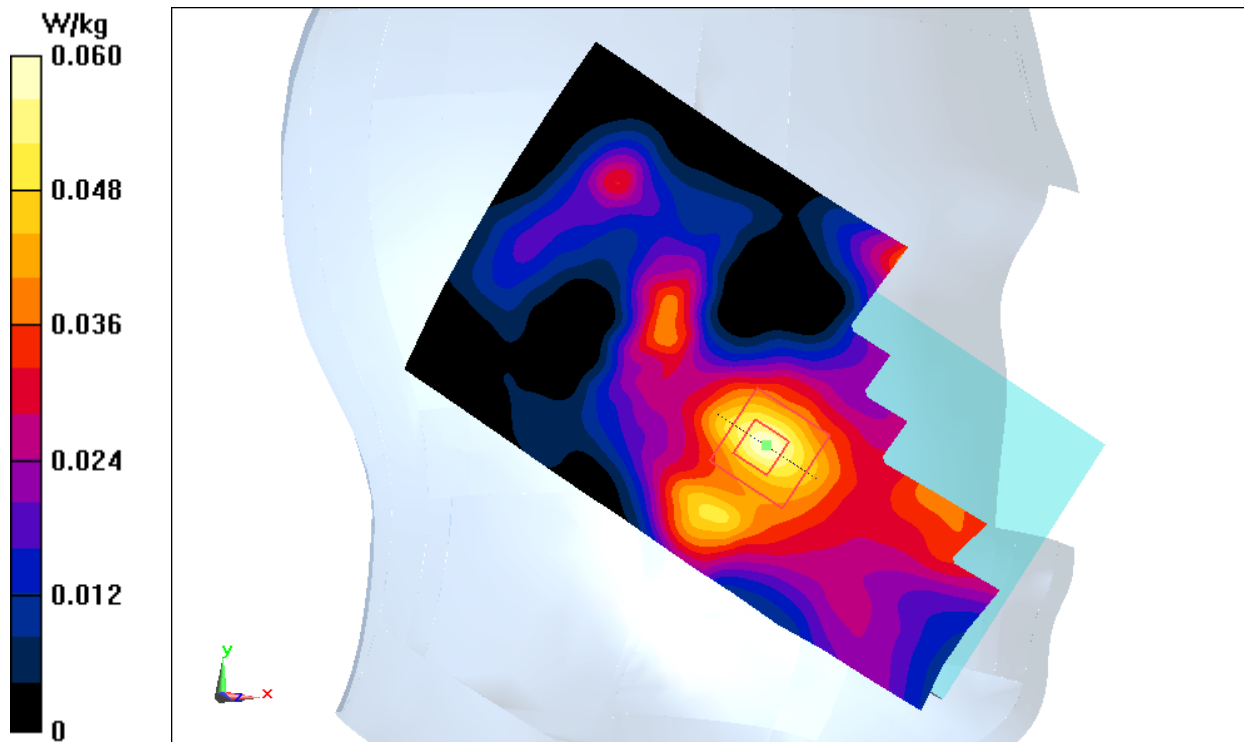


Fig.13 LTE Band7

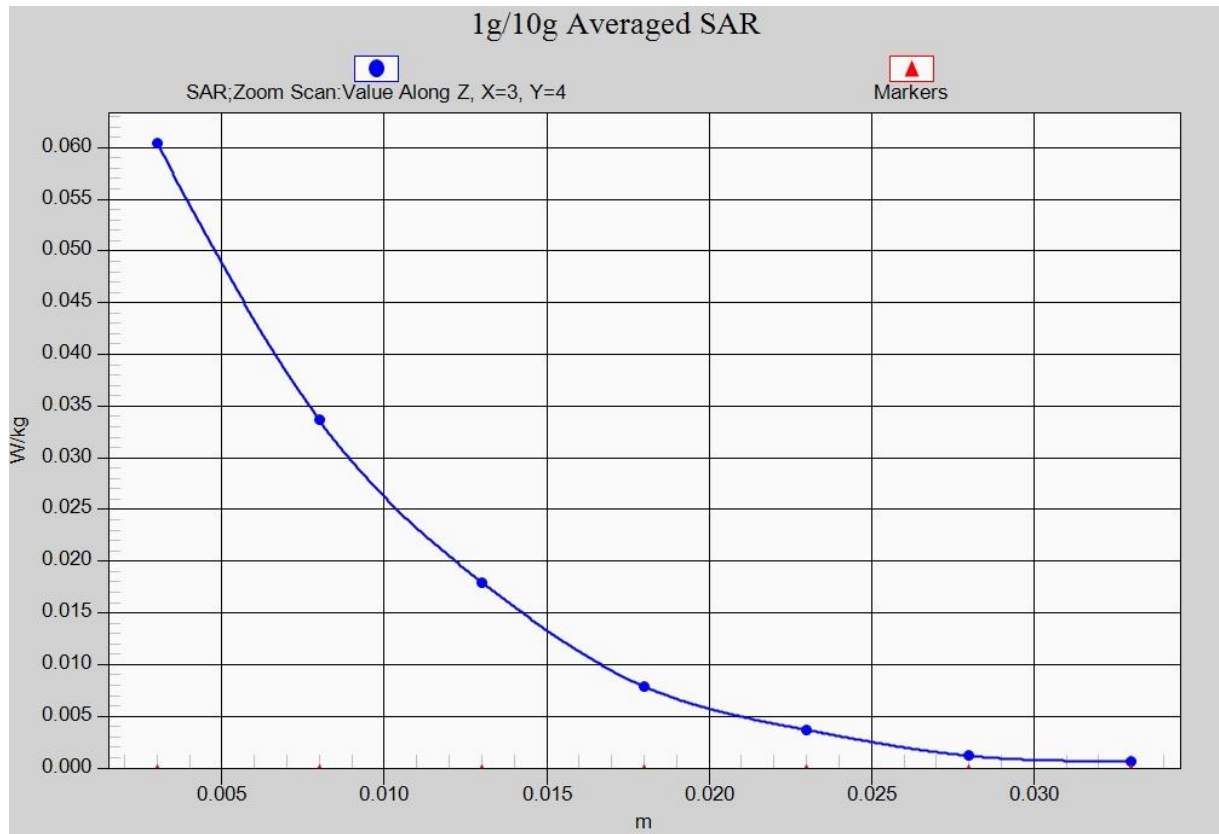


Fig. 13-1 Z-Scan at power reference point (LTE Band7)

LTE Band7 Body Bottom Middle with QPSK_20M_1RB_High

Date: 2018-9-18

Electronics: DAE4 Sn1555

Medium: Body 2600 MHz

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.187$ mho/m; $\epsilon_r = 51.39$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: LTE Band7 Frequency: 2535 MHz Duty Cycle: 1:1

Probe: EX3DV4– SN7514 ConvF(7.06, 7.06, 7.06)

Area Scan (121x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.05 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.43 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.844 W/kg; SAR(10 g) = 0.436 W/kg

Maximum value of SAR (measured) = 0.957 W/kg

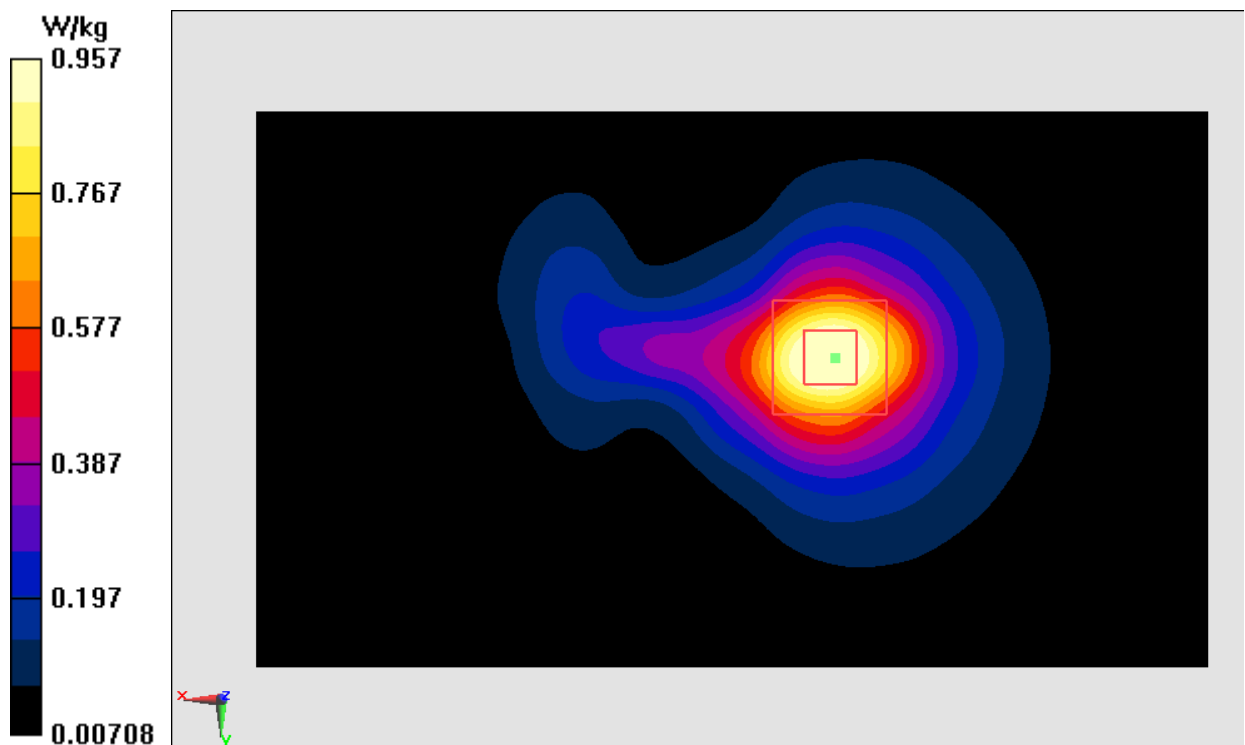**Fig.14 LTE Band7**

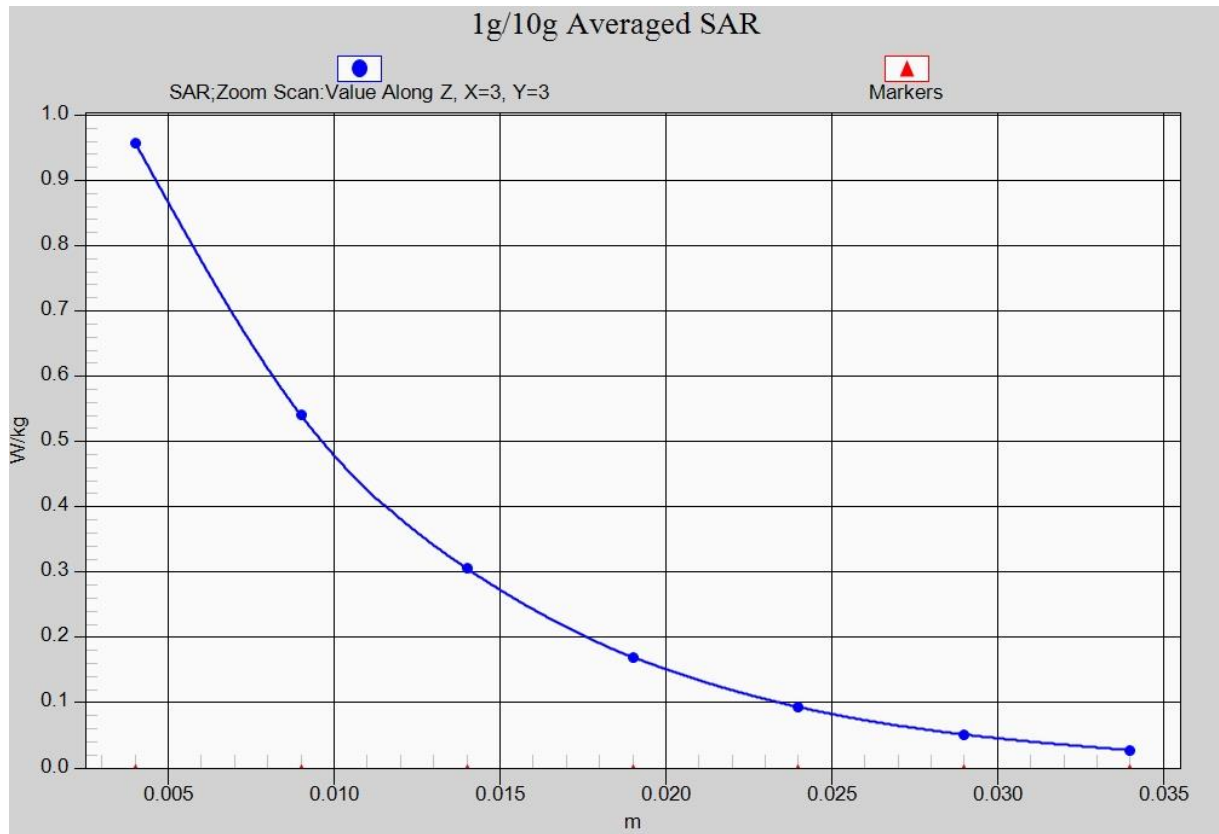


Fig. 14-1 Z-Scan at power reference point (LTE Band7)

LTE Band 41 Right Cheek with QPSK_20M_1RB_Middle

Date: 2018-9-18

Electronics: DAE4 Sn1555

Medium: Head 2600 MHz

Medium parameters used: $f = 2612.5$ MHz; $\sigma = 1.977$ mho/m; $\epsilon_r = 37.99$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: LTE Band41 Frequency: 2612.5 MHz Duty Cycle: 1:1.58

Probe: EX3DV4 - SN7514 ConvF(6.92, 6.92, 6.92)

Area Scan (71x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0300 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.651 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0319 W/kg

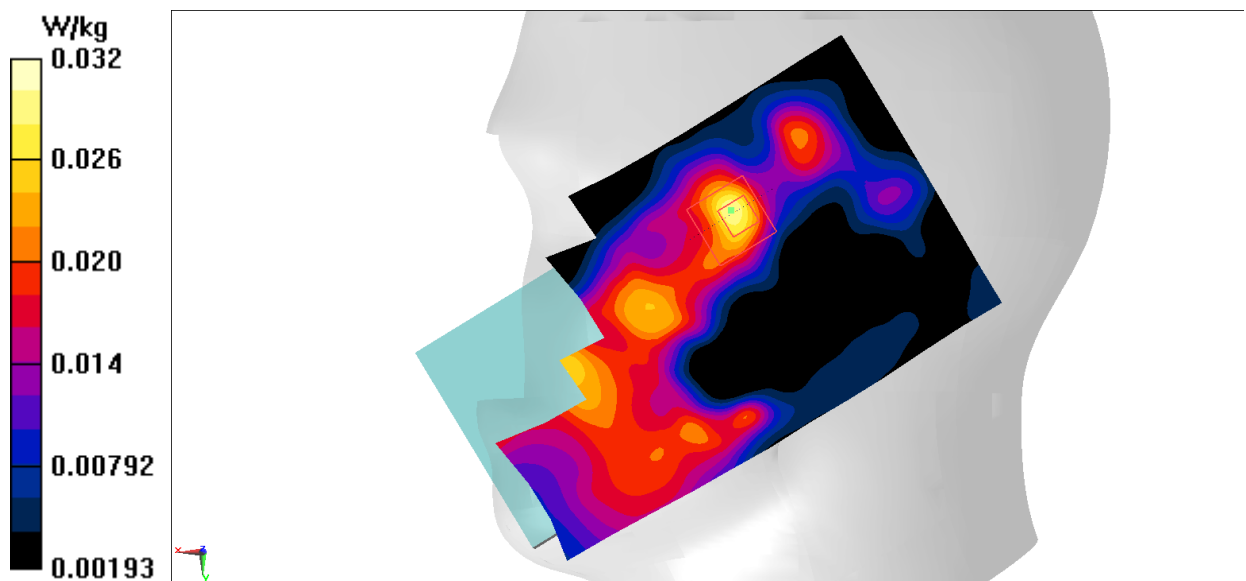


Fig.15 LTE Band 41

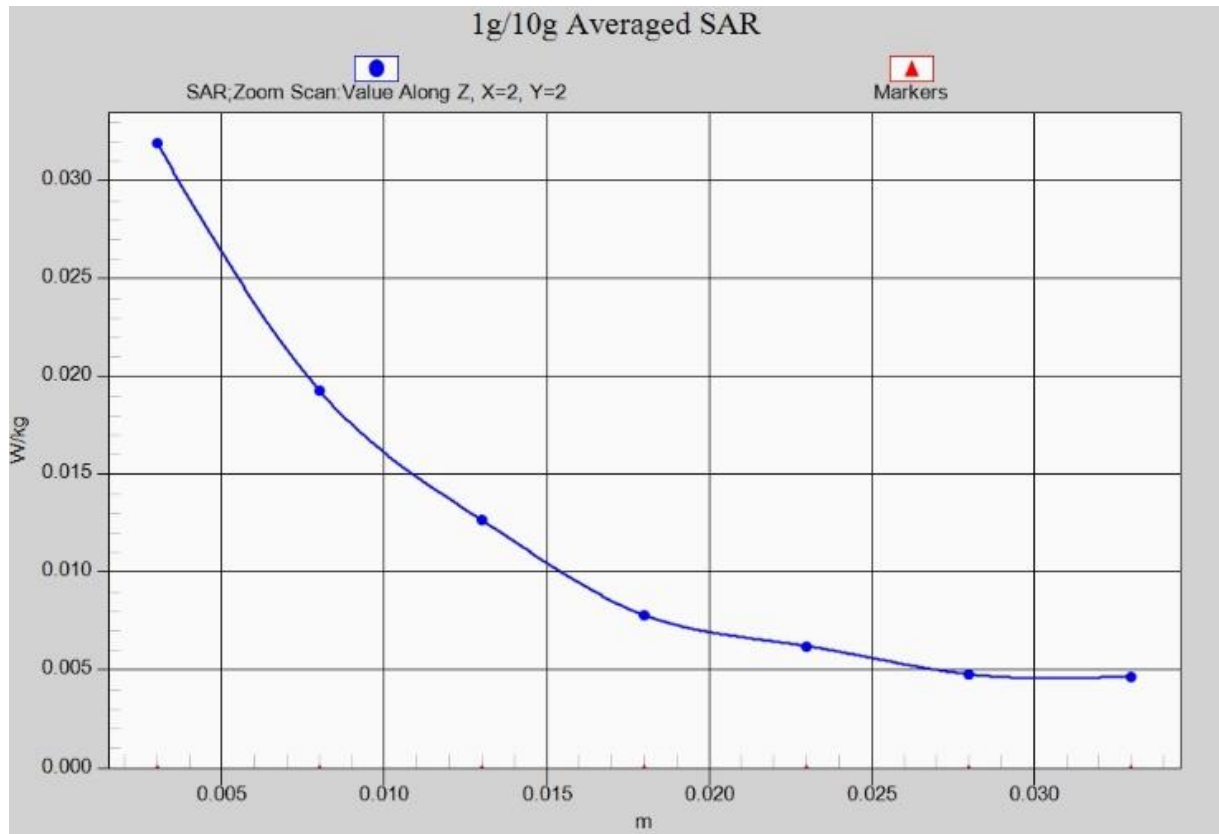


Fig. 15-1 Z-Scan at power reference point (LTE Band 41)

LTE Band 41 Body Bottom with QPSK_20M_1RB_Middle

Date: 2018-9-18

Electronics: DAE4 Sn1555

Medium: Body 2600 MHz

Medium parameters use: $f = 2612.5$ MHz; $\sigma = 2.217$ mho/m; $\epsilon_r = 51.349$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: LTE Band41 Frequency: 2612.5 MHz Duty Cycle: 1:1.58

Probe: EX3DV4 - SN7514 ConvF(7.06, 7.06, 7.06)

Area Scan (161x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.541 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.81 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.550 W/kg

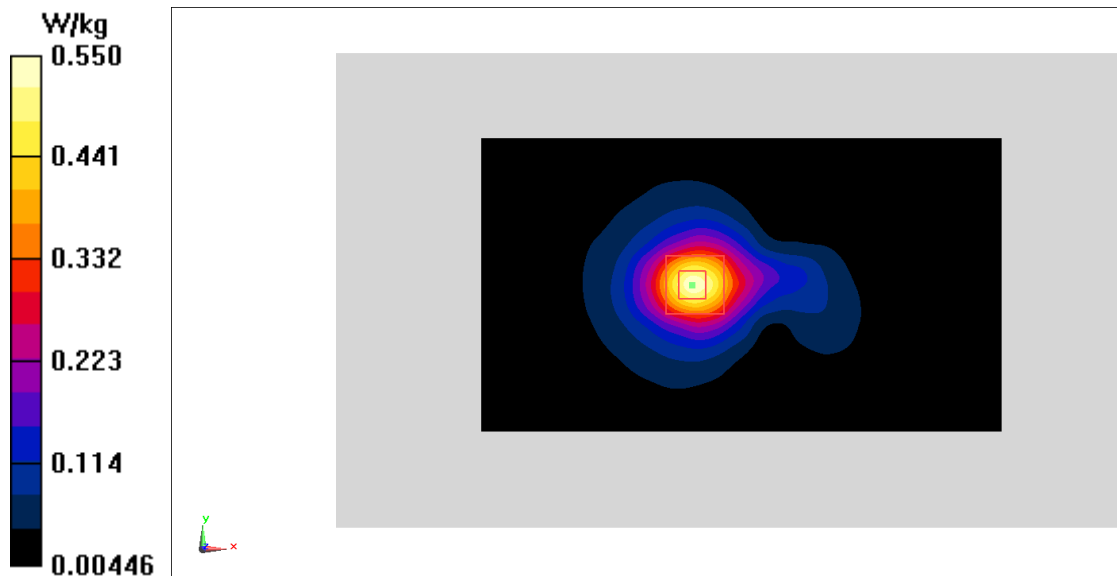


Fig.16 LTE Band 41

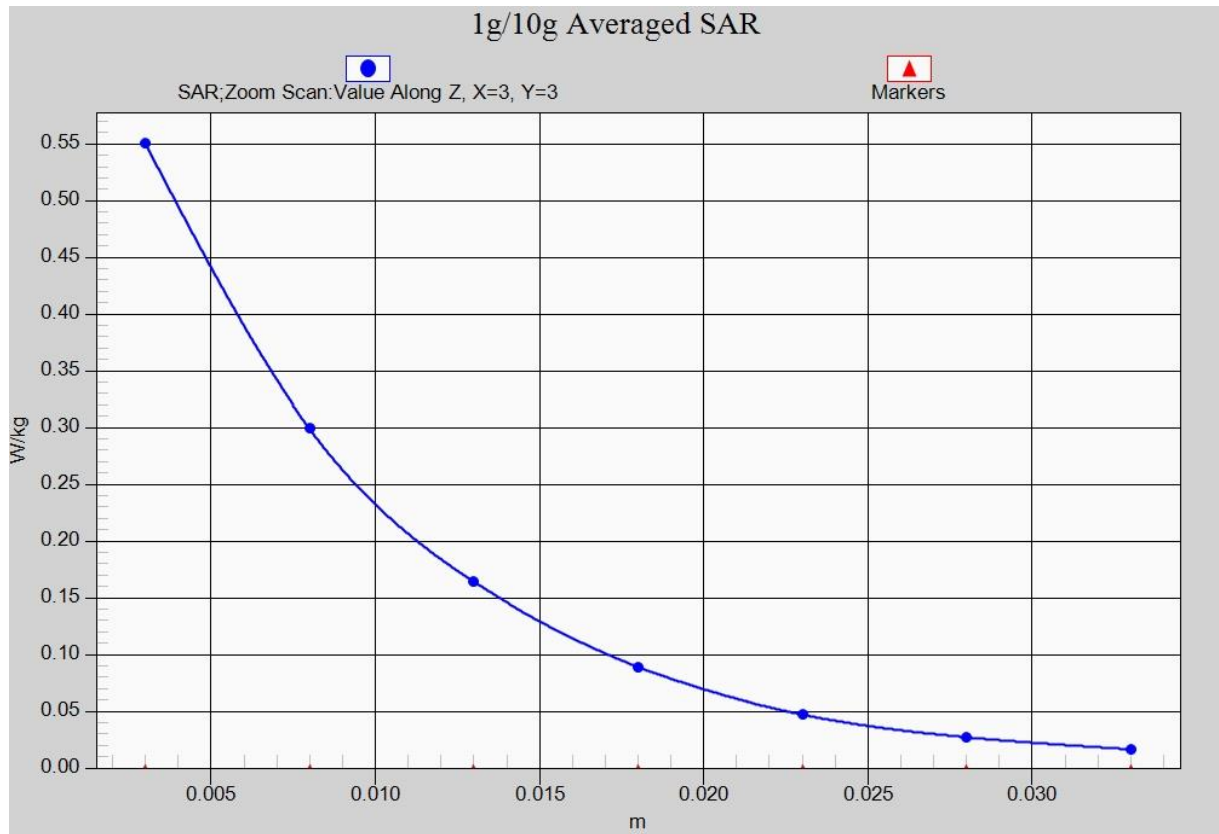


Fig. 16-1 Z-Scan at power reference point (LTE Band 41)

Wifi 802.11b Left Tilt Channel 6

Date: 2018-9-17

Electronics: DAE4 Sn1555

Medium: Head 2450 MHz

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.834$ mho/m; $\epsilon_r = 39.77$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: WLan 2450 Frequency: 2437 MHz Duty Cycle: 1:1

Probe: EX3DV4– SN7514 ConvF(6.95, 6.95, 6.95)

Area Scan (91x161x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.41 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.41 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.58 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.482 W/kg

Maximum value of SAR (measured) = 1.56 W/kg

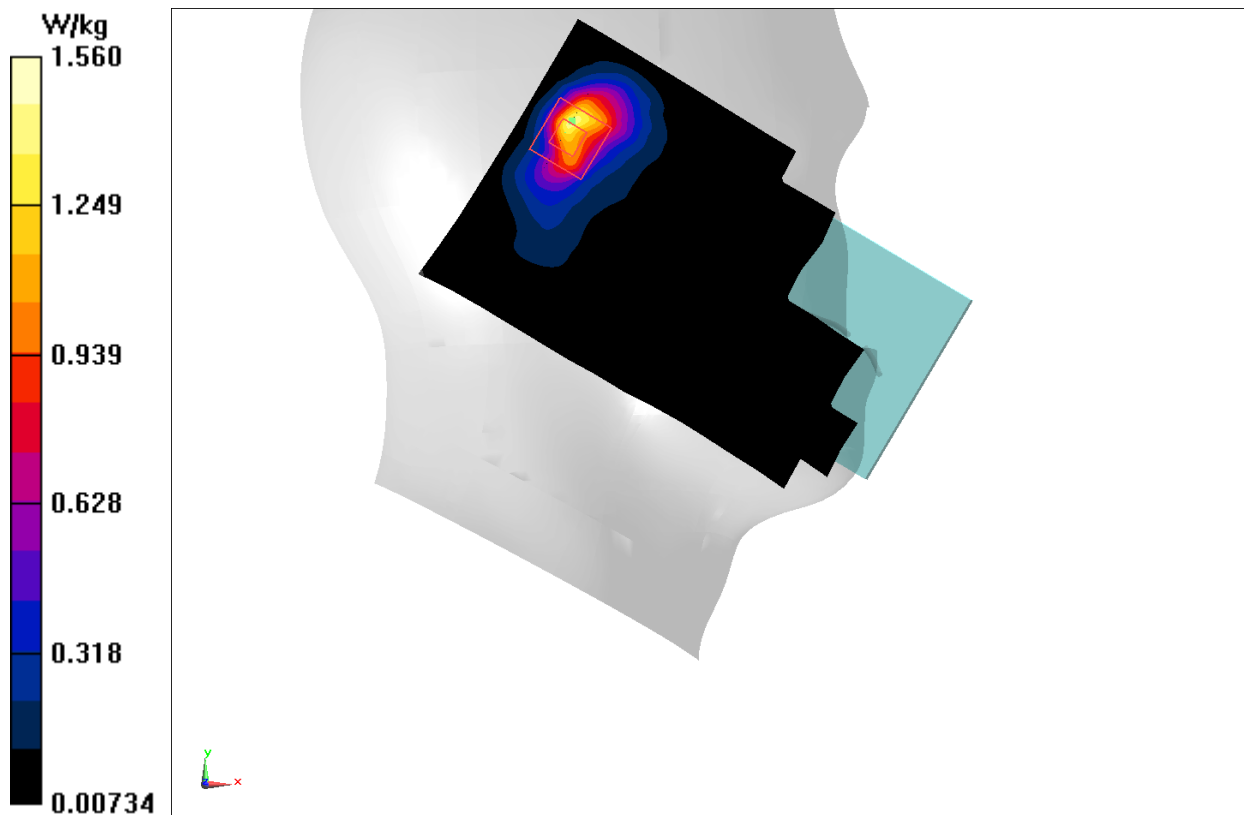


Fig.17 2450 MHz

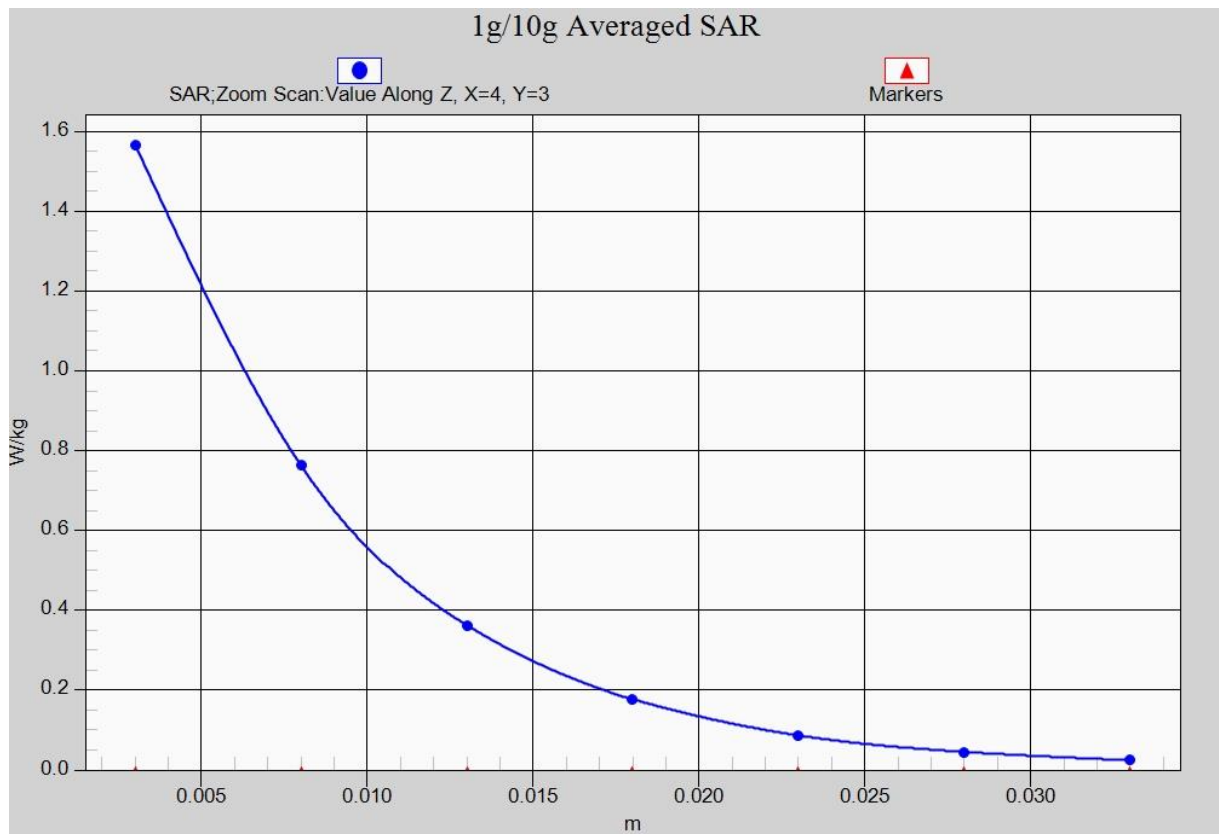


Fig. 17-1 Z-Scan at power reference point (2450 MHz)

Wifi 802.11b Body Top Edge Channel 1

Date: 2018-9-17

Electronics: DAE4 Sn1555

Medium: Body 2450 MHz

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.893$ mho/m; $\epsilon_r = 52.14$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: WLan 2450 Frequency: 2412 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(7.13, 7.13, 7.13)

Area Scan (121x71x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.303 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.922 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.219 W/kg

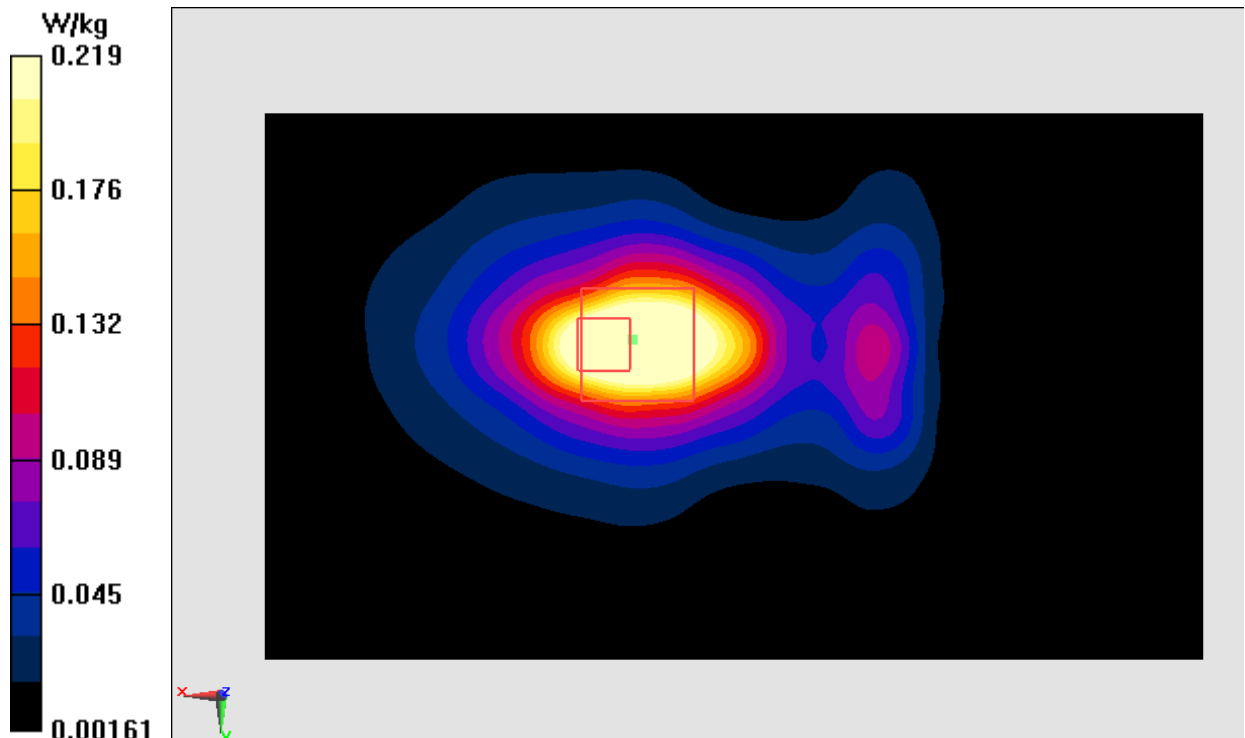


Fig.18 2450 MHz

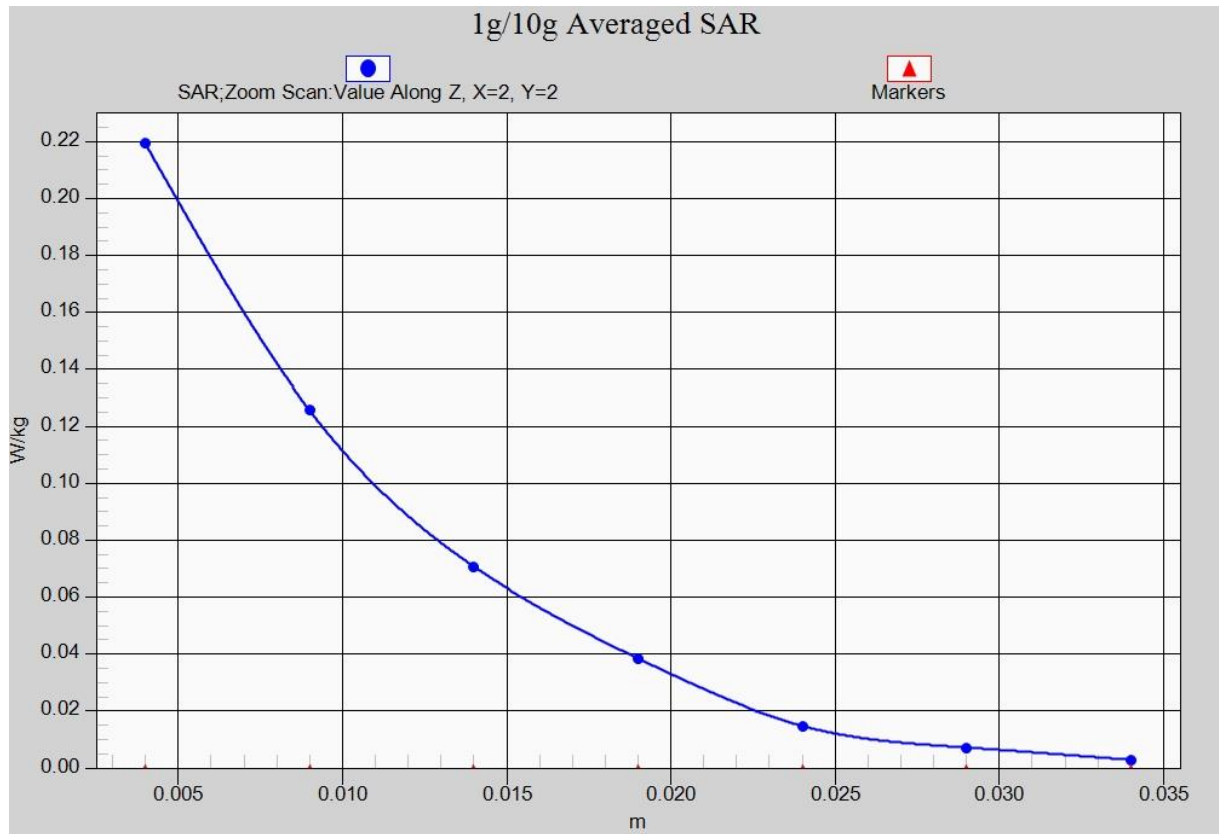


Fig. 18-1 Z-Scan at power reference point (2450 MHz)

Wifi 802.11a Left Tilt Channel 56

Date: 2018-10-29

Electronics: DAE4 Sn1555

Medium: Head 5 GHz

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.582$ mho/m; $\epsilon_r = 34.706$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: Wlan 5G Frequency: 5280 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(5.02, 5.02, 5.02)

Area Scan (111x201x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.29 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 7.676 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 4.57 W/kg

SAR(1 g) = 0.968 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 2.56 W/kg

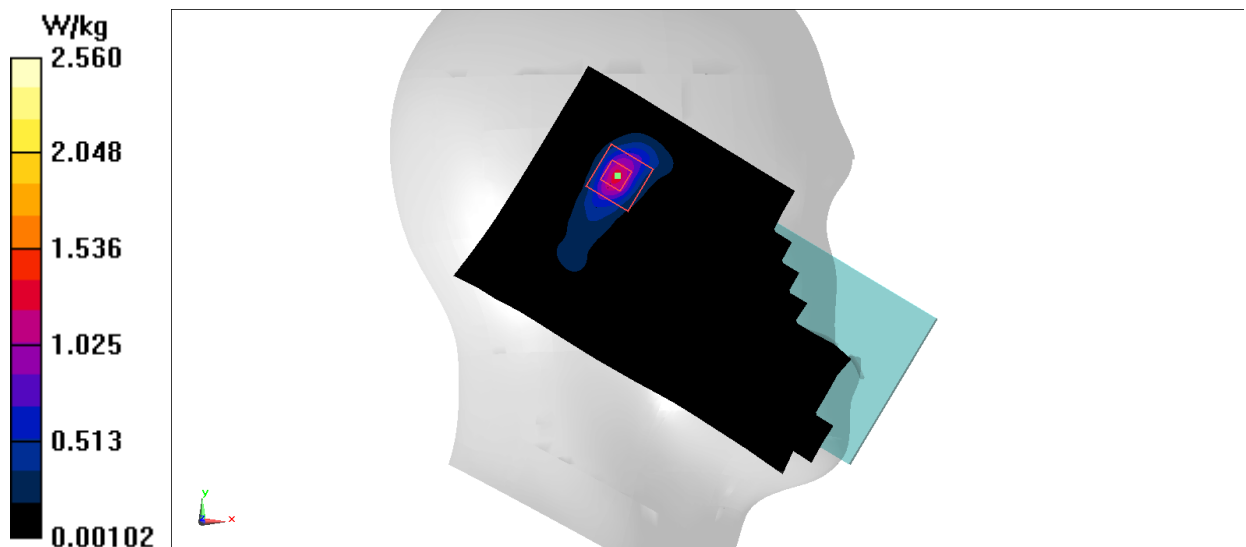


Fig.19 5GHz

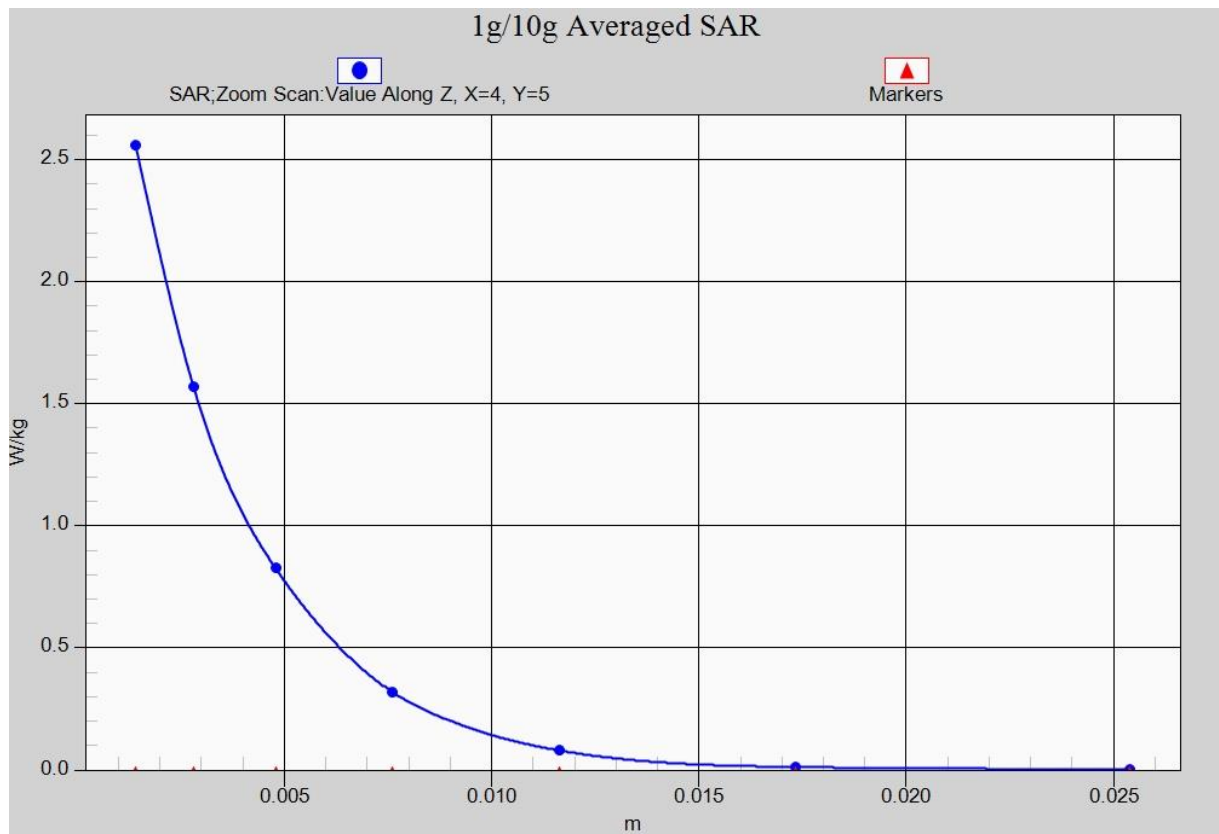


Fig. 19-1 Z-Scan at power reference point (5GHz)

Wifi 802.11a Top Edge Channel 56

Date: 2018-10-29

Electronics: DAE4 Sn1555

Medium: Body 5 GHz

Medium parameters used: $f = 5280$ MHz; $\sigma = 5.273$ mho/m; $\epsilon_r = 47.356$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: Wlan 5G Frequency: 5280 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(4.54, 4.54, 4.54)

Area Scan (161x91x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.297 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.061 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.415 W/kg

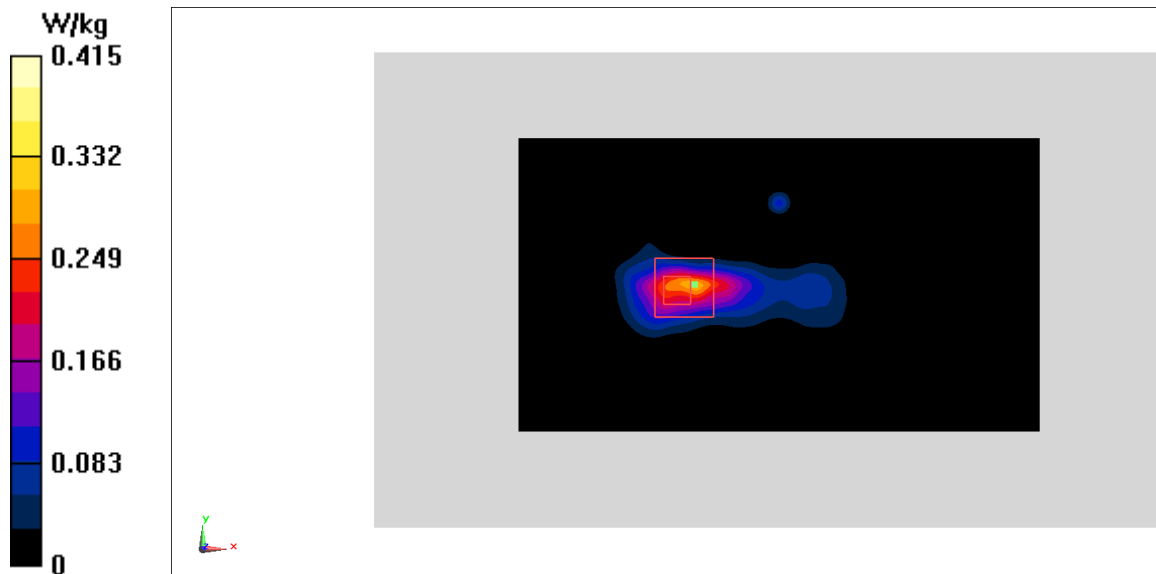


Fig.20 5GHz

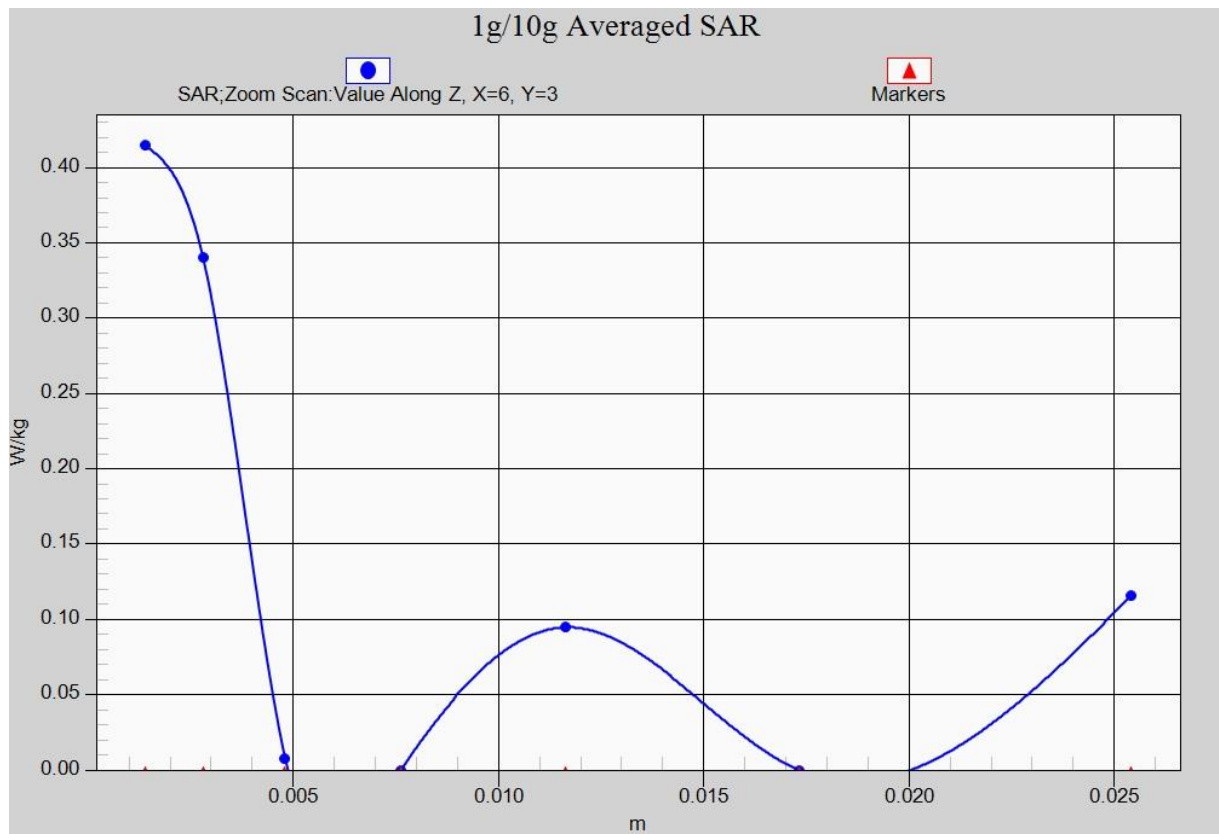


Fig. 20-1 Z-Scan at power reference point (5GHz)

ANNEX B System Verification Results

835MHz

Date: 2018-9-15

Electronics: DAE4 Sn1555

Medium: Head 850 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 41.86$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.09, 9.09, 9.09)

System Validation/Area Scan (61x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 53.95 V/m ; Power Drift = -0.04 dB

Fast SAR: SAR(1 g) = 2.32 W/kg ; SAR(10 g) = 1.50 W/kg

Maximum value of SAR (interpolated) = 2.52 W/kg


System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.95 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.05 W/kg

SAR(1 g) = 2.29 W/kg ; SAR(10 g) = 1.48 W/kg

Maximum value of SAR (measured) = 2.49 W/kg

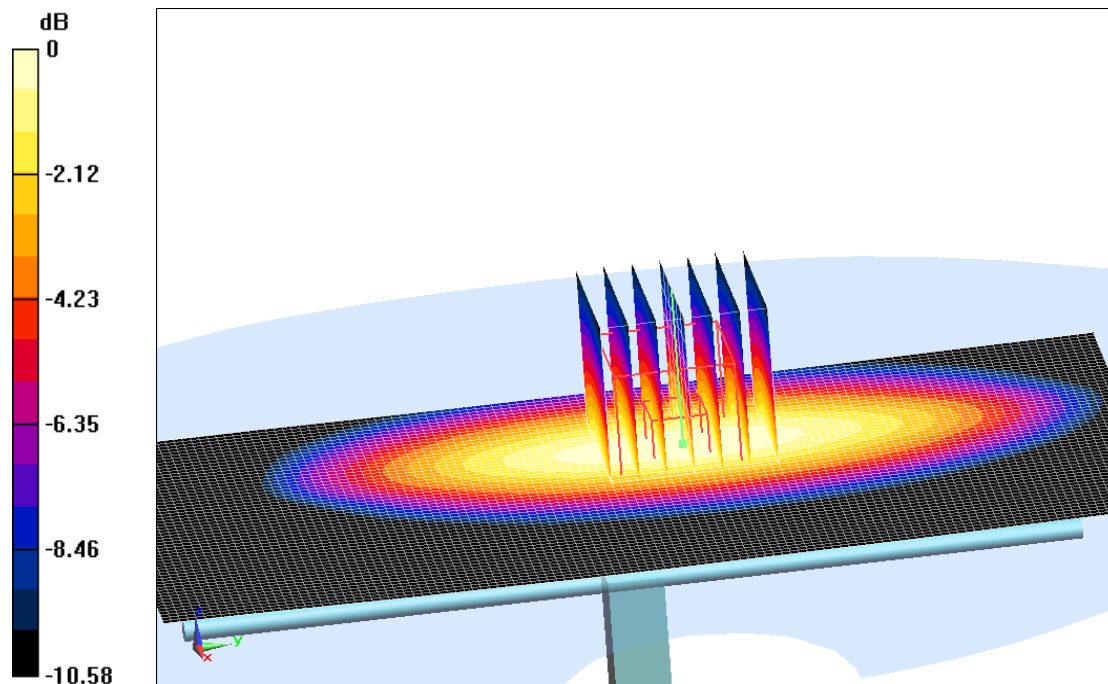

0 dB = 2.49 W/kg = 3.96 dBW/kg

Fig.B.1 validation 835MHz 250mW

835MHz

Date: 2018-9-15

Electronics: DAE4 Sn1555

Medium: Body 850 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.996 \text{ S/m}$; $\epsilon_r = 55.92$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.47, 9.47, 9.47)

System Validation /Area Scan (61x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 52.96 V/m ; Power Drift = 0.06 dB

Fast SAR: SAR(1 g) = 2.39 W/kg ; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (interpolated) = 2.72 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.96 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 2.43 W/kg ; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 2.76 W/kg

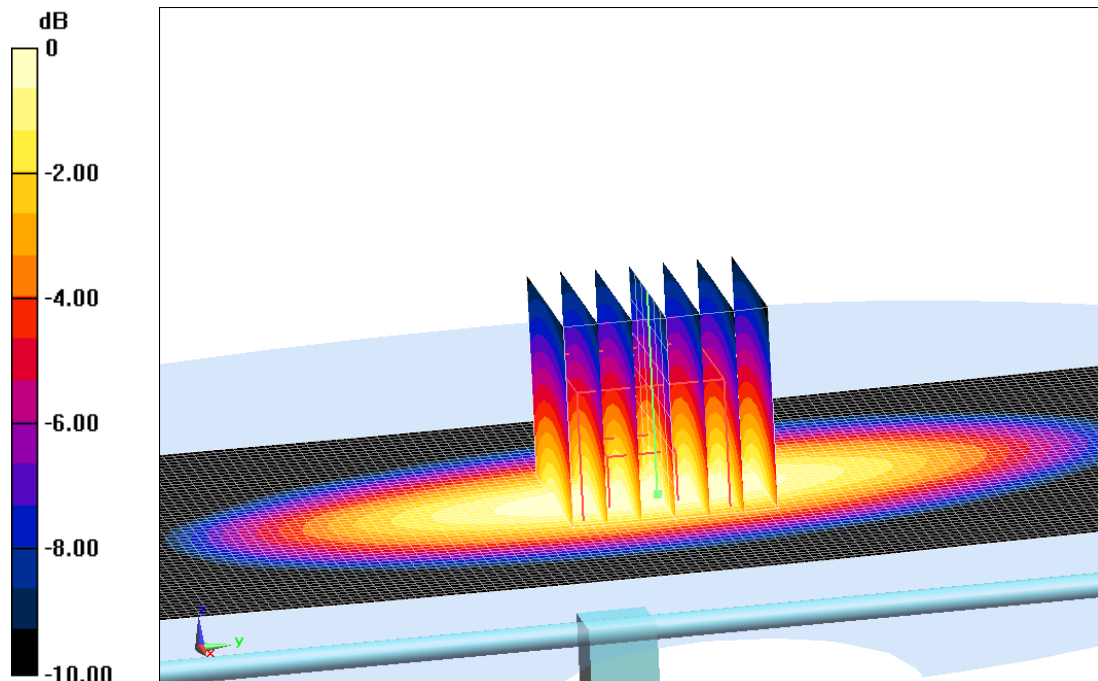

0 dB = 2.76 W/kg = 4.41 dBW/kg

Fig.B.2 validation 835MHz 250mW

1900MHz

Date: 2018-9-16

Electronics: DAE4 Sn1555

Medium: Head 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.421$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF (7.73, 7.73, 7.73)

System Validation /Area Scan(61x81x1):Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 89.9 V/m; Power Drift = 0.03 dB

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.31 W/kg

Maximum value of SAR (interpolated) = 12.3 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.9 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 17.79 W/kg

SAR(1 g) = 10 W/kg; SAR(10 g) = 5.24 W/kg

Maximum value of SAR (measured) = 12.2 W/kg

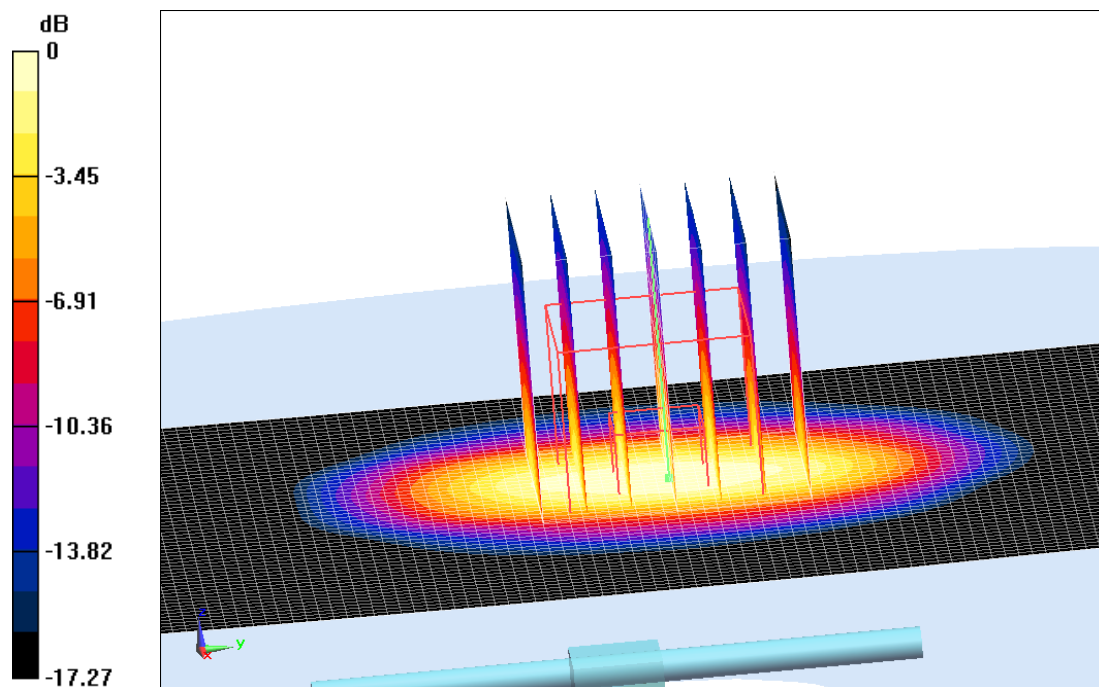

0 dB = 12.2 W/kg = 10.86 dBW/kg

Fig.B.3 validation 1900MHz 250mW

1900MHz

Date: 2018-9-16

Electronics: DAE4 Sn1555

Medium: Body 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.556$ S/m; $\epsilon_r = 52.61$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(7.53, 7.53, 7.53)

System Validation/Area Scan (81x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 94.6 V/m; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 10.5 W/kg; SAR(10 g) = 5.6 W/kg

Maximum value of SAR (interpolated) = 12.5 W/kg


System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.6 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 19.05 W/kg

SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.51 W/kg

Maximum value of SAR (measured) = 12.4 W/kg

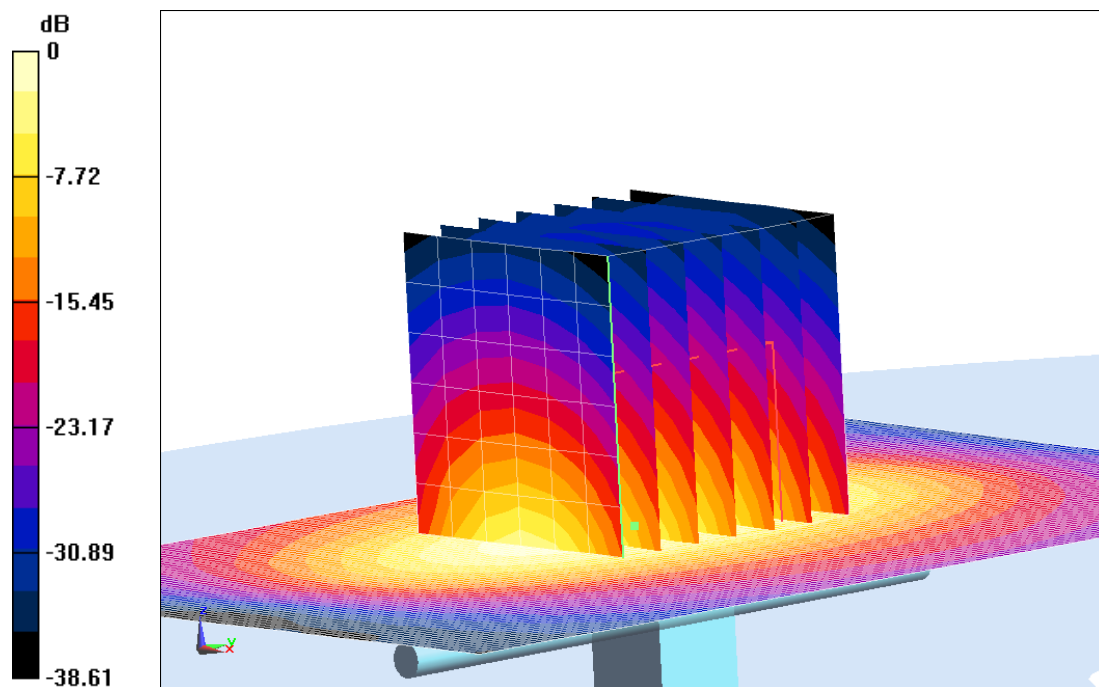

0 dB = 12.4 W/kg = 10.93 dB W/kg

Fig.B.4 validation 1900MHz 250mW

2450MHz

Date: 2018-9-17

Electronics: DAE4 Sn1555

Medium: Head 2450 MHz

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.846 \text{ mho/m}$; $\epsilon_r = 39.71$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 2450 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(6.95, 6.95, 6.95)

System Validation /Area Scan (61x81x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 85.12 V/m; Power Drift = 0.03 dB

SAR(1 g) = 13 W/kg; SAR(10 g) = 6.14 W/kg

Maximum value of SAR (interpolated) = 16.2 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 85.12 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 26.85 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.96 W/kg

Maximum value of SAR (measured) = 16 W/kg

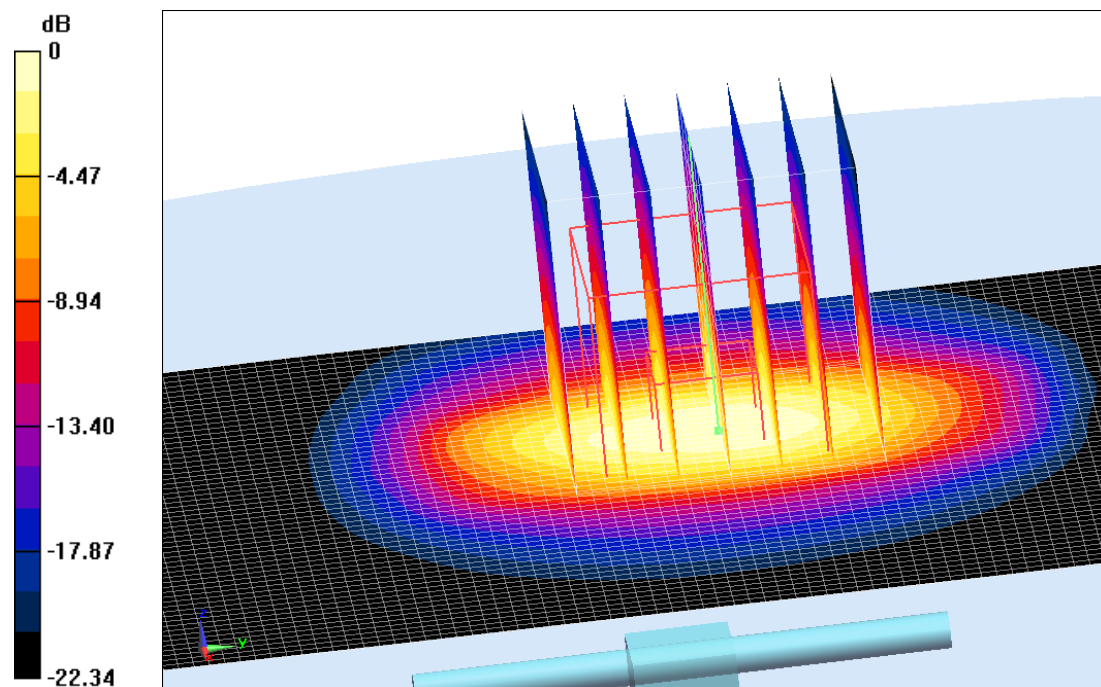

0 dB = 16 W/kg = 12.04 dBW/kg

Fig.B.5 validation 2450MHz 250mW

2450MHz

Date: 2018-9-17

Electronics: DAE4 Sn1555

Medium: Body 2450 MHz

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.975$ S/m; $\epsilon_r = 53.38$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 2450 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(7.13, 7.13, 7.13)

System Validation/Area Scan (81x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 87.28 V/m; Power Drift = -0.01 dB

SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.74 W/kg

Maximum value of SAR (interpolated) = 14.1 W/kg


System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.28 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 24.29 W/kg

SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.91 W/kg

Maximum value of SAR (measured) = 14.3 W/kg

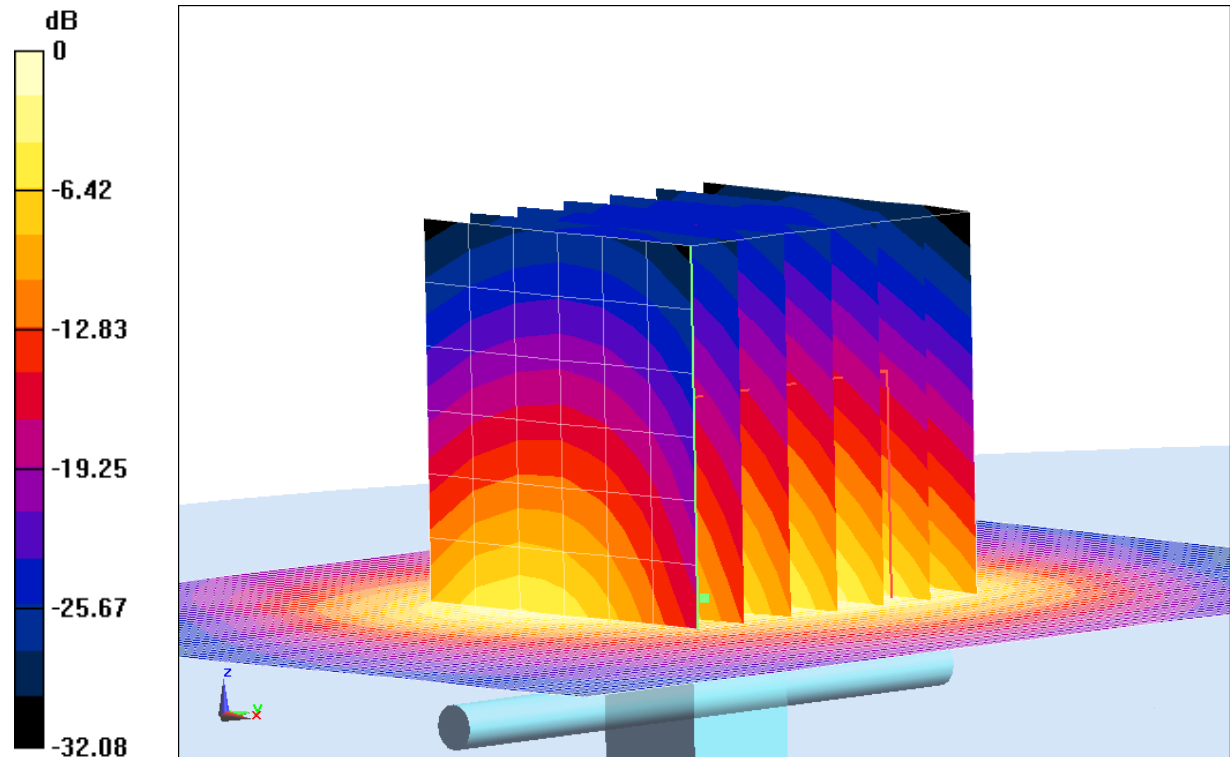

0 dB = 14.3 W/kg = 11.55 dB W/kg

Fig.B.6 validation 2450MHz 250mW

2600MHz

Date: 2018-9-18

Electronics: DAE4 Sn1555

Medium: Head 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.969$ mho/m; $\epsilon_r = 38.06$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 2600 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(6.92, 6.92, 6.92)

System Validation/Area Scan(81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 79.34 V/m; Power Drift = -0.02 dB

SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.52 W/kg

Maximum value of SAR (interpolated) = 22.1 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 79.34 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 30.74 W/kg

SAR(1 g) = 14.3 W/kg; SAR(10 g) = 6.35 W/kg

Maximum value of SAR (measured) = 21.9 W/kg

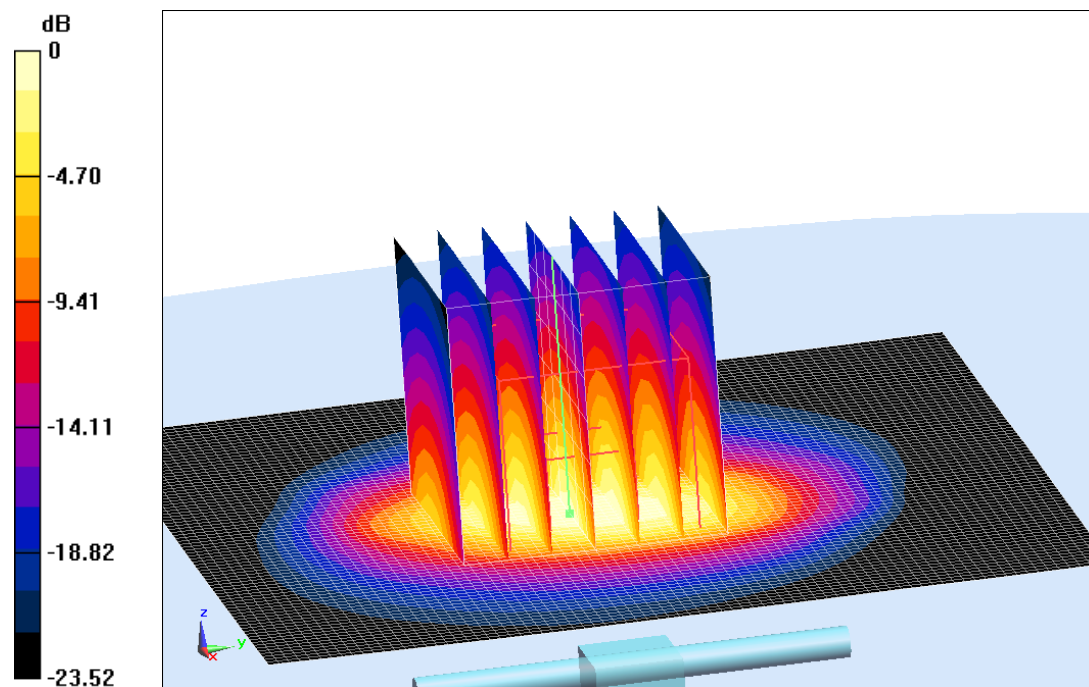

0 dB = 21.9 W/kg = 13.40 dBW/kg

Fig.B.7 validation 2600MHz 250mW

2600MHz

Date: 2018-9-18

Electronics: DAE4 Sn1555

Medium: Body 2600 MHz

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.215$ mho/m; $\epsilon_r = 51.45$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 2600 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(7.06, 7.06, 7.06)

System Validation /Area Scan(81x121x1):Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 80.15 V/m; Power Drift = 0.03 dB

Fast SAR: SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.37 W/kg

Maximum value of SAR (interpolated) = 22.2 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 80.15 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 30.75 W/kg

SAR(1 g) = 14 W/kg; SAR(10 g) = 6.29 W/kg

Maximum value of SAR (measured) = 22.1 W/kg

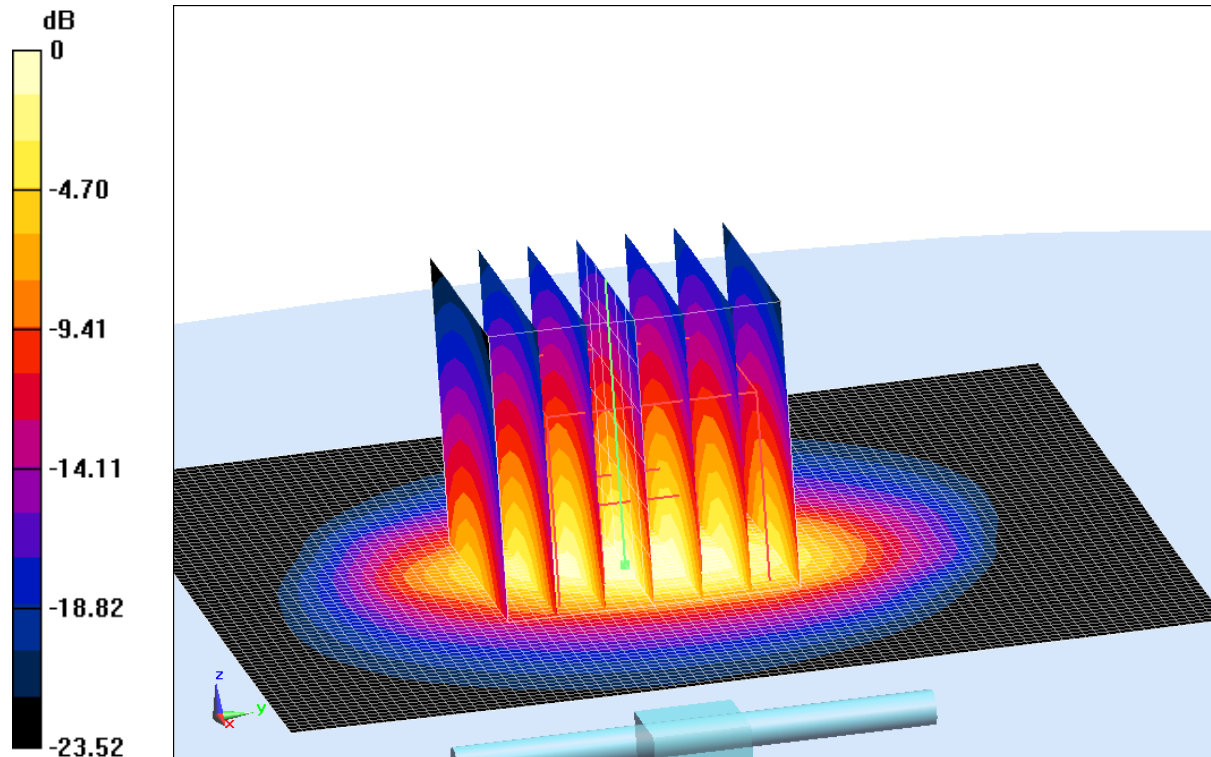

0 dB = 22.1 W/kg = 13.44 dB W/kg

Fig.B.8 validation 2600MHz 250mW

5250MHz

Date: 2018-10-29

Electronics: DAE4 Sn1555

Medium: Head 5 GHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.541$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 5250 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(5.02, 5.02, 5.02)

System Validation /Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 17.9 W/kg


System Validation /Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 57.19 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 31.28 W/kg

SAR(1 g) = 7.91 W/kg; SAR(10 g) = 2.27 W/kg

Maximum value of SAR (measured) = 18.1 W/kg

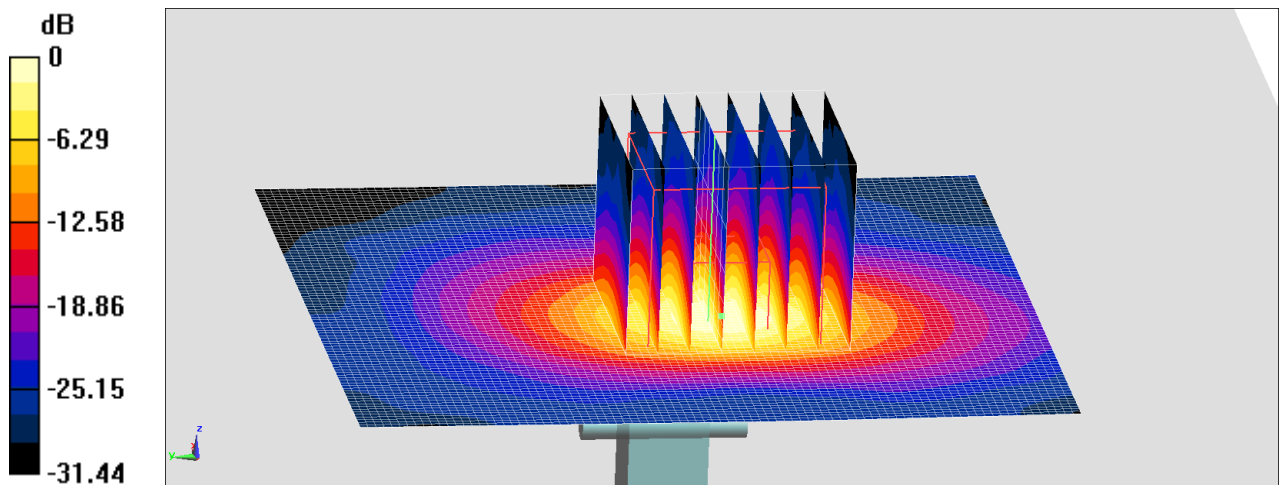

0 dB = 18.1 W/kg = 12.58 dBW/kg

Fig.B.9 validation 5250MHz 100mW

5250MHz

Date: 2018-10-29

Electronics: DAE4 Sn1555

Medium: Body 5 GHz

Medium parameters used: $f = 5250$ MHz; $\sigma = 5.231$ mho/m; $\epsilon_r = 47.43$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 5250 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(4.54, 4.54, 4.54)

System Validation /Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 18.1 W/kg


System Validation /Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 53.68 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 29.64 W/kg

SAR(1 g) = 7.39 W/kg; SAR(10 g) = 2.08 W/kg

Maximum value of SAR (measured) = 17.9 W/kg

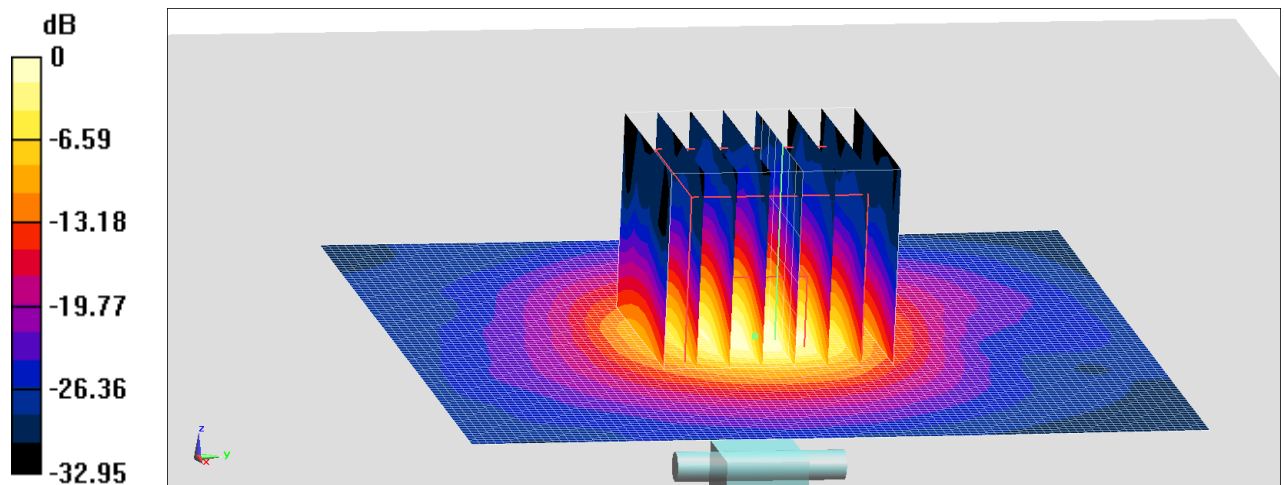

0 dB = 17.9 W/kg = 12.53 dBW/kg

Fig.B.10 validation 5250MHz 100mW

5600MHz

Date: 2018-10-29

Electronics: DAE4 Sn1555

Medium: Head 5 GHz

Medium parameters used: $f = 5600$ MHz; $\sigma = 4.922$ mho/m; $\epsilon_r = 34.14$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 5600 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(4.41, 4.41, 4.41)

System Validation /Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 19.8 W/kg


System Validation /Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 74.55 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 35.37 W/kg

SAR(1 g) = 8.29 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 19.6 W/kg

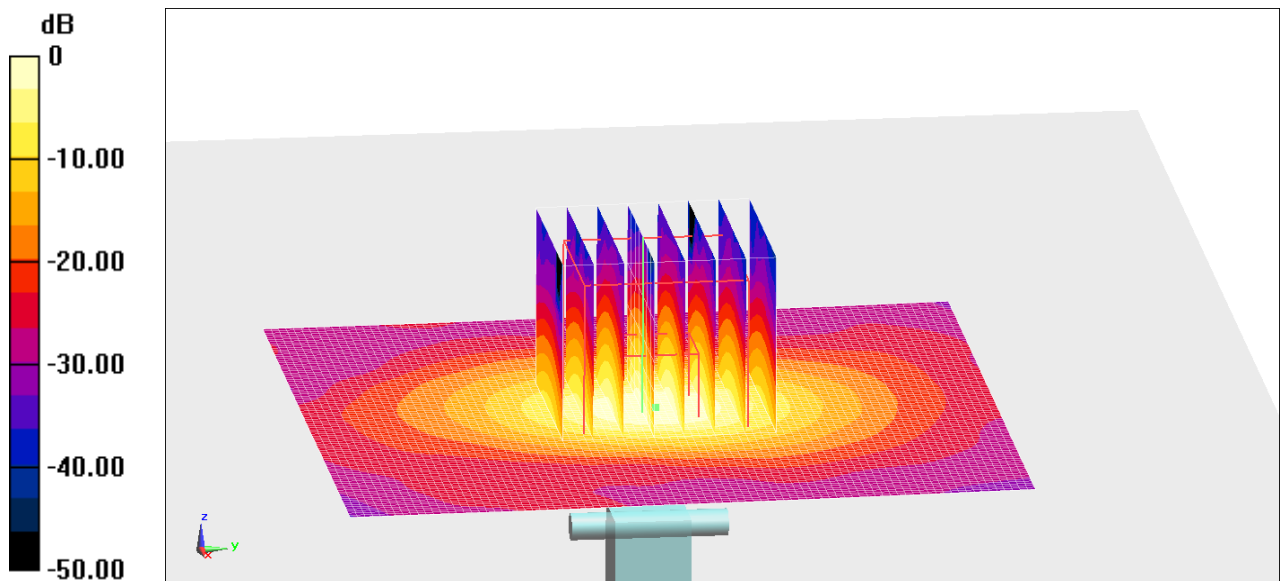

0 dB = 19.6 W/kg = 12.92 dBW/kg

Fig.B.11 validation 5600MHz 100mW

5600MHz

Date: 2018-10-29

Electronics: DAE4 Sn1555

Medium: Body 5 GHz

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.696$ mho/m; $\epsilon_r = 47.57$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 5600 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(4.00, 4.00, 4.00)

System Validation /Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 20.3 W/kg

System Validation /Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.1 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 37.19 W/kg

SAR(1 g) = 7.97 W/kg; SAR(10 g) = 2.25 W/kg

Maximum value of SAR (measured) = 20.1 W/kg

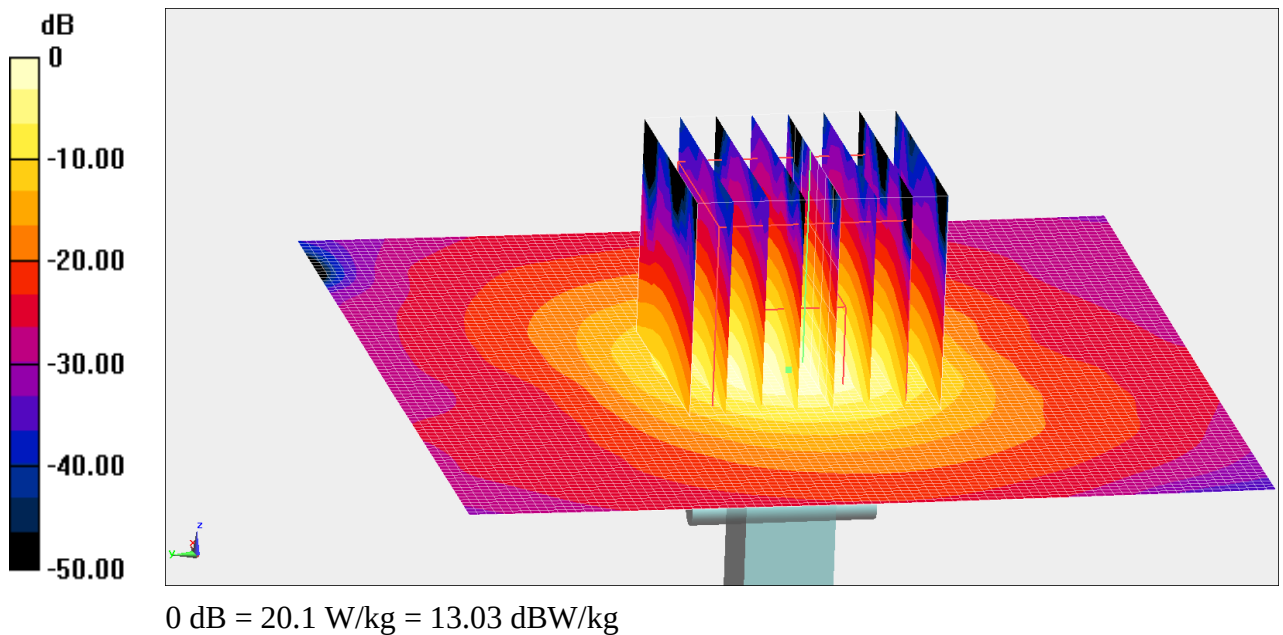


Fig.B.12 validation 5600MHz 100mW

5750MHz

Date: 2018-10-29

Electronics: DAE4 Sn1555

Medium: Head 5 GHz

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.078$ mho/m; $\epsilon_r = 34.87$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 5750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(4.47, 4.47, 4.47)

System Validation /Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 20.2 W/kg

System Validation /Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.09 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 40.08 W/kg

SAR(1 g) = 8.11 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 20.4 W/kg

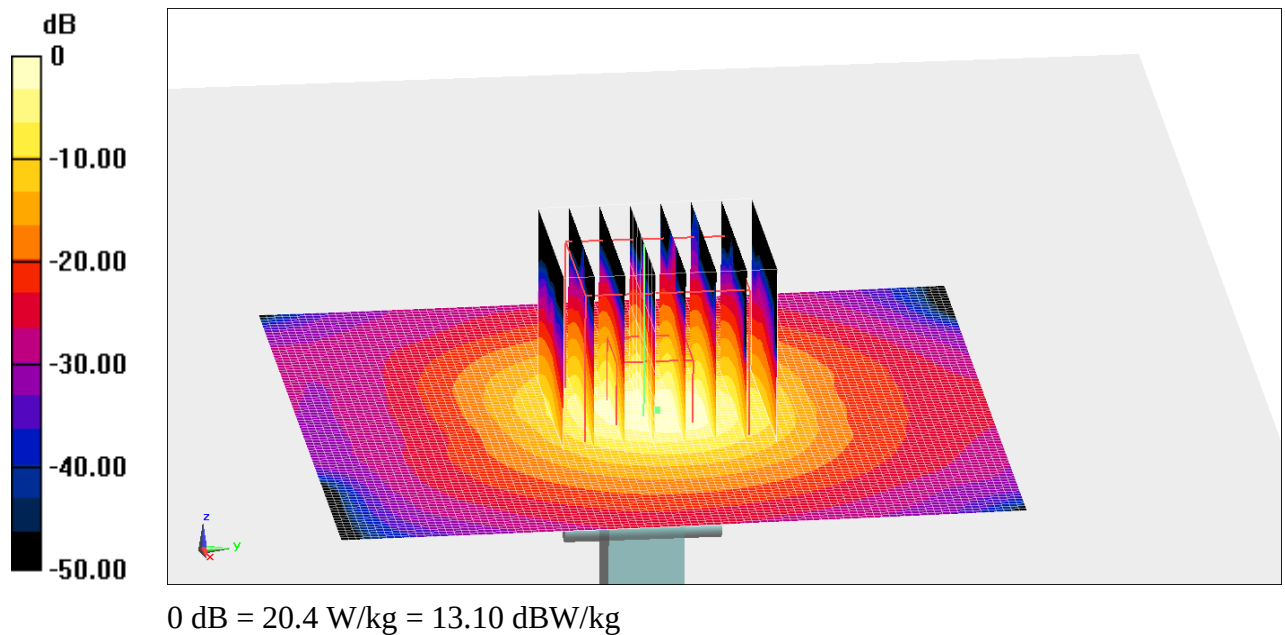


Fig.B.13 validation 5750MHz 100mW

5750MHz

Date: 2018-10-29

Electronics: DAE4 Sn1555

Medium: Body 5 GHz

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.912$ mho/m; $\epsilon_r = 47.31$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.9°C Liquid Temperature: 22.5°C

Communication System: CW Frequency: 5750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(3.98, 3.98, 3.98)

System Validation /Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 18.5 W/kg


System Validation /Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.02 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 35.51 W/kg

SAR(1 g) = 7.53 W/kg; SAR(10 g) = 2.08 W/kg

Maximum value of SAR (measured) = 18.7 W/kg

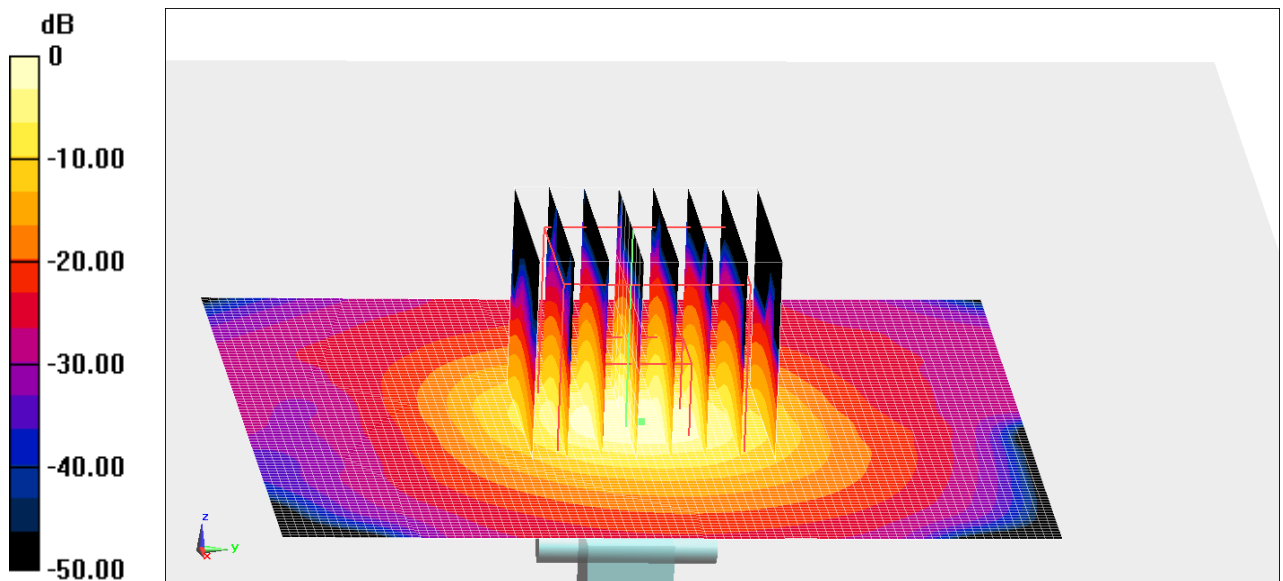

0 dB = 18.7 W/kg = 12.72 dBW/kg

Fig.B.14 validation 5750MHz 100mW

The SAR system verification must be required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR.


Table B.1 Comparison between area scan and zoom scan for system verification

Date	Band	Position	Area scan (1g)	Zoom scan (1g)	Drift (%)
2018-9-15	835	Head	2.32	2.29	1.31
	835	Body	2.39	2.43	-1.65
2018-9-16	1900	Head	10.1	10	1.00
	1900	Body	10.5	10.4	0.96
2018-9-17	2450	Head	13	12.8	1.56
	2450	Body	12.5	12.7	-1.57
2018-9-18	2600	Head	14.5	14.3	1.40
	2600	Body	14.1	14	0.71

ANNEX C SAR Measurement Setup

C.1 Measurement Set-up

The Dasy4 or DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

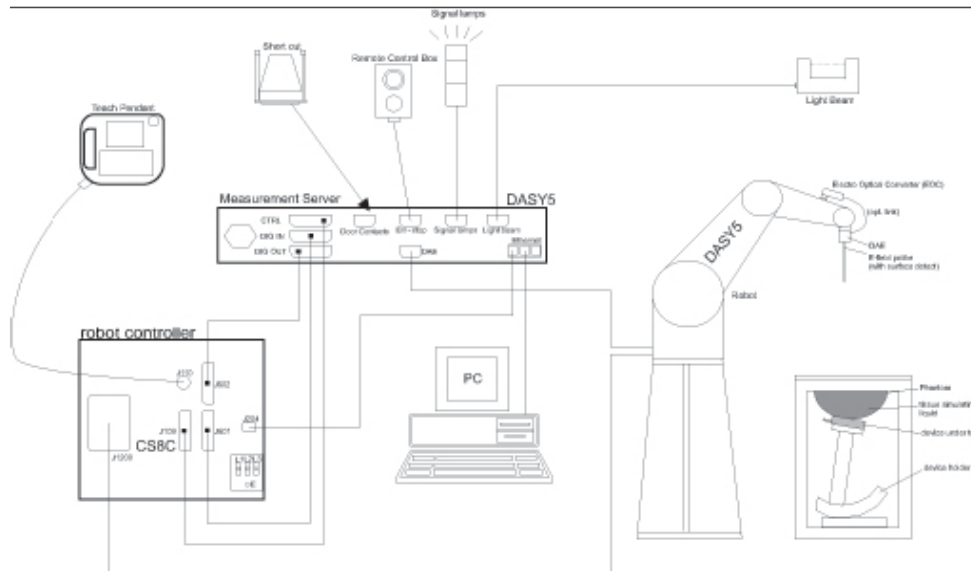

Picture C.1 SAR Lab Test Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY4 or DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

C.2 Dasy4 or DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multifiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 or DASY5 software reads the reflection during a software approach and looks for the maximum using 2nd order curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications:

Model:	ES3DV3, EX3DV4
Frequency	10MHz — 6.0GHz(EX3DV4)
Range:	10MHz — 4GHz(ES3DV3)
Calibration:	In head and body simulating tissue at Frequencies from 835 up to 5800MHz
Linearity:	± 0.2 dB(30 MHz to 6 GHz) for EX3DV4 ± 0.2 dB(30 MHz to 4 GHz) for ES3DV3
DynamicRange:	10 mW/kg — 100W/kg
Probe Length:	330 mm
Probe Tip	
Length:	20 mm
Body Diameter:	12 mm
Tip Diameter:	2.5 mm (3.9 mm for ES3DV3)
Tip-Center:	1 mm (2.0mm for ES3DV3)
Application:	SAR Dosimetry Testing Compliance tests of mobile phones Dosimetry in strong gradient fields

Picture C.3E-field Probe



Picture C.2Near-field Probe



C.3 E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed

in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

C.4 Other Test Equipment

C.4.1 Data Acquisition Electronics(DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



PictureC.4: DAE

C.4.2 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90XL; DASY5: RX160L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchron motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Picture C.5 DASY 4



Picture C.6 DASY 5

C.4.3 Measurement Server

The Measurement server is based on a PC/104 CPU board with CPU (dasy4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128MB), RAM (DASY4: 64 MB, DASY5: 128MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Picture C.7 Server for DASY 4



Picture C.8 Server for DASY 5

C.4.4 Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.


The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.



Picture C.9-1: Device Holder

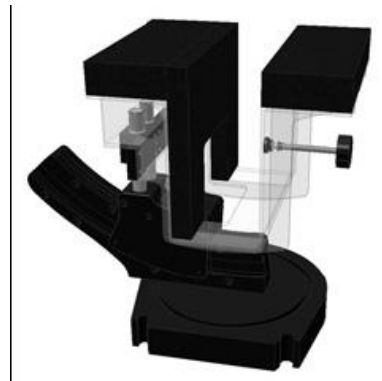

Picture C.9-2: Laptop Extension Kit

C.4.5 Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness: 2 ± 0.2 mm

Filling Volume: Approx. 25 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Available: Special




Picture C.10: SAM Twin Phantom

ANNEX D Position of the wireless device in relation to the phantom


D.1 General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

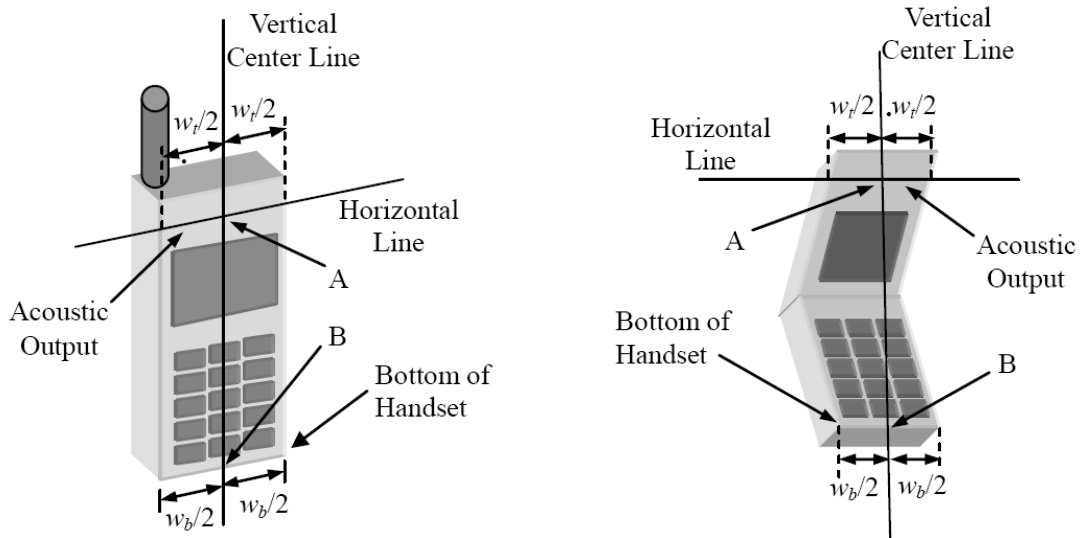


- w_t Width of the handset at the level of the acoustic
- w_b Width of the bottom of the handset
- A Midpoint of the width w_t of the handset at the level of the acoustic output
- B Midpoint of the width w_b of the bottom of the handset

Picture D.1-a Typical “fixed” case handset Picture D.1-b Typical “clam-shell” case handset

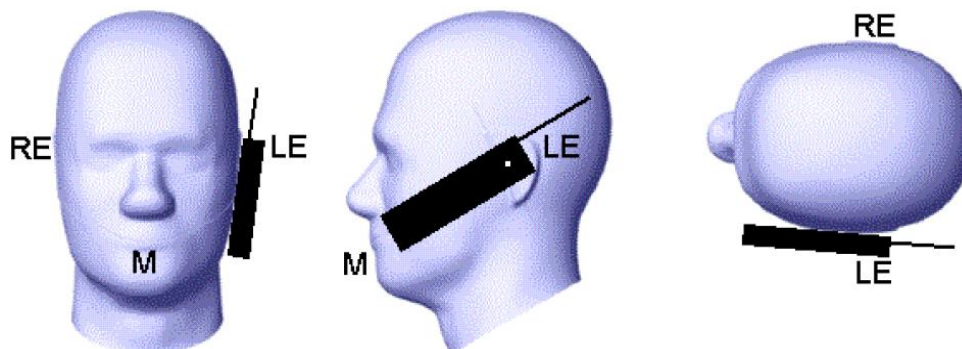


Picture D.2 Cheek position of the wireless device on the left side of SAM

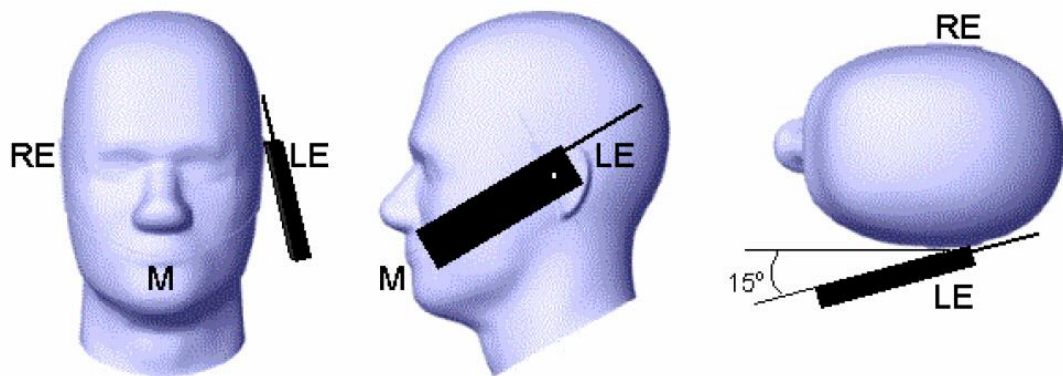

Picture D.3 Tilt position of the wireless device on the left side of SAM

D.2 Body-worn device

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

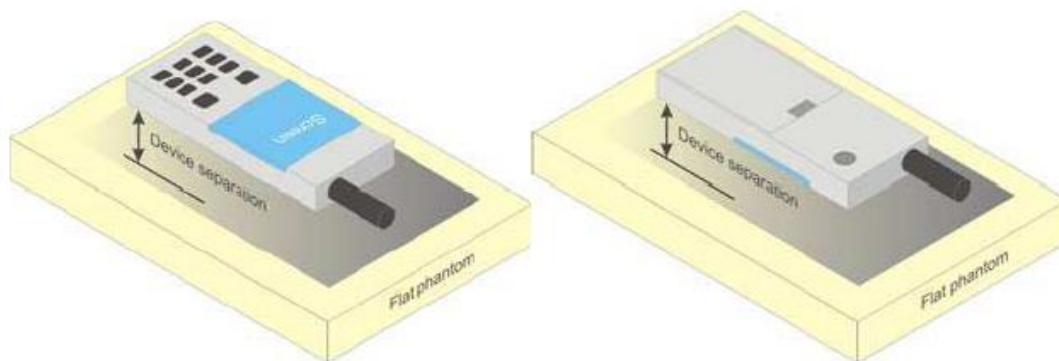


Picture D.4 Test positions for body-worn devices

D.3 Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions, tests shall be performed for all antenna positions specified. Picture 8.5 show positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat phantom.

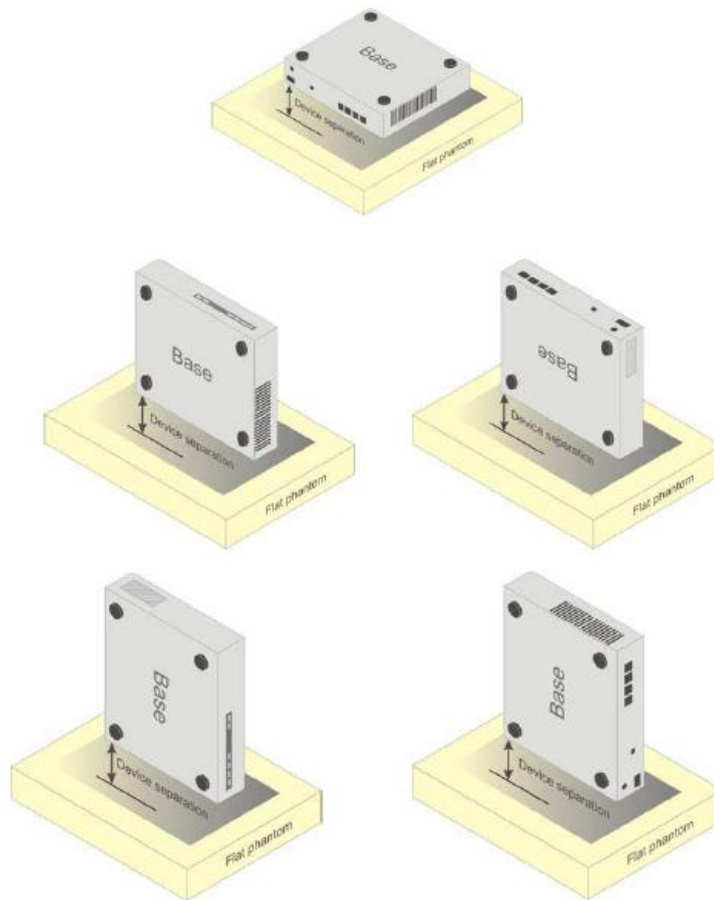

Picture D.5 Test positions for desktop devices

D.4 DUT Setup Photos



Picture D.6

ANNEX E Equivalent Media Recipes

The liquid used for the frequency range of 800-3000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table E.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528 and IEC 62209.

TableE.1: Composition of the Tissue Equivalent Matter

Frequency (MHz)	835Head	835Body	1900 Head	1900 Body	2450 Head	2450 Body	5800 Head	5800 Body
Ingredients (% by weight)								
Water	41.45	52.5	55.242	69.91	58.79	72.60	65.53	65.53
Sugar	56.0	45.0	\	\	\	\	\	\
Salt	1.45	1.4	0.306	0.13	0.06	0.18	\	\
Preventol	0.1	0.1	\	\	\	\	\	\
Cellulose	1.0	1.0	\	\	\	\	\	\
Glycol Monobutyl	\	\	44.452	29.96	41.15	27.22	\	\
Diethylenglycol monohexylether	\	\	\	\	\	\	17.24	17.24
Triton X-100	\	\	\	\	\	\	17.24	17.24
Dielectric Parameters Target Value	$\epsilon=41.5$ $\sigma=0.90$	$\epsilon=55.2$ $\sigma=0.97$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=53.3$ $\sigma=1.52$	$\epsilon=39.2$ $\sigma=1.80$	$\epsilon=52.7$ $\sigma=1.95$	$\epsilon=35.3$ $\sigma=5.27$	$\epsilon=48.2$ $\sigma=6.00$

Note: There are a little adjustment respectively for 750, 1750, 2600, 5200, 5300 and 5600 based on the recipe of closest frequency in table E.1.

ANNEX F System Validation

The SAR system must be validated against its performance specifications before it is deployed. When SAR probes, system components or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such components.

Table F.1: System Validation for 7514

Probe SN.	Liquid name	Validation date	Frequency point	Status (OK or Not)
7514	Head 750MHz	Sep.10,2018	750 MHz	OK
7514	Head 850MHz	Sep.10,2018	835 MHz	OK
7514	Head 900MHz	Sep.10,2018	900 MHz	OK
7514	Head 1750MHz	Sep.10,2018	1750 MHz	OK
7514	Head 1810MHz	Sep.10,2018	1810 MHz	OK
7514	Head 1900MHz	Sep.11,2018	1900 MHz	OK
7514	Head 2000MHz	Sep.11,2018	2000 MHz	OK
7514	Head 2100MHz	Sep.11,2018	2100 MHz	OK
7514	Head 2300MHz	Sep.11,2018	2300 MHz	OK
7514	Head 2450MHz	Sep.11,2018	2450 MHz	OK
7514	Head 2600MHz	Sep.12,2018	2600 MHz	OK
7514	Head 3500MHz	Sep.12,2018	3500 MHz	OK
7514	Head 3700MHz	Sep.12,2018	3700 MHz	OK
7514	Head 5200MHz	Sep.12,2018	5250 MHz	OK
7514	Head 5500MHz	Sep.12,2018	5600 MHz	OK
7514	Head 5800MHz	Sep.12,2018	5800 MHz	OK
7514	Body 750MHz	Sep.12,2018	750 MHz	OK
7514	Body 850MHz	Sep.9,2018	835 MHz	OK
7514	Body 900MHz	Sep.9,2018	900 MHz	OK
7514	Body 1750MHz	Sep.9,2018	1750 MHz	OK
7514	Body 1810MHz	Sep.9,2018	1810 MHz	OK
7514	Body 1900MHz	Sep.9,2018	1900 MHz	OK
7514	Body 2000MHz	Sep.13,2018	2000 MHz	OK
7514	Body 2100MHz	Sep.13,2018	2100 MHz	OK
7514	Body 2300MHz	Sep.13,2018	2300 MHz	OK
7514	Body 2450MHz	Sep.13,2018	2450 MHz	OK
7514	Body 2600MHz	Sep.13,2018	2600 MHz	OK
7514	Body 3500MHz	Sep.8,2018	3500 MHz	OK
7514	Body 3700MHz	Sep.8,2018	3700 MHz	OK
7514	Body 5200MHz	Sep.8,2018	5250 MHz	OK
7514	Body 5500MHz	Sep.8,2018	5600 MHz	OK
7514	Body 5800MHz	Sep.8,2018	5800 MHz	OK