



FCC 47 CFR PART 15 SUBPART C

**CERTIFICATION TEST REPORT
FOR
GSM/WCDMA/CDMA + BLUETOOTH + DTS/UNII a/b/g/n RADIO MODULE**

MODEL NUMBER: QM8626

FCC ID: J9CQM8626

REPORT NUMBER: 15U19820-E3, Revised B

ISSUE DATE: AUGUST 26, 2015

Prepared for
**QUALCOMM TECHNOLOGIES, INC.
5775 MOREHOUSE DRIVE
SAN DIEGO
CA., 92121, U.S.A.**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Issue			
Rev.	Date	Revisions	Revised By
--	05/08/15	Initial Issue	CHOON OOI
A	08/10/15	Revised Antenna Gain and Setup Picture	CHOON OOI
B	08/26/15	Updated Conducted Emission Photo	CHOON OOI

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. WORST-CASE CONFIGURATION AND MODE.....	9
5.5. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. SUMMARY TABLE	12
8. ANTENNA PORT TEST RESULTS	13
8.1. 20 dB AND 99% BANDWIDTH	13
8.1.1. BASIC DATA RATE GFSK MODULATION	13
8.1.2. ENHANCED DATA RATE 8PSK MODULATION	13
20 dB AND 99% BANDWIDTH PLOTS.....	14
8.2. HOPPING FREQUENCY SEPARATION	26
8.3. NUMBER OF HOPPING CHANNELS.....	28
8.4. AVERAGE TIME OF OCCUPANCY.....	33
8.5. OUTPUT POWER.....	41
8.5.1. BASIC DATA RATE GFSK MODULATION	41
8.5.2. ENHANCED DATA RATE 8PSK MODULATION	41
8.5.3. OUTPUT POWER PLOTS.....	42
8.6. AVERAGE POWER.....	48
8.6.1. BASIC DATA RATE GFSK MODULATION	49
8.6.2. DATA RATE PI/4-DQPSK MODULATION	49
8.6.3. ENHANCED DATA RATE 8PSK MODULATION	49
8.7. CONDUCTED SPURIOUS EMISSIONS.....	50
8.7.1. BASIC DATA RATE GFSK MODULATION	51
ENHANCED DATA RATE 8PSK MODULATION	59

9. RADIATED TEST RESULTS.....	67
9.1. LIMITS AND PROCEDURE	67
9.2. TRANSMITTER ABOVE 1 GHz	69
9.2.1. BASIC DATA RATE GFSK MODULATION	69
9.2.2. ENHANCED DATA RATE 8PSK MODULATION	82
9.3. WORST-CASE BELOW 1 GHz.....	95
10. AC POWER LINE CONDUCTED EMISSIONS	98
11. SETUP PHOTOS	101

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: QUALCOMM TECHNOLOGIES, INC.
EUT DESCRIPTION: GSM/WCDMA/CDMA + BLUETOOTH + DTS/UNII a/b/g/n RADIO
MODULE
MODEL: QM8626
SERIAL NUMBER: N10KRK5FL
DATE TESTED: JANUARY 28 – APRIL 13, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:

Tested By:



CHOON OOI
PROJECT LEAD
UL Verification Services Inc.

CHARLES VERGONIO
WiSE LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/CDMA + BLUETOOTH + DTS/UNII a/b/g/n radio module.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	9.20	8.32
2402 - 2480	Enhanced 8PSK	10.53	11.30

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an antenna, with a maximum gain of 1.7 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	N/A	N/A	N/A	N/A

I/O CABLES


I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.

EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

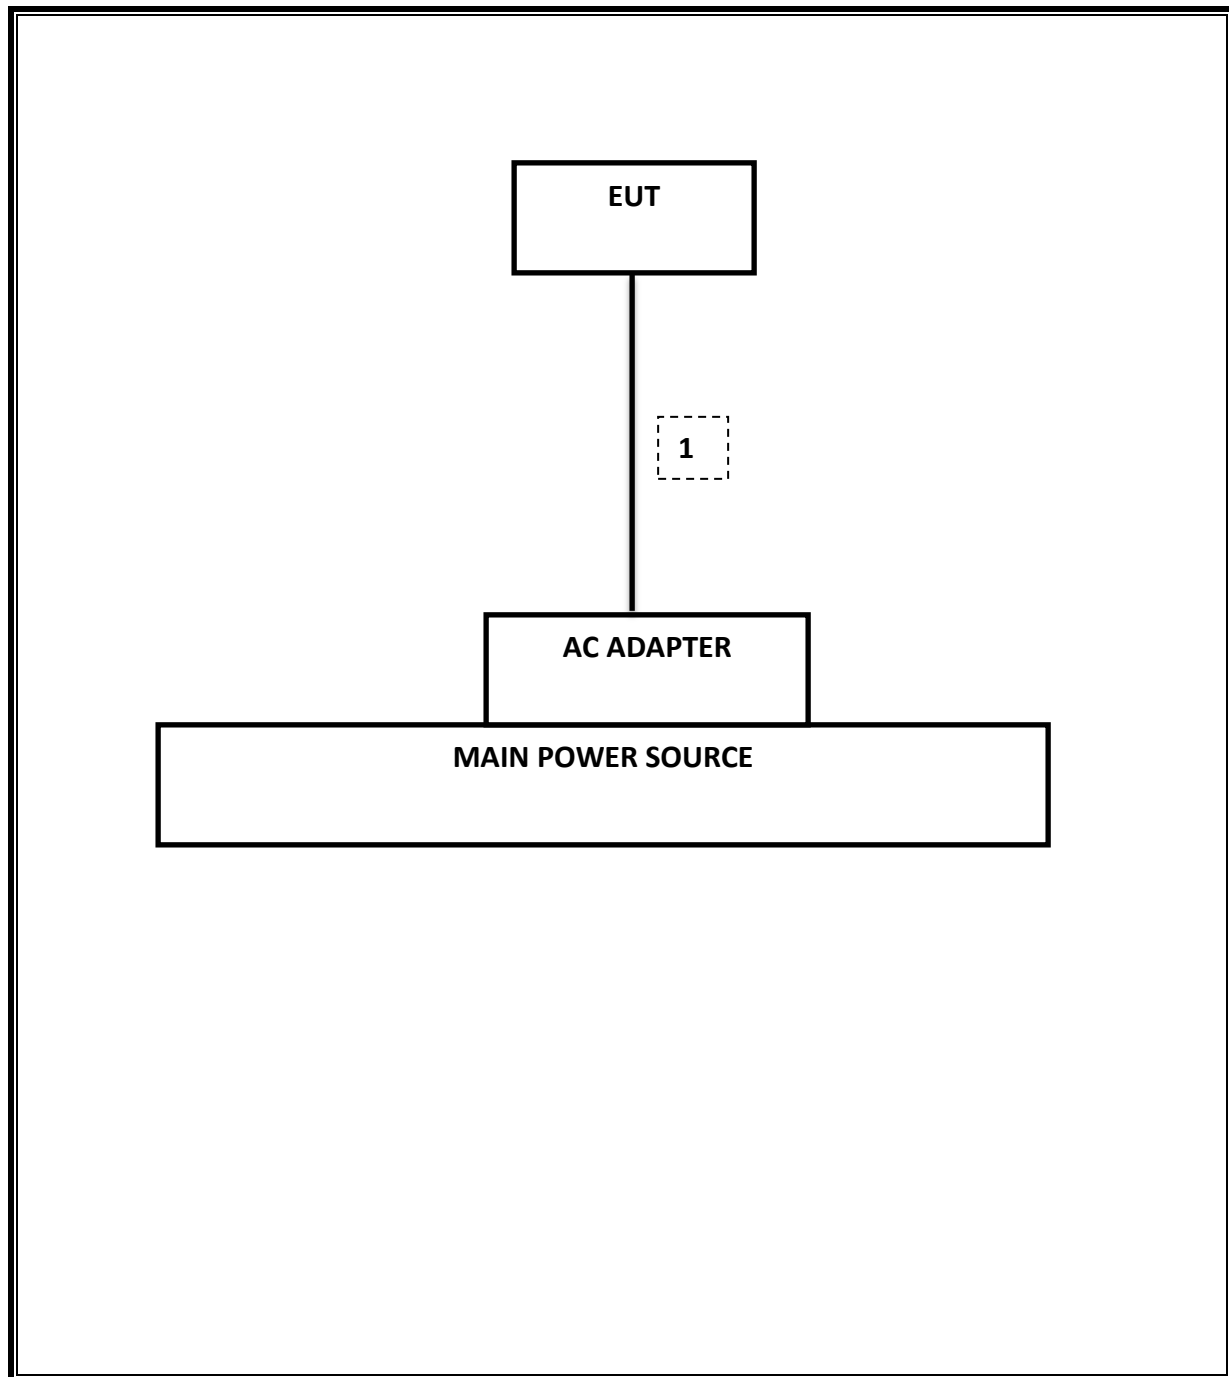

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/16
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/15
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/16
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/15
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/15
CBT Bluetooth Tester	R & S	CBT	None	07/12/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/16
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	Occupied Band width (99%)	N/A	Conducted	Pass	1.1935 MHz
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-31.50 dBm
15.247 (b)(1)	TX conducted output power	<21dBm		Pass	10.53 dBm
15.247 (a)(1)	Hopping frequency separation	> 25KHz		Pass	0.999 MHz
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 0.4sec		Pass	0.27625 s
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	Pass	56.93dBuV(PK)
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m		Pass	40.09 dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

8.1.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.933	0.869
Middle	2441	0.934	0.91
High	2480	0.932	0.914
Worst		0.934	0.914


8.1.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.271	1.1935
Middle	2441	1.271	1.1867
High	2480	1.261	1.1802
Worst		1.271	1.1935


20 dB AND 99% BANDWIDTH PLOTS

GFSK 20 dB BANDWIDTH


LOW CHANNEL

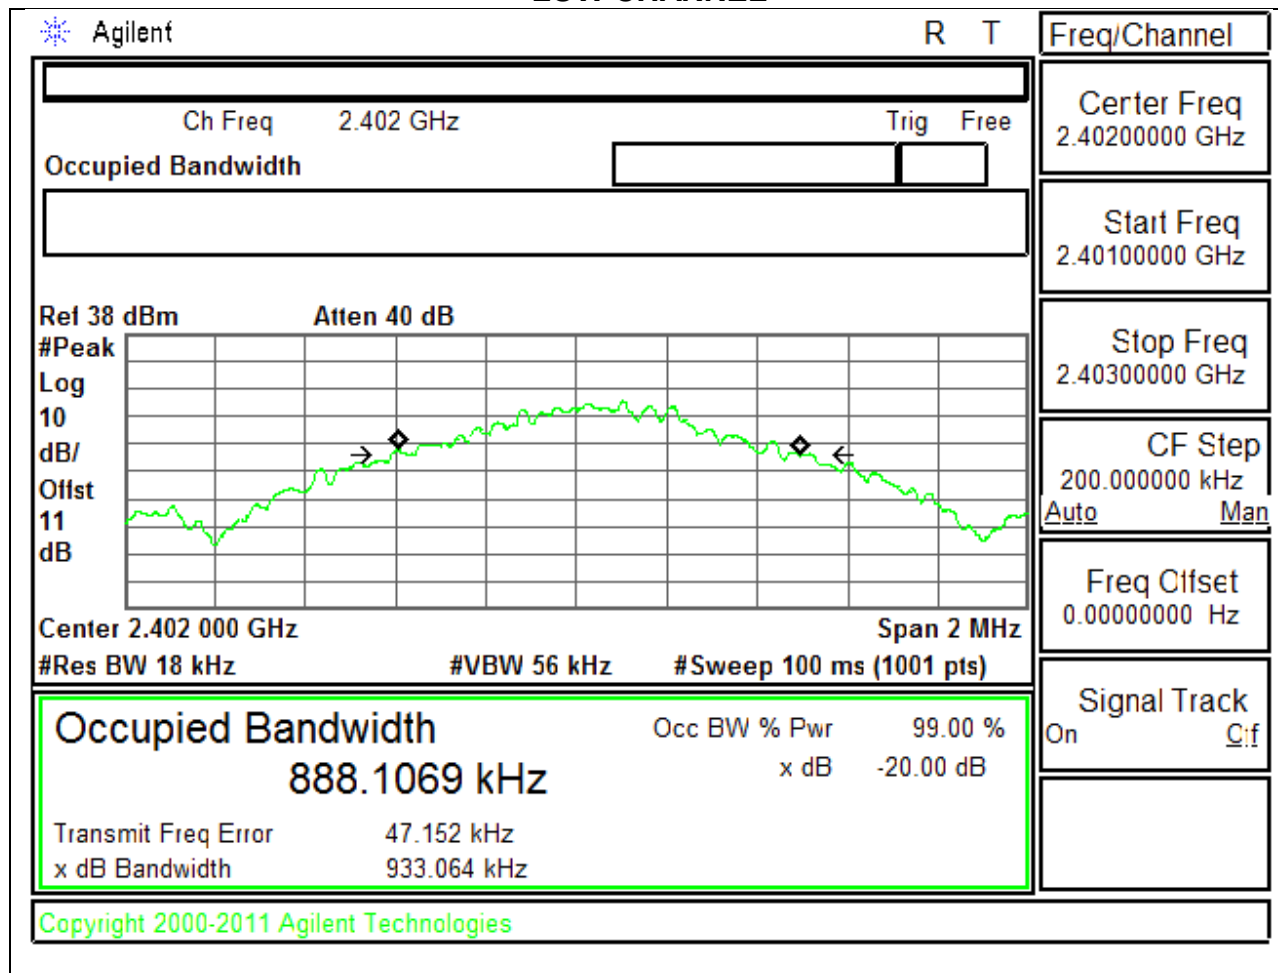

MID CHANNEL

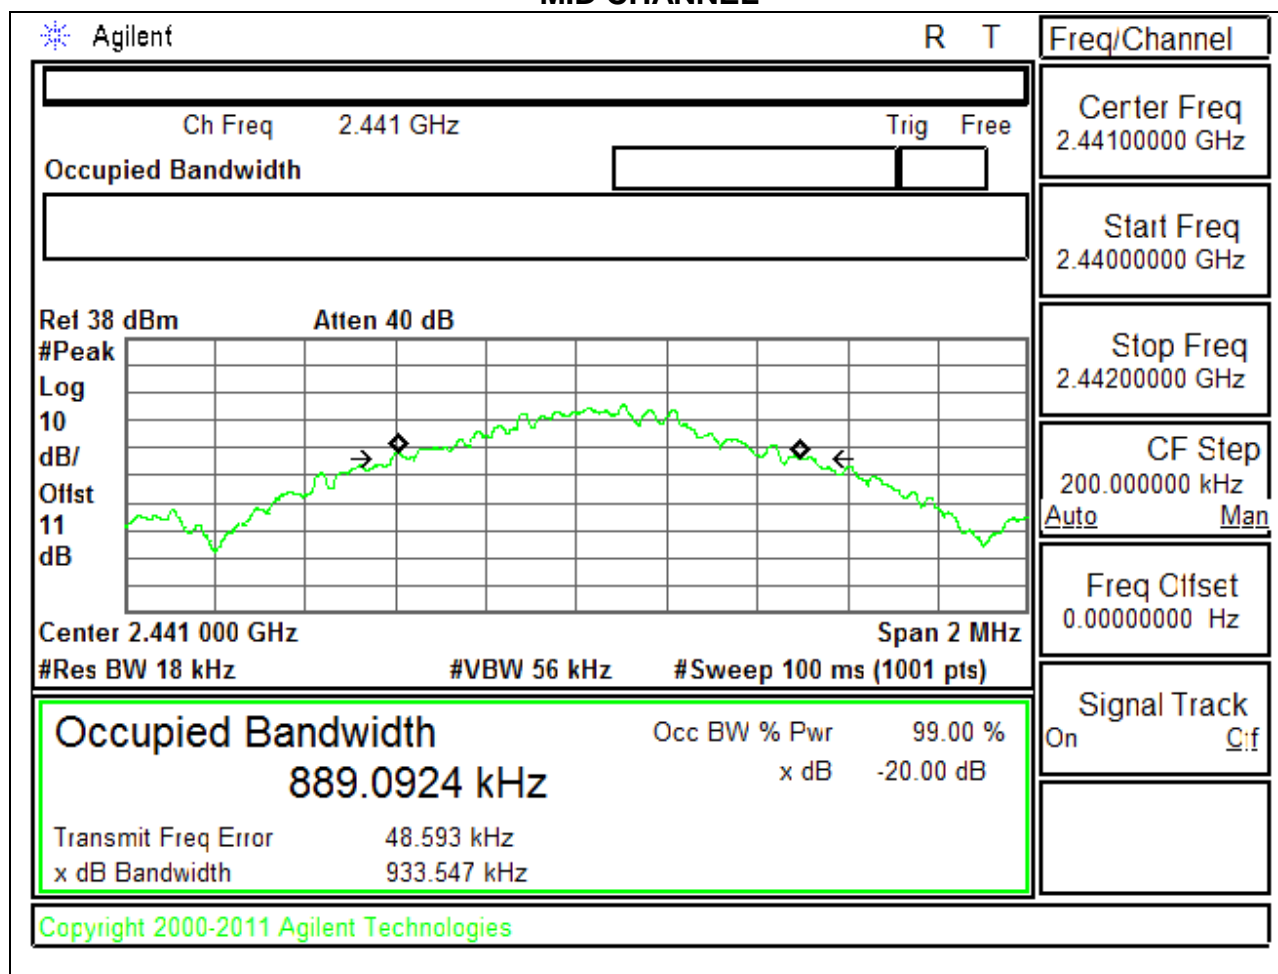


HIGH CHANNEL

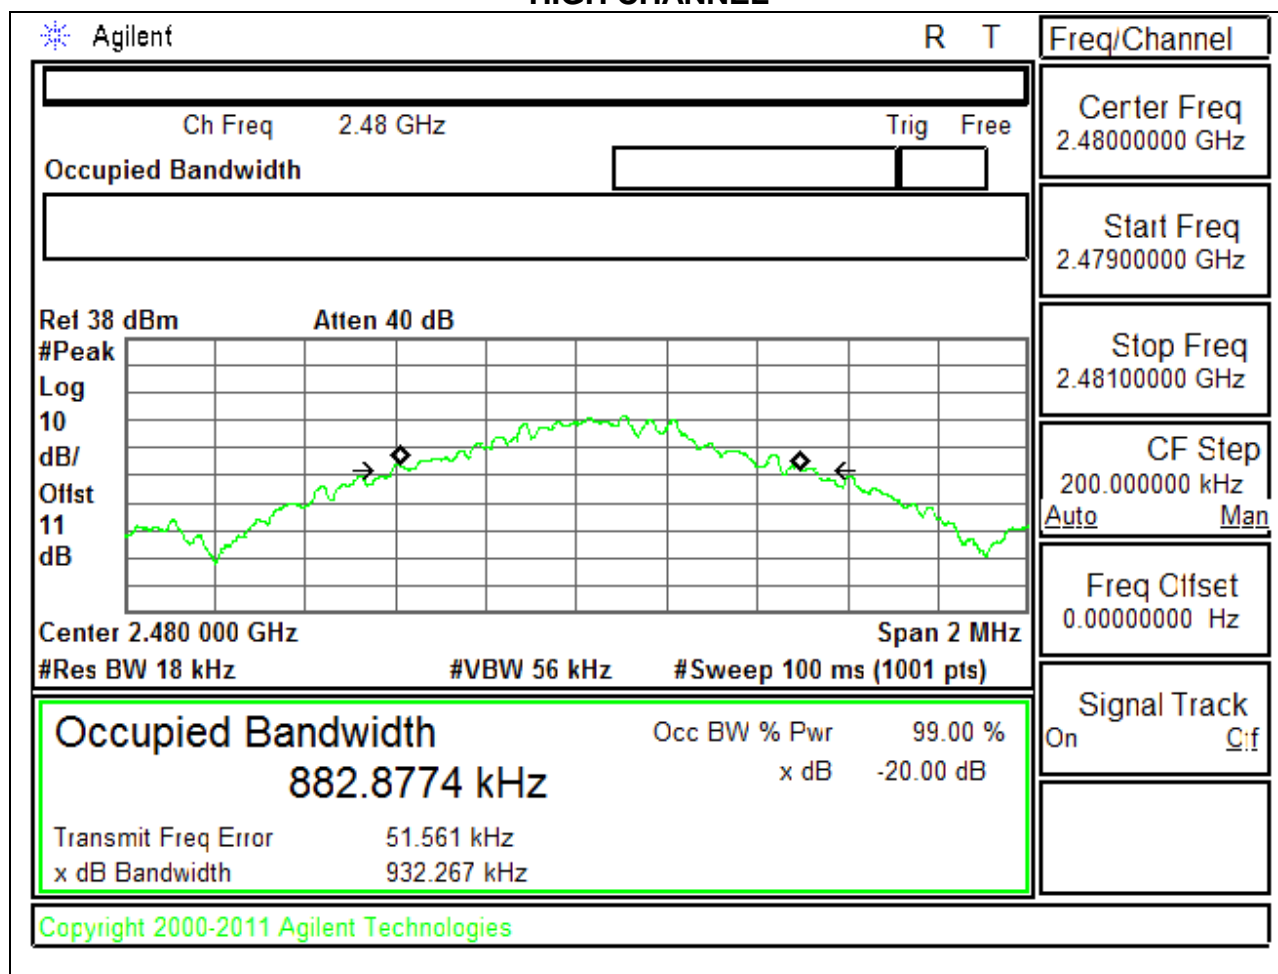


GFSK 99% BANDWIDTH


LOW CHANNEL

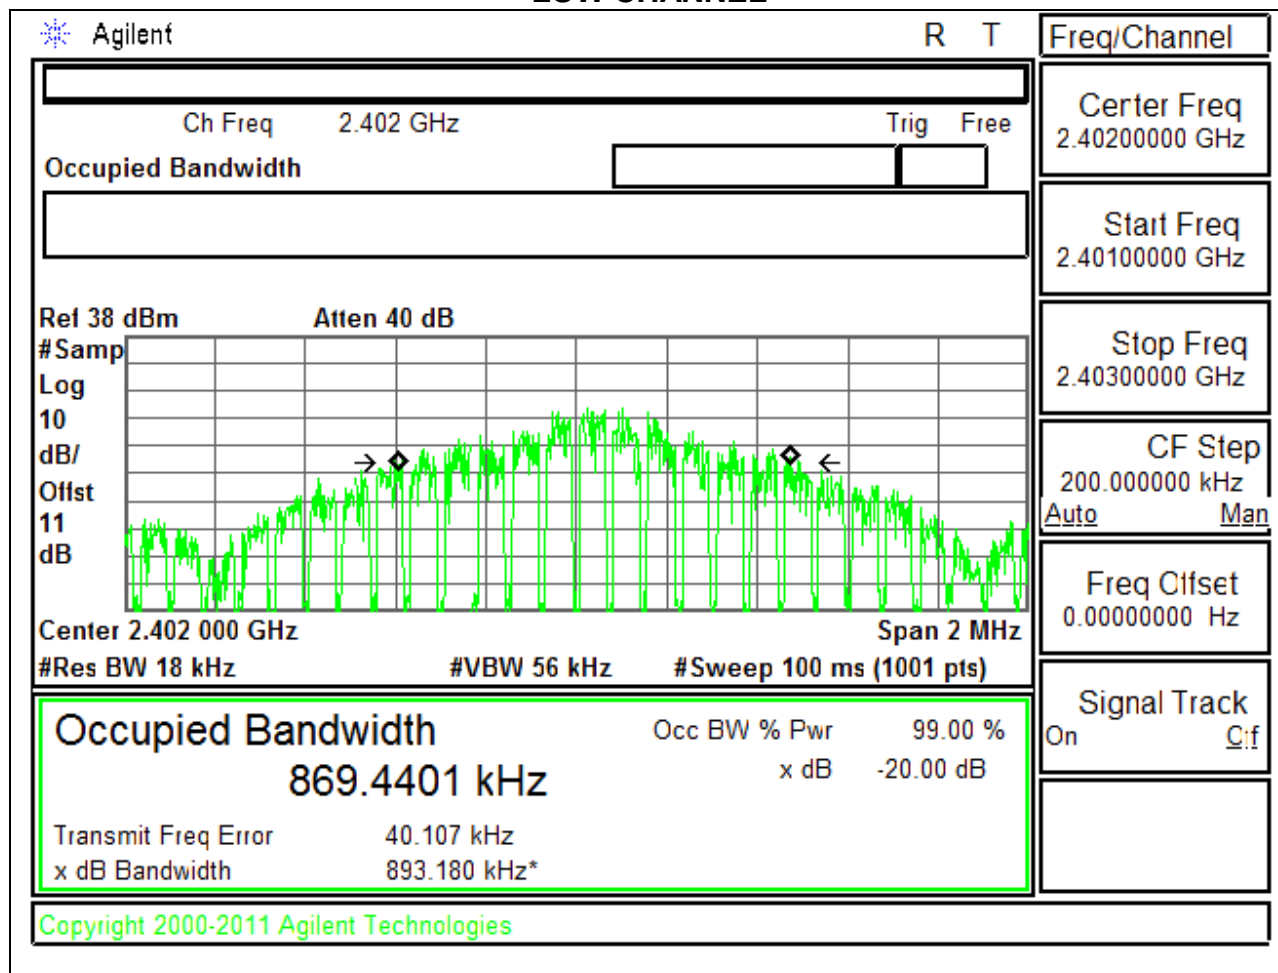

MID CHANNEL

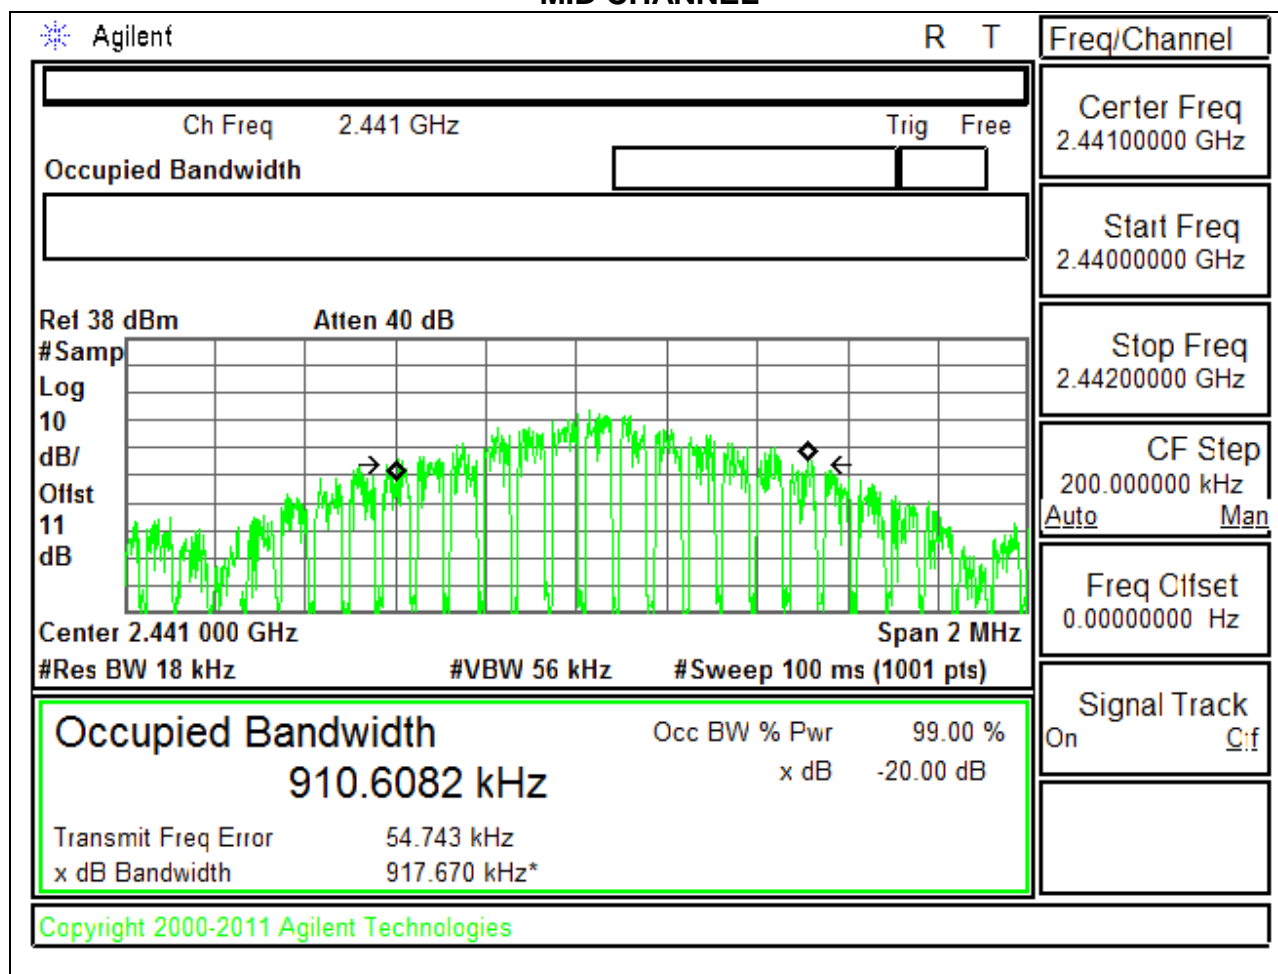


HIGH CHANNEL

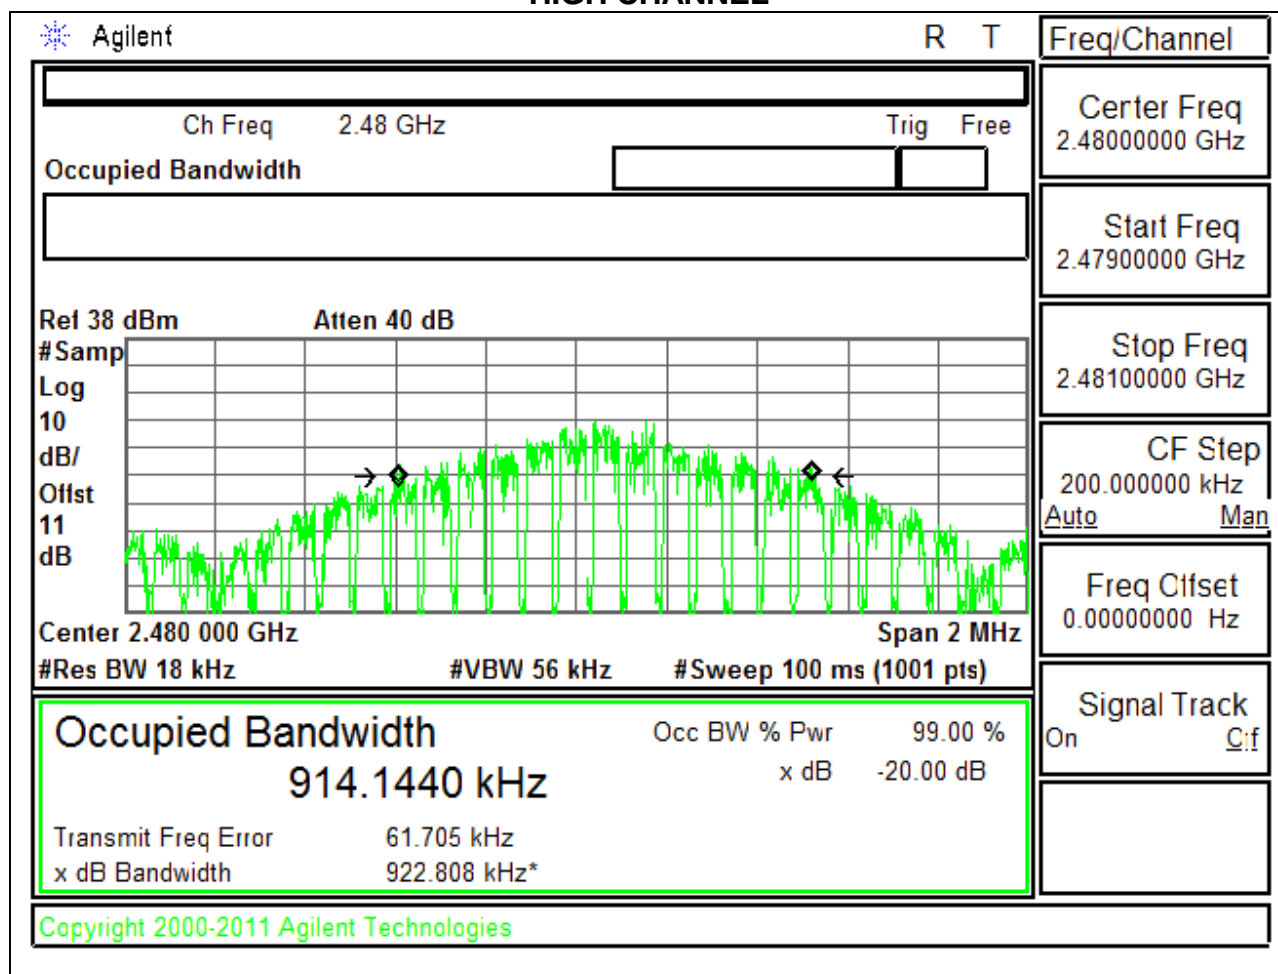


8PSK 20 dB BANDWIDTH


LOW CHANNEL

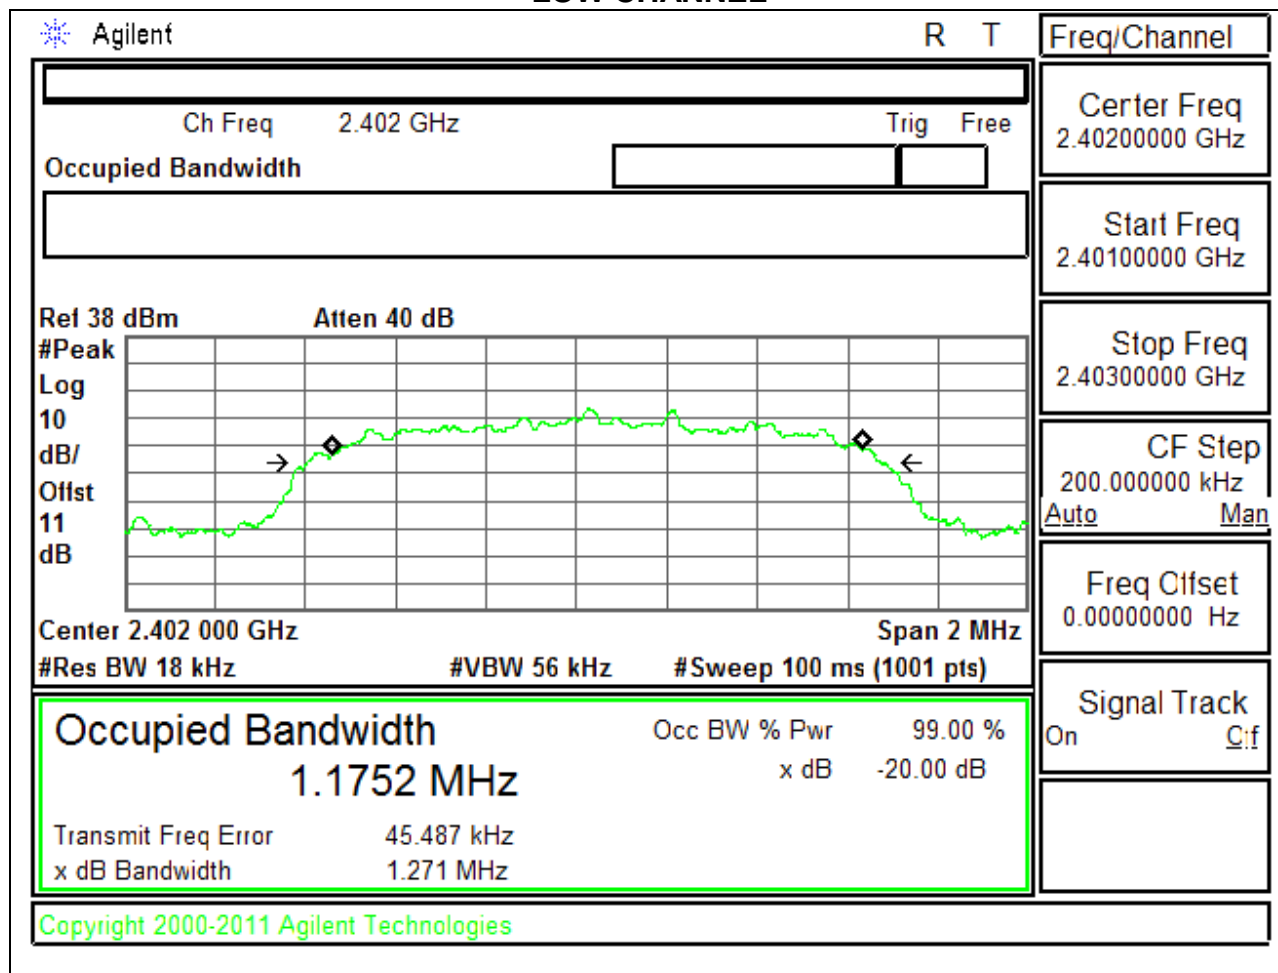

MID CHANNEL

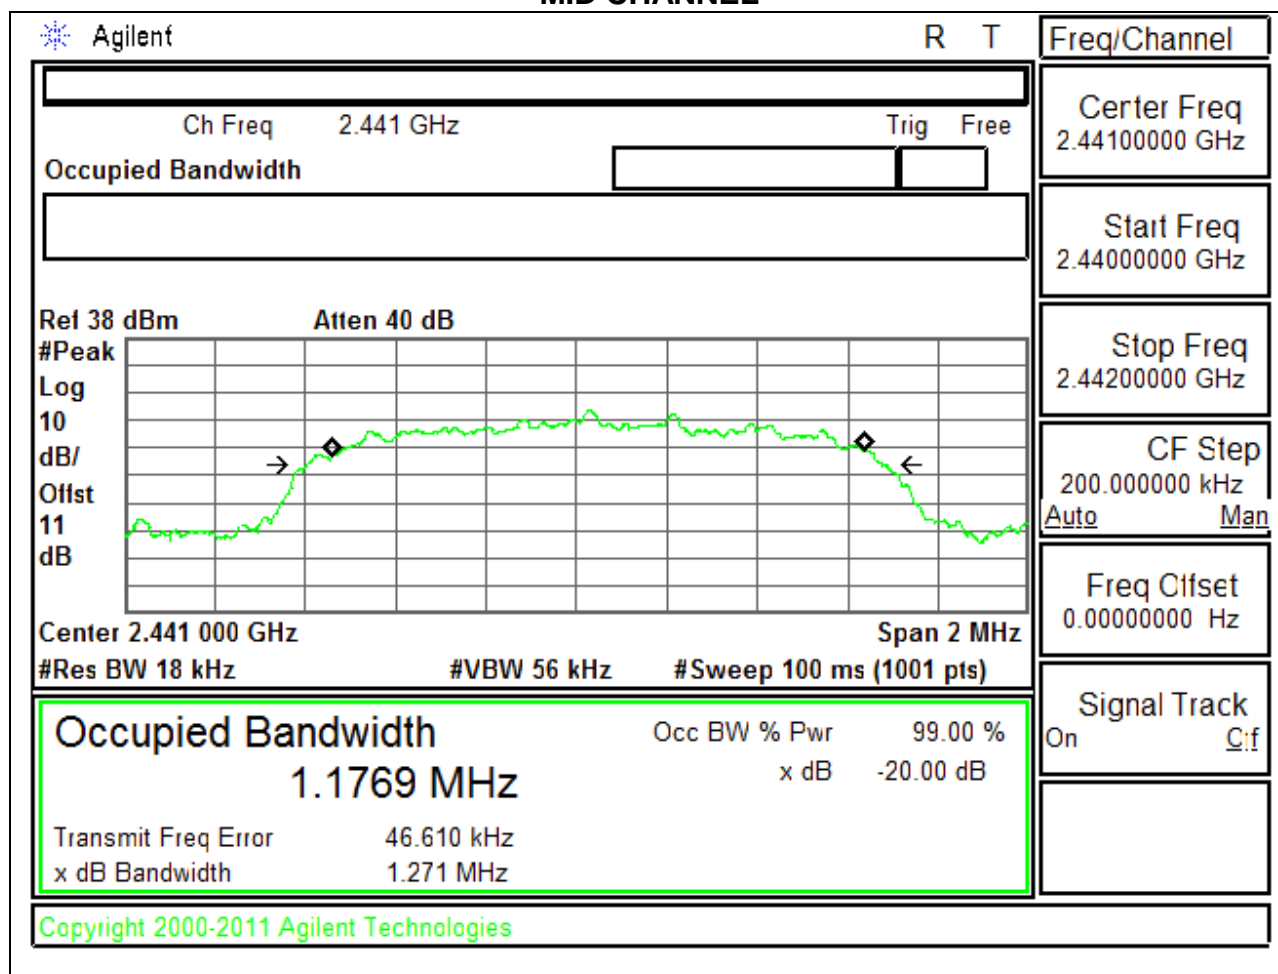


HIGH CHANNEL

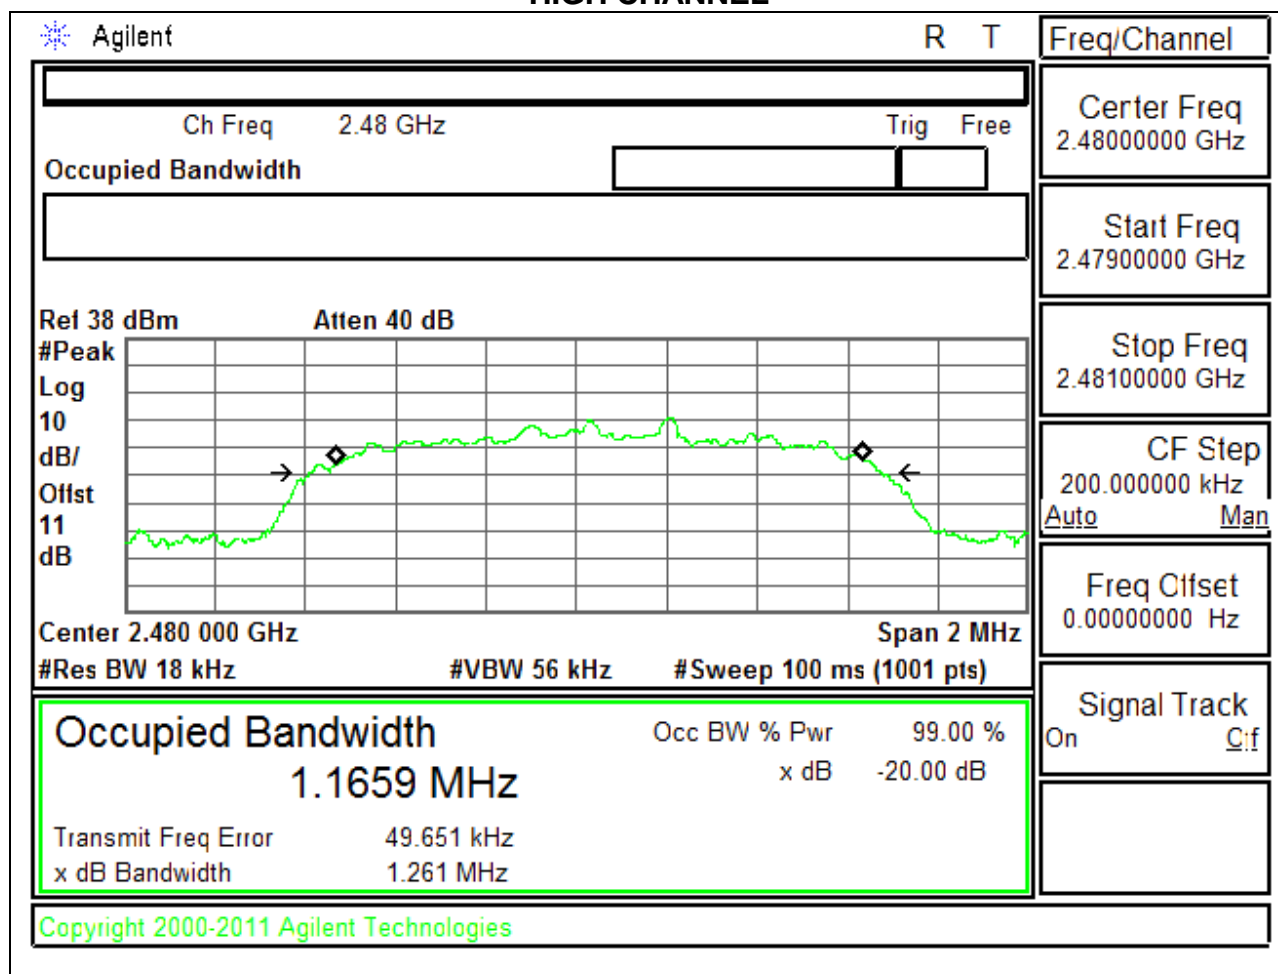


8PSK 99% BANDWIDTH


LOW CHANNEL

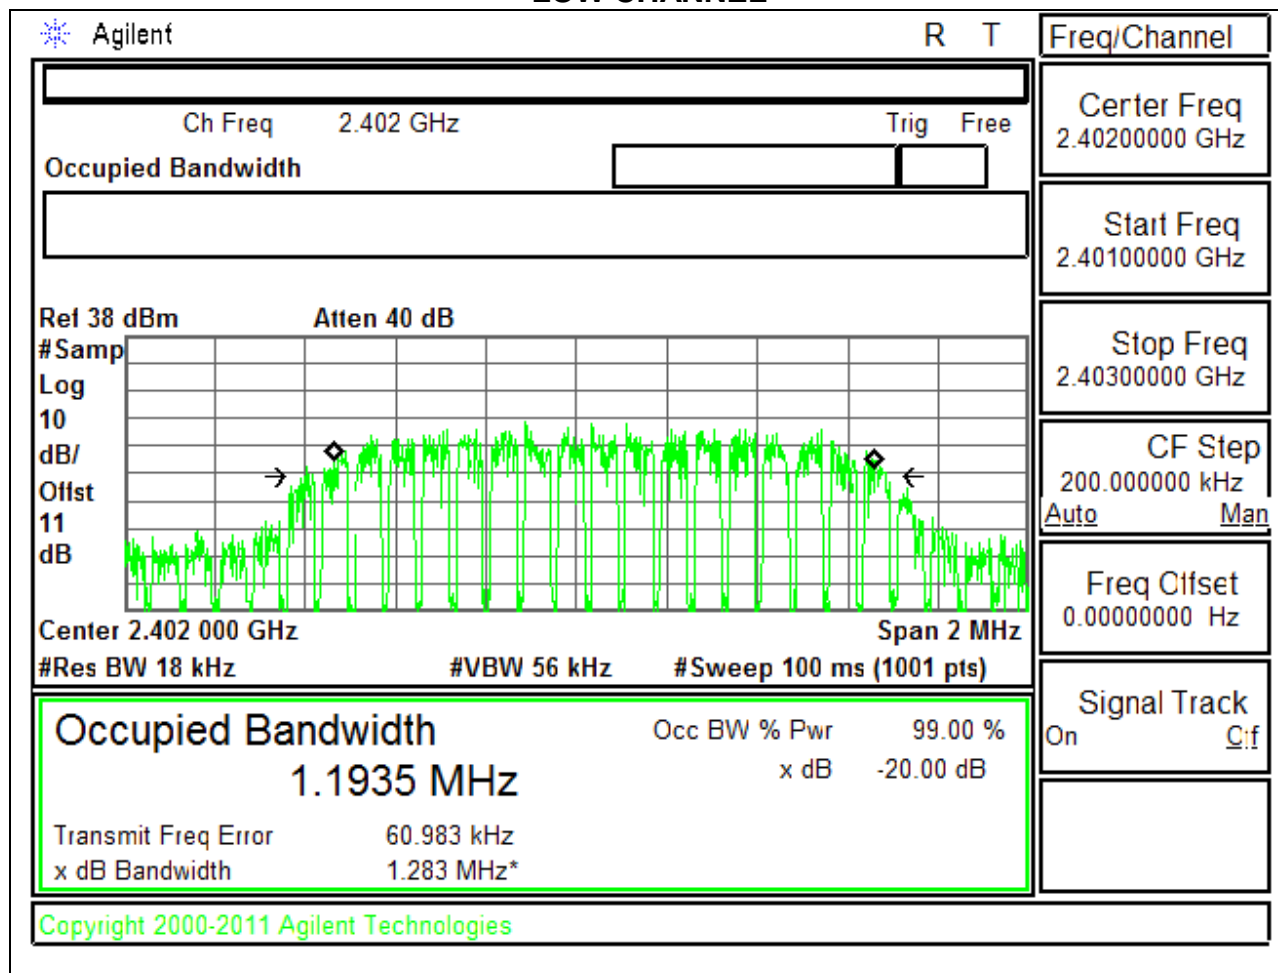

MID CHANNEL

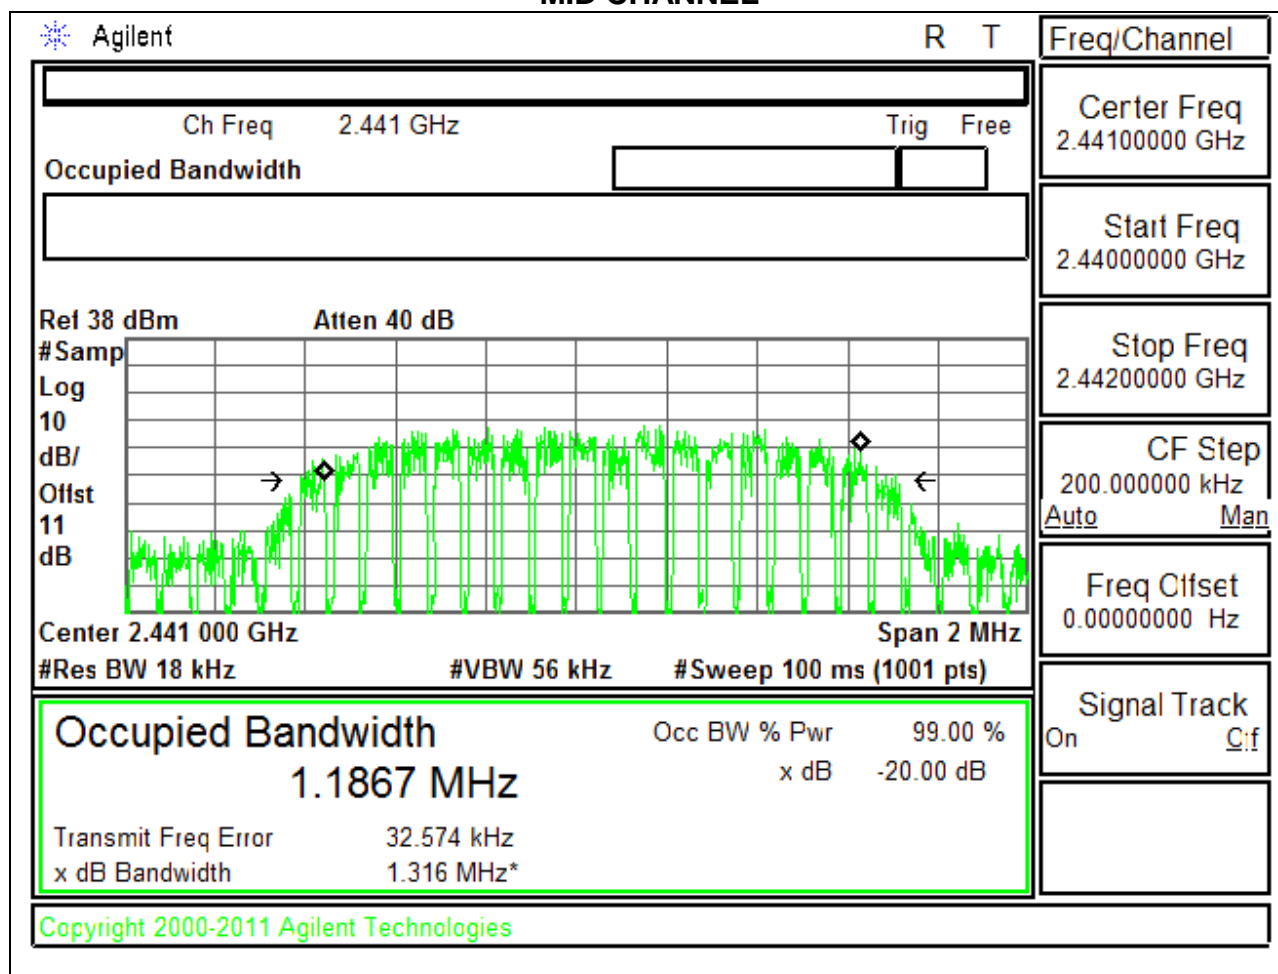

HIGH CHANNEL

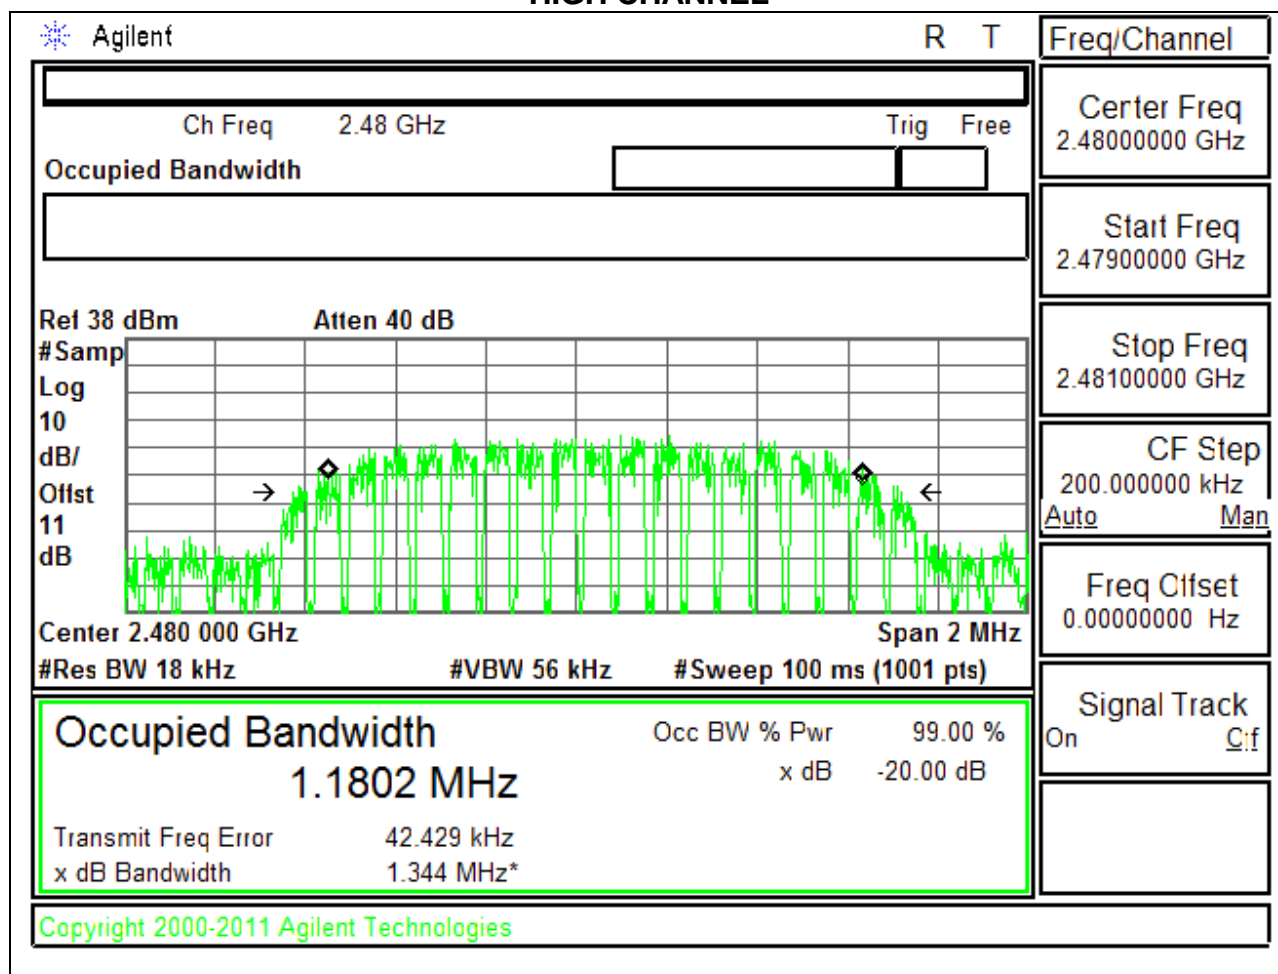

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION PLOT

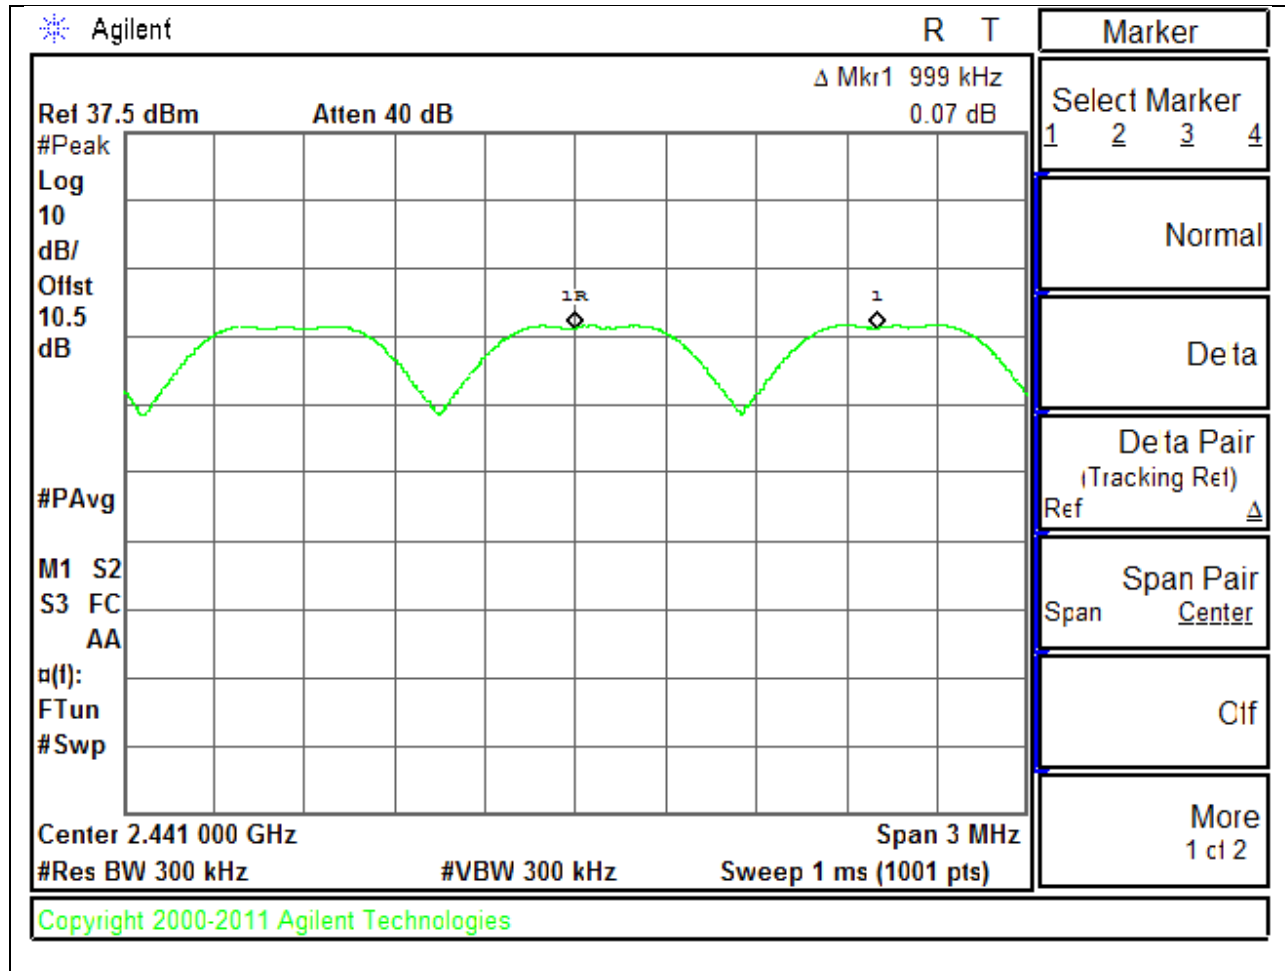

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS PLOTS


NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)

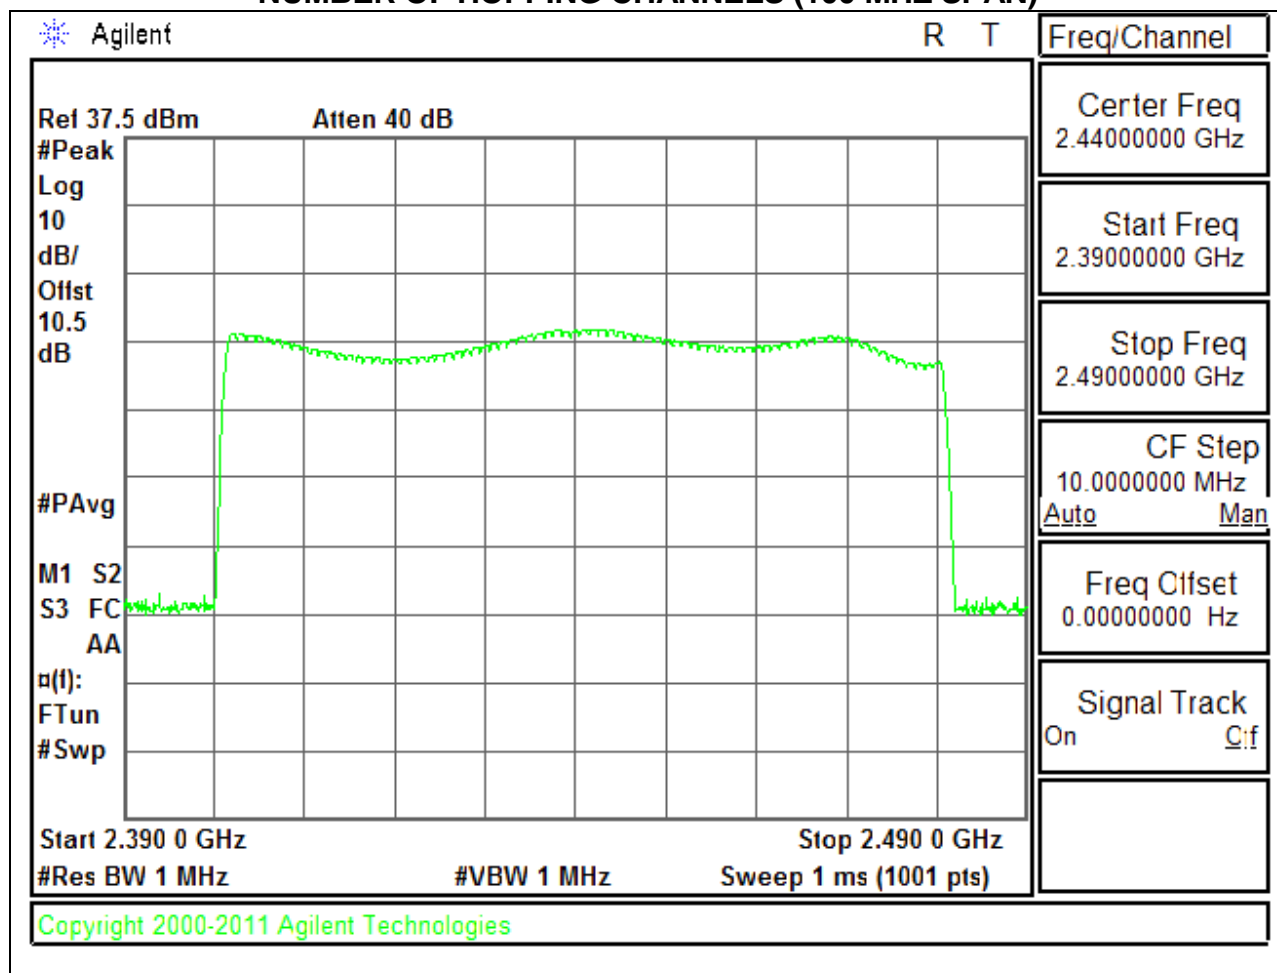


NUMBER OF HOPPING CHANNELS (30 MHz SPAN, FIRST SEGMENT)

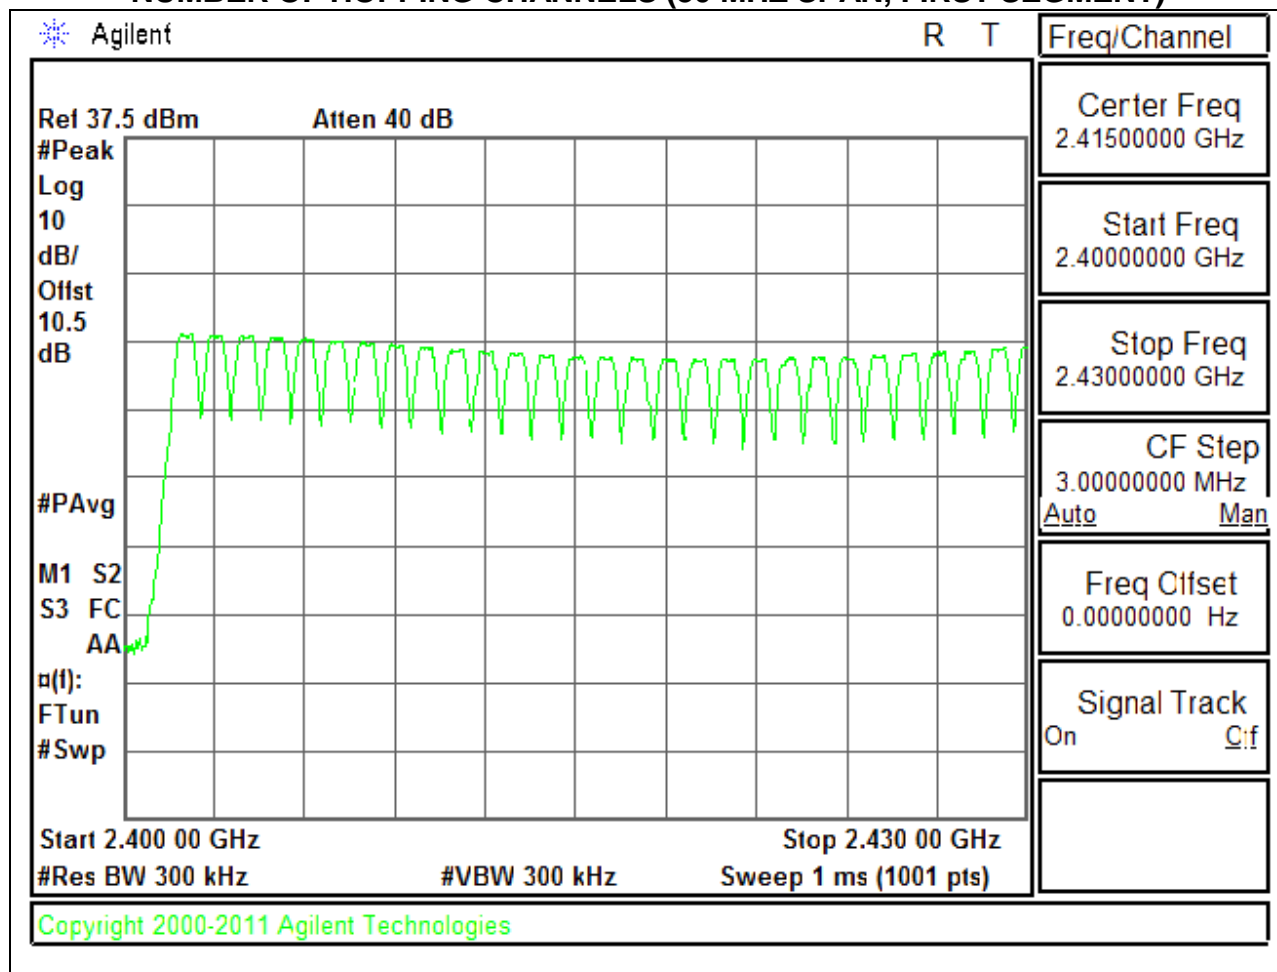

NUMBER OF HOPPING CHANNELS (30 MHZ SPAN, SECOND SEGMENT)

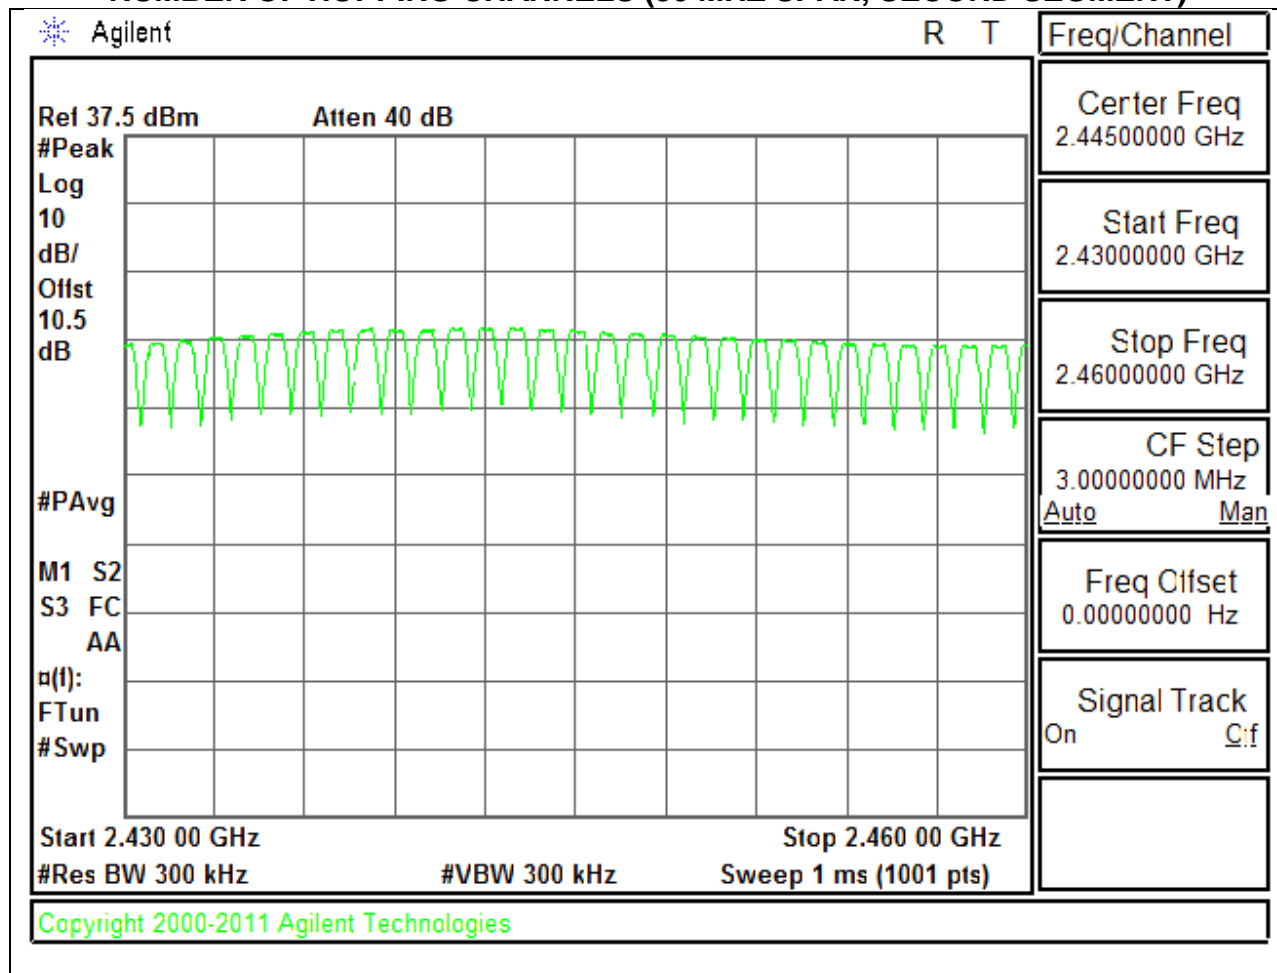

NUMBER OF HOPPING CHANNELS (30 MHz SPAN, THIRD SEGMENT)

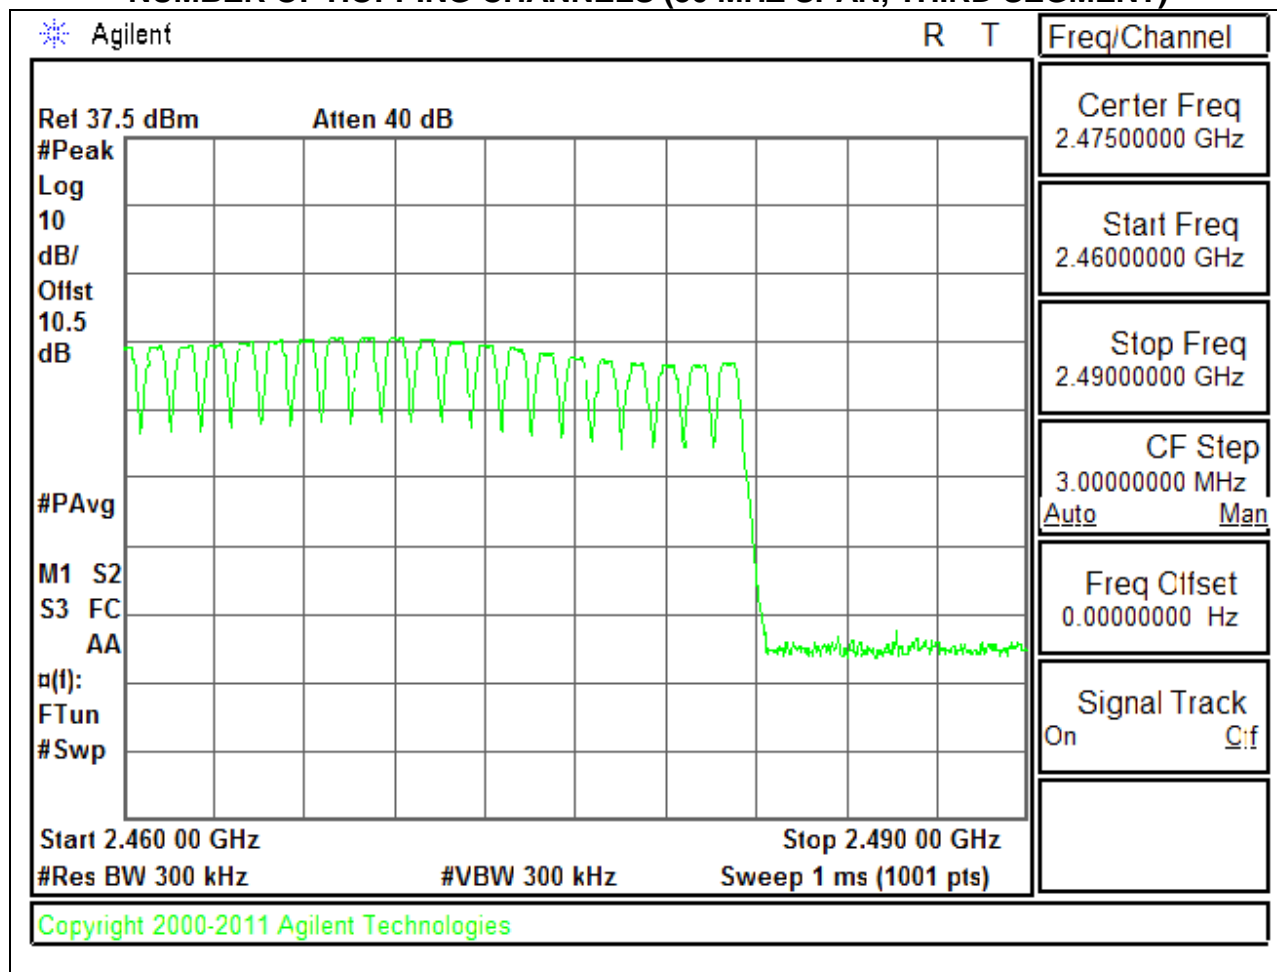

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.35	31	0.1085	0.4	-0.2915
DH3	1.625	17	0.27625	0.4	-0.12375
DH5	2.855	5	0.14275	0.4	-0.25725
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.35	7.75	0.027125	0.4	-0.37288
DH3	1.625	4.25	0.0690625	0.4	-0.33094
DH5	2.855	1.25	0.0356875	0.4	-0.36431


PULSE WIDTH - DH1

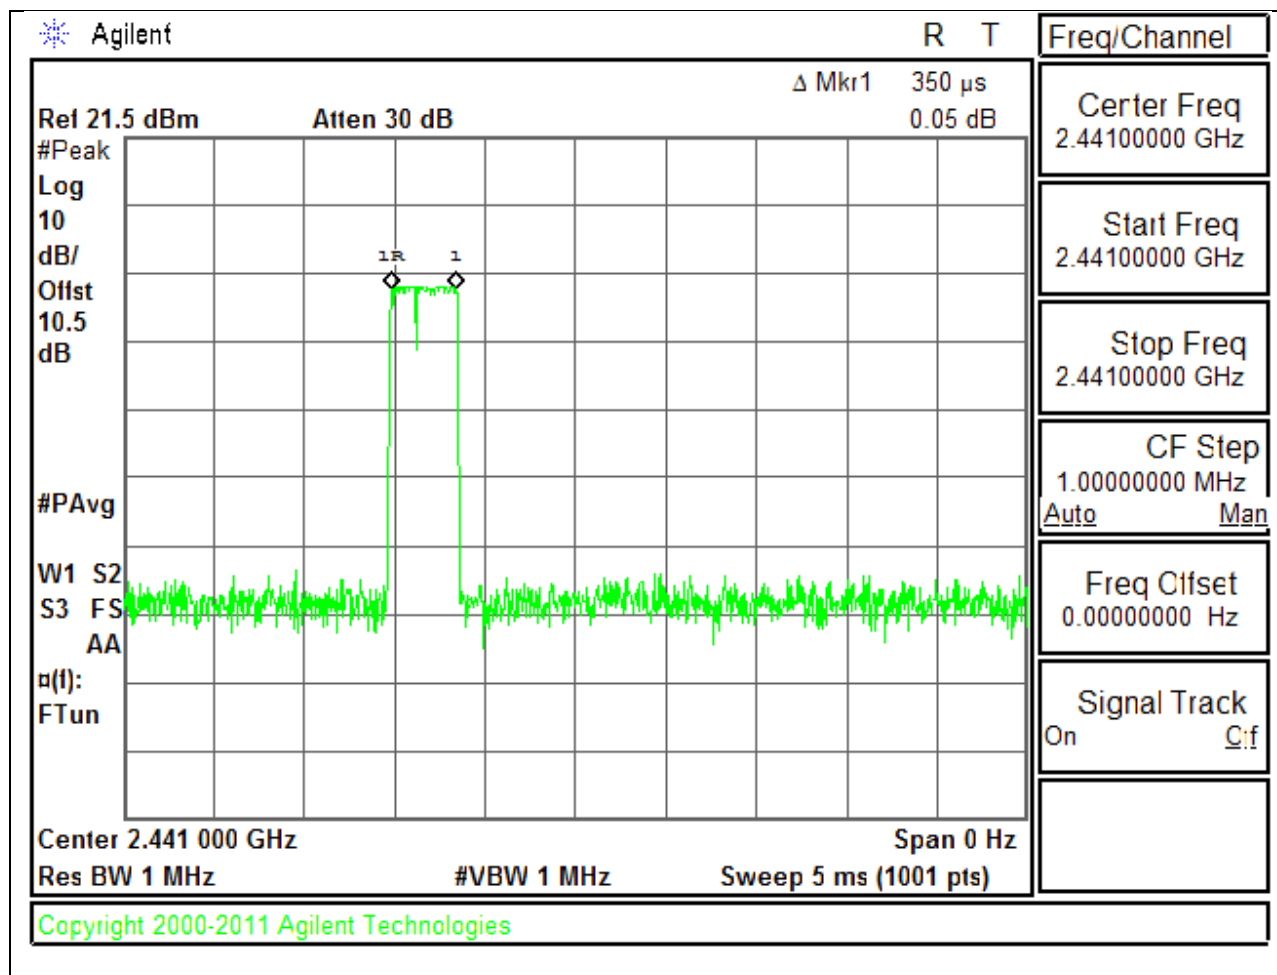


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1

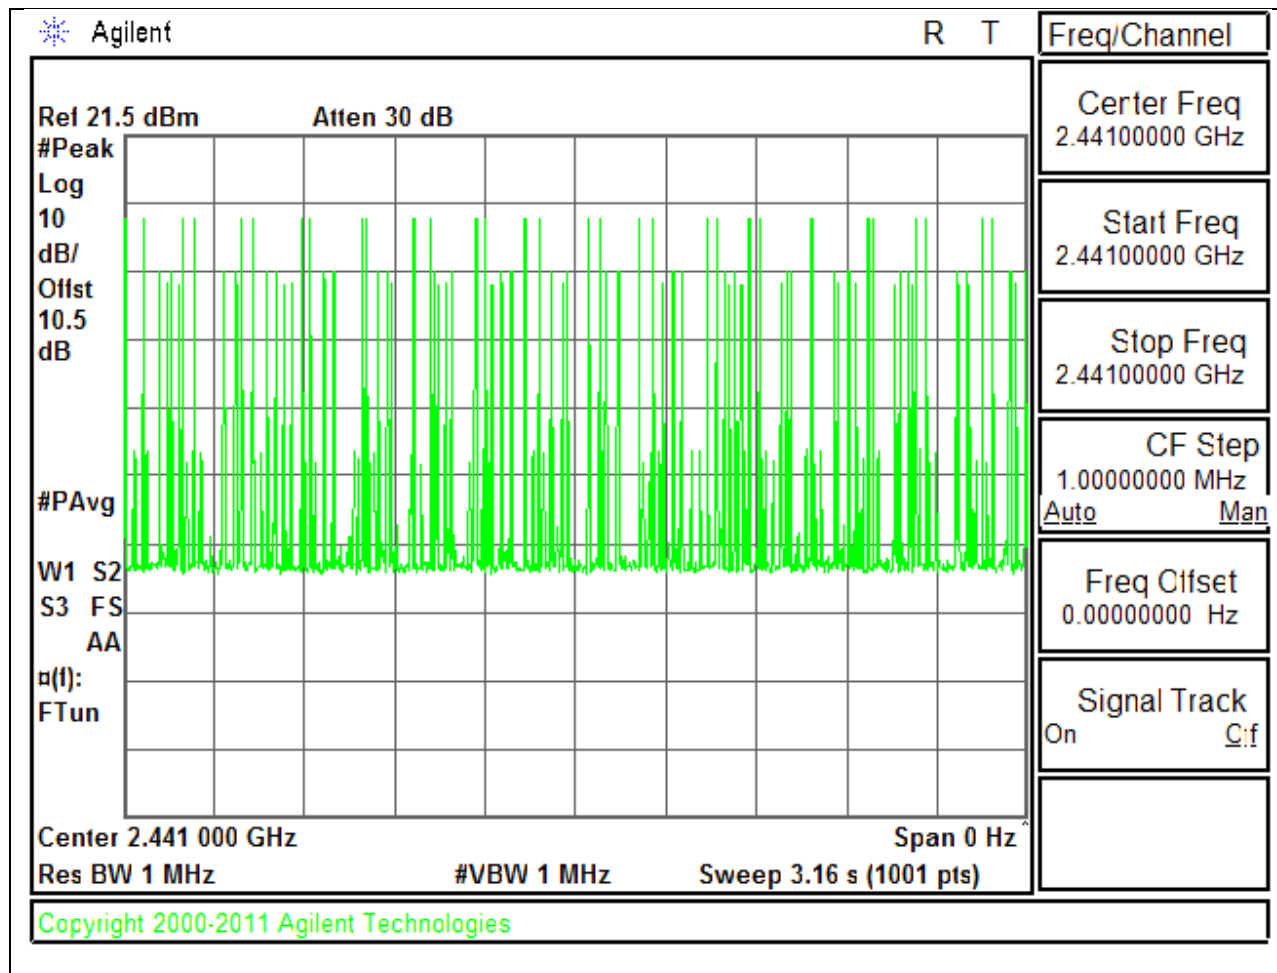


PULSE WIDTH - DH3

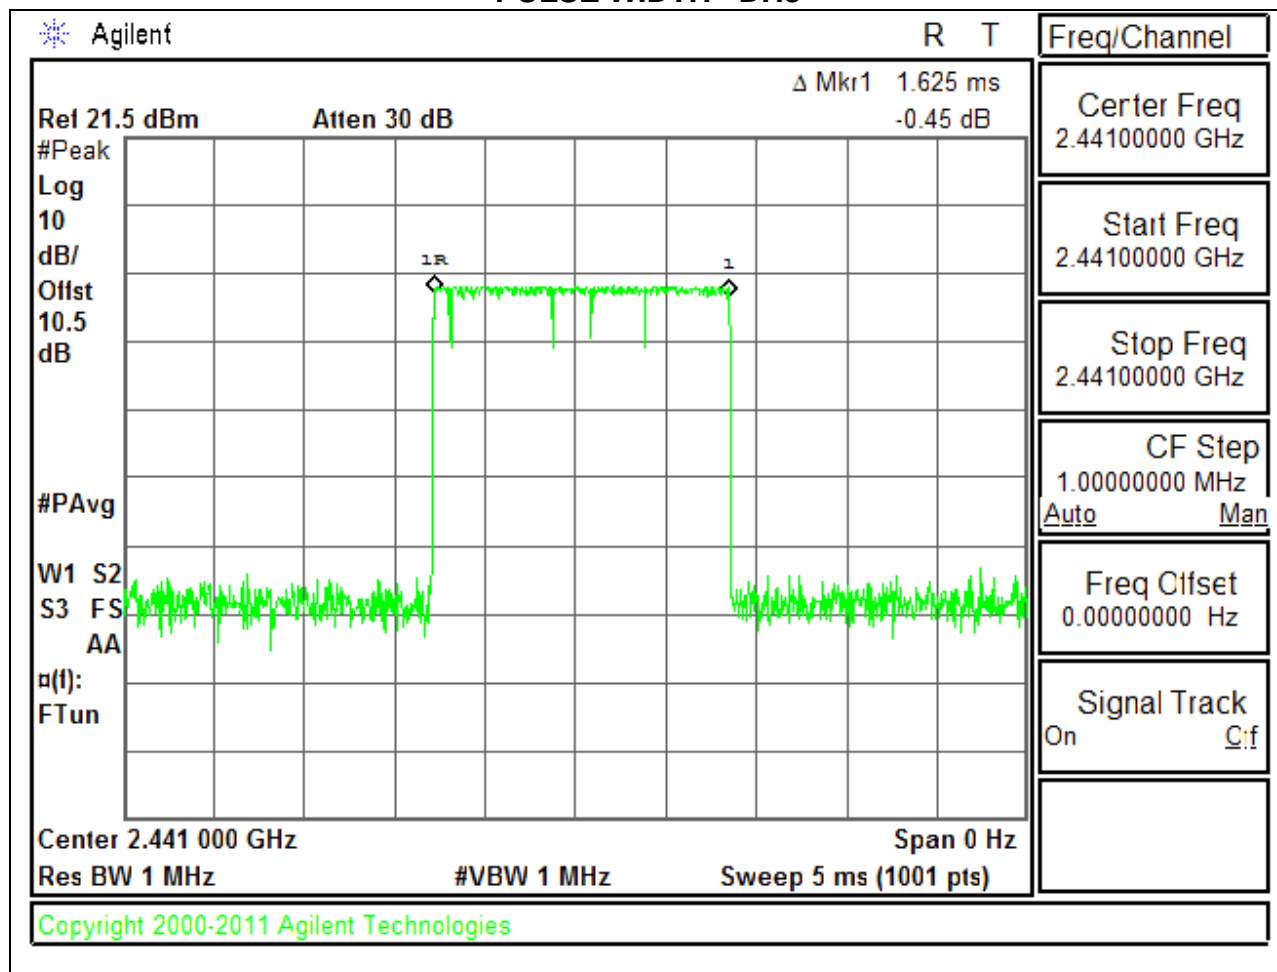


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH3

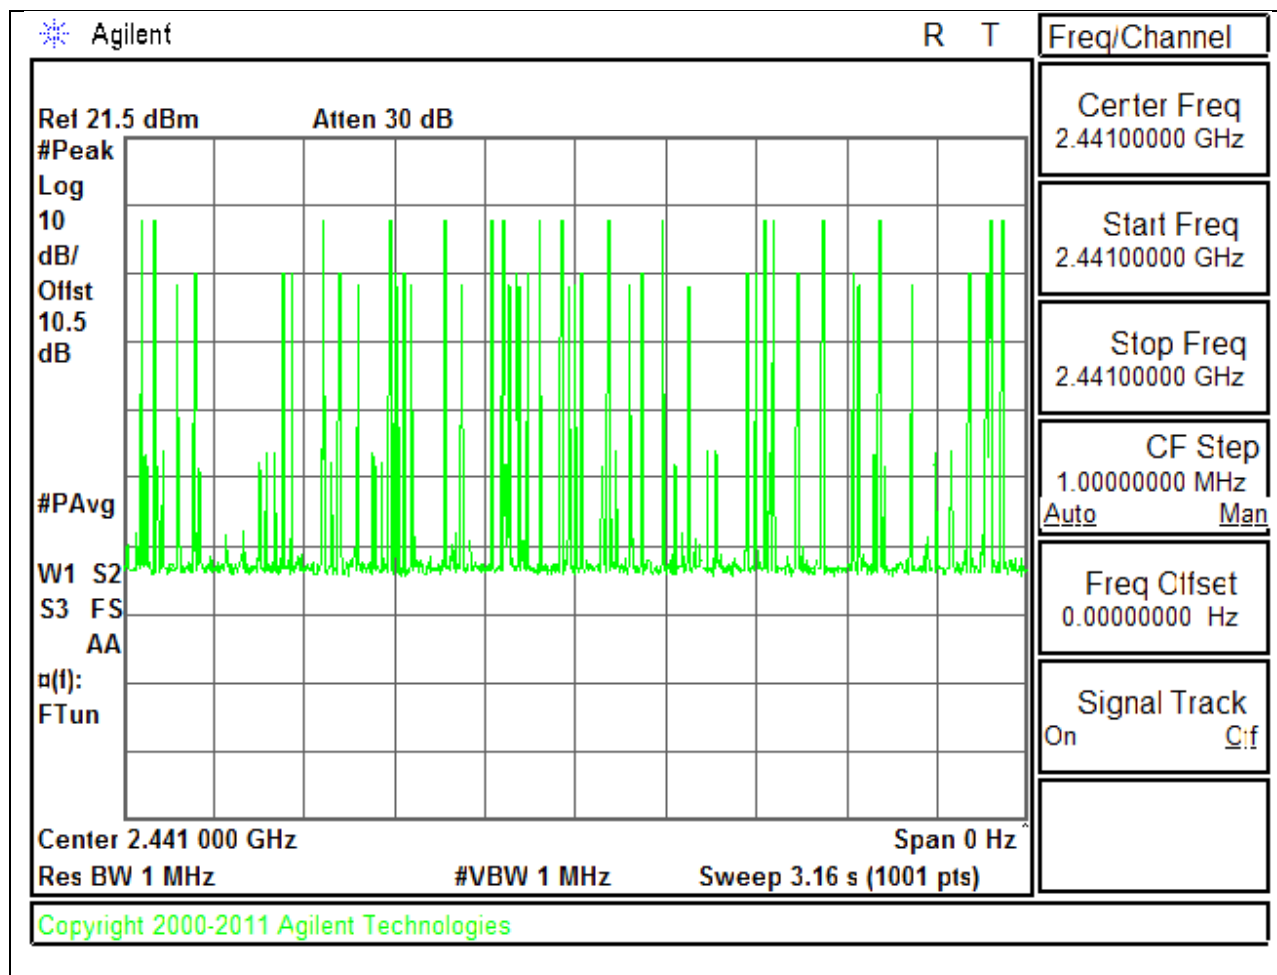

PULSE WIDTH - DH5

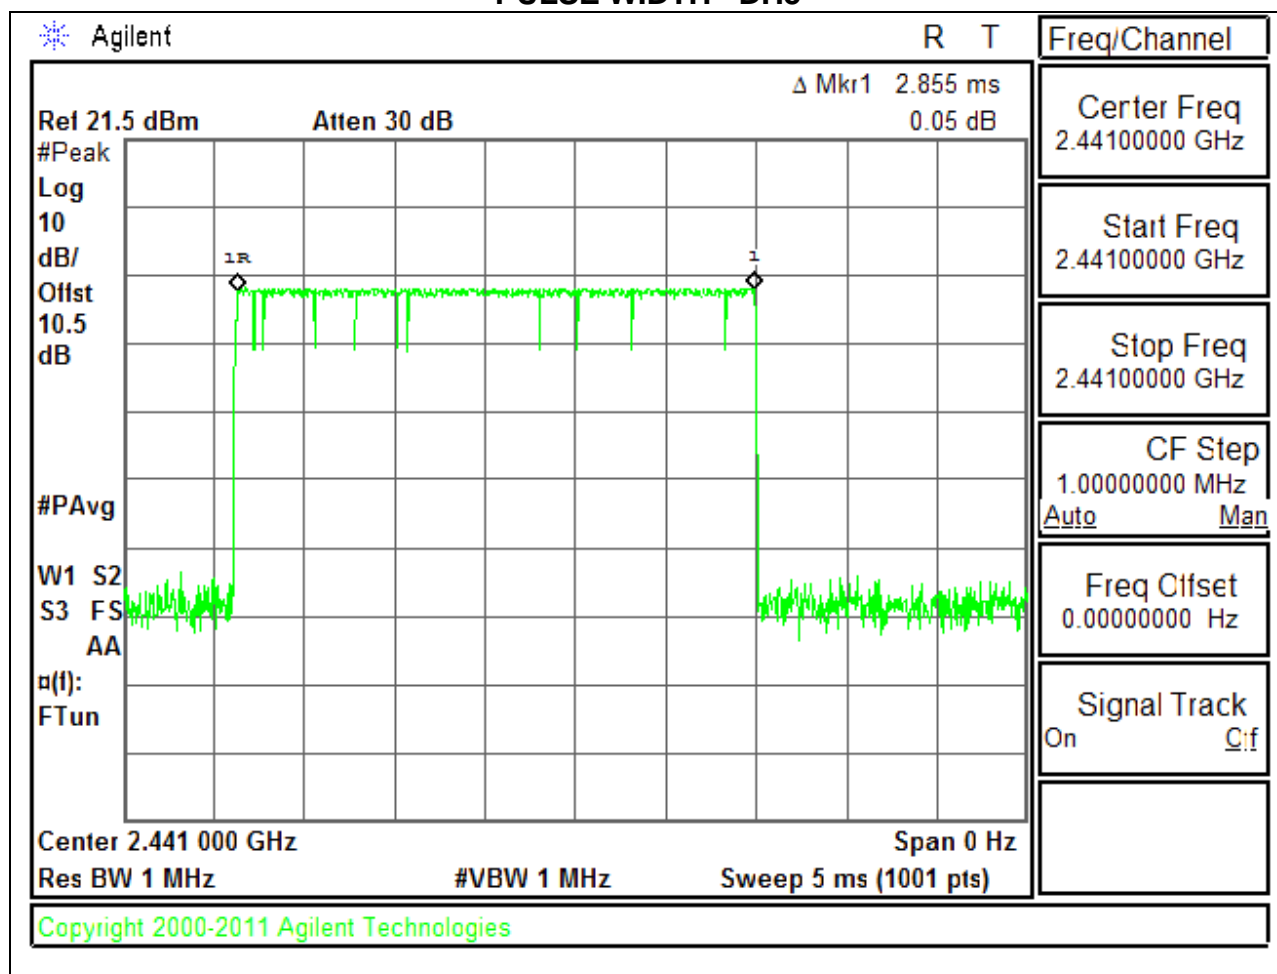

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH5

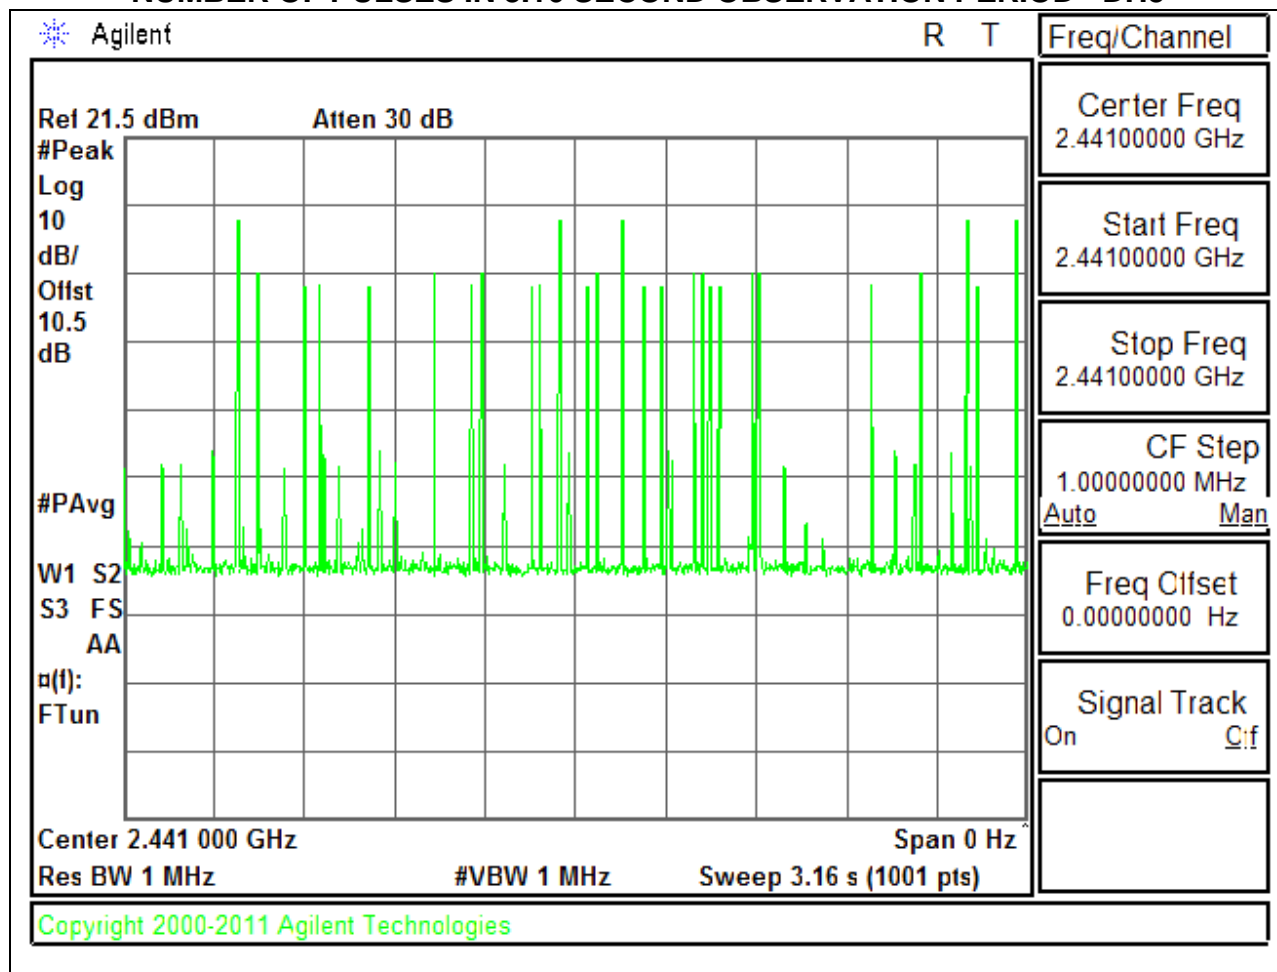

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

8.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	8.67	21	-12.33
Middle	2441	9.2	21	-11.8
High	2480	4.66	21	-16.34
Worst		9.2		-11.8


8.5.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.98	21	-11.02
Middle	2441	10.53	21	-10.47
High	2480	5.64	21	-15.36
Worst		10.53		-10.47


8.5.3. OUTPUT POWER PLOTS

GFSK OUTPUT POWER


LOW CHANNEL

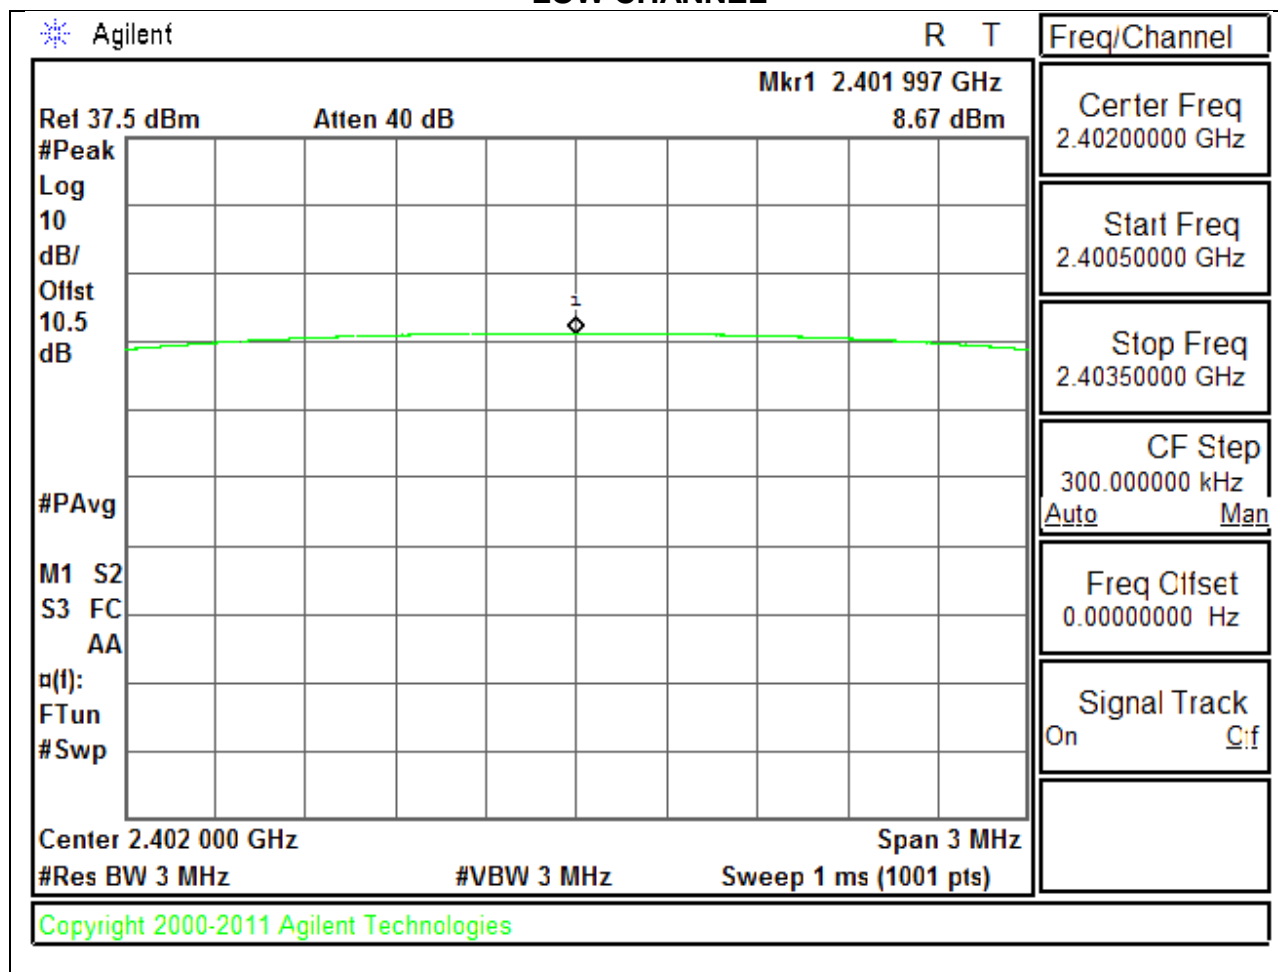

MID CHANNEL

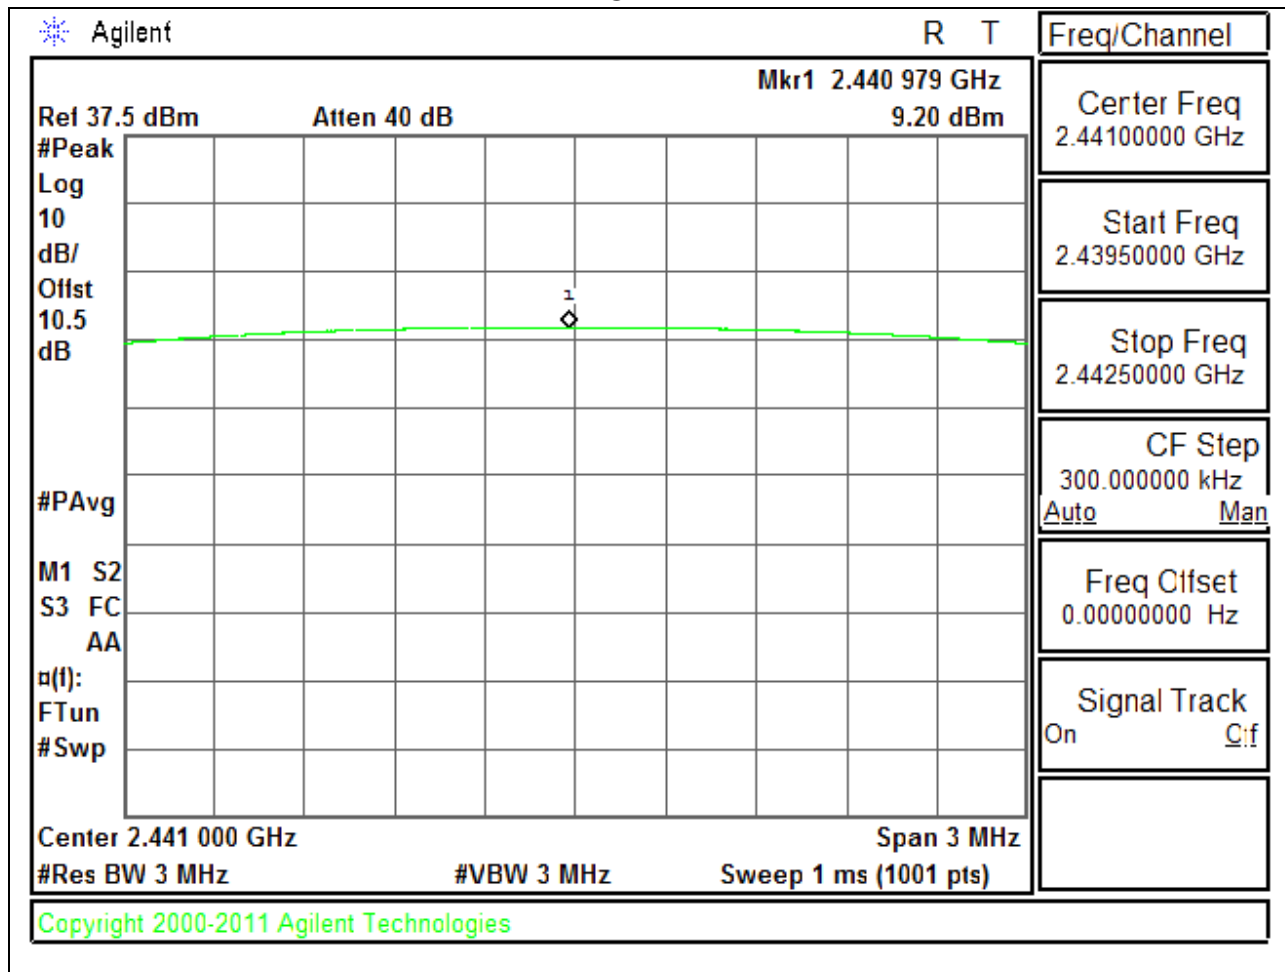


HIGH CHANNEL

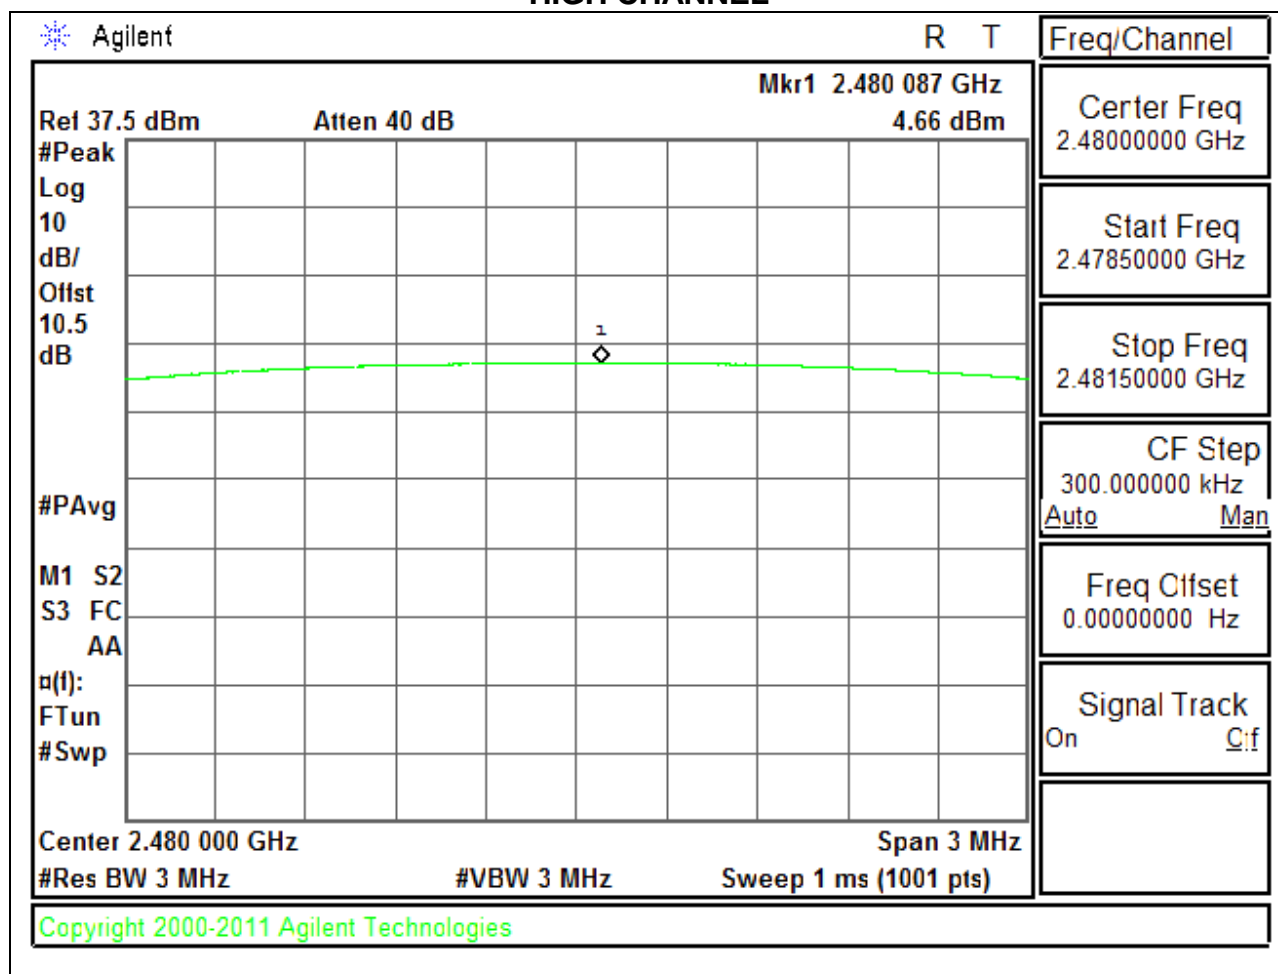


8PSK OUTPUT POWER


LOW CHANNEL

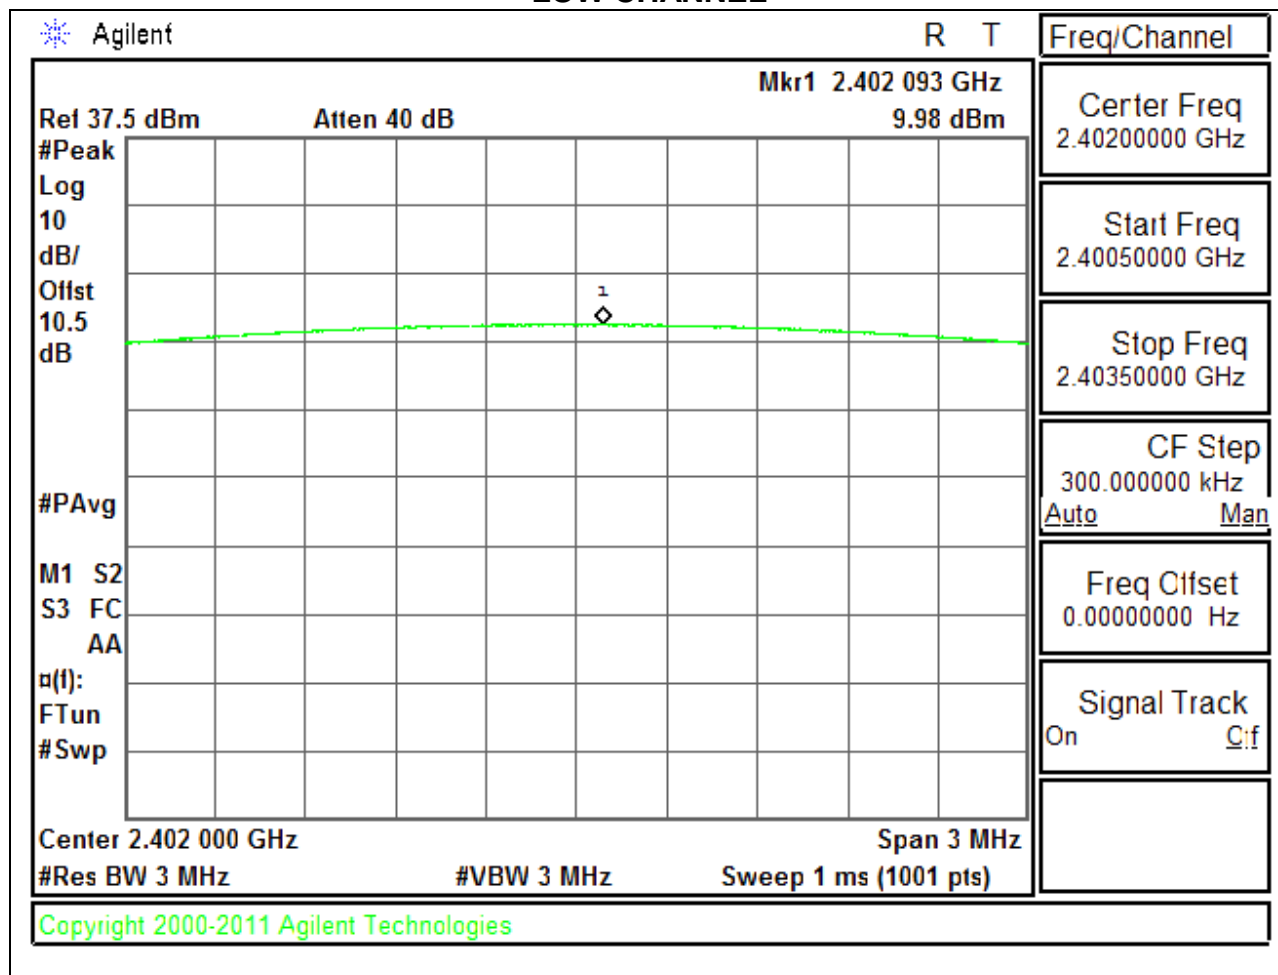

MID CHANNEL

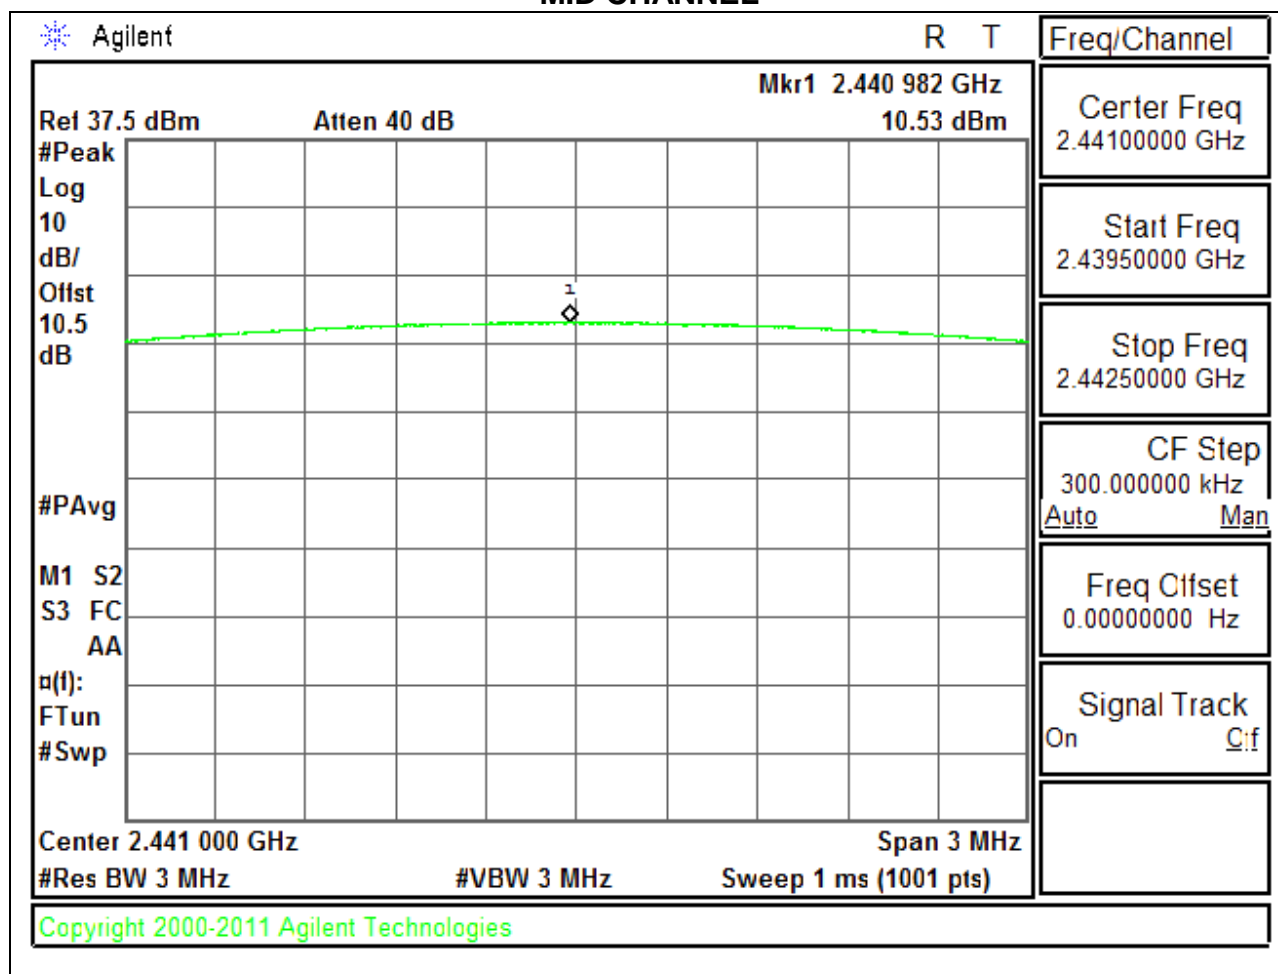

HIGH CHANNEL

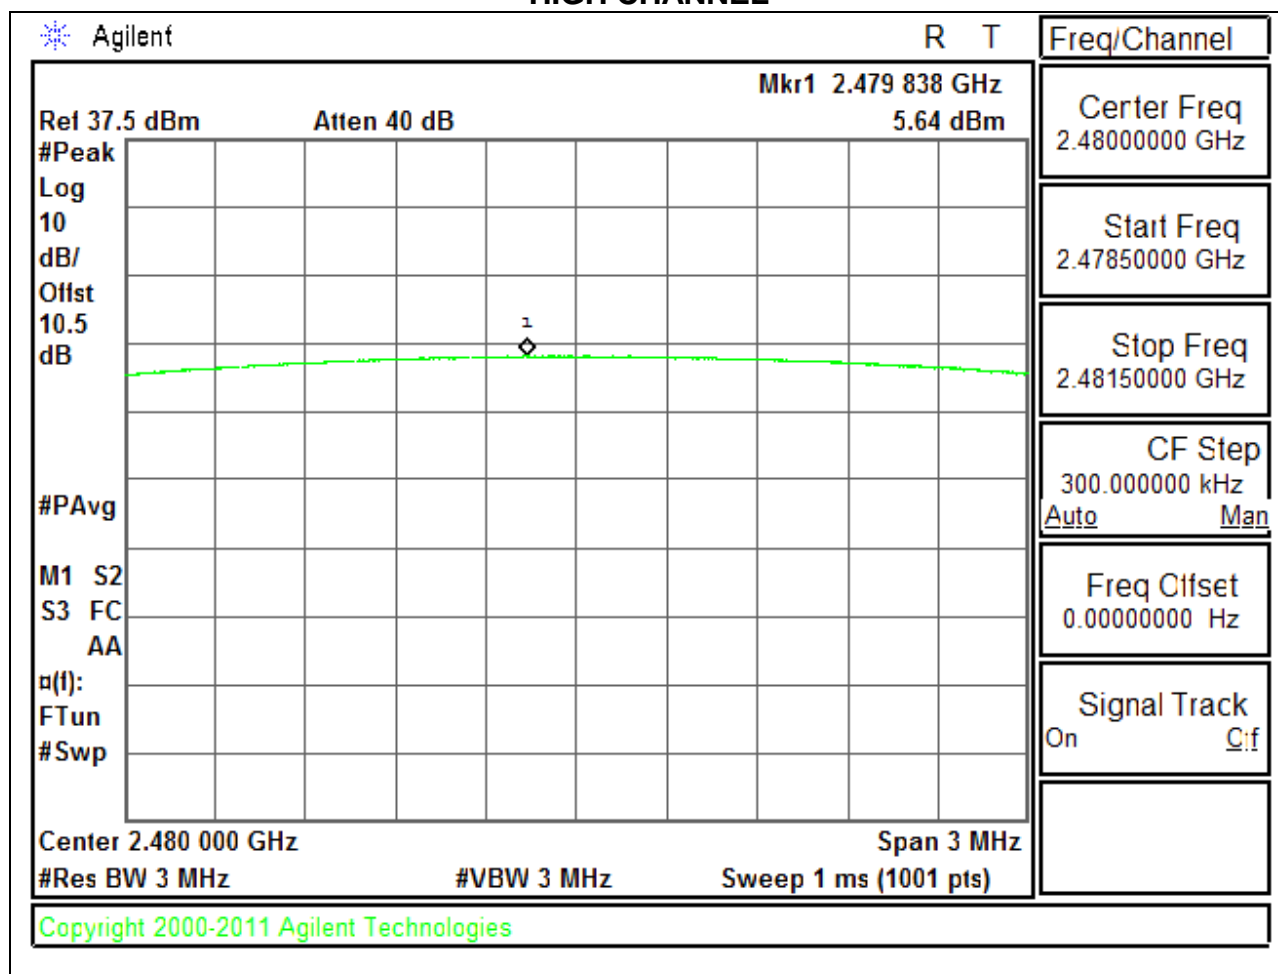

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8
Middle	2441	8.2
High	2480	4.3
Worst		8.2

8.6.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	6.00
Middle	2441	5.90
High	2480	4.30
Worst		6.00

8.6.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	6.5
Middle	2441	6.7
High	2480	2.9
Worst		6.7

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS


8.7.1. BASIC DATA RATE GFSK MODULATION

SPURIOUS EMISSIONS, LOW CHANNEL

LOW CHANNEL BANDEDGE

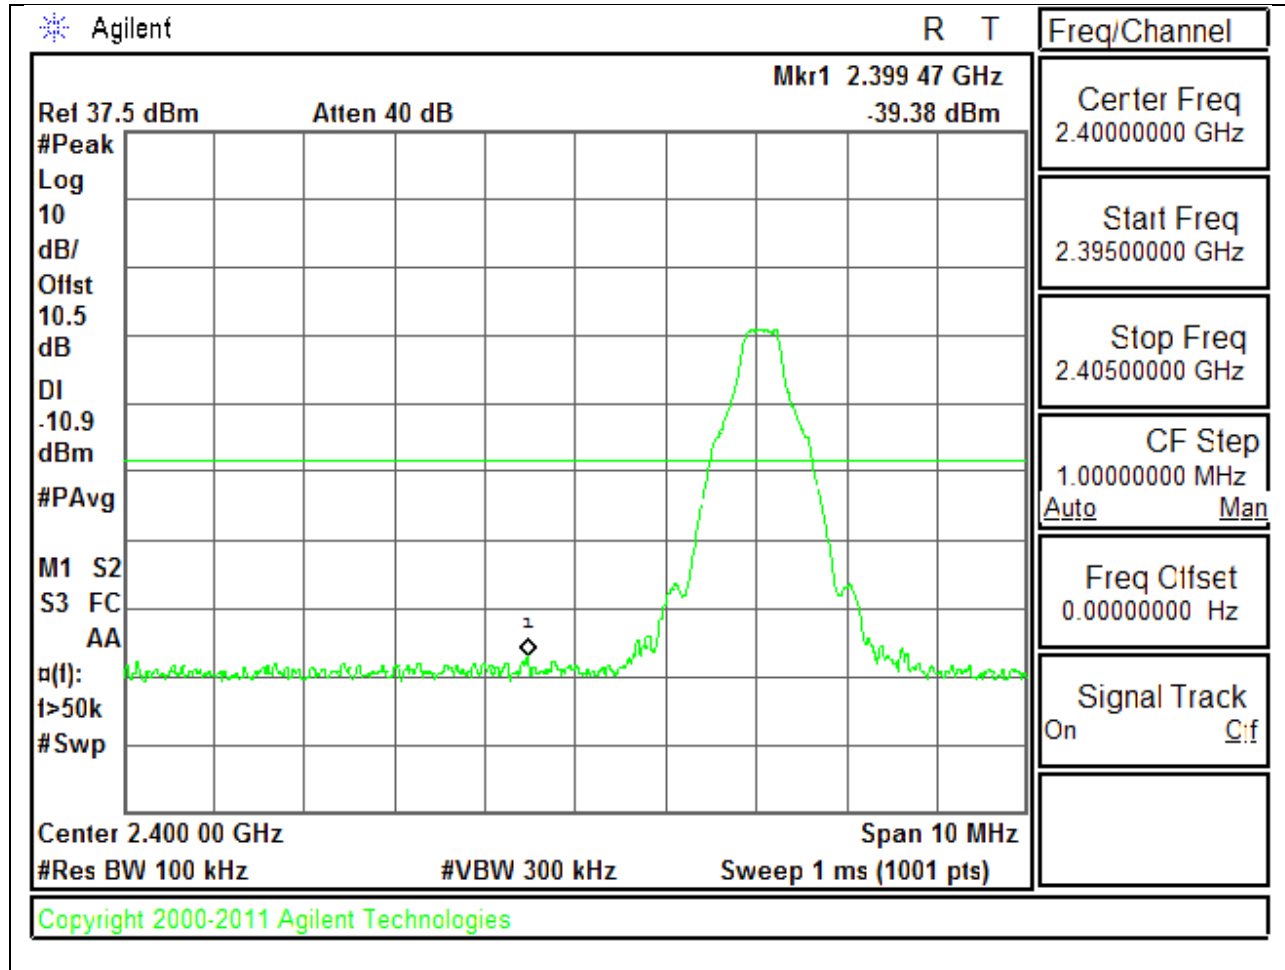


LOW CHANNEL SPURIOUS

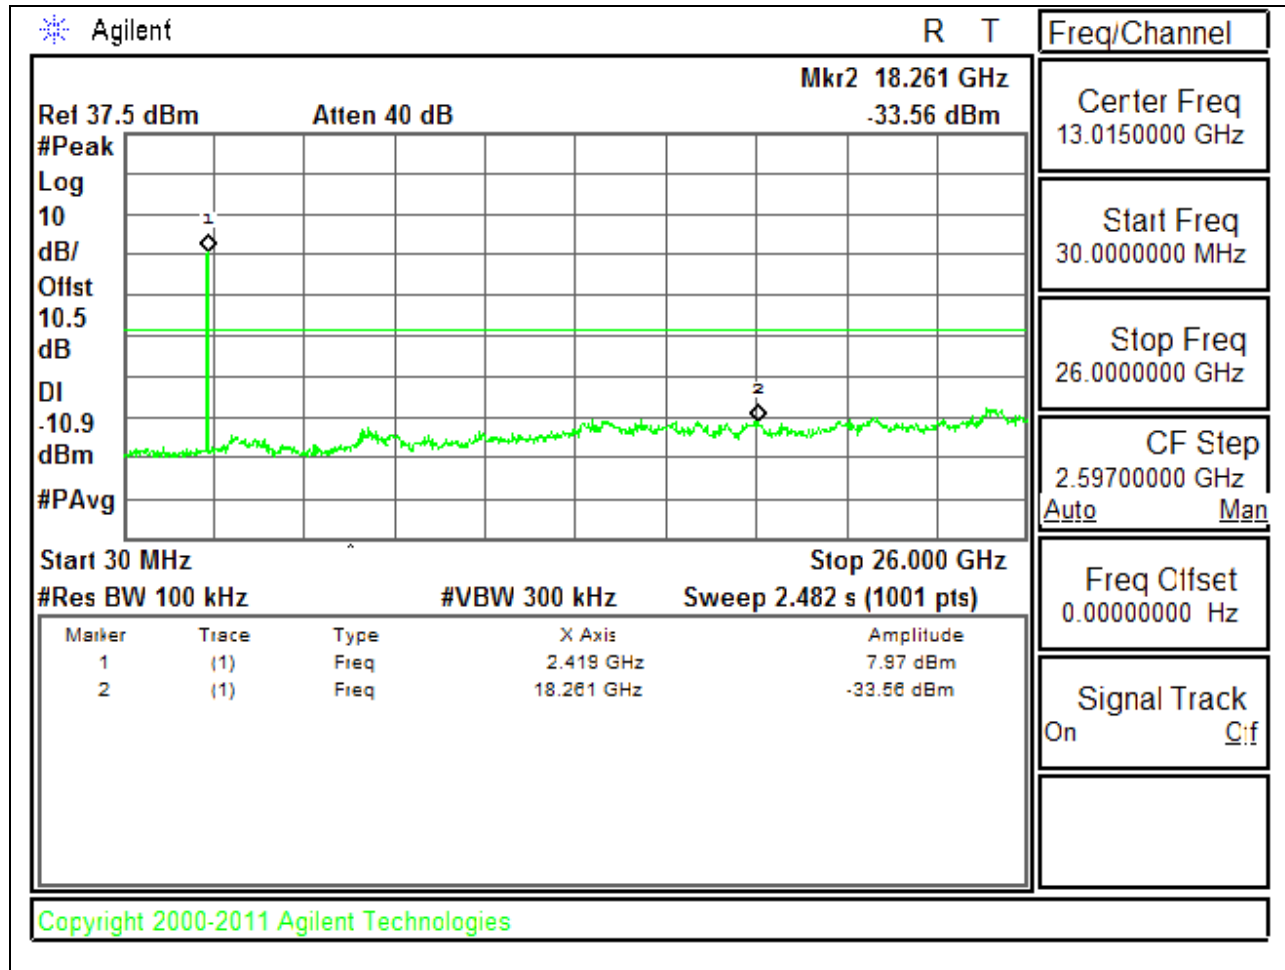


SPURIOUS EMISSIONS, MID CHANNEL

MID CHANNEL BANDEDGE

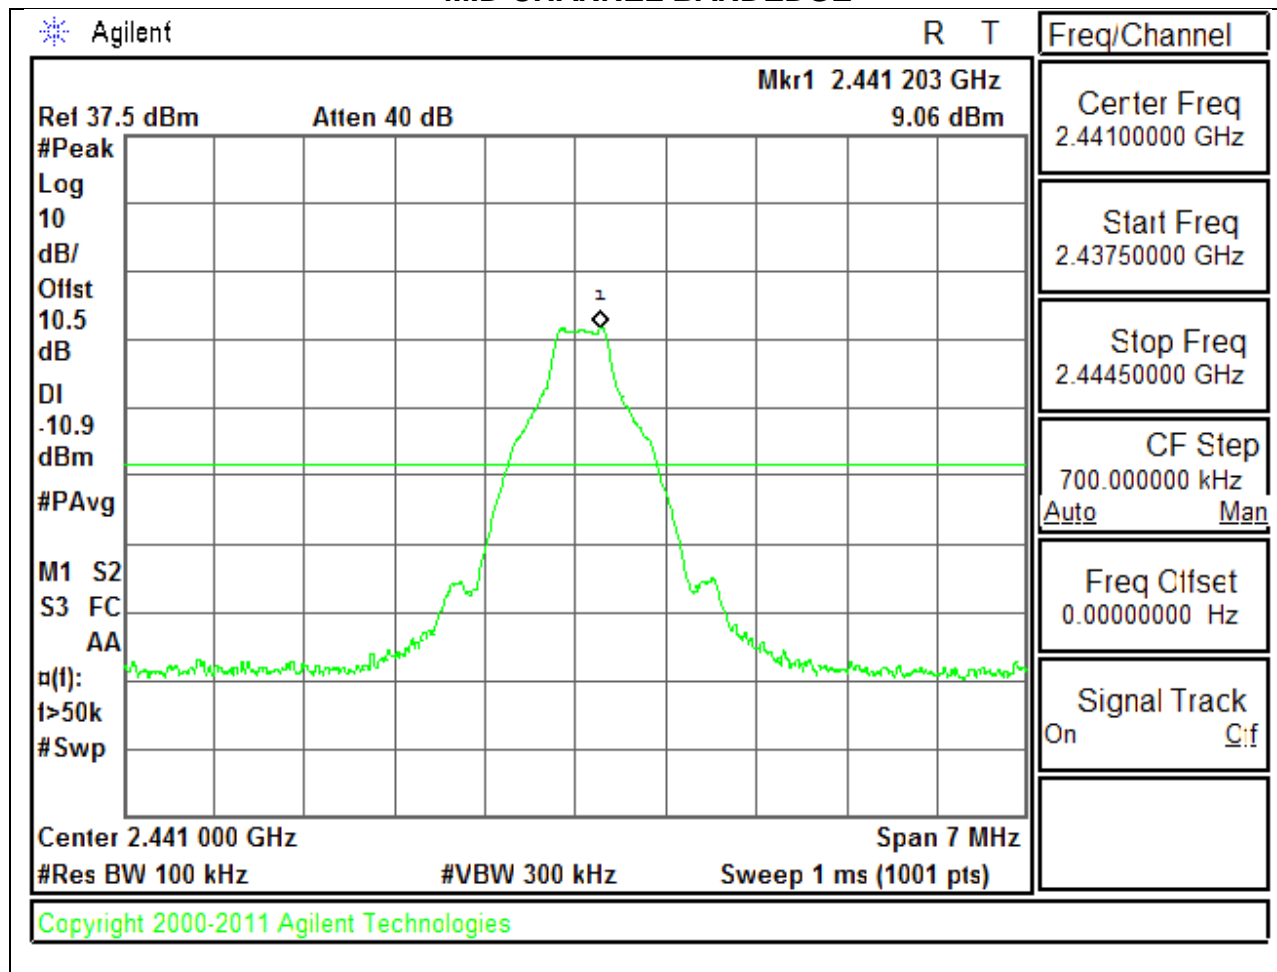


MID CHANNEL SPURIOUS

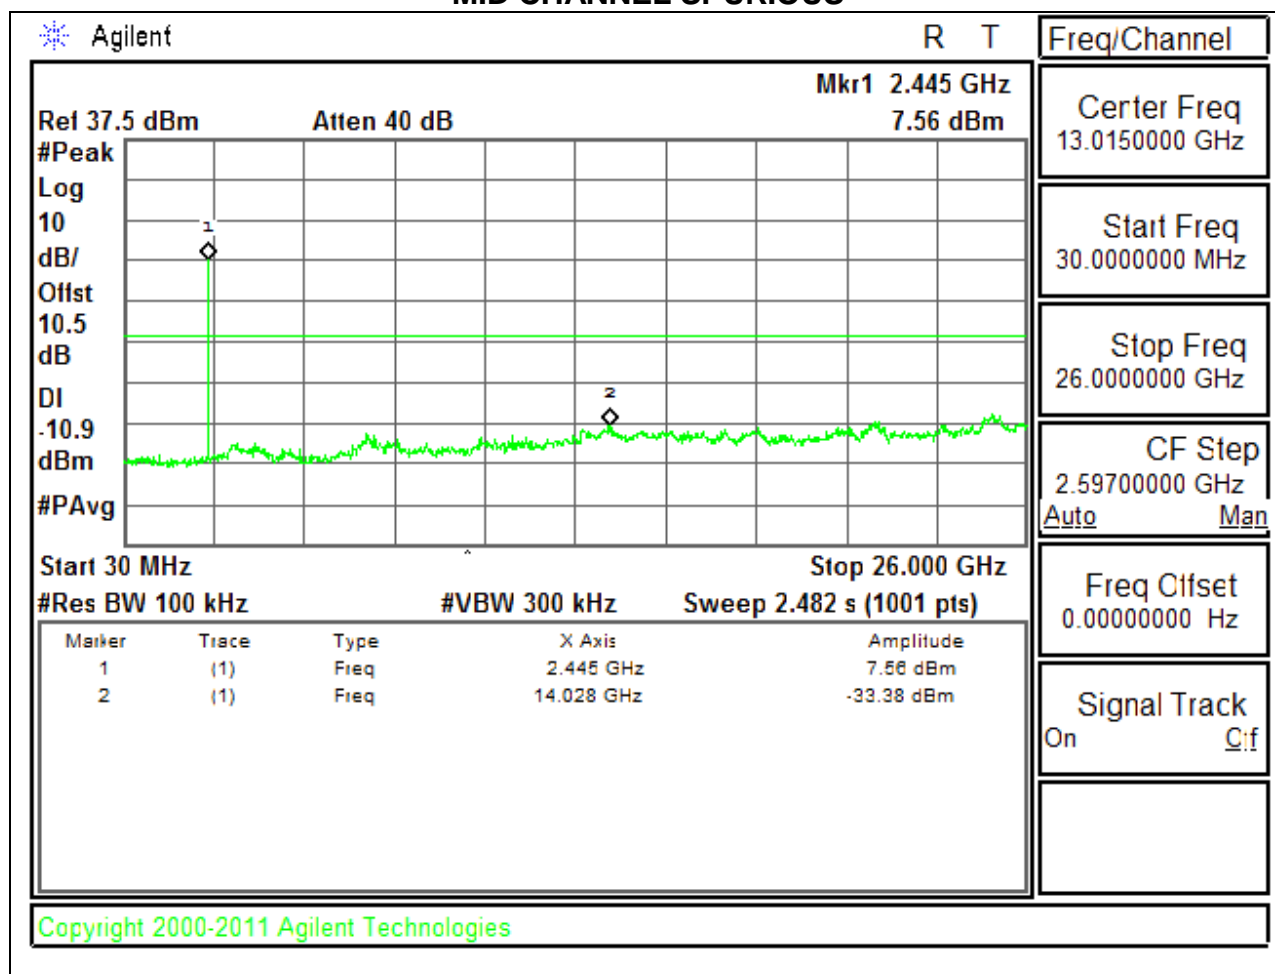


SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

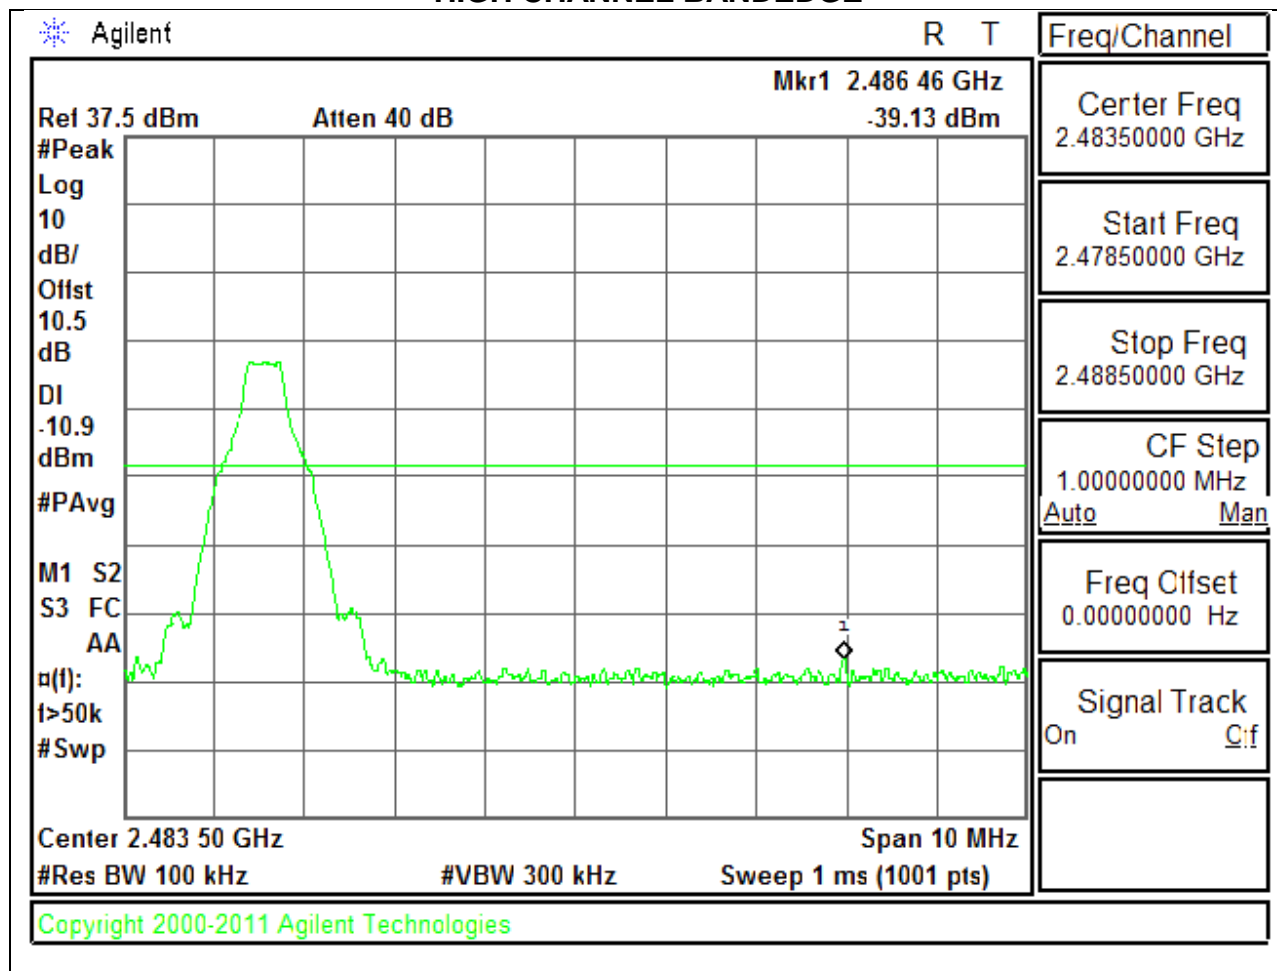


HIGH CHANNEL SPURIOUS

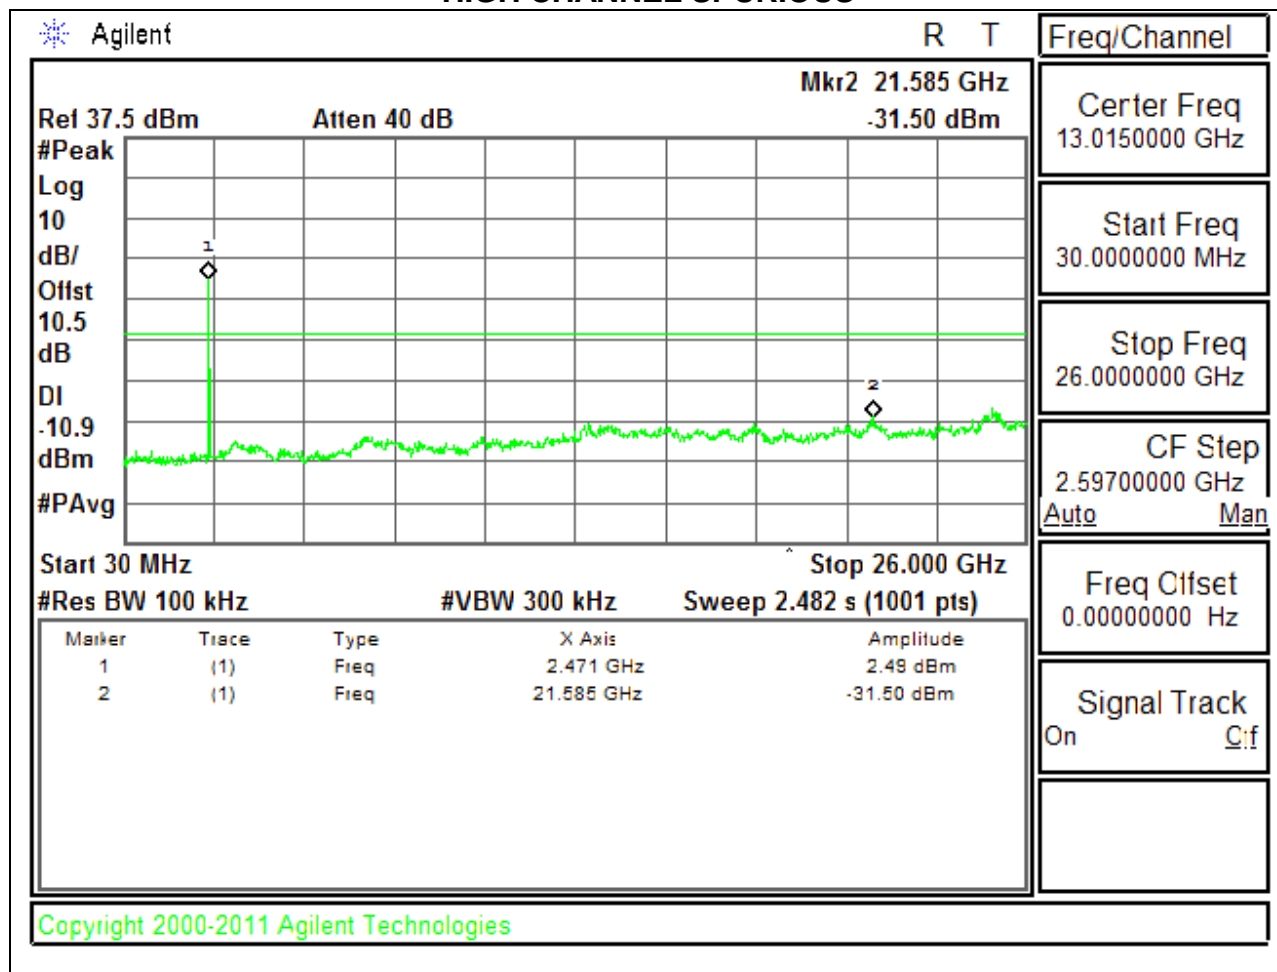


SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

LOW BANDEDGE WITH HOPPING ON

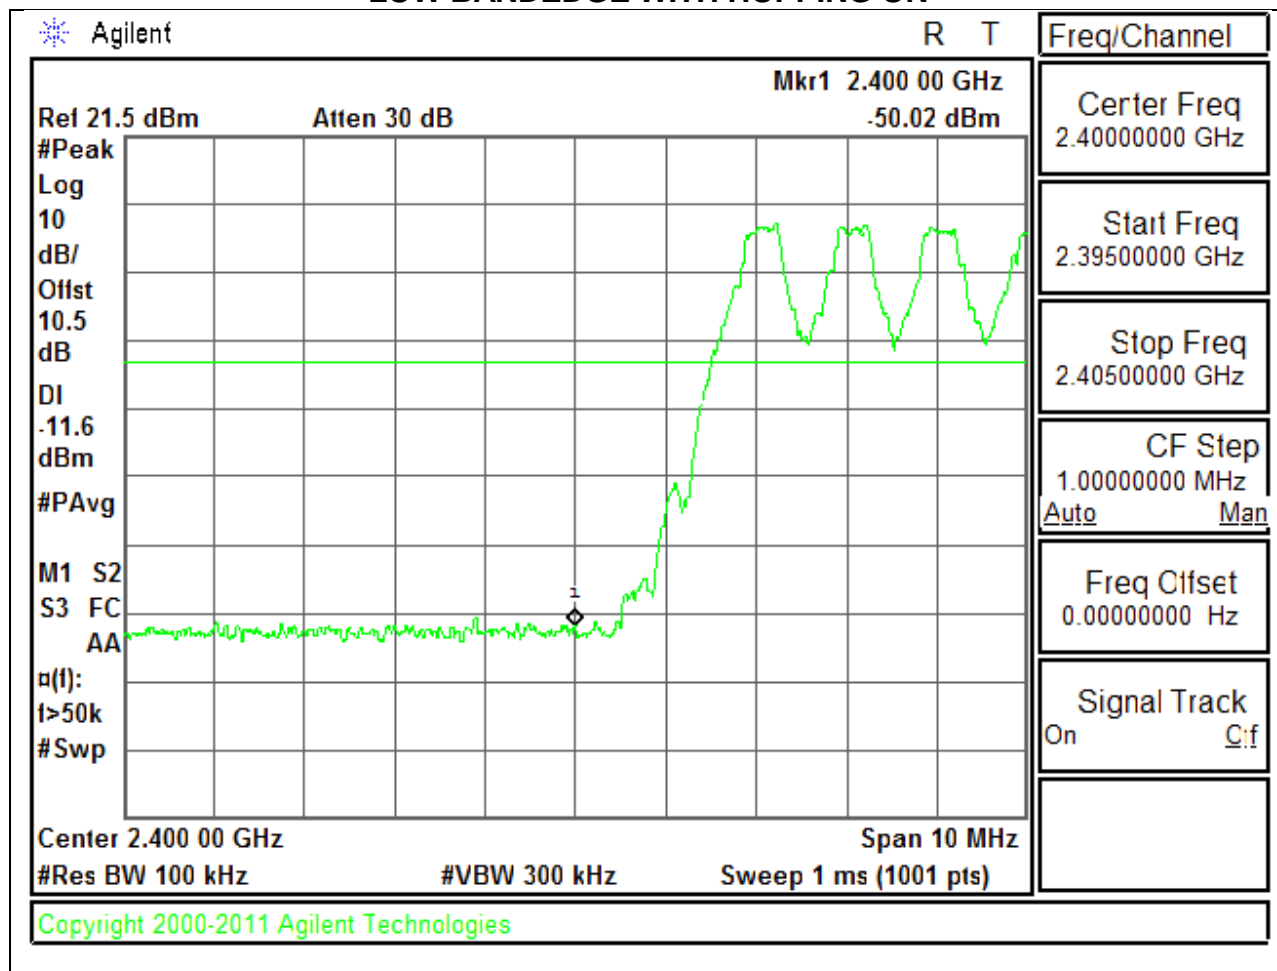


HIGH BANDEDGE WITH HOPPING ON

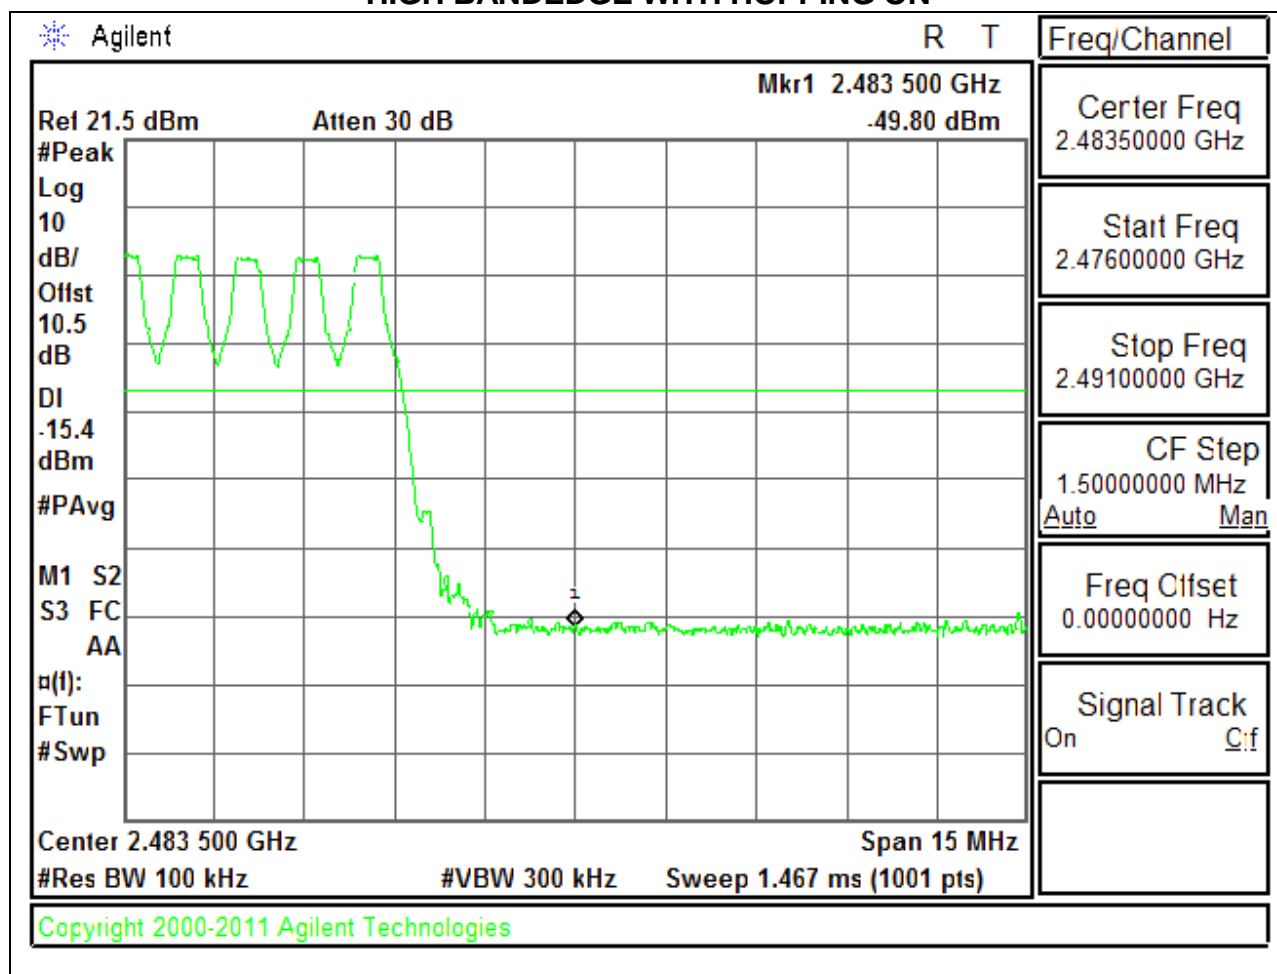


ENHANCED DATA RATE 8PSK MODULATION

SPURIOUS EMISSIONS, LOW CHANNEL

LOW CHANNEL BANDEDGE

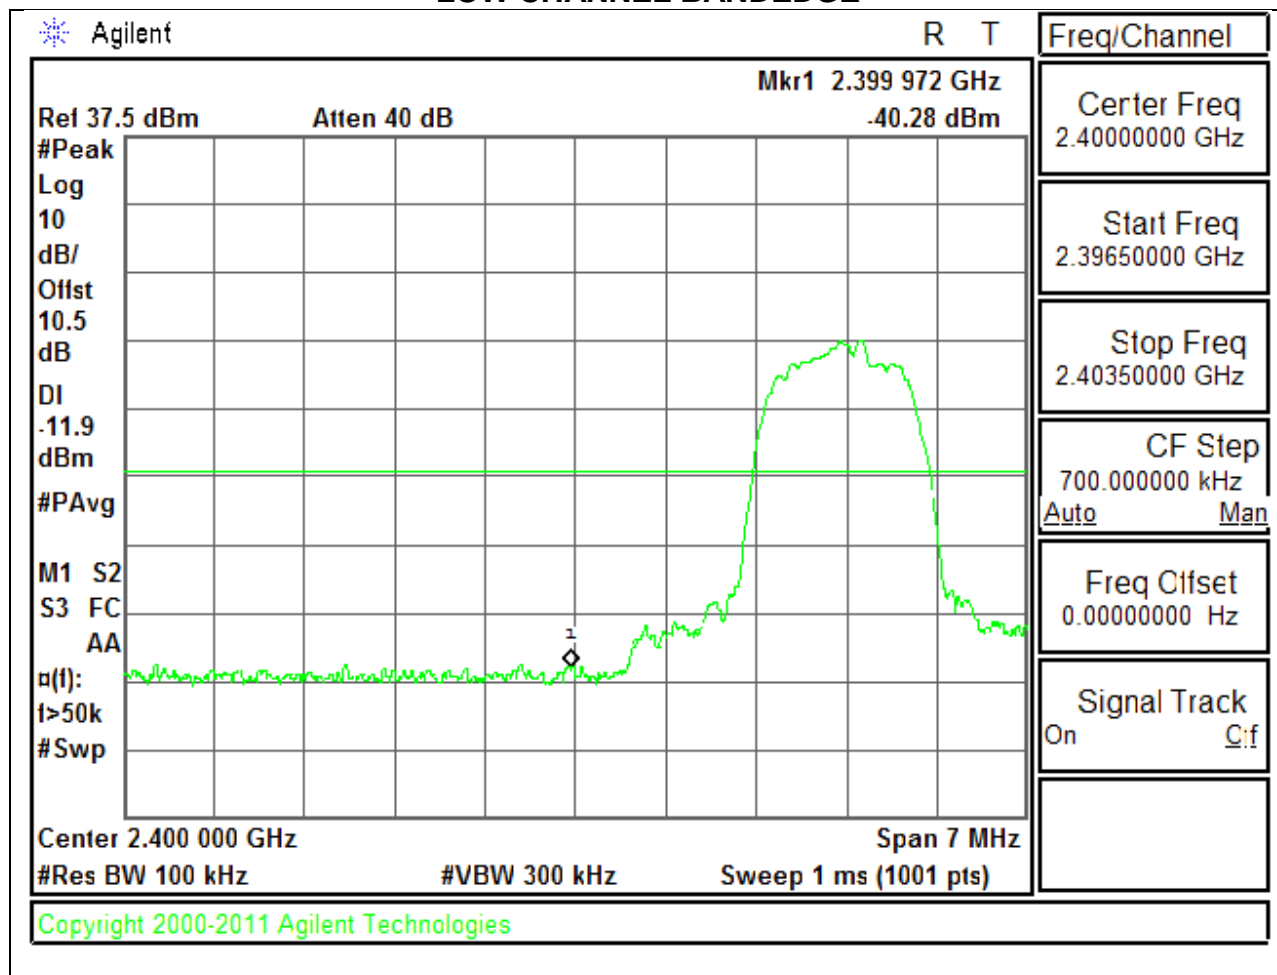


LOW CHANNEL SPURIOUS

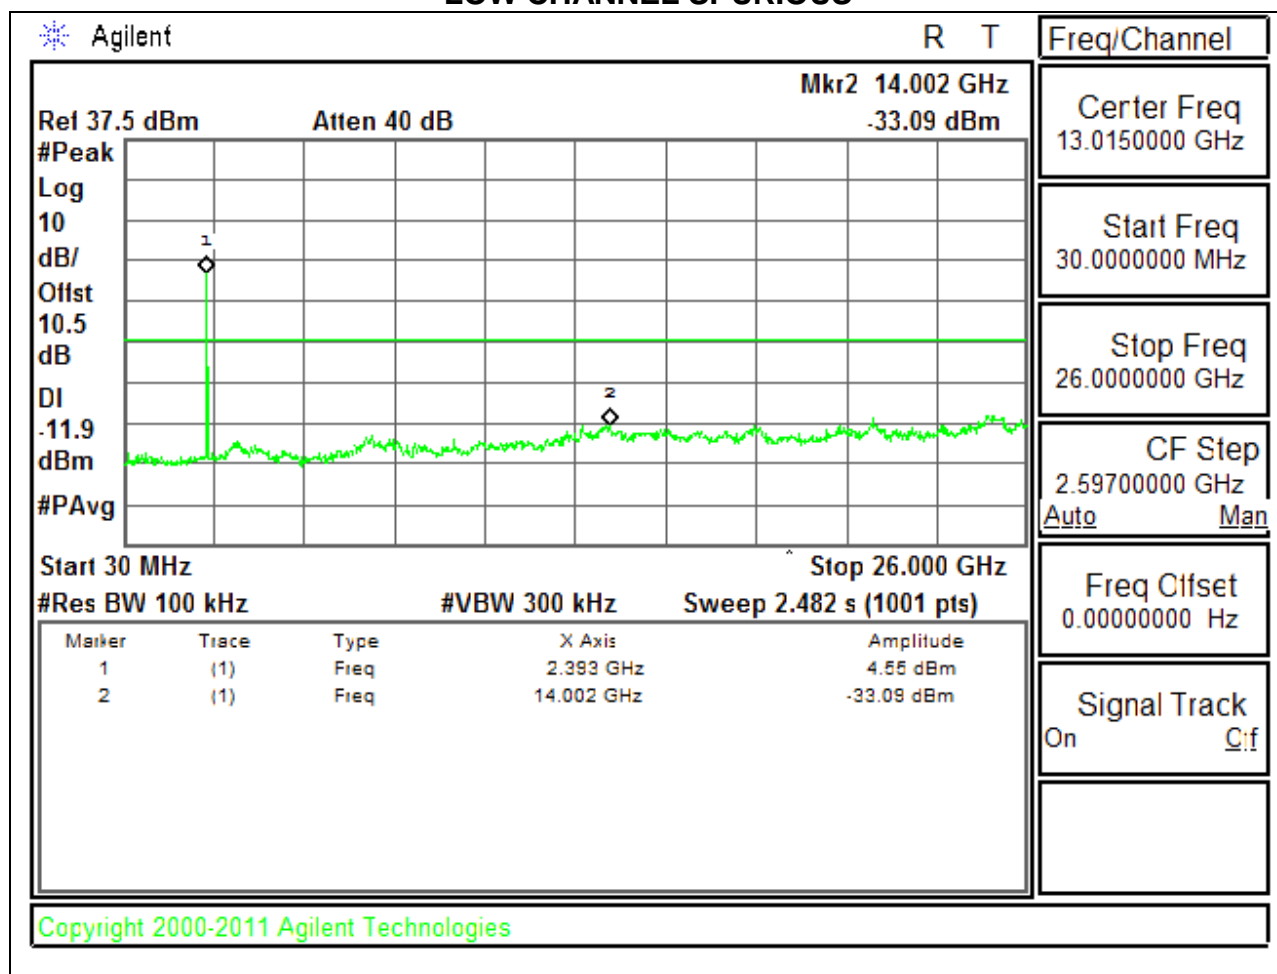


SPURIOUS EMISSIONS, MID CHANNEL

MID CHANNEL BANDEDGE

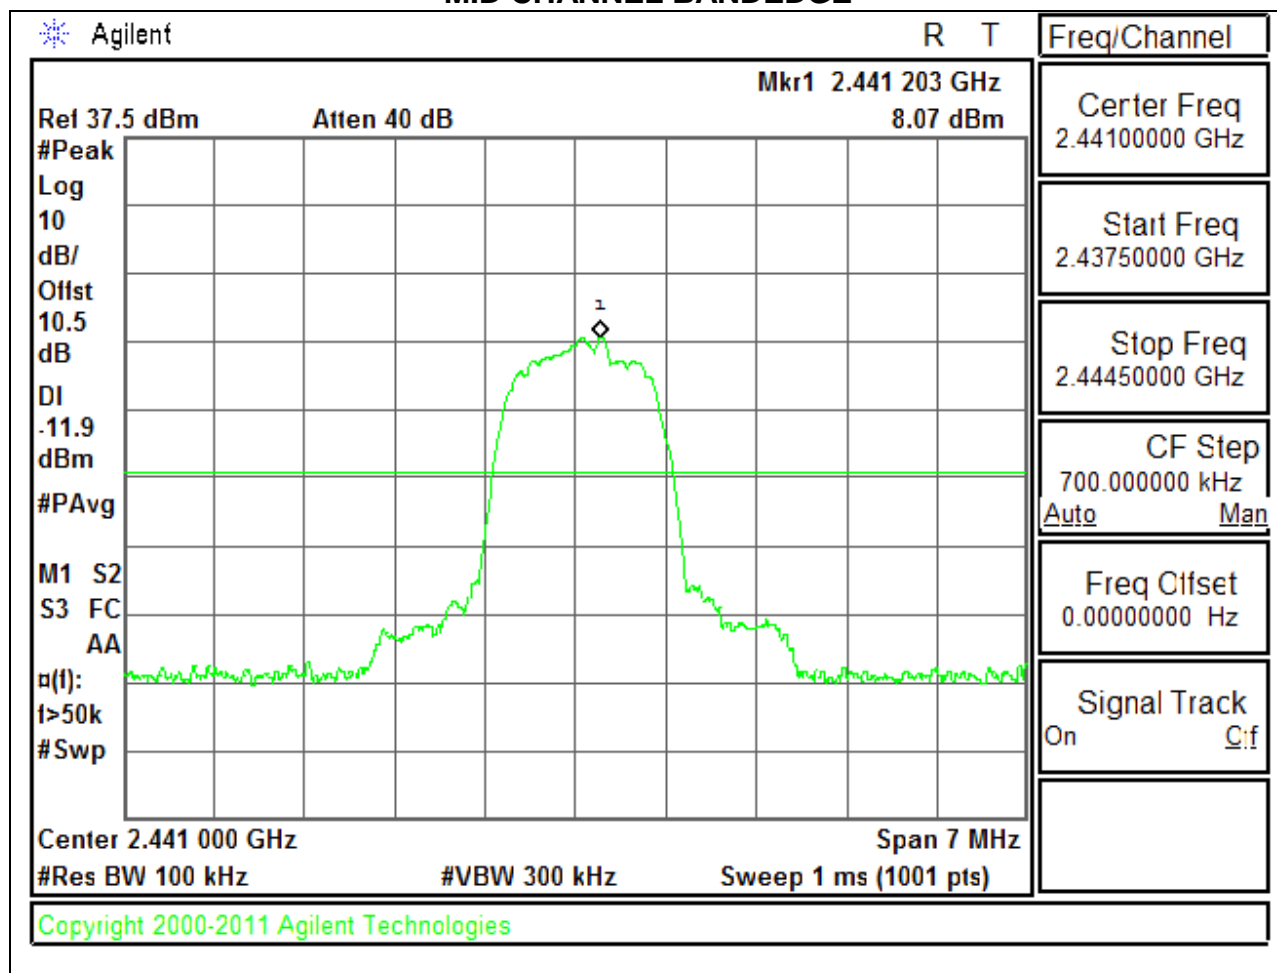


MID CHANNEL SPURIOUS

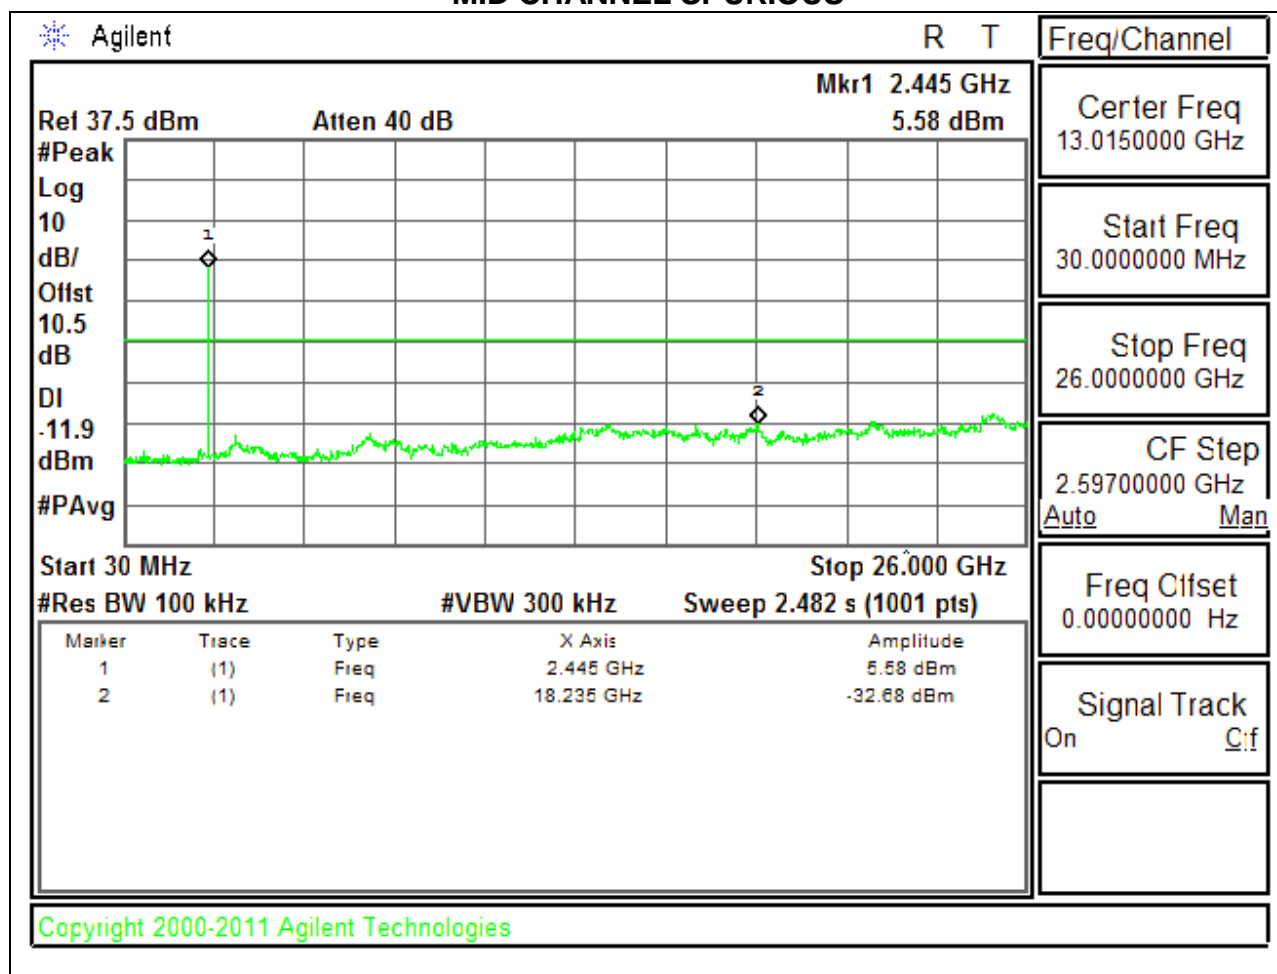


SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

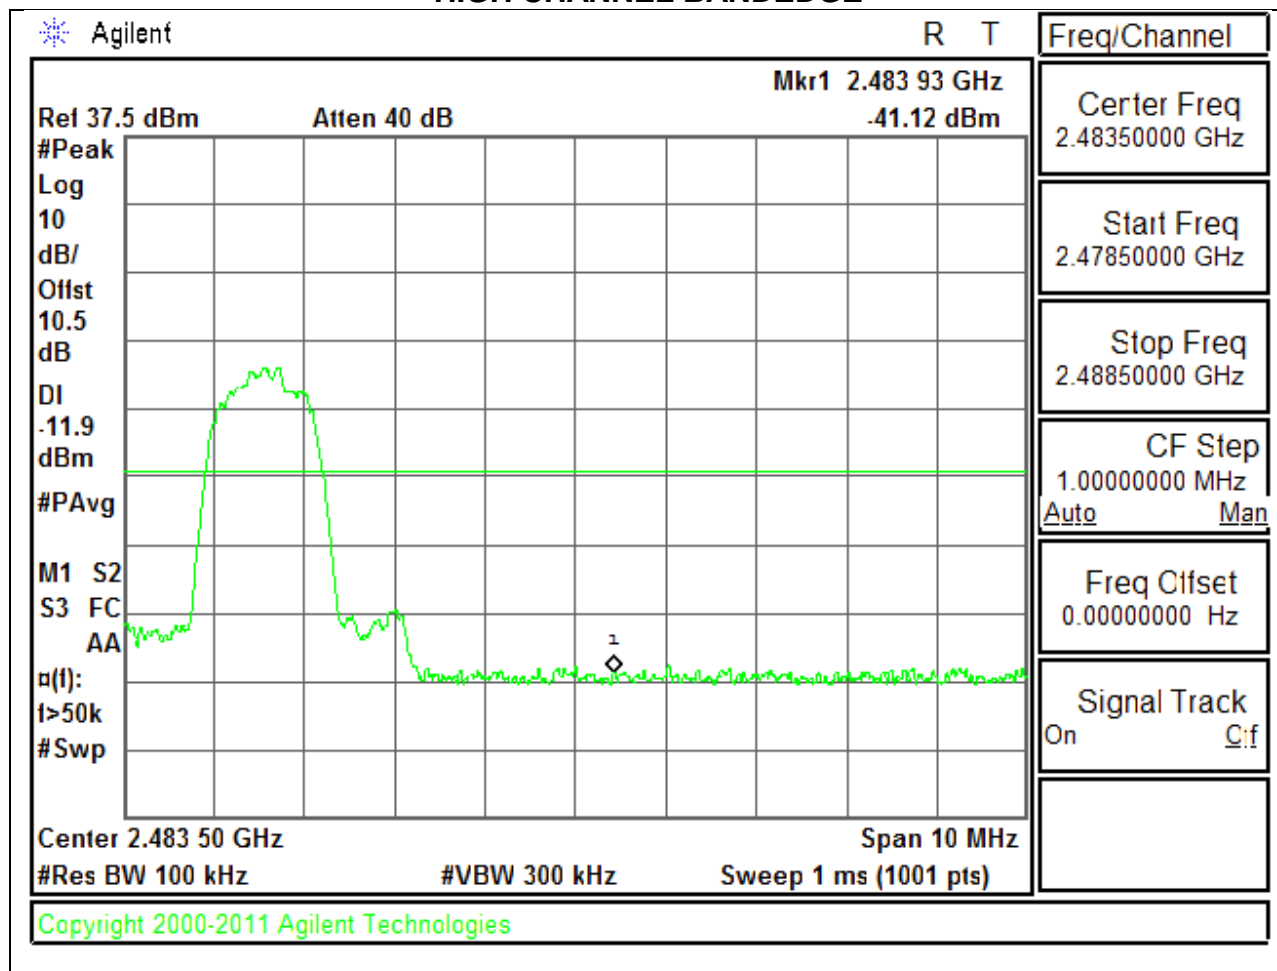


HIGH CHANNEL SPURIOUS

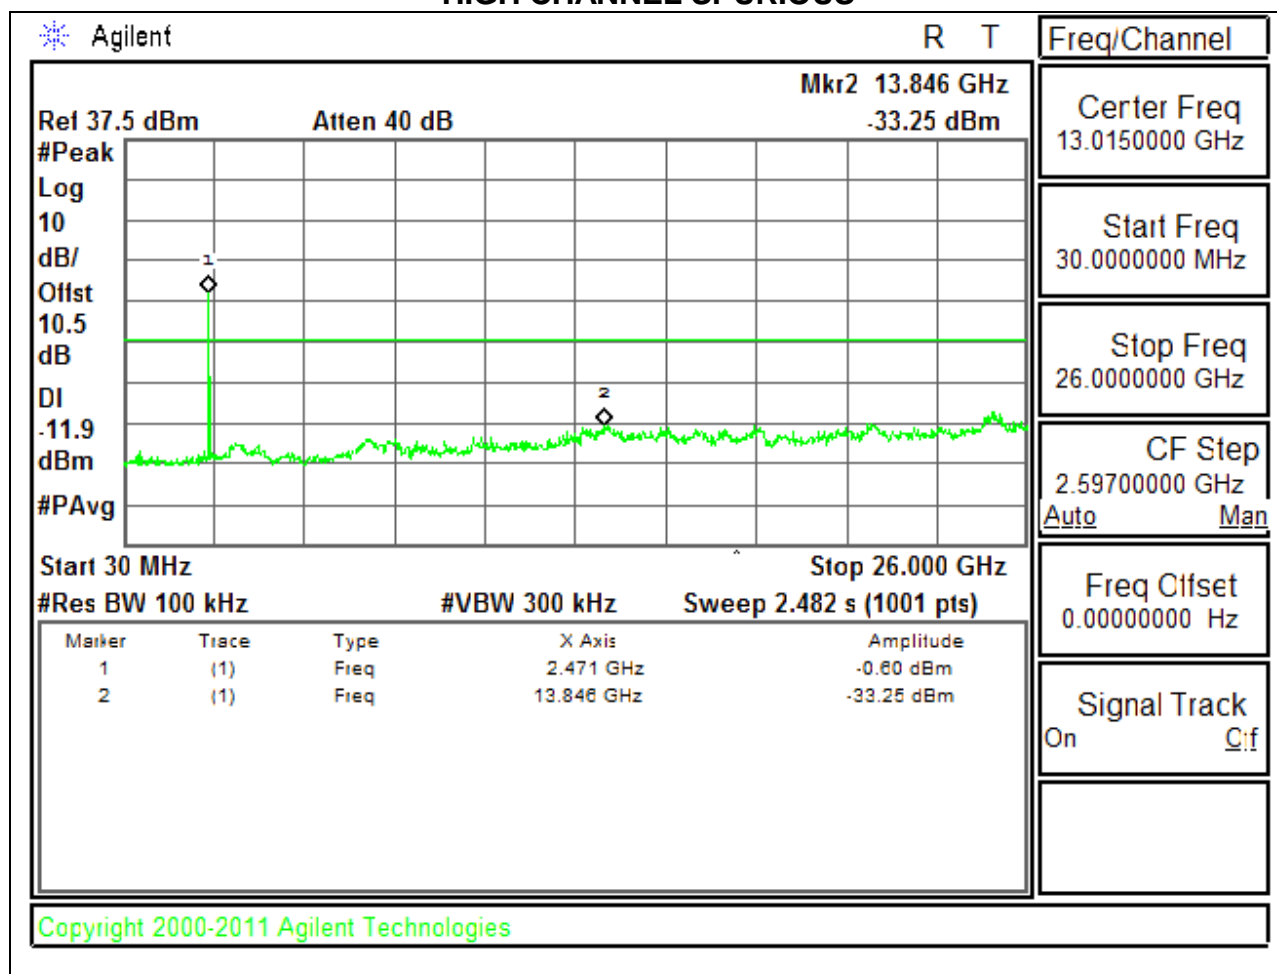


SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

LOW BANDEDGE WITH HOPPING ON

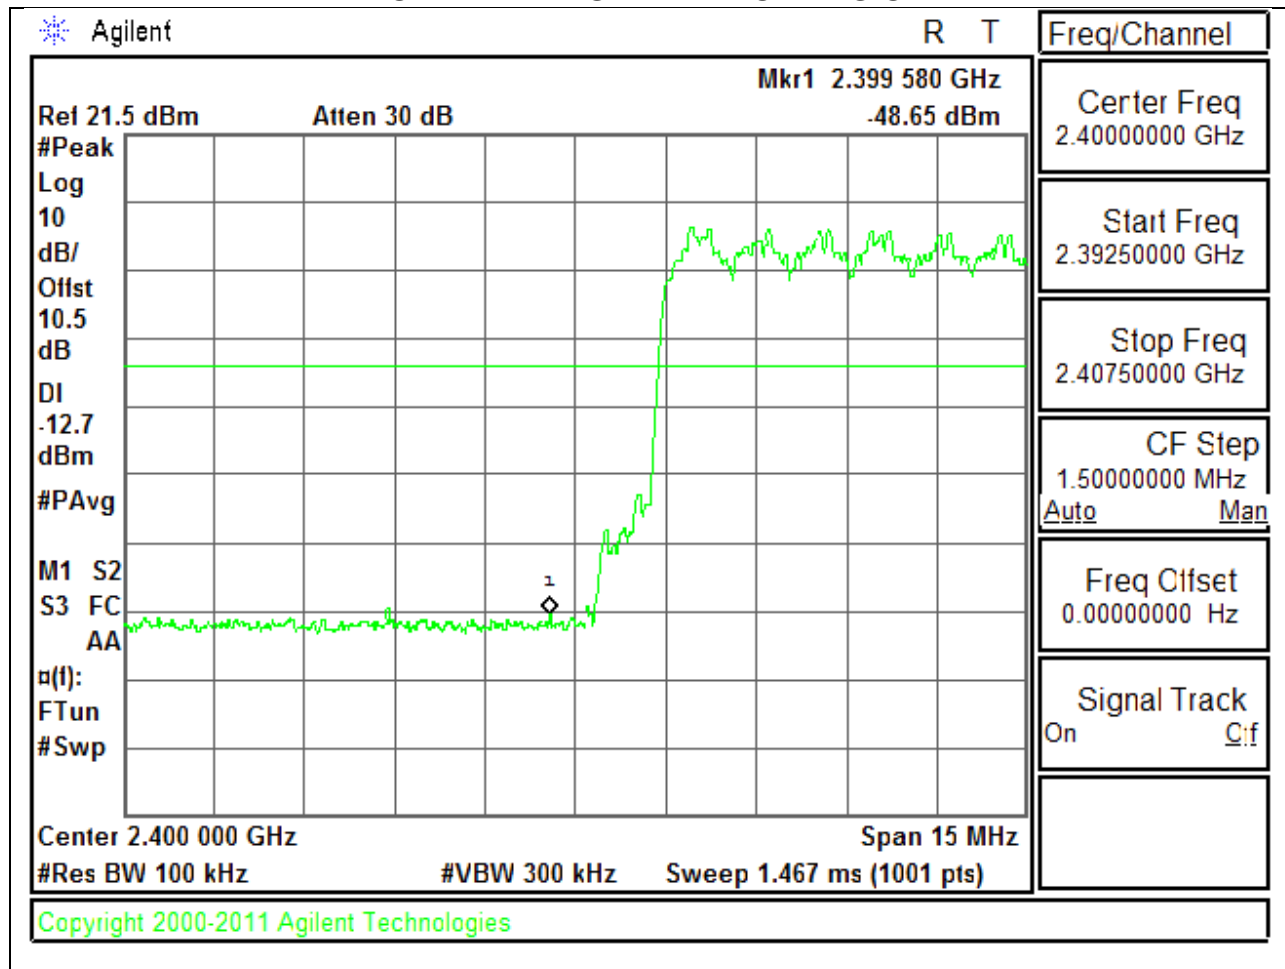

HIGH BANDEDGE WITH HOPPING ON

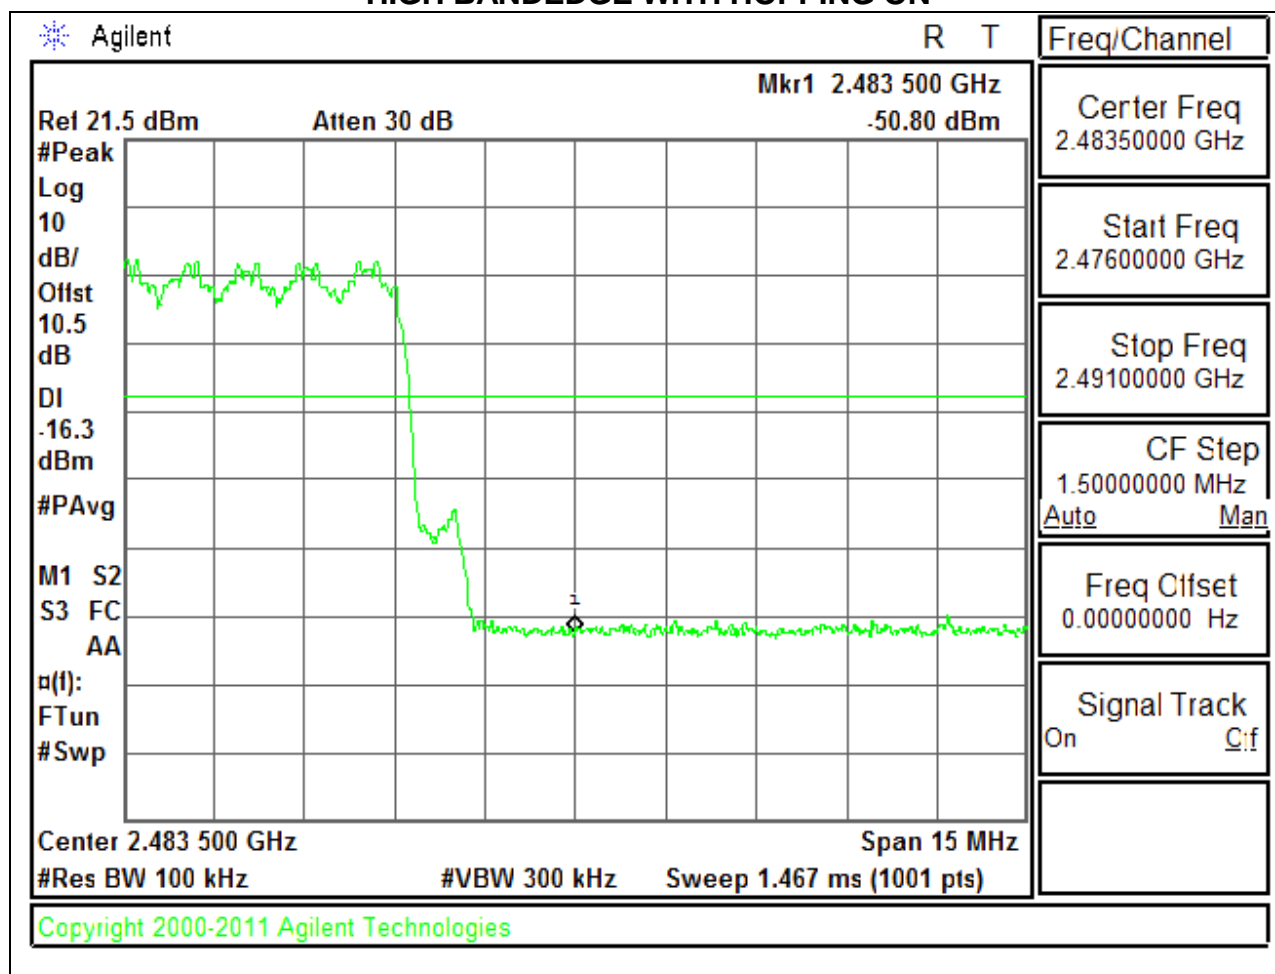

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement.

$GFSK = 1/T = 1 / 0.00289 \text{ S} = 346\text{Hz}$.

The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

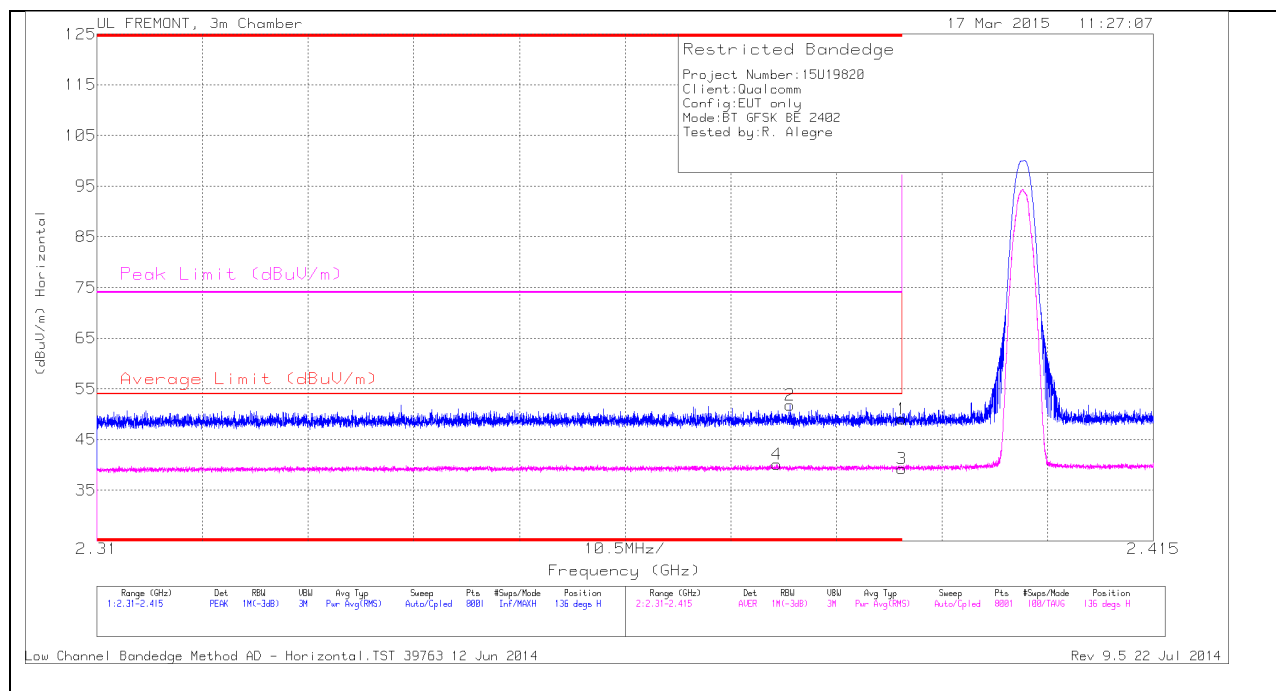

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.1	PK	32	-23.1	49	-	-	74	-25	136	219	H
2	* 2.379	43.03	PK	31.9	-23.1	51.83	-	-	74	-22.17	136	219	H
3	* 2.39	30.36	VB1T	32	-23.1	39.26	54	-14.74	-	-	136	219	H
4	* 2.378	31.26	VB1T	31.9	-23.1	40.06	54	-13.94	-	-	136	219	H

VERTICAL PEAK AND AVERAGE PLOT

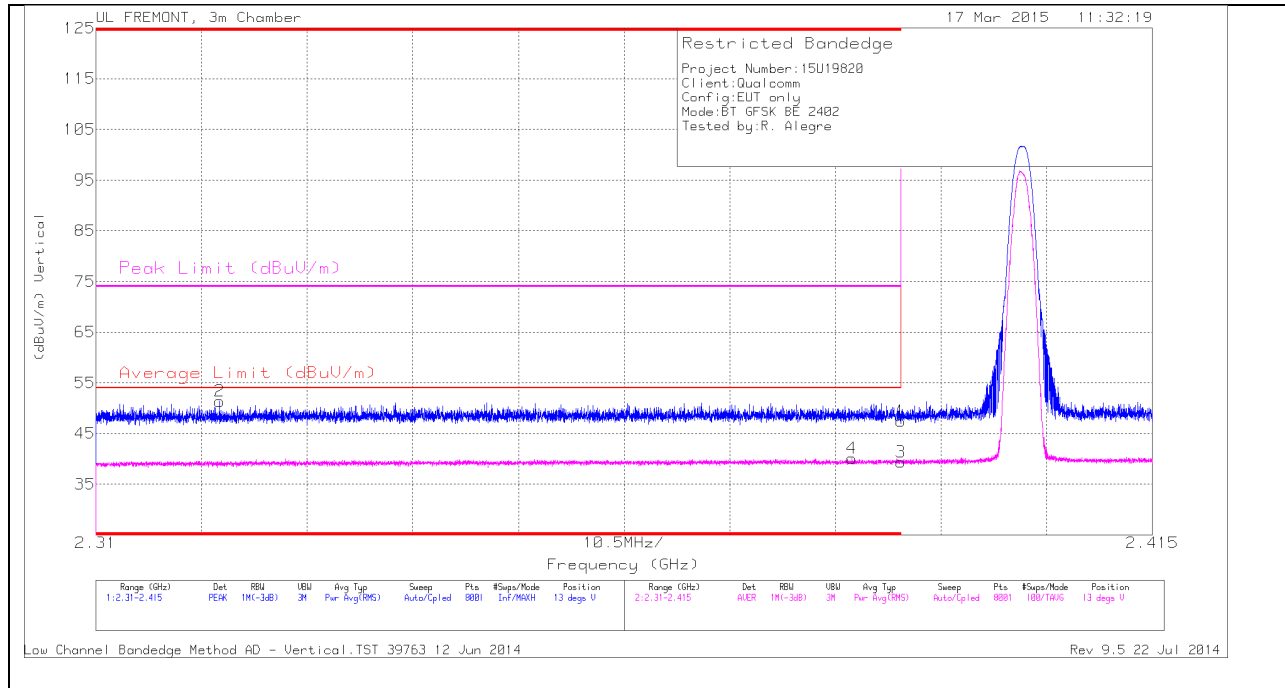


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.5	PK	32	-23.1	47.4	-	-	74	-26.6	13	223	V
2	* 2.322	42.75	PK	31.7	-23.1	51.35	-	-	74	-22.65	13	223	V
3	* 2.39	30.47	VB1T	32	-23.1	39.37	54	-14.63	-	-	13	223	V
4	* 2.385	31.19	VB1T	32	-23.1	40.09	54	-13.91	-	-	13	223	V

AUTHORIZED BANDEDGE (HIGH CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

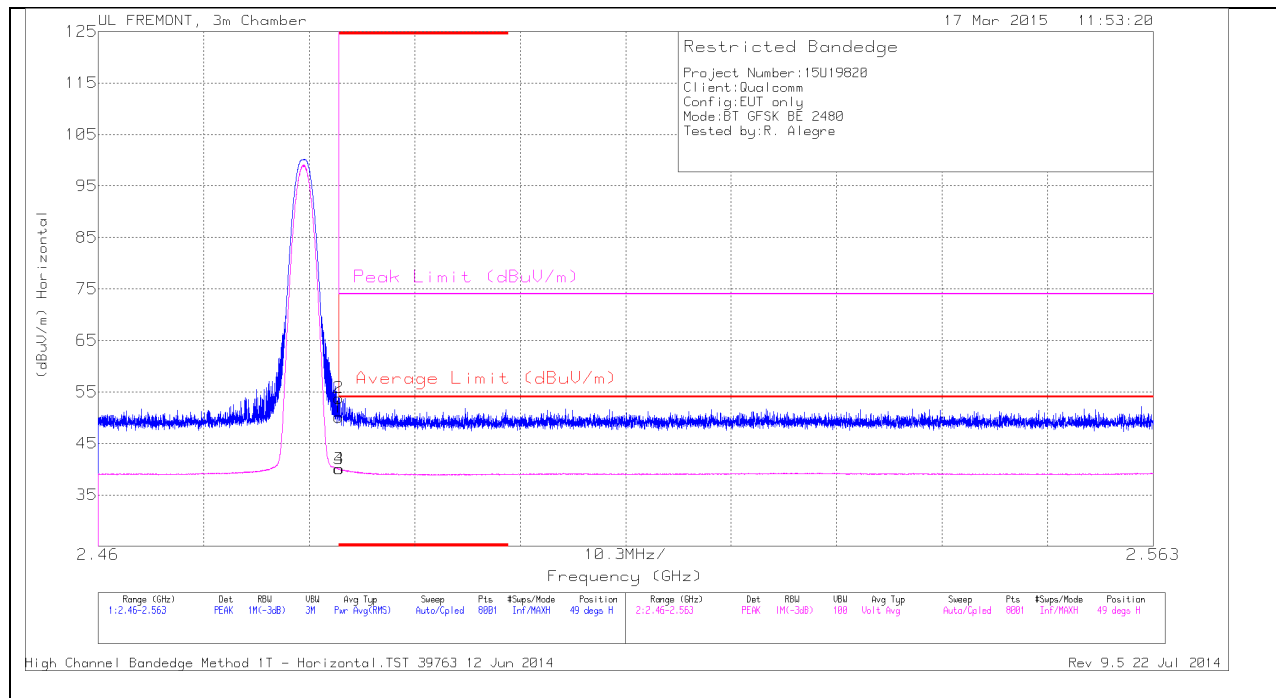

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.56	PK	32.3	-22.8	50.06	-	-	74	-23.94	49	307	H
2	* 2.484	44.31	PK	32.3	-22.8	53.81	-	-	74	-20.19	49	307	H
3	* 2.484	30.55	VB1T	32.3	-22.8	40.05	54	-13.95	-	-	49	307	H
4	* 2.484	30.55	VB1T	32.3	-22.8	40.05	54	-13.95	-	-	49	307	H


VERTICAL PEAK AND AVERAGE PLOT

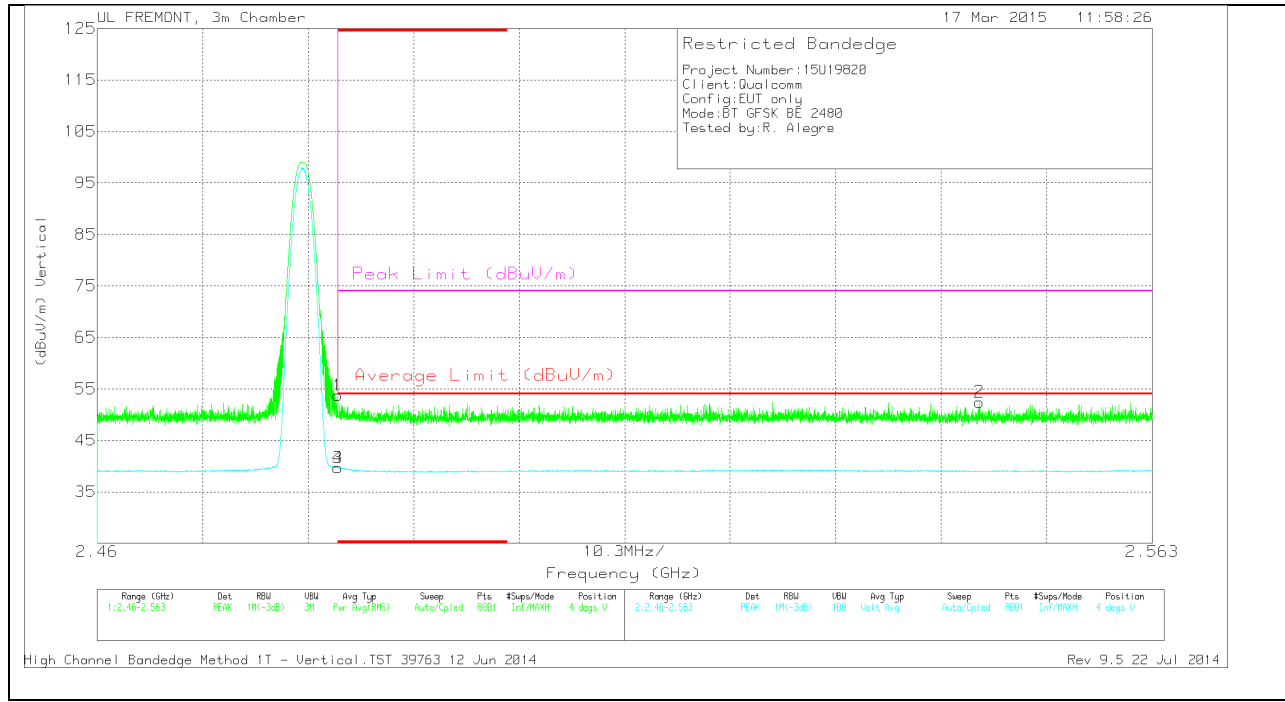

VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.26	PK	32.3	-22.8	53.76	-	-	74	-20.24	4	308	V
3	* 2.484	30.17	VB1T	32.3	-22.8	39.67	54	-14.33	-	-	4	308	V
4	* 2.484	30.2	VB1T	32.3	-22.8	39.7	54	-14.3	-	-	4	308	V
2	2.546	42.75	PK	32.4	-22.7	52.45	-	-	74	-21.55	4	308	V

HARMONICS AND SPURIOUS EMISSIONS

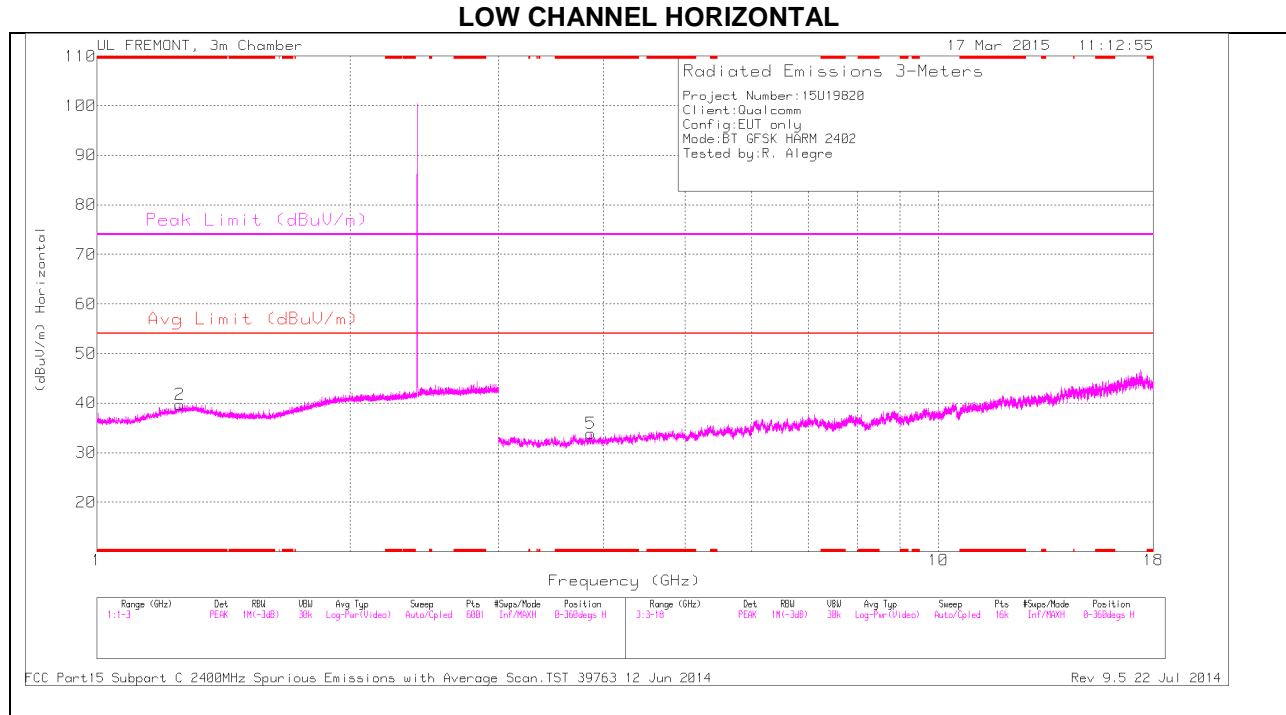

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

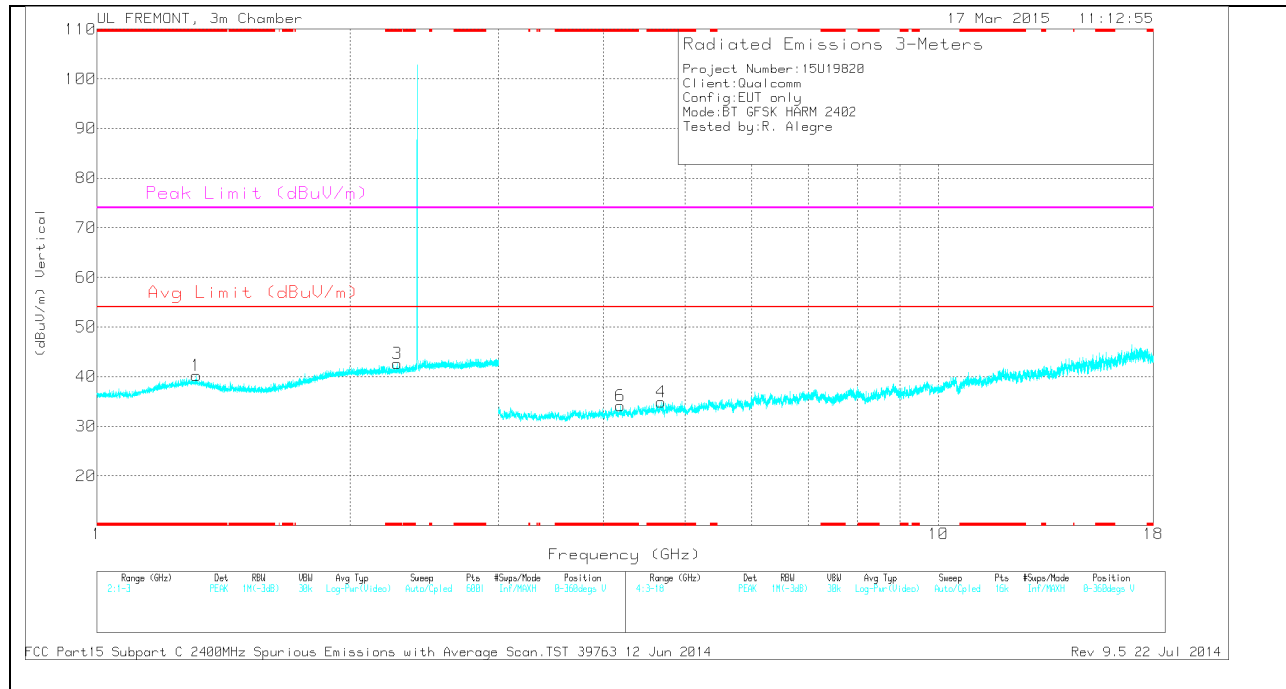

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 1.254	34.13	PK	29.4	-23.8	0	39.73	-	-	74	-34.27	0-360	100	H
1	* 1.313	34.27	PK	29.7	-23.8	0	40.17	-	-	74	-33.83	0-360	100	V
3	* 2.275	34.11	PK	31.6	-23.1	0	42.61	-	-	74	-31.39	0-360	200	V
5	* 3.862	32.02	PK	33.1	-31.2	0	33.92	-	-	74	-40.08	0-360	100	H
4	* 4.681	31.58	PK	34	-30.7	0	34.88	-	-	74	-39.12	0-360	200	V
6	* 4.188	31.3	PK	33.3	-30.5	0	34.1	-	-	74	-39.9	0-360	200	V

PK - Peak detector


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

MID CHANNEL HORIZONTAL

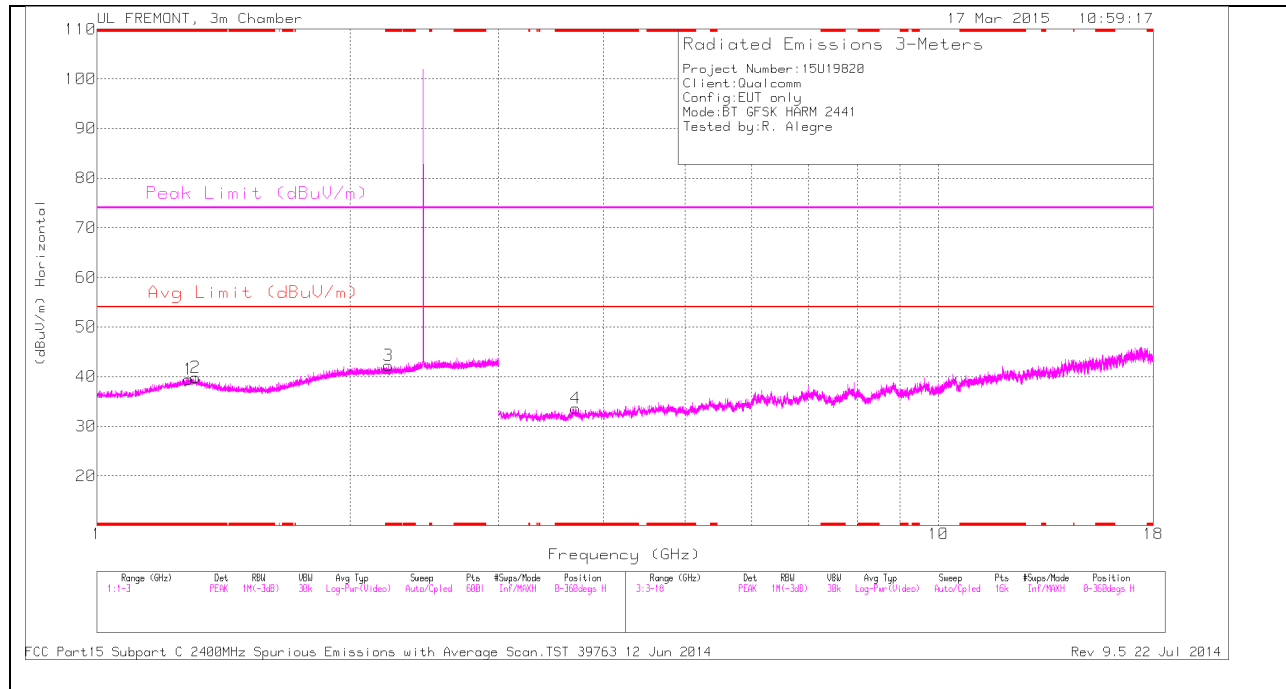

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

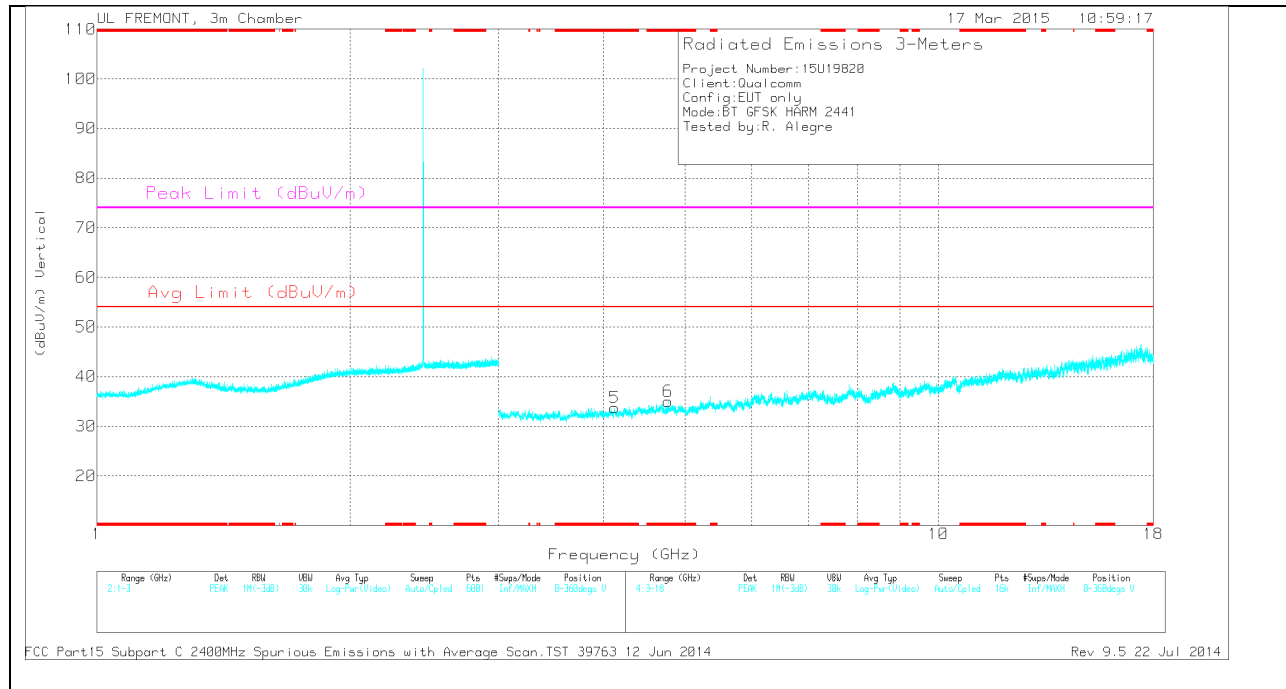

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


MID CHANNEL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.285	33.55	PK	29.7	-23.8	0	39.45	-	-	74	-34.55	0-360	100	H
2	* 1.31	33.82	PK	29.8	-23.8	0	39.82	-	-	74	-34.18	0-360	100	H
3	* 2.222	33.71	PK	31.5	-23	0	42.21	-	-	74	-31.79	0-360	200	H
4	* 3.703	31.43	PK	33	-30.8	0	33.63	-	-	74	-40.37	0-360	200	H
5	* 4.125	31.49	PK	33.3	-31	0	33.79	-	-	74	-40.21	0-360	100	V
6	* 4.772	31.58	PK	34	-30.6	0	34.98	-	-	74	-39.02	0-360	100	V

PK - Peak detector

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

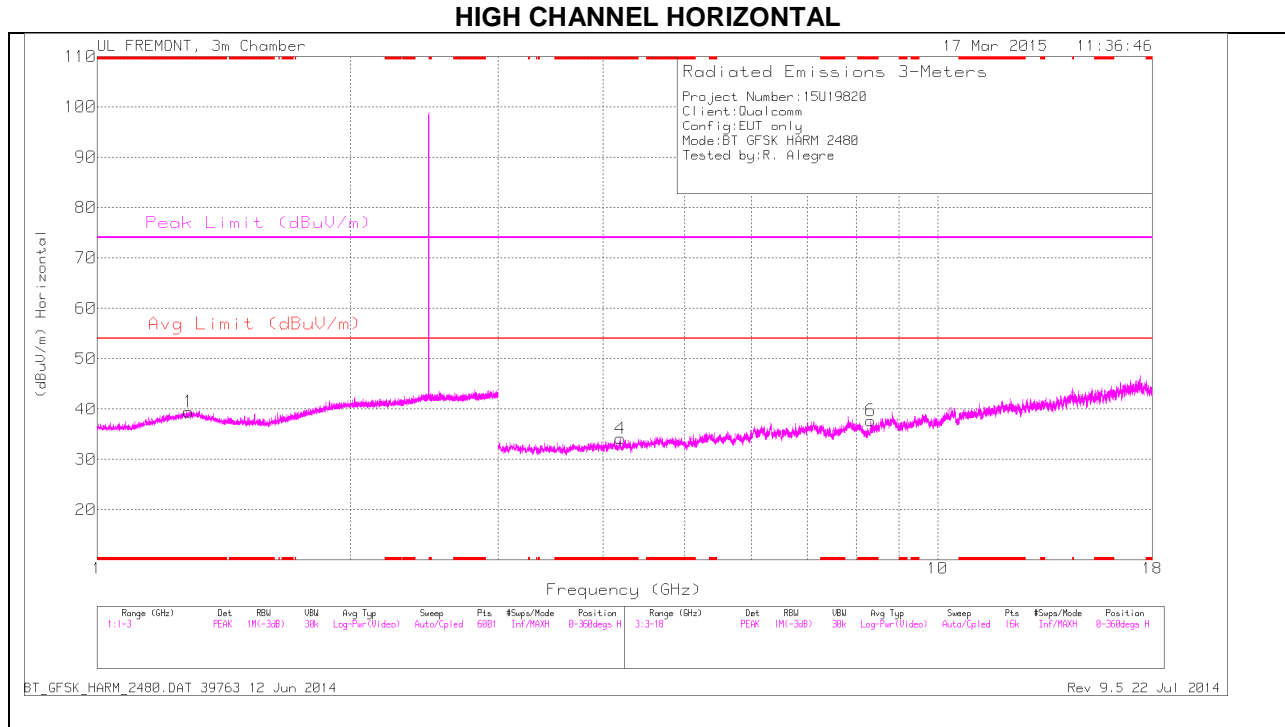

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

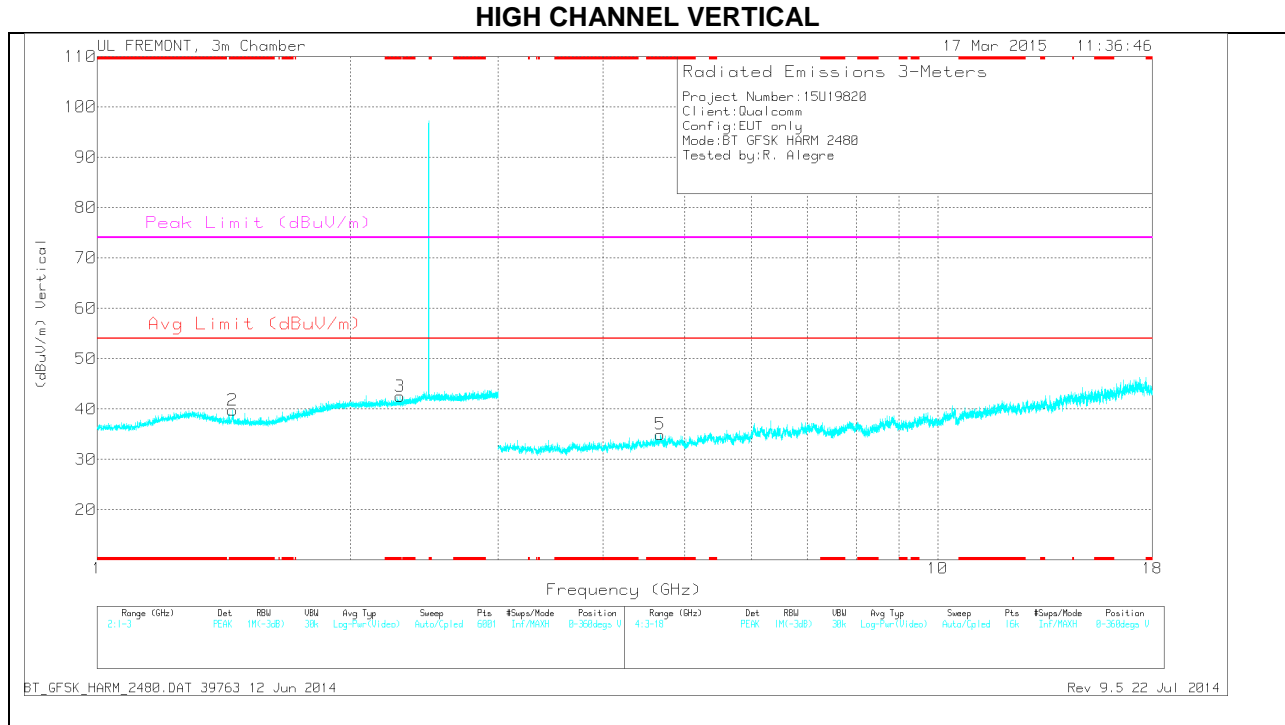

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.285	33.44	PK	29.7	-23.7	39.44	-	-	74	-34.56	0-360	200	H
2	* 1.449	34.95	PK	28.4	-23.6	39.75	-	-	74	-34.25	0-360	100	V
3	* 2.293	34.02	PK	31.6	-23.1	42.52	-	-	74	-31.48	0-360	100	V
4	* 4.192	31.43	PK	33.3	-30.6	34.13	-	-	74	-39.87	0-360	100	H
6	* 8.327	29.5	PK	35.8	-27.6	37.7	-	-	74	-36.3	0-360	100	H
5	* 4.673	31.67	PK	34	-30.7	34.97	-	-	74	-39.03	0-360	200	V

PK - Peak detector

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

9.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

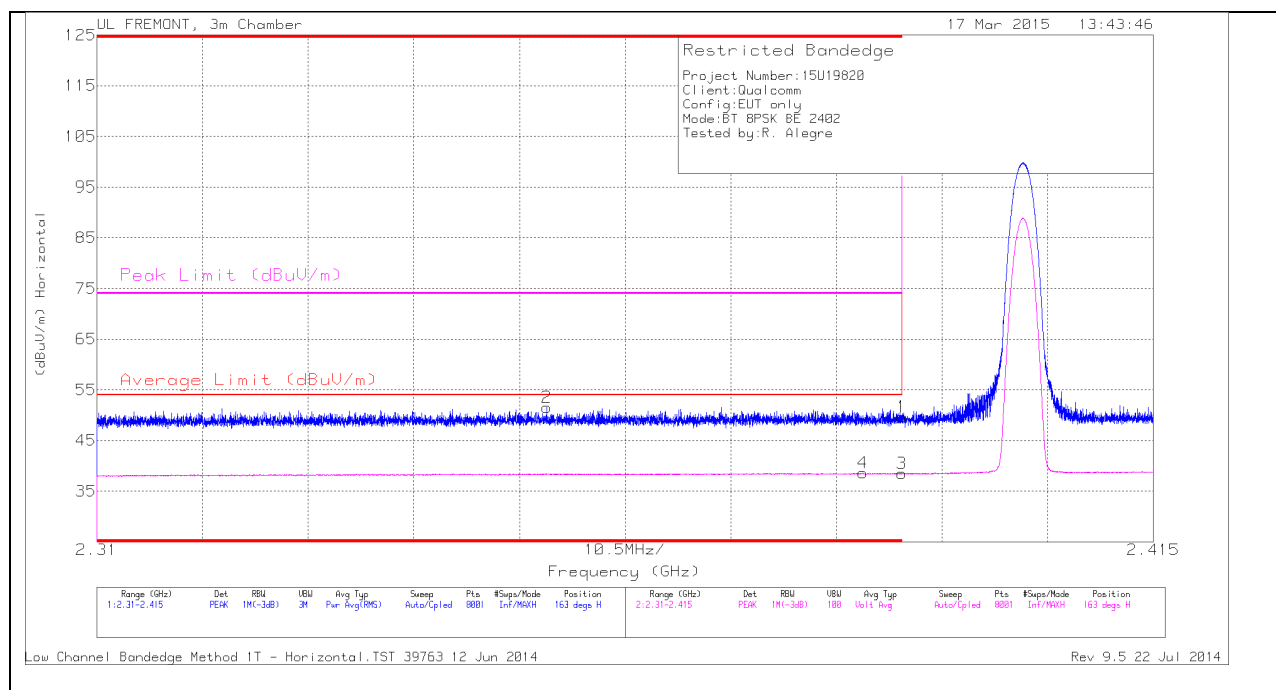

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/ Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.79	PK	32	-23.1	49.69	-	-	74	-24.31	163	136	H
2	* 2.355	42.88	PK	31.8	-23.1	51.58	-	-	74	-22.42	163	136	H
3	* 2.39	29.54	VB1T	32	-23.1	38.44	54	-15.56	-	-	163	136	H
4	* 2.386	29.68	VB1T	32	-23.1	38.58	54	-15.42	-	-	163	136	H

VERTICAL PEAK AND AVERAGE PLOT

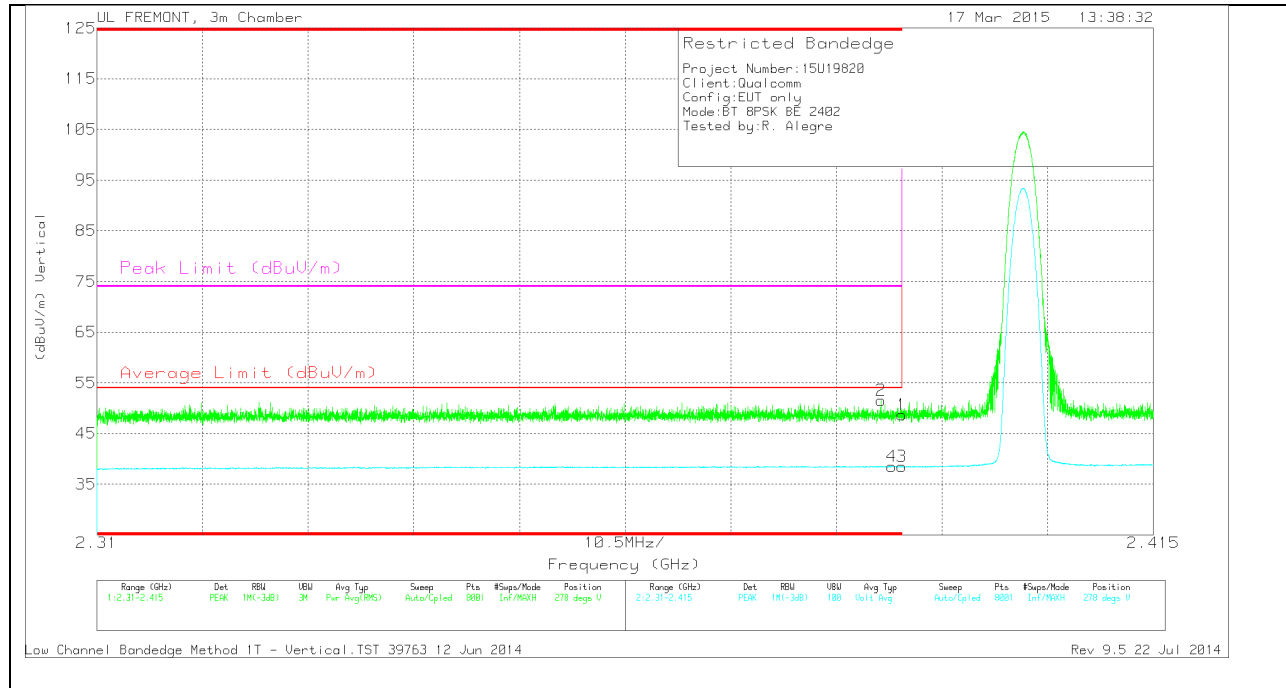


VERTICAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.74	PK	32	-23.1	48.64	-	-	74	-25.36	278	116	V
2	* 2.388	42.66	PK	32	-23.1	51.56	-	-	74	-22.44	278	116	V
3	* 2.39	29.56	VB1T	32	-23.1	38.46	54	-15.54	-	-	278	116	V
4	* 2.389	29.64	VB1T	32	-23.1	38.54	54	-15.46	-	-	278	116	V

AUTHORIZED BANDEDGE (HIGH CHANNEL)


HORIZONTAL PEAK AND AVERAGE PLOT

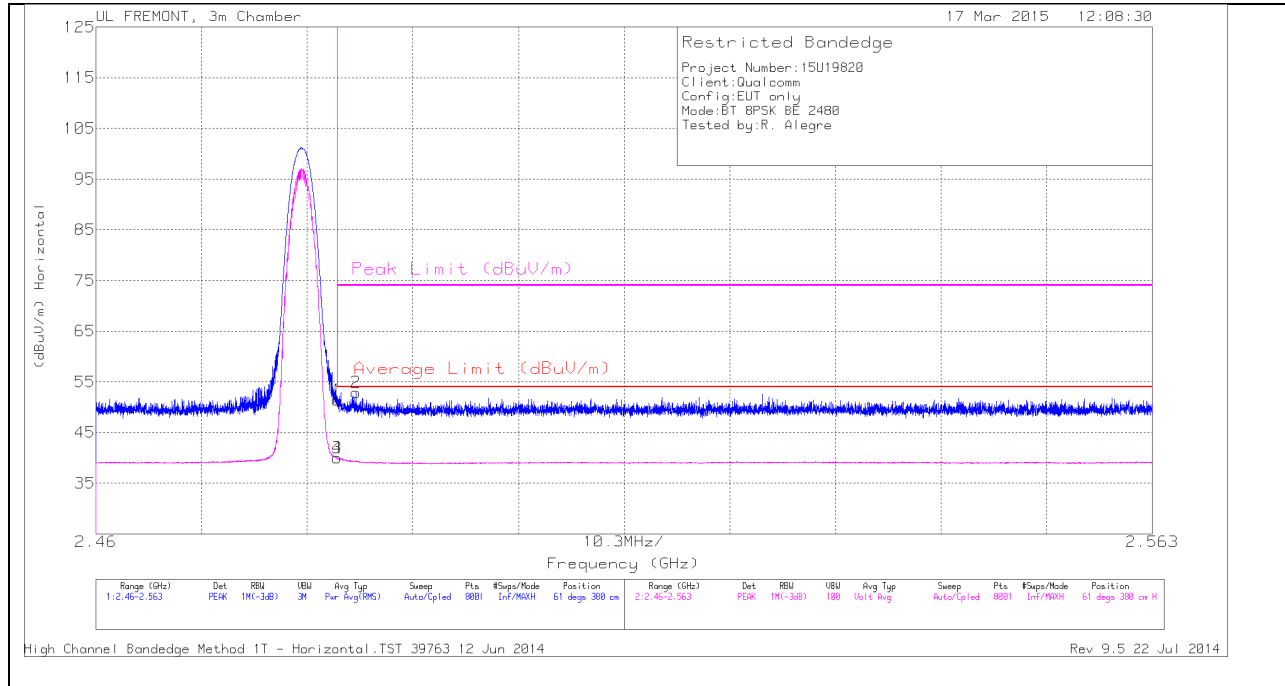

HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	41.9	PK	32.3	-22.8	51.4	-	-	74	-22.6	61	380	H
3	2.484	30.46	VB1T	32.3	-22.8	39.96	54	-14.04	-	-	61	380	H
4	2.484	30.53	VB1T	32.3	-22.8	40.03	54	-13.97	-	-	61	380	H
2	2.485	43.43	PK	32.3	-22.8	52.93	-	-	74	-21.07	61	380	H


VERTICAL PEAK AND AVERAGE PLOT

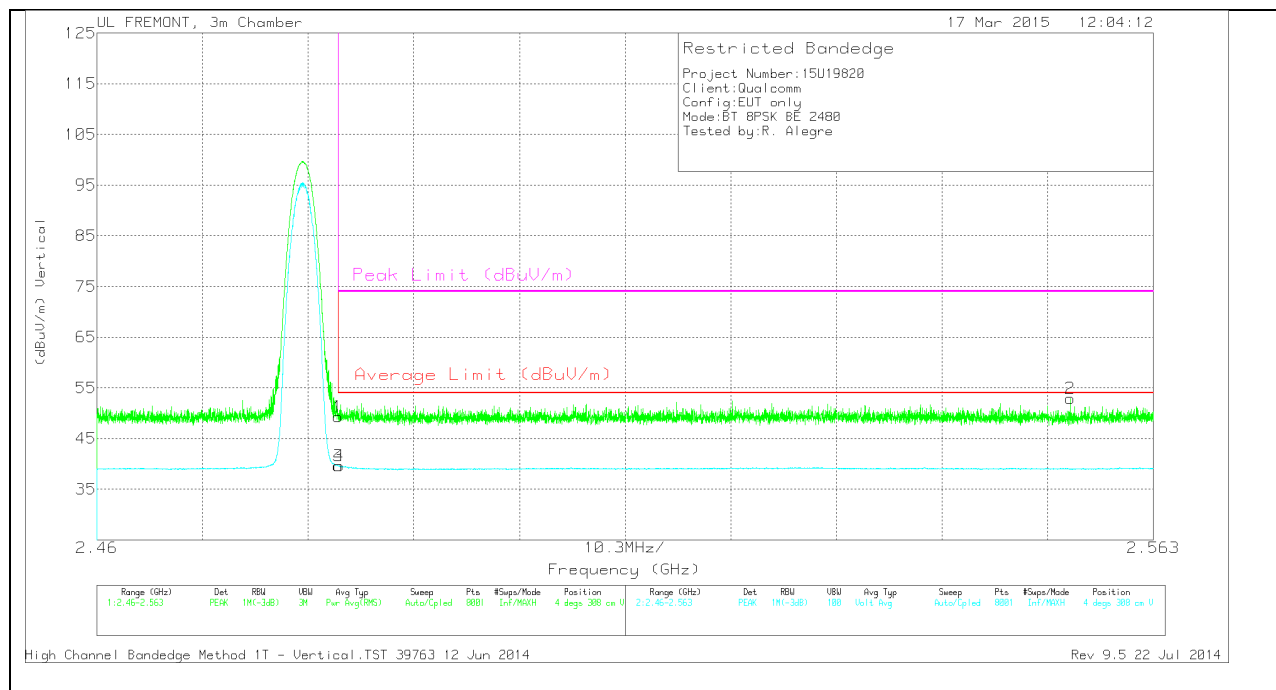

VERTICAL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	39.84	PK	32.3	-22.8	49.34	-	-	74	-24.66	4	308	V
3	2.484	30.09	VB1T	32.3	-22.8	39.59	54	-14.41	-	-	4	308	V
4	2.484	30.1	VB1T	32.3	-22.8	39.6	54	-14.4	-	-	4	308	V
2	2.555	43.17	PK	32.4	-22.7	52.87	-	-	74	-21.13	4	308	V

HARMONICS AND SPURIOUS EMISSIONS

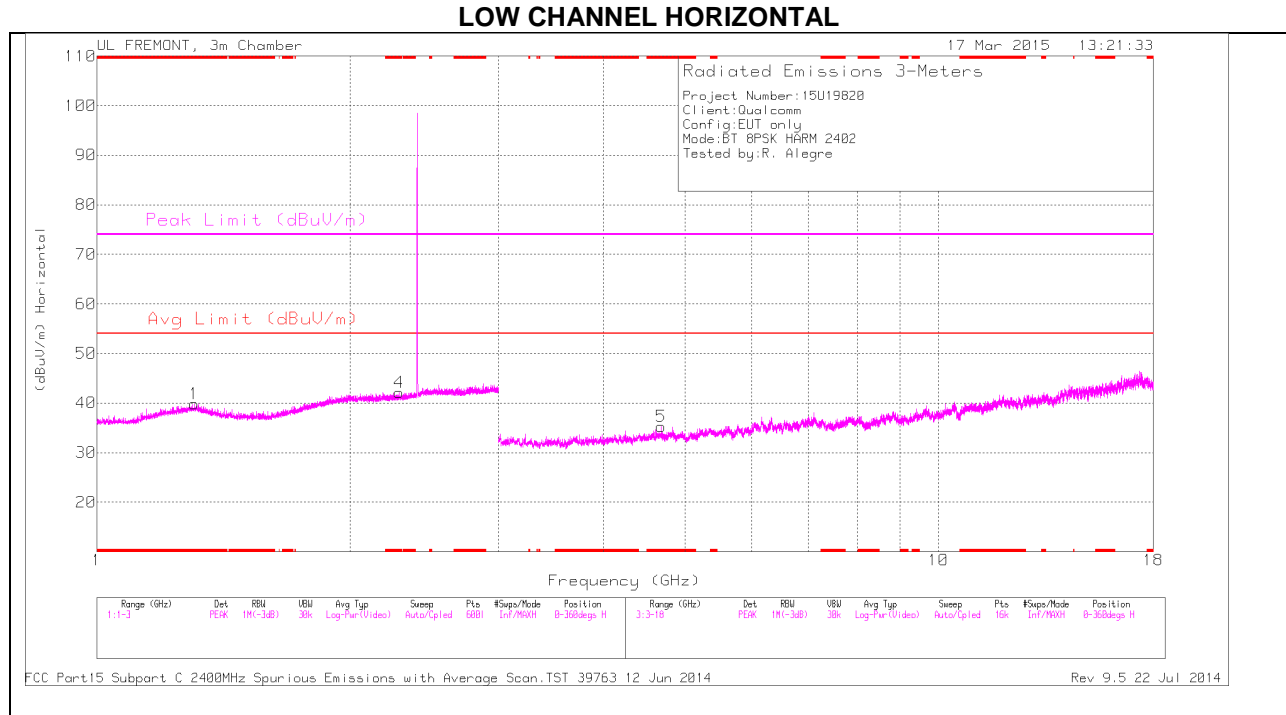

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

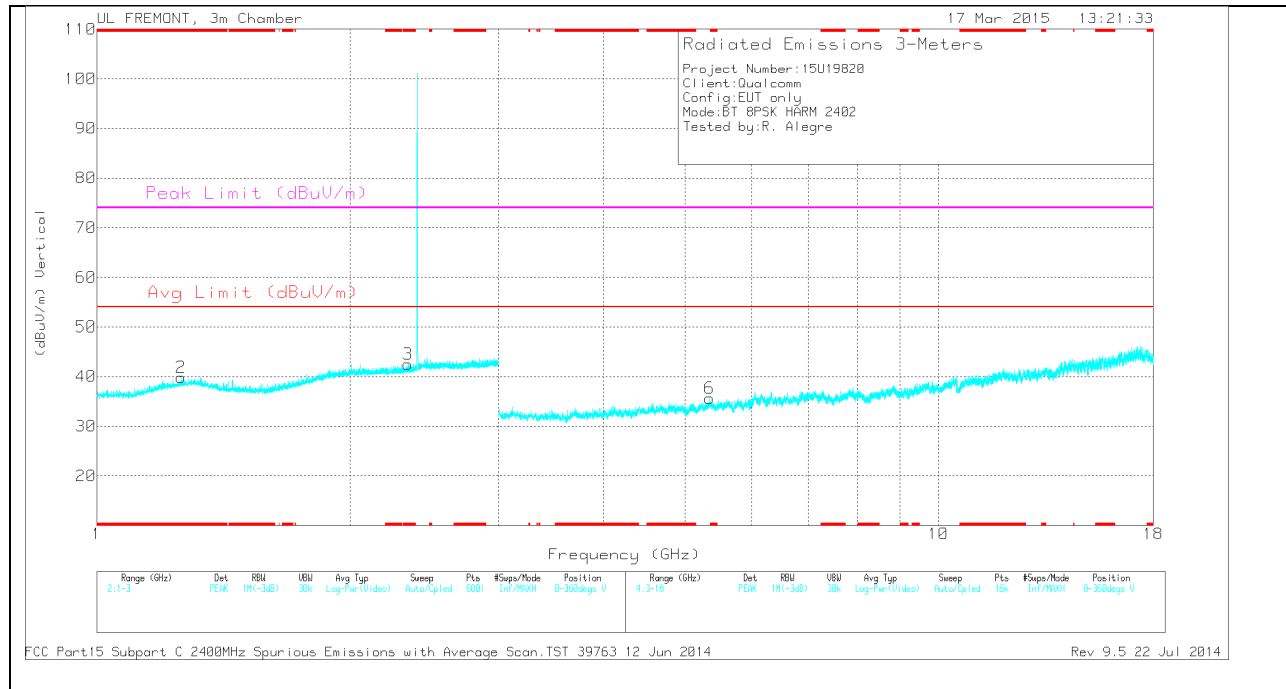

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.306	33.83	PK	29.8	-23.8	39.83	-	-	74	-34.17	0-360	200	H
4	* 2.285	33.57	PK	31.6	-23	42.17	-	-	74	-31.83	0-360	100	H
2	* 1.259	34.1	PK	29.5	-23.8	39.8	-	-	74	-34.2	0-360	100	V
3	* 2.34	33.76	PK	31.8	-23.1	42.46	-	-	74	-31.54	0-360	200	V
5	* 4.683	31.94	PK	34	-30.7	35.24	-	-	74	-38.76	0-360	100	H
6	5.345	31.13	PK	34.5	-30	35.63	-	-	-	-	0-360	100	V


PK - Peak detector

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5.344	27.18	VB1T	34.5	-30	31.68	-	-	-	-	105	100	V
5.345	40.4	PK3	34.5	-30	44.9	-	-	-	-	105	100	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

MID CHANNEL HORIZONTAL

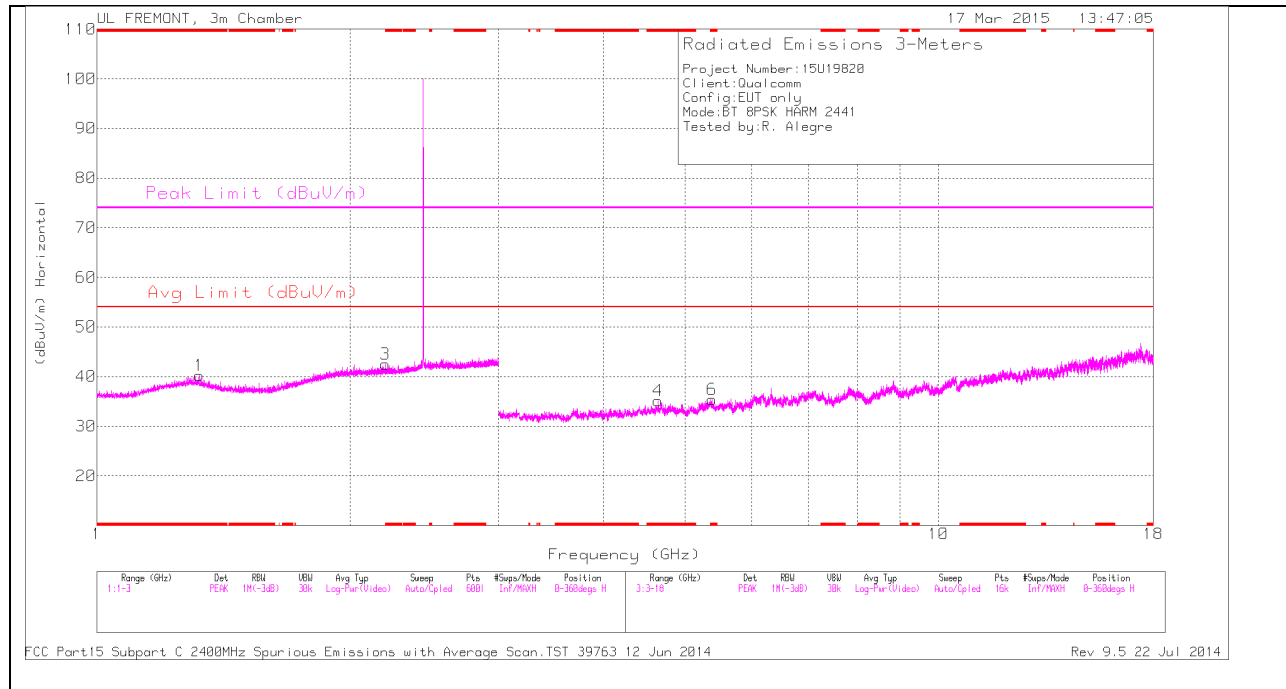

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

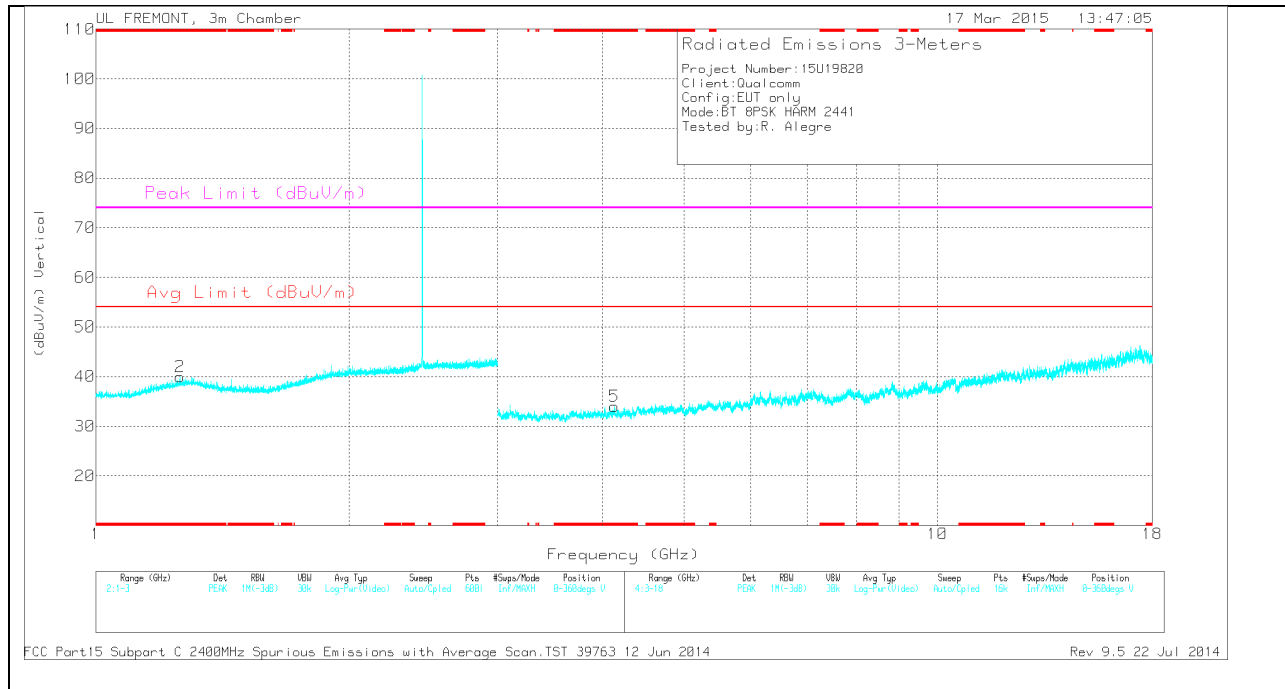

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA


TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.323	34.37	PK	29.6	-23.8	40.17	-	-	74	-33.83	0-360	200	H
3	* 2.201	34.14	PK	31.4	-23	42.54	-	-	74	-31.46	0-360	100	H
2	* 1.258	34.29	PK	29.5	-23.8	39.99	-	-	74	-34.01	0-360	200	V
4	* 4.645	32.11	PK	33.9	-30.9	35.11	-	-	74	-38.89	0-360	100	H
6	* 5.378	31.14	PK	34.6	-30.3	35.44	-	-	74	-38.56	0-360	100	H
5	* 4.13	31.72	PK	33.3	-31	34.02	-	-	74	-39.98	0-360	100	V

PK - Peak detector


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

HIGH CHANNEL HORIZONTAL

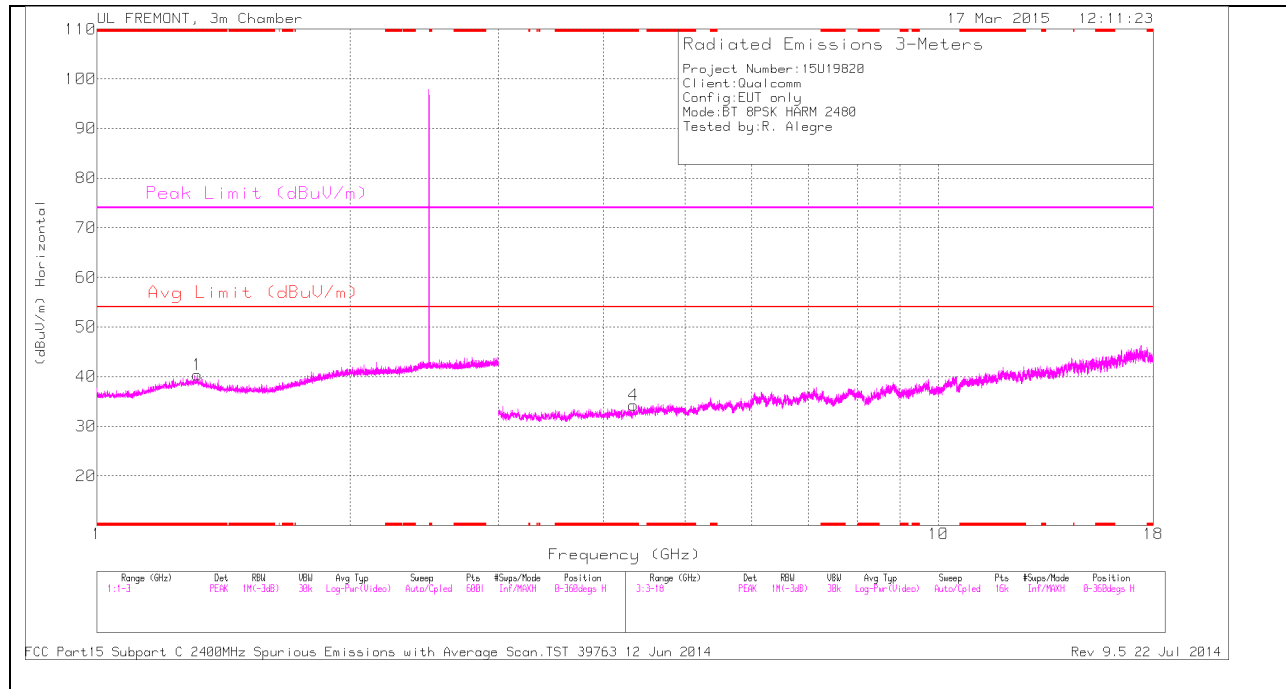

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

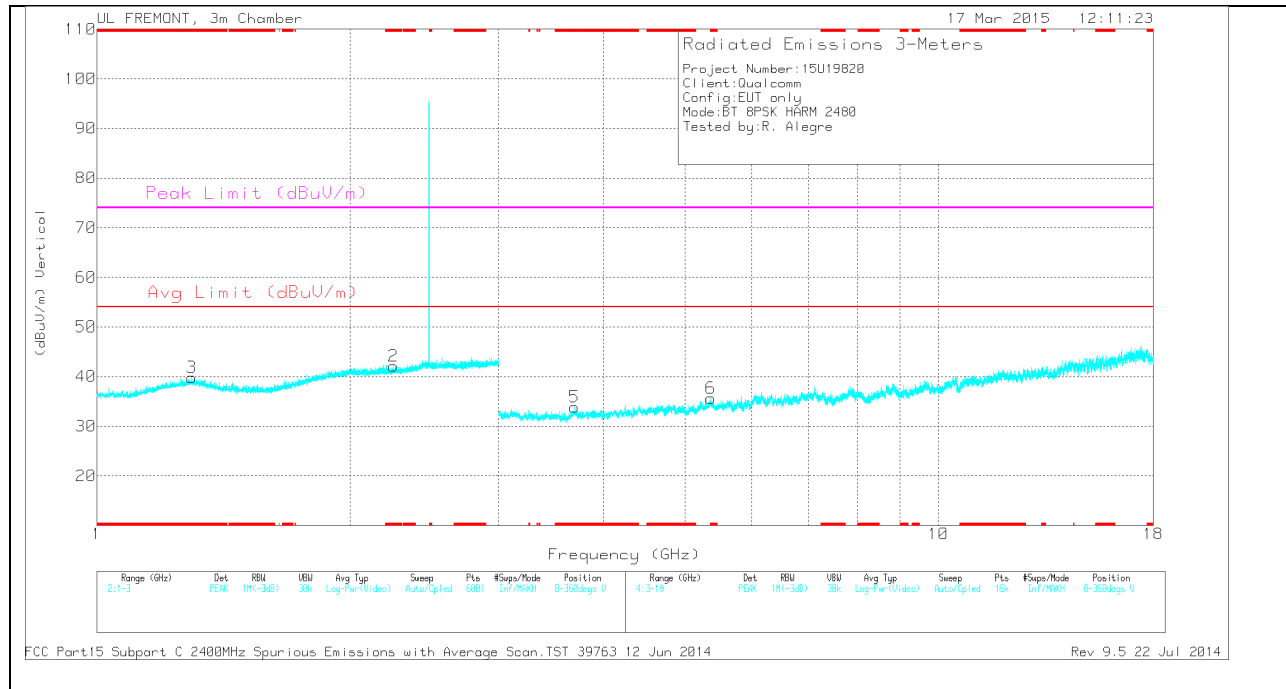

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.316	34.49	PK	29.7	-23.8	40.39	-	-	74	-33.61	0-360	100	H
2	* 2.253	33.57	PK	31.5	-22.9	42.17	-	-	74	-31.83	0-360	200	V
3	* 1.296	33.83	PK	29.8	-23.8	39.83	-	-	74	-34.17	0-360	100	V
4	* 4.341	30.57	PK	33.6	-29.9	34.27	-	-	74	-39.73	0-360	100	H
5	* 3.695	31.62	PK	33	-30.8	33.82	-	-	74	-40.18	0-360	100	V
6	* 5.36	31.11	PK	34.5	-30	35.61	-	-	74	-38.39	0-360	200	V

PK - Peak detector


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

9.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

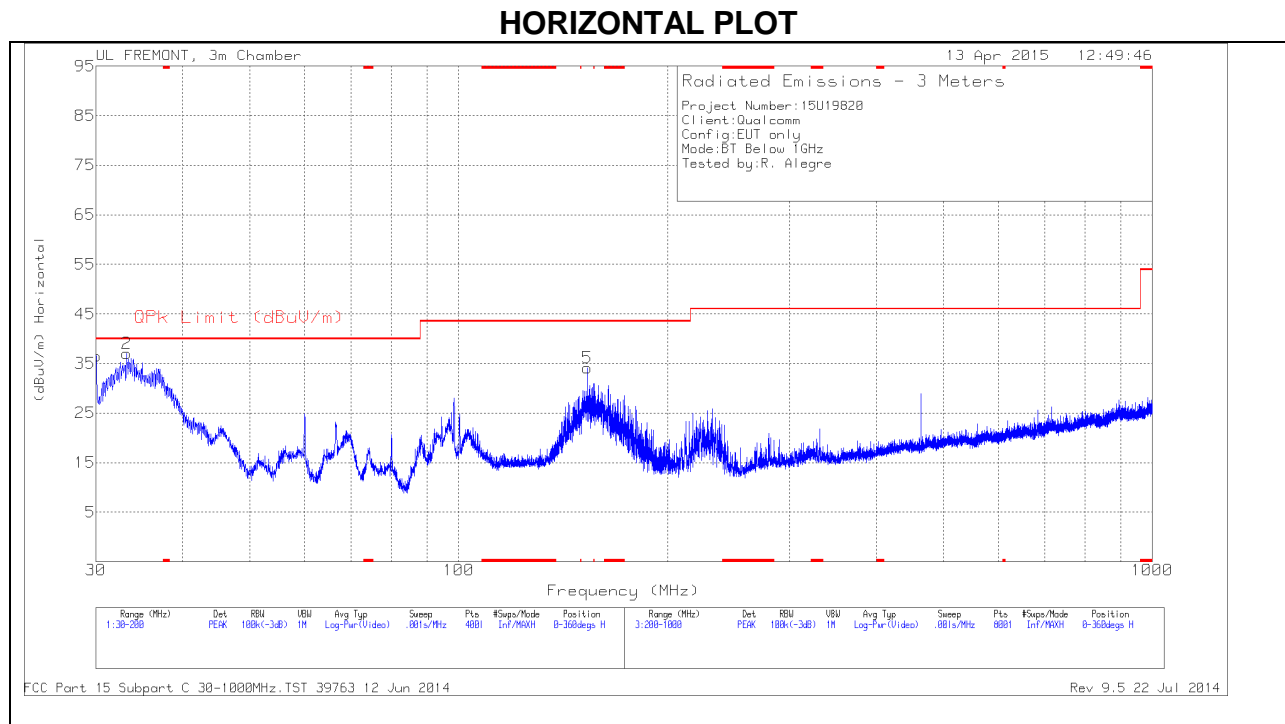

VERTICAL PLOT

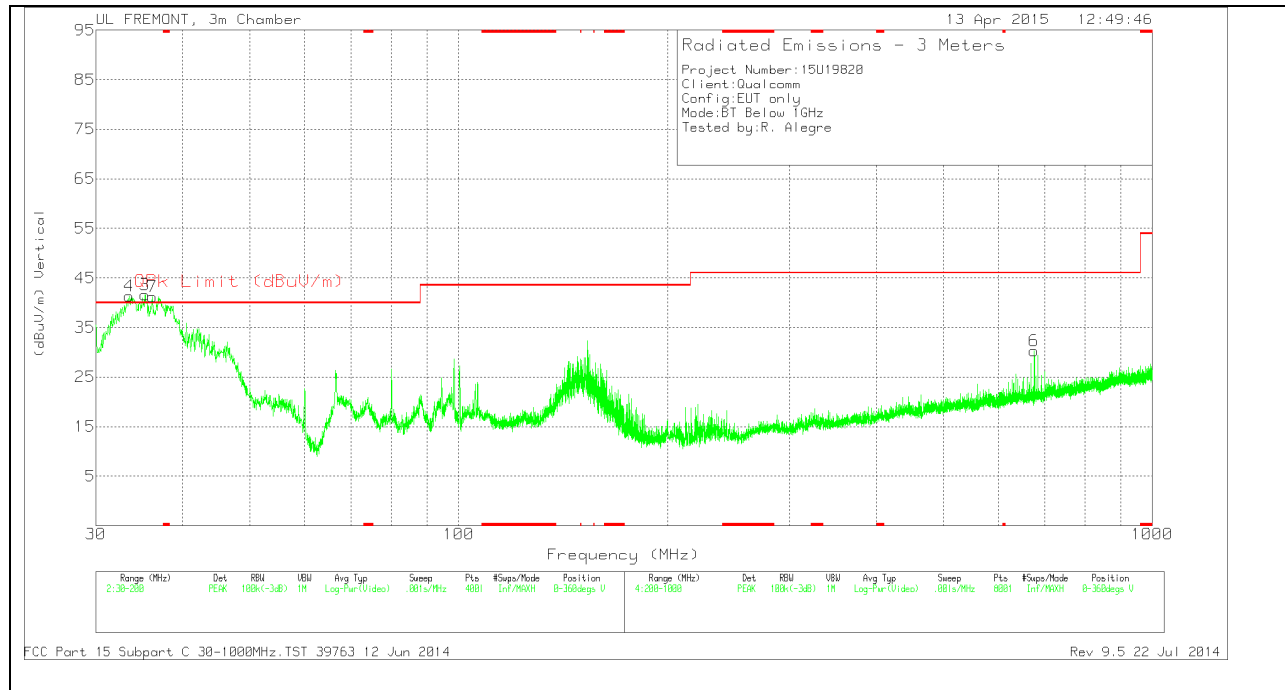

BELOW 1 GHz TABLE

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T185 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	30.0425	42.24	PK	21.8	-27.5	36.54	40	-3.46	0-360	300	H
2	33.1875	45.07	PK	19.4	-27.5	36.97	40	-3.03	0-360	300	H
4	33.5275	49.79	PK	19.1	-27.5	41.39	40	1.39	0-360	100	V
3	35.3125	51.29	PK	17.8	-27.5	41.59	40	1.59	0-360	100	V
7	36.205	51.5	PK	17.1	-27.4	41.2	40	1.2	0-360	100	V
5	153.2925	48.29	PK	12.1	-26.3	34.09	43.52	-9.43	0-360	200	H
6	676	36.34	PK	19.3	-25.3	30.34	46.02	-15.68	0-360	100	V

PK - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T185 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
33.5275	45.41	QP	19.1	-27.5	37.01	40	-2.99	175	100	V
35.3125	32.71	QP	17.8	-27.5	23.01	40	-16.99	357	274	V
36.205	44.56	QP	17.1	-27.4	34.26	40	-5.74	237	100	V

QP - Quasi-Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

LINE 1 PLOT

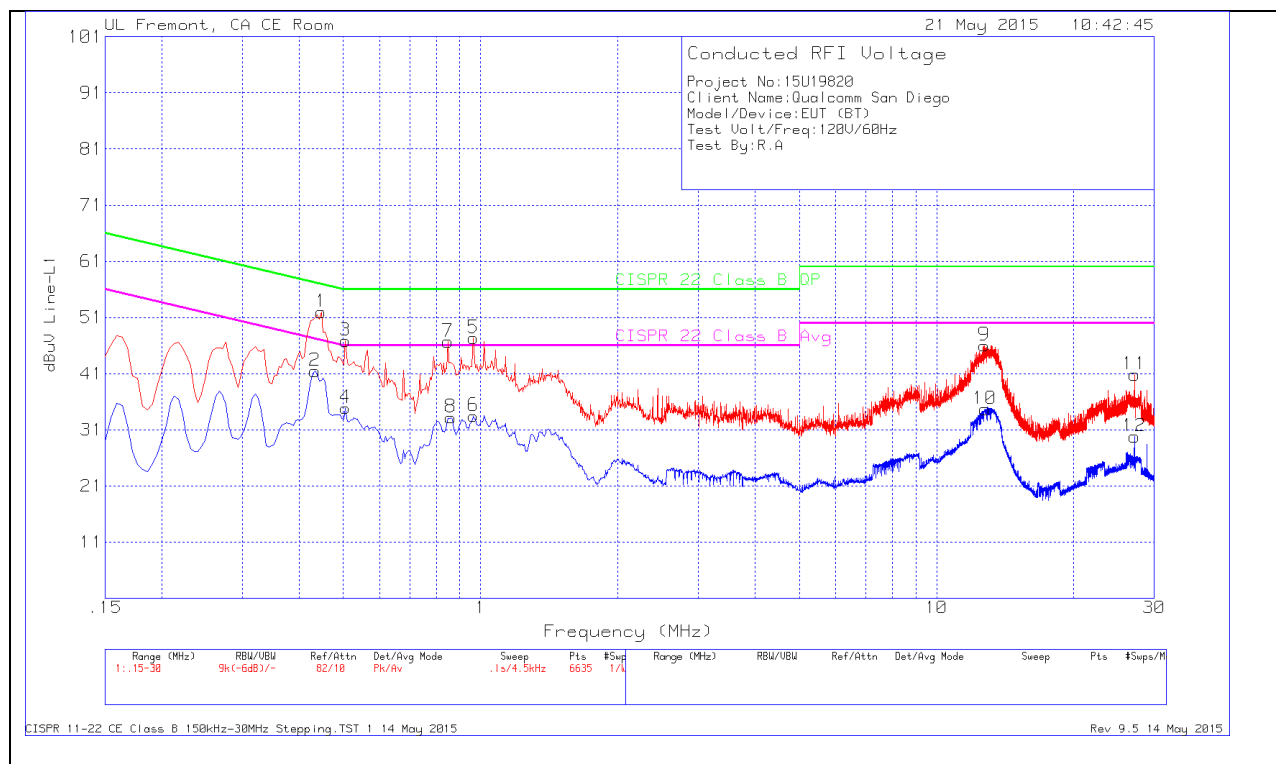


LINE 1 RESULTS

Range 1: Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1	LC Cables 1&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
1	.447	51.58	Pk	.4	0	51.98	56.93	-4.95		
2	.4335	41.07	Av	.4	0	41.47	-	-	47.19	-5.72
3	.5055	46.56	Pk	.3	0	46.86	56	-9.14		
4	.5055	34.57	Av	.3	0	34.87	-	-	46	-11.13
5	.9645	47.03	Pk	.3	0	47.33	56	-8.67		
6	.9645	33.18	Av	.3	0	33.48	-	-	46	-12.52
7	.8475	46.38	Pk	.3	0	46.68	56	-9.32		
8	.861	32.9	Av	.3	0	33.2	-	-	46	-12.8
9	12.7365	45.62	Pk	.2	.2	46.02	60	-13.98		
10	12.7635	34.28	Av	.2	.2	34.68	-	-	50	-15.32
11	27.177	40.26	Pk	.3	.3	40.86	60	-19.14		
12	27.168	29.24	Av	.3	.3	29.84	-	-	50	-20.16

LINE 2 PLOT

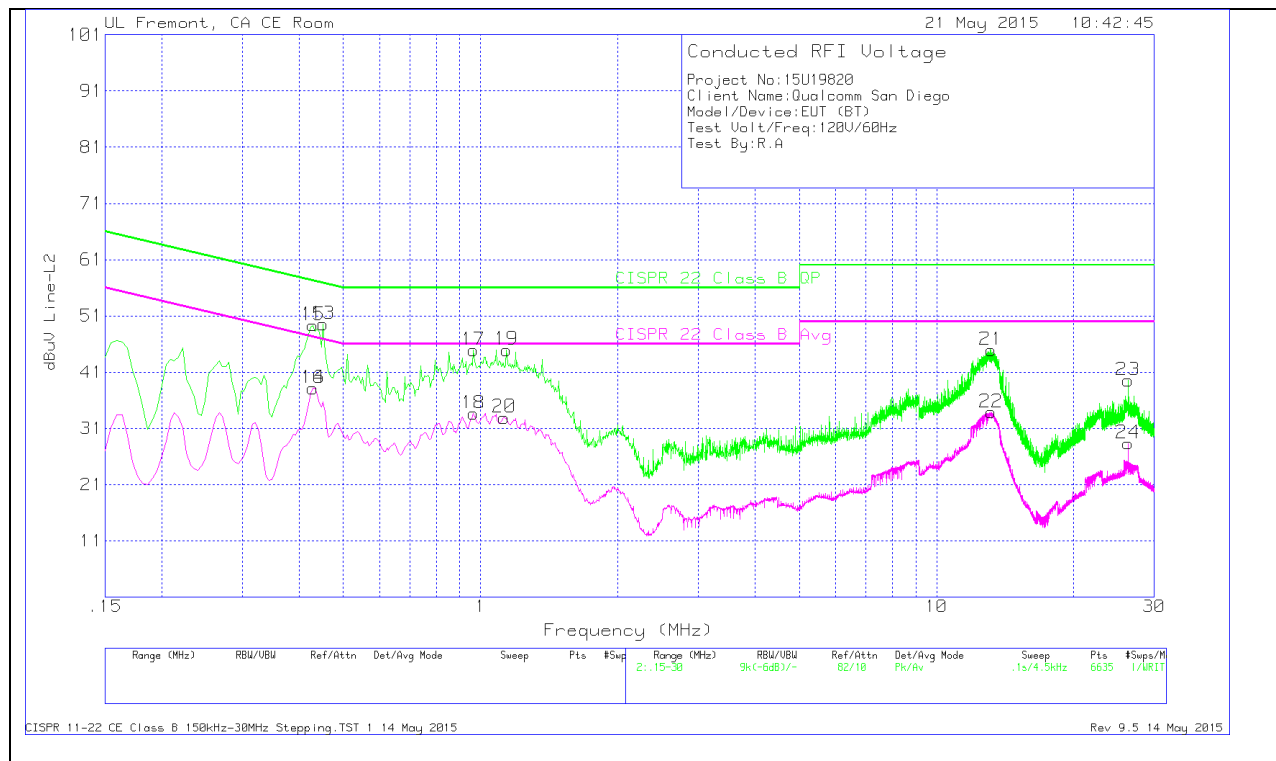

LINE 2 RESULTS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2	LC Cables 2&3	Corrected Reading dBuV	CISPR 22 Class B QP	Margin (dB)	CISPR 22 Class B Avg	Margin (dB)
13	.4515	49.15	Pk	.4	0	49.55	56.85	-7.3		
14	.429	37.76	Av	.4	0	38.16	-	-	47.27	-9.11
15	.429	48.94	Pk	.4	0	49.34	57.27	-7.93		
16	.429	37.76	Av	.4	0	38.16	-	-	47.27	-9.11
17	.9645	44.62	Pk	.3	0	44.92	56	-11.08		
18	.9645	33.34	Av	.3	0	33.64	-	-	46	-12.36
19	1.14	44.67	Pk	.3	0	44.97	56	-11.03		
20	1.1265	32.53	Av	.3	.1	32.93	-	-	46	-13.07
21	13.173	44.56	Pk	.2	.2	44.96	60	-15.04		
22	13.173	33.49	Av	.2	.2	33.89	-	-	50	-16.11
23	26.3085	38.96	Pk	.3	.3	39.56	60	-20.44		
24	26.2995	27.74	Av	.3	.3	28.34	-	-	50	-21.66