

# TEST REPORT

## FCC ID: 2ADKM0066

**Report Number**..... : ZKT-221212L9258-01

Date of Test..... : Nov. 23, 2022 -- Dec. 08, 2022

Date of issue ..... : Dec. 08, 2022

Total number of pages ..... : 41

Test Result ..... : PASS

**Testing Laboratory**..... : Shenzhen ZKT Technology Co., Ltd.

Address ..... : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

**Applicant's name** ..... : Zeroplus Technology Corporation

Address ..... : 3F., No.121, Jian 8th Rd., Chung Ho District, New Taipei City, 235 Taiwan

**Manufacturer's name** ..... : Zeroplus Technology Corporation

Address ..... : 3F., No.121, Jian 8th Rd., Chung Ho District, New Taipei City, 235 Taiwan

**Test specification:**

Standard ..... : FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2013

Test procedure..... : /

Non-standard test method ..... : N/A

**Test Report Form No.** ..... : TRF-EL-110\_V0

**Test Report Form(s) Originator** .... : ZKT Testing

**Master TRF** ..... : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

**Product name** ..... : Pocket Auto Catch Carry

Trademark ..... : Brook

Model/Type reference ..... : ZPP0066

Ratings..... : DC 3.7V from battery  
Charging by DC5.0V from Type-C port


**Testing procedure and testing location:**

**Testing Laboratory** ..... : **Shenzhen ZKT Technology Co., Ltd.**

**Address** ..... : 1/F, No. 101, Building B, No. 6, Tangwei Community  
Industrial Avenue, Fuhai Street, Bao'an District,  
Shenzhen, China

---

**Tested by (name + signature)** ..... : Alen He

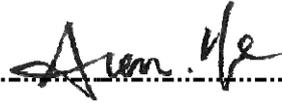

**Reviewer (name + signature)** ..... : Joe Liu



**Approved (name + signature)** ..... : Lake Xie



## Table of Contents

	Page
<b>1. VERSION</b>	<b>5</b>
<b>2. SUMMARY OF TEST RESULTS</b>	<b>6</b>
<b>3. GENERAL INFORMATION</b>	<b>7</b>
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	7
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	9
<b>4. EMC EMISSION TEST</b>	<b>10</b>
4.1 CONDUCTED EMISSION MEASUREMENT	10
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
4.1.2 TEST PROCEDURE	10
4.1.3 DEVIATION FROM TEST STANDARD	10
4.1.4 TEST SETUP	11
4.1.5 EUT OPERATING CONDITIONS	11
4.1.6 TEST RESULT	12
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	15
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS	17
<b>5. RADIATED BAND EMISSIONMEASUREMENT</b>	<b>21</b>
5.1 TEST REQUIREMENT:	21
5.2 TEST PROCEDURE	21
5.3 DEVIATION FROM TEST STANDARD	21
5.4 TEST SETUP	22
5.5 EUT OPERATING CONDITIONS	22
<b>6.POWER SPECTRAL DENSITY TEST</b>	<b>24</b>
6.1 APPLIED PROCEDURES / LIMIT	24
6.2 TEST PROCEDURE	24
6.3 DEVIATION FROM STANDARD	24
6.4 TEST SETUP	24
6.5 EUT OPERATION CONDITIONS	24
6.6 TEST RESULT	25
<b>7. 6DB CHANNEL BANDWIDTH</b>	<b>27</b>

<b>7.1 APPLIED PROCEDURES / LIMIT</b>	<b>27</b>
<b>7.2 TEST PROCEDURE</b>	<b>27</b>
<b>7.3 DEVIATION FROM STANDARD</b>	<b>27</b>
<b>7.4 TEST SETUP</b>	<b>27</b>
<b>7.5 EUT OPERATION CONDITIONS</b>	<b>27</b>
<b>7.6 TEST RESULT</b>	<b>28</b>
<b>8. PEAK OUTPUT POWER TEST</b>	<b>30</b>
<b>8.1 APPLIED PROCEDURES/LIMIT</b>	<b>30</b>
<b>8.2 TEST PROCEDURE</b>	<b>30</b>
<b>8.3 DEVIATION FROM STANDARD</b>	<b>30</b>
<b>8.4 TEST SETUP</b>	<b>30</b>
<b>8.5 EUT OPERATION CONDITIONS</b>	<b>30</b>
<b>8.6 TEST RESULT</b>	<b>30</b>
<b>9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION</b>	<b>33</b>
<b>9.1 APPLICABLE STANDARD</b>	<b>33</b>
<b>9.2 TEST PROCEDURE</b>	<b>33</b>
<b>9.3 DEVIATION FROM STANDARD</b>	<b>33</b>
<b>9.4 TEST SETUP</b>	<b>33</b>
<b>9.5 EUT OPERATION CONDITIONS</b>	<b>33</b>
<b>9.6 TEST RESULTS</b>	<b>33</b>
<b>10. ANTENNA REQUIREMENT</b>	<b>38</b>
<b>11. TEST SETUP PHOTO</b>	<b>39</b>
<b>12. EUT CONSTRUCTIONAL DETAILS</b>	<b>39</b>

**1. VERSION**

Report No.	Version	Description	Approved
ZKT-221212L9258-01	Rev.01	Initial issue of report	Dec. 08, 2022

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
15.203/15.247 (c)	Antenna requirement	PASS	
FCC Part 15.207	AC Power Line Conducted Emission	PASS	
FCC Part 15.247(b)	Conducted Peak Output Power	PASS	
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS	
FCC Part 15.247(e)	Power Spectral Density	PASS	
15.247(d)	Conducted Unwanted emissions and Band Edge	PASS	
15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

### 2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

### 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Pocket Auto Catch Carry
Model No.:	ZPP0066
Hardware Version:	/
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Frequency band:	2402MHz -- 2480MHz
Channel number:	40
Modulation technology:	GFSK
Antenna Type:	Chip Antenna
Antenna gain:	0.5dBi
Power supply:	DC 3.7V from battery Charging by DC5.0V from Type-C port

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402	11	2422	21	2442	31	2462
2	2404	12	2424	22	2444	32	2464
3	2406	13	2426	23	2446	33	2466
4	2408	14	2428	24	2448	34	2468
5	2410	15	2430	25	2450	35	2470
6	2412	16	2432	26	2452	36	2472
7	2414	17	2434	27	2454	37	2474
8	2416	18	2436	28	2456	38	2476
9	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

#### 3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	


We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Test Software	KEYS
Power level setup	<5dBm

### 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

#### Conducted Emission



#### Radiated Emission



#### Conducted Spurious



Note: EUT was fully charged during the test.

### 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	adapter	HUAWEI	HW-100400C01	Provide by lab	SDOC
2					
3					
4					

Item	Shielded Type	Ferrite Core	Length	Note
	Charging cable	/	50cm	Provide by client

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

## Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Oct. 18, 2022	Oct. 17, 2023
2	Spectrum Analyzer (1GHz-40GHz)	R&S	FSQ	100363	Oct. 17, 2022	Oct. 16, 2023
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESC17	101169	Oct. 18, 2022	Oct. 17, 2023
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	N/A	Oct. 17, 2022	Oct. 16, 2023
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Oct. 17, 2022	Oct. 16, 2023
6	Loop Antenna	TESEQ	HLA6121	58357	Oct. 17, 2022	Oct. 16, 2023
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Oct. 17, 2022	Oct. 16, 2023
8	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 18, 2022	Oct. 17, 2023
9	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Oct. 18, 2022	Oct. 17, 2023
10	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Oct. 18, 2022	Oct. 17, 2023
11	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Oct. 18, 2022	Oct. 17, 2023
12	ESG Signal Generator	Agilent	E4421B	N/A	Oct. 18, 2022	Oct. 17, 2023
13	Signal Generator	Agilent	N5182A	N/A	Oct. 22, 2022	Oct. 21, 2023
14	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Oct. 17, 2022	Oct. 16, 2023
15	MWRF Power Meter Test system	MW	MW100-RPC B	N/A	Oct. 22, 2022	Oct. 21, 2023
16	Power sensor	KEYSIGHT	U200H	MY51190005	Oct. 22, 2022	Oct. 21, 2023
17	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
18	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
19	RF Software	MW	MTS8310	V2.0.0.0	\	\
20	Turntable	MF	MF-7802BS	N/A	\	\
21	Antenna tower	MF	MF-7802BS	N/A	\	\

## Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 22, 2022	Oct. 21, 2023
2	LISN	CYBERTEK	EM5040A	E1850400149	Oct. 22, 2022	Oct. 21, 2023
3	Test Cable	N/A	C01	N/A	Oct. 18, 2022	Oct. 17, 2023
4	Test Cable	N/A	C02	N/A	Oct. 18, 2022	Oct. 17, 2023
5	EMI Test Receiver	R&S	ESC13	101393	Oct. 17, 2022	Oct. 16, 2023
6	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

#### 4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) \*Decreases with the logarithm of the frequency.


#### 4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

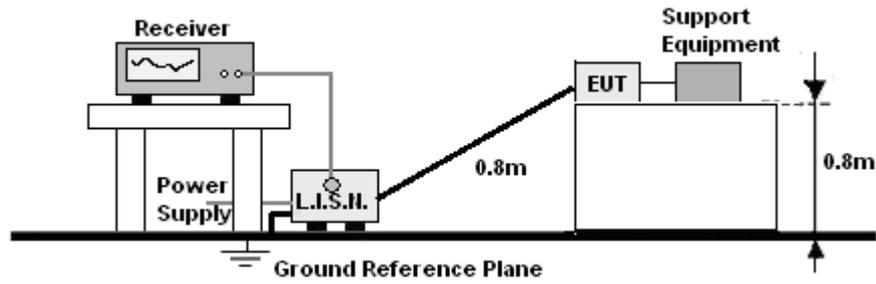


#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V, and the data recording in the report.

4.1.6 TEST RESULT

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	worst mode:	GFSK - Middle channel

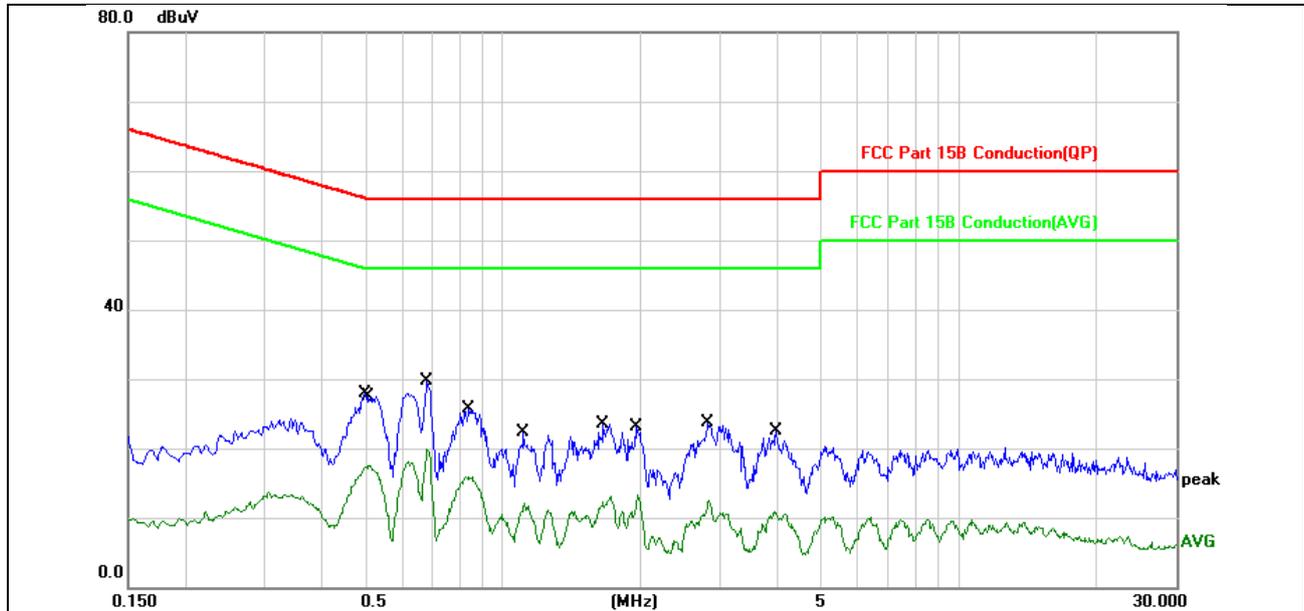


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.4980	18.04	9.85	27.89	56.03	-28.14	QP	
2	0.5100	7.68	9.85	17.53	46.00	-28.47	AVG	
3	0.6820	19.92	9.82	29.74	56.00	-26.26	QP	
4 *	0.6820	10.12	9.82	19.94	46.00	-26.06	AVG	
5	0.8420	15.96	9.80	25.76	56.00	-30.24	QP	
6	1.1140	2.33	9.74	12.07	46.00	-33.93	AVG	
7	1.6620	13.88	9.68	23.56	56.00	-32.44	QP	
8	1.9740	12.95	9.65	22.60	56.00	-33.40	QP	
9	1.9740	3.56	9.65	13.21	46.00	-32.79	AVG	
10	2.8179	13.90	9.71	23.61	56.00	-32.39	QP	
11	2.8340	2.70	9.71	12.41	46.00	-33.59	AVG	
12	3.9260	1.26	9.68	10.94	46.00	-35.06	AVG	

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	worst mode:	GFSK - Middle channel

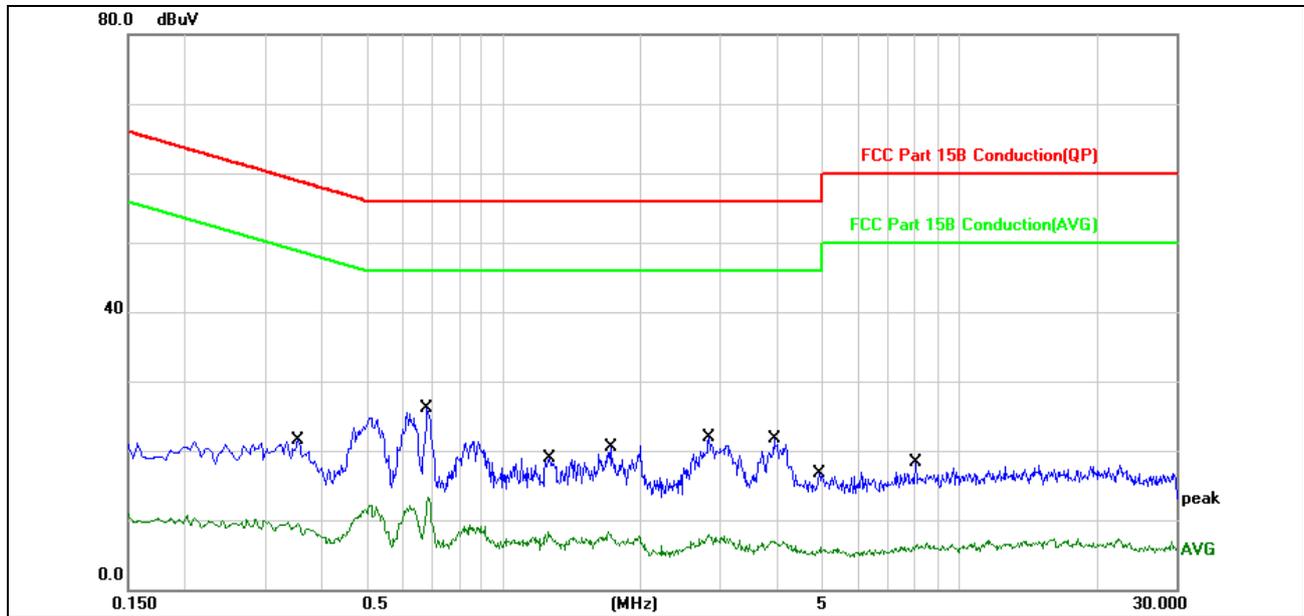

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3540	11.70	9.86	21.56	58.87	-37.31	QP	
2	*	0.6820	16.25	9.82	26.07	56.00	-29.93	QP	
3		0.6860	3.41	9.82	13.23	46.00	-32.77	AVG	
4		1.2620	-1.34	9.72	8.38	46.00	-37.62	AVG	
5		1.2660	9.14	9.72	18.86	56.00	-37.14	QP	
6		1.7020	-1.45	9.67	8.22	46.00	-37.78	AVG	
7		2.8340	12.16	9.71	21.87	56.00	-34.13	QP	
8		2.8340	-1.87	9.71	7.84	46.00	-38.16	AVG	
9		3.9380	11.95	9.68	21.63	56.00	-34.37	QP	
10		3.9620	-2.72	9.68	6.96	46.00	-39.04	AVG	
11		4.9780	-3.61	9.66	6.05	46.00	-39.95	AVG	
12		8.0380	8.64	9.70	18.34	60.00	-41.66	QP	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

## 4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	

## 4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

## LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.

- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### 4.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


- (A) Radiated Emission Test-Up Frequency Below 30MHz

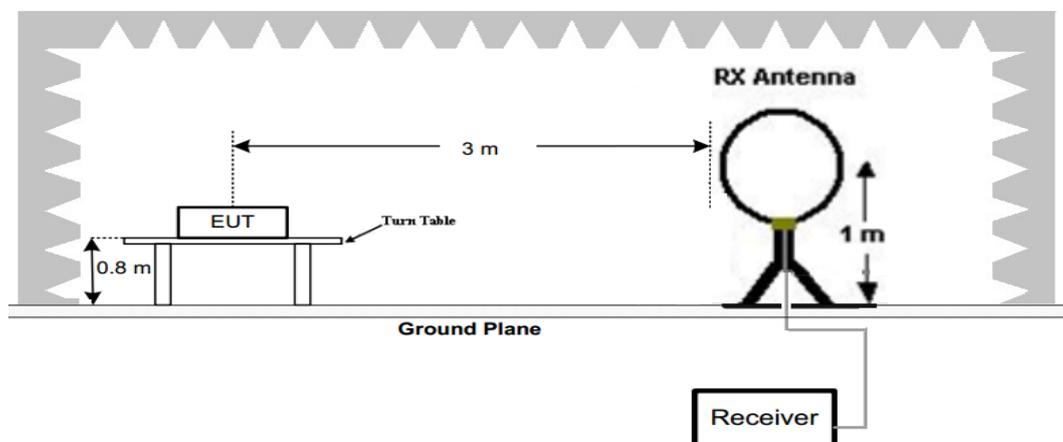

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

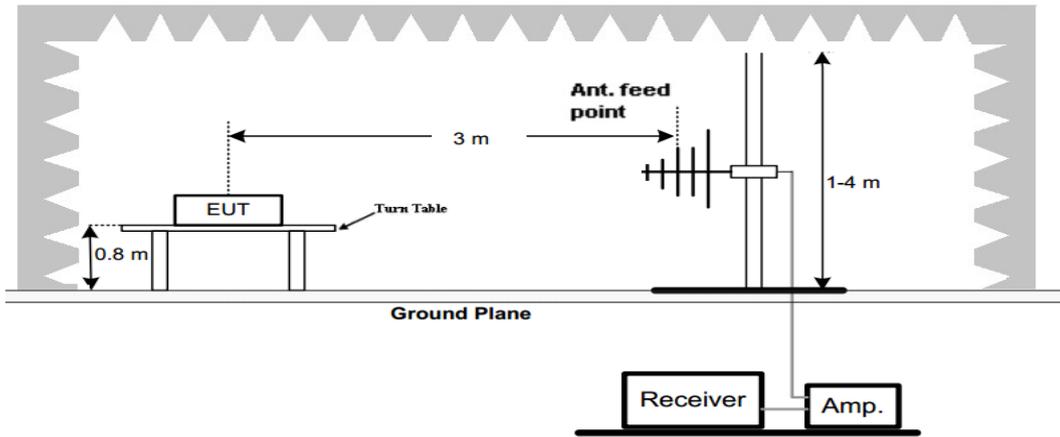

(C) Radiated Emission Test-Up Frequency Above 1GHz

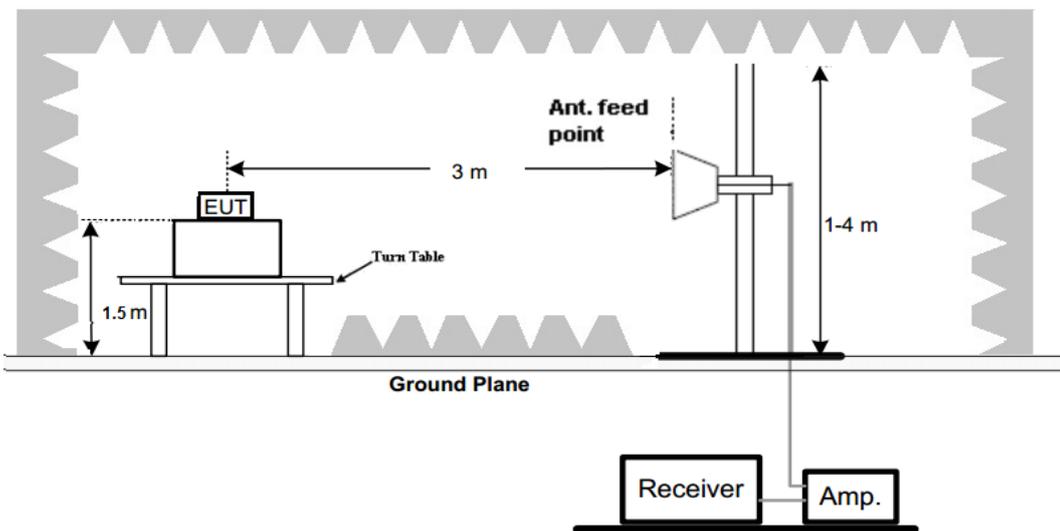

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


#### 4.2.6 TEST RESULTS

Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.


Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC3.7V	worst mode:	GFSK - Middle channel

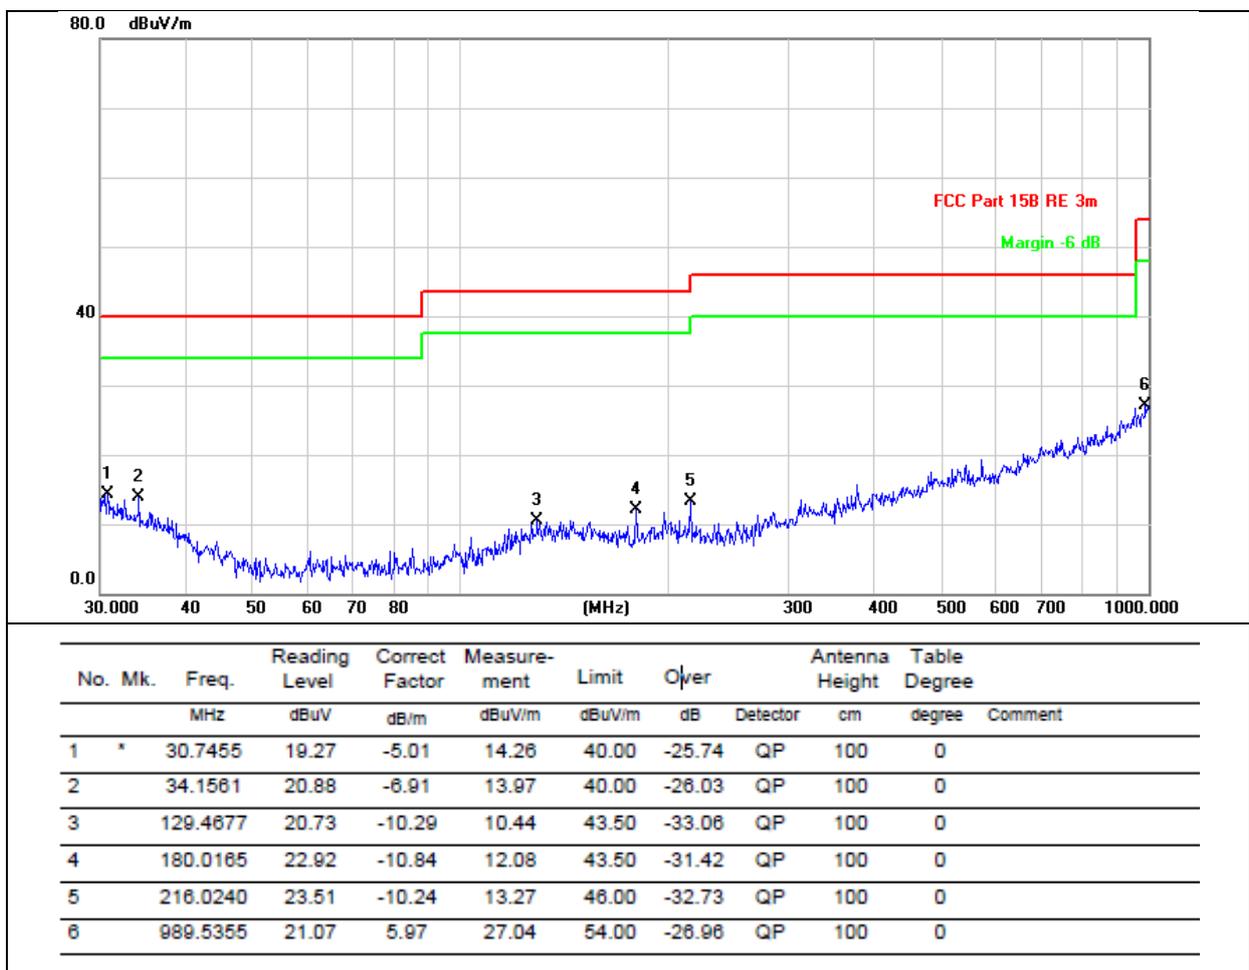

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Vertical
Test Voltage:	DC3.7V	worst mode:	GFSK - Middle channel

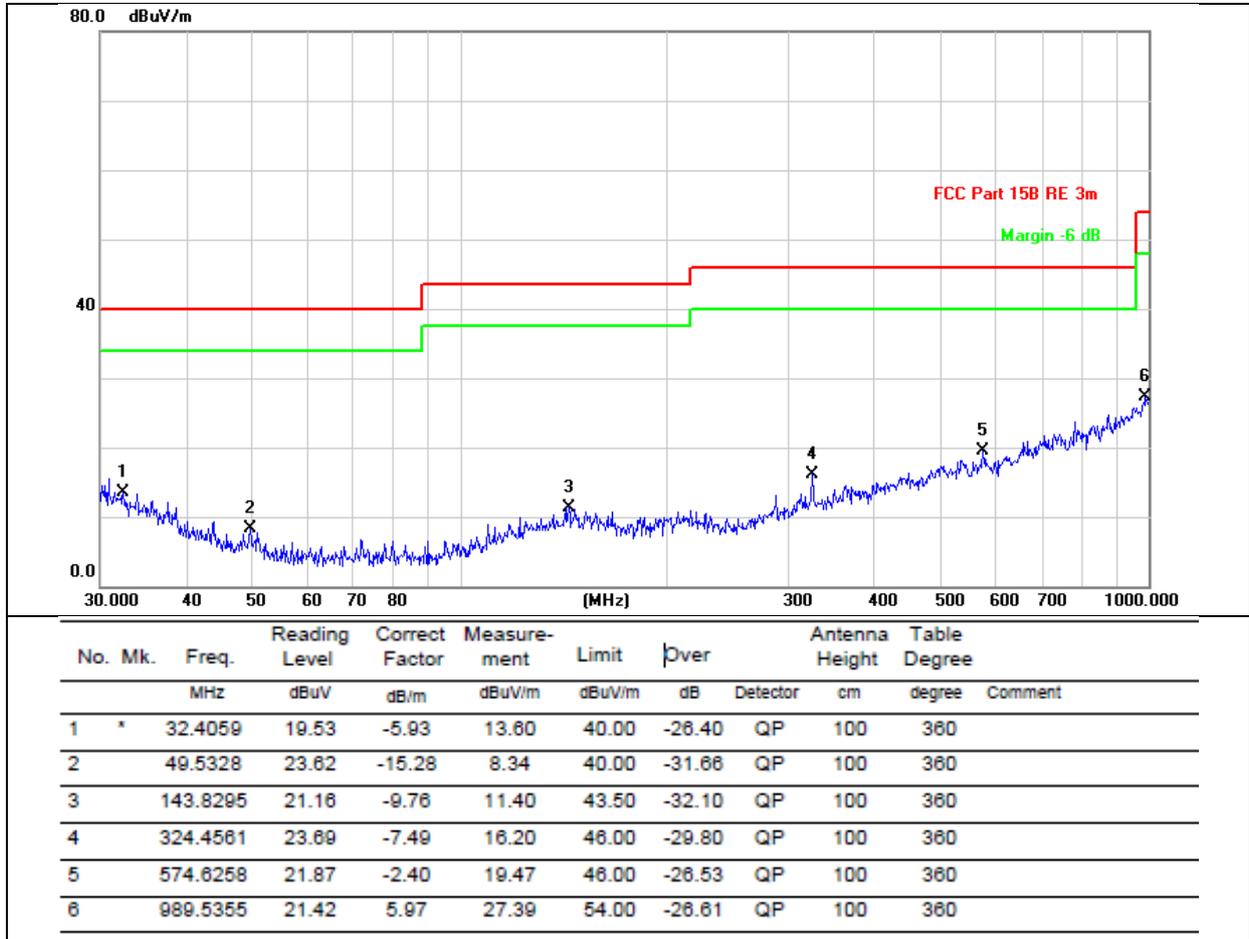

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 1GHz~25GHz

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	56.54	30.55	5.77	24.66	56.42	74.00	-17.58	PK
V	4804.00	41.57	30.55	5.77	24.66	41.45	54.00	-12.55	AV
V	7206.00	53.67	30.33	6.32	24.55	54.21	74.00	-19.79	PK
V	7206.00	39.23	30.33	6.32	24.55	39.77	54.00	-14.23	AV
V	9608.00	50.21	30.85	7.45	24.69	51.50	74.00	-22.50	PK
V	9608.00	37.55	30.85	7.45	24.69	38.84	54.00	-15.16	AV
H	4804.00	54.75	30.55	5.77	24.66	54.63	74.00	-19.37	PK
H	4804.00	39.59	30.55	5.77	24.66	39.47	54.00	-14.53	AV
H	7206.00	53.87	30.33	6.32	24.55	54.41	74.00	-19.59	PK
H	7206.00	39.91	30.33	6.32	24.55	40.45	54.00	-13.55	AV
H	9608.00	51.17	30.85	7.45	24.69	52.46	74.00	-21.54	PK
H	9608.00	38.65	30.85	7.45	24.69	39.94	54.00	-14.06	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplif ier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2440MHz									
V	4880.00	55.37	30.55	5.77	24.66	55.25	74.00	-18.75	PK
V	4880.00	41.25	30.55	5.77	24.66	41.13	54.00	-12.87	AV
V	7320.00	54.61	30.33	6.32	24.55	55.15	74.00	-18.85	PK
V	7320.00	40.36	30.33	6.32	24.55	40.90	54.00	-13.10	AV
V	9760.00	51.25	30.85	7.45	24.69	52.54	74.00	-21.46	PK
V	9760.00	37.42	30.85	7.45	24.69	38.71	54.00	-15.29	AV
H	4880.00	55.63	30.55	5.77	24.66	55.51	74.00	-18.49	PK
H	4880.00	40.79	30.55	5.77	24.66	40.67	54.00	-13.33	AV
H	7320.00	52.86	30.33	6.32	24.55	53.40	74.00	-20.60	PK
H	7320.00	39.31	30.33	6.32	24.55	39.85	54.00	-14.15	AV
H	9760.00	51.89	30.85	7.45	24.69	53.18	74.00	-20.82	PK
H	9760.00	37.42	30.85	7.45	24.69	38.71	54.00	-15.29	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	53.90	30.55	5.77	24.66	53.78	74.00	-20.22	PK
V	4960.00	40.06	30.55	5.77	24.66	39.94	54.00	-14.06	AV
V	7440.00	54.73	30.33	6.32	24.55	55.27	74.00	-18.73	PK
V	7440.00	41.01	30.33	6.32	24.55	41.55	54.00	-12.45	AV
V	9920.00	51.10	30.85	7.45	24.69	52.39	74.00	-21.61	PK
V	9920.00	37.35	30.85	7.45	24.69	38.64	54.00	-15.36	AV
H	4960.00	53.94	30.55	5.77	24.66	53.82	74.00	-20.18	PK
H	4960.00	40.55	30.55	5.77	24.66	40.43	54.00	-13.57	AV
H	7440.00	53.64	30.33	6.32	24.55	54.18	74.00	-19.82	PK
H	7440.00	41.46	30.33	6.32	24.55	42.00	54.00	-12.00	AV
H	9920.00	50.10	30.85	7.45	24.69	51.39	74.00	-22.61	PK
H	9920.00	38.06	30.85	7.45	24.69	39.35	54.00	-14.65	AV

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 5. RADIATED BAND EMISSION MEASUREMENT

### 5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### 5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reportedin a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 5.3 DEVIATION FROM TEST STANDARD

No deviation

## 5.4 TEST SETUP

### Radiated Emission Test-Up Frequency Above 1GHz

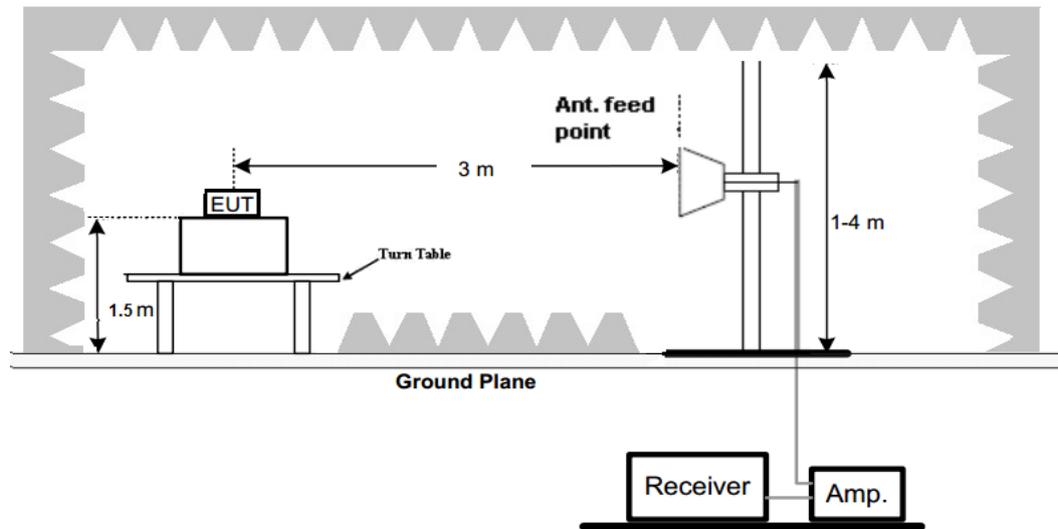

## 5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

## 5.6 TEST RESULT

## GFSK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin(dBuV/m)	Detect or Type	Result
Low Channel 2402MHz										
H	2390.00	50.84	30.22	4.85	23.98	49.45	74	-24.55	PK	PASS
H	2390.00	39.88	30.22	4.85	23.98	38.49	54	-15.51	AV	PASS
H	2400.00	52.76	30.22	4.85	23.98	51.37	74	-22.63	PK	PASS
H	2400.00	36.89	30.22	4.85	23.98	35.50	54	-18.50	AV	PASS
V	2390.00	50.95	30.22	4.85	23.98	49.56	74	-24.44	PK	PASS
V	2390.00	37.64	30.22	4.85	23.98	36.25	54	-17.75	AV	PASS
V	2400.00	51.95	30.22	4.85	23.98	50.56	74	-23.44	PK	PASS
V	2400.00	36.71	30.22	4.85	23.98	35.32	54	-18.68	AV	PASS
High Channel: 2480MHz										
H	2483.50	51.95	30.22	4.85	23.98	50.56	74	-23.44	PK	PASS
H	2485.50	39.42	30.22	4.85	23.98	38.03	54	-15.97	AV	PASS
H	2500.00	54.39	30.22	4.85	23.98	53.00	74	-21.00	PK	PASS
H	2500.00	37.77	30.22	4.85	23.98	36.38	54	-17.62	AV	PASS
V	2483.50	51.24	30.22	4.85	23.98	49.85	74	-24.15	PK	PASS
V	2485.50	39.28	30.22	4.85	23.98	37.89	54	-16.11	AV	PASS
V	2500.00	52.96	30.22	4.85	23.98	51.57	74	-22.43	PK	PASS
V	2500.00	37.42	30.22	4.85	23.98	36.03	54	-17.97	AV	PASS

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**6.POWER SPECTRAL DENSITY TEST**

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB558074 D0115.247 Meas Guidance v 05r02

**6.1 APPLIED PROCEDURES / LIMIT**

Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS

**6.2 TEST PROCEDURE**

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

**6.3 DEVIATION FROM STANDARD**

No deviation.

**6.4 TEST SETUP****6.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC3.7V
Test Mode :	GFSK		

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402 MHz	-17.68	8	PASS
2440 MHz	-17.41	8	PASS
2480 MHz	-18.21	8	PASS



**Power\_Spectral\_Density\_BLE\_1Mbps\_2440**



Power Spectral Density\_BLE\_1Mbps\_2480



**7. 6DB CHANNEL BANDWIDTH**

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

**7.1 APPLIED PROCEDURES / LIMIT**

Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS


**7.2 TEST PROCEDURE**

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 xRBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**7.3 DEVIATION FROM STANDARD**

No deviation.

**7.4 TEST SETUP**

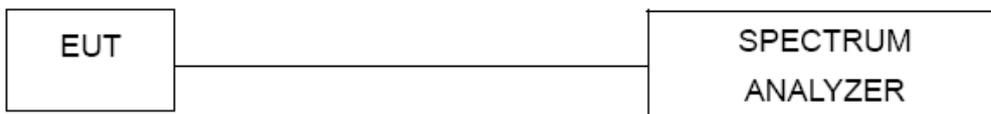


**7.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC3.7V
Test Mode :	GFSK		


Test CH	-6dB BW(kHz)	Limit(KHz)	Result
Lowest	665.60	>500	Pass
Middle	656.93		
Highest	666.74		

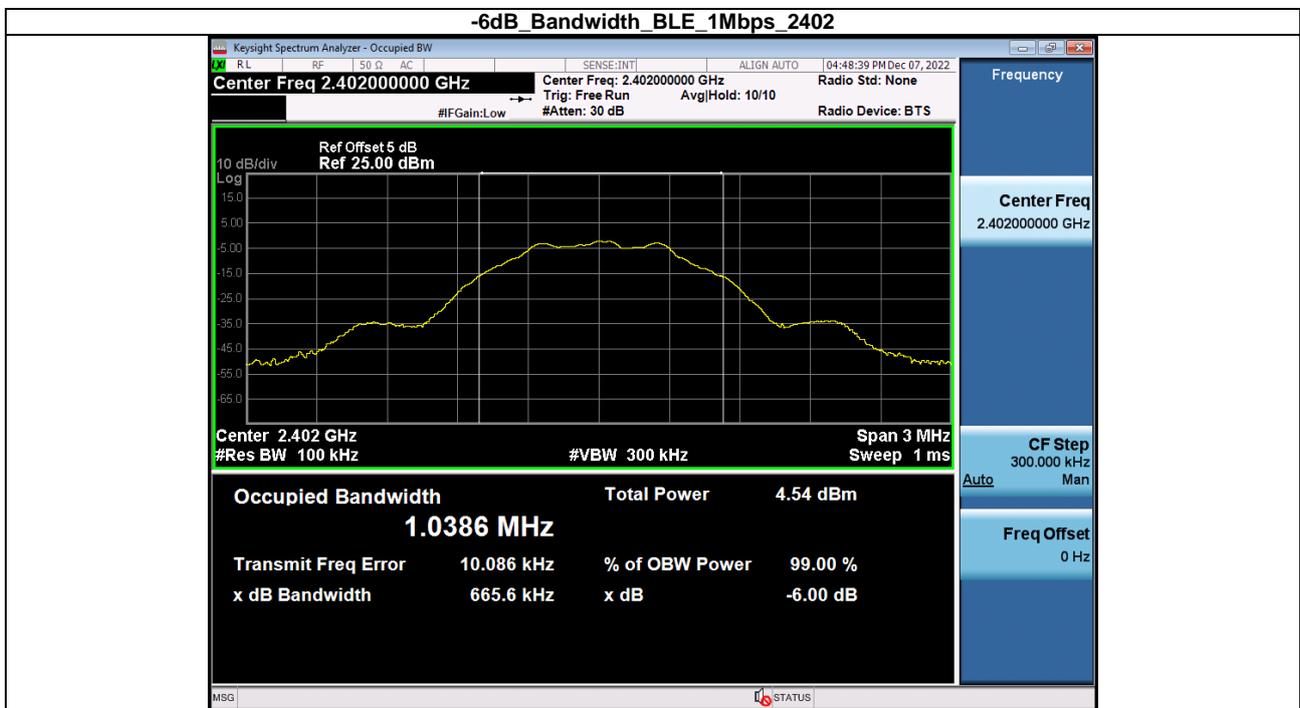

**-6dB\_Bandwidth\_BLE\_1Mbps\_2440**



**-6dB Bandwidth\_BLE\_1Mbps\_2480**

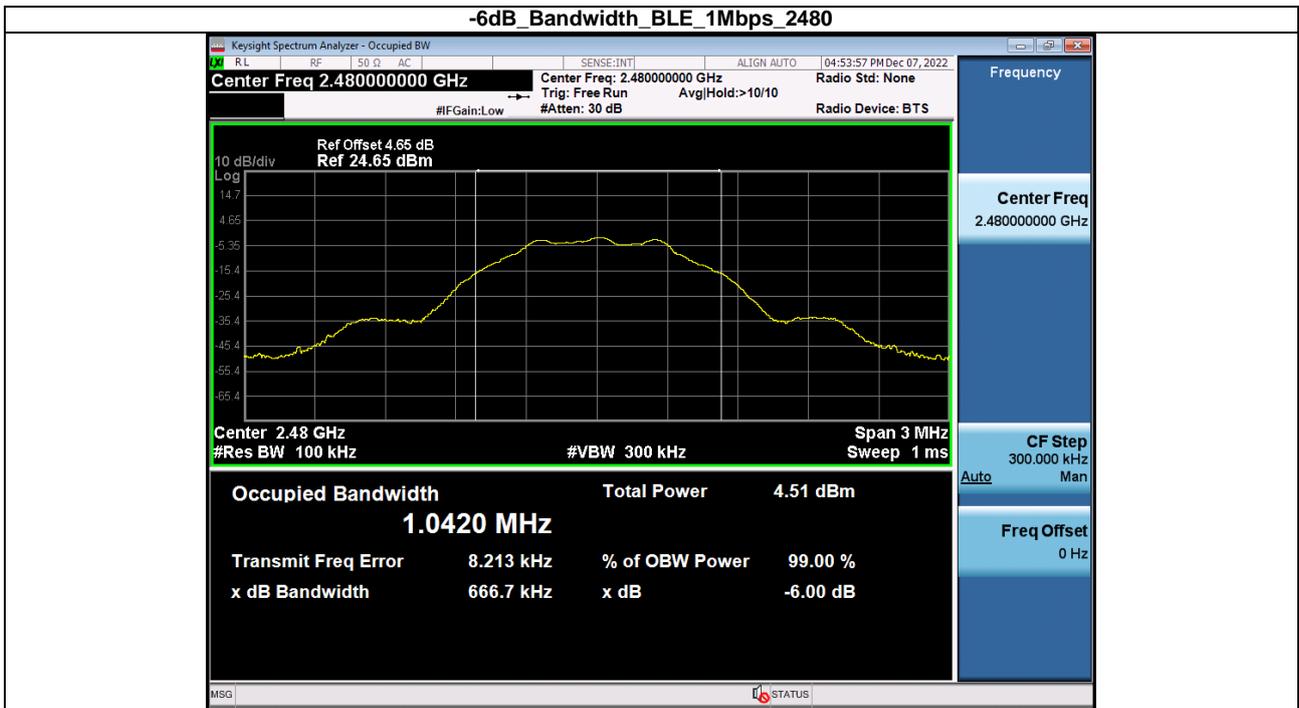

**8. PEAK OUTPUT POWER TEST**

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

**8.1 APPLIED PROCEDURES/LIMIT**

Test Item	Limit	Frequency Range (MHz)	Result
Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

**8.2 TEST PROCEDURE**

1. Set analyzer center frequency to DTS channel center frequency.
2. span  $\geq 2^*$  OBW , Set the RBW  $\geq$  OBW, VBW  $\geq$  RBW.
4. Set the VBW  $\geq 3 \times$  RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.

**8.3 DEVIATION FROM STANDARD**

No deviation.

**8.4 TEST SETUP****8.5 EUT OPERATION CONDITIONS**


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**8.6 TEST RESULT**

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC3.7V

Test CH	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	-1.77	30.00	Pass
Middle	-1.71		
Highest	-1.96		

### Peak\_Output\_Power\_BLE\_1Mbps\_2402

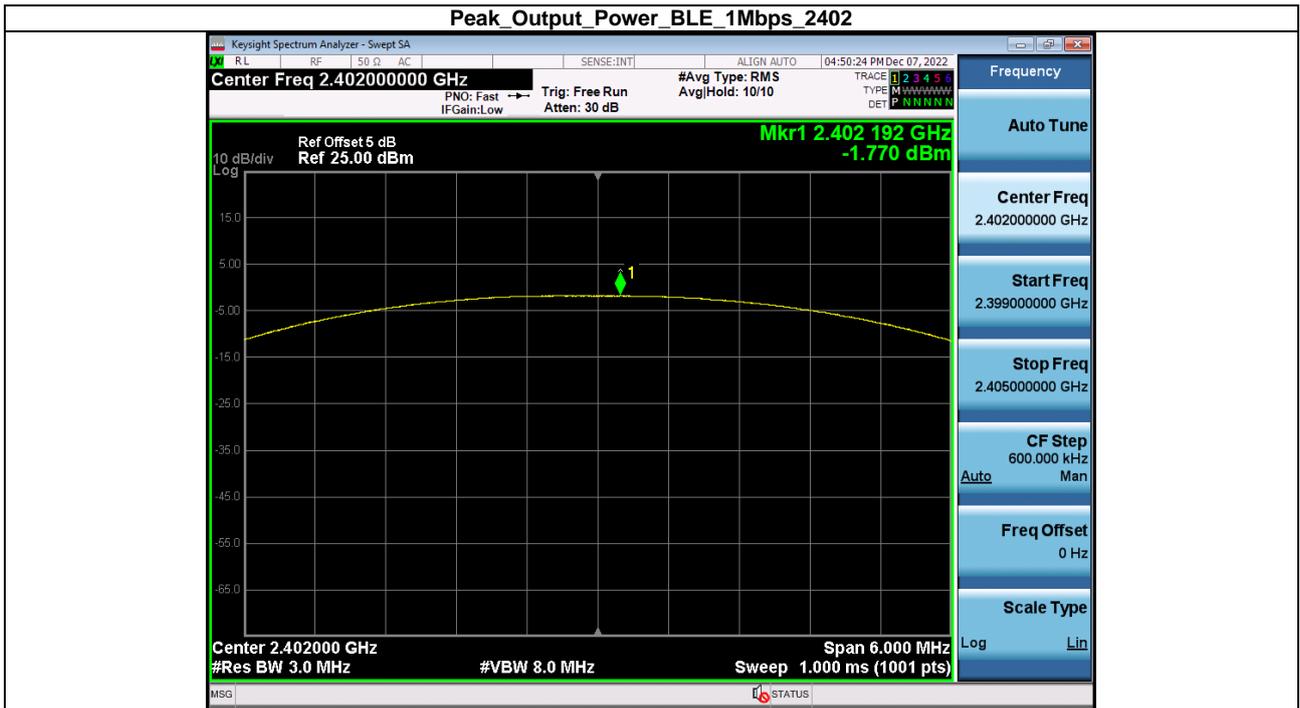

### Peak\_Output\_Power\_BLE\_1Mbps\_2440



### Peak\_Output\_Power\_BLE\_1Mbps\_2480





## 9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

### 9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

### 9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP



### 9.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 9.6 TEST RESULTS

Test plot as follows:

Test mode:

GFSK


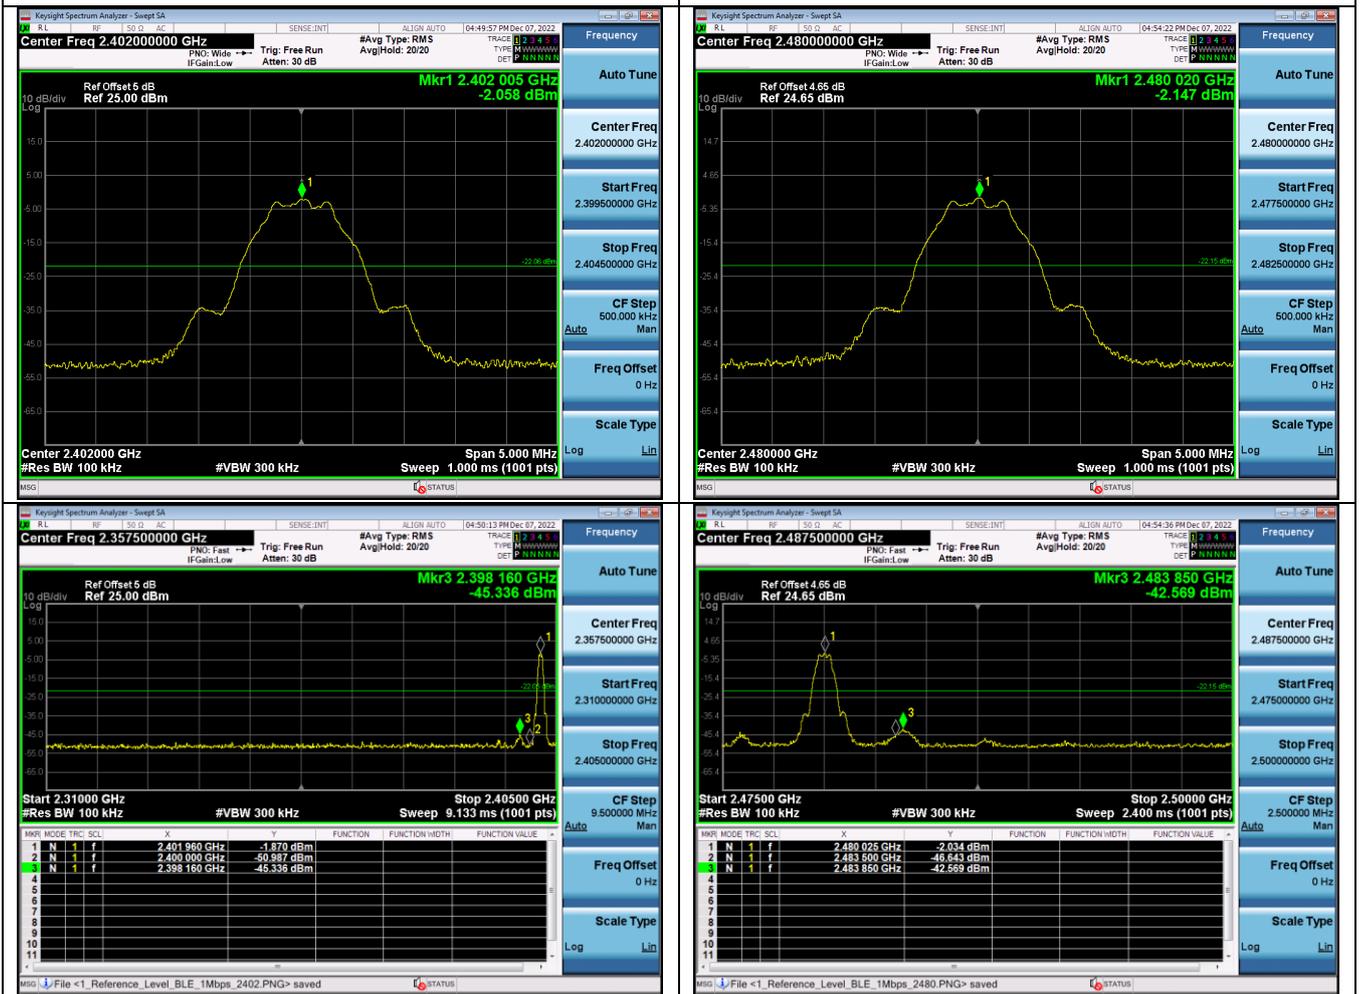


Lowest channel


Highest channel

Test plot as follows:


GFSK Lowest channel

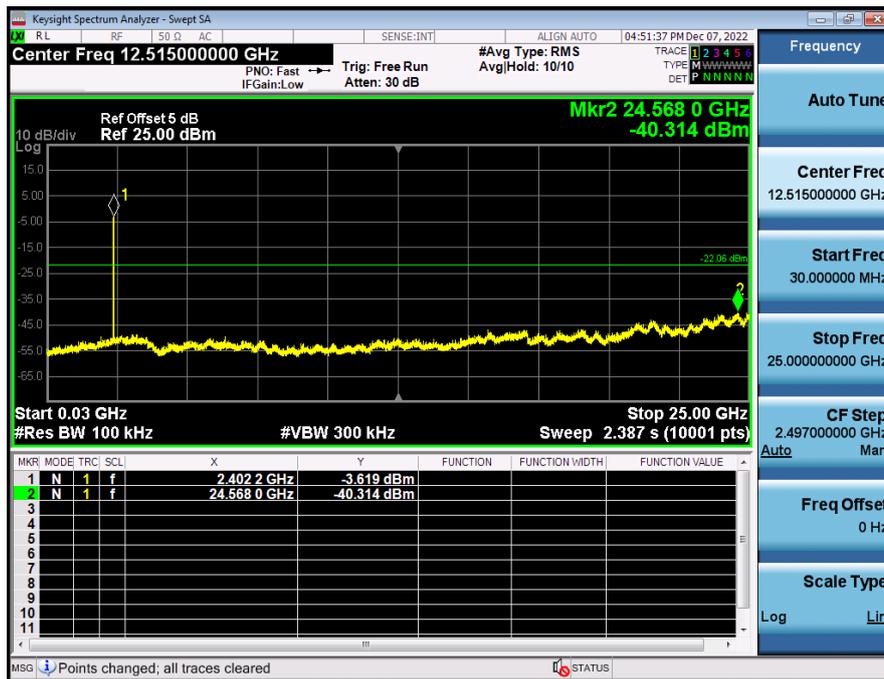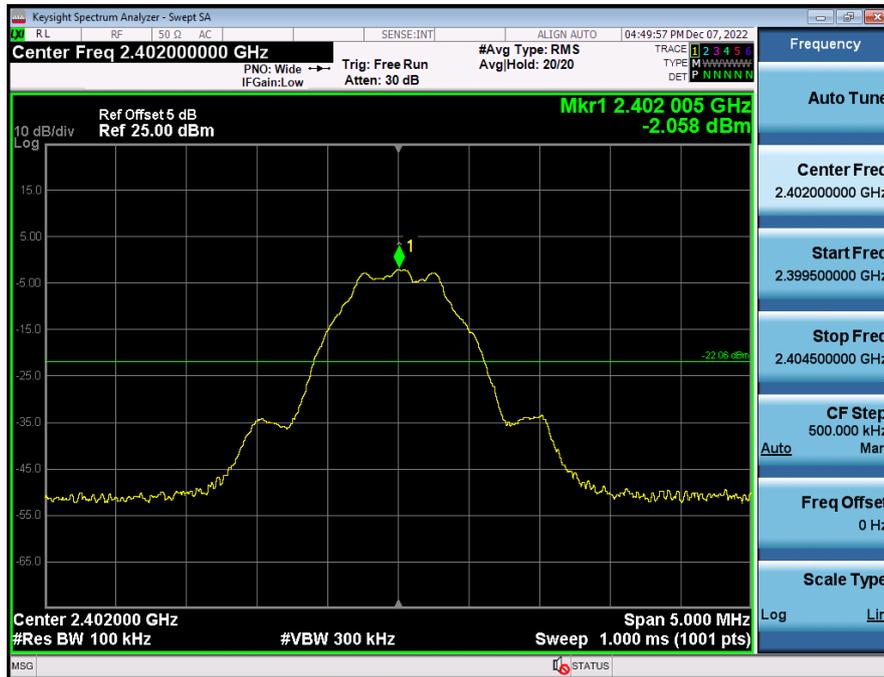


GFSK Middle channel

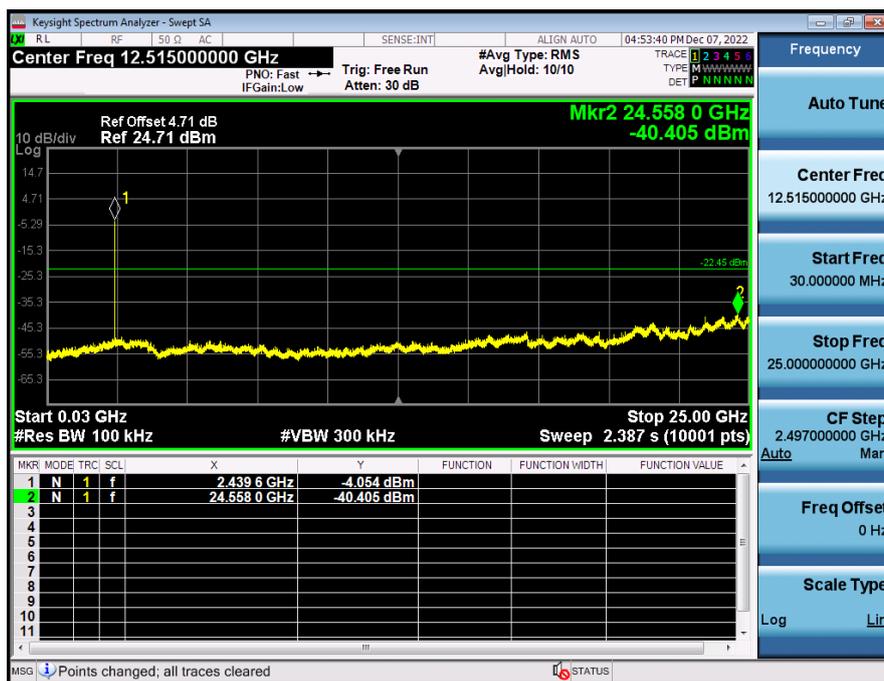

GFSK Highest channel

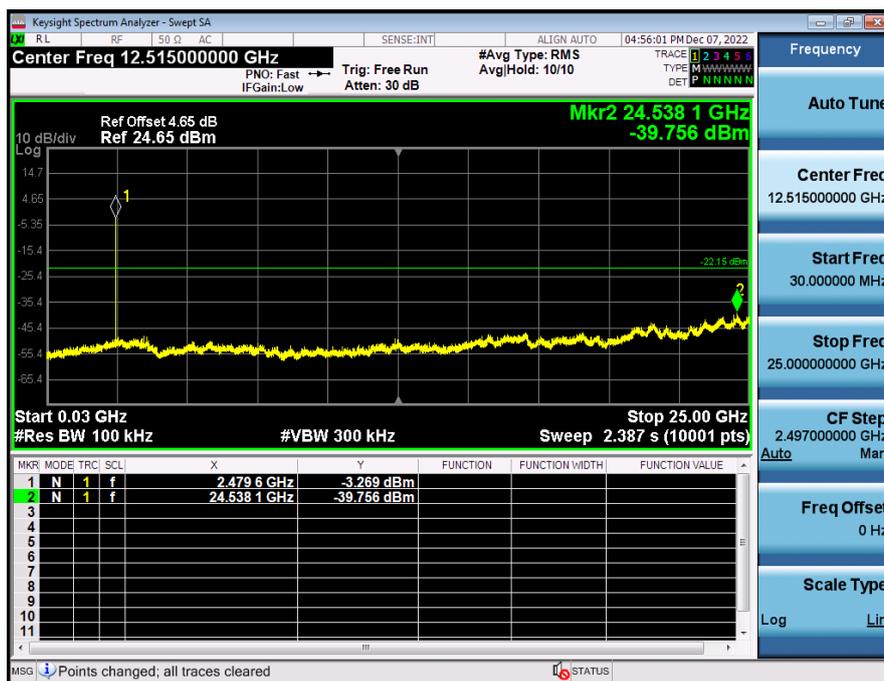


## 10. ANTENNA REQUIREMENT



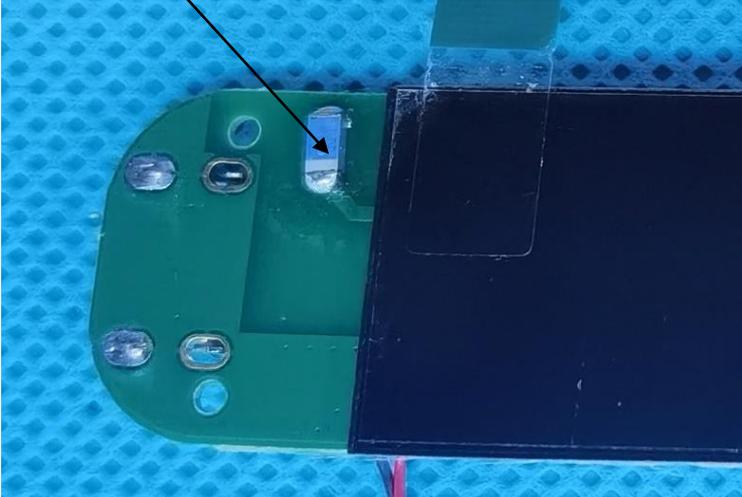
Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
EUT Antenna:	
<p>The antenna is chip Antenna, the best case gain of the antennas are 0.5dBi , reference to the below photo for details</p> <p>ANT</p> 	


## 11. TEST SETUP PHOTO

Please refer to test setup file

## 12. EUT CONSTRUCTIONAL DETAILS

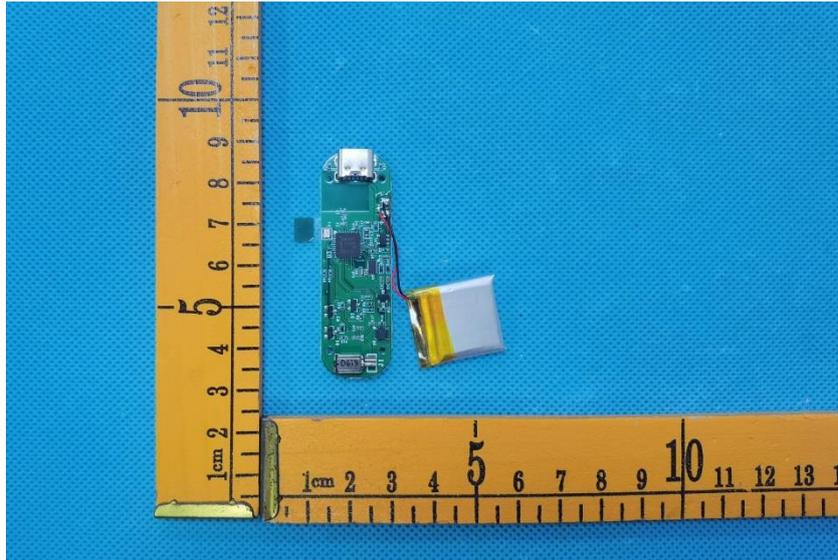

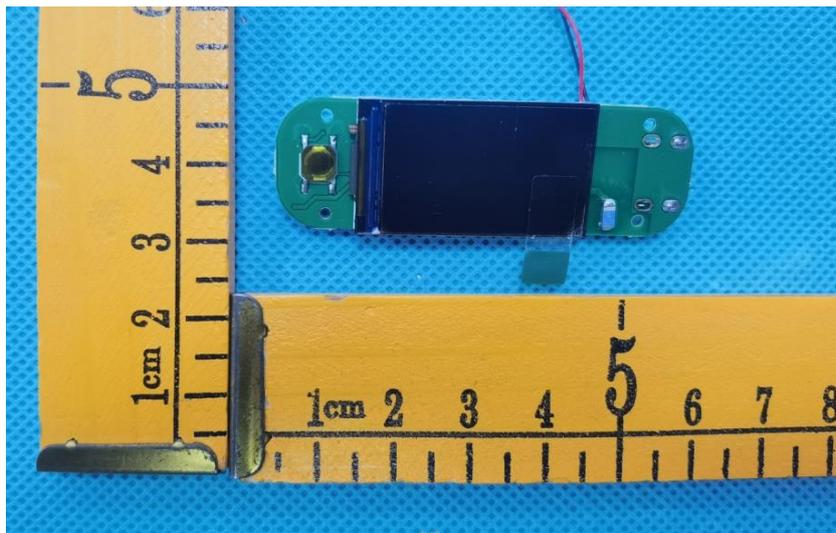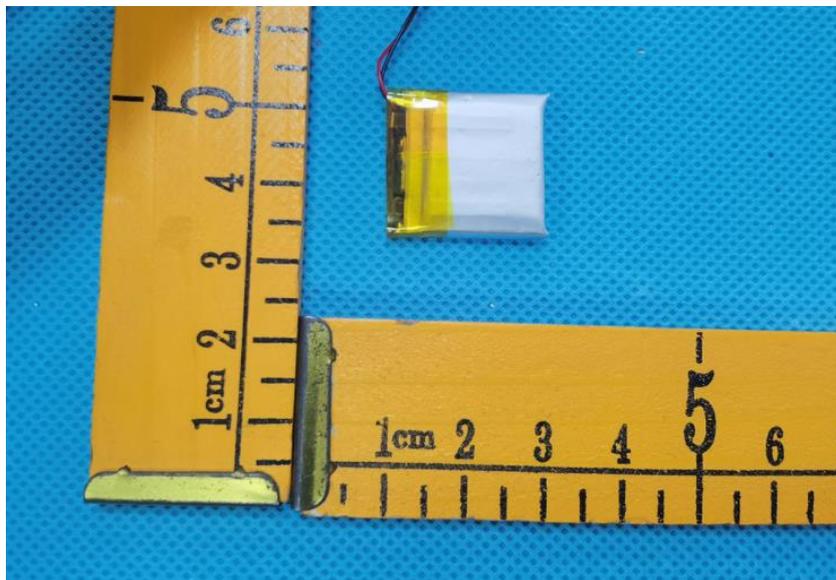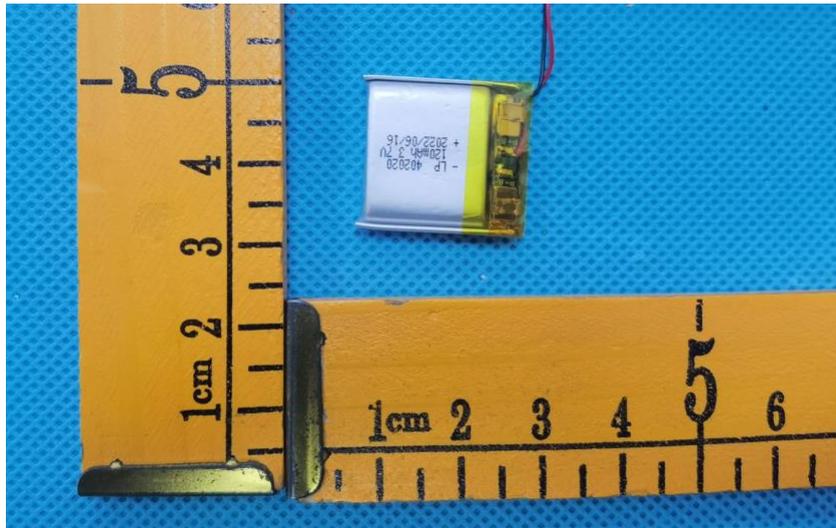

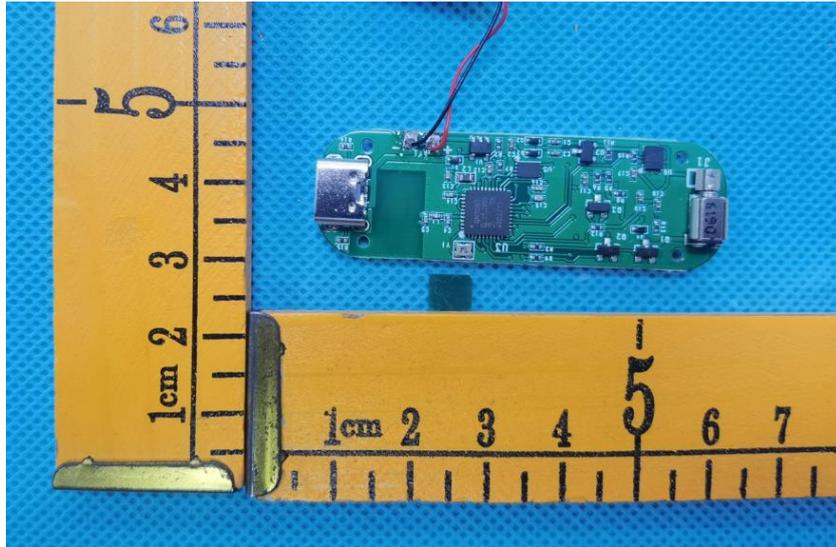

\*\*\*\*\* END OF REPORT \*\*\*\*\*