



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2167-1
FCC ID : IHDT56ZV5
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Aug. 04, 2021 ~ Aug. 25, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

Alex Wang

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Specification of Accessory.....	7
1.7 Testing Location	8
1.8 Test Software.....	8
1.9 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system	14
2.5 EUT Operation Test Setup	14
2.6 Measurement Results Explanation Example.....	14
3 TEST RESULT	15
3.1 26dB & 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement	21
3.5 AC Conducted Emission Measurement.....	26
3.6 Antenna Requirements	28
4 LIST OF MEASURING EQUIPMENT	29
5 UNCERTAINTY OF EVALUATION	30
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR170131E	Rev. 01	Initial issue of report	Aug. 30, 2021

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Report only	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.10 dB at 5149.980 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 4.52 dB at 0.226 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2167-1
FCC ID	IHDT56ZV5
IMEI Code	Conducted: N/A Conduction: 350077380005839/350077380005847 Radiation: 350077380011050
HW Version	DVT2
SW Version	RRW31.Q3-26
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 17.61 dBm / 0.0577 W 802.11n HT20 : 17.90 dBm / 0.0617 W 802.11n HT40 : 17.81 dBm / 0.0604 W 802.11ac VHT20 : 17.87 dBm / 0.0612 W 802.11ac VHT40 : 17.58 dBm / 0.0573 W 802.11ac VHT80 : 11.74 dBm / 0.0149 W <5260 MHz ~ 5320 MHz> 802.11a : 17.69 dBm / 0.0587 W 802.11n HT20 : 17.72 dBm / 0.0592 W 802.11n HT40 : 17.90 dBm / 0.0617 W 802.11ac VHT20 : 17.65 dBm / 0.0582 W 802.11ac VHT40 : 17.68 dBm / 0.0586 W 802.11ac VHT80 : 12.72 dBm / 0.0187 W

	<5500 MHz ~ 5720 MHz > 802.11a : 17.57 dBm / 0.0571 W 802.11n HT20 : 17.83 dBm / 0.0607 W 802.11n HT40 : 17.73 dBm / 0.0593 W 802.11ac VHT20 : 17.77 dBm / 0.0598 W 802.11ac VHT40 : 17.70 dBm / 0.0589 W 802.11ac VHT80 : 17.53 dBm / 0.0566 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 18.28 MHz 802.11n HT20 : 19.38 MHz 802.11n HT40 : 37.16 MHz 802.11ac VHT80 : 75.52 MHz <5260 MHz ~ 5320 MHz> 802.11a : 18.43 MHz 802.11n HT20 : 20.03 MHz 802.11n HT40 : 37.16 MHz 802.11ac VHT80 : 75.40 MHz <5500 MHz ~ 5720 MHz > 802.11a : 19.08 MHz 802.11n HT20 : 21.23 MHz 802.11n HT40 : 38.96 MHz 802.11ac VHT80 : 76.12 MHz
Antenna Type / Gain	<5150 MHz ~ 5250 MHz> PIFA Antenna with gain -6.5 dBi <5250 MHz ~ 5350 MHz> PIFA Antenna with gain -6.5 dBi <5470 MHz ~ 5725 MHz> PIFA Antenna with gain -6.7 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337
AC Adapter 2(US)	Brand Name	Motorola(Acbel)	Model Name	MC-331
AC Adapter 2(EU)	Brand Name	Motorola(Acbel)	Model Name	MC-332
AC Adapter 2(UK)	Brand Name	Motorola(Acbel)	Model Name	MC-333
AC Adapter 3(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331
AC Adapter 3(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332
AC Adapter 3(AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-335
AC Adapter 3(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336
AC Adapter 3(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337
Battery 1	Brand Name	Motorola (ATL)	Model Name	NC50
Battery 2	Brand Name	Motorola (SCUD)	Model Name	NC50
Earphone 1	Brand Name	Motorola(NEW LEADER)	Model Name	MH202
Earphone 2	Brand Name	Motorola(Ju wei)	Model Name	JWEP1205-L20H
Earphone 3	Brand Name	Motorola(Lyand)	Model Name	MH191(SH38C81577)
Earphone 4	Brand Name	Motorola(LCHSE)	Model Name	MH191(SH38C81576)
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	SLQ-A174A
USB Cable 2	Brand Name	Motorola(Ju wei)	Model Name	JY-C03-279



1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01- KS CO01-KS 03CH06-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered VHT20)	MCS0
802.11n HT40 (Covered VHT40)	MCS0
802.11ac VHT80	MCS0

Co-location
LTE Band13 + 802.11n HT20 CH36

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link(5G) + USB Cable 1(Charging from Adapter 1)+ Earphone 1
Remark: For Radiated Test Cases, The tests were performance with Adapter1, Earphone1 and USB Cable1.	



Ch. #		U-NII-1 : 5150-5250 MHz	U-NII-2A : 5250-5350 MHz	U-NII-2C : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144


Ch. #		U-NII-1 : 5150-5250 MHz	U-NII-2A : 5250-5350 MHz	U-NII-2C : 5470-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		U-NII-1 : 5150-5250 MHz	U-NII-2A : 5250-5350 MHz	U-NII-2C : 5470-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142


Ch. #		U-NII-1 : 5150-5250 MHz	U-NII-2A : 5250-5350 MHz	U-NII-2C : 5470-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122
Straddle		-	-	138

2.3 Connection Diagram of Test System

For Conducted Emission:

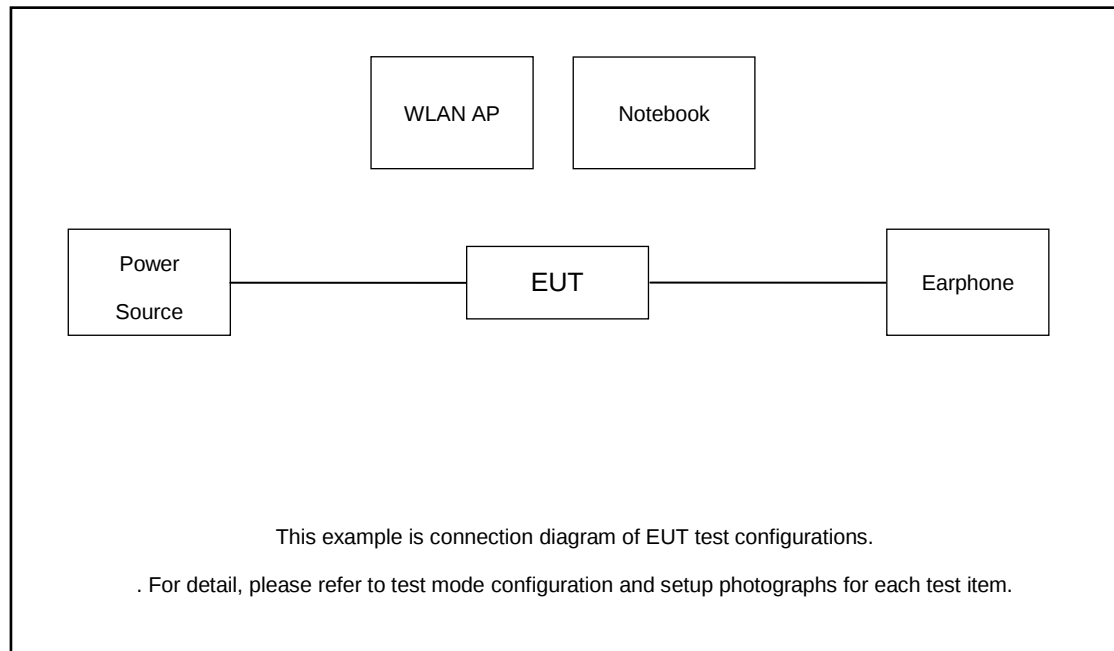

For Radiated Emission:

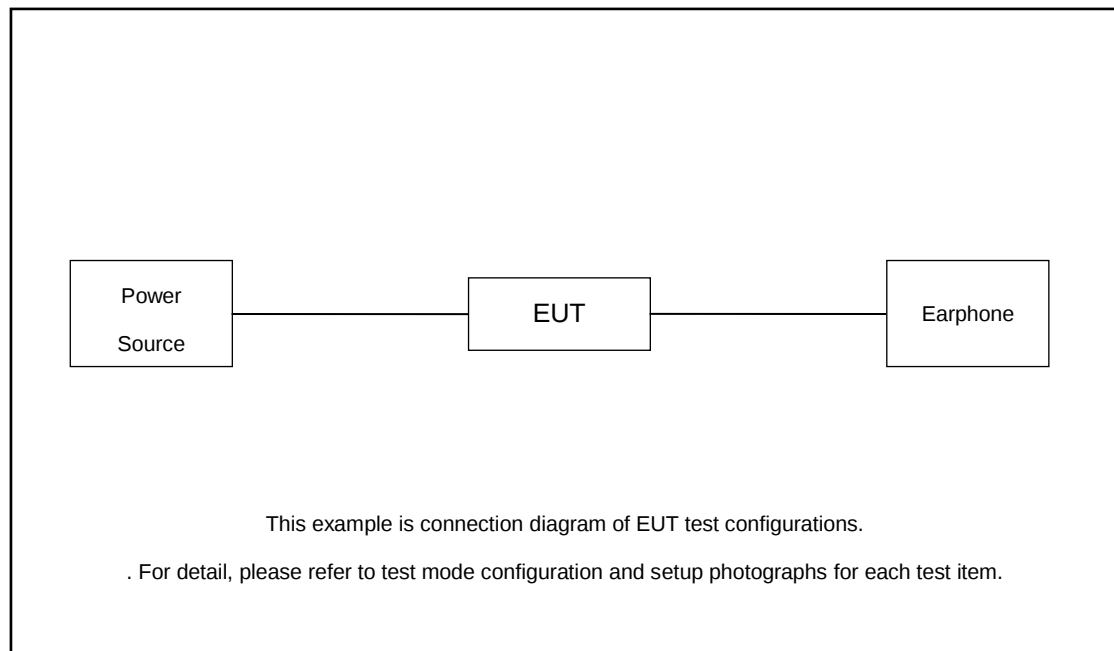

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.5 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 6.5 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

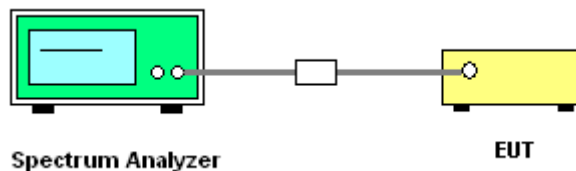

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

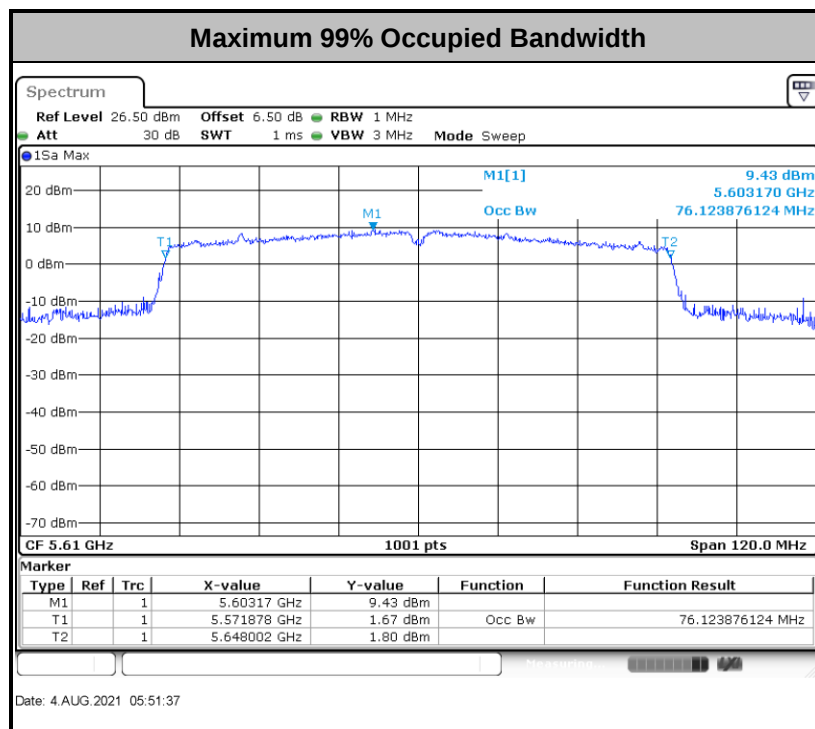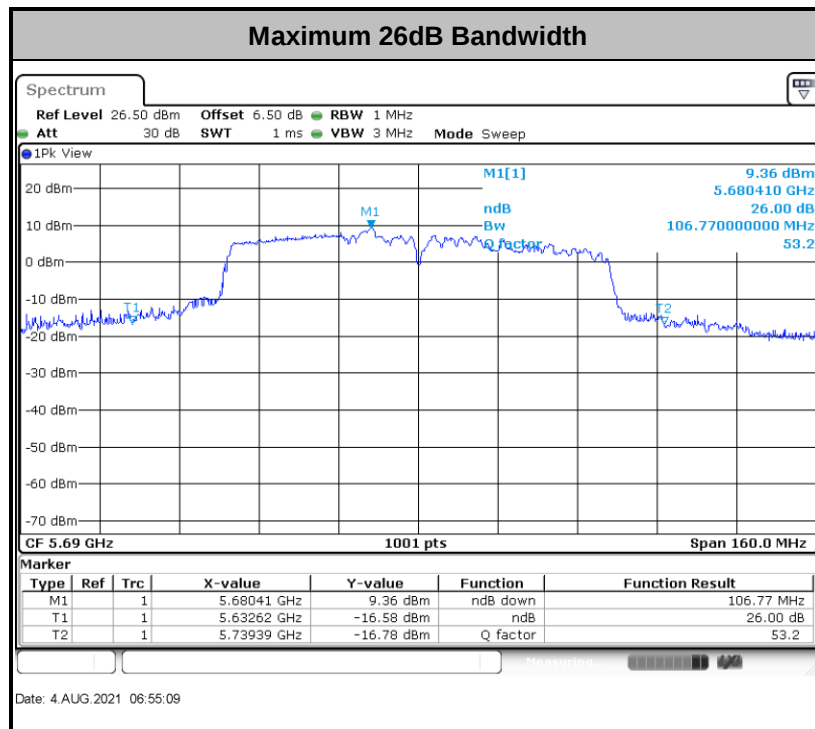

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log B, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

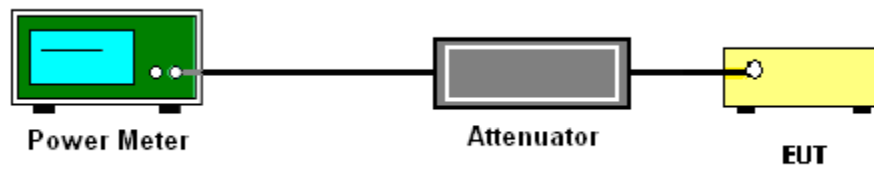

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

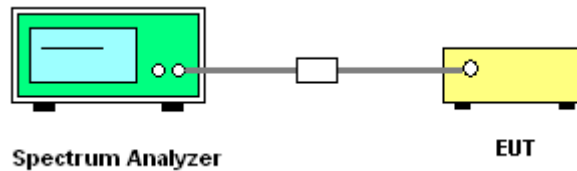

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

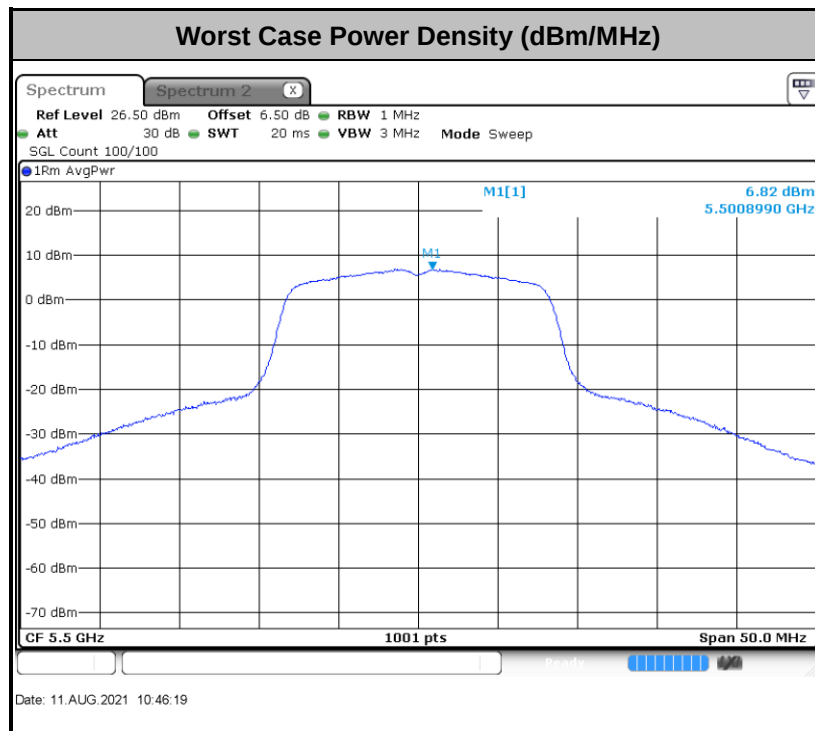

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

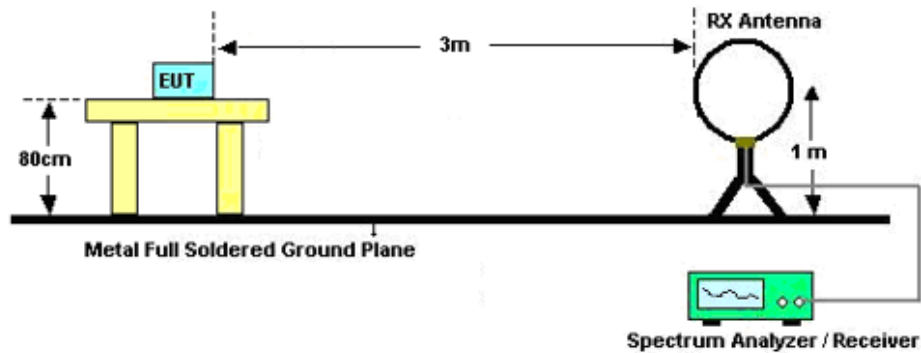

For radiated emissions from 30MHz to 1GHz

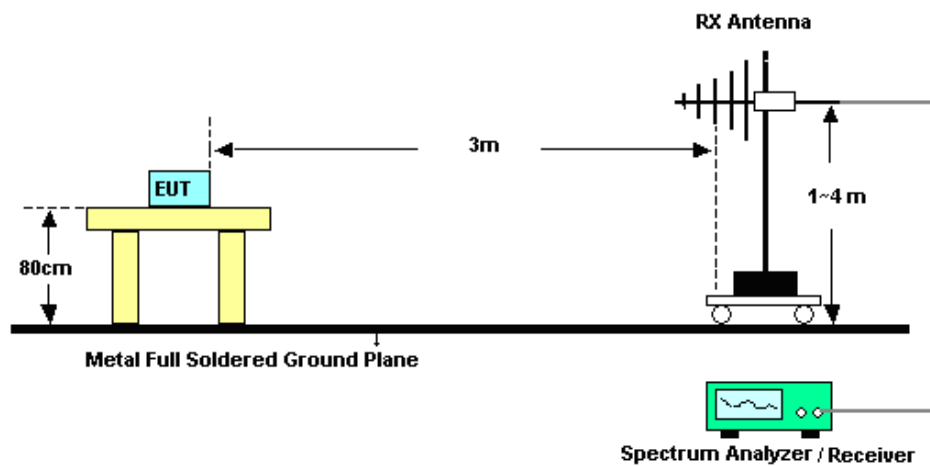

For radiated emissions above 1GHz

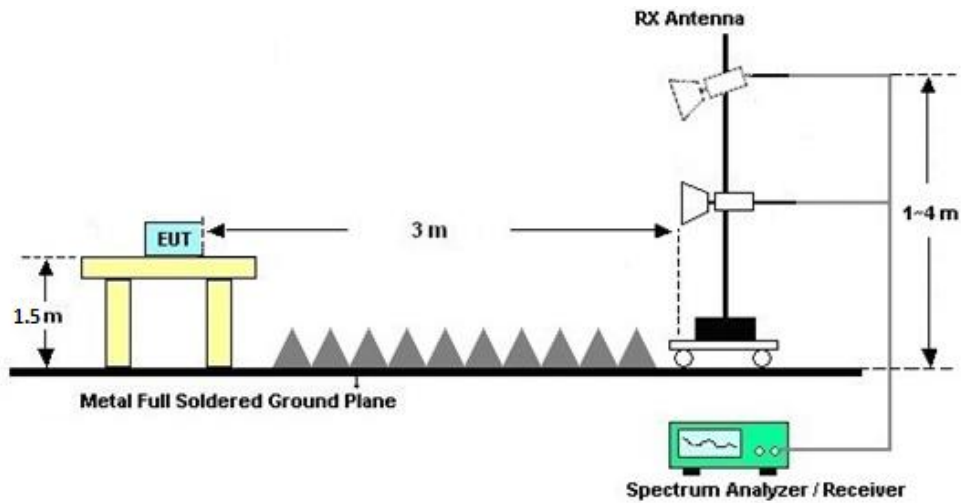

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the U-NII-150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

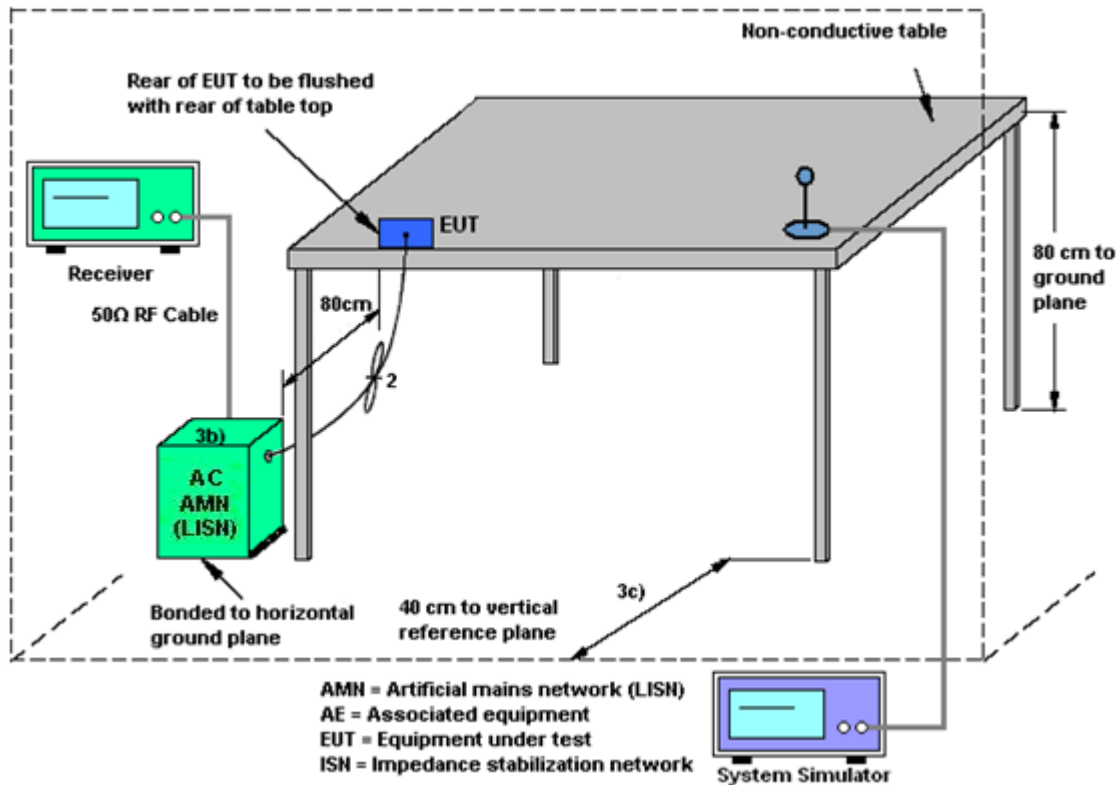

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	Aug. 04, 2021~ Aug. 11, 2021	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	Aug. 04, 2021~ Aug. 11, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	Aug. 04, 2021~ Aug. 11, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 17, 2020	Aug. 20, 2021	Oct. 16, 2021	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 12, 2021	Aug. 20, 2021	Apr. 11, 2022	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 1, 2020	Aug. 20, 2021	Oct. 31, 2021	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 27, 2021	Aug. 20, 2021	May 26, 2022	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 25, 2021	Aug. 20, 2021	Apr. 24, 2022	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2020	Aug. 20, 2021	Nov. 09, 2021	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Apr. 12, 2021	Aug. 20, 2021	Apr. 11, 2022	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 06, 2021	Aug. 20, 2021	Jan. 05, 2022	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Jan. 06, 2021	Aug. 20, 2021	Jan. 05, 2022	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 13, 2021	Aug. 20, 2021	Apr. 12, 2022	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 20, 2021	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 20, 2021	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 20, 2021	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Aug. 25, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Aug. 25, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 17, 2020	Aug. 25, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Aug. 25, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required.



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Gene Wang	Temperature:	21~25	°C
Test Date:	2021/8/4~2021/8/11	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	18.18	-	26.67	-	-	-	22.60	-	
11a	6Mbps	1	44	5220	18.18	-	28.32	-	-	-	22.60	-	
11a	6Mbps	1	48	5240	18.28	-	26.07	-	-	-	22.62	-	
HT20	MCS0	1	36	5180	19.13	-	29.42	-	-	-	22.82	-	
HT20	MCS0	1	44	5220	19.38	-	28.32	-	-	-	22.87	-	
HT20	MCS0	1	48	5240	19.33	-	28.67	-	-	-	22.86	-	
HT40	MCS0	1	38	5190	37.16	-	50.89	-	-	-	23.01	-	
HT40	MCS0	1	46	5230	37.06	-	49.50	-	-	-	23.01	-	
VHT80	MCS0	1	42	5210	75.52	-	84.40	-	-	-	23.01	-	

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)			Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	36	5180	13.91	-		24.00	-	-6.50	-		Pass
11a	6Mbps	1	44	5220	17.61	-		24.00	-	-6.50	-		Pass
11a	6Mbps	1	48	5240	17.50	-		24.00	-	-6.50	-		Pass
HT20	MCS0	1	36	5180	14.99	-		24.00	-	-6.50	-		Pass
HT20	MCS0	1	44	5220	17.90	-		24.00	-	-6.50	-		Pass
HT20	MCS0	1	48	5240	17.86	-		24.00	-	-6.50	-		Pass
HT40	MCS0	1	38	5190	12.93	-		24.00	-	-6.50	-		Pass
HT40	MCS0	1	46	5230	17.81	-		24.00	-	-6.50	-		Pass
VHT20	MCS0	1	36	5180	14.95	-		24.00	-	-6.50	-		Pass
VHT20	MCS0	1	44	5220	17.87	-		24.00	-	-6.50	-		Pass
VHT20	MCS0	1	48	5240	17.72	-		24.00	-	-6.50	-		Pass
VHT40	MCS0	1	38	5190	12.92	-		24.00	-	-6.50	-		Pass
VHT40	MCS0	1	46	5230	17.58	-		24.00	-	-6.50	-		Pass
VHT80	MCS0	1	42	5210	11.74	-		24.00	-	-6.50	-		Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	0.13	-	3.28	-		11.00	-	-6.50	-	Pass
11a	6Mbps	1	44	5220	0.13	-	6.46	-		11.00	-	-6.50	-	Pass
11a	6Mbps	1	48	5240	0.13	-	6.42	-		11.00	-	-6.50	-	Pass
HT20	MCS0	1	36	5180	0.17	-	4.09	-		11.00	-	-6.50	-	Pass
HT20	MCS0	1	44	5220	0.17	-	6.57	-		11.00	-	-6.50	-	Pass
HT20	MCS0	1	48	5240	0.17	-	6.47	-		11.00	-	-6.50	-	Pass
HT40	MCS0	1	38	5190	0.28	-	-1.12	-		11.00	-	-6.50	-	Pass
HT40	MCS0	1	46	5230	0.28	-	3.35	-		11.00	-	-6.50	-	Pass
VHT80	MCS0	1	42	5210	0.55	-	-4.70	-		11.00	-	-6.50	-	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A single antenna															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260	18.28	-	26.42	-	23.62	-	29.62	-	23.98	-	
11a	6Mbps	1	60	5300	18.43	-	28.17	-	23.66	-	29.66	-	23.98	-	
11a	6Mbps	1	64	5320	18.33	-	27.27	-	23.63	-	29.63	-	23.98	-	
HT20	MCS0	1	52	5260	19.33	-	30.47	-	23.86	-	29.86	-	23.98	-	
HT20	MCS0	1	60	5300	20.03	-	29.57	-	23.98	-	30.00	-	23.98	-	
HT20	MCS0	1	64	5320	19.28	-	30.37	-	23.85	-	29.85	-	23.98	-	
HT40	MCS0	1	54	5270	37.16	-	47.83	-	23.98	-	30.00	-	23.98	-	
HT40	MCS0	1	62	5310	36.96	-	49.63	-	23.98	-	30.00	-	23.98	-	
VHT80	MCS0	1	58	5290	75.40	-	83.28	-	23.98	-	30.00	-	23.98	-	

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260	17.55	-		23.98	-	-6.50	-	26.99	Pass
11a	6Mbps	1	60	5300	17.69	-		23.98	-	-6.50	-	26.99	Pass
11a	6Mbps	1	64	5320	14.08	-		23.98	-	-6.50	-	26.99	Pass
HT20	MCS0	1	52	5260	17.69	-		23.98	-	-6.50	-	26.99	Pass
HT20	MCS0	1	60	5300	17.72	-		23.98	-	-6.50	-	26.99	Pass
HT20	MCS0	1	64	5320	14.76	-		23.98	-	-6.50	-	26.99	Pass
HT40	MCS0	1	54	5270	17.90	-		23.98	-	-6.50	-	26.99	Pass
HT40	MCS0	1	62	5310	13.48	-		23.98	-	-6.50	-	26.99	Pass
VHT20	MCS0	1	52	5260	17.62	-		23.98	-	-6.50	-	26.99	Pass
VHT20	MCS0	1	60	5300	17.65	-		23.98	-	-6.50	-	26.99	Pass
VHT20	MCS0	1	64	5320	14.22	-		23.98	-	-6.50	-	26.99	Pass
VHT40	MCS0	1	54	5270	17.68	-		23.98	-	-6.50	-	26.99	Pass
VHT40	MCS0	1	62	5310	13.41	-	23.98	-	-6.50	-	26.99	Pass	
VHT80	MCS0	1	58	5290	12.72	-	23.98	-	-6.50	-	26.99	Pass	

TEST RESULTS DATA
Power Spectral Density

U-NII-2A single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260	6.55	-		11.00	-	-6.50	-	Pass
11a	6Mbps	1	60	5300	6.32	-		11.00	-	-6.50	-	Pass
11a	6Mbps	1	64	5320	3.43	-		11.00	-	-6.50	-	Pass
HT20	MCS0	1	52	5260	6.32	-		11.00	-	-6.50	-	Pass
HT20	MCS0	1	60	5300	6.26	-		11.00	-	-6.50	-	Pass
HT20	MCS0	1	64	5320	3.19	-		11.00	-	-6.50	-	Pass
HT40	MCS0	1	54	5270	3.57	-		11.00	-	-6.50	-	Pass
HT40	MCS0	1	62	5310	-0.29	-		11.00	-	-6.50	-	Pass
VHT80	MCS0	1	58	5290	-3.43	-		11.00	-	-6.50	-	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C single antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	1	100	5500	18.38	-	27.72	-	23.64	-	29.64	-	23.98	-	----	----
11a	6Mbps	1	116	5580	18.43	-	27.57	-	23.66	-	29.66	-	23.98	-	----	----
11a	6Mbps	1	140	5700	19.08	-	32.22	-	23.81	-	29.81	-	23.98	-	----	----
HT20	MCS0	1	100	5500	19.23	-	28.47	-	23.84	-	29.84	-	23.98	-	----	----
HT20	MCS0	1	116	5580	19.93	-	30.92	-	23.98	-	30.00	-	23.98	-	----	----
HT20	MCS0	1	140	5700	21.23	-	33.12	-	23.98	-	30.00	-	23.98	-	----	----
HT40	MCS0	1	102	5510	37.56	-	61.77	-	23.98	-	30.00	-	23.98	-	----	----
HT40	MCS0	1	110	5550	37.56	-	63.39	-	23.98	-	30.00	-	23.98	-	----	----
HT40	MCS0	1	134	5670	38.26	-	69.32	-	23.98	-	30.00	-	23.98	-	----	----
VHT80	MCS0	1	106	5530	75.88	-	87.11	-	23.98	-	30.00	-	23.98	-	----	----
VHT80	MCS0	1	122	5610	76.12	-	93.35	-	23.98	-	30.00	-	23.98	-	----	----

U-NII-2C straddle channel single antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	1	144	5720	18.93	-	30.47	-	23.77	-	29.77	-	23.98	-	-	-
HT20	MCS0	1	144	5720	21.08	-	36.21	-	23.98	-	30.00	-	23.98	-	-	-
HT40	MCS0	1	142	5710	38.96	-	70.67	-	23.98	-	30.00	-	23.98	-	-	-
VHT80	MCS0	1	138	5690	76.12	-	106.77	-	23.98	-	30.00	-	23.98	-	-	-

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	17.05	-		23.98	-	-6.70	-	26.99	Pass
11a	6Mbps	1	116	5580	17.57	-		23.98	-	-6.70	-	26.99	Pass
11a	6Mbps	1	140	5700	17.52	-		23.98	-	-6.70	-	26.99	Pass
HT20	MCS0	1	100	5500	16.29	-		23.98	-	-6.70	-	26.99	Pass
HT20	MCS0	1	116	5580	17.54	-		23.98	-	-6.70	-	26.99	Pass
HT20	MCS0	1	140	5700	17.62	-		23.98	-	-6.70	-	26.99	Pass
HT40	MCS0	1	102	5510	13.56	-		23.98	-	-6.70	-	26.99	Pass
HT40	MCS0	1	110	5550	17.73	-		23.98	-	-6.70	-	26.99	Pass
HT40	MCS0	1	134	5670	17.64	-		23.98	-	-6.70	-	26.99	Pass
VHT20	MCS0	1	100	5500	16.11	-		23.98	-	-6.70	-	26.99	Pass
VHT20	MCS0	1	116	5580	17.53	-		23.98	-	-6.70	-	26.99	Pass
VHT20	MCS0	1	140	5700	17.50	-		23.98	-	-6.70	-	26.99	Pass
VHT40	MCS0	1	102	5510	13.37	-		23.98	-	-6.70	-	26.99	Pass
VHT40	MCS0	1	110	5550	17.70	-		23.98	-	-6.70	-	26.99	Pass
VHT40	MCS0	1	134	5670	17.62	-		23.98	-	-6.70	-	26.99	Pass
VHT80	MCS0	1	106	5530	11.38	-		23.98	-	-6.70	-	26.99	Pass
VHT80	MCS0	1	122	5610	16.38	-	23.98	-	-6.70	-	26.99	Pass	

FCC U-NII-2C straddle channel single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	144	5720	17.51	-		23.98	-	-6.70	-	26.99	Pass
HT20	MCS0	1	144	5720	17.83	-		23.98	-	-6.70	-	26.99	Pass
HT40	MCS0	1	142	5710	17.60	-		23.98	-	-6.70	-	26.99	Pass
VHT20	MCS0	1	144	5720	17.77	-		23.98	-	-6.70	-	26.99	Pass
VHT40	MCS0	1	142	5710	17.59	-		23.98	-	-6.70	-	26.99	Pass
VHT80	MCS0	1	138	5690	17.53	-		23.98	-	-6.70	-	26.99	Pass


TEST RESULTS DATA
Power Spectral Density

U-NII-2C single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	100	5500	0.13	-	6.82	-		11.00	-	-6.70	-	Pass
11a	6Mbps	1	116	5580	0.13	-	6.32	-		11.00	-	-6.70	-	Pass
11a	6Mbps	1	140	5700	0.13	-	6.17	-		11.00	-	-6.70	-	Pass
HT20	MCS0	1	100	5500	0.17	-	5.25	-		11.00	-	-6.70	-	Pass
HT20	MCS0	1	116	5580	0.17	-	6.06	-		11.00	-	-6.70	-	Pass
HT20	MCS0	1	140	5700	0.17	-	6.10	-		11.00	-	-6.70	-	Pass
HT40	MCS0	1	102	5510	0.28	-	1.67	-		11.00	-	-6.70	-	Pass
HT40	MCS0	1	110	5550	0.28	-	3.36	-		11.00	-	-6.70	-	Pass
HT40	MCS0	1	134	5670	0.28	-	3.35	-		11.00	-	-6.70	-	Pass
VHT80	MCS0	1	106	5530	0.55	-	-5.41	-		11.00	-	-6.70	-	Pass
VHT80	MCS0	1	122	5610	0.55	-	-0.01	-		11.00	-	-6.70	-	Pass

U-NII-2C straddle channel single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	144	5720	0.13	-	6.43	-		11.00	-	-6.70	-	Pass
HT20	MCS0	1	144	5720	0.17	-	6.42	-		11.00	-	-6.70	-	Pass
HT40	MCS0	1	142	5710	0.28	-	2.91	-		11.00	-	-6.70	-	Pass
VHT80	MCS0	1	138	5690	0.55	-	-0.13	-		11.00	-	-6.70	-	Pass




Appendix B. AC Conducted Emission Test Results

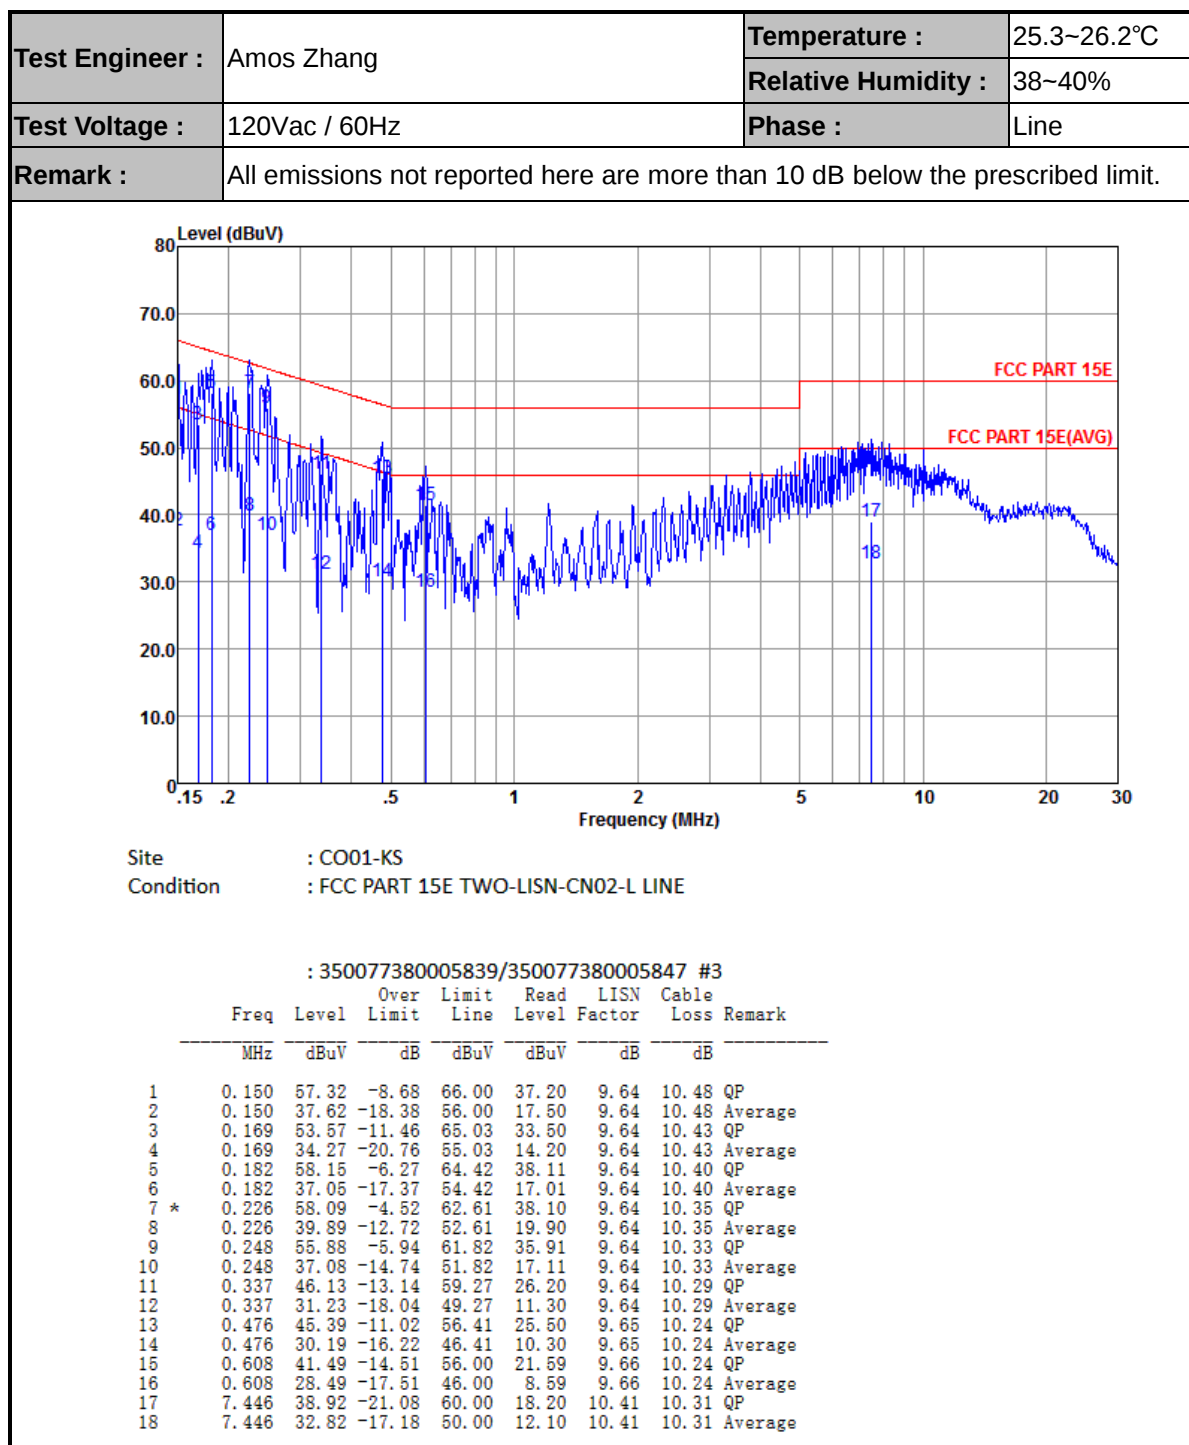



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

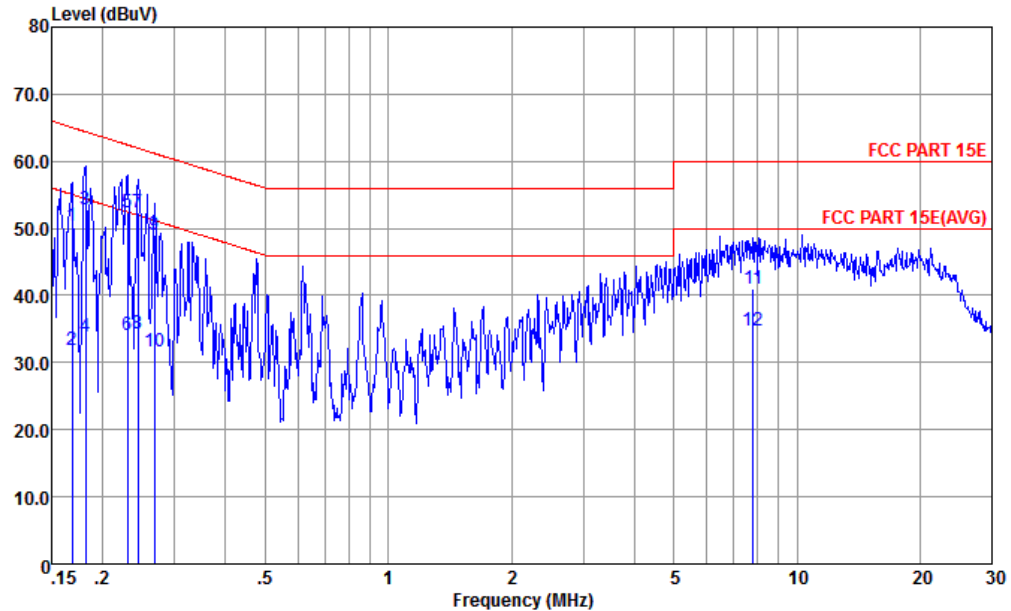

Site : CO01-KS
Condition : FCC PART 15E TWO-LISN-CN02-N NEUTRAL

: 350077380005839/350077380005847 #3

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.169	50.47	-14.56	65.03	30.20	9.84	10.43	QP
2	0.169	31.87	-23.16	55.03	11.60	9.84	10.43	Average
3	0.182	52.76	-11.66	64.42	32.50	9.86	10.40	QP
4	0.182	33.76	-20.66	54.42	13.50	9.86	10.40	Average
5	0.230	52.40	-10.04	62.44	32.20	9.86	10.34	QP
6	0.230	34.00	-18.44	52.44	13.80	9.86	10.34	Average
7 *	0.244	52.38	-9.57	61.95	32.20	9.84	10.34	QP
8	0.244	34.30	-17.65	51.95	14.12	9.84	10.34	Average
9	0.267	48.94	-12.26	61.20	28.80	9.82	10.32	QP
10	0.267	31.74	-19.46	51.20	11.60	9.82	10.32	Average
11	7.810	40.97	-19.03	60.00	20.20	10.46	10.31	QP
12	7.810	34.67	-15.33	50.00	13.90	10.46	10.31	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

U-NII-1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.55	57.55	-16.45	74	44.33	35.29	10.65	32.72	173	252	P	H
		5149.6	47.06	-6.94	54	33.84	35.29	10.65	32.72	173	252	A	H
	*	5182	100.7	-	-	87.41	35.31	10.69	32.71	173	252	P	H
		5182	93.82	-	-	80.53	35.31	10.69	32.71	173	252	A	H
		5149.90	63.51	-10.49	74	50.65	34.93	10.65	32.72	320	198	P	V
		5149.92	49.77	-4.23	54	36.91	34.93	10.65	32.72	320	198	A	V
	*	5176	106.12	-	-	93.18	34.96	10.69	32.71	320	198	P	V
		5176	99.23	-	-	86.29	34.96	10.69	32.71	320	198	A	V
802.11a CH 40 5200MHz		5142.4	56.13	-17.87	74	42.92	35.28	10.65	32.72	175	238	P	H
		5149.76	46.54	-7.46	54	33.32	35.29	10.65	32.72	175	238	A	H
		5200	104.85	-	-	91.52	35.32	10.71	32.7	175	238	P	H
		5200	97.57	-	-	84.24	35.32	10.71	32.7	175	238	A	H
		5383.98	54.77	-19.23	74	41.16	35.44	10.8	32.63	175	238	P	H
		5357.16	44.92	-9.08	54	31.36	35.42	10.78	32.64	175	238	A	H
		5150	57.37	-16.63	74	44.51	34.93	10.65	32.72	342	204	P	V
		5150	48.52	-5.48	54	35.66	34.93	10.65	32.72	342	204	A	V
		5200	109.06	-	-	96.07	34.98	10.71	32.7	342	204	P	V
		5200	101.95	-	-	88.96	34.98	10.71	32.7	342	204	A	V
		5392.44	55.33	-18.67	74	42	35.16	10.8	32.63	342	204	P	V
		5359.14	44.75	-9.25	54	31.49	35.12	10.78	32.64	342	204	A	V



U-NII-1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10358.36	46.57	-21.73	68.3	53.19	38.59	15.36	60.57	300	0	P	H
		10358.36	45.51	-22.79	68.3	52.96	37.76	15.36	60.57	100	360	P	V
802.11a CH 40 5200MHz		10400	46.44	-21.86	68.3	53	38.61	15.4	60.57	300	0	P	H
		10400	45.92	-22.38	68.3	53.29	37.8	15.4	60.57	100	360	P	V
802.11a CH 44 5220MHz		10438.44	47.23	-21.07	68.3	53.75	38.63	15.42	60.57	300	0	P	H
		10438.44	45.79	-22.51	68.3	53.12	37.82	15.42	60.57	100	360	P	V
802.11a CH 48 5240MHz		10476	45.05	-23.25	68.3	51.61	38.65	15.45	60.66	300	0	P	H
		10476	44.99	-23.31	68.3	52.35	37.85	15.45	60.66	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5148.64	62.18	-11.82	74	48.96	35.29	10.65	32.72	112	235	P	H
		5149.92	48.83	-5.17	54	35.61	35.29	10.65	32.72	112	235	A	H
	*	5182	102.31	-	-	89.02	35.31	10.69	32.71	112	235	P	H
		5182	95.29	-	-	82	35.31	10.69	32.71	112	235	A	H
		5148.48	63.79	-10.21	74	50.93	34.93	10.65	32.72	296	199	P	V
		5149.98	50.9	-3.1	54	38.04	34.93	10.65	32.72	296	199	A	V
	*	5182	106.77	-	-	93.83	34.96	10.69	32.71	296	199	P	V
		5182	99.41	-	-	86.47	34.96	10.69	32.71	296	199	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-1 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		10358.36	45.23	-23.07	68.3	51.96	38.59	15.36	60.68	300	0	P	H
CH 36 5180MHz		10358.36	43.79	-24.51	68.3	51.35	37.76	15.36	60.68	100	360	P	V
802.11n HT20		10438.44	45.76	-22.54	68.3	52.37	38.63	15.42	60.66	300	0	P	H
CH 44		15660	48.35	-25.65	74	47.71	41.1	19.32	59.78	300	360	P	H
5220MHz		10438.44	43.38	-24.92	68.3	50.8	37.82	15.42	60.66	100	360	P	V
		15660	50.15	-23.85	74	50.75	39.86	19.32	59.78	100	0	P	V
802.11n HT20		10398.39	45.19	-23.11	68.3	51.85	38.61	15.4	60.67	300	0	P	H
CH 48 5240MHz		10398.39	43.99	-24.31	68.3	51.46	37.8	15.4	60.67	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5148.48	61.21	-12.79	74	47.99	35.29	10.65	32.72	100	234	P	H
		5149.28	48.26	-5.74	54	35.04	35.29	10.65	32.72	100	234	A	H
	*	5194	97.21	-	-	83.89	35.31	10.71	32.7	100	234	P	H
		5194	89.67	-	-	76.35	35.31	10.71	32.7	100	234	A	H
		5384.88	53.85	-20.15	74	40.24	35.44	10.8	32.63	100	234	P	H
		5360.58	45.29	-8.71	54	31.72	35.42	10.79	32.64	100	234	A	H
		5149.28	67.6	-6.4	74	54.74	34.93	10.65	32.72	265	200	P	V
		5149.98	50.55	-3.45	54	37.69	34.93	10.65	32.72	265	200	A	V
	*	5194	101.52	-	-	88.53	34.98	10.71	32.7	265	200	P	V
		5194	94.56	-	-	81.57	34.98	10.71	32.7	265	200	A	V
		5397.48	54.62	-19.38	74	41.27	35.17	10.81	32.63	265	200	P	V
		5363.28	45.17	-8.83	54	31.88	35.14	10.79	32.64	265	200	A	V
802.11n HT40 CH 46 5230MHz		5146.88	56.97	-17.03	74	43.75	35.29	10.65	32.72	161	240	P	H
		5149.44	48.01	-5.99	54	34.79	35.29	10.65	32.72	161	240	A	H
	*	5230	102.86	-	-	89.48	35.34	10.73	32.69	161	240	P	H
		5230	96.26	-	-	82.88	35.34	10.73	32.69	161	240	A	H
		5359.14	55.87	-18.13	74	42.31	35.42	10.78	32.64	161	240	P	H
		5351.22	46	-8	54	32.45	35.42	10.78	32.65	161	240	A	H
		5147.2	61.96	-12.04	74	49.1	34.93	10.65	32.72	323	199	P	V
		5149.28	50.42	-3.58	54	37.56	34.93	10.65	32.72	323	199	A	V
	*	5230	106.04	-	-	92.99	35.01	10.73	32.69	323	199	P	V
		5230	99.4	-	-	86.35	35.01	10.73	32.69	323	199	A	V
		5357.34	55.53	-18.47	74	42.27	35.12	10.78	32.64	323	199	P	V
		5351.22	46.7	-7.3	54	33.45	35.12	10.78	32.65	323	199	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-1 5150~5250MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10378.38	43.95	-24.35	68.3	50.63	38.6	15.39	60.67	300	0	P	H
		10378.38	43.8	-24.5	68.3	51.3	37.78	15.39	60.67	100	360	P	V
802.11n HT40 CH 46 5230MHz		10458.46	44.49	-23.81	68.3	51.08	38.64	15.43	60.66	300	0	P	H
		10458.46	44.09	-24.21	68.3	51.49	37.83	15.43	60.66	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-1 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5149.44	55.88	-18.12	74	42.66	35.29	10.65	32.72	300	104	P	H
		5129.44	47.06	-6.94	54	33.88	35.28	10.63	32.73	300	104	A	H
	*	5212	91.96	-	-	78.6	35.33	10.72	32.69	300	104	P	H
		5212	84.37	-	-	71.01	35.33	10.72	32.69	300	104	A	H
		5363.46	54.32	-19.68	74	40.75	35.42	10.79	32.64	300	104	P	H
		5358.96	45.74	-8.26	54	32.18	35.42	10.78	32.64	300	104	A	H
		5134.72	62.33	-11.67	74	49.52	34.91	10.63	32.73	300	197	P	V
		5149.92	50.52	-3.48	54	37.66	34.93	10.65	32.72	300	197	A	V
	*	5206	98.13	-	-	85.14	34.98	10.71	32.7	300	197	P	V
		5206	90.99	-	-	78	34.98	10.71	32.7	300	197	A	V
		5351.58	54.27	-19.73	74	41.02	35.12	10.78	32.65	300	197	P	V
		5398.2	45.62	-8.38	54	32.27	35.17	10.81	32.63	300	197	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**U-NII-1 5150~5250MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10418.42	44.88	-23.42	68.3	51.52	38.62	15.41	60.67	300	0	P	H
CH 42 5210MHz		10418.42	44.04	-24.26	68.3	51.49	37.81	15.41	60.67	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2A - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 60 5230MHz		5128.16	55.63	-18.37	74	42.45	35.28	10.63	32.73	184	237	P	H
		5136.96	45.88	-8.12	54	32.7	35.28	10.63	32.73	184	237	A	H
	*	5296	105.86	-	-	92.4	35.37	10.76	32.67	184	237	P	H
		5296	98.69	-	-	85.23	35.37	10.76	32.67	184	237	A	H
		5350.4	59.27	-14.73	74	45.72	35.42	10.78	32.65	184	237	P	H
		5350	47.77	-6.23	54	34.22	35.42	10.78	32.65	184	237	A	H
		5105.44	55.28	-18.72	74	42.55	34.88	10.59	32.74	123	148	P	V
		5129.76	45.92	-8.08	54	33.11	34.91	10.63	32.73	123	148	A	V
	*	5302	108.76	-	-	95.59	35.08	10.76	32.67	123	148	P	V
		5302	101.47	-	-	88.3	35.08	10.76	32.67	123	148	A	V
		5352.1	62.05	-11.95	74	48.8	35.12	10.78	32.65	123	148	P	V
		5350	49.99	-4.01	54	36.74	35.12	10.78	32.65	123	148	A	V
802.11a CH 64 5320MHz		5350.1	64.89	-9.11	74	51.34	35.42	10.78	32.65	156	239	P	H
		5350.8	50.73	-3.27	54	37.18	35.42	10.78	32.65	156	239	A	H
	*	5320	104.86	-	-	91.36	35.39	10.77	32.66	156	239	P	H
		5320	97.49	-	-	83.99	35.39	10.77	32.66	156	239	A	H
		5350.6	63.1	-10.9	74	49.85	35.12	10.78	32.65	283	200	P	V
		5350.4	50.32	-3.68	54	37.07	35.12	10.78	32.65	283	200	A	V
	*	5320	108.23	-	-	95.03	35.09	10.77	32.66	283	200	P	V
		5320	100.51	-	-	87.31	35.09	10.77	32.66	283	200	A	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



U-NII-2A 5250~5350MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10518.52	45.29	-23.01	68.3	51.79	38.67	15.48	60.65	300	0	P	H
		15780	48.2	-25.8	74	47.37	41.13	19.43	59.73	300	360	P	H
		10518.52	44.26	-24.04	68.3	51.55	37.88	15.48	60.65	100	360	P	V
		15780	50.85	-23.15	74	51.17	39.98	19.43	59.73	100	0	P	V
802.11a CH 60 5300MHz		10600	45.31	-28.69	74	51.68	38.72	15.54	60.63	300	0	P	H
		15900	48.81	-25.19	74	47.8	41.17	19.53	59.69	300	360	P	H
		10600	44.4	-29.6	74	51.55	37.94	15.54	60.63	100	360	P	V
		15900	51.34	-22.66	74	51.4	40.1	19.53	59.69	100	198	P	V
		15900	45.17	-8.83	54	45.23	40.1	19.53	59.69	100	198	A	V
802.11a CH 64 5320MHz		10638.63	45.29	-28.71	74	51.6	38.74	15.57	60.62	300	0	P	H
		10638.63	44.07	-29.93	74	51.15	37.97	15.57	60.62	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2A 5250~5350MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 60 5300MHz		5134.72	55.29	-18.71	74	42.11	35.28	10.63	32.73	100	232	P	H
		5116.8	45.88	-8.12	54	32.75	35.26	10.61	32.74	100	232	A	H
		5302	104.97	-	-	91.5	35.38	10.76	32.67	100	232	P	H
		5302	98.08	-	-	84.61	35.38	10.76	32.67	100	232	A	H
		5350.4	63.66	-10.34	74	50.11	35.42	10.78	32.65	100	232	P	H
		5350.2	48.06	-5.94	54	34.51	35.42	10.78	32.65	100	232	A	H
		5123.2	55.22	-18.78	74	42.41	34.91	10.63	32.73	158	148	P	V
		5129.76	45.74	-8.26	54	32.93	34.91	10.63	32.73	158	148	A	V
		5296	108.04	-	-	94.87	35.08	10.76	32.67	158	148	P	V
		5296	100.81	-	-	87.64	35.08	10.76	32.67	158	148	A	V
		5351.5	61.53	-12.47	74	48.28	35.12	10.78	32.65	158	148	P	V
		5350.5	49.28	-4.72	54	36.03	35.12	10.78	32.65	158	148	A	V
802.11n HT20 CH 64 5320MHz		5351.9	65.04	-8.96	74	51.49	35.42	10.78	32.65	157	243	P	H
		5350.3	48.12	-5.88	54	34.57	35.42	10.78	32.65	157	243	A	H
	*	5320	103.5	-	-	90	35.39	10.77	32.66	157	243	P	H
		5320	96.28	-	-	82.78	35.39	10.77	32.66	157	243	A	H
		5350.2	69.05	-4.95	74	55.8	35.12	10.78	32.65	282	202	P	V
		5350.1	50.52	-3.48	54	37.27	35.12	10.78	32.65	282	202	A	V
	*	5320	106.55	-	-	93.35	35.09	10.77	32.66	282	202	P	V
Remark		5320	99.27	-	-	86.07	35.09	10.77	32.66	282	202	A	V
	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2A 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		10518.52	45.42	-22.88	68.3	51.92	38.67	15.48	60.65	300	0	P	H
CH 52 5260MHz		10518.52	44.09	-24.21	68.3	51.38	37.88	15.48	60.65	100	360	P	V
802.11n HT20		10600	44.94	-29.06	74	51.31	38.72	15.54	60.63	300	0	P	H
CH 60 5300MHz		10600	43.3	-30.7	74	50.45	37.94	15.54	60.63	100	360	P	V
802.11n HT20		10638.63	44.68	-29.32	74	50.99	38.74	15.57	60.62	300	0	P	H
CH 64 5320MHz		10638.63	44.49	-29.51	74	51.57	37.97	15.57	60.62	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2A 5250~5350MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		5144.64	55.89	-18.11	74	42.67	35.29	10.65	32.72	171	241	P	H
		5145.28	46.79	-7.21	54	33.57	35.29	10.65	32.72	171	241	A	H
	*	5266	104.3	-	-	90.88	35.36	10.74	32.68	171	241	P	H
		5266	97.19	-	-	83.77	35.36	10.74	32.68	171	241	A	H
		5363.5	61.07	-12.93	74	47.5	35.42	10.79	32.64	171	241	P	H
		5351.4	50.54	-3.46	54	36.99	35.42	10.78	32.65	171	241	A	H
		5148.16	57.61	-16.39	74	44.75	34.93	10.65	32.72	298	201	P	V
		5148.8	47.99	-6.01	54	35.13	34.93	10.65	32.72	298	201	A	V
	*	5272	107.4	-	-	94.3	35.04	10.74	32.68	298	201	P	V
		5272	100.07	-	-	86.97	35.04	10.74	32.68	298	201	A	V
		5355.8	61.3	-12.7	74	48.04	35.12	10.78	32.64	298	201	P	V
		5350.1	49.08	-4.92	54	35.83	35.12	10.78	32.65	298	201	A	V
802.11n HT40 CH 62 5310MHz		5143.52	55.94	-18.06	74	42.72	35.29	10.65	32.72	153	235	P	H
		5129.28	46.61	-7.39	54	33.43	35.28	10.63	32.73	153	235	A	H
	*	5314	99.95	-	-	86.45	35.39	10.77	32.66	153	235	P	H
		5314	92.81	-	-	79.31	35.39	10.77	32.66	153	235	A	H
		5354.7	63.81	-10.19	74	50.25	35.42	10.78	32.64	153	235	P	H
		5350.1	49.5	-4.5	54	35.95	35.42	10.78	32.65	153	235	A	H
		5108	55.39	-18.61	74	42.62	34.9	10.61	32.74	281	201	P	V
		5137.12	46.23	-7.77	54	33.42	34.91	10.63	32.73	281	201	A	V
	*	5314	103.49	-	-	90.29	35.09	10.77	32.66	281	201	P	V
		5314	96.21	-	-	83.01	35.09	10.77	32.66	281	201	A	V
		5351.7	66.38	-7.62	74	53.13	35.12	10.78	32.65	281	201	P	V
		5350.1	50.47	-3.53	54	37.22	35.12	10.78	32.65	281	201	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2A 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		10538.54	44.81	-23.49	68.3	51.27	38.68	15.5	60.64	300	0	P	H
		10538.54	44.18	-24.12	68.3	51.42	37.9	15.5	60.64	100	360	P	V
802.11n HT40 CH 62 5310MHz		10618.62	44.78	-29.22	74	51.11	38.73	15.56	60.62	300	0	P	H
		10618.62	44.45	-29.55	74	51.55	37.96	15.56	60.62	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2A 5250~5350MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5114.88	55.43	-18.57	74	42.3	35.26	10.61	32.74	291	233	P	H
		5130.88	47.29	-6.71	54	34.11	35.28	10.63	32.73	291	233	A	H
	*	5284	95.11	-	-	81.66	35.37	10.75	32.67	291	233	P	H
		5284	87.72	-	-	74.27	35.37	10.75	32.67	291	233	A	H
		5384.1	59.32	-14.68	74	45.71	35.44	10.8	32.63	291	233	P	H
		5360.4	49.49	-4.51	54	35.93	35.42	10.78	32.64	291	233	A	H
		5136.48	55.69	-18.31	74	42.88	34.91	10.63	32.73	284	202	P	V
		5138.24	46.78	-7.22	54	33.97	34.91	10.63	32.73	284	202	A	V
	*	5284	98.35	-	-	85.21	35.06	10.75	32.67	284	202	P	V
		5284	91.18	-	-	78.04	35.06	10.75	32.67	284	202	A	V
		5355.1	60.9	-13.1	74	47.64	35.12	10.78	32.64	284	202	P	V
		5354.2	50.76	-3.24	54	37.5	35.12	10.78	32.64	284	202	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**U-NII-2A 5250~5350MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10578.58	45.56	-22.74	68.3	51.97	38.7	15.52	60.63	300	0	P	H
CH 58 5290MHz		10578.58	44.71	-23.59	68.3	51.9	37.92	15.52	60.63	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5458.96	58.04	-15.96	74	44.27	35.48	10.89	32.6	360	163	P	H
		5467.76	63.67	-4.63	68.3	49.86	35.49	10.92	32.6	360	163	P	H
		5459.98	47.98	-6.02	54	34.21	35.48	10.89	32.6	360	163	A	H
	*	5500	106.43	-	-	92.54	35.5	10.97	32.58	360	163	P	H
		5500	100.03	-	-	86.14	35.5	10.97	32.58	360	163	A	H
		5455.44	58.39	-15.61	74	44.88	35.22	10.89	32.6	100	150	P	V
		5469.36	65.12	-3.18	68.3	51.56	35.24	10.92	32.6	100	150	P	V
		5459.6	48.06	-5.94	54	34.55	35.22	10.89	32.6	100	150	A	V
	*	5500	106.55	-	-	92.89	35.27	10.97	32.58	100	150	P	V
		5500	98.89	-	-	85.23	35.27	10.97	32.58	100	150	A	V
802.11a CH 140 5700MHz		5725.72	65.17	-3.13	68.3	50.92	35.72	11.25	32.72	320	165	P	H
	*	5698	104.92	-	-	90.73	35.67	11.22	32.7	320	165	P	H
		5698	97.89	-	-	83.7	35.67	11.22	32.7	320	165	A	H
		5727.56	63.62	-4.68	68.3	49.77	35.32	11.25	32.72	365	160	P	V
	*	5704	104.9	-	-	91.03	35.34	11.23	32.7	365	160	P	V
		5704	97.47	-	-	83.6	35.34	11.23	32.7	365	160	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		10999	44.75	-29.25	74	50.54	38.93	15.82	60.54	300	0	P	H
		10999	44.1	-29.9	74	50.59	38.23	15.82	60.54	100	360	P	V
802.11a CH 116 5580MHz		11159.16	45.39	-28.61	74	50.88	39.02	15.99	60.5	300	0	P	H
		11159.16	45.41	-28.59	74	51.57	38.35	15.99	60.5	100	360	P	V
802.11a CH 140 5700MHz		11399.39	45.91	-28.09	74	50.99	39.15	16.22	60.45	300	0	P	H
		11399.39	44.33	-29.67	74	50.03	38.53	16.22	60.45	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - 5470~5725MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5459.6	57.19	-16.81	74	43.42	35.48	10.89	32.6	222	158	P	H
		5468.72	62.41	-5.89	68.3	48.6	35.49	10.92	32.6	222	158	P	H
		5459.6	47.69	-6.31	54	33.92	35.48	10.89	32.6	222	158	A	H
	*	5500	104.86	-	-	90.97	35.5	10.97	32.58	222	158	P	H
		5500	97.15	-	-	83.26	35.5	10.97	32.58	222	158	A	H
		5458.16	61.1	-12.9	74	47.59	35.22	10.89	32.6	227	150	P	V
		5469.04	65.2	-3.1	68.3	51.64	35.24	10.92	32.6	227	150	P	V
		5459.92	47.98	-6.02	54	34.47	35.22	10.89	32.6	227	150	A	V
	*	5500	105.42	-	-	91.76	35.27	10.97	32.58	227	150	P	V
		5500	98.22	-	-	84.56	35.27	10.97	32.58	227	150	A	V
802.11n HT20 CH 140 5700MHz		5725.4	65.11	-3.19	68.3	50.86	35.72	11.25	32.72	321	164	P	H
	*	5698	103.74	-	-	89.55	35.67	11.22	32.7	321	164	P	H
		5698	96.58	-	-	82.39	35.67	11.22	32.7	321	164	A	H
		5725.08	65.15	-3.15	68.3	51.3	35.32	11.25	32.72	363	159	P	V
	*	5698	103.93	-	-	90.06	35.35	11.22	32.7	363	159	P	V
		5698	96.88	-	-	83.01	35.35	11.22	32.7	363	159	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - 5470~5725MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		10999	44.6	-29.4	74	50.39	38.93	15.82	60.54	300	0	P	H
CH 100 5500MHz		10999	44.67	-29.33	74	51.16	38.23	15.82	60.54	100	360	P	V
802.11n HT20		11159.16	46.92	-27.08	74	52.41	39.02	15.99	60.5	300	0	P	H
CH 116 5580MHz		11159.16	44.93	-29.07	74	51.09	38.35	15.99	60.5	100	360	P	V
802.11n HT20		11399.39	45.48	-28.52	74	50.56	39.15	16.22	60.45	300	0	P	H
CH 140 5700MHz		11399.39	44.99	-29.01	74	50.69	38.53	16.22	60.45	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - 5470~5725MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5455.12	58.9	-15.1	74	45.13	35.48	10.89	32.6	266	150	P	H
		5461.68	61.02	-7.28	68.3	47.25	35.48	10.89	32.6	266	150	P	H
		5459.12	47.85	-6.15	54	34.08	35.48	10.89	32.6	266	150	A	H
	*	5506	98.02	-	-	84.12	35.51	10.97	32.58	266	150	P	H
		5506	90.39	-	-	76.49	35.51	10.97	32.58	266	150	A	H
		5747.24	55.65	-12.65	68.3	41.36	35.75	11.27	32.73	266	150	P	H
		5458	60.74	-13.26	74	47.23	35.22	10.89	32.6	130	137	P	V
		5470	64.02	-4.28	68.3	50.46	35.24	10.92	32.6	130	137	P	V
		5459.6	50.27	-3.73	54	36.76	35.22	10.89	32.6	130	137	A	V
	*	5506	99.43	-	-	85.77	35.27	10.97	32.58	130	137	P	V
		5506	91.78	-	-	78.12	35.27	10.97	32.58	130	137	A	V
		5734.36	55.62	-12.68	68.3	41.78	35.32	11.25	32.73	130	137	P	V
802.11n HT40 CH 110 5550MHz		5459.76	61.51	-12.49	74	47.74	35.48	10.89	32.6	142	242	P	H
		5463.76	60.15	-8.15	68.3	46.35	35.48	10.92	32.6	142	242	P	H
		5458.48	48.83	-5.17	54	35.06	35.48	10.89	32.6	142	242	A	H
	*	5554	102.72	-	-	88.73	35.55	11.05	32.61	142	242	P	H
		5554	95.73	-	-	81.74	35.55	11.05	32.61	142	242	A	H
		5747.32	56.55	-11.75	68.3	42.26	35.75	11.27	32.73	142	242	P	H
		5459.98	59.46	-14.54	74	45.95	35.22	10.89	32.6	225	146	P	V
		5467.12	60.89	-7.41	68.3	47.33	35.24	10.92	32.6	225	146	P	V
		5459.92	48.97	-5.03	54	35.46	35.22	10.89	32.6	225	146	A	V
	*	5554	104.28	-	-	90.52	35.32	11.05	32.61	225	146	P	V
		5554	98.03	-	-	84.27	35.32	11.05	32.61	225	146	A	V
		5750.04	54.41	-13.89	68.3	40.56	35.31	11.27	32.73	225	146	P	V



802.11n HT40 CH 134 5670MHz		5428.72	56.44	-17.56	74	42.73	35.46	10.86	32.61	281	160	P	H
		5468.4	54.32	-13.98	68.3	40.51	35.49	10.92	32.6	281	160	P	H
		5451.6	45.65	-8.35	54	31.88	35.48	10.89	32.6	281	160	A	H
	*	5668	101.51	-	-	87.38	35.62	11.2	32.69	281	160	P	H
		5668	94.6	-	-	80.47	35.62	11.2	32.69	281	160	A	H
		5727.4	56.71	-11.59	68.3	42.46	35.72	11.25	32.72	281	160	P	H
		5451.92	54.55	-19.45	74	41.04	35.22	10.89	32.6	142	139	P	V
		5466	54.75	-13.55	68.3	41.19	35.24	10.92	32.6	142	139	P	V
		5459.6	45.49	-8.51	54	31.98	35.22	10.89	32.6	142	139	A	V
	*	5668	102.42	-	-	88.54	35.37	11.2	32.69	142	139	P	V
		5668	94.91	-	-	81.03	35.37	11.2	32.69	142	139	A	V
		5728.68	59.63	-8.67	68.3	45.78	35.32	11.25	32.72	142	139	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		11019.02	45.33	-28.67	74	51.09	38.94	15.84	60.54	300	0	P	H
		11019.02	45.68	-28.32	74	52.14	38.24	15.84	60.54	100	360	P	V
802.11n HT40 CH 110 5550MHz		11099.1	44.98	-29.02	74	50.6	38.98	15.92	60.52	300	0	P	H
		11099.1	44.55	-29.45	74	50.85	38.3	15.92	60.52	100	360	P	V
802.11n HT40 CH 134 5670MHz		11339.33	46.01	-27.99	74	51.21	39.11	16.16	60.47	300	0	P	H
		11339.33	44.43	-29.57	74	50.26	38.48	16.16	60.47	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5456.88	58.77	-15.23	74	45	35.48	10.89	32.6	263	160	P	H
		5468.72	58.9	-9.4	68.3	45.09	35.49	10.92	32.6	263	160	P	H
		5458.96	48.46	-5.54	54	34.69	35.48	10.89	32.6	263	160	A	H
	*	5530	96.19	-	-	82.27	35.52	11	32.6	263	160	P	H
		5530	88.3	-	-	74.38	35.52	11	32.6	263	160	A	H
		5749.4	56.07	-12.23	68.3	41.78	35.75	11.27	32.73	263	160	P	H
		5447.28	60.76	-13.24	74	47.25	35.22	10.89	32.6	221	138	P	V
		5460.72	61.42	-6.88	68.3	47.91	35.22	10.89	32.6	221	138	P	V
		5458.96	50.64	-3.36	54	37.13	35.22	10.89	32.6	221	138	A	V
	*	5536	95.86	-	-	82.14	35.3	11.02	32.6	221	138	P	V
		5536	88.79	-	-	75.07	35.3	11.02	32.6	221	138	A	V
		5736.2	55.04	-13.26	68.3	41.19	35.31	11.27	32.73	221	138	P	V
802.11ac VHT80 CH 122 5610MHz		5456.88	59.1	-14.9	74	45.33	35.48	10.89	32.6	297	163	P	H
		5468.24	62.46	-5.84	68.3	48.65	35.49	10.92	32.6	297	163	P	H
		5459.92	50.66	-3.34	54	36.89	35.48	10.89	32.6	297	163	A	H
	*	5608	100.05	-	-	85.98	35.58	11.13	32.64	297	163	P	H
		5608	93.24	-	-	79.17	35.58	11.13	32.64	297	163	A	H
		5725.4	61.39	-6.91	68.3	47.14	35.72	11.25	32.72	297	163	P	H
		5453.84	60.13	-13.87	74	46.62	35.22	10.89	32.6	235	147	P	V
		5467.76	63.71	-4.59	68.3	50.15	35.24	10.92	32.6	235	147	P	V
		5459.98	50.38	-3.62	54	36.87	35.22	10.89	32.6	235	147	A	V
	*	5608	100.14	-	-	86.28	35.37	11.13	32.64	235	147	P	V
		5608	93.2	-	-	79.34	35.37	11.13	32.64	235	147	A	V
		5729.48	58.8	-9.5	68.3	44.96	35.32	11.25	32.73	235	147	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C 5470~5725MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11059.05	45.75	-28.25	74	51.43	38.96	15.89	60.53	300	0	P	H
CH 106 5530MHz		11059.05	45.12	-28.88	74	51.48	38.28	15.89	60.53	100	360	P	V
802.11ac VHT80		11219.21	45.1	-28.9	74	50.5	39.05	16.04	60.49	300	0	P	H
CH 122 5610MHz		11219.21	45.6	-28.4	74	51.66	38.39	16.04	60.49	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - Straddle Channel

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 144 5720MHz	*	5716	104.5	-	-	90.29	35.7	11.23	32.72	300	0	P	H
		5716	97.86	-	-	83.65	35.7	11.23	32.72	300	0	A	H
	*	5716	104.35	-	-	90.5	35.34	11.23	32.72	100	0	P	V
		5716	97.36	-	-	83.51	35.34	11.23	32.72	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - Straddle Channel

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 144		11439.44	44.86	-29.14	74	49.88	39.16	16.26	60.44	300	0	P	H
5720MHz		11439.44	44.99	-29.01	74	50.62	38.55	16.26	60.44	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - Straddle Channel
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		5722	103.98	-	-	89.75	35.7	11.25	32.72	300	0	P	H
HT20		5722	97.11	-	-	82.88	35.7	11.25	32.72	300	0	A	H
CH 144		5716	104.71	-	-	90.86	35.34	11.23	32.72	100	0	P	V
5720MHz		5716	97.77	-	-	83.92	35.34	11.23	32.72	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - Straddle Channel
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		11439.44	45.21	-28.79	74	50.23	39.16	16.26	60.44	300	0	P	H
CH 144 5720MHz		11439.44	45.22	-28.78	74	50.85	38.55	16.26	60.44	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - Straddle Channel
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		5716	102.07	-	-	87.86	35.7	11.23	32.72	300	0	P	H
HT40		5716	96.11	-	-	81.9	35.7	11.23	32.72	300	0	A	H
CH 142		5710	102.69	-	-	88.84	35.34	11.23	32.72	100	0	P	V
5710MHz		5710	95.84	-	-	81.99	35.34	11.23	32.72	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - Straddle Channel
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40		11419.42	44.84	-29.16	74	49.9	39.15	16.24	60.45	300	0	P	H
CH 142 5710MHz		11419.42	44.85	-29.15	74	50.52	38.54	16.24	60.45	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



U-NII-2C - Straddle Channel
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac	*	5698	98.23	-	-	84.04	35.67	11.22	32.7	300	0	P	H
VHT80		5698	91.87	-	-	77.68	35.67	11.22	32.7	300	0	A	H
CH 138	*	5686	99.01	-	-	85.14	35.35	11.22	32.7	100	0	P	V
5690MHz		5686	92.28	-	-	78.41	35.35	11.22	32.7	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**U-NII-2C - Straddle Channel****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11379.38	45.84	-28.16	74	50.96	39.13	16.21	60.46	300	0	P	H
CH 138 5690MHz		11379.38	44.91	-29.09	74	50.65	38.51	16.21	60.46	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 LF		30	21.15	-18.85	40	27.62	25.15	0.58	32.2	-	-	P	H
		105.66	20.33	-23.17	43.5	33.54	17.31	1.67	32.19	-	-	P	H
		177.44	24.95	-18.55	43.5	38.93	15.97	2.15	32.1	100	0	P	H
		384.05	23.3	-22.7	46	31.1	21.28	3.19	32.27	-	-	P	H
		829.28	28.31	-17.69	46	29.54	26.44	4.69	32.36	-	-	P	H
		881.66	33.58	-12.42	46	34.31	26.7	4.84	32.27	-	-	P	H
		30	30.77	-9.23	40	36.89	25.5	0.58	32.2	-	-	P	V
		46.49	33	-7	40	47.84	16.53	0.83	32.2	200	0	P	V
		104.69	20.62	-22.88	43.5	33.1	18.04	1.67	32.19	-	-	P	V
		384.05	22.06	-23.94	46	28.85	22.29	3.19	32.27	-	-	P	V
		827.34	29.74	-16.26	46	30.35	27.06	4.68	32.35	-	-	P	V
		881.66	34.56	-11.44	46	34.66	27.33	4.84	32.27	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Co-location

U-NII-1 - 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 36 5180MHz		5148.16	63.08	-10.92	74	49.86	35.29	10.65	32.72	123	47	P	H
		5149.92	48.88	-5.12	54	35.66	35.29	10.65	32.72	123	47	A	H
	*	5182	101.09	-	-	87.8	35.31	10.69	32.71	123	47	P	H
		5182	93.64	-	-	80.35	35.31	10.69	32.71	123	47	A	H
		5149.76	65.77	-8.23	74	52.91	34.93	10.65	32.72	303	198	P	V
		5149.92	50.62	-3.38	54	37.76	34.93	10.65	32.72	303	198	A	V
	*	5176	104.38	-	-	91.44	34.96	10.69	32.71	303	198	P	V
		5176	96.97	-	-	84.03	34.96	10.69	32.71	303	198	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**U-NII-1 5150~5250MHz****WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		10358.36	46.41	-21.89	68.3	53.03	38.59	15.36	60.57	300	0	P	H
CH 36 5180MHz		10358.36	45.03	-23.27	68.3	52.59	37.76	15.36	60.68	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	96.97	1.391	0.719	0.75KHz
802.11n HT20	96.24	1.297	0.771	0.82KHz
802.11n HT40	93.73	0.649	1.540	1.6KHz
802.11ac VHT80	88.19	0.325	3.080	3.3KHz

802.11a

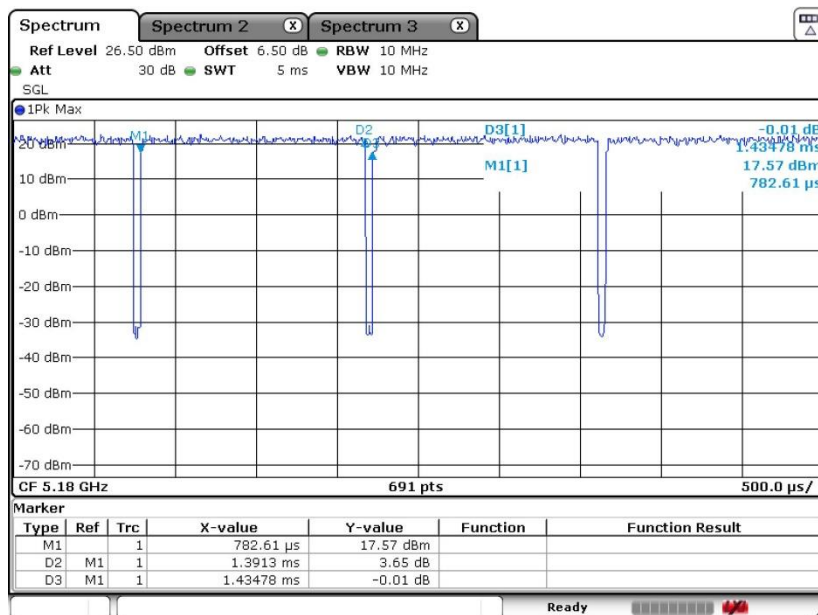




802.11n HT20

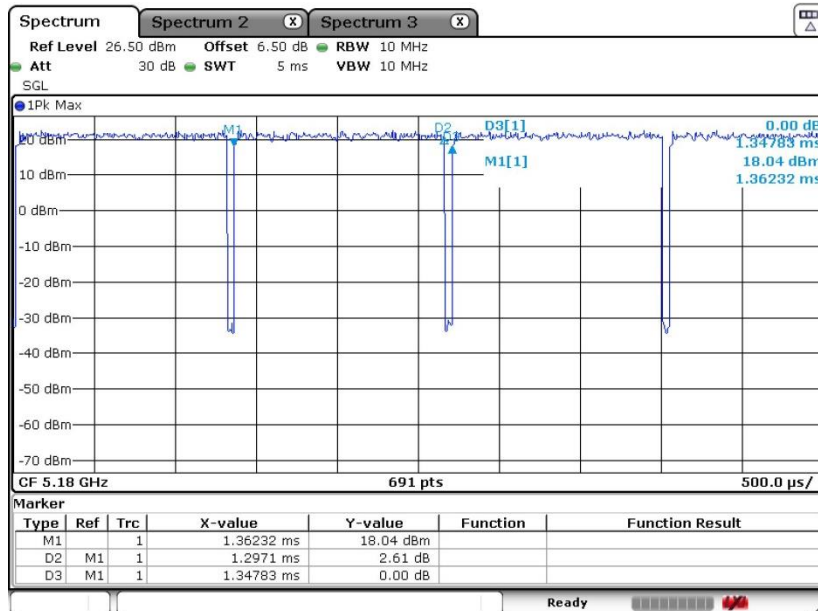

802.11n HT40

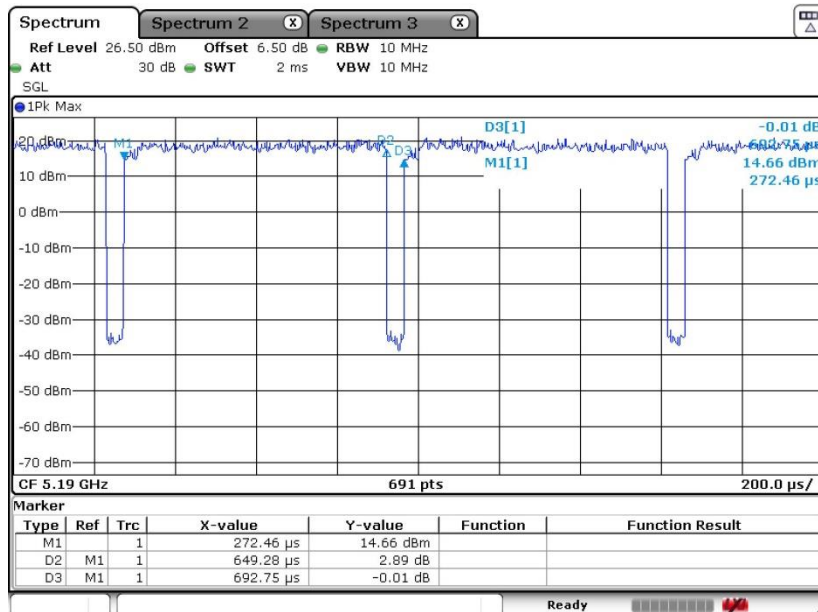

802.11ac VHT80

