

RF Test Report

For

HUNAN FN-LINK TECHNOLOGY LIMITED

Test Standards: Part 15C Subpart C §15.247

Product Name: WIFI+BT Module

Tested Model: K255B-SR

Brand Name: **FN-LINK**

FCC ID: 2AATL-K255B-SR

Classification Digital Spread Spectrum (DSS)

Report No.: EC2105014RF03

Tested Date: 2021-05-25 to 2021-07-14

Issued Date: 2021-07-14

Prepared By:

Jack Liu

Jack Liu / Engineer

Approved By:

Tiny Yang

Tiny Yang / RF Manager

Hunan Ecloud Testing Technology Co., Ltd.

Building A1, Changsha E Center, No. 18 Xiangtai Avenue, Liuyang Economic and
Technological Development Zone, Hunan, P.R.C

Tel.: +86-731-89634887 Fax.: +86-731-89634887

www.hn-ecloud.com

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Hunan Ecloud Testing Technology Co., Ltd., the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	2021.07.14	Valid	Original Report

TABLE OF CONTENTS

1	TEST LABORATORY	5
1.1	Test facility	5
2	GENERAL DESCRIPTION.....	6
2.1	Applicant	6
2.2	Manufacturer	6
2.3	General Description Of EUT	6
2.4	Modification of EUT	7
2.5	Applicable Standards	7
3	TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
3.1	Descriptions of Test Mode	8
3.2	Test Mode	8
3.3	Support Equipment	10
3.4	Test Setup	10
3.5	Measurement Results Explanation Example	13
4	TEST RESULT	14
4.1	20dB and 99% Bandwidth Measurement	14
4.2	Peak Output Power Measurement	15
4.3	Carrier Frequency Separation Measurement	16
4.4	Time of Occupancy Measurement.....	17
4.5	Number of Hopping Channels Measurement	18
4.6	Conducted Band Edges Measurement.....	19
4.7	Conducted Spurious Emission Measurement	20
4.8	Radiated Band Edges and Spurious Emission Measurement	21
4.9	AC Conducted Emission Measurement.....	45
4.10	Antenna Requirements	48
5	LIST OF MEASURING EQUIPMENT.....	49
6	UNCERTAINTY OF EVALUATION.....	51
	Appendix A: 20dB Emission Bandwidth	52
	Appendix B: Occupied Channel Bandwidth	58
	Appendix C: Maximum conducted output power	64
	Appendix D: Carrier frequency separation	70
	Appendix E: Time of occupancy	73
	Appendix F: Number of hopping channels	83
	Appendix G: Band edge measurements	86
	Appendix H: Conducted Spurious Emission	93
	Appendix I. Setup Photographs	108

Summary of Test Result

FCC Rule	Description	Limit	Result	Remark
15.247(a)(1)	20dB Bandwidth	NA	Pass	-
-	99% Bandwidth	-	Pass	-
15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
15.247(a)(1)	Number of Channels	≥ 15 Chs	Pass	-
15.247(a)(1)	Average Time of Occupancy	≤ 0.4 sec in 31.6sec period	Pass	-
15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
15.247(d)	Conducted Band Edges	≤ 20 dBc	Pass	-
15.247(d)	Conducted Spurious Emission	≤ 20 dBc	Pass	-
15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.13 dB at 9608 MHz
15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.51 dB at 0.549 MHz
15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

1 Test Laboratory

1.1 Test facility

CNAS (accreditation number:L11138)

Hunan Ecloud Testing Technology Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number:CN1244 , Test Firm Registration

Number:793308)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

ISED(CAB identifier: CN0012, ISED# :24347)

Hunan Ecloud Testing Technology Co., Ltd. has been listed on the Wireless Device Testing Laboratories list of innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

A2LA (Certificate Number:4895.01)

Hunan Ecloud Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

2 General Description

2.1 Applicant

HUNAN FN-LINK TECHNOLOGY LIMITED

No. 8 , Litong Road , Liuyang Economic Development Zone , Liuyang City, Hunan Province, China

2.2 Manufacturer

HUNAN FN-LINK TECHNOLOGY LIMITED

No. 8 , Litong Road , Liuyang Economic Development Zone , Liuyang City, Hunan Province, China

2.3 General Description Of EUT

Product	WIFI+BT Module
Model No.	K255B-SR
Additional No.	N/A
Difference Description	N/A
FCC ID	2AATL-K255B-SR
Power Supply	3.3Vdc for EUT
Modulation Technology	FHSS
Modulation Type	GFSK, 8DPSK, $\pi/4$ DQPSK
Operating Frequency	2402MHz~2480MHz
Number Of Channel	79
Max. Output Power	Bluetooth BR(1Mbps) : 4.18 dBm (0.0026W) Bluetooth BR(2Mbps) : 5.57 dBm (0.0036W) Bluetooth BR(3Mbps) : 6.4 dBm (0.0044W)
Antenna Type	FPC Antenna with 2dBi gain
HW Version	V5.0
SW Version	V5.0
I/O Ports	Refer to user's manual
Cable Supplied	N/A

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

2.4 Modification of EUT

No modifications are made to the EUT during all test items.

2.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013
- ♦ KDB 558074 D01 15.247 Meas Guidance v05r02

Remark:

1. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

3 Test Configuration of Equipment Under Test

3.1 Descriptions of Test Mode

The transmitter has a maximum peak conducted output power as follows:

Mode	Channel	Frequency	Bluetooth RF Output Power
GFSK	Ch00	2402MHz	2.65
	Ch39	2441MHz	3.67
	Ch78	2480MHz	4.18
4 π -DQPSK	Ch00	2402MHz	4.05
	Ch39	2441MHz	5.27
	Ch78	2480MHz	5.57
8DPSK	Ch00	2402MHz	4.87
	Ch39	2441MHz	5.91
	Ch78	2480MHz	6.4

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.

3.2 Test Mode

3.2.1 Antenna Port Conducted Measurement

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz

3.2.2 Radiated Emission Test (Below 1GHz)

Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK
	Mode 1: CH00_2402MHz

Note : 1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type. Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

2. Following channel(s) was (were) selected for the final test as listed above

3.2.3 Radiated Emission Test (Above 1GHz)

Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK
	Mode 1: CH00_2402 MHz
	Mode 2: CH39_2441 MHz
	Mode 3: CH78_2480 MHz

Note : 1. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

2. Following channel(s) was (were) selected for the final test as listed above

3. For frequency above 18GHz, the measured value is much lower than the limit, therefore, it is not reflected in the report.

3.2.4 Power Line Conducted Emission Test:

AC Conducted Emission	Mode 1 : BT Linking+ RJ45 Ping + Adapter
-----------------------------	--


3.3 Support Equipment

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	NETGARE	R7800	PY315100319	N/A	unshielded AC I/P cable1.2 m
2.	Notebook	Lenovo	E470C	FCC sDoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable1.2 m
3.	Adapter	SWITHCHING	FJ-SW0502000U	FCC sDoC	N/A	N/A
4.	WiFi ANT/FPC /L=55mm x2	GMTC	IP15A3	N/A	N/A	N/A
5.	Logitech	Wired Mouse	M-U0026	FCC sDoC	N/A	N/A

3.4 Test Setup

The EUT is continuously communicating to the Bluetooth tester during the tests.

EUT was set in the Hidden menu mode to enable BT communications.

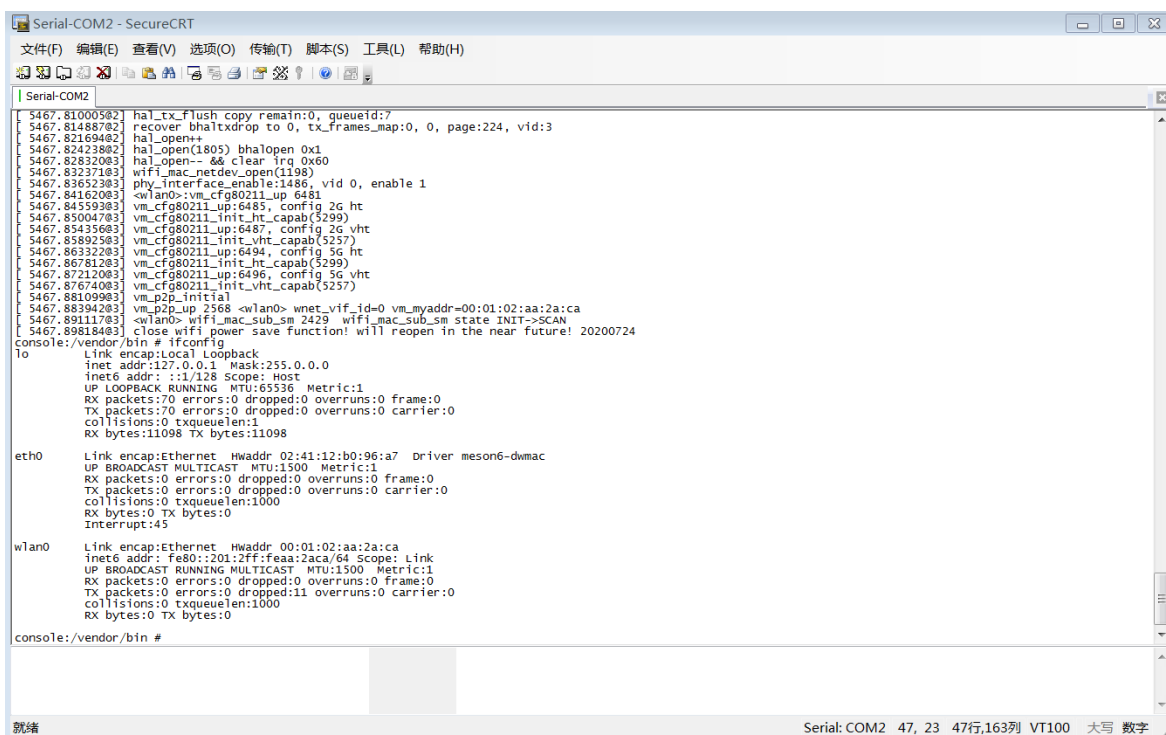

```

Serial-COM2 - SecureCRT
文件(F) 编辑(E) 查看(V) 选项(O) 传输(T) 脚本(S) 工具(L) 帮助(H)


Serial-COM2
[ 5467.81000582] hal_tx_flush copy remain:0, queueid:7
[ 5467.81488782] recover bhaltxdrop to 0, tx_frames_map:0, 0, page:224, vid:3
[ 5467.82169482] hal_open++
[ 5467.82423882] hal_open(1805) bhalopen 0x1
[ 5467.82832083] hal_open-- && clear irq 0x60
[ 5467.83237183] wifi_mac_netdev_open(1198)
[ 5467.83652383] phy_interface_enable:1486, vid 0, enable 1
[ 5467.84162083] <wlan0> vm_cfg80211_up:6481
[ 5467.84559383] vm_cfg80211_up:6485, config 2G ht
[ 5467.85004783] vm_cfg80211_init_ht_capab(5299)
[ 5467.85435683] vm_cfg80211_up:6487, config 2G vht
[ 5467.85892583] vm_cfg80211_init_vht_capab(5257)
[ 5467.86332283] vm_cfg80211_up:6494, config 5G ht
[ 5467.86781283] vm_cfg80211_init_ht_capab(5299)
[ 5467.87212083] vm_cfg80211_up:6496, config 5G vht
[ 5467.87674083] vm_cfg80211_init_vht_capab(5257)
[ 5467.88109983] vm_p2p_initail
[ 5467.88394283] vm_p2p_up:2588 <wlan0> wnet_vif_id=0 vm_myaddr=00:01:02:aa:2a:ca
[ 5467.89111783] <wlan0> wifi_mac_sub_sm 2429 wifi_mac_sub_sm state INIT->SCAN
[ 5467.89818483] close wifi power save function! will reopen in the near future! 20200724
console:/vendor/bin # ifconfig
to
Link encap:Local Loopback
inet addr:127.0.0.1 Mask:255.0.0.0
inet6 addr: ::1/128 Scope: Host
UP LOOPBACK RUNNING MTU:65536 Metric:1
RX packets:70 errors:0 dropped:0 overruns:0 frame:0
TX packets:70 errors:0 dropped:0 overruns:0 carrier:0
collisions:0 txqueuelen:1
RX bytes:11098 TX bytes:11098

eth0
Link encap:Ethernet Hwaddr 02:41:12:b0:96:a7 Driver meson6-dwmac
UP BROADCAST MULTICAST MTU:1500 Metric:1
RX packets:0 errors:0 dropped:0 overruns:0 frame:0
TX packets:0 errors:0 dropped:0 overruns:0 carrier:0
collisions:0 txqueuelen:1000
RX bytes:0 TX bytes:0
Interrupt:45


wlan0
Link encap:Ethernet Hwaddr 00:01:02:aa:2a:ca
inet6 addr: fe80::201:2ff:feaa:2aca/64 Scope: Link
UP BROADCAST RUNNING MULTICAST MTU:1500 Metric:1
RX packets:0 errors:0 dropped:0 overruns:0 frame:0
TX packets:0 errors:0 dropped:11 overruns:0 carrier:0
collisions:0 txqueuelen:1000
RX bytes:0 TX bytes:0

console:/vendor/bin #
  
```


Setup diagram for Conducted Test

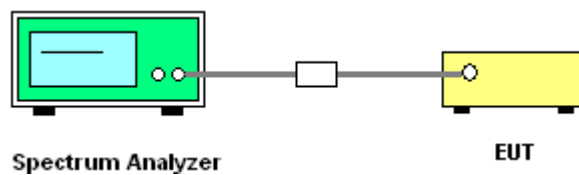


Setup diagram for Radiation(9KHz~30MHz) Test

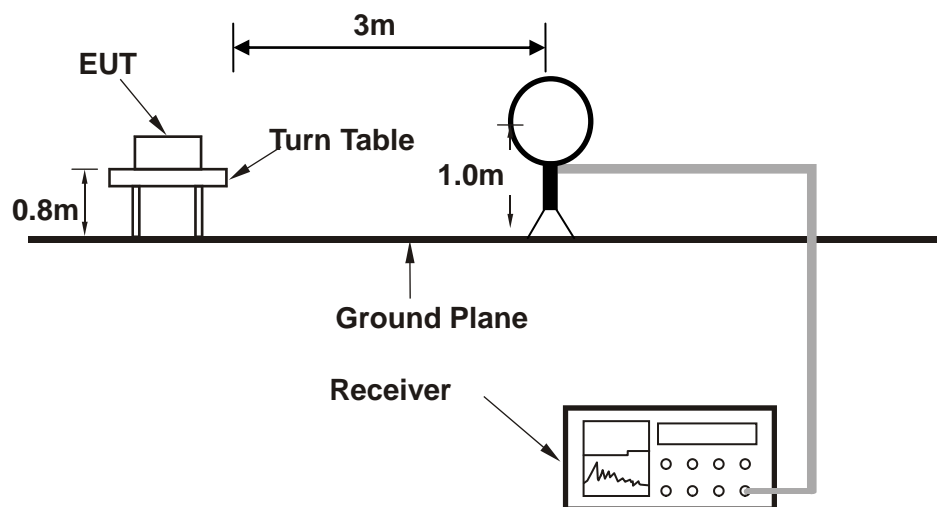


Setup diagram for Radiation(Below 1G) Test

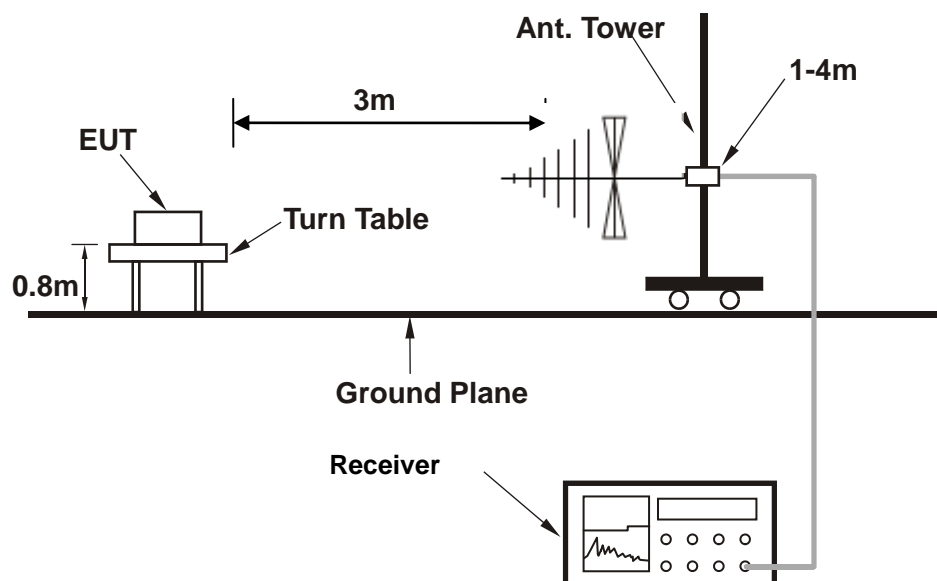

Setup diagram for Radiation (Above1G) Test

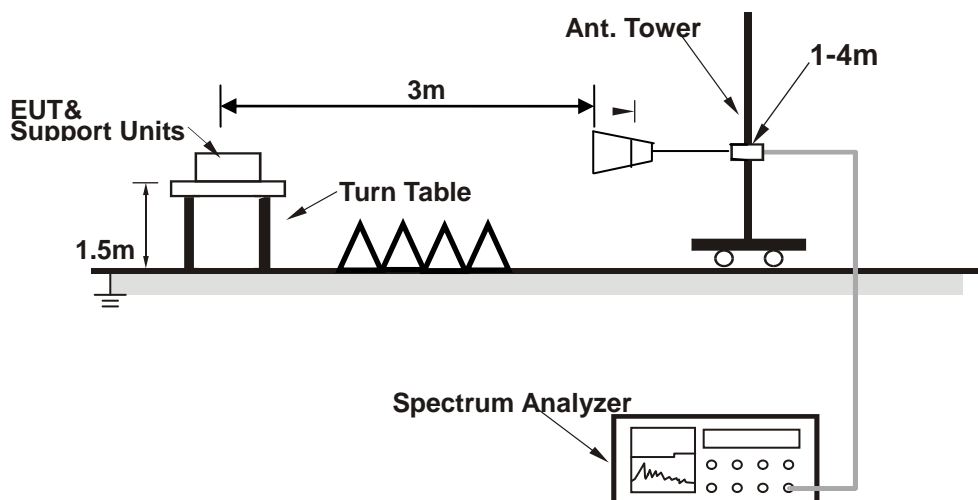

Setup diagram for AC Conducted Emission Test

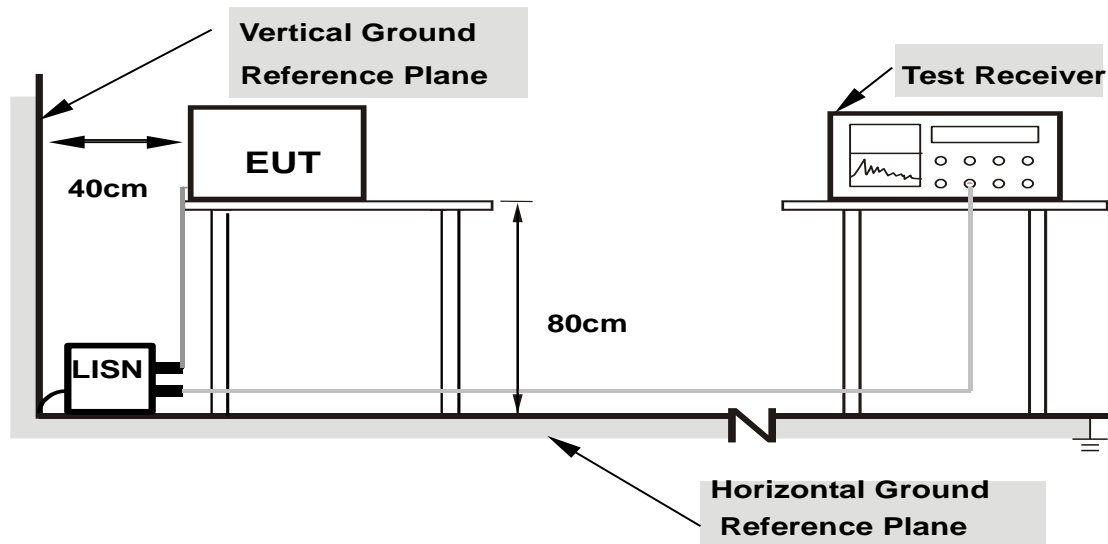

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5 + 10 = 15 \text{ (dB)}\end{aligned}$$

For all radiated test items:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Over Limit (dB μ V/m) = Level(dB μ V/m) - Limit Level (dB μ V/m)

4 Test Result

4.1 20dB and 99% Bandwidth Measurement

4.1.1 Limit of 20dB and 99% Bandwidth

None; for reporting purposes only.

4.1.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
4. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW \geq 1% of the 99% bandwidth; VBW \geq RBW; Sweep = auto; Detector function = sample;
Trace = max hold.

4.1.3 Test Result of 20dB Bandwidth

Refer to Appendix A of this test report.

4.1.4 Test Result of 99% Bandwidth

Refer to Appendix B of this test report.

4.2 Peak Output Power Measurement

4.2.1 Limit of Peak Output Power

Section 15.247 (b)

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

- (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

4.2.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

4.2.3 Test Result of Peak Output Power

Refer to Appendix C of this test report.

4.3 Carrier Frequency Separation Measurement

4.3.1 Limit of Hopping Channel Separation

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

4.3.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

4.3.3 Test Result of Hopping Channel Separation

Refer to Appendix D of this test report.

4.4 Time of Occupancy Measurement

4.4.1 Limit of Average Time of Occupancy

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.
4. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2441MHz as below:

DH1 time slot = Burst Width (ms) * (1600 / (2 * 79)) * 31.6

DH3 time slot = Burst Width (ms) * (1600 / (4 * 79)) * 31.6

DH5 time slot = Burst Width (ms) * (1600 / (6 * 79)) * 31.6

4.4.3 Test Result of Dwell Time

Refer to Appendix E of this test report.

4.5 Number of Hopping Channels Measurement

4.5.1 Limits of Number of Hopping Channels

FCC § 15.247(a)(1)(iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

4.5.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to 100KHz. The analyzer is set to Max Hold.

4.5.3 Test Result of Number of Hopping Channels

Refer to Appendix F of this test report.

4.6 Conducted Band Edges Measurement

4.6.1 Limit of Band Edges

FCC §15.247(d)

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

4.6.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 1~3.

4.6.3 Test Result of Conducted Band Edges

Refer to Appendix G of this test report.

4.7 Conducted Spurious Emission Measurement

4.7.1 Limit of Spurious Emission Measurement

FCC §15.247(d)

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

4.7.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

4.7.3 Test Result of Conducted Spurious Emission

Refer to Appendix H of this test report.

4.8 Radiated Band Edges and Spurious Emission Measurement

4.8.1 Limit of Radiated Band Edges and Spurious Emission

FCC §15.247 (d)

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The frequency range from 9KHz to 10th harmonic (25GHz) are checked, and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.8.2 Test Procedures

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW=3RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement:
VBW = 10 Hz, when duty cycle is no less than 98 percent.
VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

5. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP.
6. Convert the resultant EIRP to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log d + 104.8$$

Where:


E is the electric field strength in dBμV/m

EIRP is the equivalent isotropically radiated power in dBm

d is the specified measurement distance in m

$$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2, \text{ for } d = 3 \text{ m.}$$

7. Compare the resultant electric field strength level with the applicable regulatory limit.

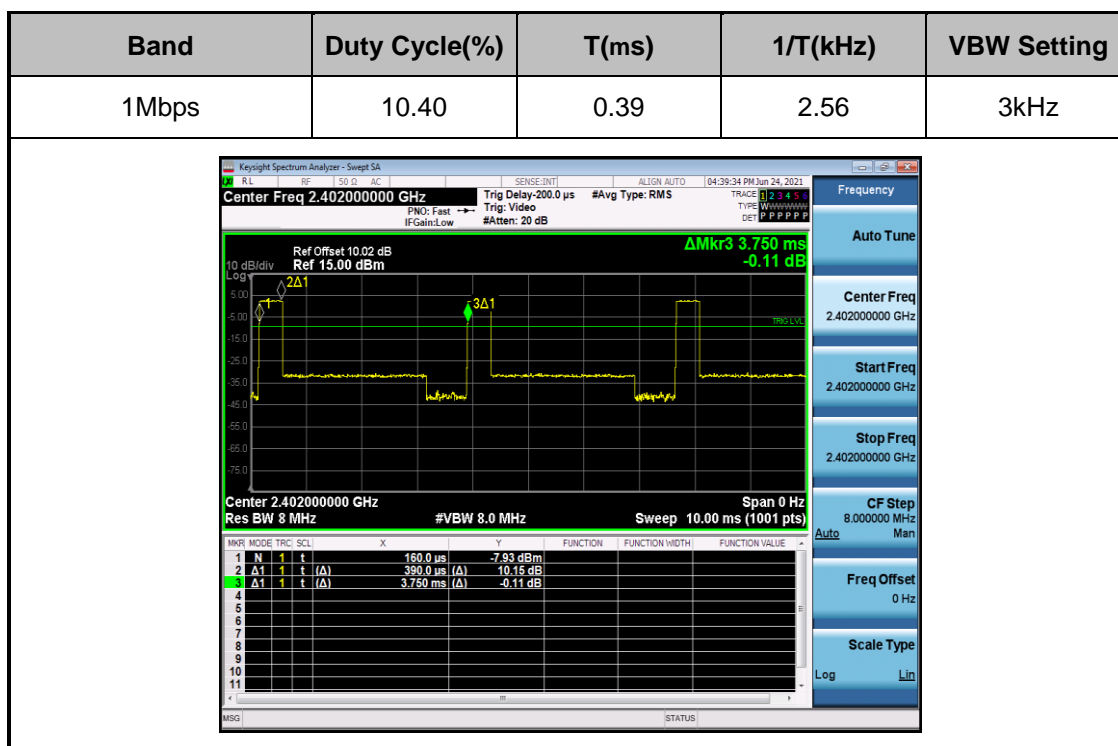


4.8.3 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

4.8.4 Test Result of Radiated Spurious at Band Edges

Test Mode :	Bluetooth (3Mbps) CH00 (2402MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.3GHz~2.405GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH00(2402MHz)	Power rating	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

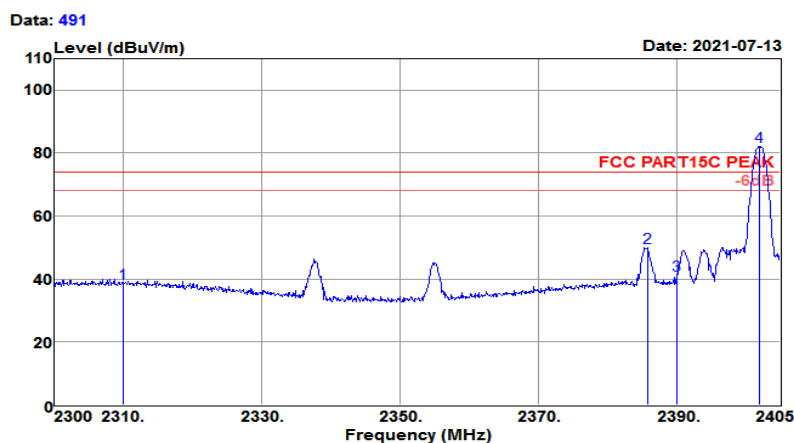

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	42.84	27.38	4.08	35.68	38.62	74.00	-35.38	Peak
2385.785	54.06	27.55	4.16	35.86	49.91	74.00	-24.09	Peak
2390.000	45.54	27.56	4.16	35.88	41.38	74.00	-32.62	Peak
2401.955	86.23	27.58	4.17	35.90	82.08	74.00	8.08	Peak

Test Mode :	Bluetooth (3Mbps) CH00 (2402MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.3GHz~2.405GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 23℃/62%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : BT CH00(2402MHz)
 Power rating: 120VAC
 EUT : WIFI+BT Module
 Model No. : K255B-SR

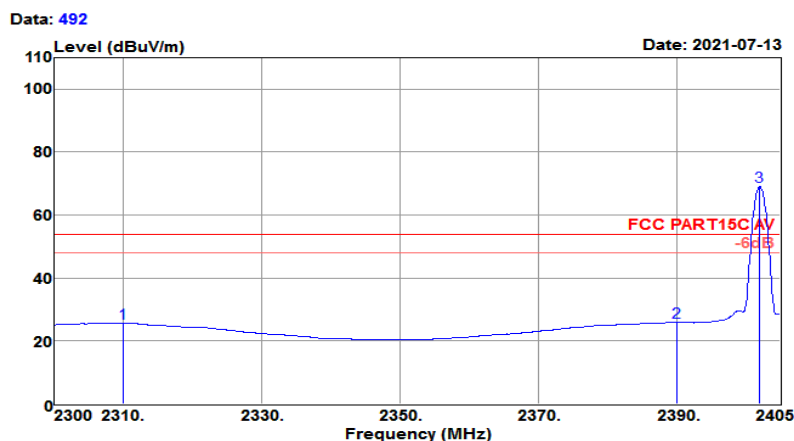


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	29.88	27.38	4.08	35.68	25.66	54.00	-28.34	Average
2390.000	30.07	27.56	4.16	35.88	25.91	54.00	-28.09	Average
2402.060	73.45	27.58	4.17	35.91	69.29	54.00	15.29	Average

Test Mode :	Bluetooth (3Mbps) CH00 (2402MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.3GHz~2.405GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH00(2402MHz)	Power rating:	: 120Wac
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

Data: 488

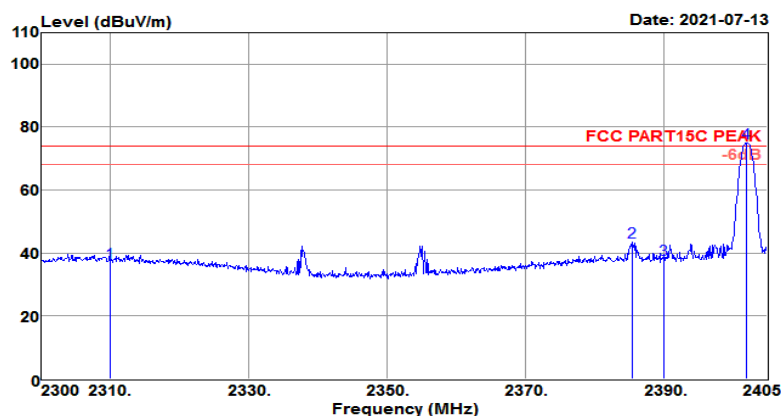


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	41.23	27.38	4.08	35.68	37.01	74.00	-36.99	Peak
2385.575	47.62	27.55	4.16	35.86	43.47	74.00	-30.53	Peak
2390.000	42.04	27.56	4.16	35.88	37.88	74.00	-36.12	Peak
2402.060	79.20	27.58	4.17	35.91	75.04	74.00	1.04	Peak

Test Mode :	Bluetooth (3Mbps) CH00 (2402MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.3GHz~2.405GHz	Polarization :	Vertical

Test Site : 3m Chamber
 Temp/Humi : 23℃/62%
 Tested by : Jack
 Pol/Phase : VERTICAL
 Test Mode : BT CH00(2402MHz)
 Power rating: 120VAc
 EUT : WIFI+BT Module
 Model No. : K255B-SR

Data: 489

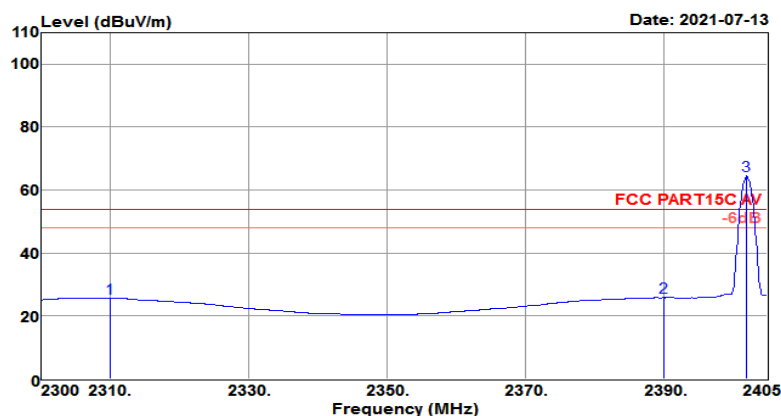


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2309.975	29.86	27.38	4.08	35.67	25.65	54.00	-28.35	Average
2390.000	29.97	27.56	4.16	35.88	25.81	54.00	-28.19	Average
2402.060	68.61	27.58	4.17	35.91	64.45	54.00	10.45	Average

Test Mode :	Bluetooth (3Mbps) CH78 (2480MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.477GHz~2.51GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH78(2480MHz)	Power rating	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		


Data: 499

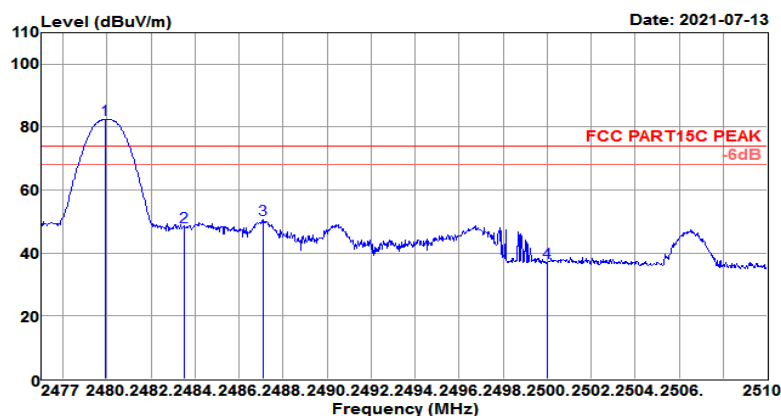

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.937	86.57	27.76	4.19	36.10	82.42	74.00	8.42	Peak
2483.500	52.38	27.76	4.19	36.11	48.22	74.00	-25.78	Peak
2487.098	54.75	27.77	4.19	36.12	50.59	74.00	-23.41	Peak
2500.000	41.04	27.80	4.19	36.15	36.88	74.00	-37.12	Peak

Test Mode :	Bluetooth (3Mbps) CH78 (2480MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.477GHz~2.51GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH78(2480MHz)	Power rating	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

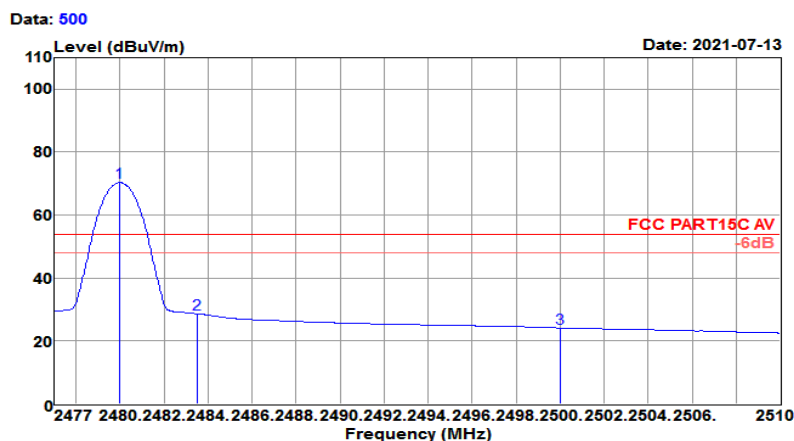


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.003	74.50	27.76	4.19	36.10	70.35	54.00	16.35	Average
2483.500	32.83	27.76	4.19	36.11	28.67	54.00	-25.33	Average
2500.000	28.31	27.80	4.19	36.15	24.15	54.00	-29.85	Average

Test Mode :	Bluetooth (3Mbps) CH78 (2480MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.477GHz~2.51GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH78(2480MHz)	Power rating	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

Data: 496

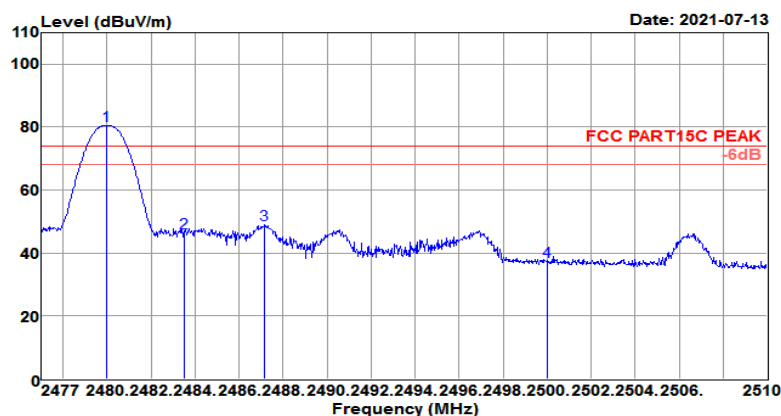


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2479.970	84.62	27.76	4.19	36.10	80.47	74.00	6.47	Peak
2483.500	50.54	27.76	4.19	36.11	46.38	74.00	-27.62	Peak
2487.164	53.08	27.77	4.19	36.12	48.92	74.00	-25.08	Peak
2500.000	41.46	27.80	4.19	36.15	37.30	74.00	-36.70	Peak

Test Mode :	Bluetooth (3Mbps) CH78 (2480MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	2.477GHz~2.51GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH78(2480MHz)	Power rating:	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

Data: 497

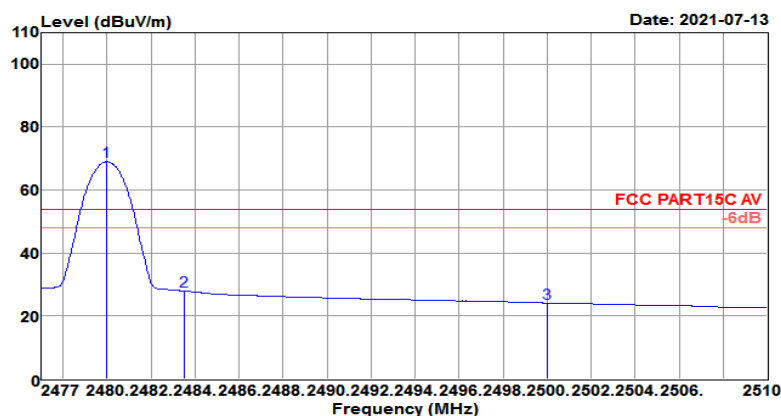


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.003	73.16	27.76	4.19	36.10	69.01	54.00	15.01	Average
2483.500	32.11	27.76	4.19	36.11	27.95	54.00	-26.05	Average
2500.000	28.33	27.80	4.19	36.15	24.17	54.00	-29.83	Average

4.8.1 Test Result of Radiated Spurious Emission (1GHz ~ 10th Harmonic)


Test Mode :	Bluetooth (3Mbps) CH00 (2402MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH00(2402MHz)	Power rating	: 120VAC
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

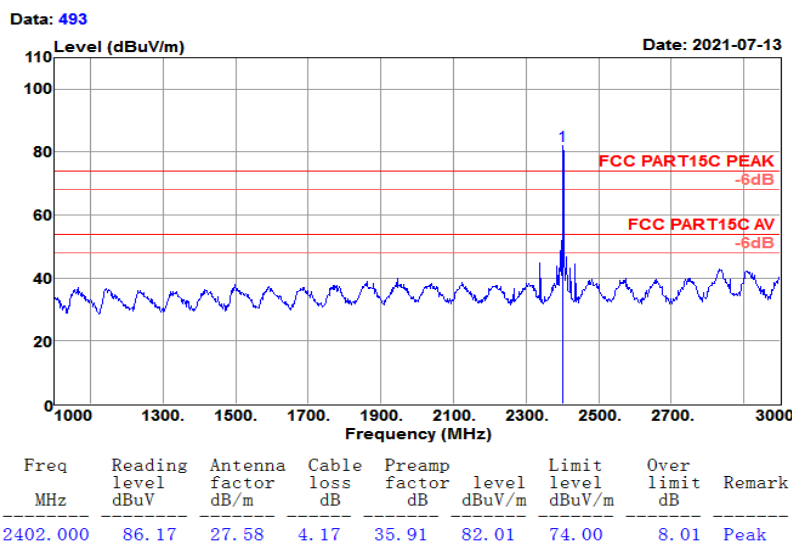

Test Mode :	Bluetooth (3Mbps)CH00 (2402MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 24℃/62%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : BT CH00(2402MHz)
 Power rating: DC 5V
 EUT : WIFI+BT Module
 Model No. : K255B-SR

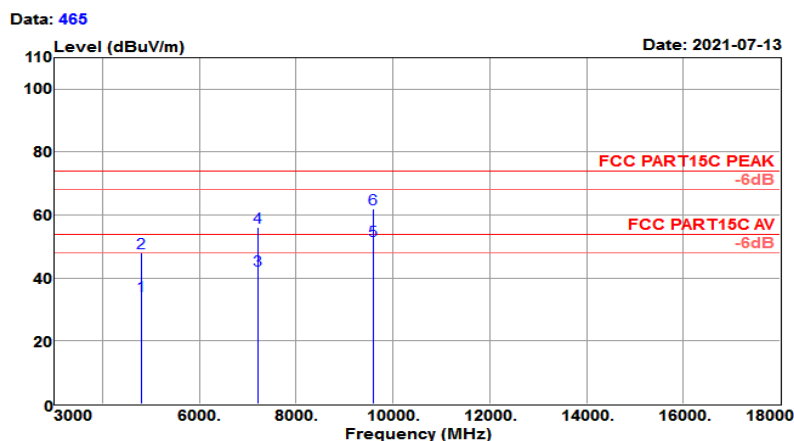


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	31.25	30.93	6.44	34.12	34.50	54.00	-19.50	Average
4804.000	44.68	30.93	6.44	34.12	47.93	74.00	-26.07	Peak
7206.000	32.77	35.39	8.61	34.39	42.38	54.00	-11.62	Average
7206.000	46.48	35.39	8.61	34.39	56.09	74.00	-17.91	Peak
9608.000	35.93	38.39	11.69	34.14	51.87	54.00	-2.13	Average
9608.000	46.06	38.39	11.69	34.14	62.00	74.00	-12.00	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	Bluetooth (3Mbps) CH00 (2402MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	1GHz~3GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH00(2402MHz)	Power rating:	: 120Wac
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

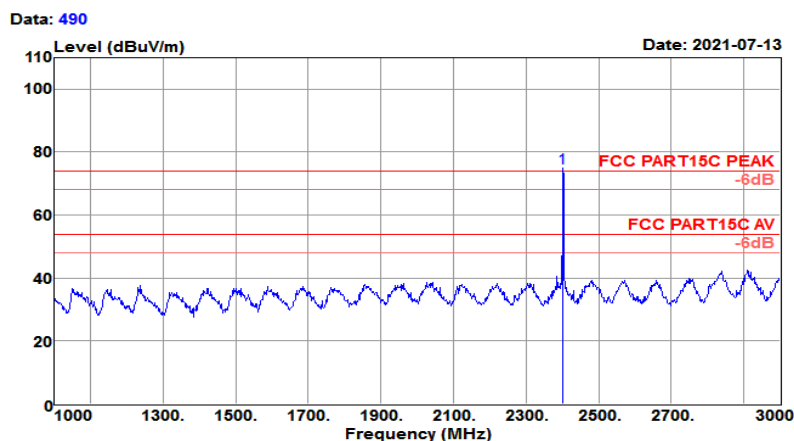


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2402.000	79.08	27.58	4.17	35.91	74.92	74.00	0.92	Peak

Test Mode :	Bluetooth (3Mbps) CH00 (2402MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH00(2402MHz)	Power rating:	DC 5V
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

Data: 467

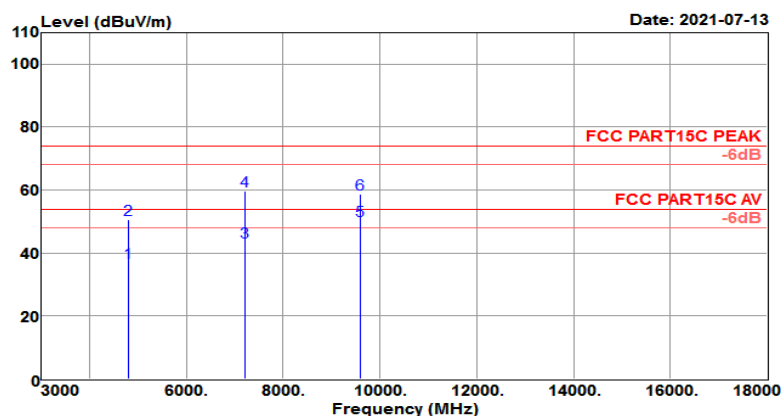


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	33.78	30.93	6.44	34.12	37.03	54.00	-16.97	Average
4804.000	47.35	30.93	6.44	34.12	50.60	74.00	-23.40	Peak
7206.000	33.98	35.39	8.61	34.39	43.59	54.00	-10.41	Average
7206.000	50.20	35.39	8.61	34.39	59.81	74.00	-14.19	Peak
9608.000	34.41	38.39	11.69	34.14	50.35	54.00	-3.65	Average
9608.000	42.82	38.39	11.69	34.14	58.76	74.00	-15.24	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	Bluetooth (3Mbps) CH39 (2441MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH39(2441MHz)	Power rating:	120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

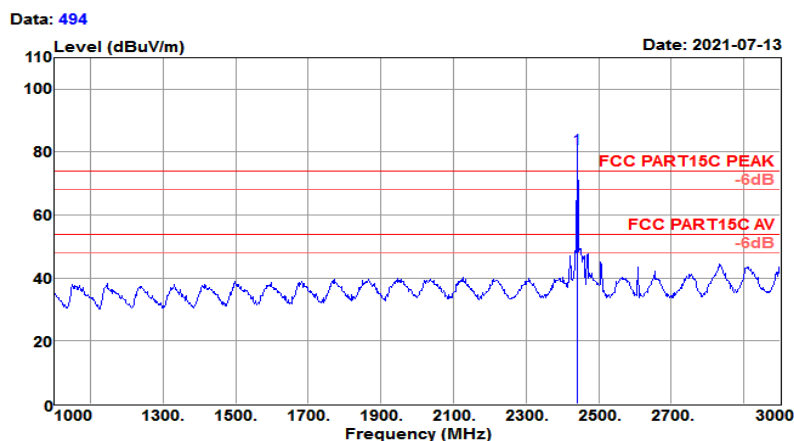

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2441.000	85.35	27.67	4.18	36.00	81.20	74.00	7.20	Peak

Test Mode :	Bluetooth (3Mbps) CH39 (2441MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH39(2441MHz)	Power rating	: DC 5V
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

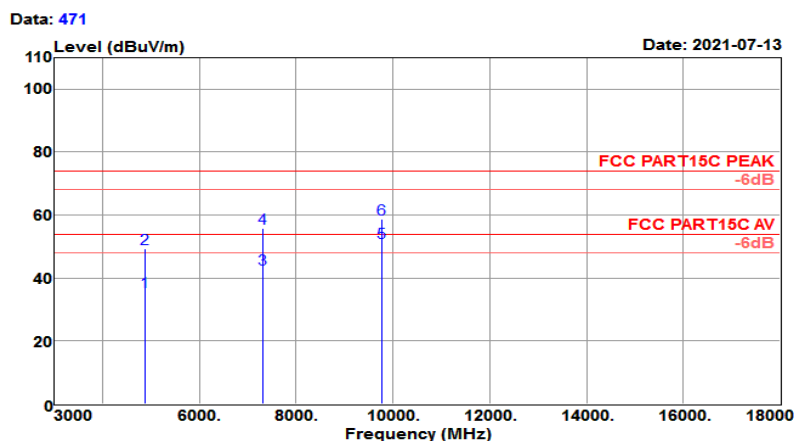


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4882.000	31.64	31.03	7.03	34.03	35.67	54.00	-18.33	Average
4882.000	45.27	31.03	7.03	34.03	49.30	74.00	-24.70	Peak
7323.000	32.72	35.68	8.98	34.49	42.89	54.00	-11.11	Average
7323.000	45.73	35.68	8.98	34.49	55.90	74.00	-18.10	Peak
9764.000	35.70	38.51	11.15	34.21	51.15	54.00	-2.85	Average
9764.000	43.15	38.51	11.15	34.21	58.60	74.00	-15.40	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	Bluetooth (3Mbps) CH39 (2441MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH39(2441MHz)	Power rating:	120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

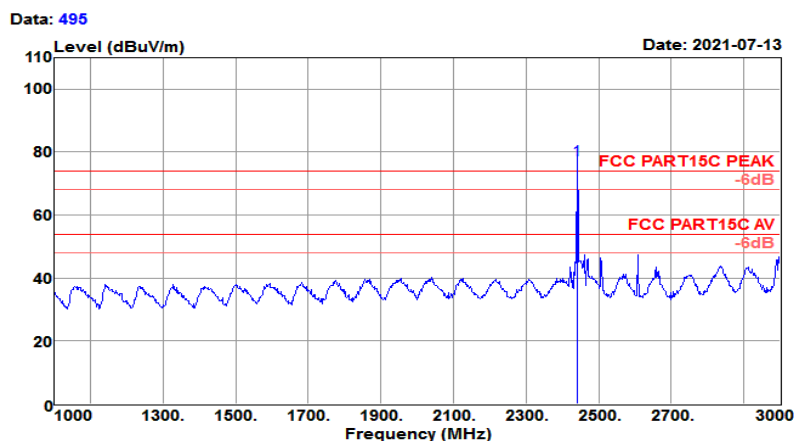

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2441.000	81.65	27.67	4.18	36.00	77.50	74.00	3.50	Peak

Test Mode :	Bluetooth (3Mbps) CH39 (2441MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH39(2441MHz)	Power rating	: DC 5V
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

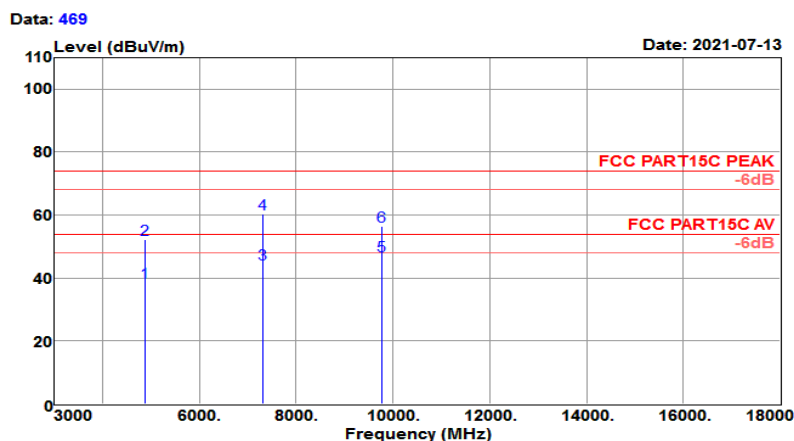


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4882.000	34.47	31.03	7.03	34.03	38.50	54.00	-15.50	Average
4882.000	48.36	31.03	7.03	34.03	52.39	74.00	-21.61	Peak
7323.000	34.28	35.68	8.98	34.49	44.45	54.00	-9.55	Average
7323.000	50.24	35.68	8.98	34.49	60.41	74.00	-13.59	Peak
9764.000	31.49	38.51	11.15	34.21	46.94	54.00	-7.06	Average
9764.000	41.03	38.51	11.15	34.21	56.48	74.00	-17.52	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	Bluetooth (3Mbps) CH78 (2480MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	1GHz~3GHz	Polarization :	Horizontal


Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH78(2480MHz)	Power rating:	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

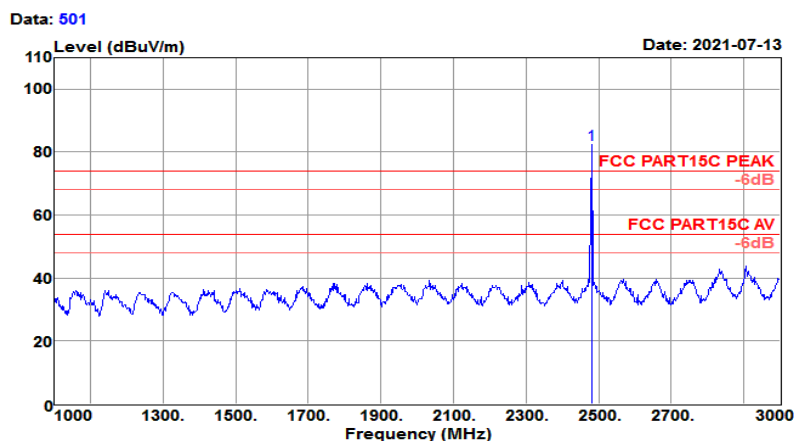

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.000	86.54	27.76	4.19	36.10	82.39	74.00	8.39	Peak

Test Mode :	Bluetooth (3Mbps) CH78 (2480MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	3GHz~18GHz	Polarization :	Horizontal

Test Site : 3m Chamber
 Temp/Humi : 24℃/62%
 Tested by : Jack
 Pol/Phase : HORIZONTAL
 Test Mode : BT CH78(2480MHz)
 Power rating: DC 5V
 EUT : WIFI+BT Module
 Model No. : K255B-SR

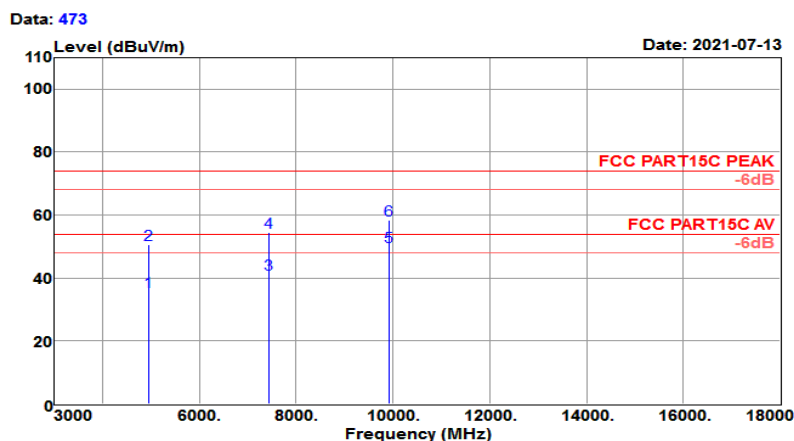


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	30.99	31.14	7.62	33.94	35.81	54.00	-18.19	Average
4960.000	45.93	31.14	7.62	33.94	50.75	74.00	-23.25	Peak
7440.000	30.96	35.96	9.03	34.60	41.35	54.00	-12.65	Average
7440.000	44.18	35.96	9.03	34.60	54.57	74.00	-19.43	Peak
9920.000	33.53	38.64	12.18	34.27	50.08	54.00	-3.92	Average
9920.000	41.91	38.64	12.18	34.27	58.46	74.00	-15.54	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Test Mode :	Bluetooth (3Mbps) CH78 (2480MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	1GHz~3GHz	Polarization :	Vertical


Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH78(2480MHz)	Power rating:	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

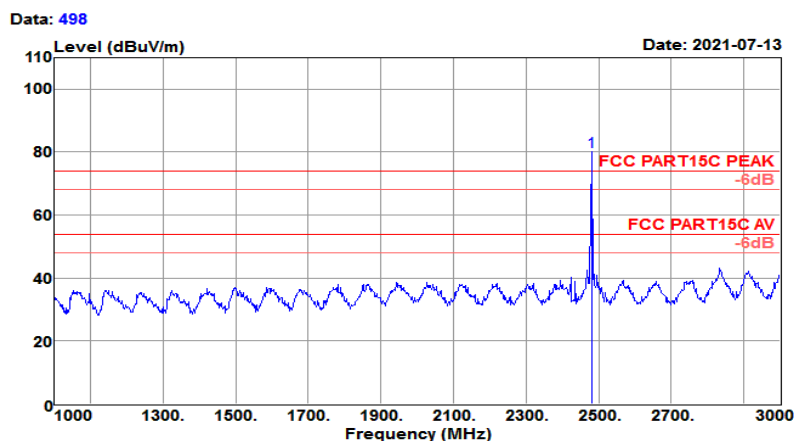

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2480.000	84.42	27.76	4.19	36.10	80.27	74.00	6.27	Peak

Test Mode :	Bluetooth (3Mbps) CH78 (2480MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	3GHz~18GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 24℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH78(2480MHz)	Power rating	: DC 5V
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

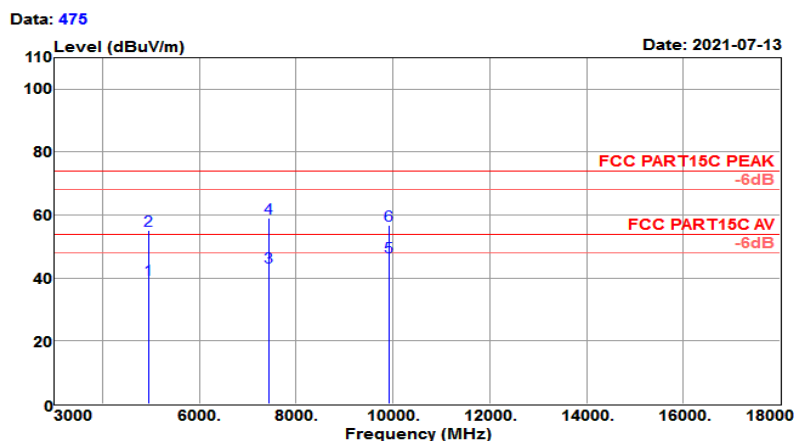


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	34.85	31.14	7.62	33.94	39.67	54.00	-14.33	Average
4960.000	50.44	31.14	7.62	33.94	55.26	74.00	-18.74	Peak
7440.000	33.00	35.96	9.03	34.60	43.39	54.00	-10.61	Average
7440.000	48.78	35.96	9.03	34.60	59.17	74.00	-14.83	Peak
9920.000	30.06	38.64	12.18	34.27	46.61	54.00	-7.39	Average
9920.000	40.37	38.64	12.18	34.27	56.92	74.00	-17.08	Peak

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

4.8.2 Test Result of Radiated Spurious Emission (30MHz ~ 1GHz)


Test Mode :	Bluetooth (3Mbps) CH00 (2402MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	30MHz~1GHz	Polarization :	Horizontal

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: HORIZONTAL
Test Mode	: BT CH00(2402MHz)	Power rating	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

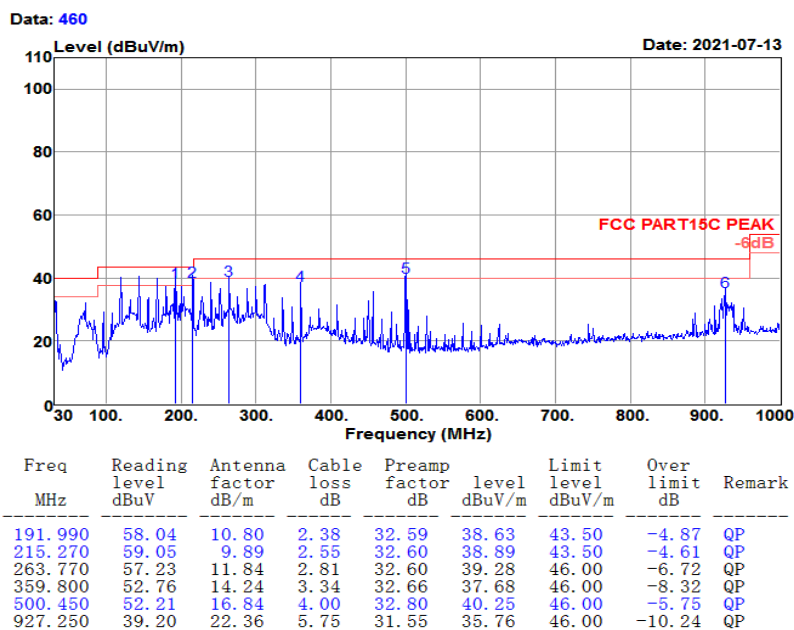

Test Mode :	Bluetooth (3Mbps) CH00 (2402MHz)	Temperature :	21~24℃
Test Engineer :	Jack Liu	Relative Humidity :	60~63%
Frequency Range	30MHz~1GHz	Polarization :	Vertical

Test Site	: 3m Chamber	Temp/Humi	: 23℃/62%
Tested by	: Jack	Pol/Phase	: VERTICAL
Test Mode	: BT CH00(2402MHz)	Power rating	: 120VAc
EUT	: WIFI+BT Module		
Model No.	: K255B-SR		

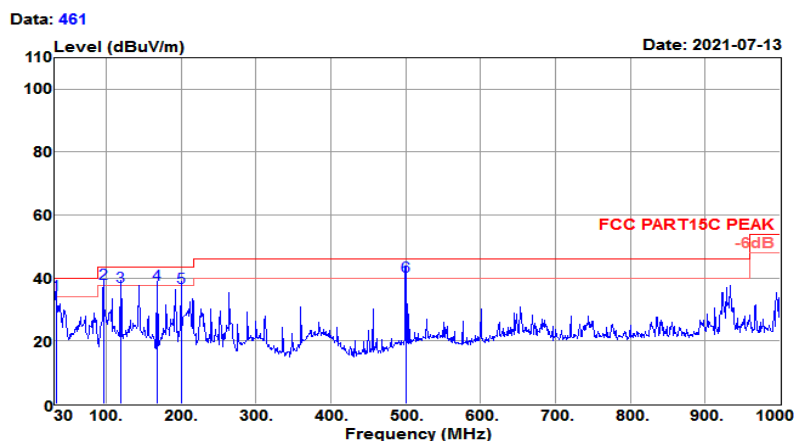

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
32.910	52.34	13.94	0.95	32.60	34.63	40.00	-5.37	QP
95.960	60.35	8.84	1.63	32.51	38.31	43.50	-5.19	QP
119.240	56.67	11.23	1.86	32.52	37.24	43.50	-6.26	QP
167.740	54.86	13.45	2.22	32.57	37.96	43.50	-5.54	QP
199.750	57.14	10.06	2.43	32.60	37.03	43.50	-6.47	QP
500.450	52.65	16.84	4.00	32.80	40.69	46.00	-5.31	QP

4.9 AC Conducted Emission Measurement

4.9.1 Limit of AC Conducted Emission

FCC §15.207

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


*Decreases with the logarithm of the frequency.

4.9.2 Test Procedures

- 1.The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- 2.Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 3.All the support units are connecting to the other LISN.
- 4.The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 5.The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 6.Both sides of AC line were checked for maximum conducted interference.
- 7.The frequency range from 150 kHz to 30 MHz was searched.
- 8.Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

4.9.3 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	25.5°C
Test Engineer :	Jack Liu	Relative Humidity :	62%
Test Voltage :	120VAC / 60/Hz	Phase :	Line
Function Type :	BT Linking+ RJ45 Ping + Adapter		

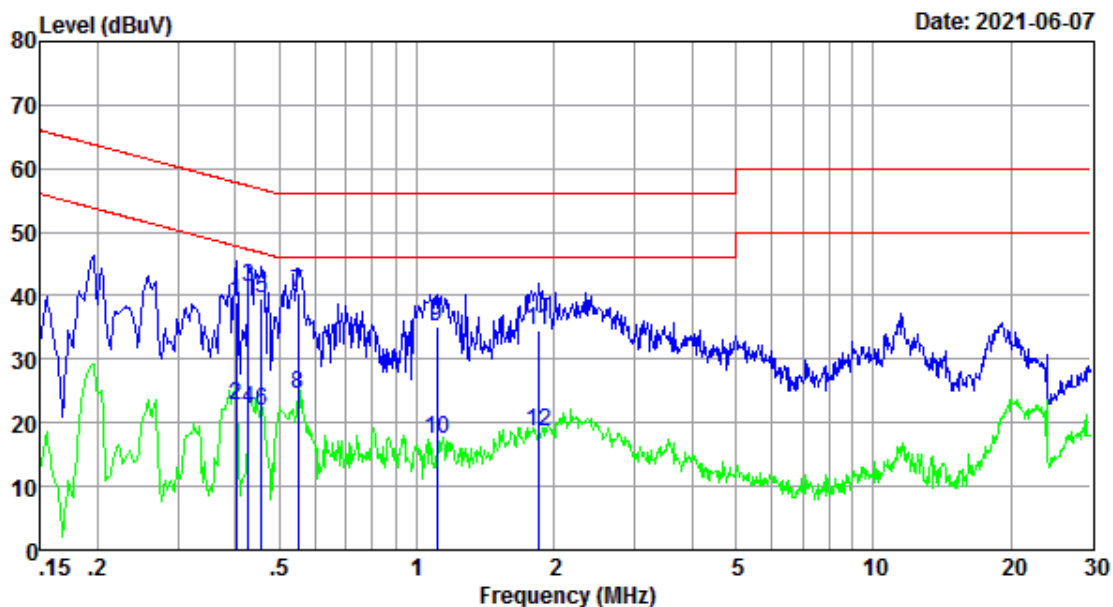

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	Result level dBuV	Limit level dBuV	Over limit dB	Remark
0.402	29.50	9.57	0.01	39.08	57.81	-18.73	QP
0.402	13.20	9.57	0.01	22.78	47.81	-25.03	Average
0.428	31.60	9.57	0.01	41.18	57.29	-16.11	QP
0.428	12.50	9.57	0.01	22.08	47.29	-25.21	Average
0.456	30.00	9.58	0.01	39.59	56.76	-17.17	QP
0.456	12.30	9.58	0.01	21.89	46.76	-24.87	Average
0.549	30.90	9.58	0.01	40.49	56.00	-15.51	QP
0.549	14.90	9.58	0.01	24.49	46.00	-21.51	Average
1.106	25.51	9.58	0.02	35.11	56.00	-20.89	QP
1.106	7.71	9.58	0.02	17.31	46.00	-28.69	Average
1.848	24.90	9.59	0.03	34.52	56.00	-21.48	QP
1.848	9.00	9.59	0.03	18.62	46.00	-27.38	Average

Result Level= Reading Level + LISN Factor + Cable Loss

Test Mode :	Mode 1	Temperature :	25.5°C
Test Engineer :	Jack Liu	Relative Humidity :	62%
Test Voltage :	120VAC / 60/Hz	Phase :	Neutral
Function Type :	BT Linking+ RJ45 Ping + Adapter		

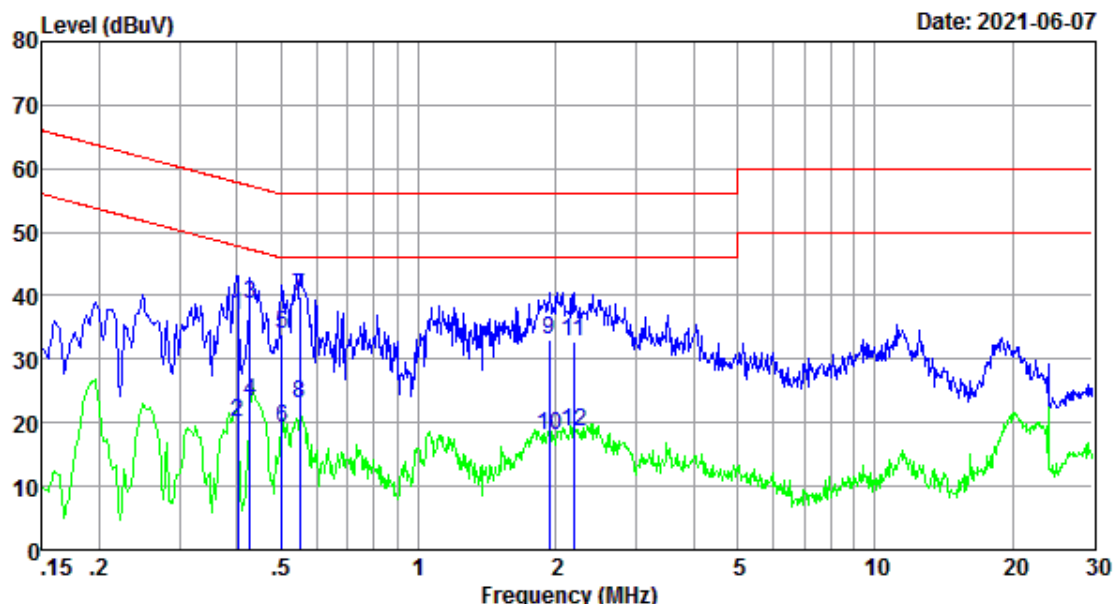

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	Result level dBuV	Limit level dBuV	Over limit dB	Remark
0.402	27.20	9.57	0.01	36.78	57.81	-21.03	QP
0.402	10.50	9.57	0.01	20.08	47.81	-27.73	Average
0.428	29.20	9.57	0.01	38.78	57.29	-18.51	QP
0.428	13.80	9.57	0.01	23.38	47.29	-23.91	Average
0.502	24.50	9.57	0.01	34.08	56.00	-21.92	QP
0.502	9.50	9.57	0.01	19.08	46.00	-26.92	Average
0.549	30.20	9.58	0.01	39.79	56.00	-16.21	QP
0.549	13.40	9.58	0.01	22.99	46.00	-23.01	Average
1.939	23.40	9.59	0.03	33.02	56.00	-22.98	QP
1.939	8.50	9.59	0.03	18.12	46.00	-27.88	Average
2.190	23.11	9.59	0.03	32.73	56.00	-23.27	QP
2.190	8.91	9.59	0.03	18.53	46.00	-27.47	Average

Result Level= Reading Level + LISN Factor + Cable Loss

4.10 Antenna Requirements

4.10.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded..

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

4.10.2 Antenna Connected Construction

An FPC Antenna design is used

4.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	Keysight	N9010A	MY56070788	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56510025	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY57030005	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56510018	2021-01-05	2022-01-04	Conducted
Power Sensor	Keysight	U2021XA	MY56480002	2021-01-05	2022-01-04	Conducted
Thermal Chamber	Howkin	UHL-34	19111801	2021-04-21	2022-04-20	Conducted
Base Station	R&S	CMW 270	101231	2021-01-05	2022-01-04	Conducted
Signal Generator (Interferer)	Keysight	N5182B	MY56200384	2021-01-05	2022-01-04	Conducted
Signal Generator (Blocker)	Keysight	N5171B	MY56200661	2021-01-05	2022-01-04	Conducted

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV 40	101433	2021-01-05	2022-01-04	Radiation
Amplifier	Sonoma	310	363917	2021-01-06	2022-01-05	Radiation
Amplifier	Schwarzbeck	BBV 9718	327	2021-01-06	2022-01-05	Radiation
Amplifier	Narda	TTA1840-35-HG	2034380	2020-11-28	2021-11-27	Radiation
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-051	2020-02-14	2023-02-13	Radiation
Broadband Antenna	Schwarzbeck	VULB 9168	9168-757	2020-09-27	2023-09-26	Radiation
Horn Antenna	Schwarzbeck	BBHA 9120 D	1677	2020-02-14	2023-02-13	Radiation
Horn Antenna	COM-POWER	AH-1840	101117	2021-06-05	2024-06-04	Radiation
Test Software	Audix	E3	6.111221a	N/A	N/A	Radiation
Filter	Micro-Tronics	BRM 50702	G266	N/A	N/A	Radiation

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Due Date	Remark
LISN	R&S	ENV216	102125	2021-01-05	2022-01-04	Conducted
LISN	R&S	ENV432	101327	2021-01-06	2022-01-05	Conducted
EMI Test Receiver	R&S	ESR3	102143	2021-01-06	2022-01-05	Conducted
EMI Test Software	Audix	E3	N/A	N/A	N/A	Conducted

N/A: No Calibration Required

6 Uncertainty of Evaluation

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.42dB
Radiated emission	30MHz ~ 1GMHz	2.50dB
	1GHz ~ 18GHz	3.51dB
	18GHz ~ 40GHz	3.96dB

MEASUREMENT	UNCERTAINTY
Occupied Channel Bandwidth	$\pm 196.4\text{Hz}$
RF output power, conducted	$\pm 2.31\text{dB}$
Power density, conducted	$\pm 2.31\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Appendix A: 20dB Emission Bandwidth

Test Result

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.816	2401.607	2402.423	---	PASS
		2441	0.891	2440.541	2441.432	---	PASS
		2480	0.810	2479.613	2480.423	---	PASS
2DH5	Ant1	2402	1.296	2401.358	2402.654	---	PASS
		2441	1.269	2440.382	2441.651	---	PASS
		2480	1.305	2479.331	2480.636	---	PASS
3DH5	Ant1	2402	1.236	2401.385	2402.621	---	PASS
		2441	1.164	2440.373	2441.537	---	PASS
		2480	1.245	2479.379	2480.624	---	PASS

Test Graphs






DH5_Ant1_2480



2DH5_Ant1_2402

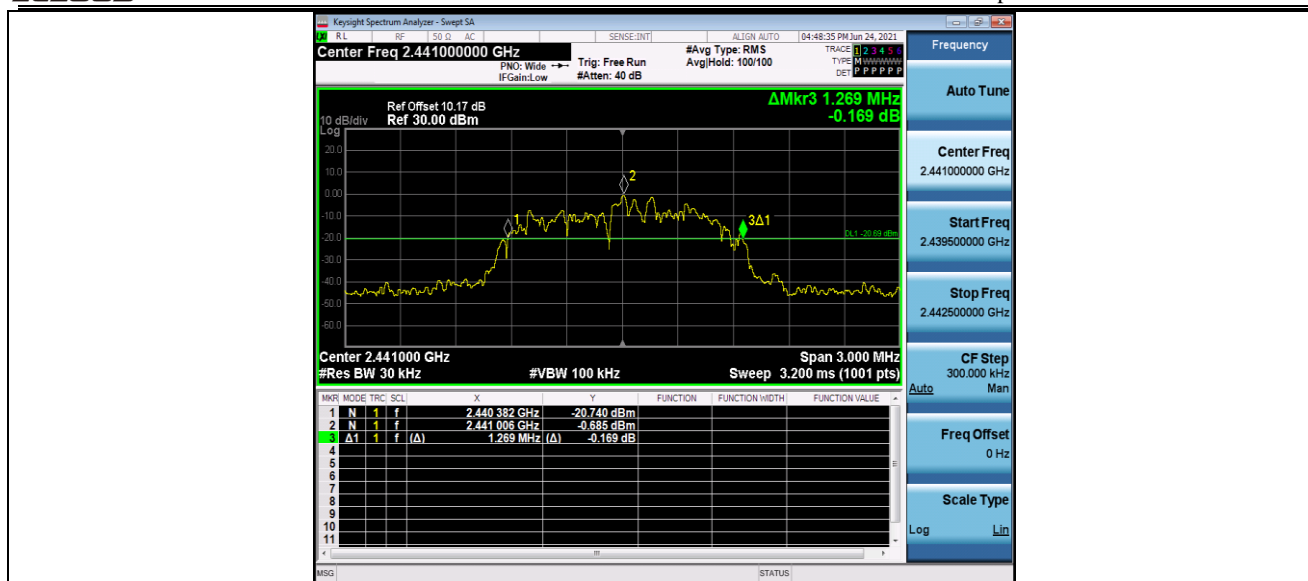

2DH5_Ant1_2441




2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5 Ant1 2441

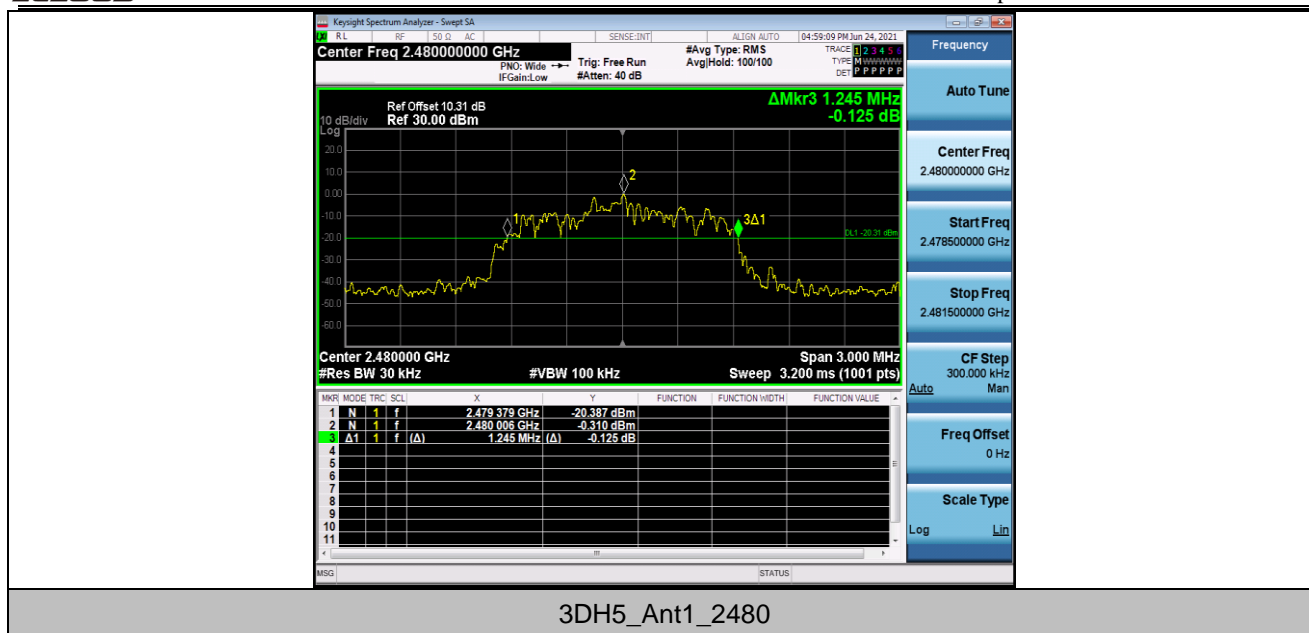

Appendix B: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.82119	2401.579	2402.400	---	PASS
		2441	0.81698	2440.596	2441.413	---	PASS
		2480	0.82472	2479.594	2480.419	---	PASS
2DH5	Ant1	2402	1.1461	2401.410	2402.556	---	PASS
		2441	1.1366	2440.420	2441.557	---	PASS
		2480	1.1627	2479.411	2480.574	---	PASS
3DH5	Ant1	2402	1.1358	2401.438	2402.574	---	PASS
		2441	1.1580	2440.433	2441.591	---	PASS
		2480	1.1492	2479.440	2480.590	---	PASS

Test Graphs






DH5_Ant1_2480



2DH5_Ant1_2402




2DH5_Ant1_2441

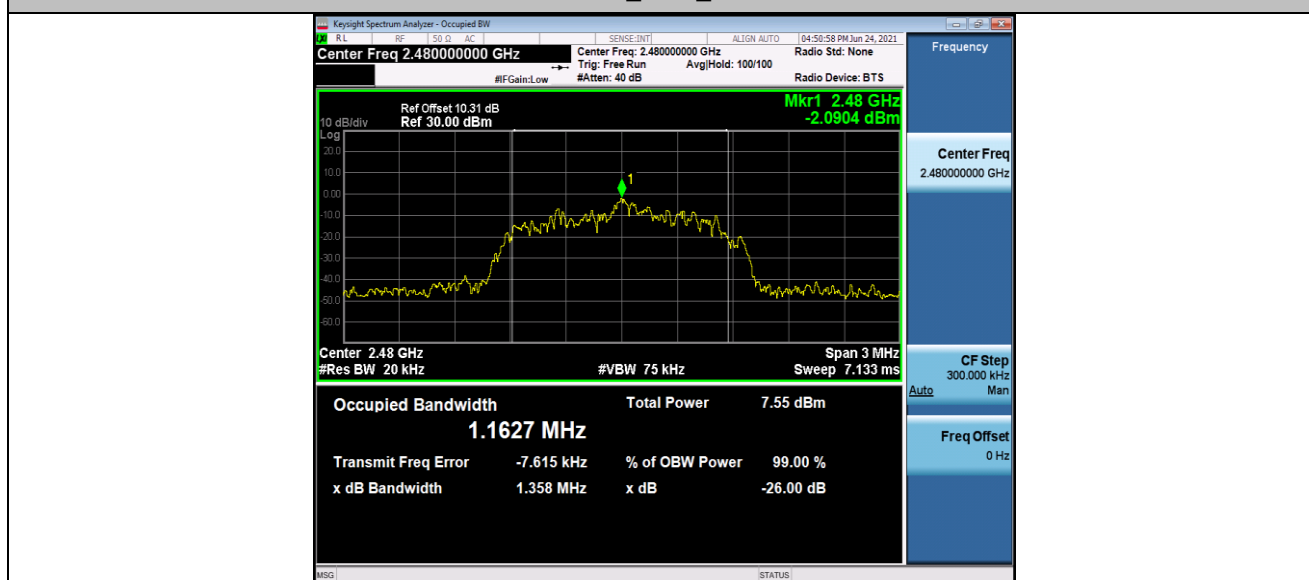

2DH5_Ant1_2480



3DH5_Ant1_2402

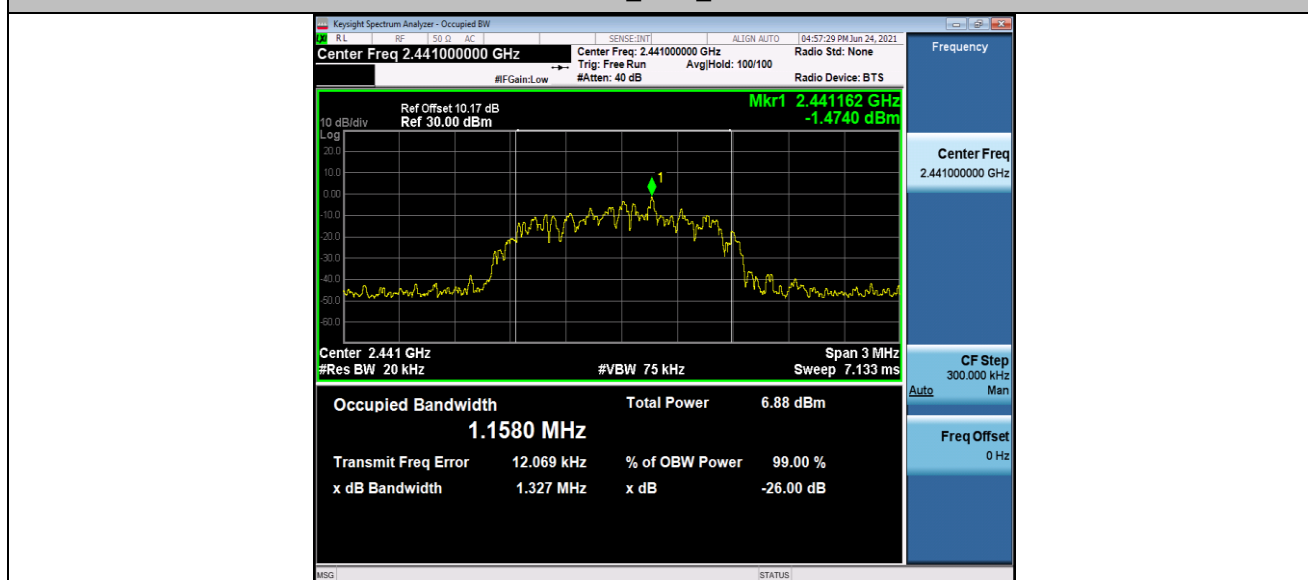

3DH5_Ant1_2441




3DH5_Ant1_2480


Appendix C: Maximum conducted output power

Test Result


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	2.65	<=20.97	PASS
		2441	3.67	<=20.97	PASS
		2480	4.18	<=20.97	PASS
2DH5	Ant1	2402	4.05	<=20.97	PASS
		2441	5.27	<=20.97	PASS
		2480	5.57	<=20.97	PASS
3DH5	Ant1	2402	4.87	<=20.97	PASS
		2441	5.91	<=20.97	PASS
		2480	6.4	<=20.97	PASS

Test Graphs

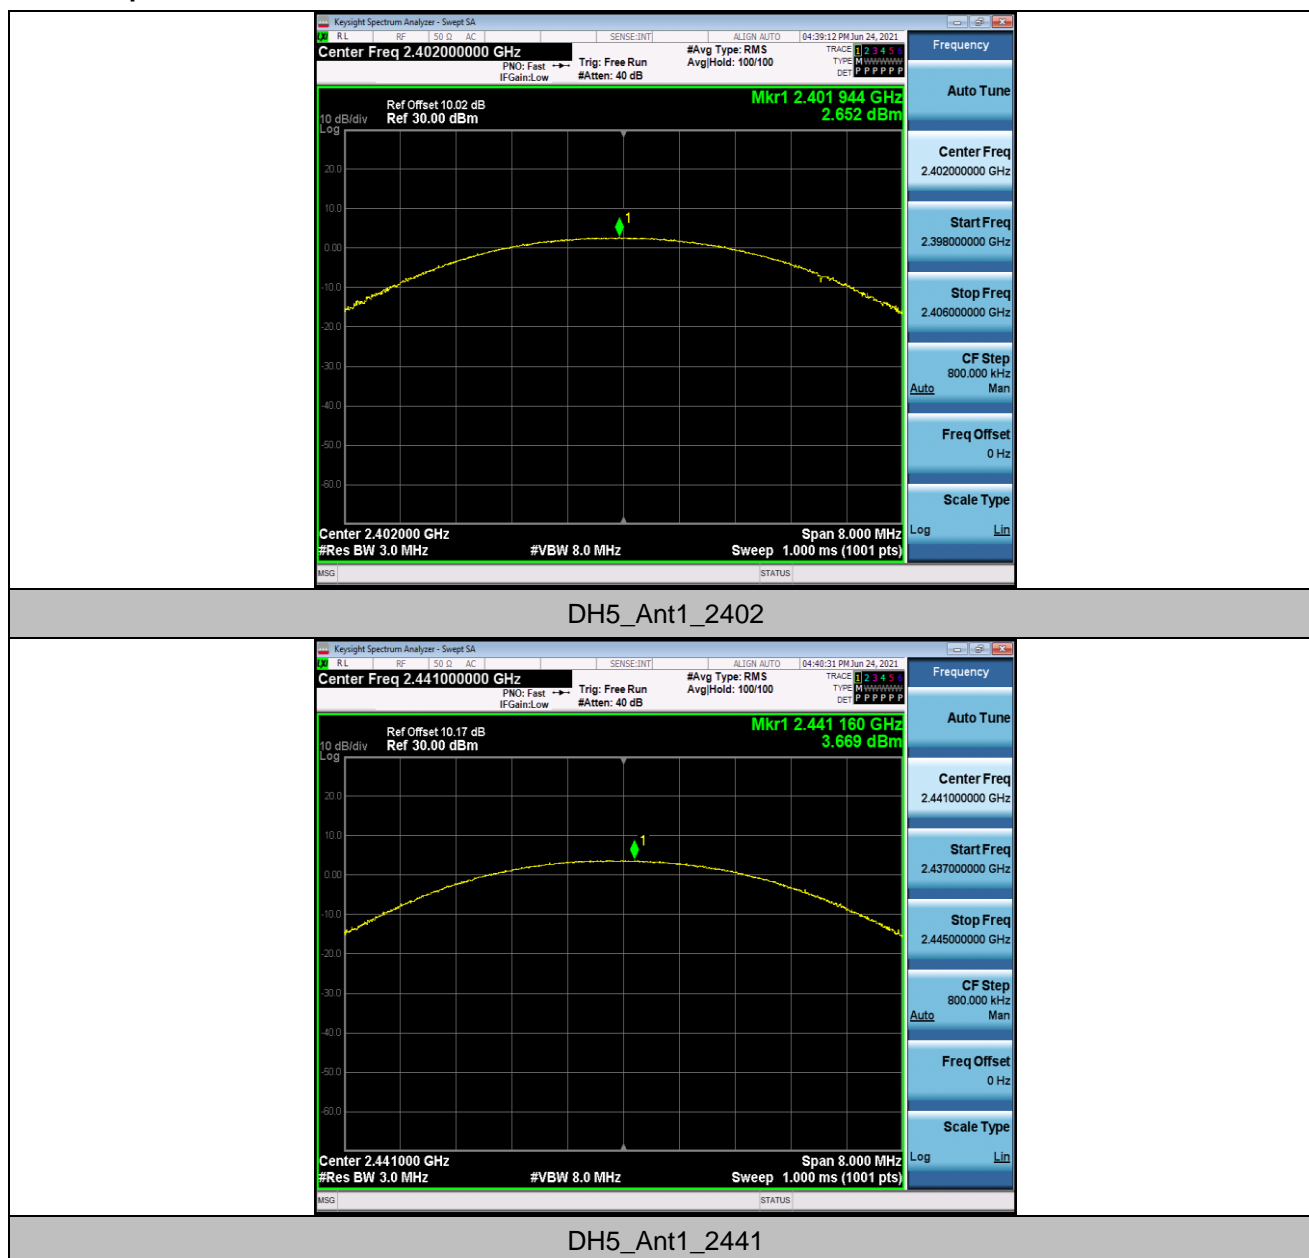

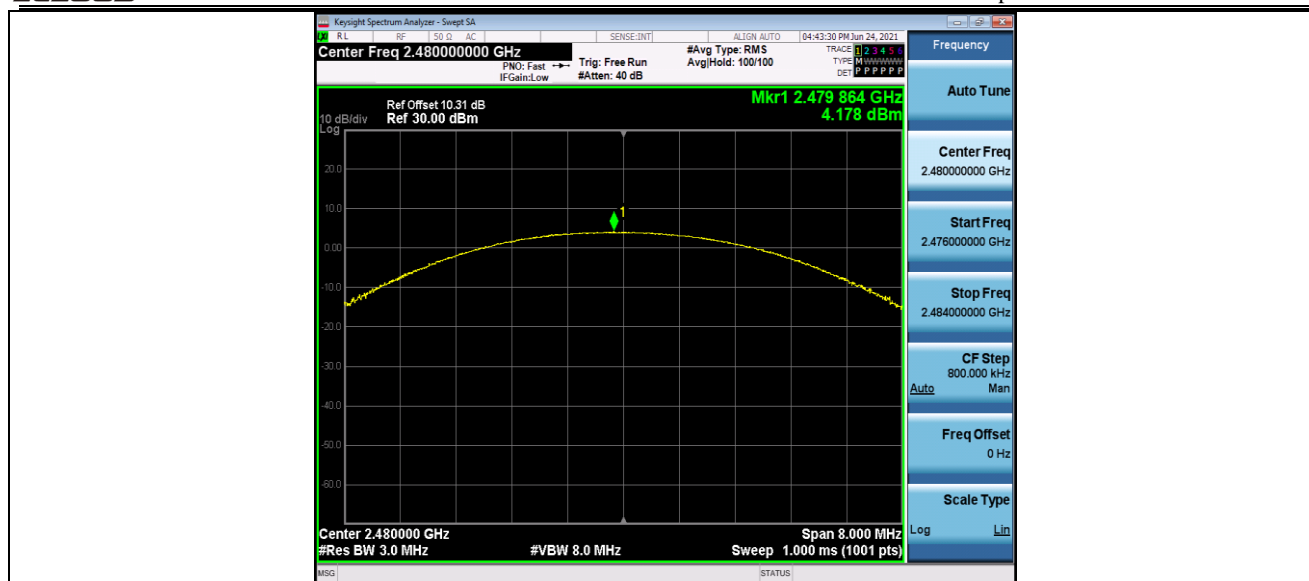

DH5_Ant1_2480

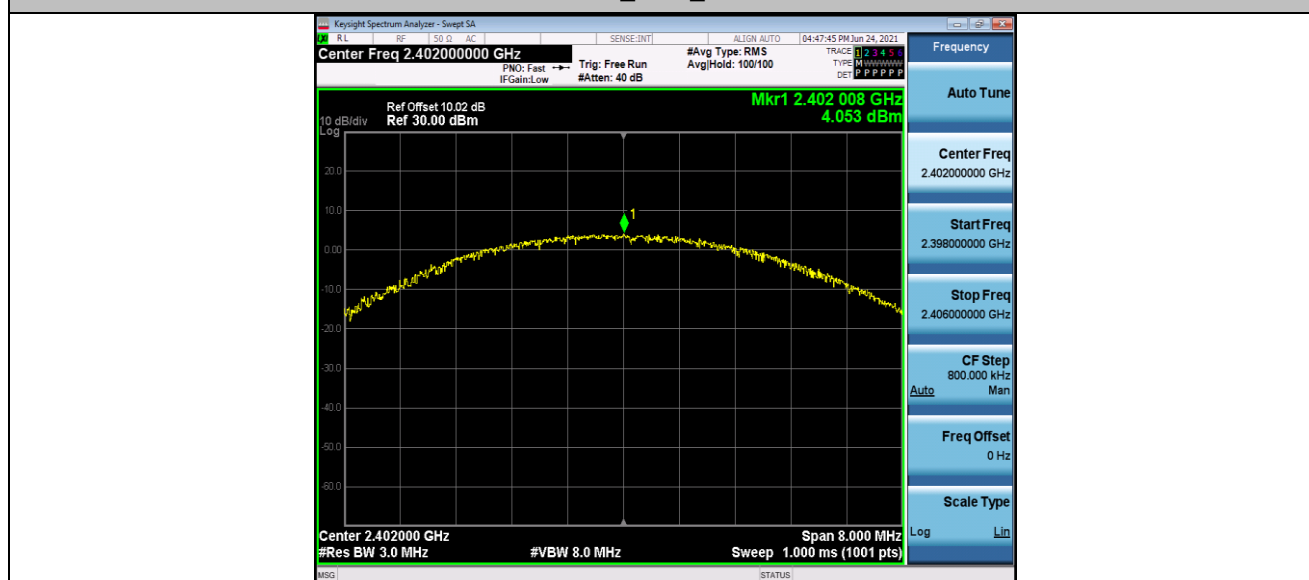

2DH5_Ant1_2402





3DH5_Ant1_2402



3DH5_Ant1_2441




Appendix D: Carrier frequency separation

Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.972	≥ 0.891	PASS
2DH5	Ant1	Hop	1.132	≥ 0.870	PASS
3DH5	Ant1	Hop	1.204	≥ 0.830	PASS

Test Graphs



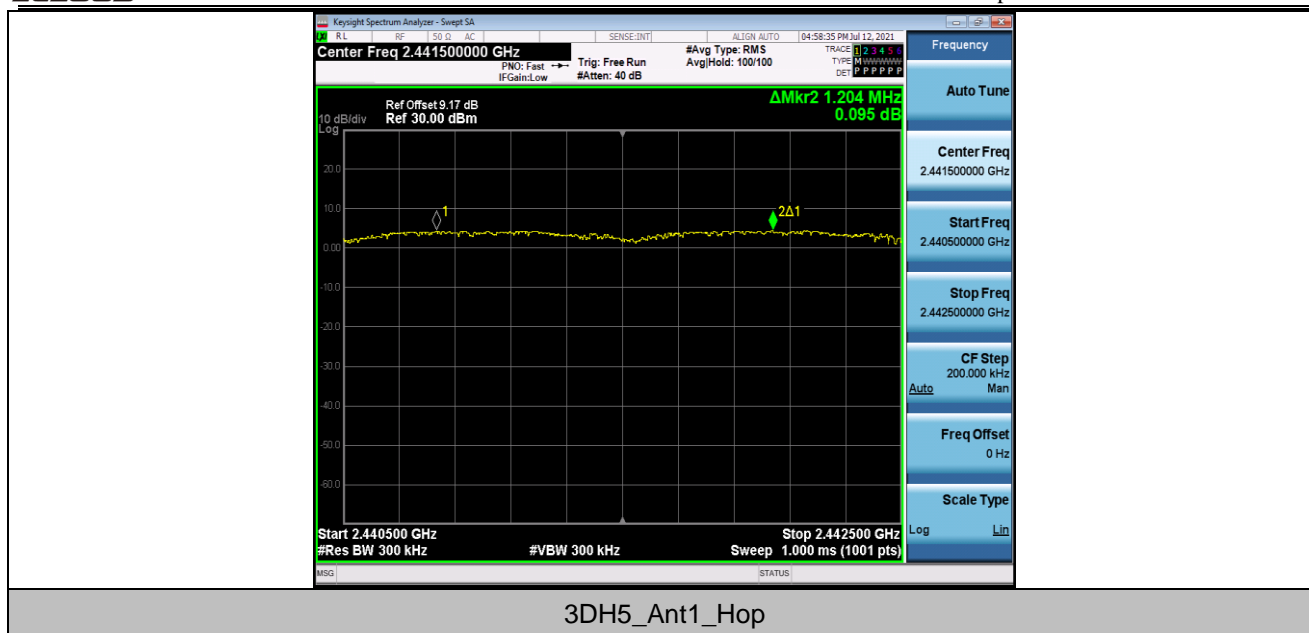



Appendix E: Time of occupancy

Test Result


TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop_2441	0.40	300	0.119	<=0.4	PASS
DH3	Ant1	Hop_2441	1.65	140	0.231	<=0.4	PASS
DH5	Ant1	Hop_2441	2.90	80	0.232	<=0.4	PASS
2DH1	Ant1	Hop_2441	0.39	310	0.121	<=0.4	PASS
2DH3	Ant1	Hop_2441	1.64	130	0.213	<=0.4	PASS
2DH5	Ant1	Hop_2441	2.89	50	0.144	<=0.4	PASS
3DH1	Ant1	Hop_2441	0.39	310	0.119	<=0.4	PASS
3DH3	Ant1	Hop_2441	1.64	160	0.262	<=0.4	PASS
3DH5	Ant1	Hop_2441	2.89	120	0.346	<=0.4	PASS

Test Graphs

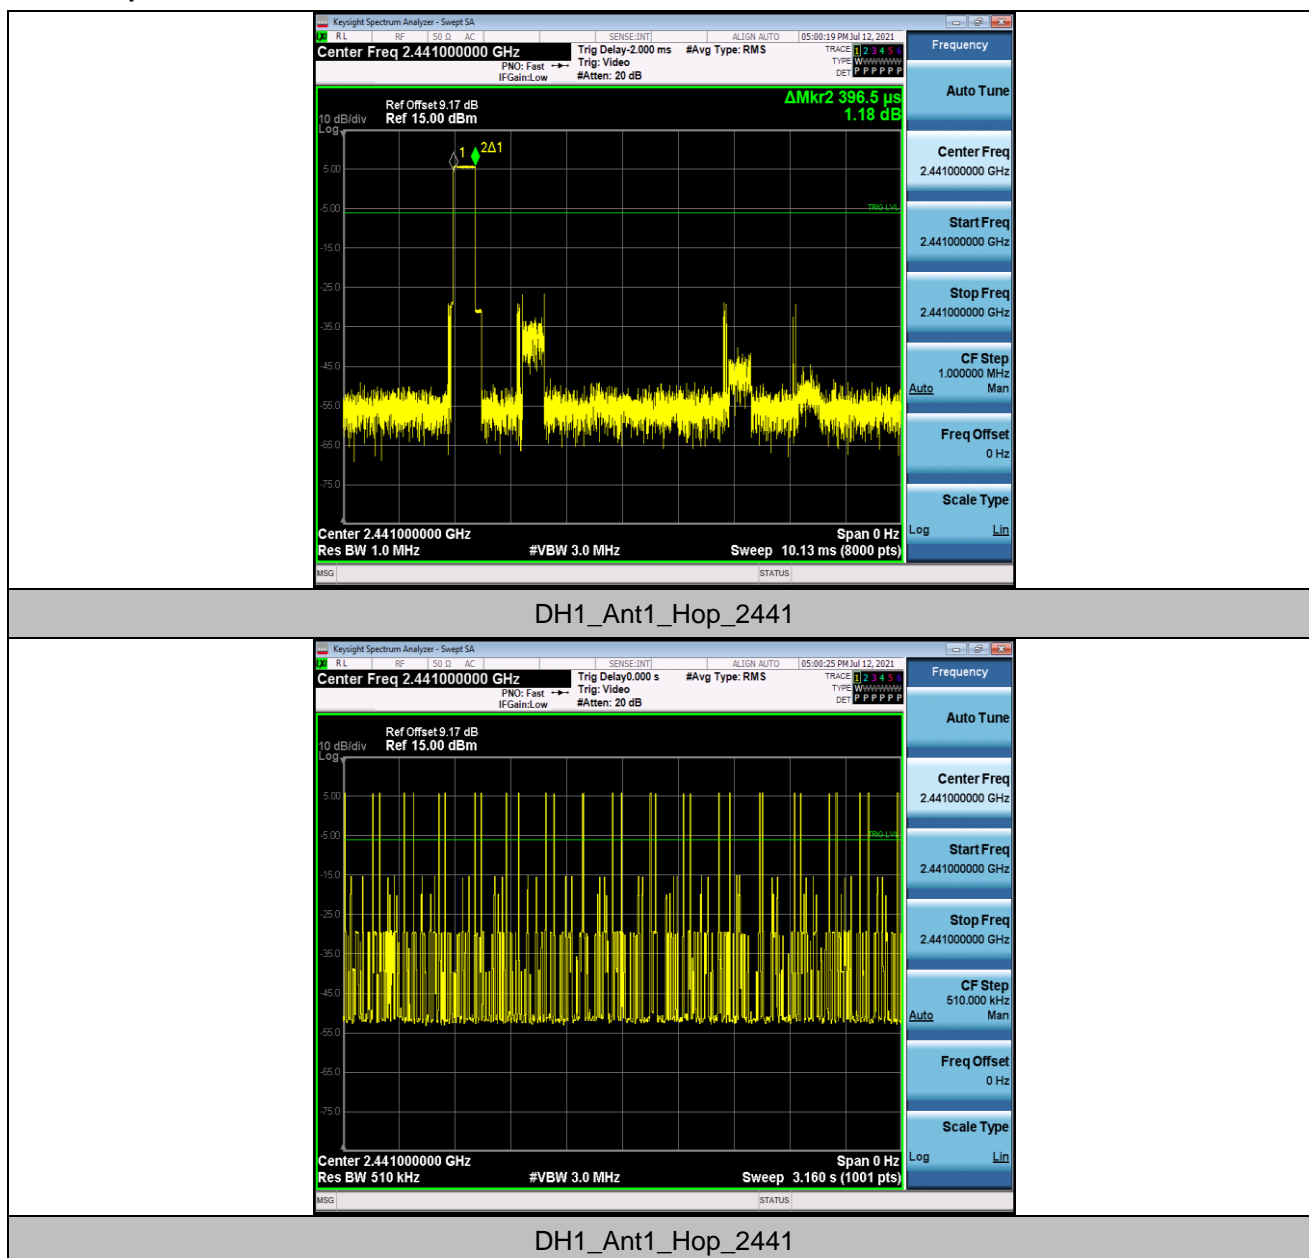


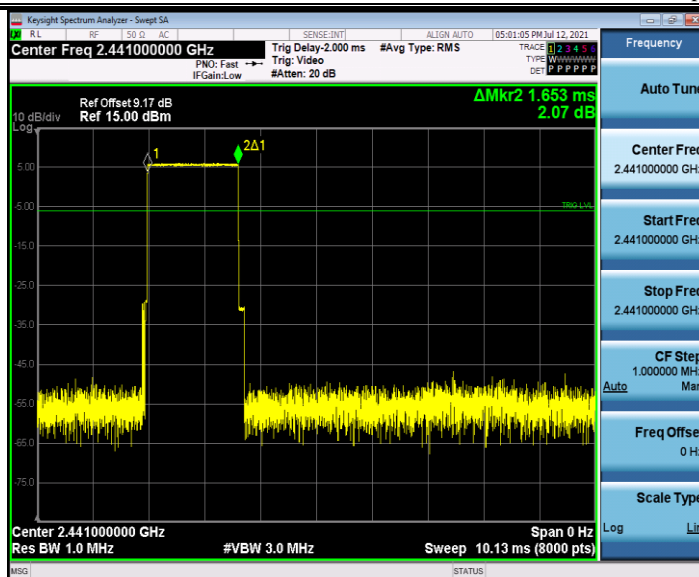


DH3_Ant1_Hop_2441

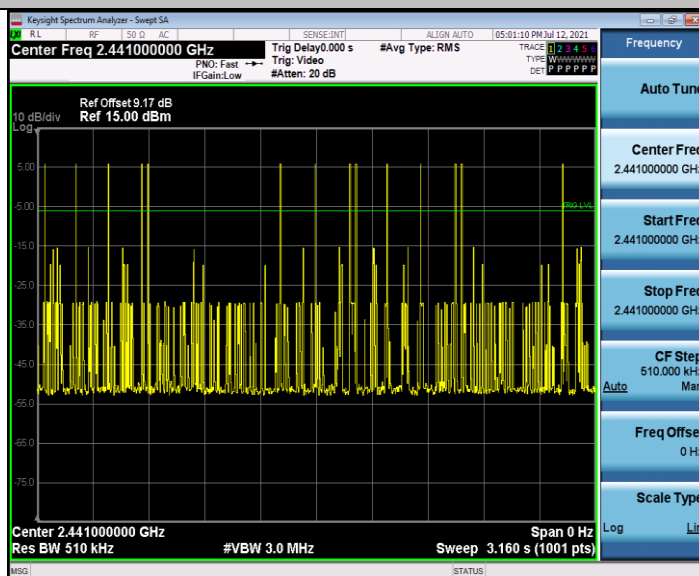


DH3_Ant1_Hop_2441

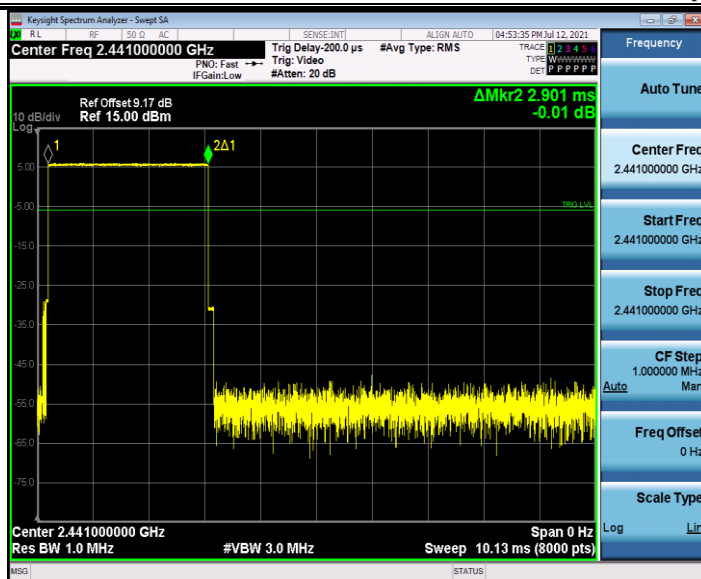


DH5_Ant1_Hop_2441

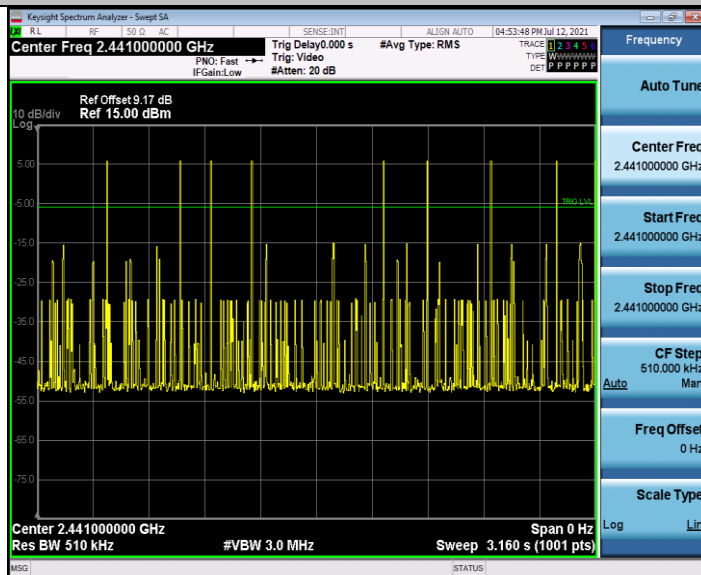

DH5_Ant1_Hop_2441

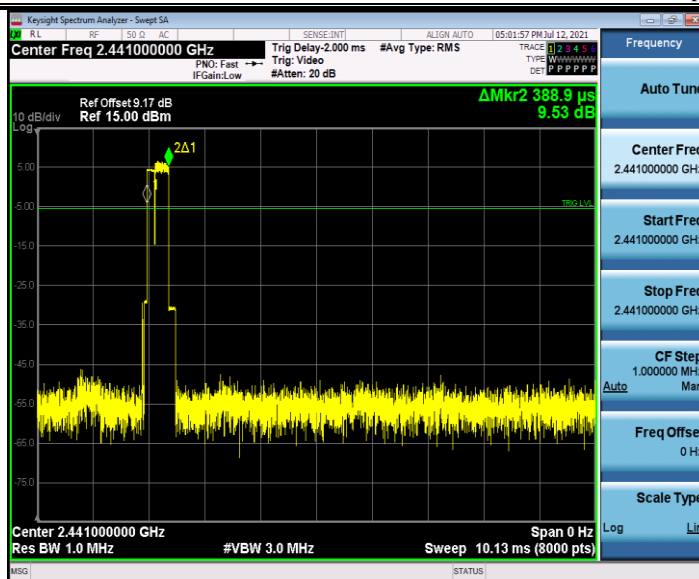

2DH1_Ant1_Hop_2441

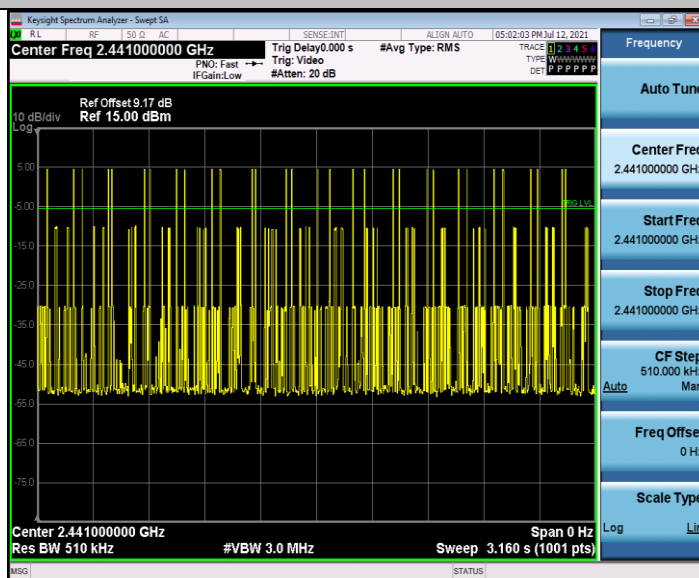

2DH1_Ant1_Hop_2441