



PCTEST
7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.pctest.com>



MEASUREMENT REPORT

GSM / GPRS / EDGE / CDMA / WCDMA

Applicant Name:

LG Electronics USA, Inc.
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:

1/21 - 2/15/2020

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M1912300226-02.ZNF

FCC ID:

ZNFV600TM

APPLICANT:

LG Electronics USA, Inc.

Application Type:

Class II Permissive Change

Model/HVIN:

LM-V600TM

Additional Model(s)/HVIN(s):

LMV600TM, V600TM

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s):

22, 24, & 27

Test Procedure(s):


ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01,
KDB 648474 D03 v01r04

Class II Permissive Change:

Please see FCC change document

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President




FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 1 of 36

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Cellular - Base Frequency Blocks	6
3.3	Cellular - Mobile Frequency Blocks	6
3.4	PCS - Base Frequency Blocks	6
3.5	PCS - Mobile Frequency Blocks.....	6
3.6	AWS - Base Frequency Blocks	7
3.7	AWS - Mobile Frequency Blocks.....	7
3.8	Radiated Measurements	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS.....	12
7.1	Summary.....	12
7.2	Radiated Power (ERP/EIRP).....	13
7.3	Radiated Spurious Emissions Measurements.....	18
8.0	CONCLUSION.....	36

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 2 of 36



MEASUREMENT REPORT

GSM / GPRS / EDGE / CDMA / WCDMA



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP	
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)
GPRS850	22H	824.2 - 848.8	0.501	27.00	0.822	29.15
EDGE850	22H	824.2 - 848.8	0.109	20.36	0.178	22.51
CDMA850	22H	824.70 - 848.31	0.062	17.90	0.101	20.05
WCDMA850	22H	826.4 - 846.6	0.058	17.62	0.095	19.77
WCDMA1700	27	1712.4 - 1752.6			0.163	22.12
GPRS1900	24E	1850.2 - 1909.8			0.579	27.63
EDGE1900	24E	1850.2 - 1909.8			0.124	20.95
CDMA1900	24E	1851.25 - 1908.75			0.192	22.84
WCDMA1900	24E	1852.4 - 1907.6			0.184	22.64

EUT Overview

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 3 of 36

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 4 of 36

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFV600TM**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

Test Device Serial No.: 04232, 04257

2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (n71, n66, n25, n2, n41(PC2)), 802.11b/g/n/ac/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report. The worst orientation was found to be Y-orientation (landscape).

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) FCC ID: YZP-PWMAW815A while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

This device supports Dual Display (DD) Cover, which attaches to the device to provide a secondary display on the inside of the cover. The display was rotated through all possible orientations to determine worst case angle. The worst case radiated emission data with the Dual Display Cover is included in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 5 of 36


3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Cellular - Base Frequency Blocks

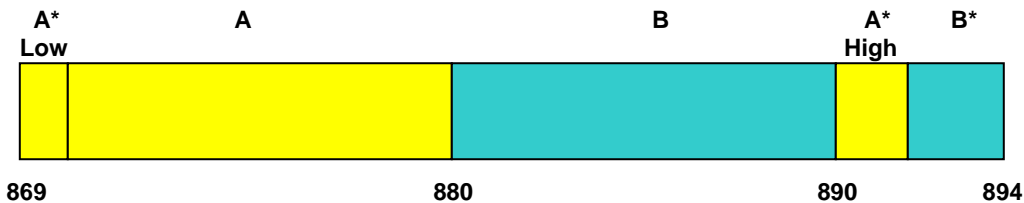


BLOCK 1: 869 – 880 MHz (A* Low + A)

BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

3.3 Cellular - Mobile Frequency Blocks

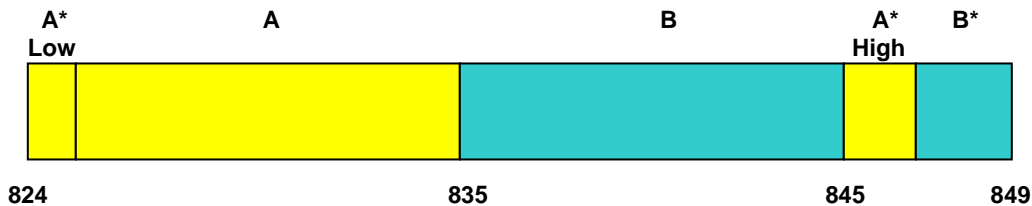


BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

3.4 PCS - Base Frequency Blocks

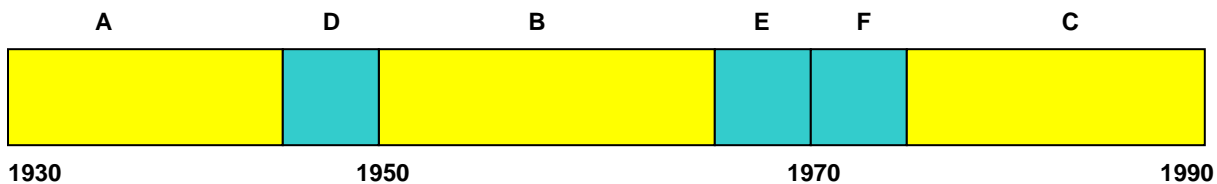

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)

BLOCK 2: 1945 – 1950 MHz (D)


BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

3.5 PCS - Mobile Frequency Blocks

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 6 of 36

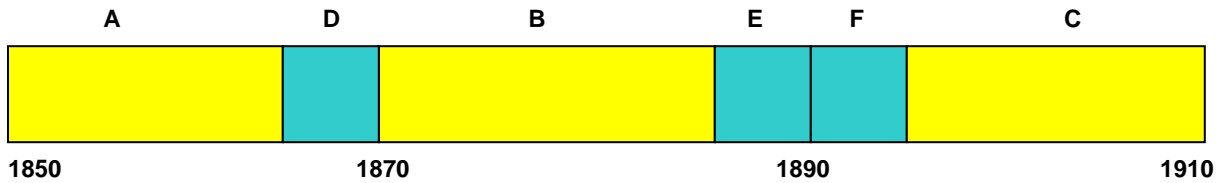

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)


BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

3.6 AWS - Base Frequency Blocks

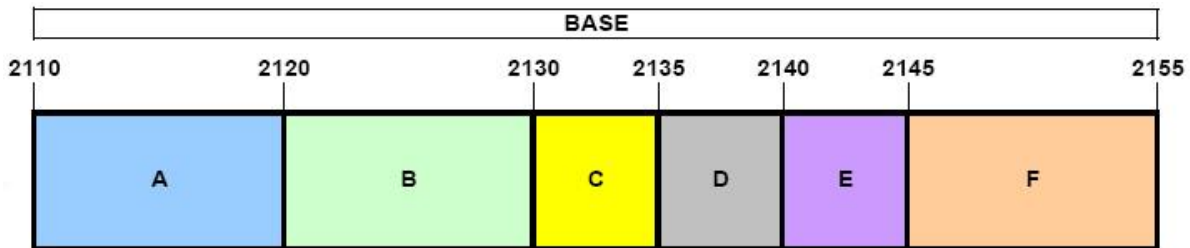

BLOCK 1: 2110 – 2120 MHz (A)

BLOCK 4: 2135 – 2140 MHz (D)


BLOCK 2: 2120 – 2130 MHz (B)

BLOCK 5: 2140 – 2145 MHz (E)

BLOCK 3: 2130 – 2135 MHz (C)

BLOCK 6: 2145 – 2155 MHz (F)

3.7 AWS - Mobile Frequency Blocks

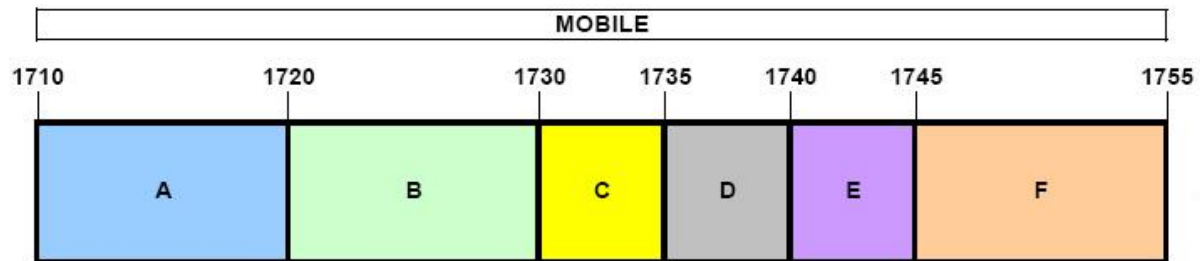

BLOCK 1: 1710 – 1720 MHz (A)

BLOCK 4: 1735 – 1740 MHz (D)

BLOCK 2: 1720 – 1730 MHz (B)

BLOCK 5: 1740 – 1745 MHz (E)

BLOCK 3: 1730 – 1735 MHz (C)

BLOCK 6: 1745 – 1755 MHz (F)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 7 of 36

3.8 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 8 of 36

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 9 of 36

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E5515C	Wireless Communications Test Set	N/A			GB43193563
Agilent	N9038A	MXE EMI Receiver	7/17/2019	Annual	7/17/2020	MY51210133
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
EMCO	3116	Horn Antenna (18-40GHz)	6/7/2018	Biennial	6/7/2020	9203-2178
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			833855/0010
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	6/5/2019	Annual	6/5/2020	100342
Rohde & Schwarz	FSV40-N	Spectrum Analyzer (9K - 40GHz)	12/6/2019	Annual	12/6/2020	101814
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	TS-PR18	18-26.5 GHz Pre-Amplifier	1/31/2020	Annual	1/31/2021	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	10/8/2019	Annual	10/8/2020	100037
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/11/2019	Annual	7/11/2020	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	7/8/2019	Annual	7/8/2020	102133
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			165450
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107

Table 5-1. Test Equipment

Notes:

Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFV600TM	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset	Page 10 of 36

6.0 SAMPLE CALCULATIONS

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 11 of 36

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics USA, Inc.
 FCC ID: ZNFV600TM
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM / GPRS / EDGE / CDMA / WCDMA

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
22.913(a)(5)	RSS-132(5.4)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 7.2
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.2
27.50(d)(4)	RSS-139(6.5)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.2
2.1053 22.917(a) 24.238(a) 27.53(h)	RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Radiated Spurious Emissions	> 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 7.3

Table 7-1. Summary of Test Results

Notes:

All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset	Page 12 of 36	

7.2 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 13 of 36

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

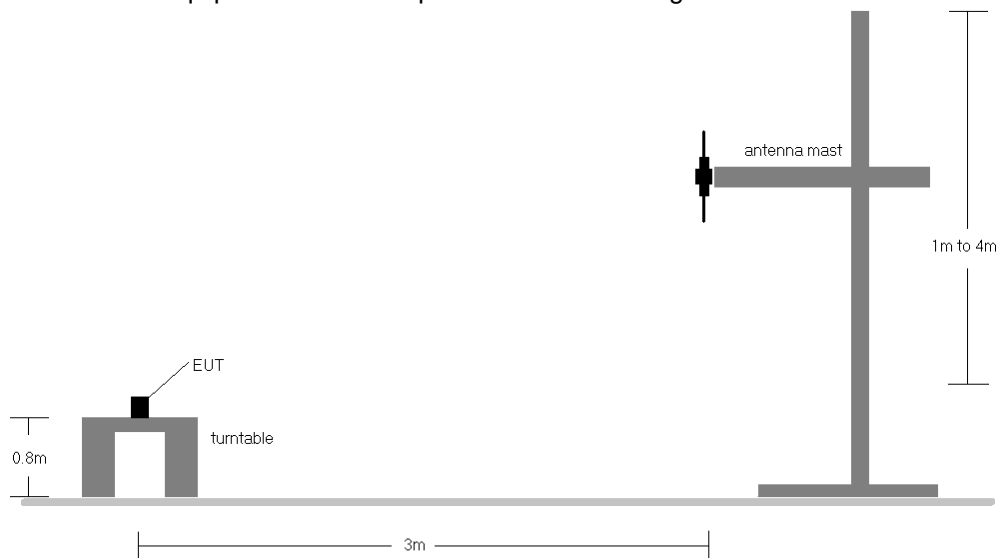


Figure 7-1. Radiated Test Setup <1GHz

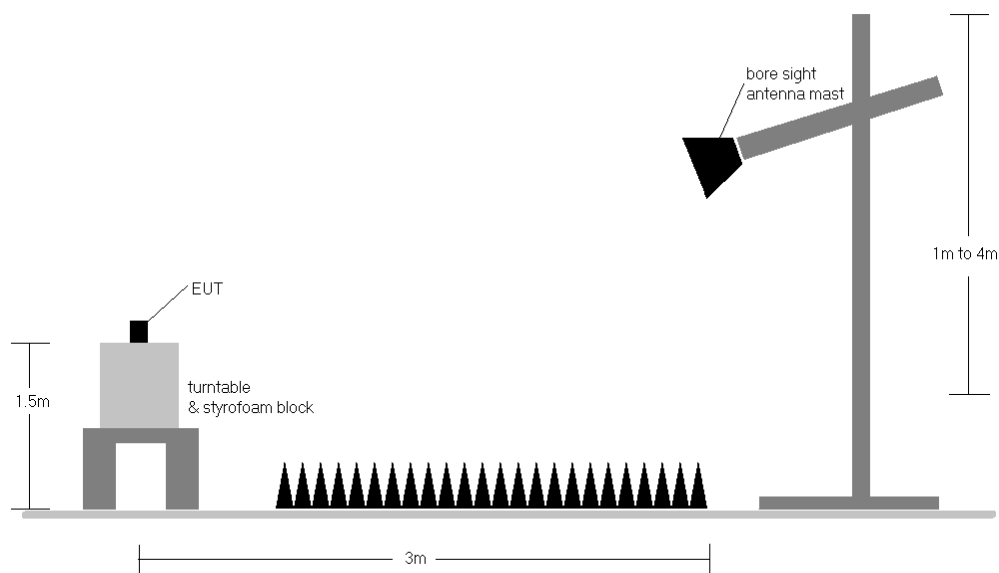


Figure 7-2. Radiated Test Setup >1GHz

FCC ID: ZNFV600TM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 14 of 36

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset	Page 15 of 36	

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	V	136	69	21.21	6.30	25.36	0.344	38.45	-13.09	27.51	0.564	40.61	-13.10
836.60	GPRS850	V	139	73	22.75	6.40	27.00	0.501	38.45	-11.45	29.15	0.822	40.61	-11.46
848.80	GPRS850	V	147	73	22.09	6.50	26.44	0.441	38.45	-12.01	28.59	0.723	40.61	-12.02
836.60	GPRS850	H	100	101	18.83	6.70	23.38	0.218	38.45	-15.07	25.53	0.357	40.61	-15.08
836.60	EDGE850	V	276	49	16.11	6.40	20.36	0.109	38.45	-18.09	22.51	0.178	40.61	-18.10
836.60	GPRS850 (WCP+DD)	H	202	90	20.52	6.70	25.07	0.321	38.45	-13.38	27.22	0.527	40.61	-13.39

Table 7-2. ERP/EIRP (Cellular GPRS)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.70	CDMA850	V	132	55	12.01	6.30	16.16	0.041	38.45	-22.29	18.31	0.068	40.61	-22.30
836.52	CDMA850	V	145	55	13.62	6.40	17.87	0.061	38.45	-20.58	20.02	0.100	40.61	-20.59
848.31	CDMA850	V	145	69	13.55	6.50	17.90	0.062	38.45	-20.55	20.05	0.101	40.61	-20.56
848.31	CDMA850	H	210	315	13.25	6.70	17.80	0.060	38.45	-20.65	19.95	0.099	40.61	-20.66
848.31	CDMA850 (WCP+DD)	H	212	74	11.53	6.70	16.08	0.041	38.45	-22.37	18.23	0.067	40.61	-22.38

Table 7-3. ERP/EIRP (Cellular CDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	V	139	90	12.63	6.30	16.78	0.048	38.45	-21.67	18.93	0.078	40.61	-21.68
836.60	WCDMA850	V	145	92	13.37	6.40	17.62	0.058	38.45	-20.83	19.77	0.095	40.61	-20.84
846.60	WCDMA850	V	142	92	13.09	6.50	17.44	0.055	38.45	-21.01	19.59	0.091	40.61	-21.02
836.60	WCDMA850	H	220	87	11.35	6.70	15.90	0.039	38.45	-22.55	18.05	0.064	40.61	-22.56
836.60	WCDMA850 (WCP+DD)	H	204	84	9.77	6.70	14.32	0.027	38.45	-24.13	16.47	0.044	40.61	-24.14

Table 7-4. ERP/EIRP (Cellular WCDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	V	132	340	11.65	9.34	20.99	0.125	30.00	-9.01
1732.60	WCDMA1700	V	147	331	11.91	9.19	21.10	0.129	30.00	-8.90
1752.60	WCDMA1700	V	135	337	13.04	9.08	22.12	0.163	30.00	-7.88
1752.60	WCDMA1700	H	286	1	10.89	9.21	20.10	0.102	30.00	-9.90
1752.60	WCDMA1700 (WCP+DD)	H	126	69	10.89	9.21	20.10	0.102	30.00	-9.90

Table 7-5. EIRP (AWS WCDMA)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 16 of 36

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	H	120	350	16.95	9.48	26.43	0.439	33.01	-6.58
1880.00	GPRS1900	H	118	348	17.73	9.90	27.63	0.579	33.01	-5.38
1909.80	GPRS1900	H	112	342	16.35	10.26	26.61	0.458	33.01	-6.40
1880.00	GPRS1900	V	281	264	16.92	9.90	26.82	0.481	33.01	-6.19
1880.00	EDGE1900	H	118	348	10.85	10.10	20.95	0.124	33.01	-12.06
1880.00	GPRS1900 (WCP+DD)	H	152	42	15.38	9.90	25.28	0.337	33.01	-7.73

Table 7-6. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900	H	123	361	13.08	9.49	22.57	0.181	33.01	-10.44
1880.00	CDMA1900	H	115	351	12.94	9.90	22.84	0.192	33.01	-10.17
1908.75	CDMA1900	H	138	357	12.02	10.25	22.27	0.169	33.01	-10.74
1880.00	CDMA1900	V	161	269	12.71	10.10	22.81	0.191	33.01	-10.20
1880.00	CDMA1900 (WCP+DD)	H	155	244	12.62	9.90	22.52	0.179	33.01	-10.49

Table 7-7. EIRP (PCS CDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	H	121	356	12.06	9.51	21.57	0.143	33.01	-11.44
1880.00	WCDMA1900	H	118	351	12.74	9.90	22.64	0.184	33.01	-10.37
1907.60	WCDMA1900	H	135	357	10.26	10.24	20.50	0.112	33.01	-12.51
1880.00	WCDMA1900	V	142	32	11.53	9.90	21.43	0.139	33.01	-11.58
1880.00	WCDMA1900 (WCP+DD)	H	149	42	9.28	9.90	19.18	0.083	33.01	-13.83

Table 7-8. EIRP (PCS WCDMA)

FCC ID: ZNFV600TM	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset	Page 17 of 36

7.3 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset	Page 18 of 36	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

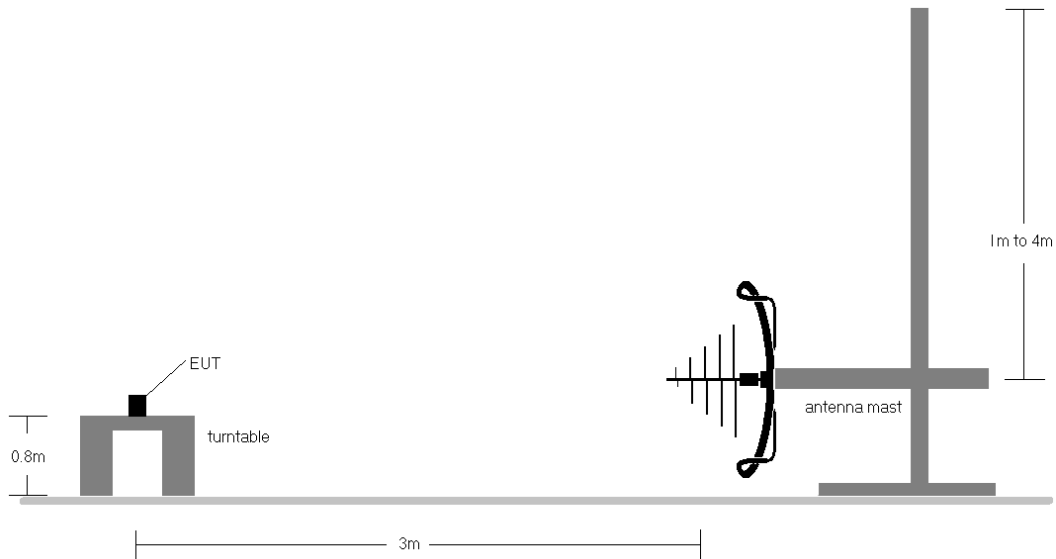


Figure 7-3. Test Instrument & Measurement Setup < 1GHz

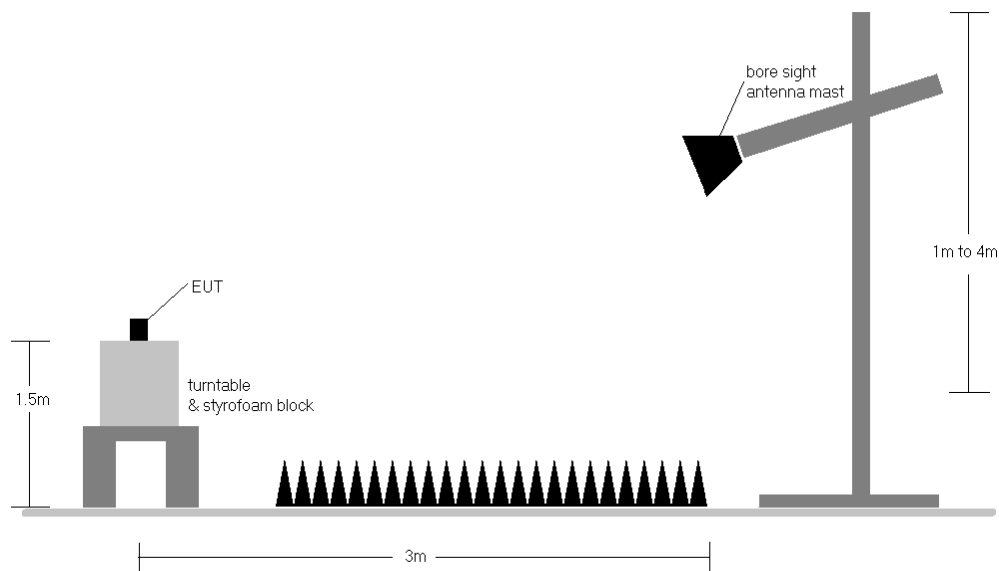


Figure 7-4. Test Instrument & Measurement Setup >1 GHz


FCC ID: ZNFV600TM	PCTEST	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 19 of 36

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, and HSUPA capabilities. For WCDMA and HSUPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps with HSDPA inactive and TPC bits all set to "1."
- 3) This device was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFV600TM	 MEASUREMENT REPORT (CERTIFICATION)		 LG	Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset	Page 20 of 36	

Cellular GPRS Mode

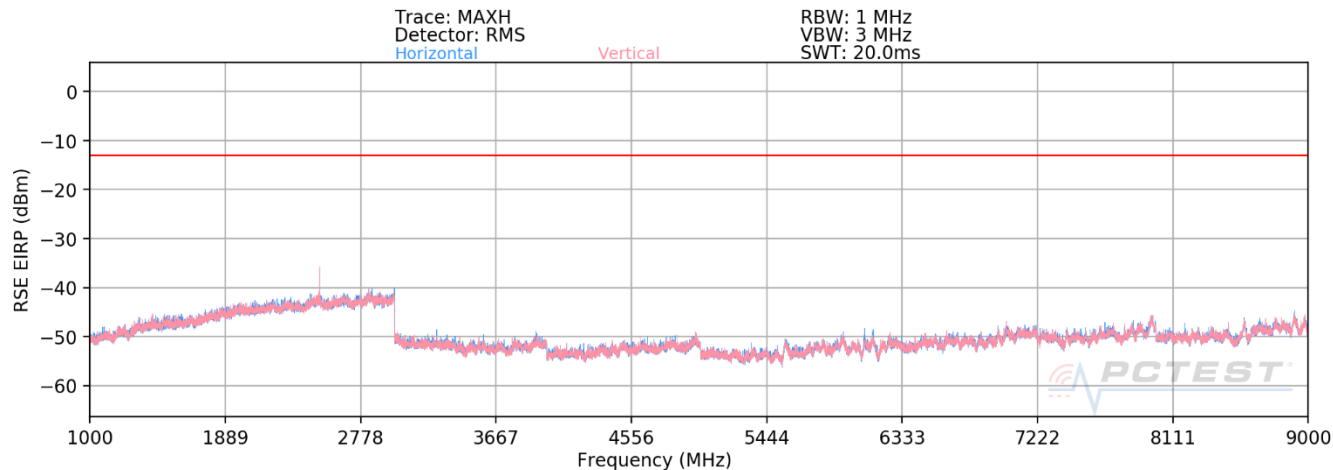

Plot 7-1. Radiated Spurious Plot above 1GHz (Cellular GPRS Mode)

OPERATING FREQUENCY: 824.20 MHz

MODULATION SIGNAL: GPRS (GMSK)

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	V	-	-	-64.10	3.61	-60.50	-47.5
2472.60	V	121	184	-52.21	4.21	-48.00	-35.0
3296.80	V	-	-	-61.94	5.77	-56.17	-43.2
4121.00	V	219	240	-66.72	7.59	-59.13	-46.1
4945.20	V	-	-	-66.90	8.56	-58.34	-45.3
5769.40	V	-	-	-66.60	8.81	-57.79	-44.8

Table 7-9. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 21 of 36

OPERATING FREQUENCY: 836.60 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	V	-	-	-64.71	3.62	-61.09	-48.1
2509.80	V	100	362	-49.01	4.34	-44.67	-31.7
3346.40	V	-	-	-61.09	5.92	-55.17	-42.2
4183.00	V	133	265	-66.26	7.70	-58.56	-45.6
5019.60	V	-	-	-67.62	8.56	-59.06	-46.1
5856.20	V	-	-	-66.23	8.87	-57.36	-44.4

Table 7-10. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)


OPERATING FREQUENCY: 848.80 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	V	-	-	-63.98	3.63	-60.35	-47.3
2546.40	V	163	14	-47.81	4.56	-43.26	-30.3
3395.20	V	-	-	-62.57	6.14	-56.44	-43.4
4244.00	V	147	260	-66.16	7.80	-58.36	-45.4
5092.80	V	-	-	-67.46	8.64	-58.82	-45.8
5941.60	V	-	-	-66.10	8.83	-57.27	-44.3

Table 7-11. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 22 of 36

Cellular CDMA Mode

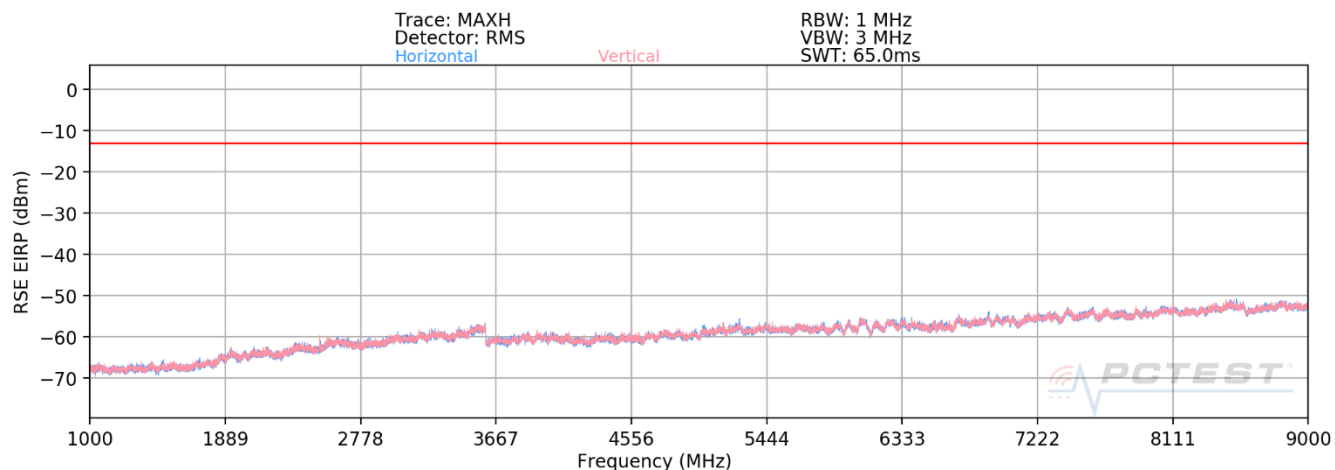

Plot 7-2. Radiated Spurious Plot above 1GHz (Cellular CDMA Mode)

OPERATING FREQUENCY: 824.70 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1649.40	V	198	286	-69.10	3.61	-65.49	-52.5
2474.10	V	193	279	-57.83	4.22	-53.61	-40.6
3298.80	V	-	-	-67.53	5.78	-61.75	-48.8
4123.50	V	-	-	-67.95	7.60	-60.35	-47.4

Table 7-12. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 23 of 36

OPERATING FREQUENCY: 836.52 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.04	V	191	277	-66.19	3.62	-62.57	-49.6
2509.56	V	144	125	-61.85	4.33	-57.52	-44.5
3346.08	V	-	-	-66.64	5.92	-60.72	-47.7
4182.60	V	-	-	-68.18	7.69	-60.49	-47.5

Table 7-13. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)


OPERATING FREQUENCY: 848.31 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1696.62	V	177	272	-68.47	3.63	-64.84	-51.8
2544.93	V	180	275	-55.09	4.55	-50.54	-37.5
3393.24	V	-	-	-67.29	6.13	-61.17	-48.2
4241.55	V	-	-	-68.12	7.79	-60.33	-47.3

Table 7-14. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 24 of 36

Cellular WCDMA Mode

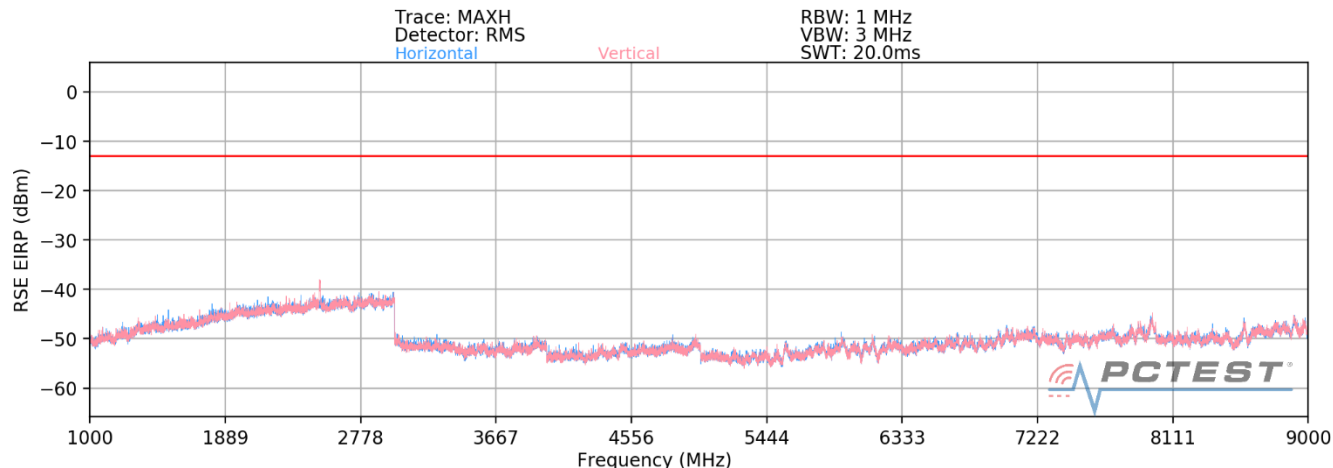

Plot 7-3. Radiated Spurious Plot above 1GHz (Cellular WCDMA Mode)

OPERATING FREQUENCY: 826.40 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	V	-	-	-69.83	3.61	-66.22	-53.2
2479.20	V	-	-	-67.25	4.23	-63.02	-50.0

Table 7-15. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

OPERATING FREQUENCY: 836.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	V	-	-	-69.72	3.62	-66.10	-53.1
2509.80	V	-	-	-66.98	4.34	-62.64	-49.6

Table 7-16. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 25 of 36


OPERATING FREQUENCY: 846.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	V	-	-	-69.50	3.63	-65.88	-52.9
2539.80	V	115	136	-66.36	4.52	-61.85	-48.8
3386.40	V	-	-	-67.89	6.10	-61.80	-48.8
4233.00	V	-	-	-68.96	7.77	-61.19	-48.2

Table 7-17. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 26 of 36

AWS WCDMA Mode

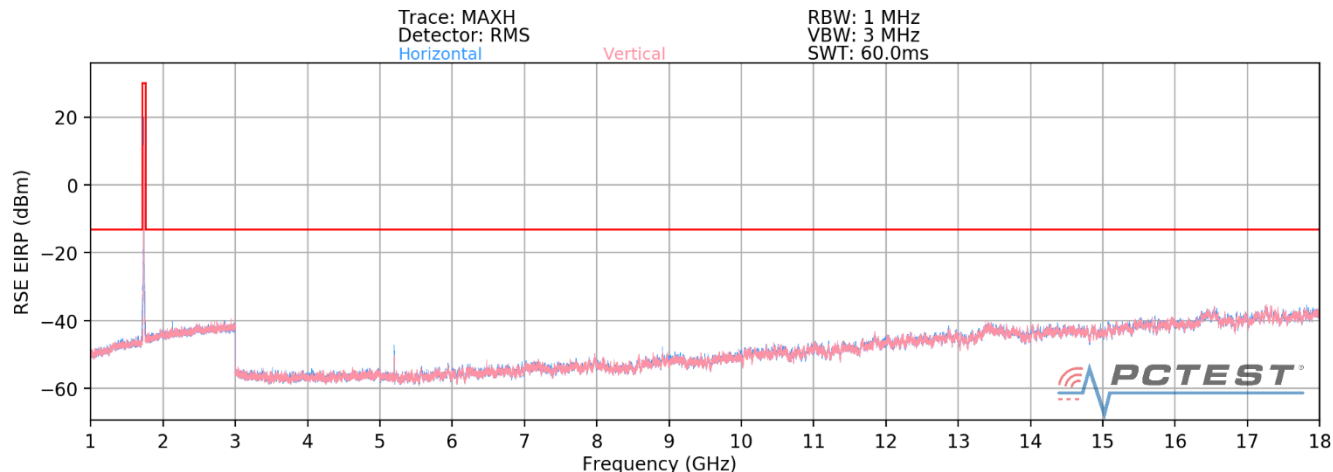

Plot 7-4. Radiated Spurious Plot above 1GHz (AWS WCDMA Mode)

OPERATING FREQUENCY: 1712.40 MHz

MODULATION SIGNAL: WCDMA

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	H	-	-	-67.43	6.20	-61.24	-48.2
5137.20	H	109	238	-57.99	8.66	-49.33	-36.3
6849.60	H	-	-	-66.82	8.77	-58.05	-45.0
8562.00	H	-	-	-65.58	9.12	-56.45	-43.5

Table 7-18. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 27 of 36

OPERATING FREQUENCY: 1732.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	H	-	-	-67.08	6.27	-60.82	-47.8
5197.80	H	101	233	-57.76	8.71	-49.05	-36.1
6930.40	H	-	-	-66.09	8.72	-57.37	-44.4
8663.00	H	-	-	-65.58	9.27	-56.31	-43.3

Table 7-19. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)


OPERATING FREQUENCY: 1752.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	H	-	-	-67.43	6.34	-61.09	-48.1
5257.80	H	124	238	-58.08	8.72	-49.36	-36.4
7010.40	H	-	-	-66.33	8.75	-57.58	-44.6
8763.00	H	-	-	-65.62	9.49	-56.13	-43.1

Table 7-20. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 28 of 36

PCS GPRS Mode

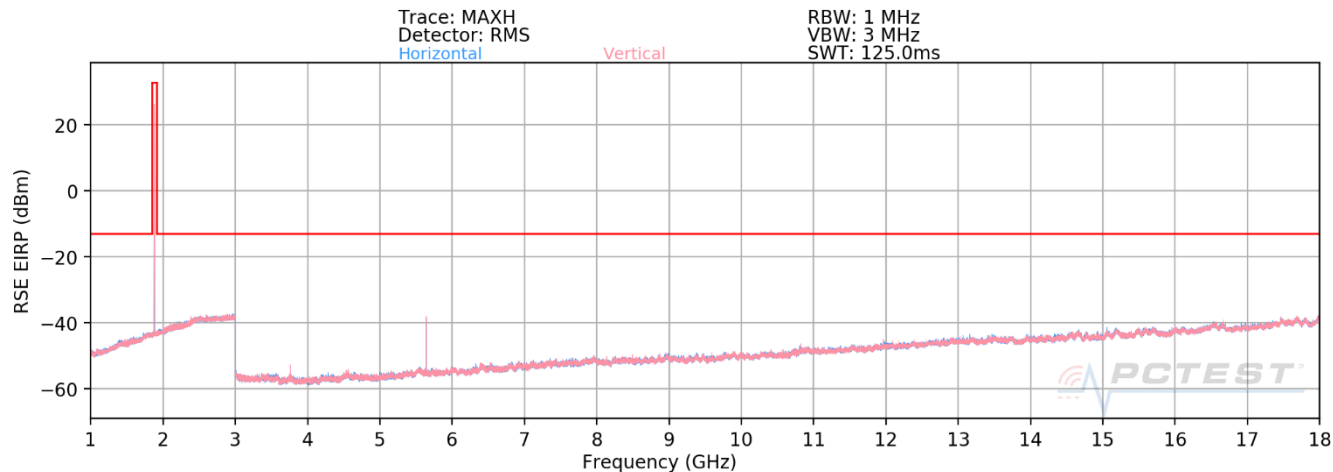

Plot 7-5. Radiated Spurious Plot above 1GHz (PCS GPRS Mode)

OPERATING FREQUENCY: 1850.20 MHz

MODULATION SIGNAL: GPRS (GMSK)

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	V	154	67	-65.19	6.56	-58.63	-45.6
5550.60	V	308	318	-51.95	8.72	-43.23	-30.2
7400.80	V	-	-	-62.49	8.41	-54.08	-41.1
9251.00	V	-	-	-63.44	9.47	-53.98	-41.0

Table 7-21. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 29 of 36

OPERATING FREQUENCY: 1880.00 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	172	328	-65.05	6.67	-58.38	-45.4
5640.00	V	107	325	-53.15	8.81	-44.34	-31.3
7520.00	V	-	-	-62.84	8.48	-54.36	-41.4
9400.00	V	-	-	-62.79	9.32	-53.47	-40.5

Table 7-22. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)

OPERATING FREQUENCY: 1909.80 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	V	116	164	-66.76	7.00	-59.77	-46.8
5729.40	V	103	133	-50.74	8.77	-41.97	-29.0
7639.20	V	-	-	-62.98	8.54	-54.44	-41.4
9549.00	V	-	-	-63.17	9.43	-53.74	-40.7

Table 7-23. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 30 of 36


OPERATING FREQUENCY: 1909.80 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	V	381	140	-65.46	6.67	-58.79	-45.8
5729.40	V	100	136	-50.77	8.81	-41.96	-29.0
7639.20	V	-	-	-63.10	8.48	-54.62	-41.6
9549.00	V	-	-	-62.73	9.32	-53.41	-40.4

Table 7-24. Radiated Spurious Data with WCP + DD (PCS GPRS Mode – Ch. 810)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 31 of 36

PCS CDMA Mode

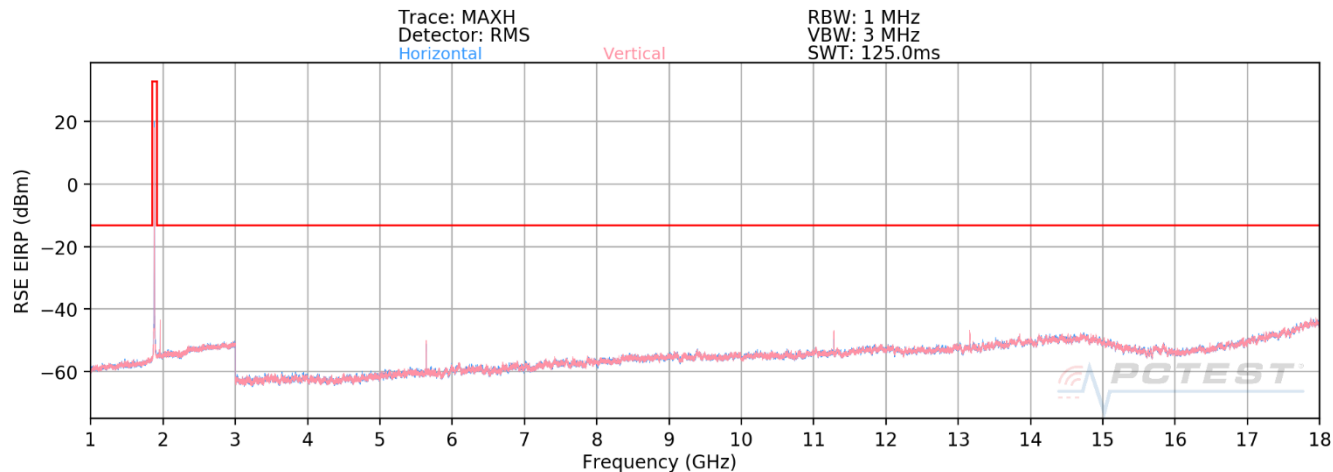

Plot 7-6. Radiated Spurious Plot above 1GHz (PCS CDMA Mode)

OPERATING FREQUENCY: 1851.25 MHz

MODULATION SIGNAL: CDMA

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3702.50	V	102	346	-65.39	6.56	-58.82	-45.8
5553.75	V	135	354	-58.52	8.72	-49.80	-36.8
7405.00	V	-	-	-63.98	8.41	-55.58	-42.6
9256.25	V	-	-	-63.96	9.45	-54.50	-41.5
11107.50	V	112	339	-55.15	9.31	-45.84	-32.8
12958.75	V	111	189	-51.72	8.99	-42.73	-29.7
14810.00	V	-	-	-58.74	8.63	-50.11	-37.1
16661.25	V	-	-	-54.11	7.72	-46.39	-33.4

Table 7-25. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 32 of 36

OPERATING FREQUENCY: 1880.00 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	102	341	-66.02	6.67	-59.35	-46.3
5640.00	V	150	327	-57.42	8.81	-48.61	-35.6
7520.00	V	-	-	-64.19	8.48	-55.71	-42.7
9400.00	V	-	-	-63.48	9.32	-54.16	-41.2
11280.00	V	113	342	-53.96	9.24	-44.73	-31.7
13160.00	V	116	194	-55.74	9.07	-46.67	-33.7
15040.00	V	-	-	-58.08	8.77	-49.32	-36.3
16920.00	V	-	-	-56.06	8.03	-48.03	-35.0

Table 7-26. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)


OPERATING FREQUENCY: 1908.75 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3817.50	V	123	349	-67.50	6.98	-60.51	-47.5
5726.25	V	138	350	-61.41	8.77	-52.64	-39.6
7635.00	V	-	-	-64.04	8.53	-55.50	-42.5
9543.75	V	-	-	-64.03	9.42	-54.61	-41.6
11452.50	V	113	201	-52.96	9.17	-43.79	-30.8
13361.25	V	112	190	-59.22	8.87	-50.35	-37.3
15270.00	V	-	-	-58.17	8.39	-49.78	-36.8
17178.75	V	-	-	-54.23	7.84	-46.39	-33.4

Table 7-27. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 33 of 36

PCS WCDMA Mode

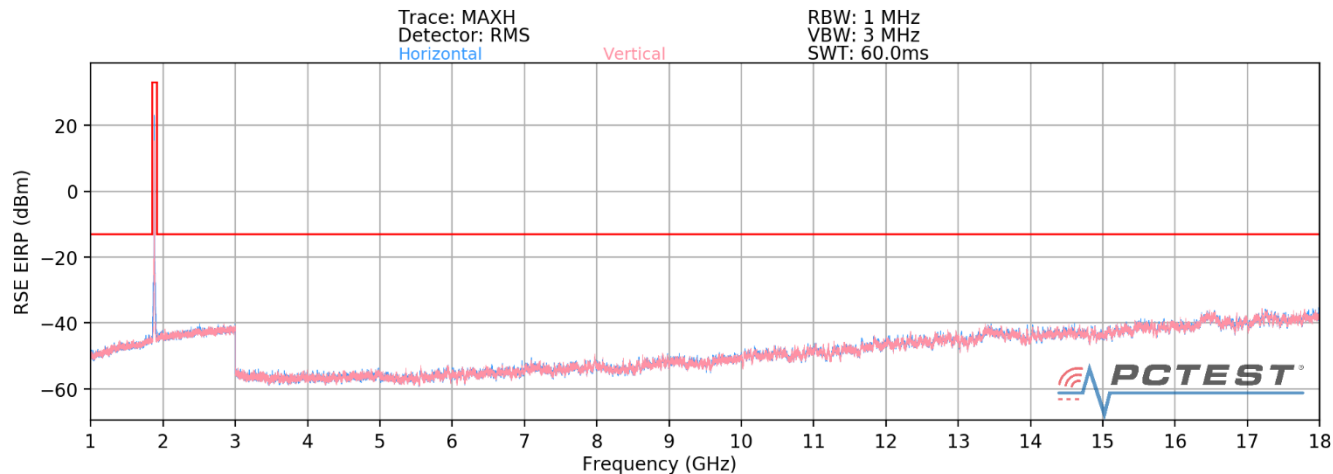

Plot 7-7. Radiated Spurious Plot above 1GHz (PCS WCDMA Mode)

OPERATING FREQUENCY: 1852.40 MHz

MODULATION SIGNAL: WCDMA

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	H	-	-	-68.37	6.57	-61.80	-48.8
5557.20	H	100	64	-58.43	8.72	-49.71	-36.7
7409.60	H	-	-	-65.17	8.41	-56.76	-43.8
9262.00	H	-	-	-65.13	9.44	-55.70	-42.7

Table 7-28. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 34 of 36

OPERATING FREQUENCY: 1880.00 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	-	-	-67.98	6.67	-61.31	-48.3
5640.00	H	118	51	-60.35	8.81	-51.54	-38.5
7520.00	H	-	-	-65.20	8.48	-56.72	-43.7
9400.00	H	-	-	-64.99	9.32	-55.67	-42.7

Table 7-29. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

OPERATING FREQUENCY: 1907.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	H	-	-	-68.69	6.97	-61.72	-48.7
5722.80	H	112	52	-59.22	8.77	-50.45	-37.5
7630.40	H	-	-	-65.17	8.52	-56.65	-43.6
9538.00	H	-	-	-65.59	9.42	-56.18	-43.2

Table 7-30. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 35 of 36

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFV600TM** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules.

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1912300226-02.ZNF	Test Dates: 1/21 - 2/15/2020	EUT Type: Portable Handset		Page 36 of 36