

TEST REPORT

Applicant: Dalian Cloud Force Technologies Co., Ltd.

Address of Applicant: Unit1, Block B, 6th Floor, No.23 Honggang Road, Ganjingzi District, Dalian, Liaoning Province, China

Manufacturer: Dalian Cloud Force Technologies Co., Ltd.

Address of Manufacturer: Unit1, Block B, 6th Floor, No.23 Honggang Road, Ganjingzi District, Dalian, Liaoning Province, China

Equipment Under Test (EUT)

Product Name: Wireless Motion Sensor

Model No.: MS1P

Series model: N/A

Trade Mark: Ubibot

FCC ID: 2AMFC-MS1P

IC: 24405-MS1P

Applicable standards: FCC Part 15.247
RSS 247 Issue 2, February 2017
RSS-GEN Issue 5
ANSI C63.10: 2013

Date of sample receipt: Sep.14,2020


Date of Test: Sep.14,2020- Apr.30,2021

Date of report issued: Apr.30,2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

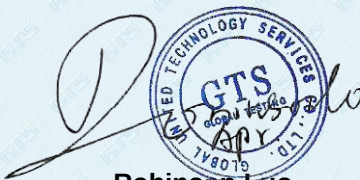

Robinson Luo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	Apr.30,2021	Original

Tested/ Prepared By:




Project Engineer

Date:

Apr.30,2021

Check By:



Reviewer

Date:

Apr.30,2021

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY	7
5.7 TEST LOCATION	7
5.8 ADDITIONAL INSTRUCTIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 CONDUCTED PEAK OUTPUT POWER	14
7.4 CHANNEL BANDWIDTH & 99% OCCUPY BANDWIDTH	15
7.5 POWER SPECTRAL DENSITY	21
7.6 BAND EDGES	24
7.6.1 Conducted Emission Method	24
7.6.2 Radiated Emission Method	26
7.7 SPURIOUS EMISSION	29
7.7.1 Conducted Emission Method	29
7.7.2 Radiated Emission Method	34
8 TEST SETUP PHOTO	42
9 EUT CONSTRUCTIONAL DETAILS	42

4 Test Summary

Test Item	Section	Result
AC Power Conducted Emission	RSS-Gen 8.8/515.107(a)S15.207	Pass
6dB Bandwidth & 99% Bandwidth	RSS 247 5.2(a)/ RSS-Gen 6.7/S15.247(a)(2)	Pass
Spurious RF Conducted Emission	RSS 247 5.5/\$15.247(d)	Pass
Maximum Peak Conducted Output Power	RSS 247 5.4 (d)/ S15.247(b)(3)	Pass
Power Spectral Density	RSS 247 5.2(b)/ g15.247(e)	Pass
Radiated Emissions	RSS-Gen 8.9/S 15.247(d)/15.209(a)	Pass
Band Edge	RSS-Gen 8.10/S15.247(b)(1)	Pass
Antenna gain	S15.247(b)(4)	Pass

Remark: Test according to ANSI C63.10:2013 and RSS-Gen

Pass: The EUT complies with the essential requirements in the standard.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Wireless Motion Sensor
Model No.:	MS1P
Series model:	N/A
Test sample(s) ID:	GTSL202104000279-1(Engineer sample) GTSL202104000279-2(Normal sample)
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(H20) Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	PCB Antenna
Antenna Gain:	0dBi
Power supply:	DC 5V/1A From External Circuit and AC 100-240V/50/60Hz
Adapter Information: (auxiliary test equipment supplied by test Lab)	Mode: CD122 Input: AC100-240V, 50/60Hz, 500mA Output: DC 5V, 2A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g/802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

5.3 Description of Support Units

None.

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: • FCC —Registration No.: 381383 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383. • IC —Registration No.: 9079A The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A • NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special AT test command provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	FARAD	EZ-EMC	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	FARAD	EZ-EMC	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTS565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data

7.1 Antenna requirement


Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
Standard requirement:	RSS-Gen Section 6.8
A transmitter can only be sold or operated with antennas with which it was approved. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power	
EUT Antenna:	
<i>The antennas are PCB Antenna, the best case gain of the antennas are 0dBi, reference to the appendix II for details</i>	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207 RSS Gen 8.8																			
Test Method:	ANSI C63.10:2013																			
Test Frequency Range:	150KHz to 30MHz																			
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																			
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * Decreases with the logarithm of the frequency.						Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																			
	Quasi-peak	Average																		
0.15-0.5	66 to 56*	56 to 46*																		
0.5-5	56	46																		
5-30	60	50																		
Test setup:	Reference Plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m																			
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.																			
Test Instruments:	Refer to section 6.0 for details																			
Test mode:	Refer to section 5.2 for details																			
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar														
Test voltage:	AC 120V, 60Hz																			
Test results:	Pass																			


Measurement data

Line:

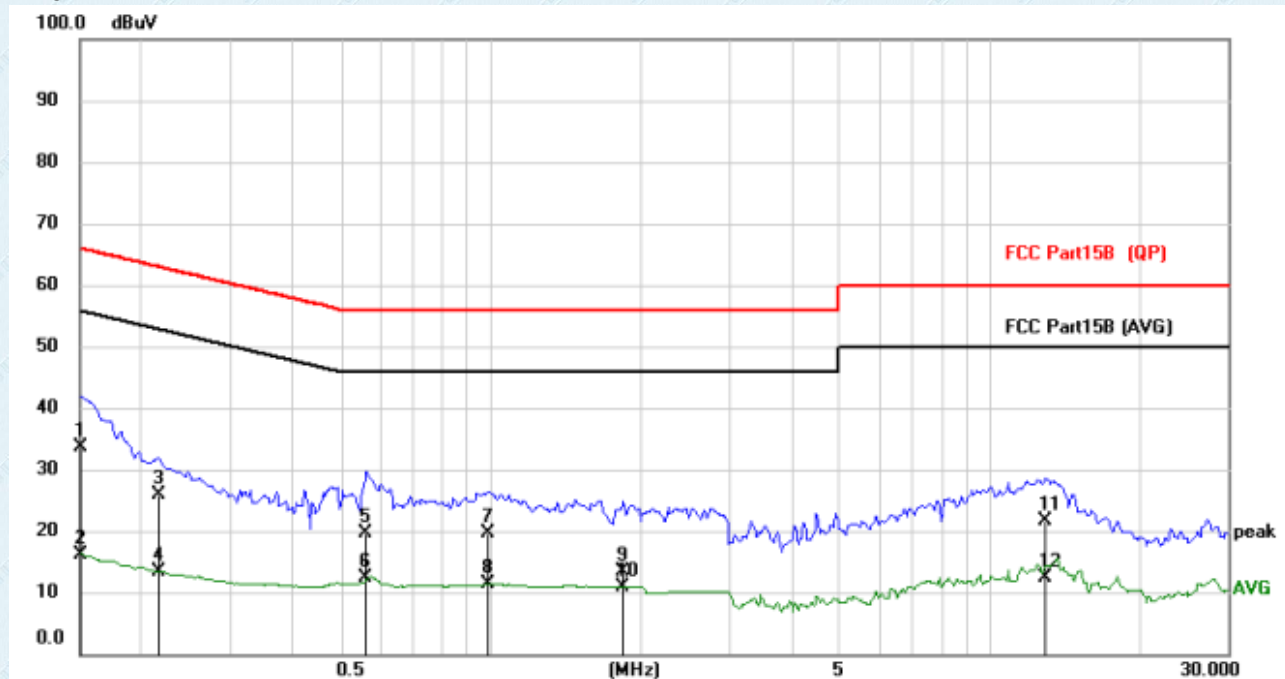

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
		MHz	Level	Factor	ment		
			dBuV	dB	dBuV	dBuV	dB
							Detector
1	*	0.1500	22.81	10.92	33.73	66.00	-32.27
2		0.1500	5.31	10.92	16.23	56.00	-39.77
3		0.2163	15.00	10.92	25.92	62.96	-37.04
4		0.2163	2.43	10.92	13.35	52.96	-39.61
5		0.5633	8.81	10.92	19.73	56.00	-36.27
6		0.5633	1.48	10.92	12.40	46.00	-33.60
7		0.9885	8.77	10.92	19.69	56.00	-36.31
8		0.9885	0.52	10.92	11.44	46.00	-34.56
9		1.8465	2.42	10.96	13.38	56.00	-42.62
10		1.8465	0.03	10.96	10.99	46.00	-35.01
11		12.8943	10.10	11.42	21.52	60.00	-38.48
12		12.8943	0.84	11.42	12.26	50.00	-37.74

Neutral:

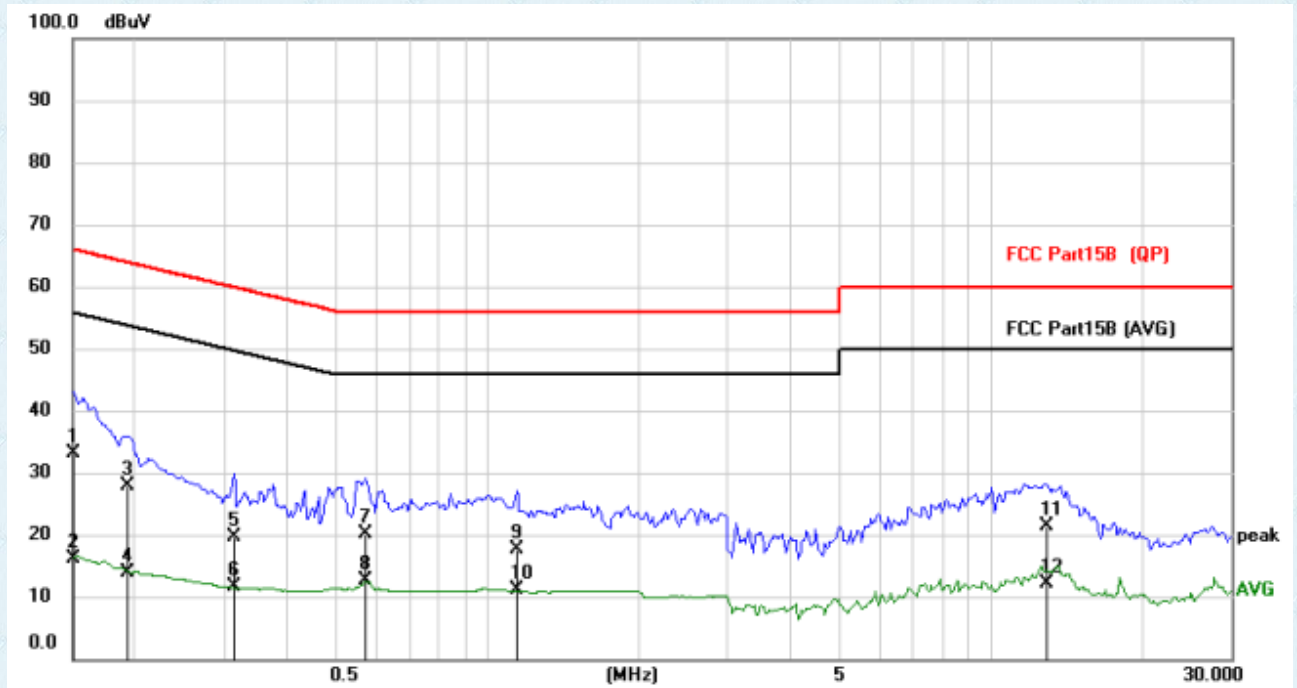


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	22.23	10.92	33.15	66.00	-32.85	QP
2		0.1500	5.19	10.92	16.11	56.00	-39.89	AVG
3		0.1929	16.93	10.92	27.85	63.91	-36.06	QP
4		0.1929	2.97	10.92	13.89	53.91	-40.02	AVG
5		0.3138	8.67	10.92	19.59	59.87	-40.28	QP
6		0.3138	0.68	10.92	11.60	49.87	-38.27	AVG
7		0.5751	9.31	10.92	20.23	56.00	-35.77	QP
8		0.5751	1.72	10.92	12.64	46.00	-33.36	AVG
9		1.1445	6.83	10.92	17.75	56.00	-38.25	QP
10		1.1445	0.18	10.92	11.10	46.00	-34.90	AVG
11		12.9138	9.88	11.42	21.30	60.00	-38.70	QP
12		12.9138	0.69	11.42	12.11	50.00	-37.89	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + Correct Factor
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.


7.3 Conducted Peak Output Power

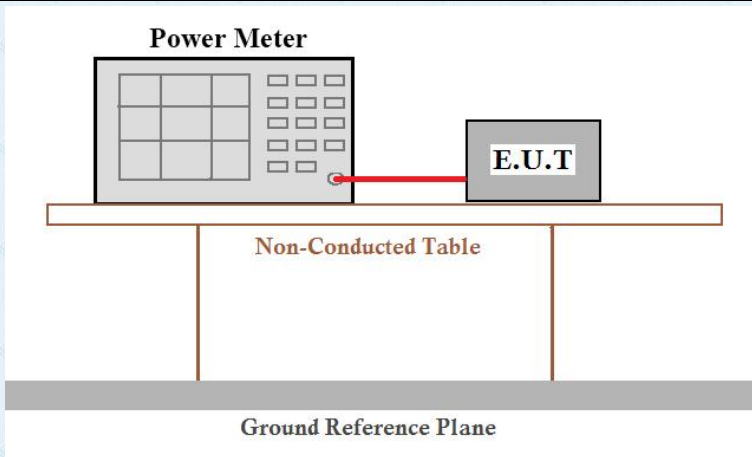Test Requirement :	FCC Part15 C Section 15.247 (b)(3) RSS 247 5.4(d)					
Test Method :	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	30dBm					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	24°C	Humid.:	53%	Press.:	1012mbar

Measurement Data

Test CH	Peak Output Power (dBm)			Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)		
Lowest	12.68	13.26	12.82	30.00	Pass
Middle	12.67	14.34	13.93		
Highest	12.61	13.82	13.66		

7.4 Channel Bandwidth & 99% Occupancy Bandwidth

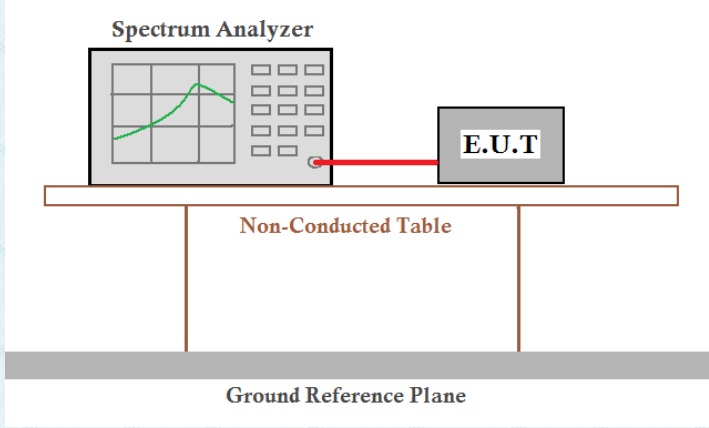Test Requirement :	FCC Part15 C Section 15.247 (a)(2) RSS 247 5.2(a)					
Test Method :	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	>500KHz					
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	24°C	Humid.:	53%	Press.:	1012mbar



Measurement Data

Test CH	Channel Bandwidth (MHz)			Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)		
Lowest	9.111	15.813	16.413	>500	Pass
Middle	8.607	15.774	16.388		
Highest	9.077	16.427	17.631		



Test CH	99% Occupy Bandwidth			Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)		
Lowest	12.232	17.301	18.041	>500	Pass
Middle	11.480	17.026	17.841		
Highest	12.156	17.461	18.173		

Test plot as follows: Channel Bandwidth



802.11b	802.11g
---------	---------

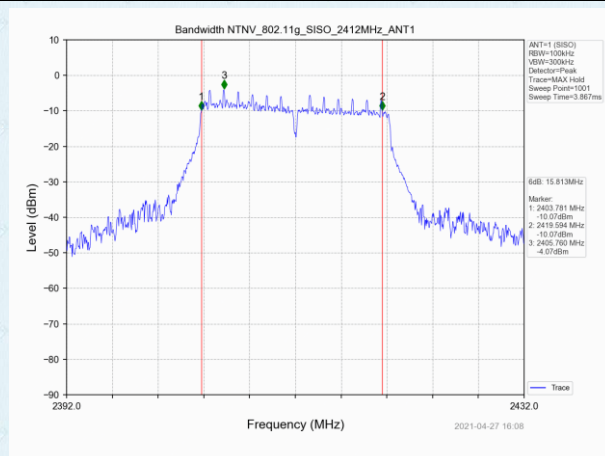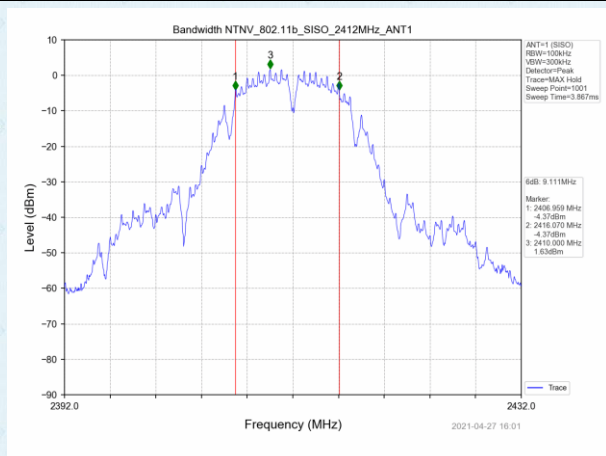

Lowest channel

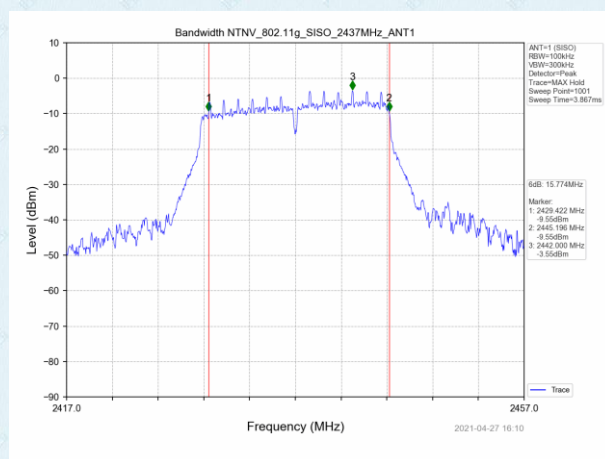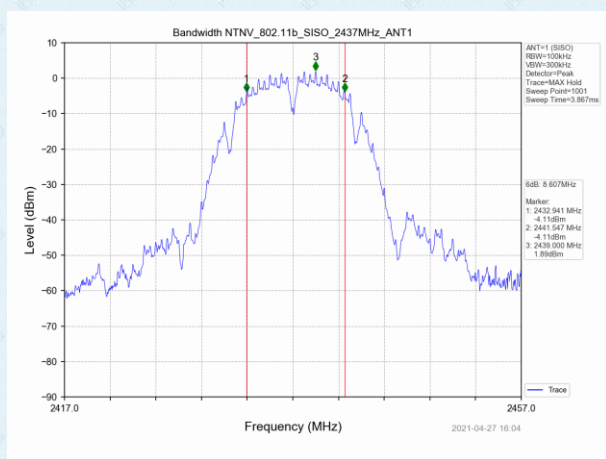


Middle channel

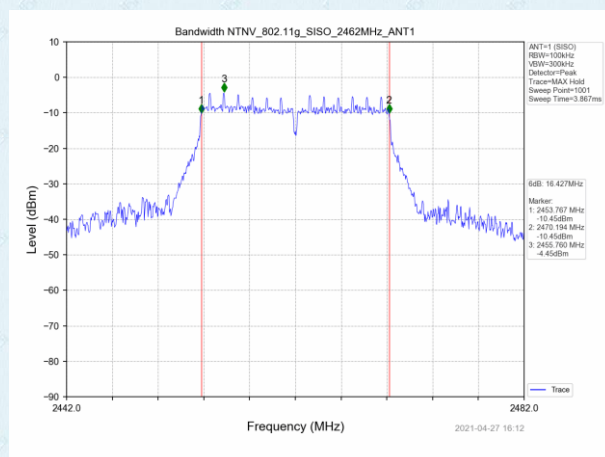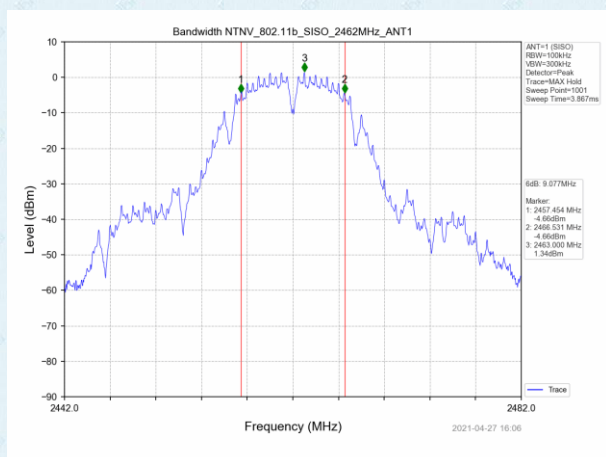


Highest channel


802.11n

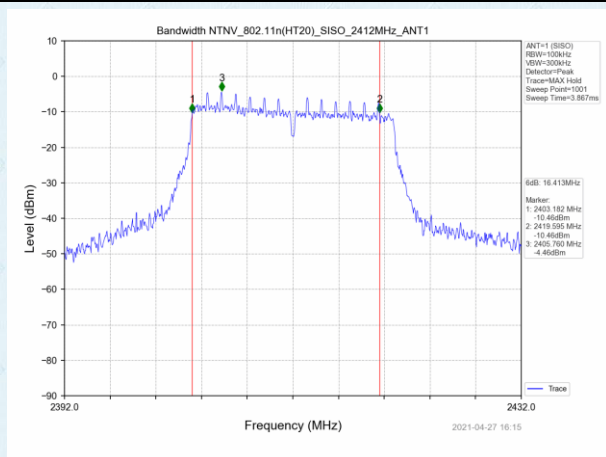

Lowest channel

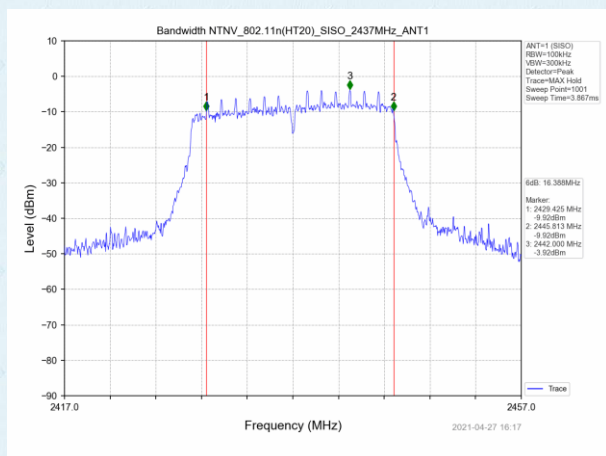



Middle channel

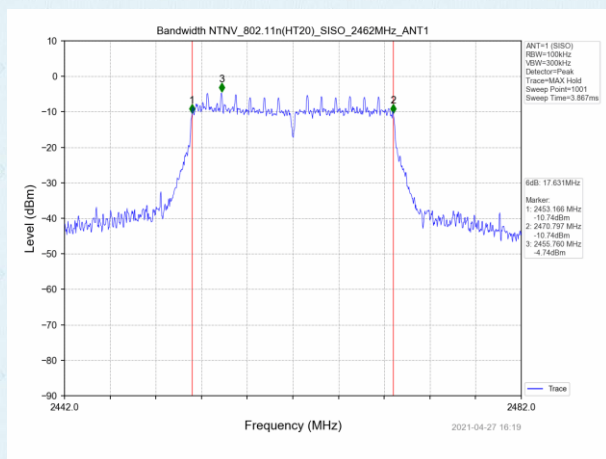



Highest channel

Test plot as follows: 99% Occupy Bandwidth



802.11b	802.11g
---------	---------

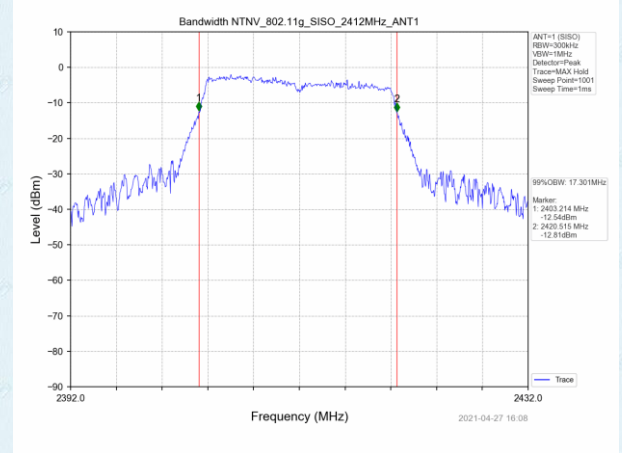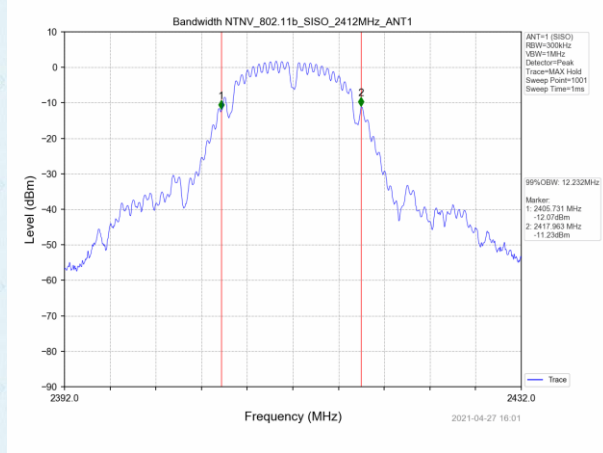

Lowest channel

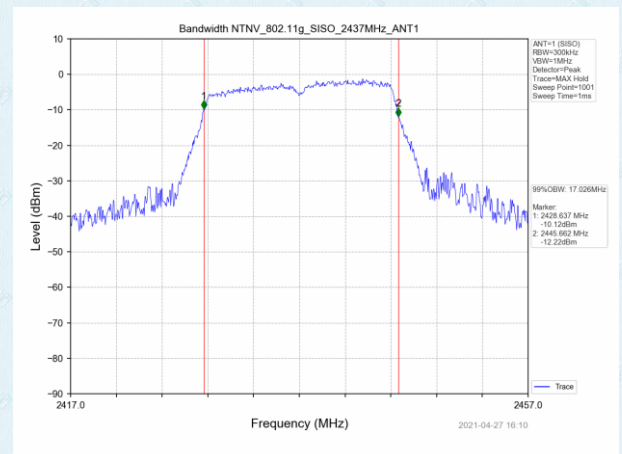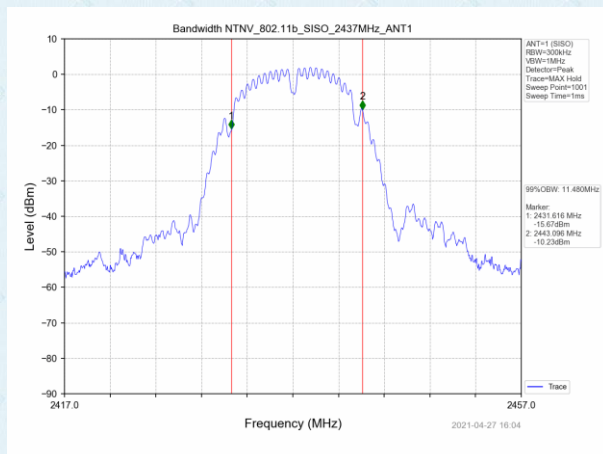


Middle channel

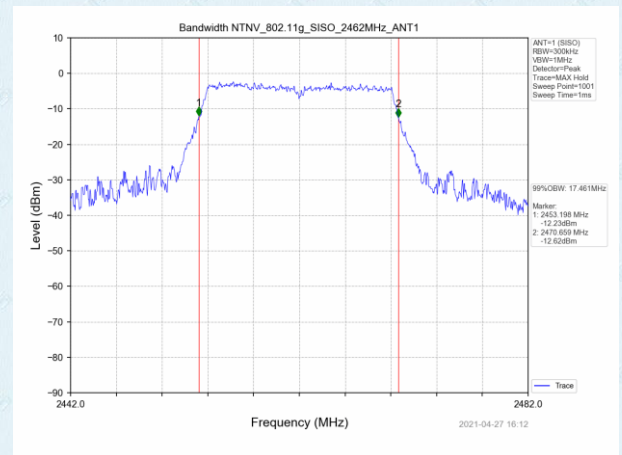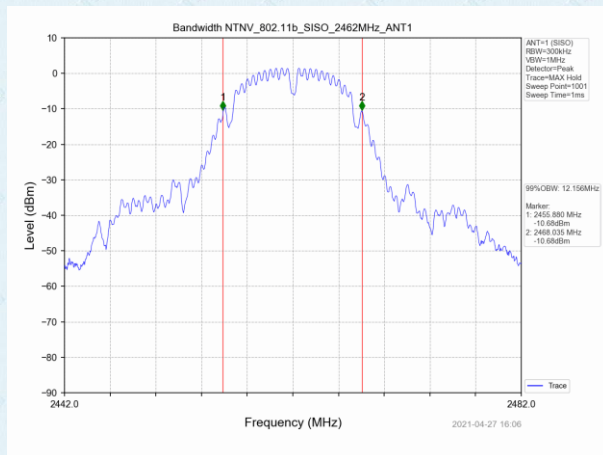


Highest channel


802.11n

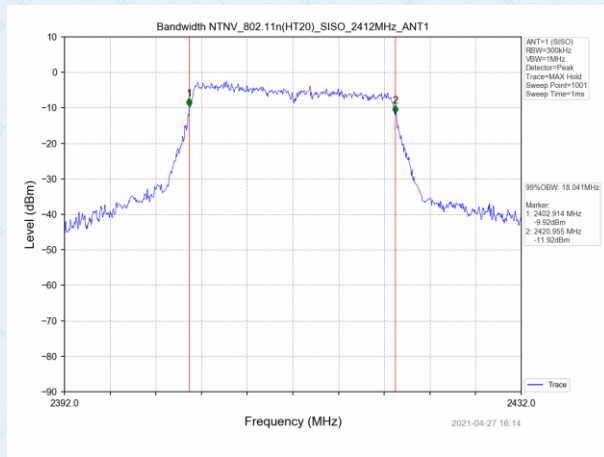

Lowest channel

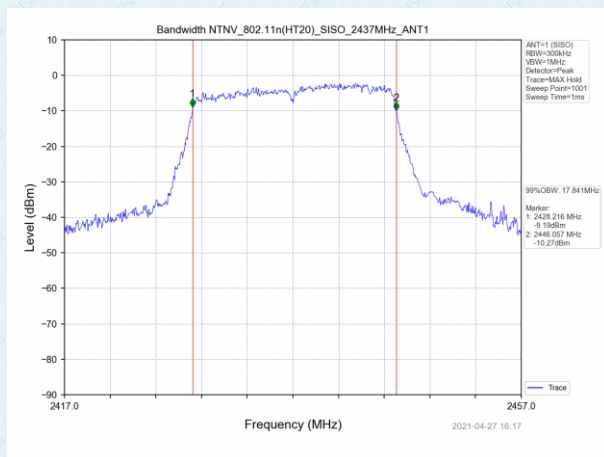


Middle channel

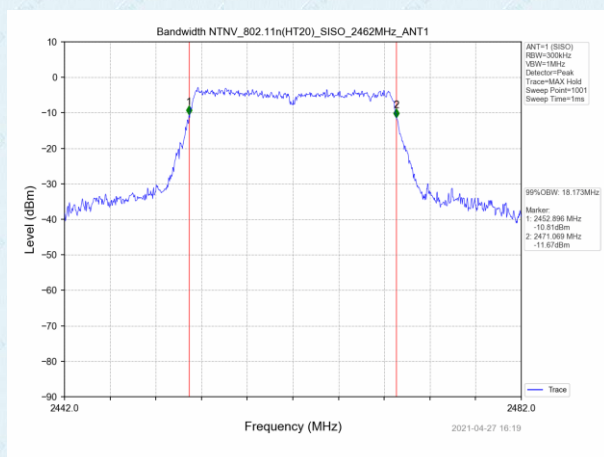

Highest channel

7.5 Power Spectral Density


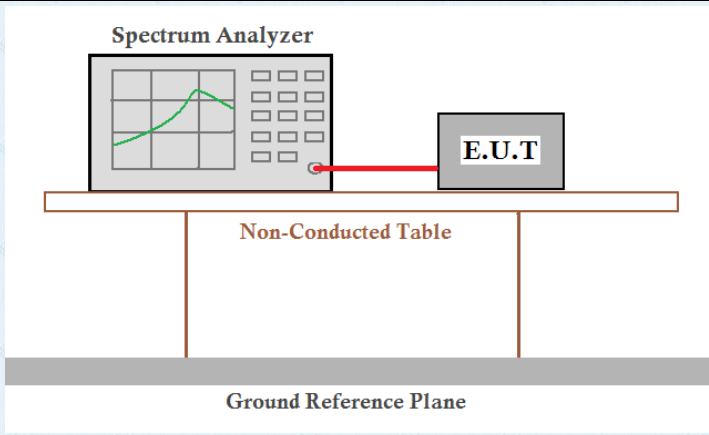
Test Requirement:	FCC Part15 C Section 15.247 (e) RSS 247 5.2(b)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	8dBm/3kHz					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	24°C	Humid.:	53%	Press.:	1012mbar

Measurement Data



Test CH	Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)	Result
	802.11b	802.11g	802.11n(HT20)		
Lowest	-4.65	-18.34	-18.34	8.00	Pass
Middle	-3.54	-18.11	-18.13		
Highest	-13.47	-19.98	-16.95		

Test plot as follows:



802.11b	802.11g
---------	---------

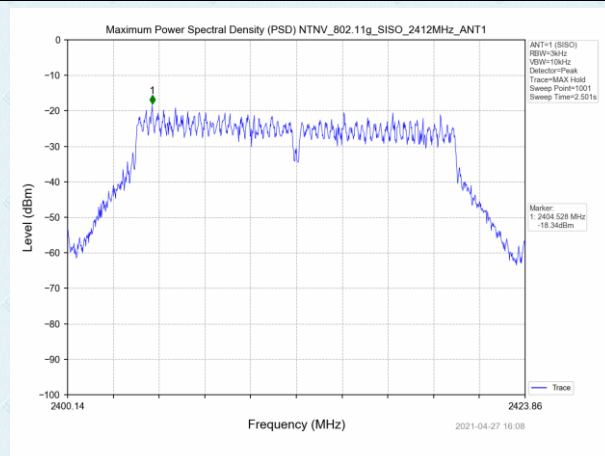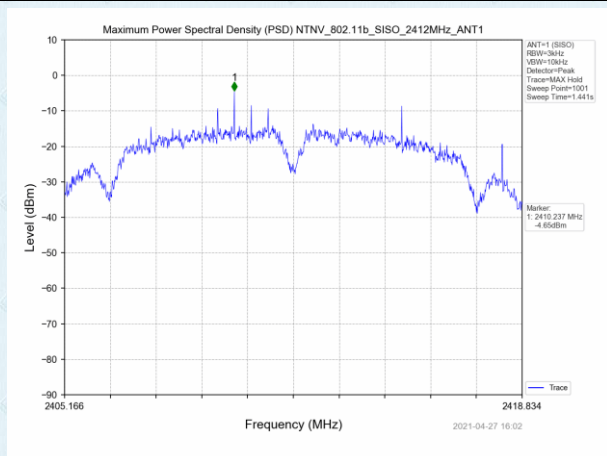

Lowest channel

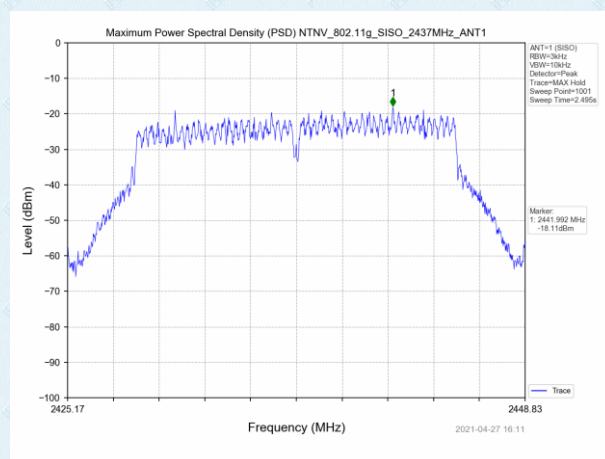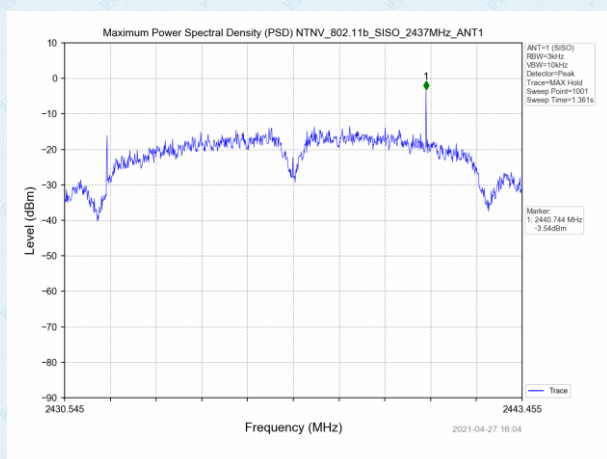


Middle channel

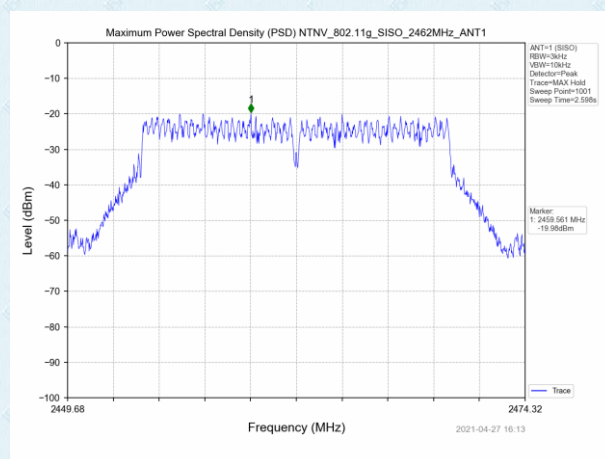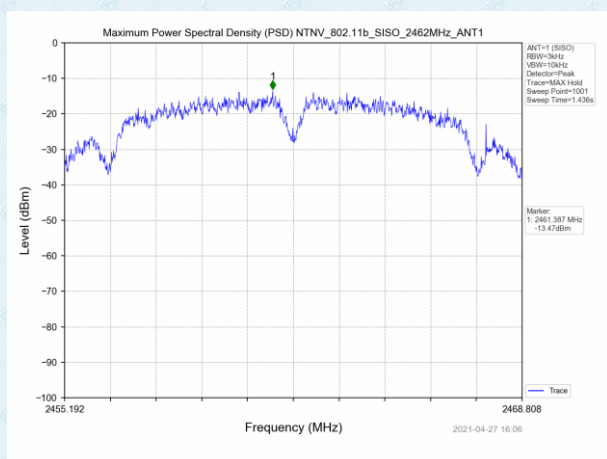


Highest channel


802.11n

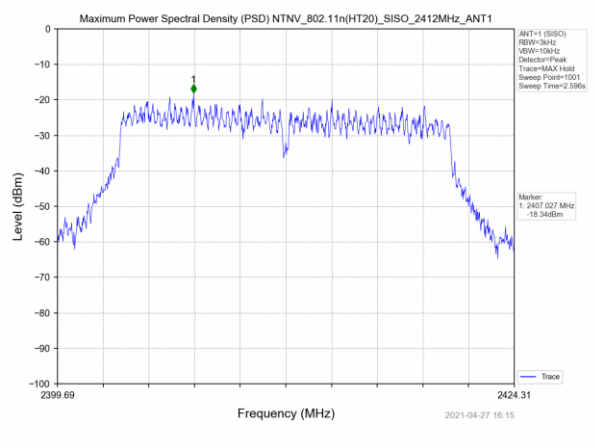

Lowest channel

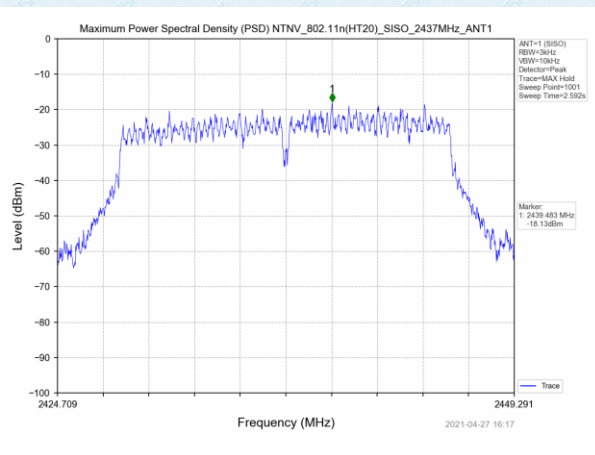


Middle channel

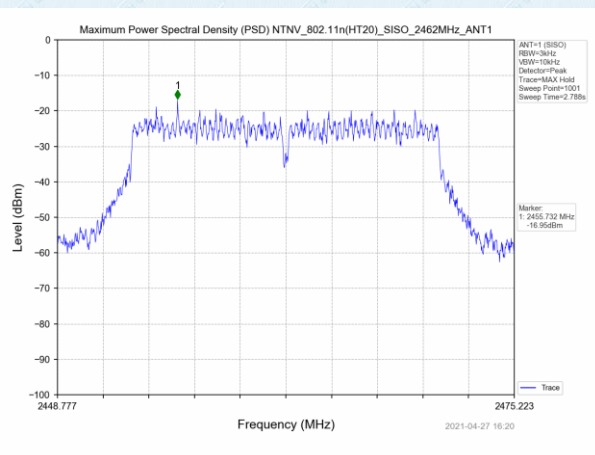

Highest channel


7.6 Band edges

7.6.1 Conducted Emission Method

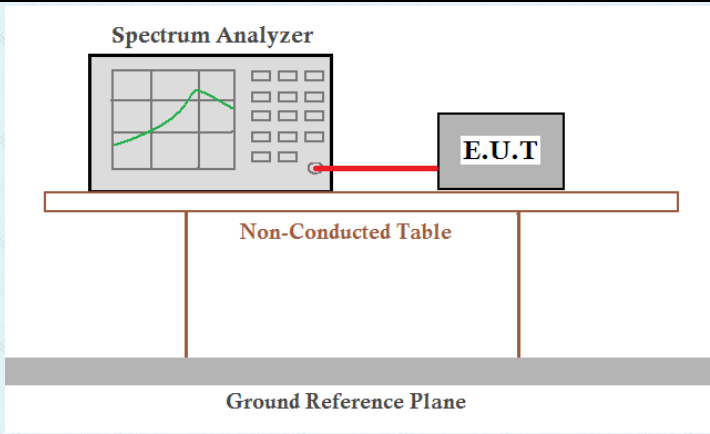
Test Requirement:	FCC Part15 C Section 15.247 (d) RSS-Gen 8.10					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which sits on a Ground Reference Plane.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	24°C	Humid.:	53%	Press.:	1012mbar

Test plot as follows:

Test mode:	802.11b
------------	---------

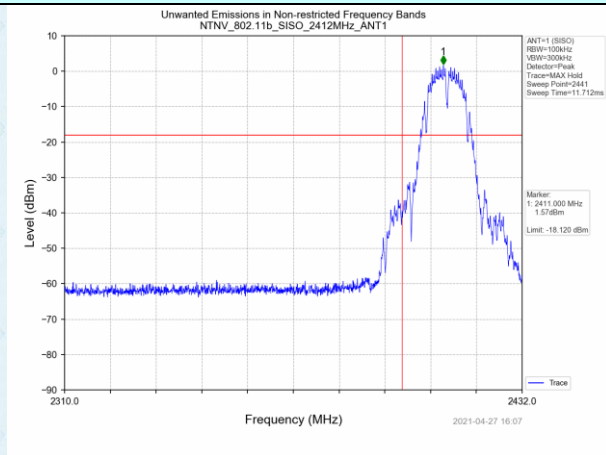


Lowest channel

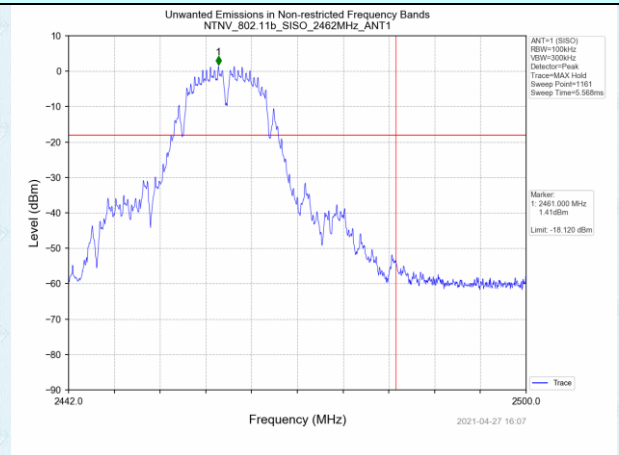


Highest channel

Test mode:	802.11g
------------	---------

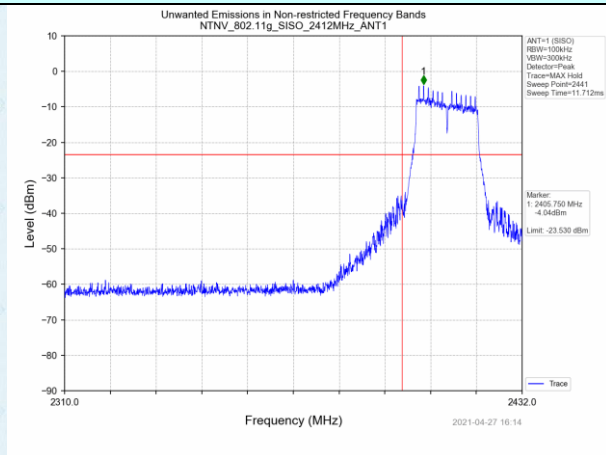


Lowest channel

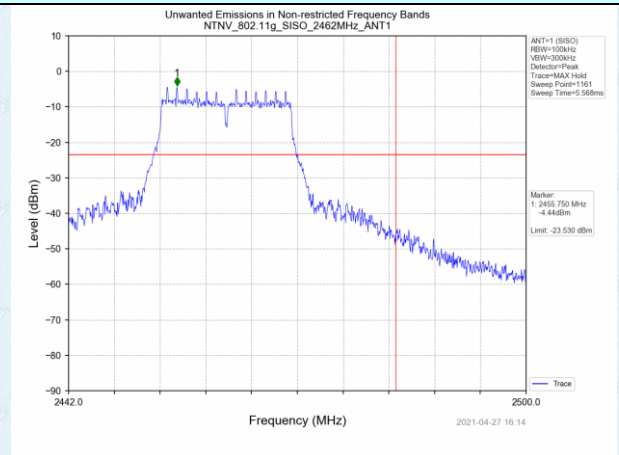


Highest channel

Test mode:	802.11n(HT20)
------------	---------------

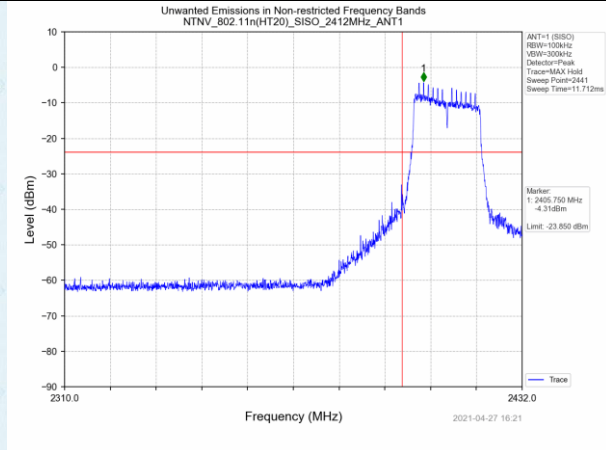


Lowest channel

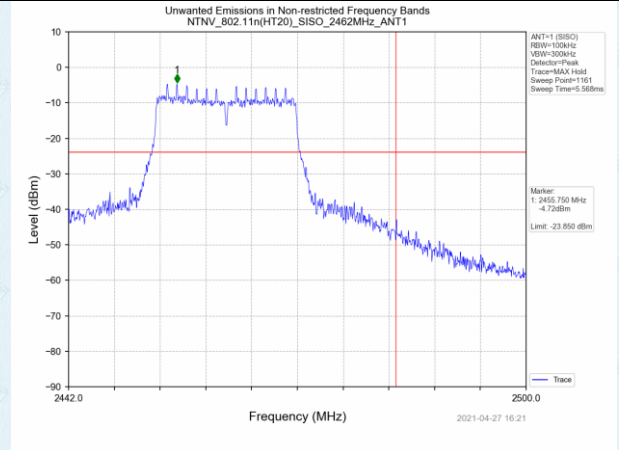

Highest channel

7.6.2 Radiated Emission Method

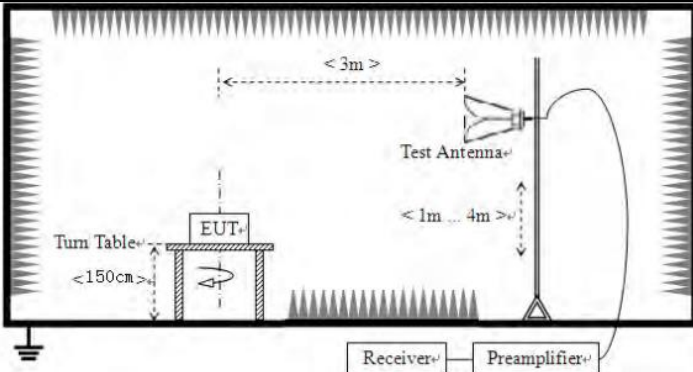Test Requirement:	FCC Part15 C Section 15.209 and 15.205 RSS-Gen 8.9				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Measurement data:

Note: 802.11b/802.11g/802.11n (H20) and all have been tested, only worse case 802.11b is reported

Horizontal: 802.11b Mode TX CH Low (2412MHz)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	66.79	-5.68	61.11	74.00	-12.89	peak
2390	46.59	-5.68	40.91	54.00	-13.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical: 802.11b Mode TX CH Low (2412MHz)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	66.58	-5.68	60.90	74.00	-13.10	peak
2390	49.35	-5.68	43.67	54.00	-10.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Horizontal: 802.11b Mode TX CH HIGH (2462MHz)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	63.35	-5.85	57.50	74.00	-16.50	peak
2483.5	47.58	-5.85	41.73	54.00	-12.27	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical: 802.11b Mode TX CH HIGH (2462MHz)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	63.58	-5.65	57.93	74.00	-16.07	peak
2483.5	47.59	-5.85	41.74	54.00	-12.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						


7.7 Spurious Emission

7.7.1 Conducted Emission Method

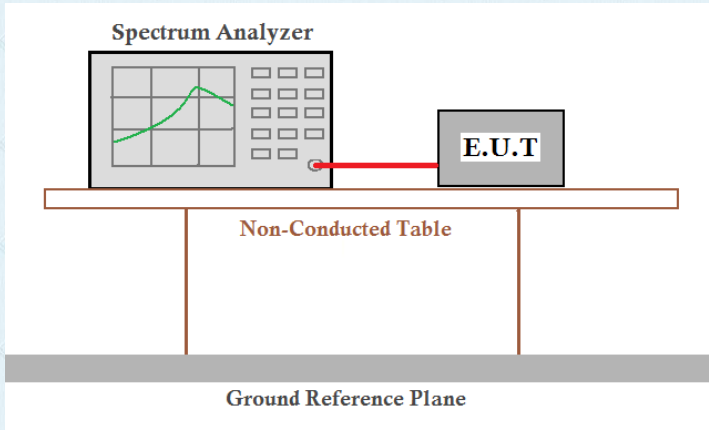
Test Requirement:	FCC Part15 C Section 15.247 (d) RSS-Gen 8.9					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which sits on a Ground Reference Plane.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	24°C	Humid.:	53%	Press.:	1012mbar

Test plot as follows:


Reference

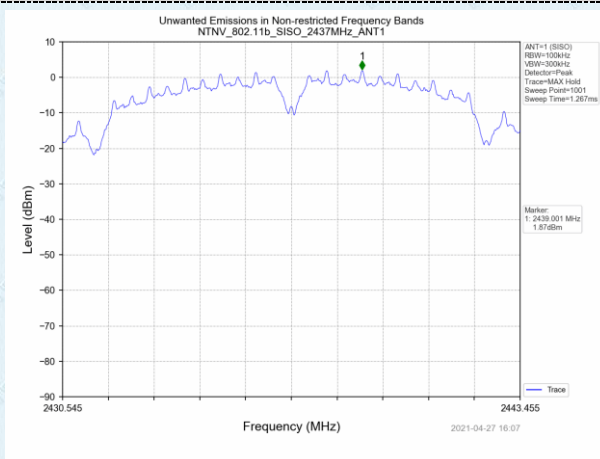

802.11b

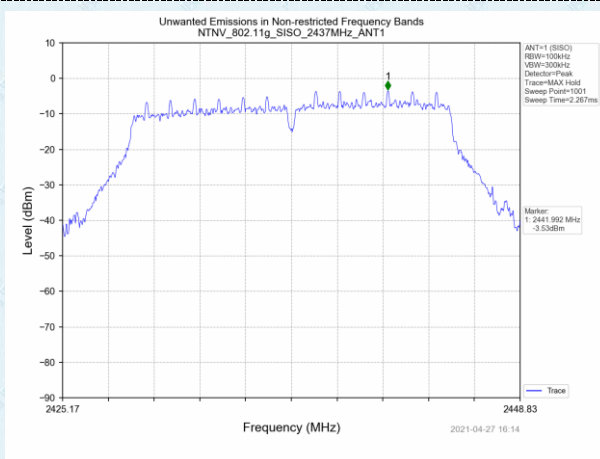


802.11g

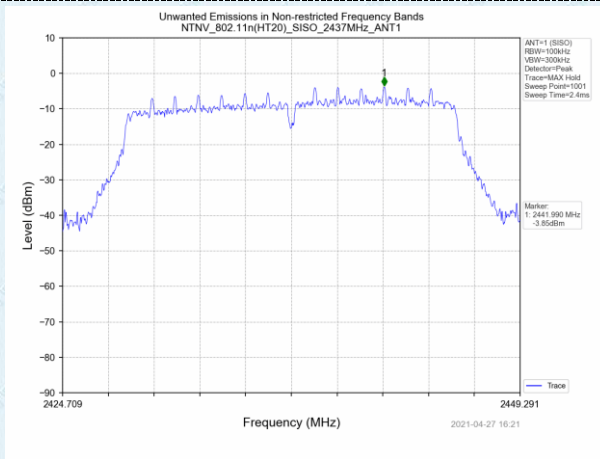


802.11n(HT20)


802.11b

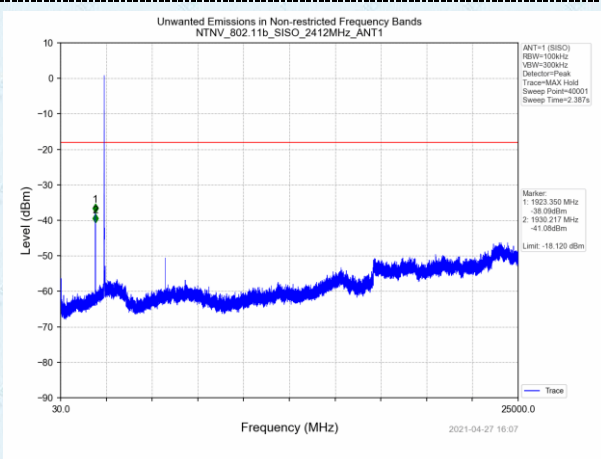

CH01

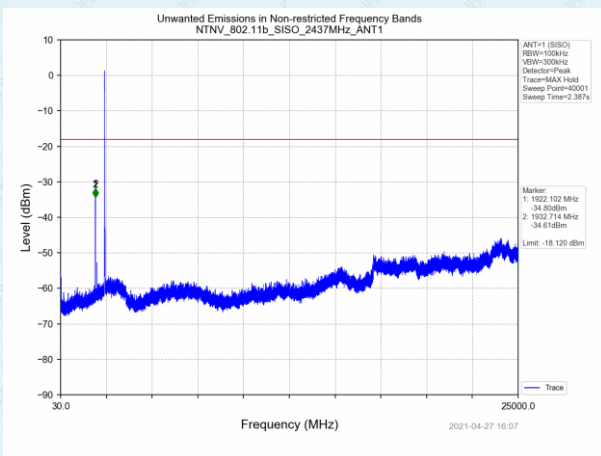


CH06

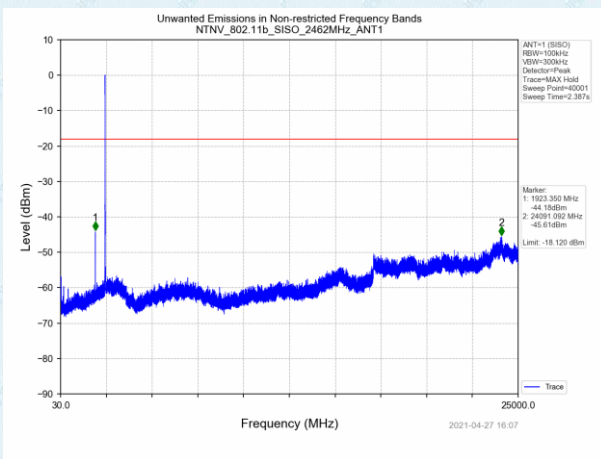


CH11


802.11g

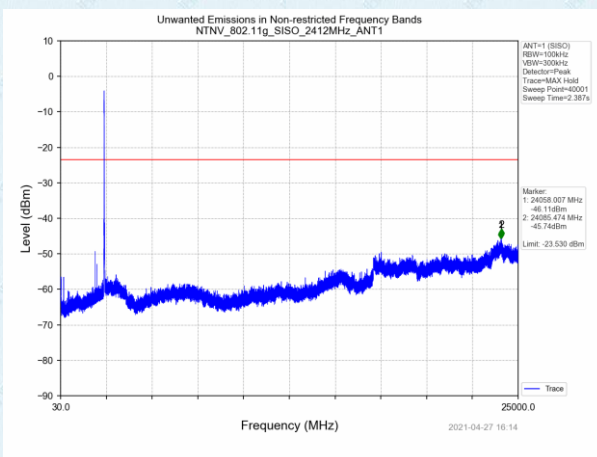

CH01

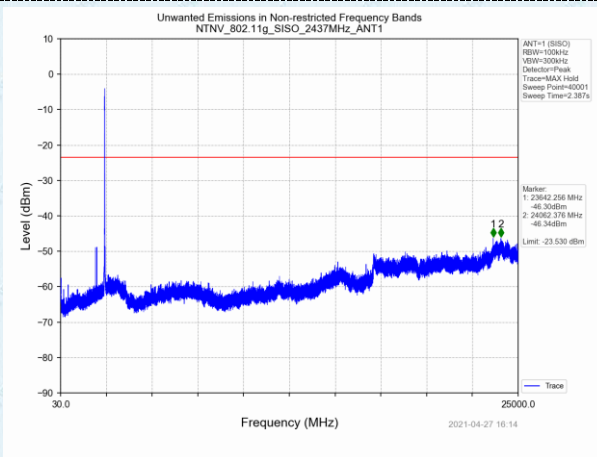


CH06

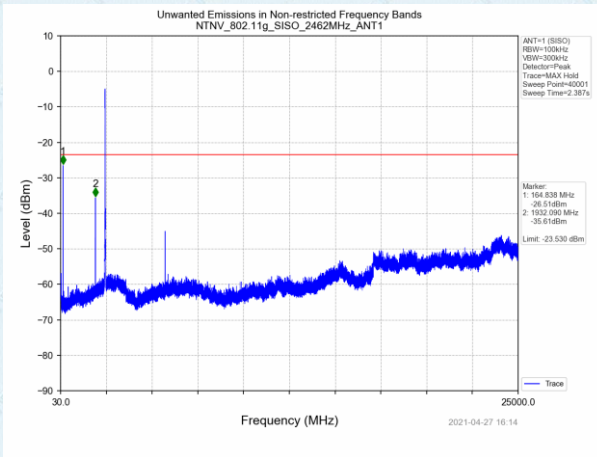


CH11


802.11n(HT20)

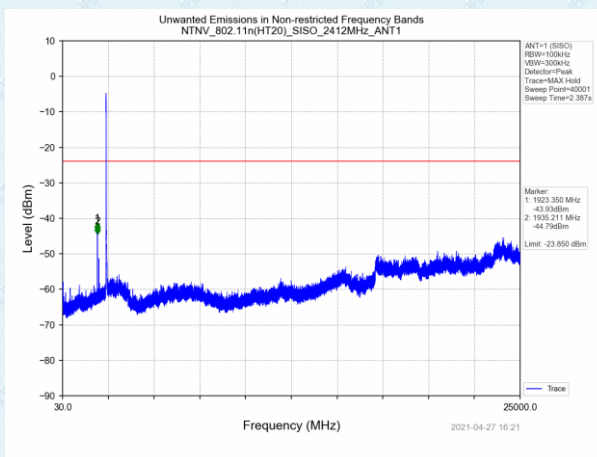

CH01

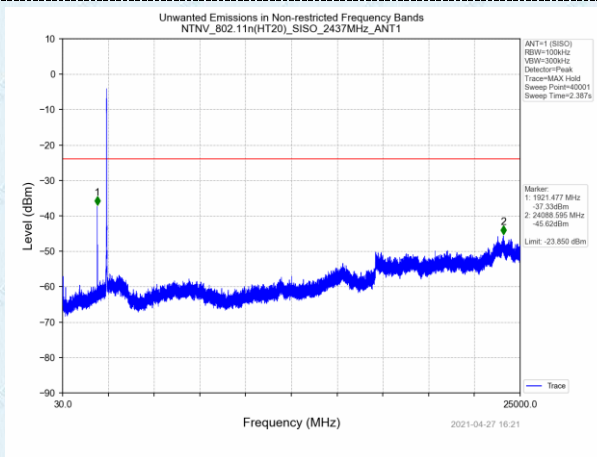




CH06

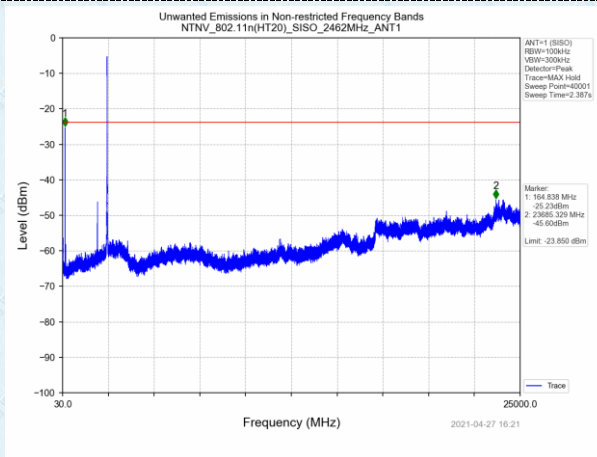

CH11

7.7.2 Radiated Emission Method

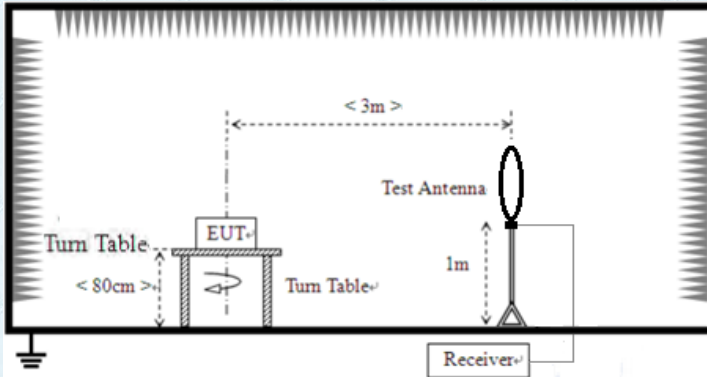Test Requirement:	FCC Part15 C Section 15.209 RSS-Gen 8.9				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
For radiated emissions from 30MHz to 1GHz					

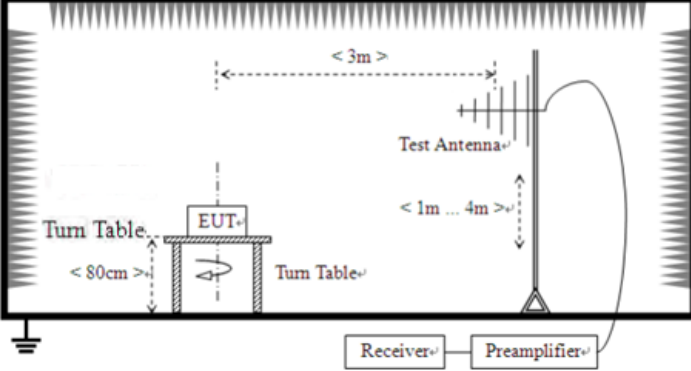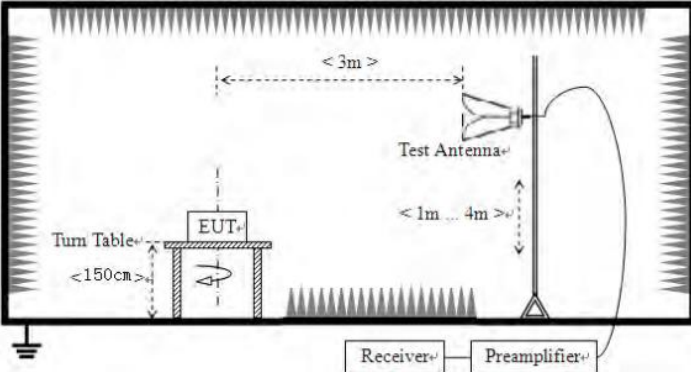	 For radiated emissions above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details

Test voltage:	AC120V 60Hz					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remarks:

1. Only the worst case Main Antenna test data.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.


Measurement data:

■ **9kHz~30MHz**

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

■ Below 1GHz


Horizontal:

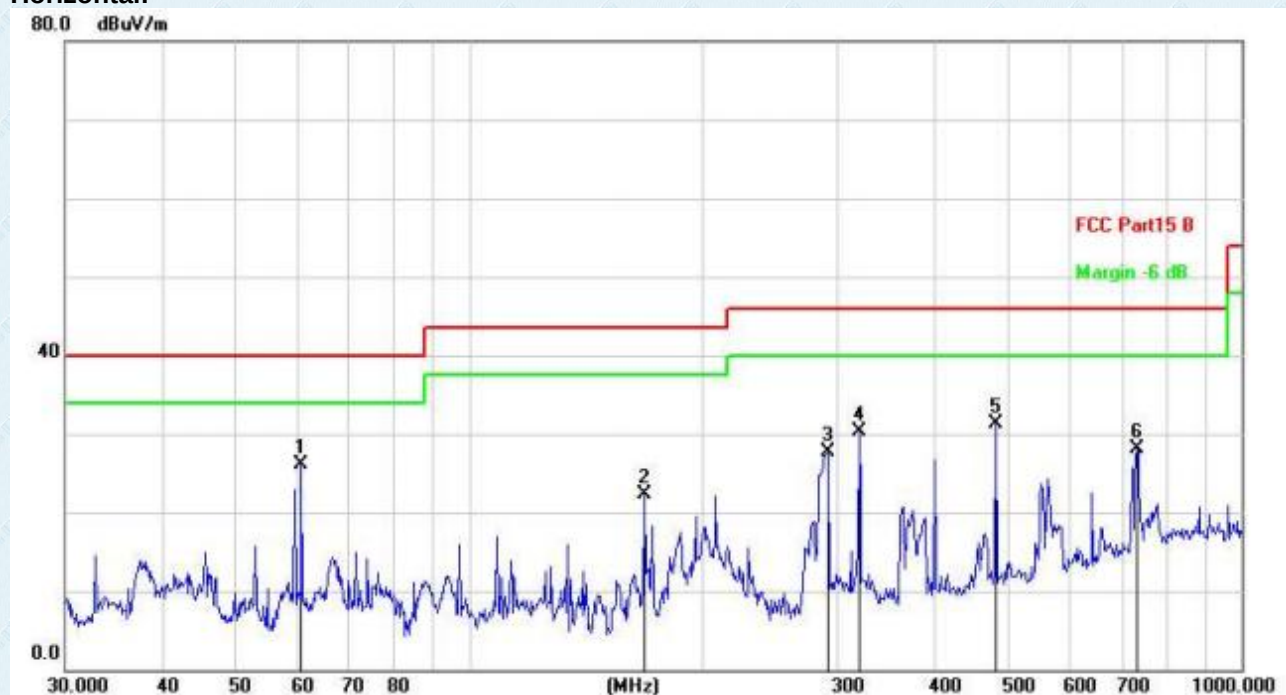

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	60.7044	45.01	-18.83	26.18	40.00	-13.82	QP
2		169.0054	38.62	-16.33	22.29	43.50	-21.21	QP
3		291.0360	46.37	-18.59	27.78	46.00	-18.22	QP
4		319.9370	48.47	-18.12	30.35	46.00	-15.65	QP
5		480.5276	47.01	-15.67	31.34	46.00	-14.66	QP
6		731.9203	39.44	-11.27	28.17	46.00	-17.83	QP

Final Level = Receiver Read level + Correct Factor

Vertical:

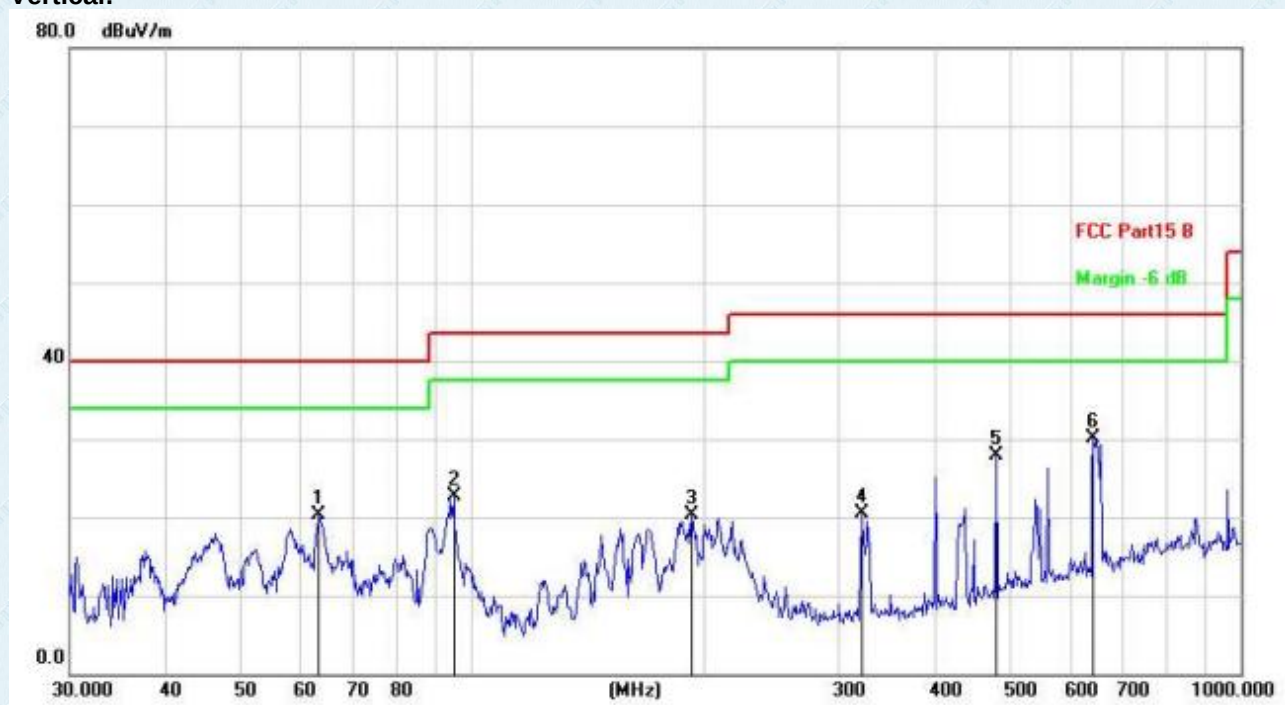

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		63.3132	39.48	-19.14	20.34	40.00	-19.66	QP
2		94.7601	43.54	-20.93	22.61	43.50	-20.89	QP
3		193.0945	40.34	-19.98	20.36	43.50	-23.14	QP
4		321.0608	38.03	-17.52	20.51	46.00	-25.49	QP
5		480.5276	43.51	-15.67	27.84	46.00	-18.16	QP
6	*	642.8613	42.77	-12.63	30.14	46.00	-15.86	QP

Final Level = Receiver Read level + Correct Factor

■ Above 1GHz

Note: 802.11b/802.11g/802.11n (H20) and all have been tested, only worse case 802.11b is reported

Horizontal: LOW CH1 (802.11b Mode)/2412

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.33	-3.67	59.66	74.00	-14.34	peak
4824	45.28	-3.64	41.64	54.00	-12.36	AVG
7236	58.66	-0.90	57.76	74.00	-16.24	peak
7236	42.31	-0.90	41.41	54.00	-12.59	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical: LOW CH1 (802.11b Mode)/2412

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.79	-3.67	60.12	74.00	-13.88	peak
4824	45.22	-3.64	41.58	54.00	-12.42	AVG
7236	56.79	-0.90	55.89	74.00	-18.11	peak
7236	42.32	-0.90	41.42	54.00	-12.58	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Horizontal: MID CH6 (802.11b Mode)/2437

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	61.35	-3.53	57.82	74.00	-16.18	peak
4874	46.59	-3.53	43.06	54.00	-10.94	AVG
7311	56.58	-0.85	55.73	74.00	-18.27	peak
7311	42.16	-0.85	41.31	54.00	-12.69	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical: MID CH6 (802.11b Mode)/2437

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	61.34	-3.53	57.81	74.00	-16.19	peak
4874	45.79	-3.53	42.26	54.00	-11.74	AVG
7311	56.93	-0.85	56.08	74.00	-17.92	peak
7311	42.96	-0.85	42.11	54.00	-11.89	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Horizontal: HIGH CH11 (802.11b Mode)/2462

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.59	-3.49	60.10	74.00	-13.90	peak
4924	47.58	-3.49	44.09	54.00	-9.91	AVG
7386	58.62	-0.78	57.84	74.00	-16.16	peak
7386	40.32	-0.78	39.54	54.00	-14.46	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical: HIGH CH11 (802.11b Mode)/2462

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.39	-3.49	58.90	74.00	-15.10	peak
4924	46.58	-3.49	43.09	54.00	-10.91	AVG
7386	58.36	-0.78	57.58	74.00	-16.42	peak
7386	41.33	-0.78	40.55	54.00	-13.45	AVG
---	---	---	---	---	---	---
---	---	---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

(1) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(2) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed.

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----