




WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

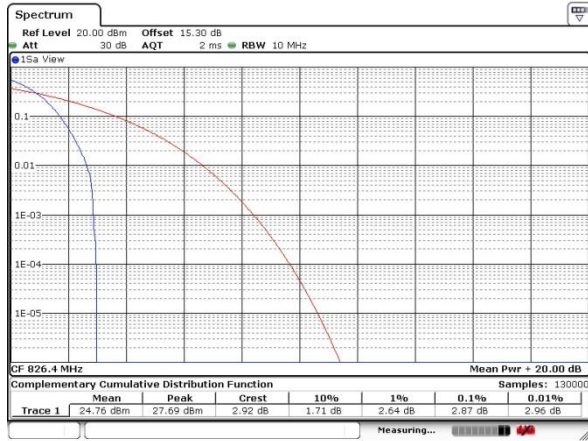

Date: 2 JUL 2021 07:04:01

WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

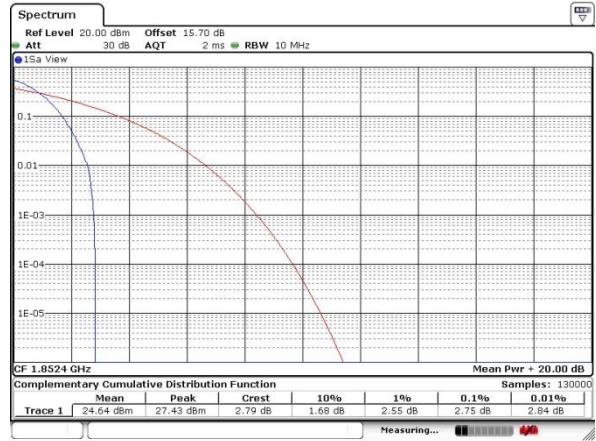


Date: 2 JUL 2021 07:21:10

Middle Channel



Date: 2 JUL 2021 07:04:15

Middle Channel

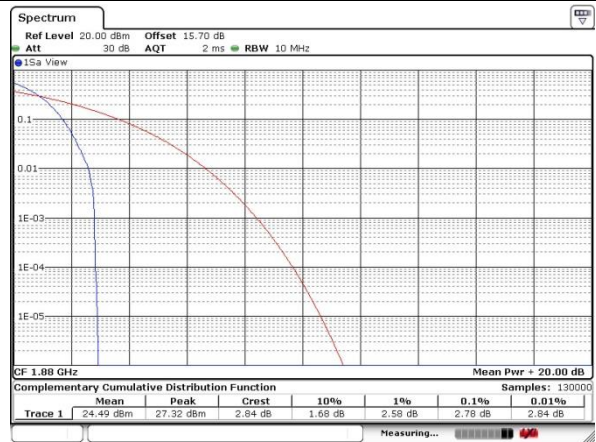


Date: 2 JUL 2021 07:21:23

Highest Channel



Date: 2 JUL 2021 07:04:34

Highest Channel

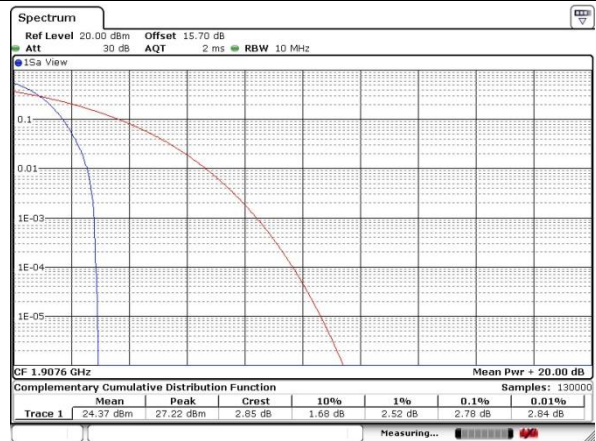


Date: 2 JUL 2021 07:21:37




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

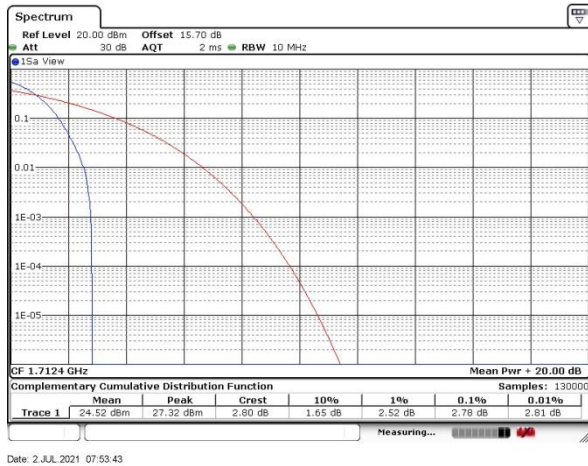

Middle Channel

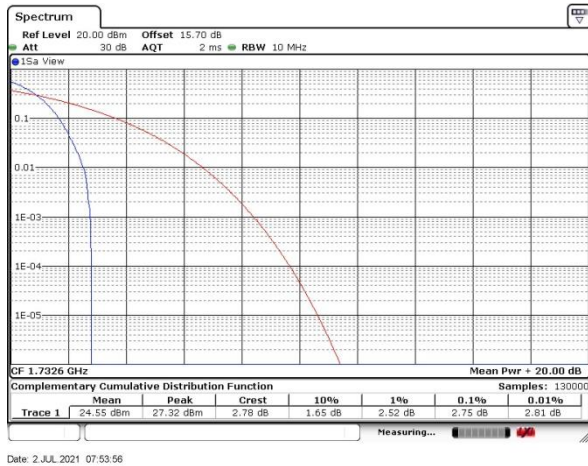

Highest Channel

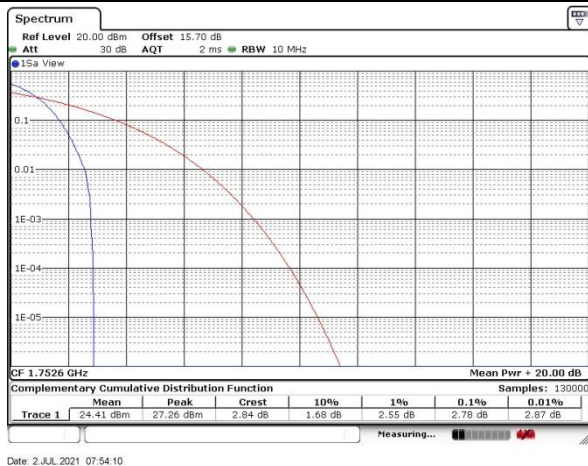




26dB Bandwidth

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.72	4.73	4.74
Middle CH	4.71	4.73	4.73
Highest CH	4.71	4.73	4.73



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

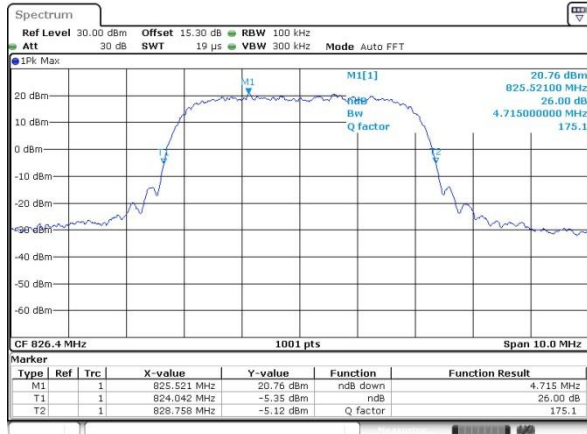

Date: 2 JUL 2021 06:55:17


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

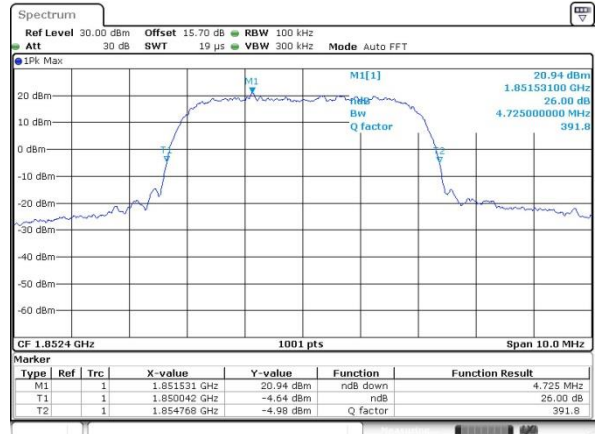


Date: 2 JUL 2021 07:13:37

Middle Channel

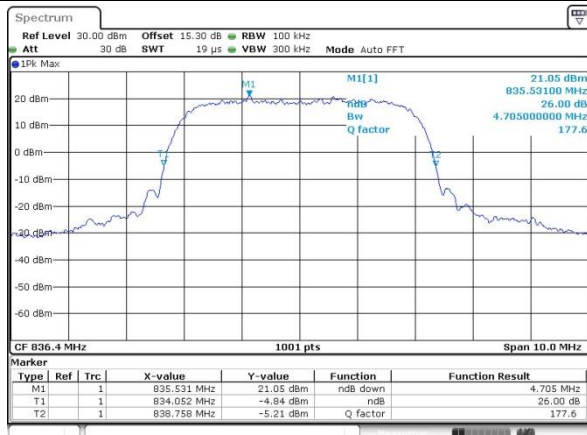


Date: 2 JUL 2021 06:56:01

Middle Channel

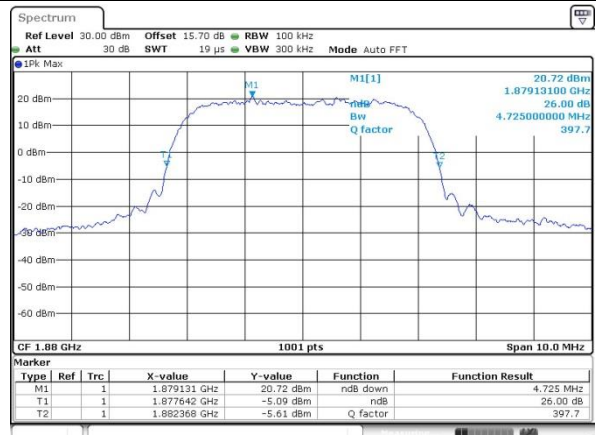


Date: 2 JUL 2021 07:14:02

Highest Channel

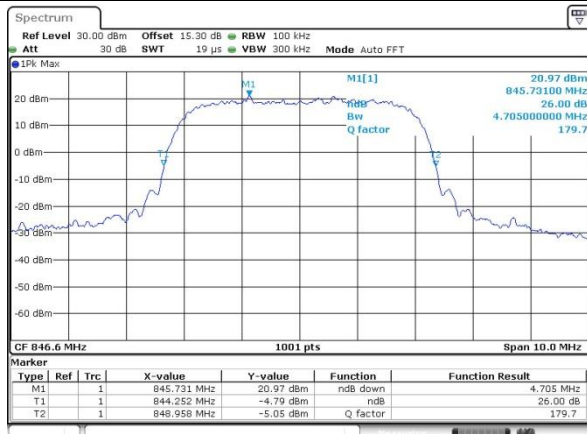

Date: 2 JUL 2021 06:56:27

Highest Channel

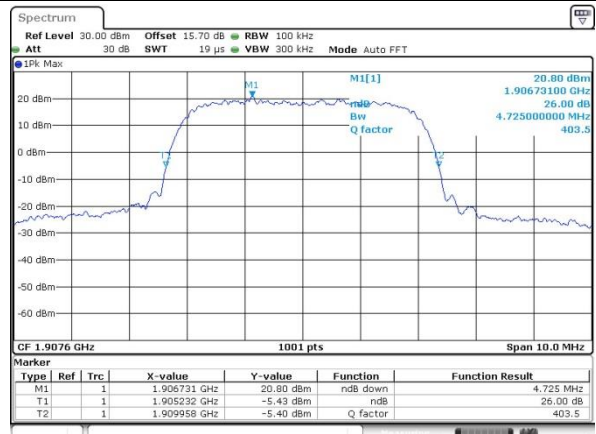


Date: 2 JUL 2021 07:14:44




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

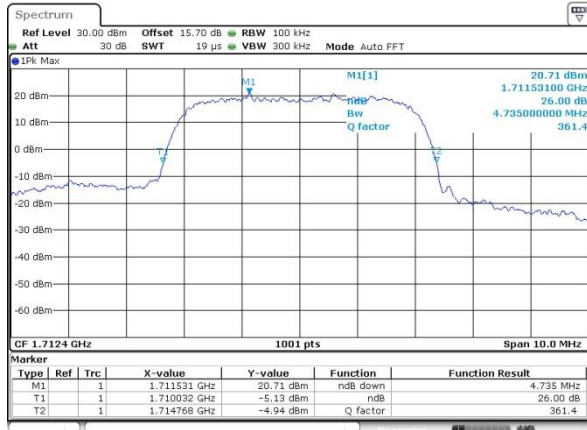

Middle Channel

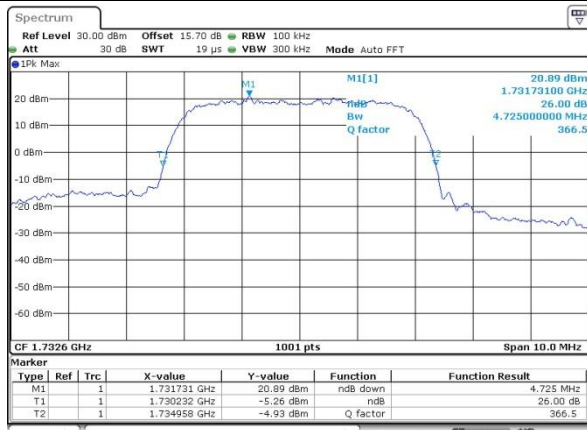

Highest Channel

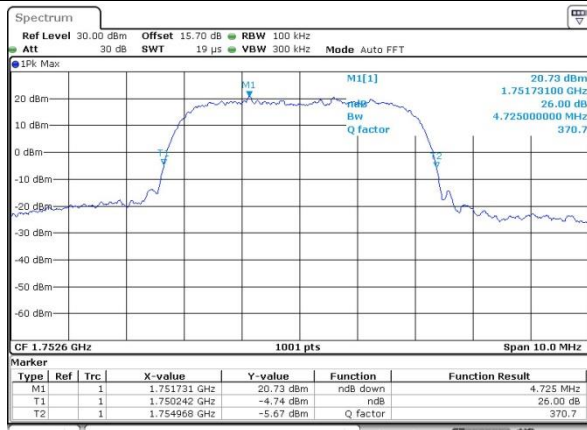


**Occupied Bandwidth**

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.14	4.16	4.16
Middle CH	4.13	4.14	4.15
Highest CH	4.13	4.15	4.15




WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

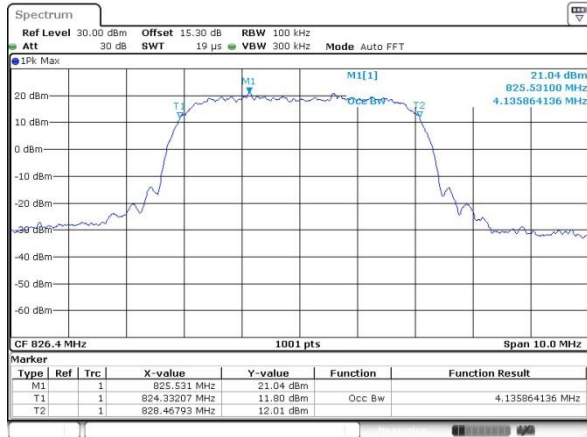


WCDMA Band II (RMC 12.2Kbps)


Lowest Channel

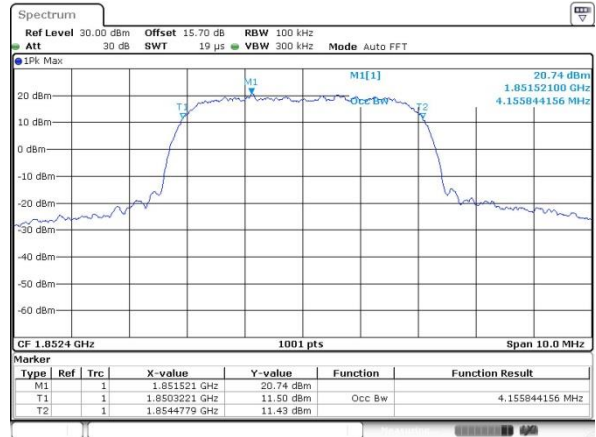


Middle Channel

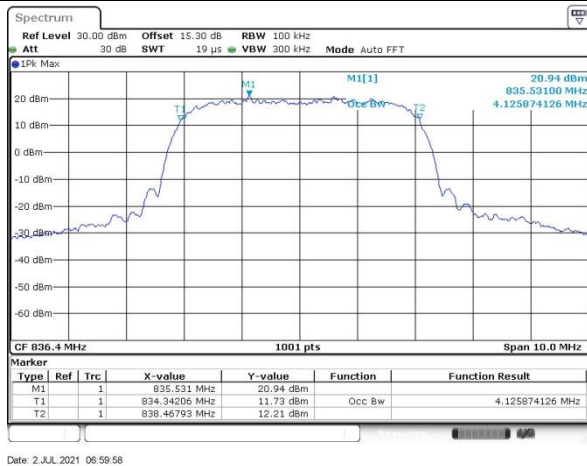


Middle Channel

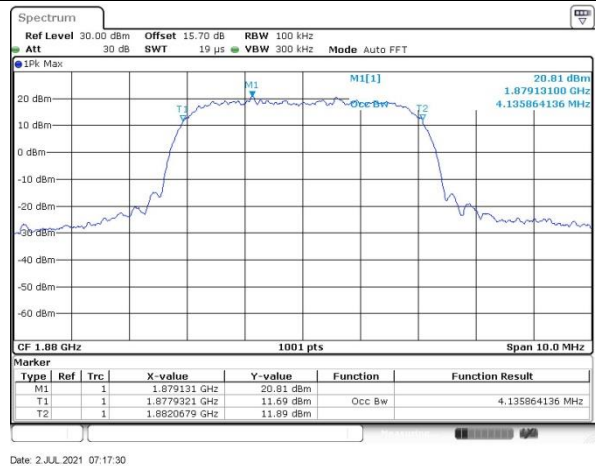

Highest Channel

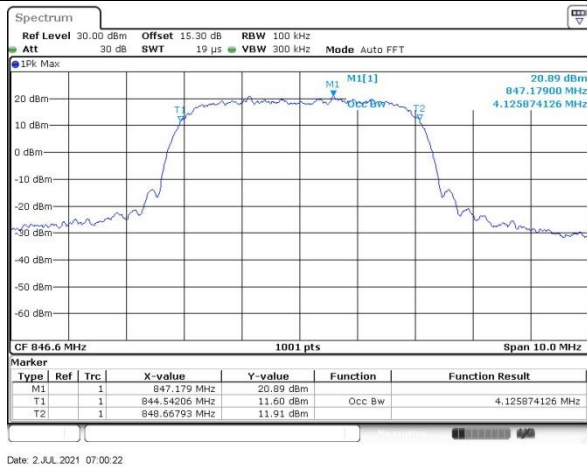


Highest Channel

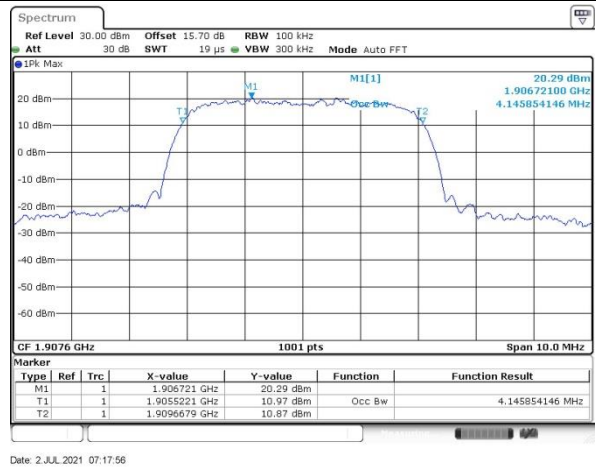




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

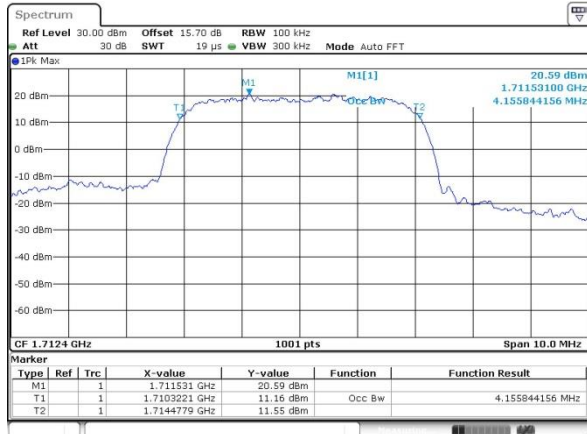

Middle Channel

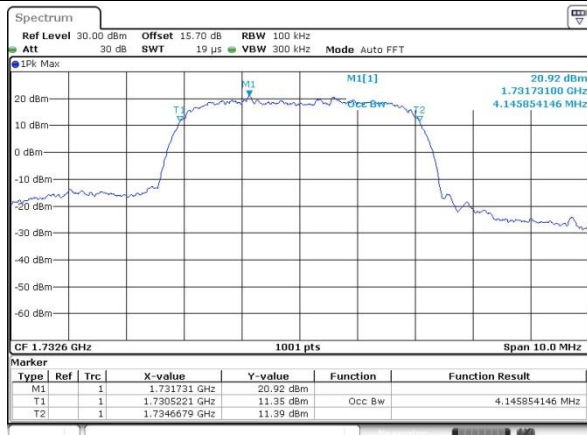


Highest Channel

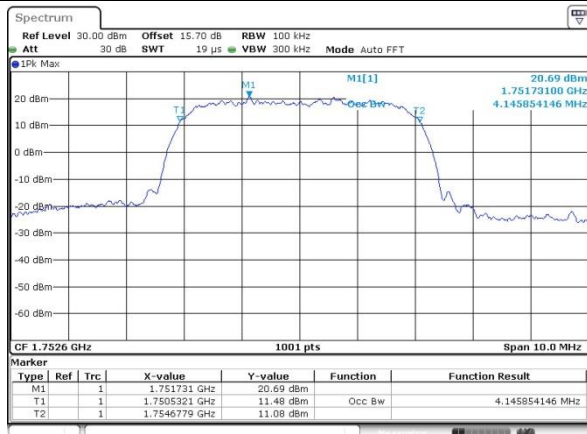




Conducted Band Edge

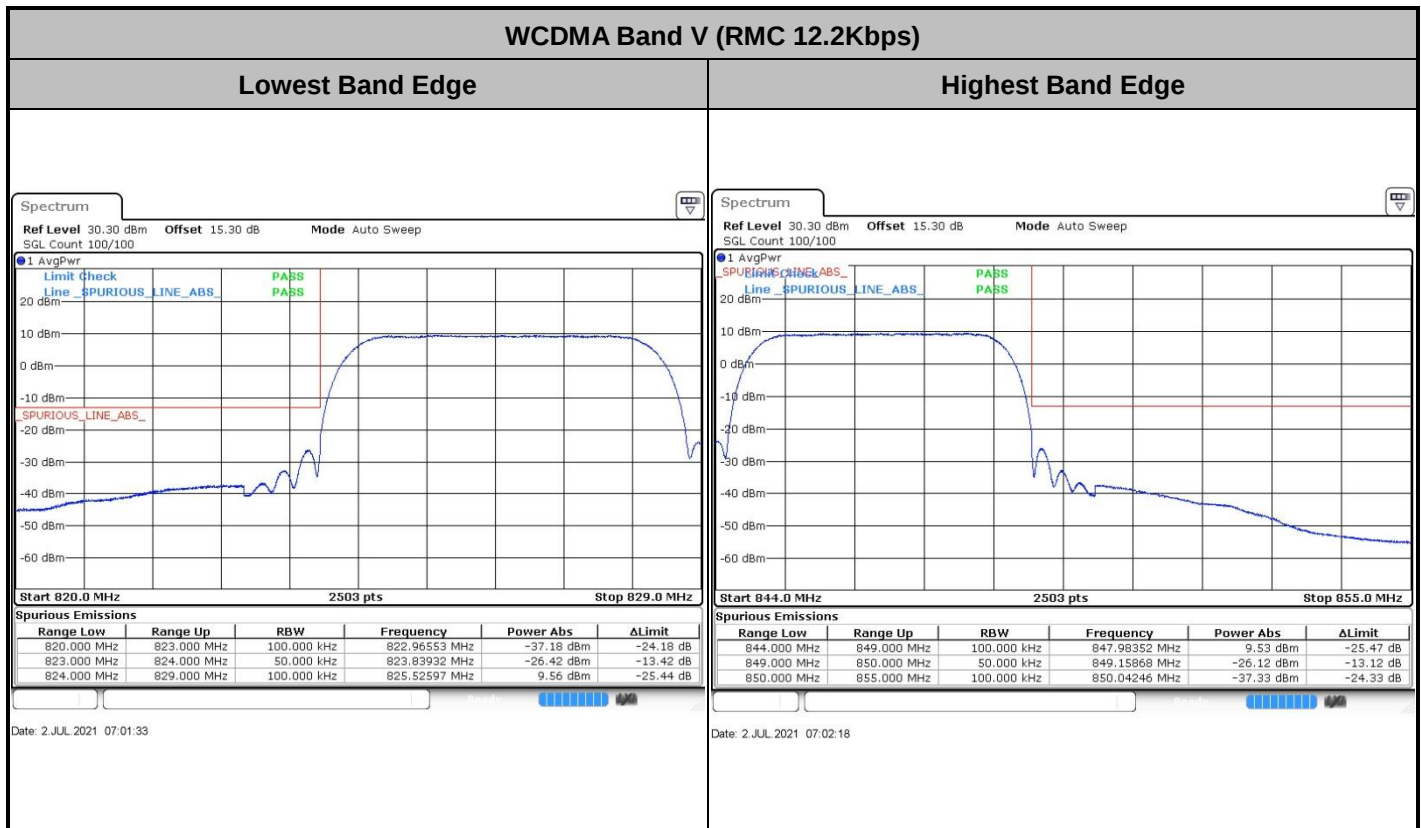




WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

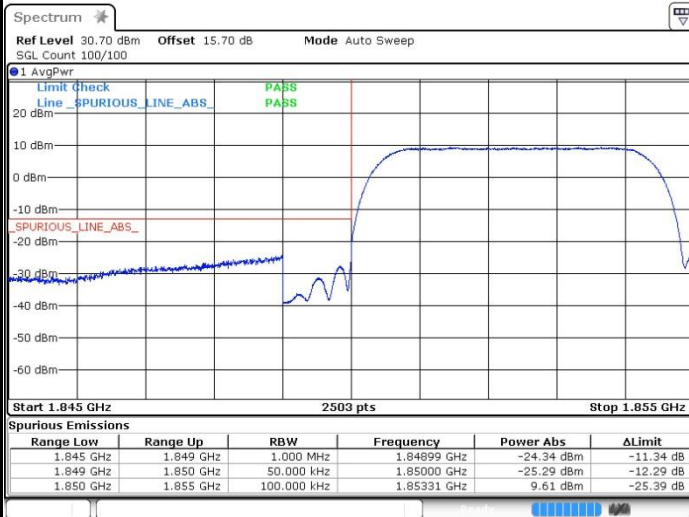


Highest Band Edge

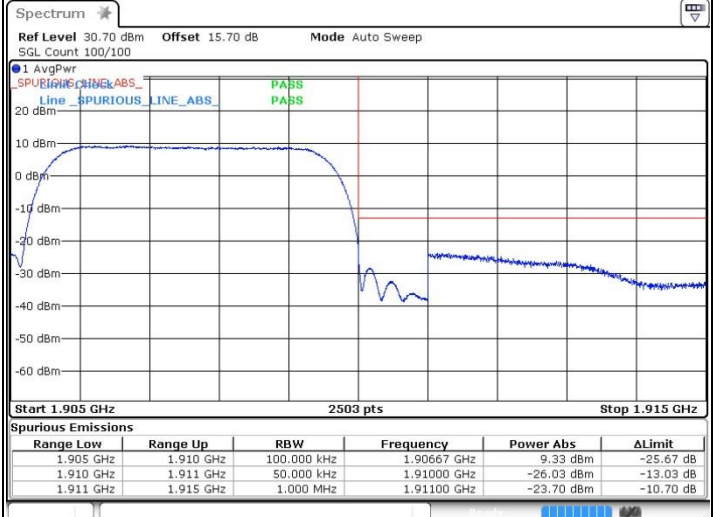


WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

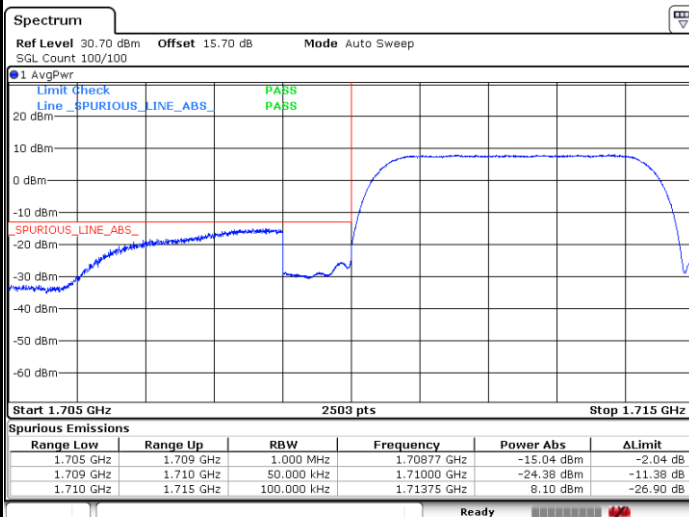

Highest Band Edge

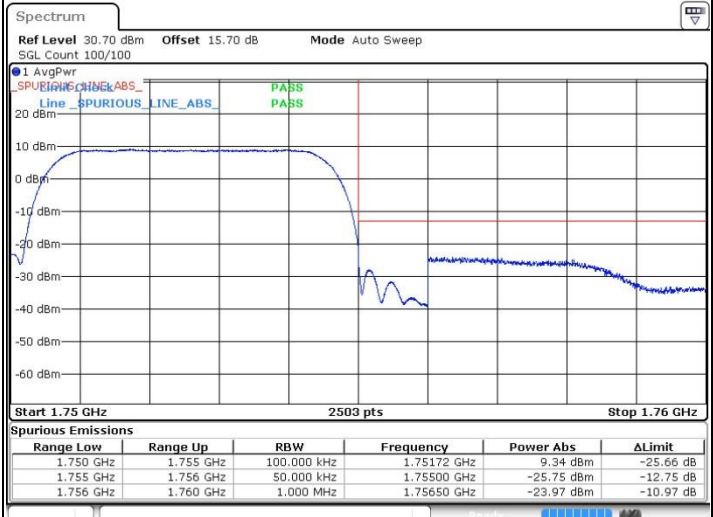




Conducted Spurious Emission

WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

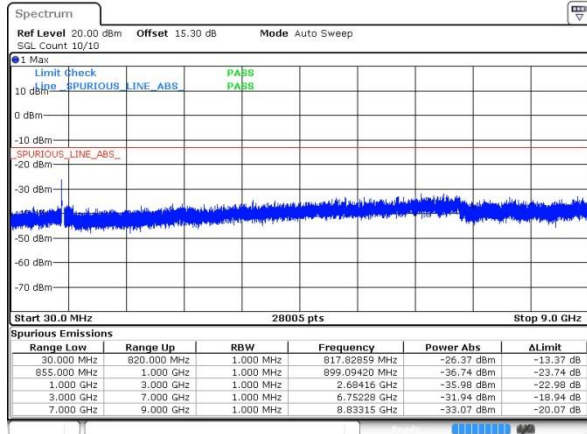

Date: 2 JUL 2021 07:02:48


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

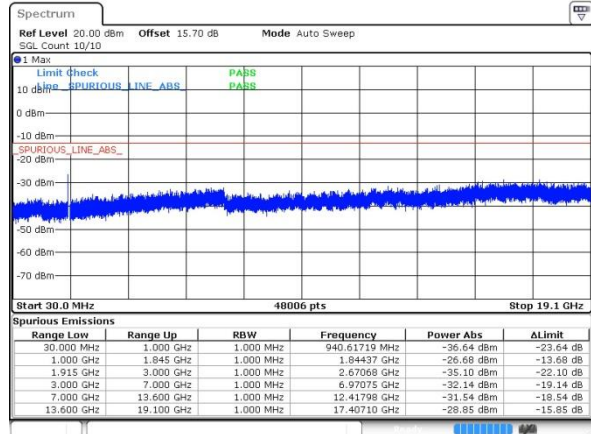


Date: 2 JUL 2021 07:19:58

Middle Channel

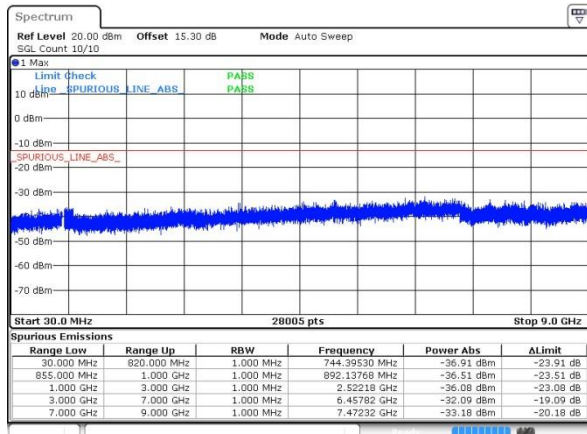


Date: 2 JUL 2021 07:03:20

Middle Channel

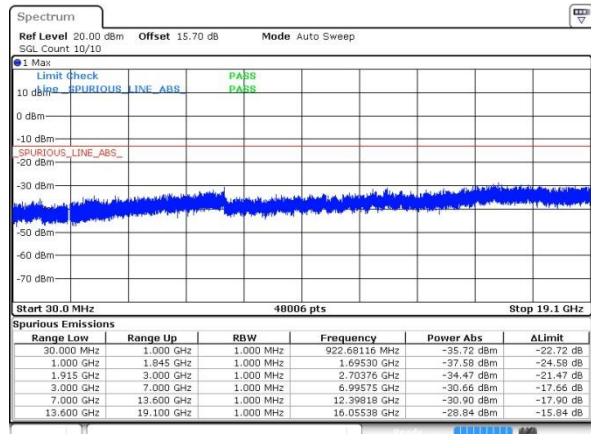


Date: 2 JUL 2021 07:20:22

Highest Channel

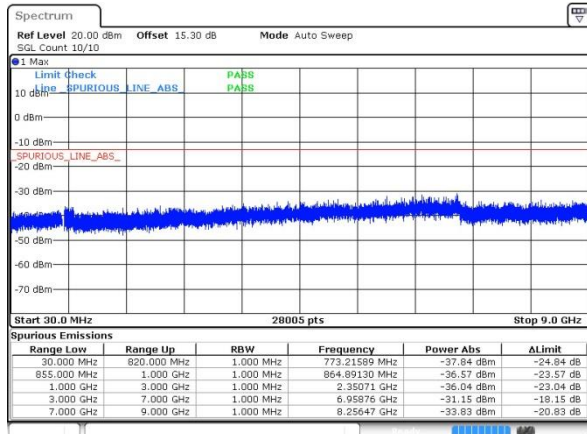

Date: 2 JUL 2021 07:09:18

Highest Channel

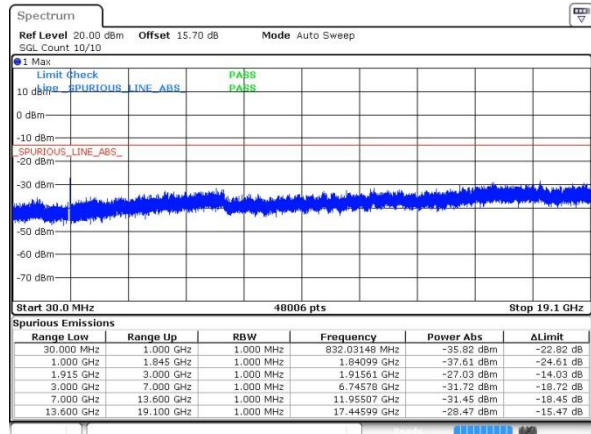


Date: 2 JUL 2021 07:20:47




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

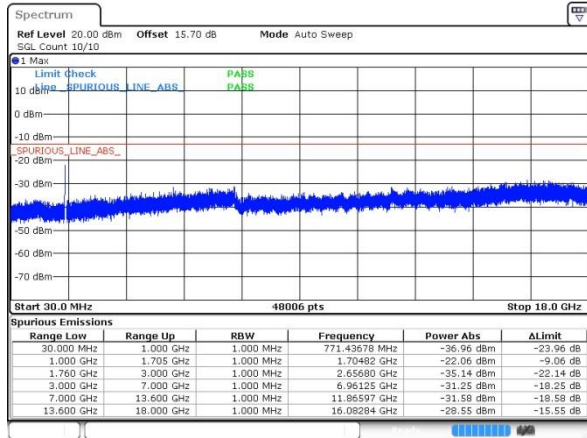


Date: 2 JUL 2021 07:52:33

Middle Channel

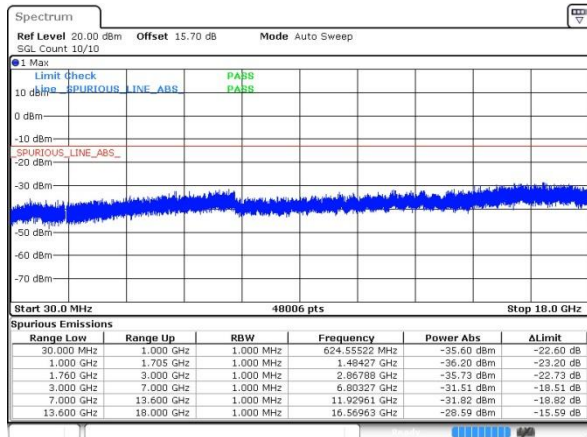

Date: 2 JUL 2021 07:52:58

Highest Channel

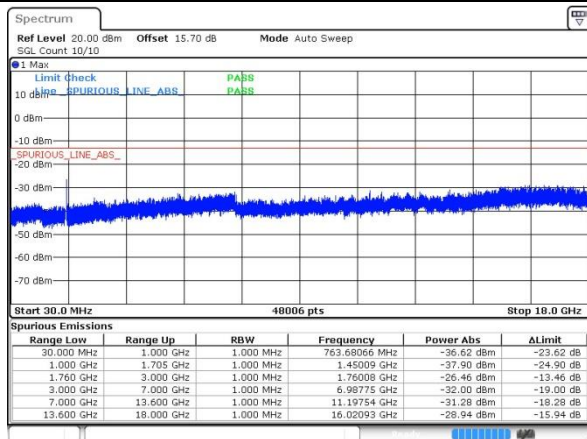

Date: 2 JUL 2021 07:53:23

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2KbpsRMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0058	PASS
40	Normal Voltage	0.0377	
30	Normal Voltage	0.0485	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0069	
0	Normal Voltage	0.0344	
-10	Normal Voltage	0.0063	
-20	Normal Voltage	0.0141	
-30	Normal Voltage	0.0325	
20	Maximum Voltage	0.0418	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0063	

Note: Normal Voltage = 3.87V ; Battery End Point (BEP) =3.6V. ; Maximum Voltage =4.4V



Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0169	PASS
40	Normal Voltage	0.0136	
30	Normal Voltage	0.0144	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0155	
0	Normal Voltage	0.0136	
-10	Normal Voltage	0.0247	
-20	Normal Voltage	0.0072	
-30	Normal Voltage	0.0169	
20	Maximum Voltage	0.0162	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0019	

Note:

1. Normal Voltage = 3.87V ; Battery End Point (BEP) =3.6V. ; Maximum Voltage =4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0048	PASS
40	Normal Voltage	0.0146	
30	Normal Voltage	0.0003	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0017	
0	Normal Voltage	0.0044	
-10	Normal Voltage	0.0172	
-20	Normal Voltage	0.0163	
-30	Normal Voltage	0.0061	
20	Maximum Voltage	0.0028	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0118	

Note:

1. Normal Voltage = 3.87V ; Battery End Point (BEP) =3.6V. ; Maximum Voltage =4.4V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Pre-scanned harmonic in three orthogonal panels, X, Y, Z for the different antenna for Adapter mode and Earphone mode, we choose the worst mode to test.

GSM850 (GSM) Ant 1 for Adapter mode								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-63.96	-13	-50.96	-70.93	1.58	10.70	H
	2510	-57.92	-13	-44.92	-66.17	2.102	12.50	H
	3348	-60.06	-13	-47.06	-68.95	2.856	13.90	H
	1672	-62.71	-13	-49.71	-69.68	1.58	10.70	V
	2510	-56.77	-13	-43.77	-65.02	2.10	12.50	V
	3348	-59.93	-13	-46.93	-68.82	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM850 (EDGE 1 Tx slots) Ant 4 for Adapter mode								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-64.64	-13	-51.64	-71.61	1.58	10.70	H
	2510	-57.57	-13	-44.57	-65.82	2.102	12.50	H
	3348	-60.23	-13	-47.23	-69.12	2.856	13.90	H
	1672	-63.73	-13	-50.73	-70.70	1.58	10.70	V
	2510	-56.90	-13	-43.90	-65.15	2.10	12.50	V
	3348	-60.30	-13	-47.30	-69.19	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (GSM) Ant 3 for Adapter mode								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3759	-56.89	-13	-43.89	-69.15	2.641	14.90	H
	5640	-54.98	-13	-41.98	-66.84	2.94	14.80	H
	7524	-52.70	-13	-39.70	-62.47	3.39	13.16	H
	3759	-56.79	-13	-43.79	-69.05	2.64	14.90	V
	5640	-55.73	-13	-42.73	-67.59	2.94	14.80	V
	7524	-52.36	-13	-39.36	-62.13	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (EDGE 1 Tx slots) Ant 2 for Adapter mode								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3759	-57.01	-13	-44.01	-69.27	2.641	14.90	H
	5640	-54.83	-13	-41.83	-66.69	2.94	14.80	H
	7524	-52.87	-13	-39.87	-62.64	3.39	13.16	H
	3759	-56.72	-13	-43.72	-68.98	2.64	14.90	V
	5640	-55.59	-13	-42.59	-67.45	2.94	14.80	V
	7524	-53.27	-13	-40.27	-63.04	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band V(RMC 12.2Kbps) Ant 4 for Adapter mode								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-64.91	-13	-51.91	-71.88	1.58	10.70	H
	2510	-60.05	-13	-47.05	-68.30	2.102	12.50	H
	3348	-60.30	-13	-47.30	-69.19	2.856	13.90	H
	1672	-64.14	-13	-51.14	-71.11	1.58	10.70	V
	2510	-59.24	-13	-46.24	-67.49	2.10	12.50	V
	3348	-60.16	-13	-47.16	-69.05	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band II(RMC 12.2Kbps) Ant 2 for Adapter mode								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3759	-57.04	-13	-44.04	-69.30	2.64	14.90	H
	5640	-54.20	-13	-41.20	-66.06	2.94	14.80	H
	7524	-52.76	-13	-39.76	-62.53	3.39	13.16	H
	3759	-56.38	-13	-43.38	-68.64	2.64	14.90	V
	5640	-55.63	-13	-42.63	-67.49	2.94	14.80	V
	7524	-52.85	-13	-39.85	-62.62	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band IV(RMC 12.2Kbps) Ant 2 for Adapter mode								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3465	-57.71	-13	-44.71	-68.45	2.604	13.34	H
	5199	-54.78	-13	-41.78	-65.29	3.011	13.52	H
	6936	-54.62	-13	-41.62	-64.82	3.271	13.47	H
	3465	-57.95	-13	-44.95	-68.69	2.604	13.34	V
	5199	-54.85	-13	-41.85	-65.36	3.011	13.52	V
	6936	-54.45	-13	-41.45	-64.65	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.